



1.6dB Bandwidth& 99%Occupied Bandwidth

Test Mode	Test Channel	Ant	99%Occupied Bandwidth [MHz]	EBW[MHz]	Limit	Verdict
BLE	2402	Ant1	1.0359	0.6929	0.5	PASS
BLE	2440	Ant1	1.0367	0.6870	0.5	PASS
BLE	2480	Ant1	1.0327	0.6964	0.5	PASS


6dB Bandwidth_BLE_2402_Ant1

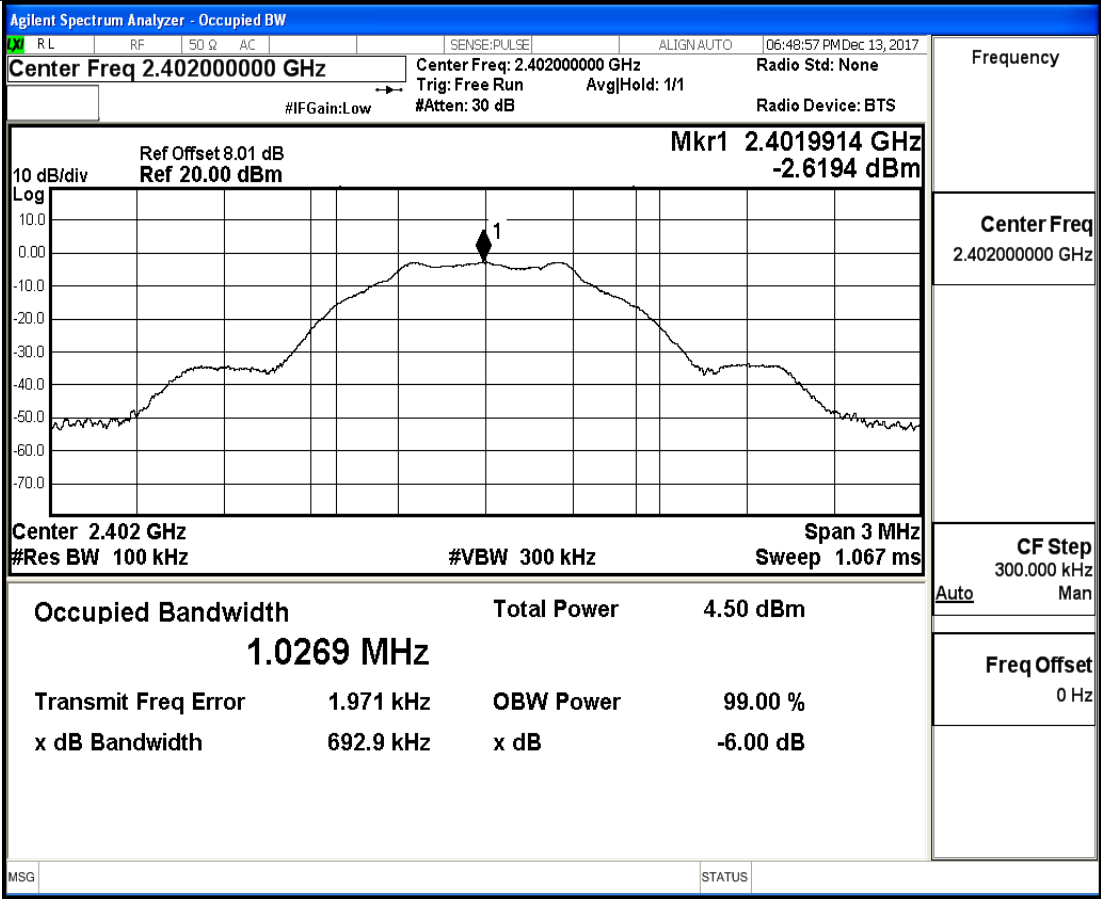


6dB Bandwidth_BLE_2440_Ant1

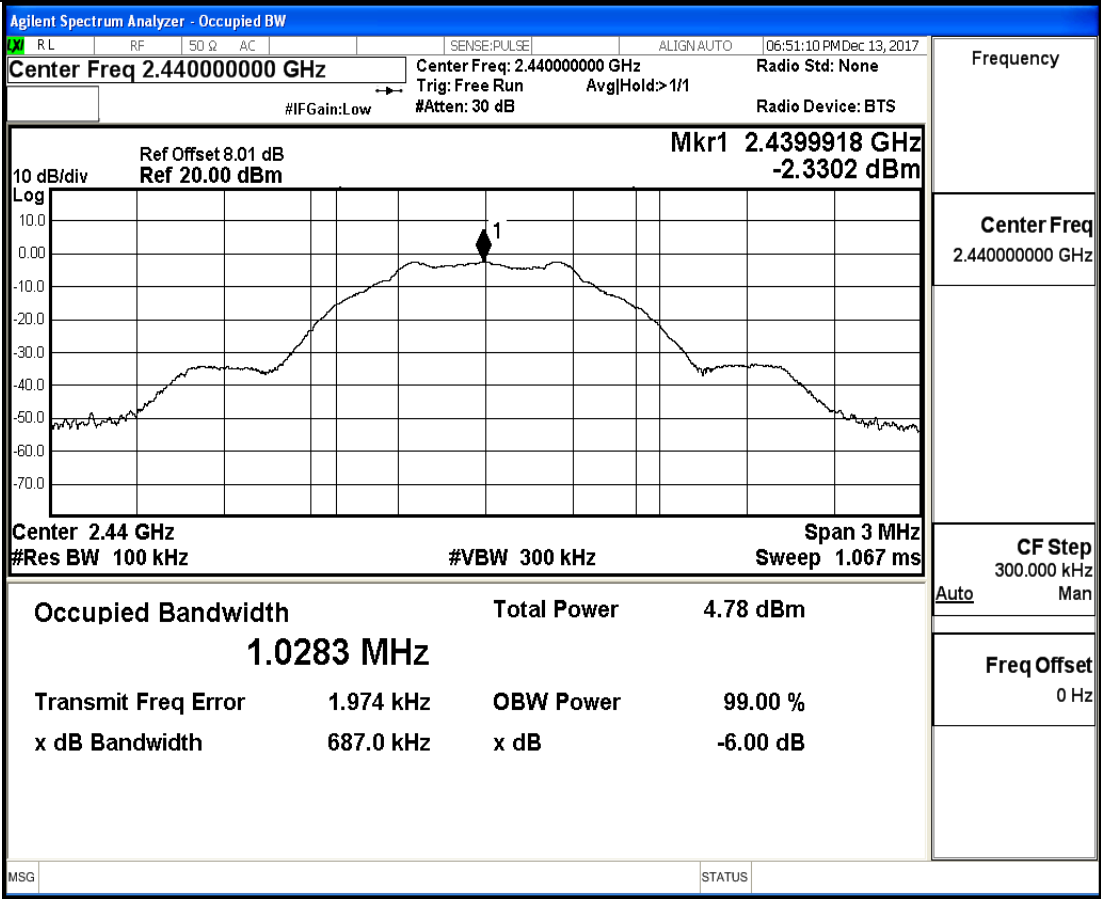


6dB Bandwidth_BLE_2480_Ant1

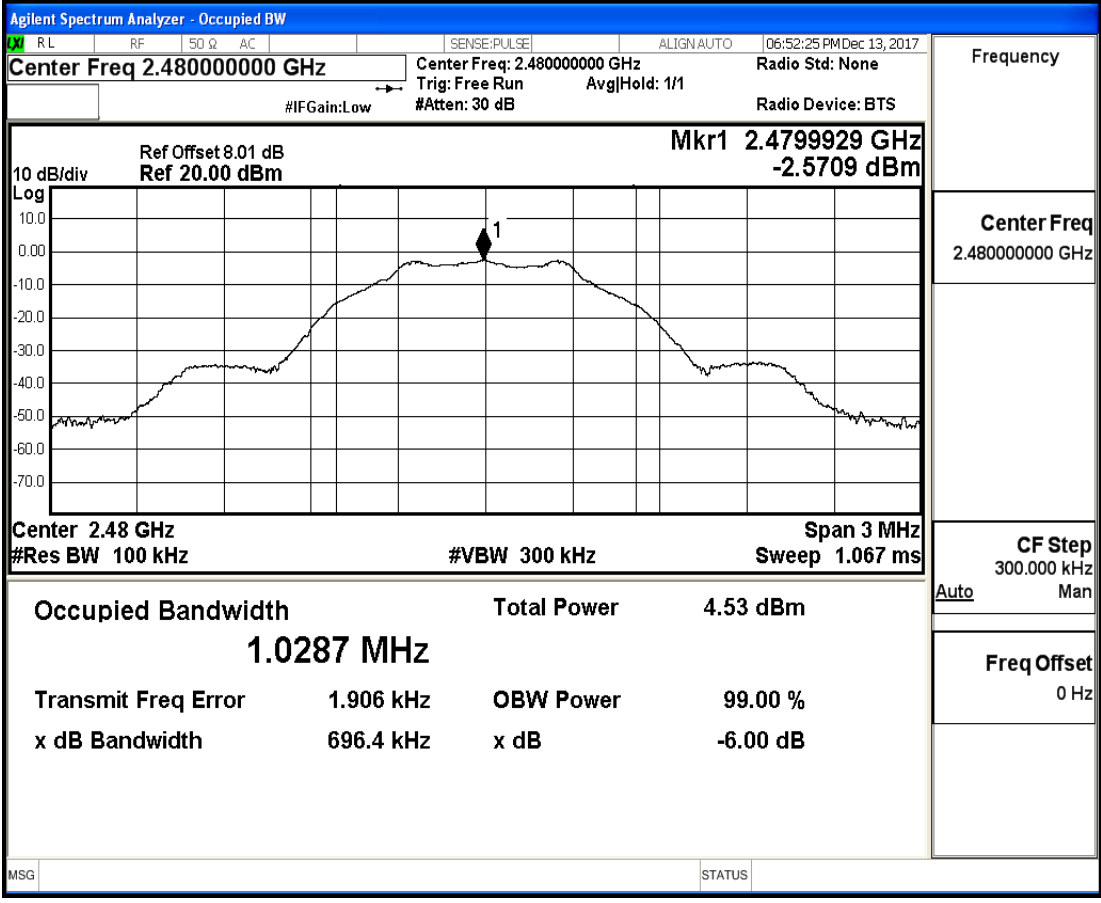


Occupied Bandwidth_BLE_2402_Ant1

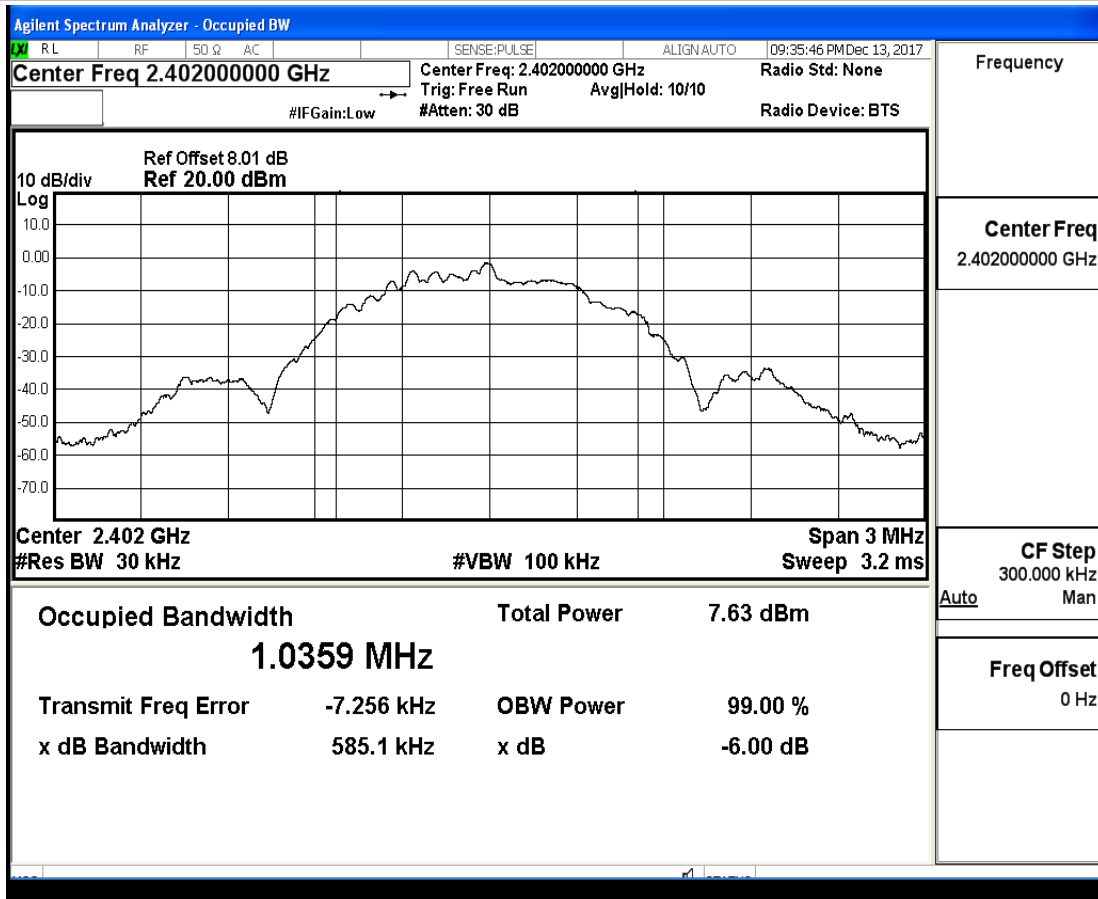

Occupied Bandwidth_BLE_2440_Ant1

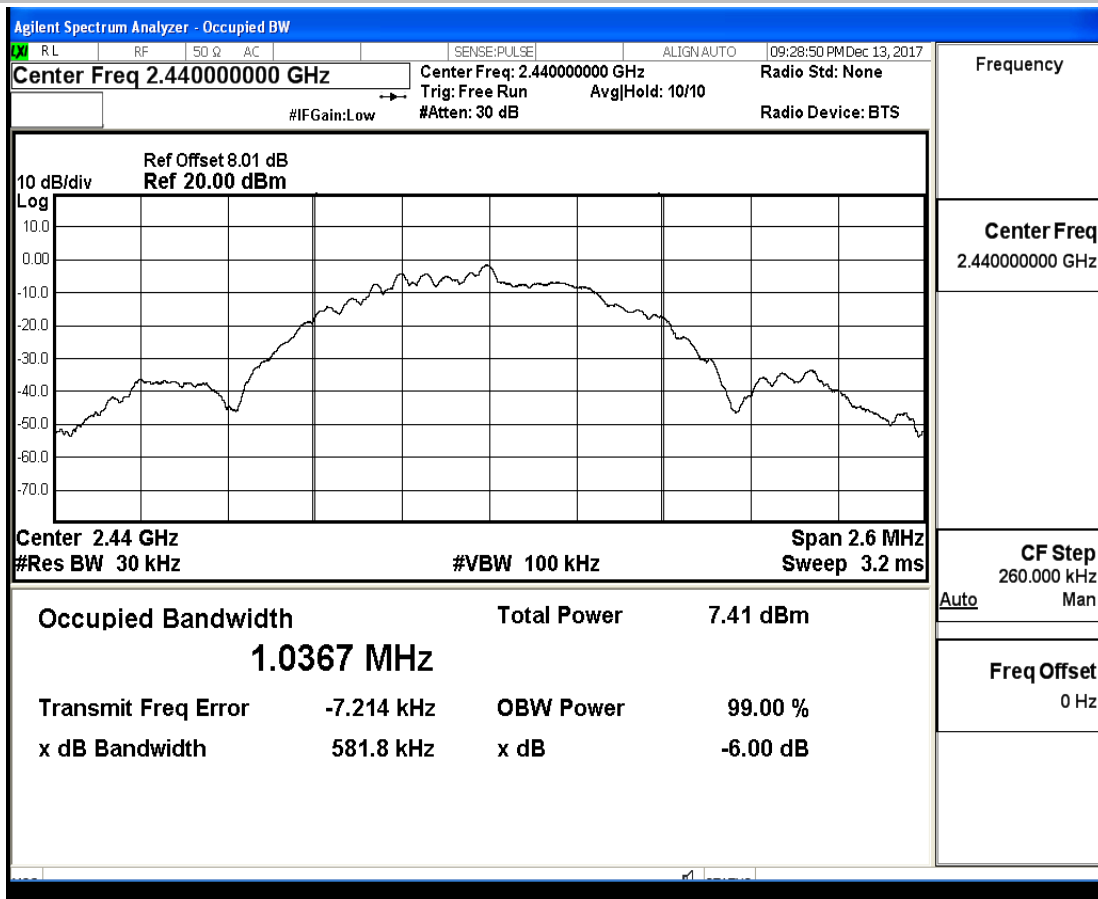


Occupied Bandwidth_BLE_2480_Ant1

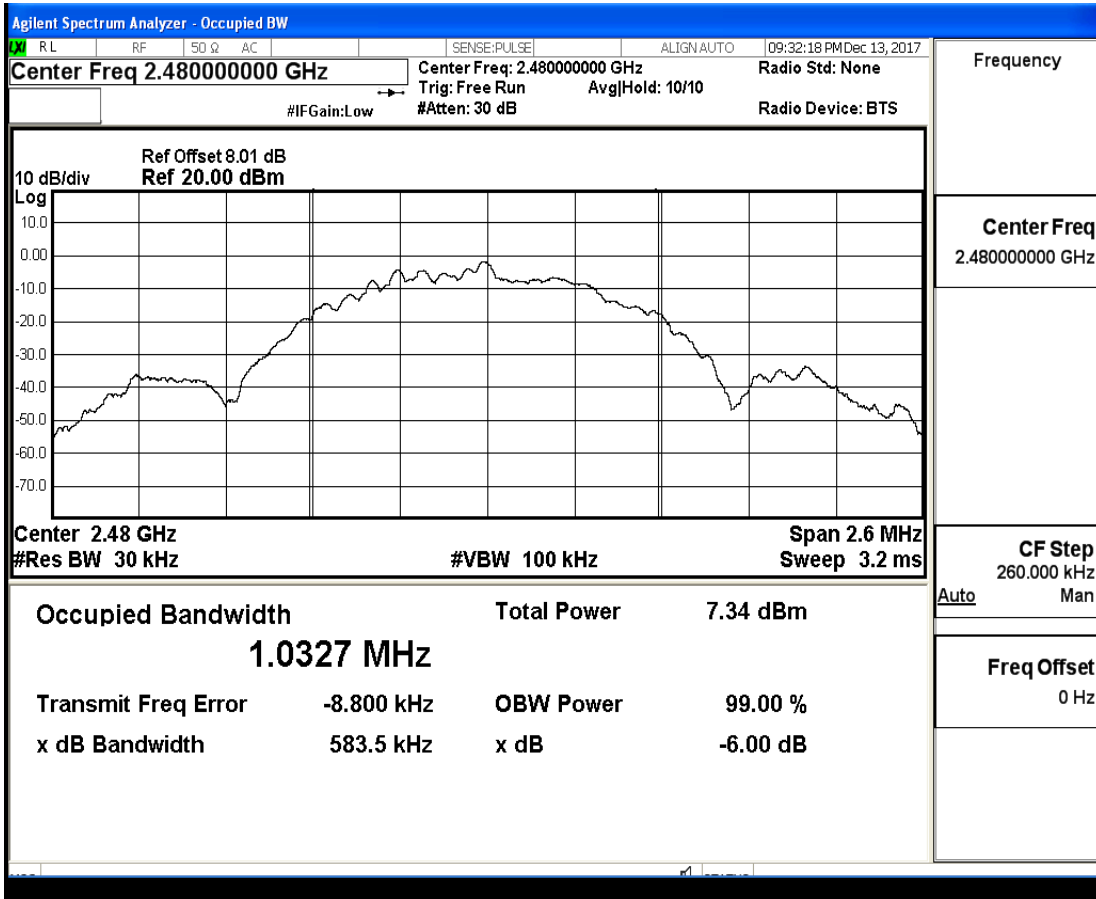


3.Maximum peak conducted output power

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	-1.684	30	PASS
BLE	2440	Ant1	-1.384	30	PASS
BLE	2480	Ant1	-1.612	30	PASS


Maximum peak conducted output power_BLE_2402_Ant1

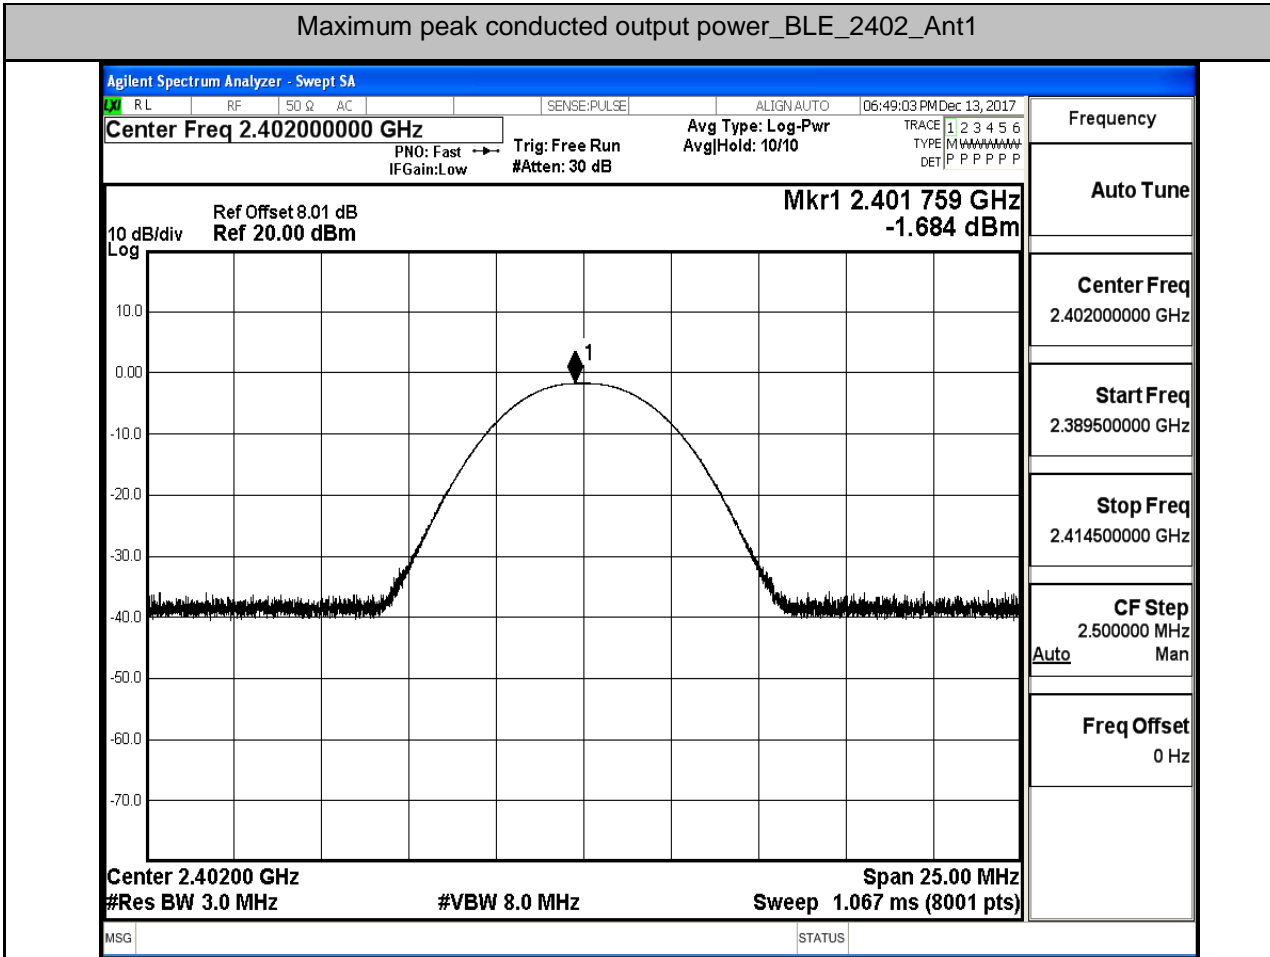

Maximum peak conducted output power_BLE_2440_Ant1

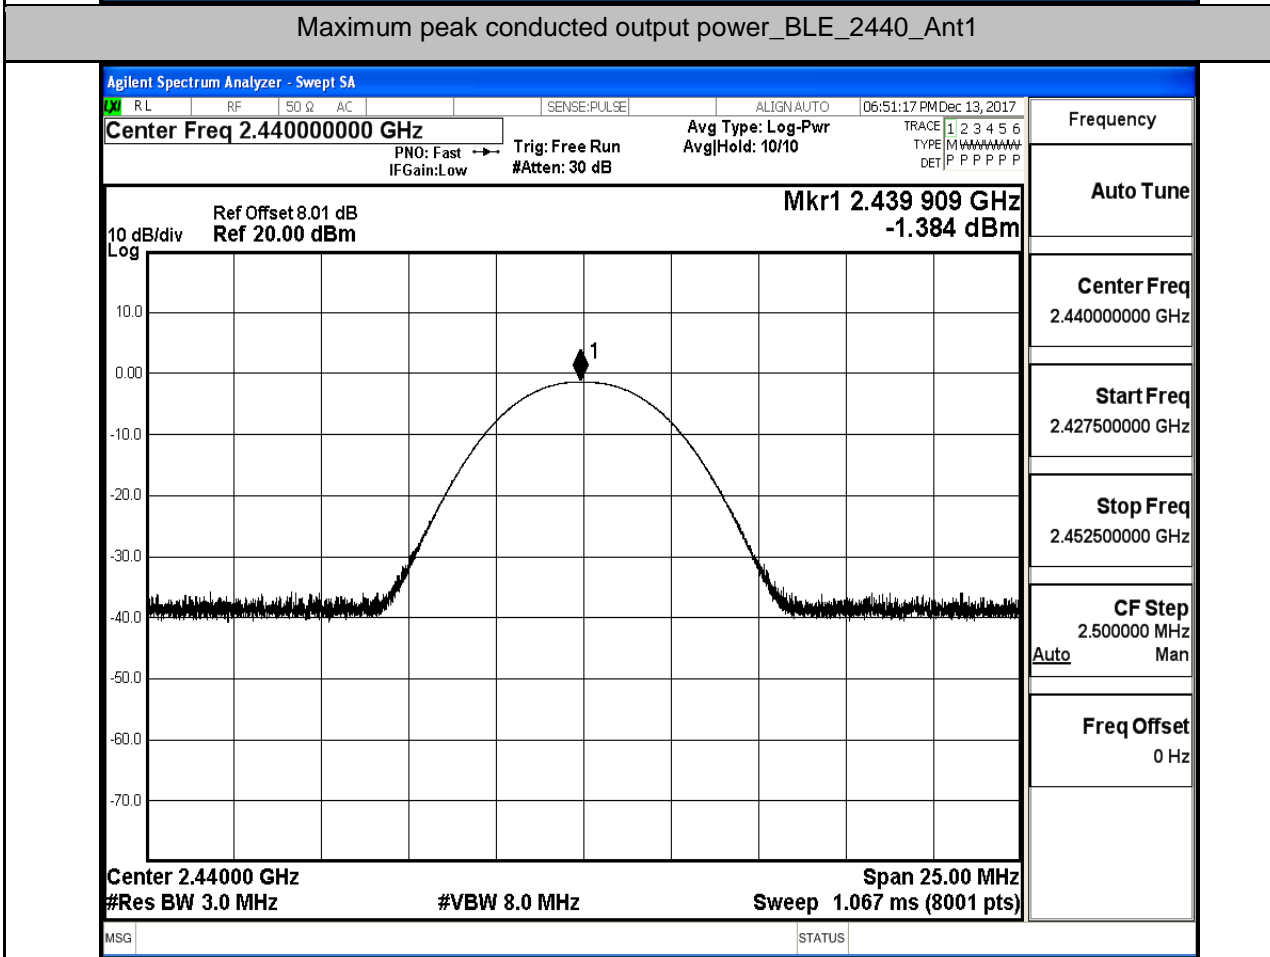


Maximum peak conducted output power_BLE_2480_Ant1

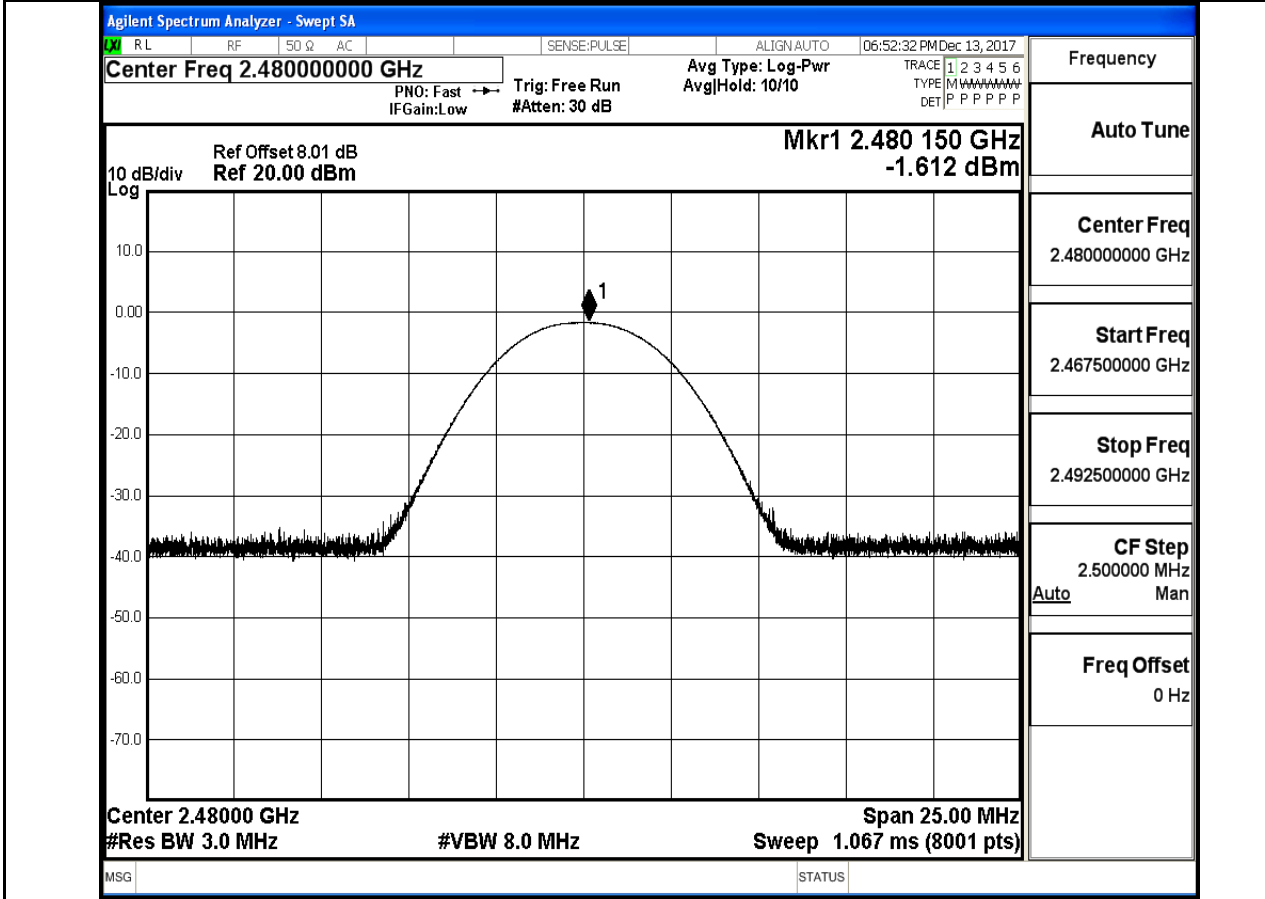

4. Maximum Peak power spectral density

Test Mode	Test Channel	Ant	PSD[dBm/3KHz]	Limit[dBm/3KHz]	Verdict
BLE	2402	Ant1	-17.182	8.00	PASS
BLE	2440	Ant1	-16.942	8.00	PASS
BLE	2480	Ant1	-17.111	8.00	PASS


Maximum Peak power spectral density_BLE_2480_Ant1

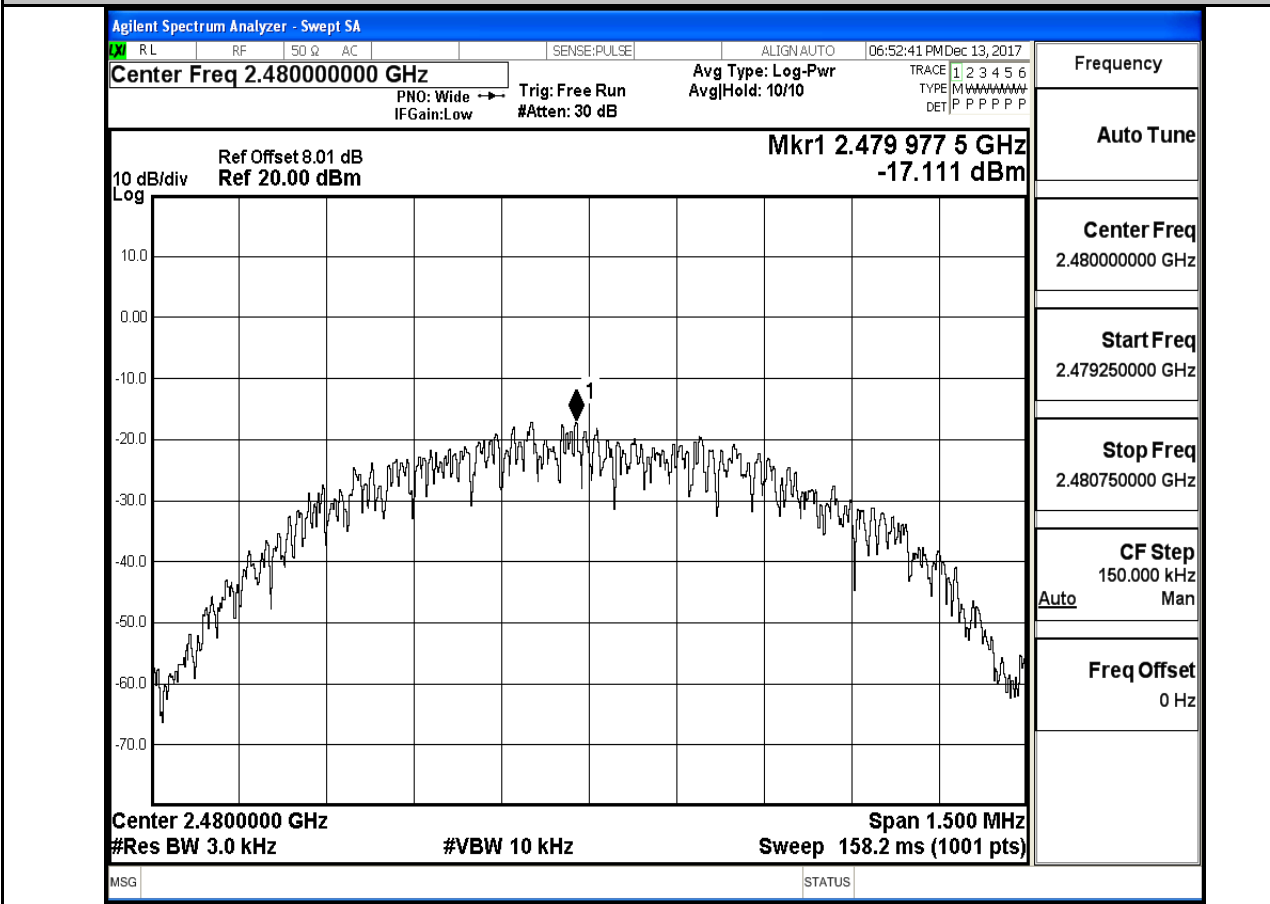


5.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	-2.476	-50.807	-22.48	PASS
BLE	2480	Ant1	-2.528	-50.288	-22.53	PASS

Band-edge for RF Conducted Emissions_BLE_2402_Ant1

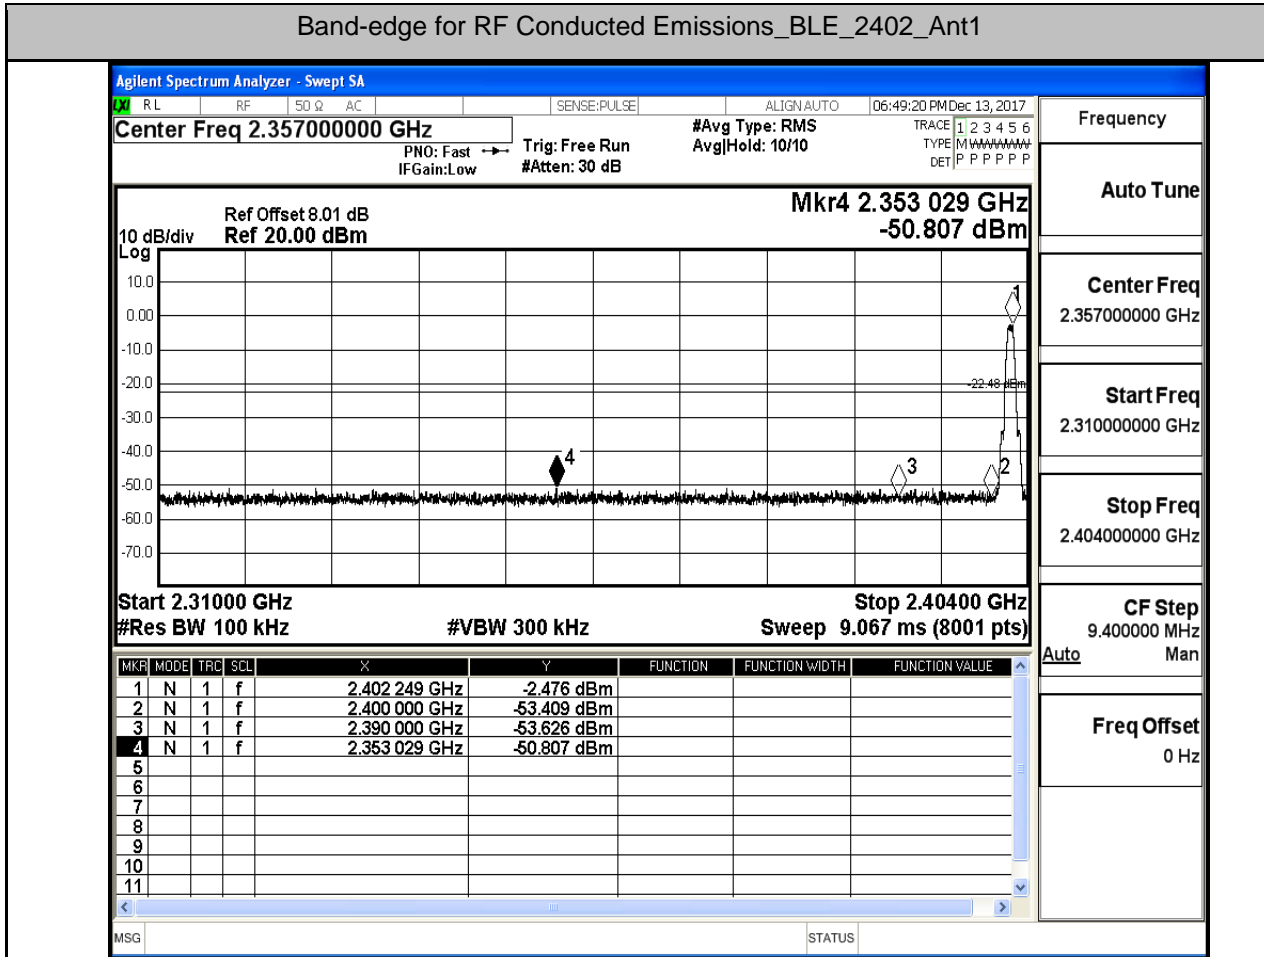



Band-edge for RF Conducted Emissions_BLE_2480_Ant1

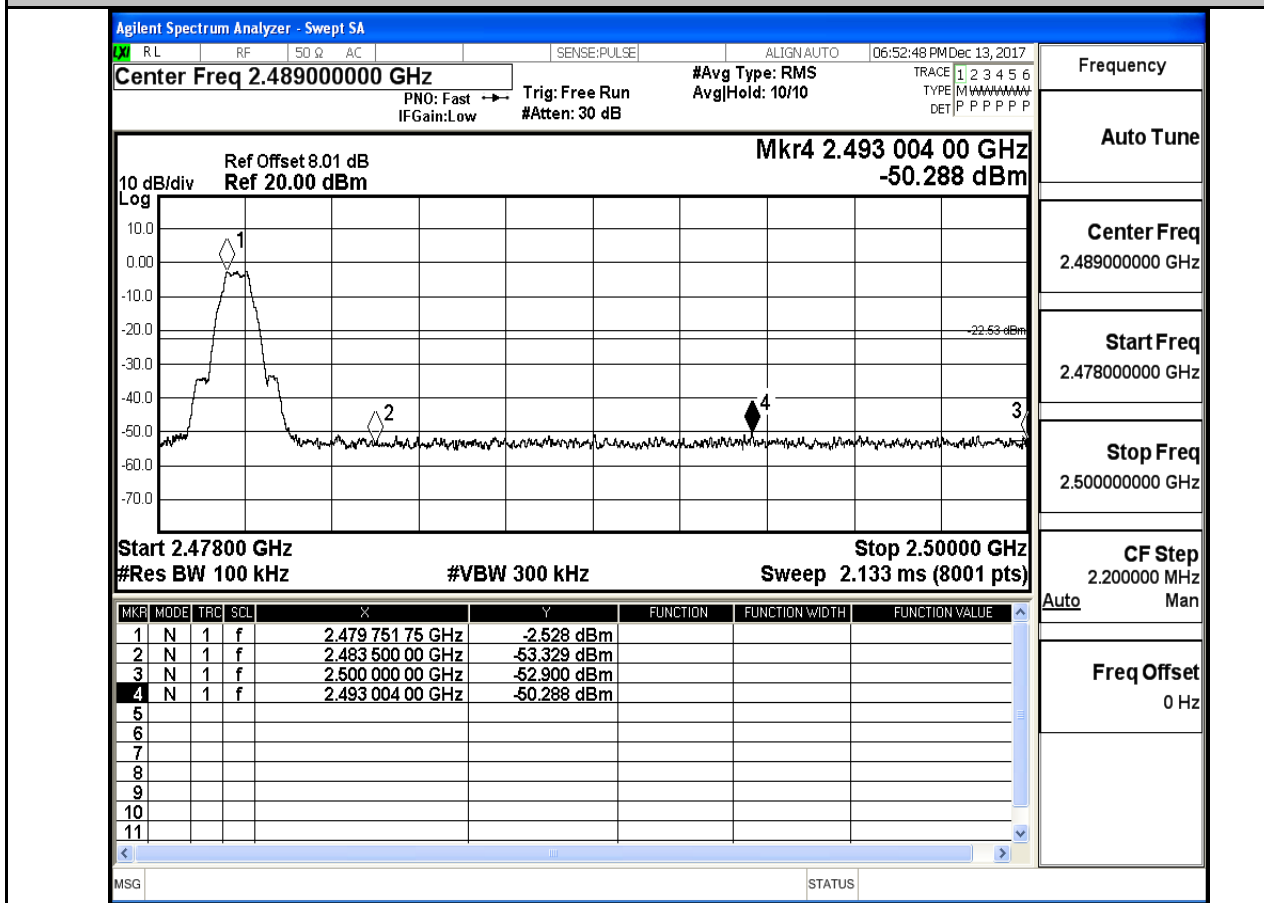



6.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	30	25000	100	300	-2.641	-44.011	<-22.641	PASS
BLE	2440	Ant1	30	25000	100	300	-2.362	-43.565	<-22.362	PASS
BLE	2480	Ant1	30	25000	100	300	-2.584	-44.280	<-22.584	PASS



RF Conducted Spurious Emissions_BLE_2402_Ant1

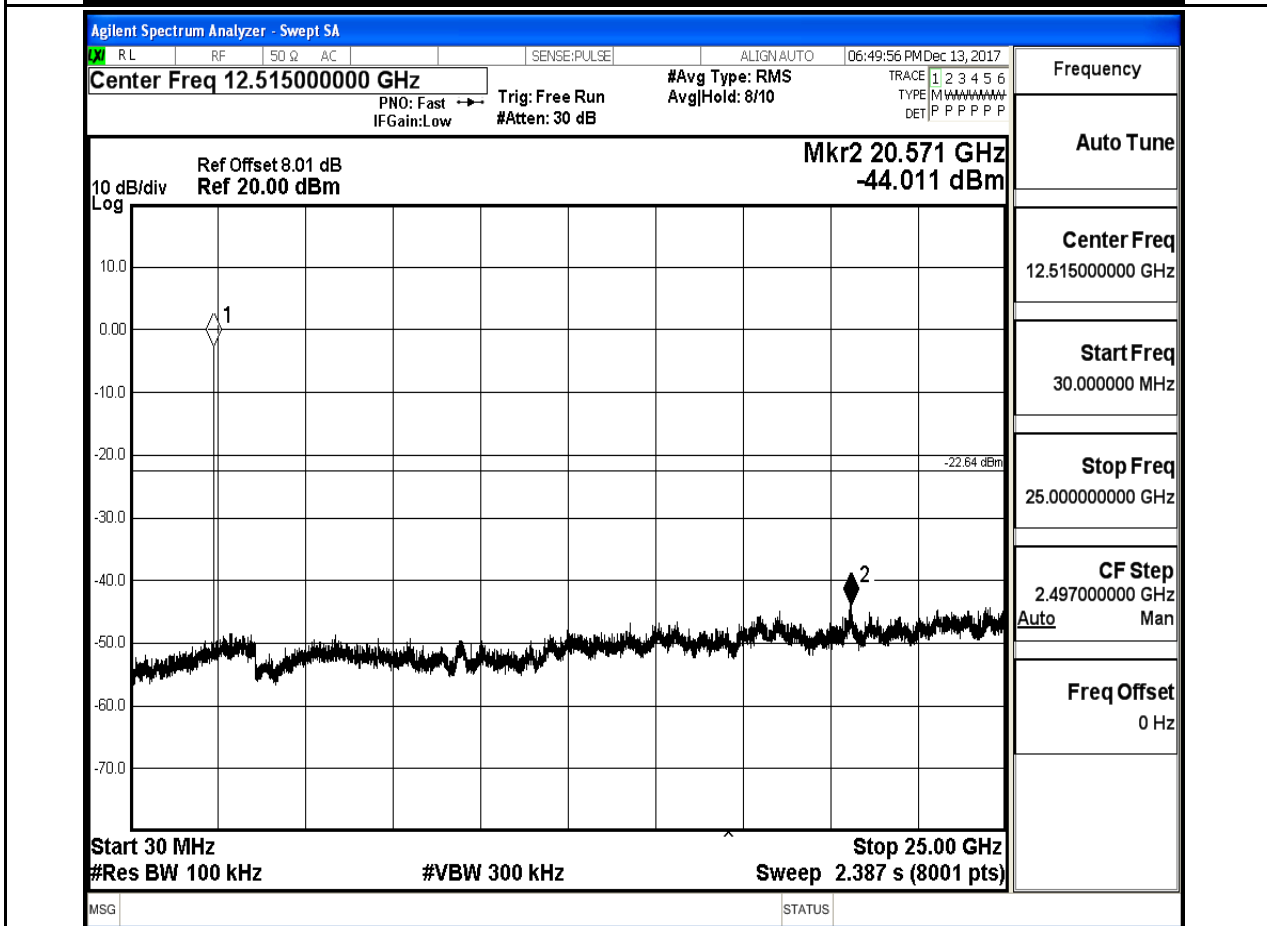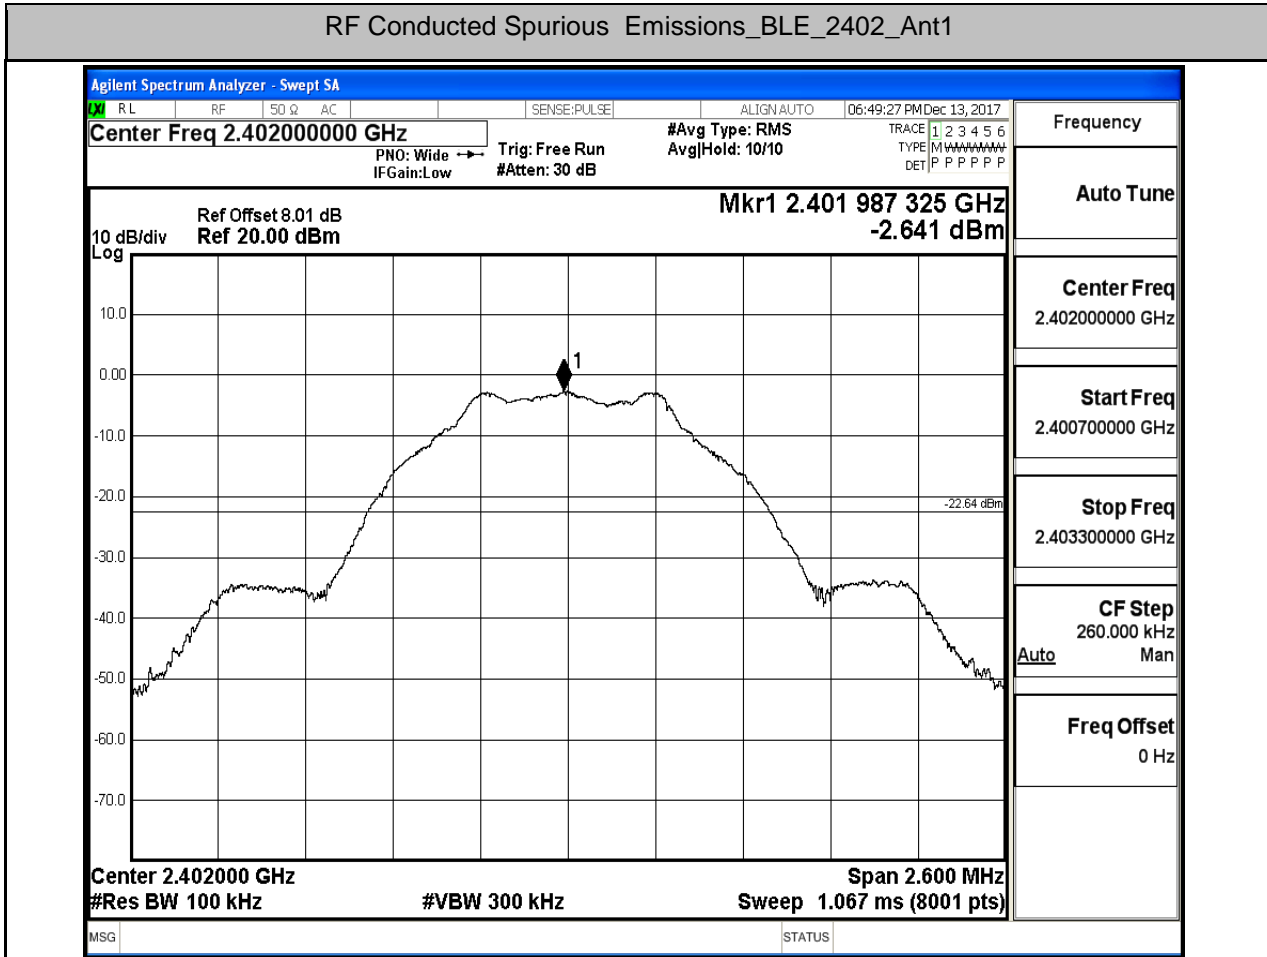

RF Conducted Spurious Emissions_BLE_2440_Ant1

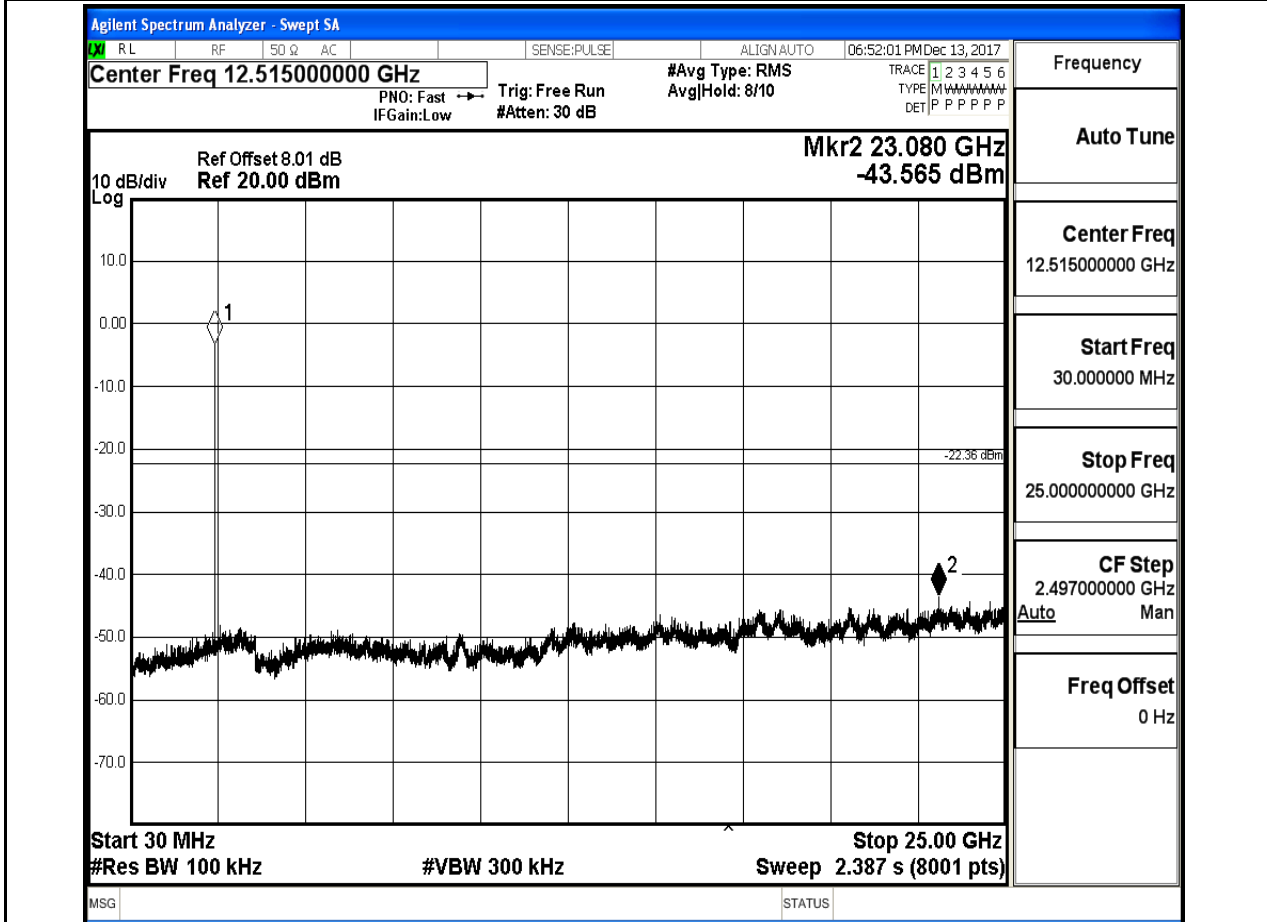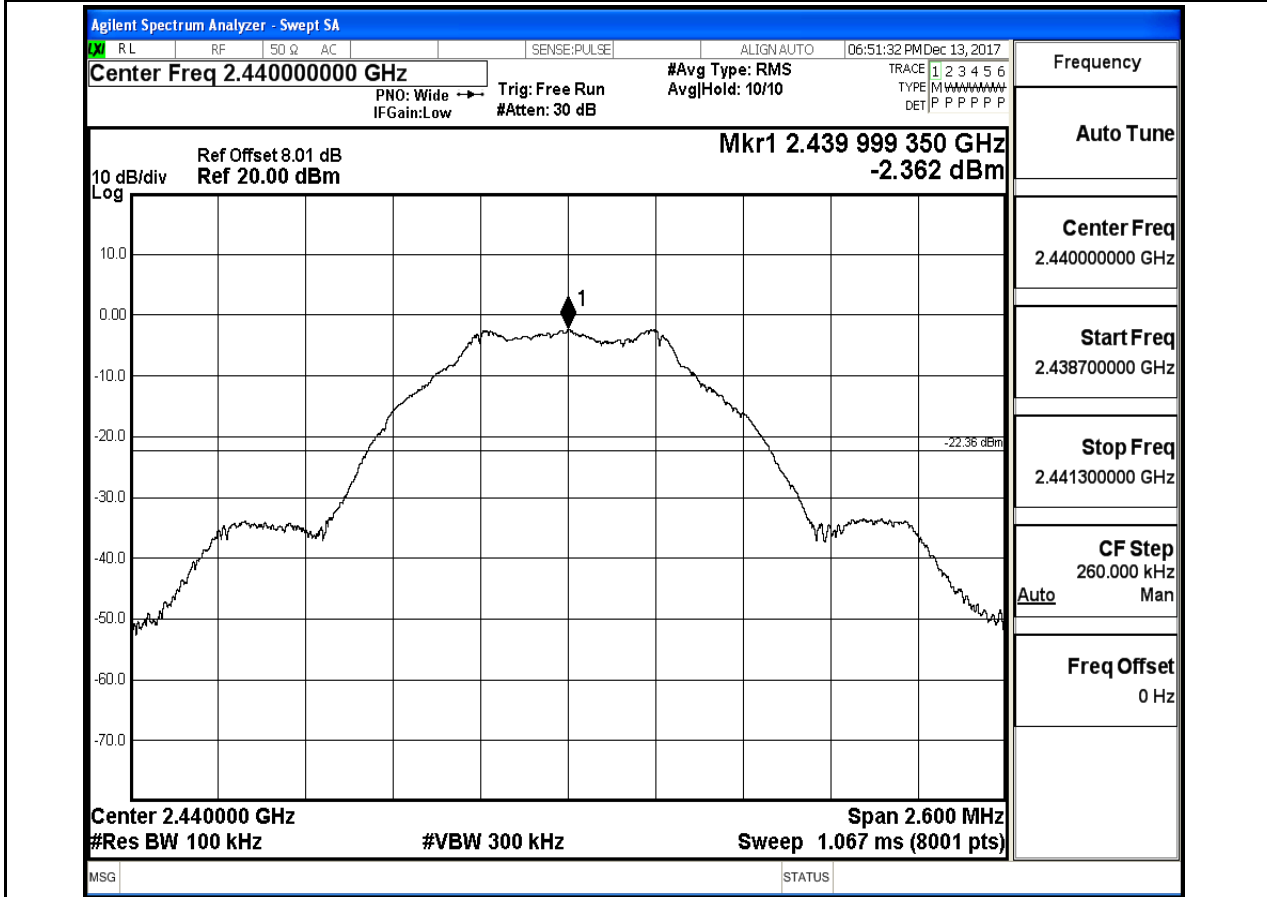


RF Conducted Spurious Emissions_BLE_2480_Ant1

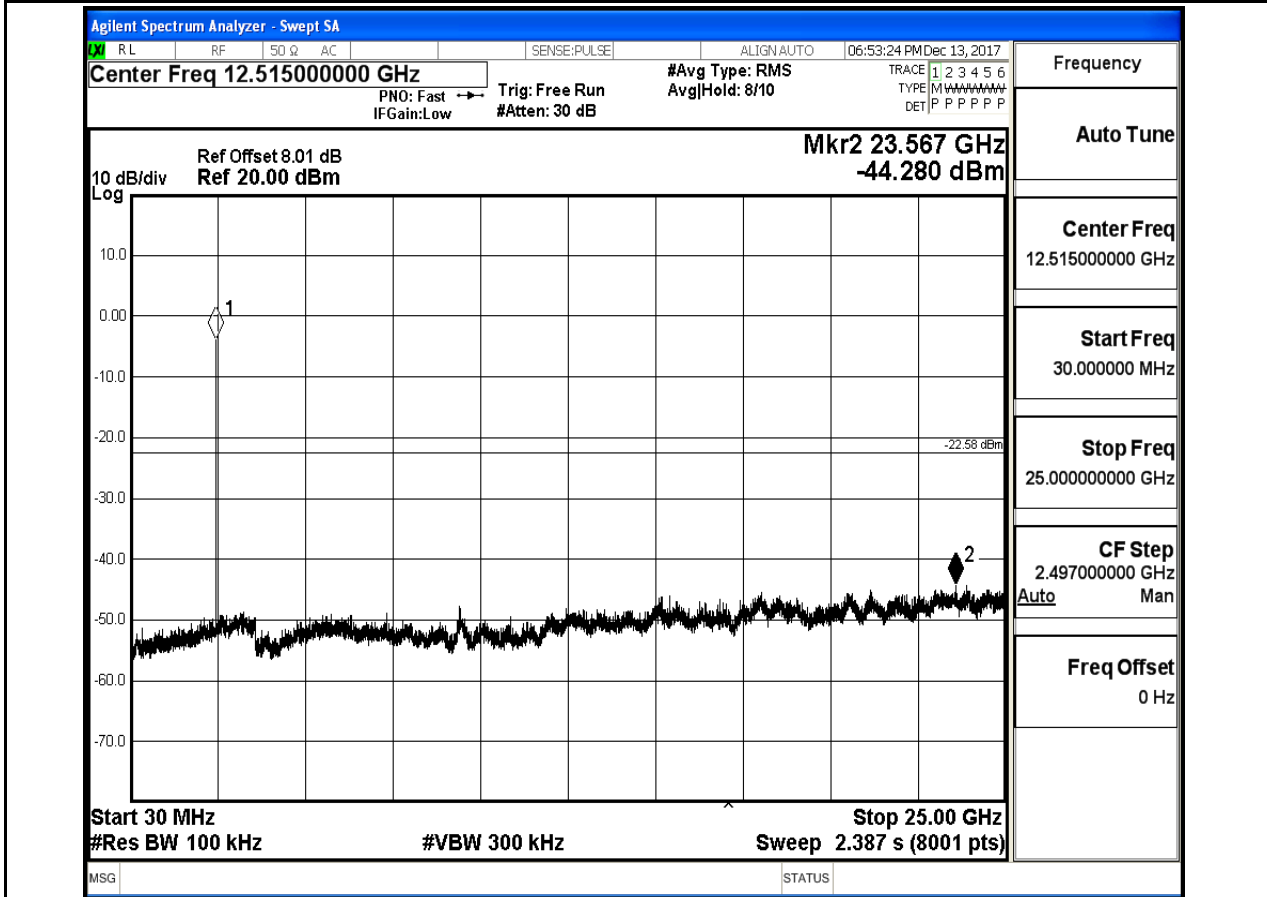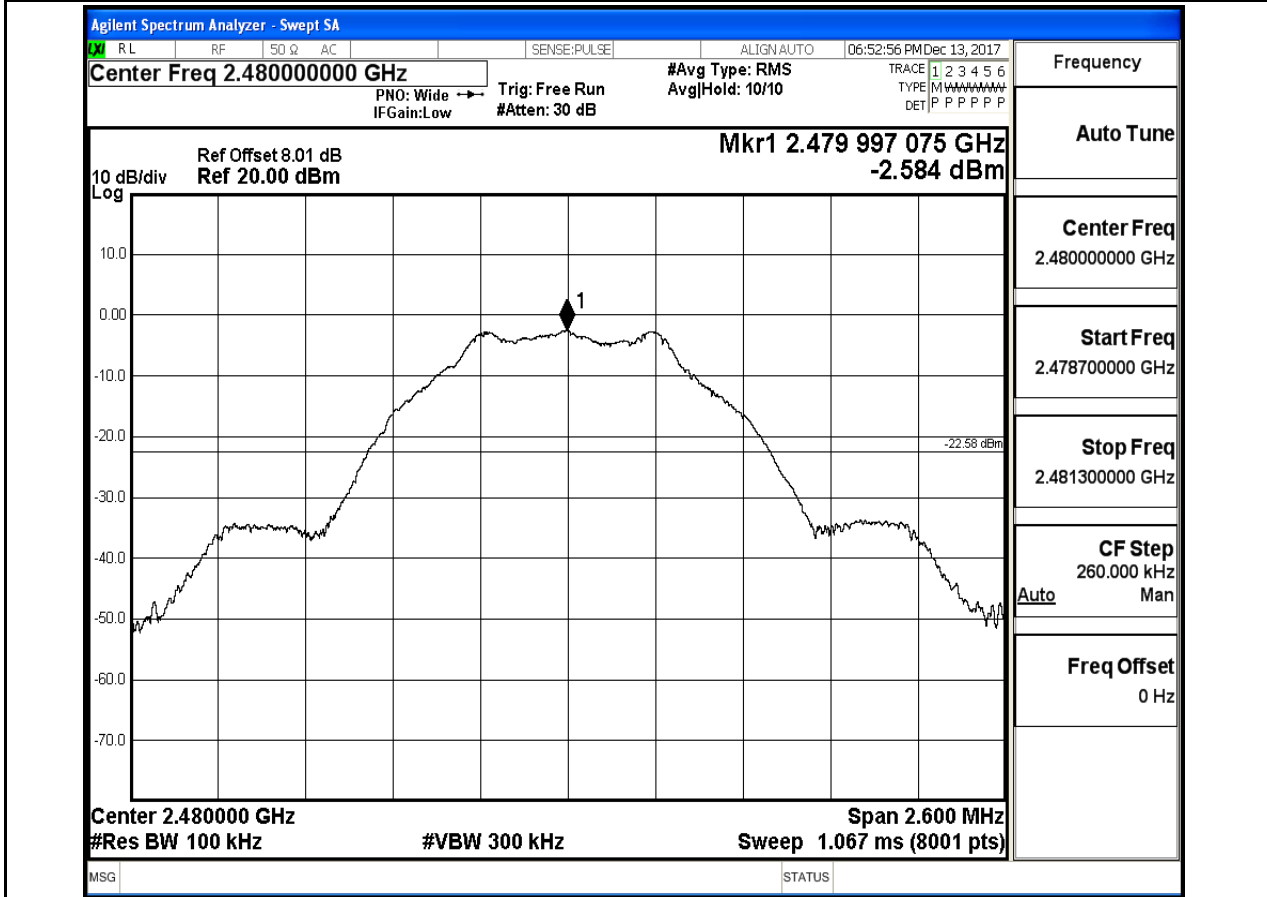

7.Restrict-band band-edge measurements


Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BLE	2402	Ant1	2310.0	-43.73	2	0	53.53	PEAK	74	PASS
BLE	2402	Ant1	2310.0	-54.17	2	0	43.09	AV	54	PASS
BLE	2402	Ant1	2390.0	-43.22	2	0	54.04	PEAK	74	PASS
BLE	2402	Ant1	2390.0	-53.95	2	0	43.31	AV	54	PASS
BLE	2480	Ant1	2483.5	-44.53	2	0	52.73	PEAK	74	PASS
BLE	2480	Ant1	2483.5	-53.70	2	0	43.55	AV	54	PASS
BLE	2480	Ant1	2500.0	-43.96	2	0	53.30	PEAK	74	PASS
BLE	2480	Ant1	2500.0	-53.57	2	0	43.69	AV	54	PASS

Restrict-band band-edge measurements_BLE_2402_Ant1_PEAK

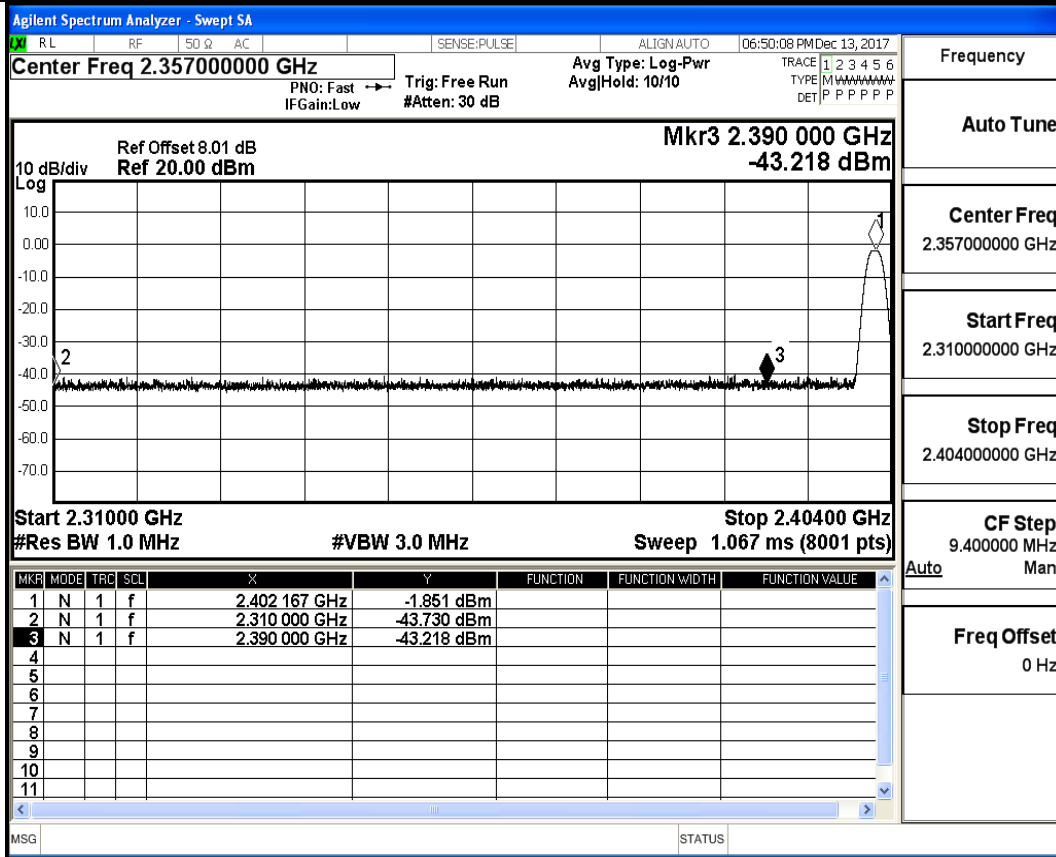


Frequency
Auto Tune
Center Freq 2.357000000 GHz
Start Freq 2.310000000 GHz
Stop Freq 2.404000000 GHz
CF Step 9.400000 MHz
Auto Man
Freq Offset 0 Hz

Restrict-band band-edge measurements_BLE_2402_Ant1_AV

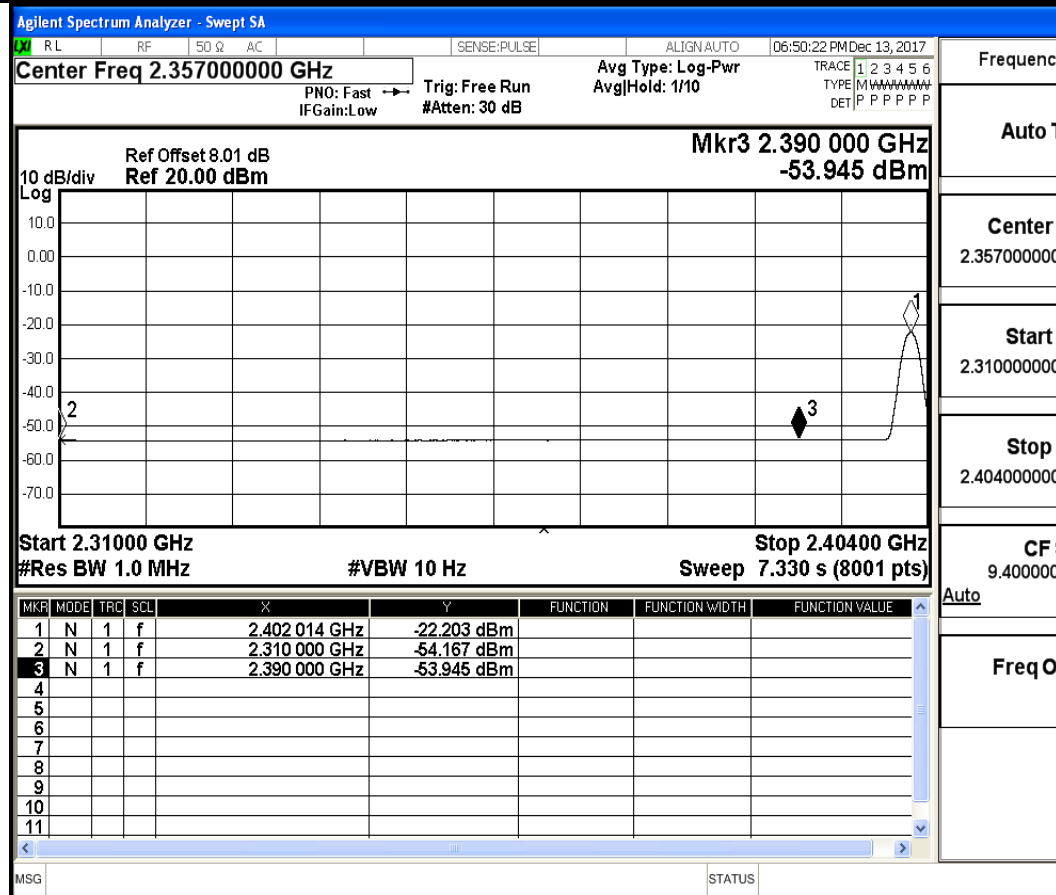


Frequency
Auto Tune
Center Freq 2.357000000 GHz
Start Freq 2.310000000 GHz
Stop Freq 2.404000000 GHz
CF Step 9.400000 MHz
Auto Man
Freq Offset 0 Hz

Restrict-band band-edge measurements_BLE_2480_Ant1_PEAK

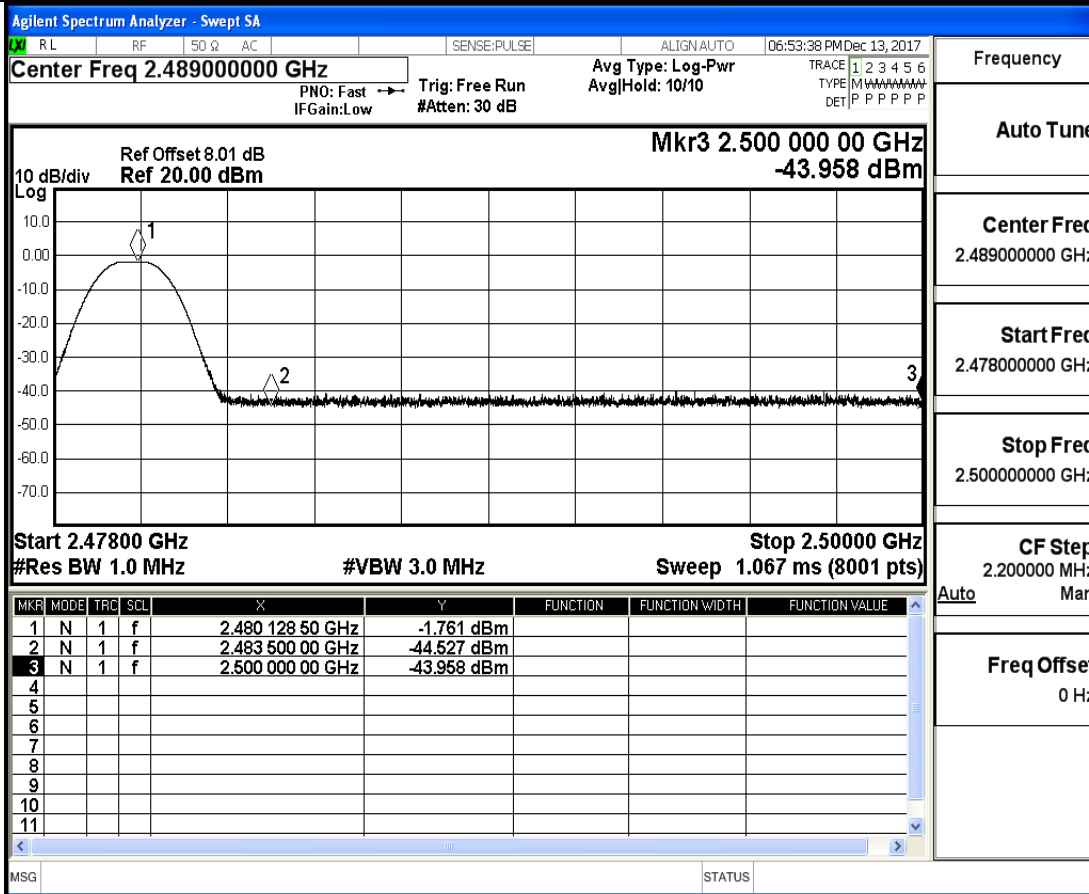

Frequency	
Auto Tune	
Center Freq	2.489000000 GHz
Start Freq	2.478000000 GHz
Stop Freq	2.500000000 GHz
CF Step	2.200000 MHz
Freq Offset	0 Hz

Restrict-band band-edge measurements_BLE_2480_Ant1_AV

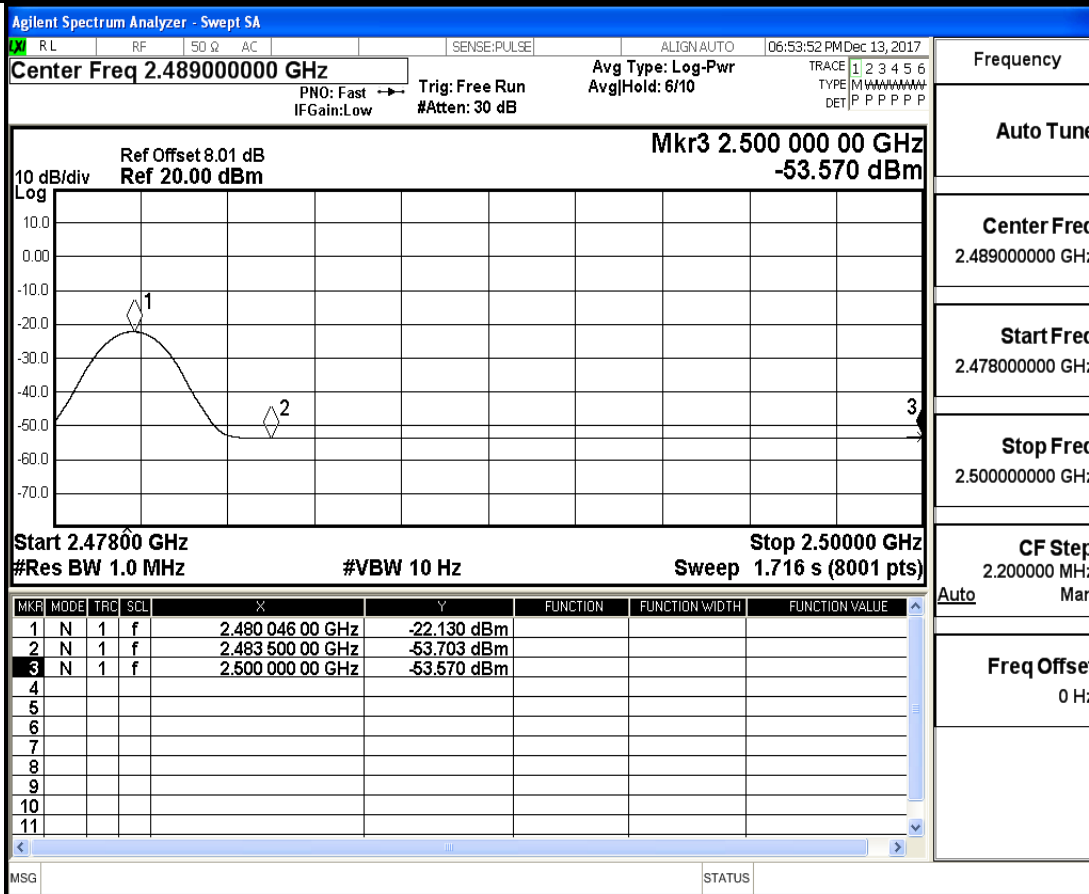

Frequency	
Auto Tune	
Center Freq	2.489000000 GHz
Start Freq	2.478000000 GHz
Stop Freq	2.500000000 GHz
CF Step	2.200000 MHz
Freq Offset	0 Hz


8.Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BLE	2440	Ant1	60.5	PASS

Duty Cycle_BLE_2440_Ant1

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 05:15:31 PM Dec 13, 2017
Center Freq 2.440000000 GHz Avg Type: Log-Pwr
PNO: Fast Trig: Free Run AvgHold: 10/10
IFGain:Low #Atten: 40 dB

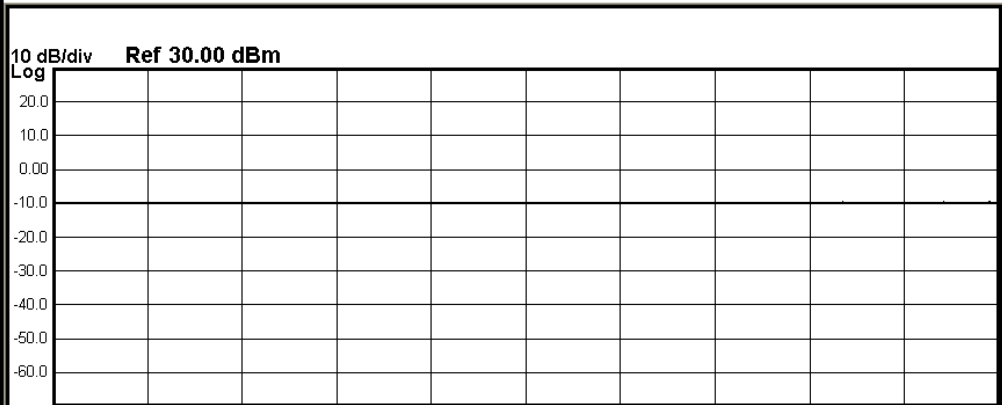

Center 2.440000000 GHz Span 0 Hz
Res BW 8 MHz #VBW 50 MHz Sweep 5.000 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq
2.440000000 GHz

Start Freq
2.440000000 GHz

Stop Freq
2.440000000 GHz

CF Step
8.000000 MHz
Auto Man

Freq Offset
0 Hz