

### 1 KEYWORDS

- *WLT5283M*
- *PCB antenna*
- *module*
- *2.4 GHz*
- *Inverted F Antenna*

### 2 INTRODUCTION

The PCB antenna used on the WLT5283M reference design is described in this application note. Even if the antenna presented is for a USB dongle design it can be used in all 2.4 GHz designs, especially where small space is required for the antenna.

This application note describes the antenna dimensions, the RF performance

and considerations for complying with regulatory limits when using this design.

The suggested antenna design requires no more than 15.2 x 5.7 mm of space and ensures a VSWR ratio of less than 2 across the 2.4 GHz ISM band when connected to a 50 ohm source.



Figure 1: WLT5283M

## Table of Contents

<b>1</b>	<b>KEYWORDS</b> .....	<b>1</b>
<b>2</b>	<b>INTRODUCTION</b> .....	<b>1</b>
<b>3</b>	<b>ABBREVIATIONS</b> .....	<b>2</b>
<b>4</b>	<b>ANTENNA DESIGN</b> .....	<b>3</b>
4.1	DESIGN GOALS .....	3
4.2	SIMULATION.....	3
4.3	LAYOUT AND IMPLEMENTATION .....	4
<b>5</b>	<b>TEST RESULTS</b> .....	<b>5</b>
5.1	REFLECTION .....	5
5.2	RADIATION PATTERN .....	7
5.3	OUTPUT POWER .....	15
5.4	SPURIOUS EMISSION AND HARMONICS .....	17
<b>6</b>	<b>CONCLUSION</b> .....	<b>20</b>
<b>7</b>	<b>GENERAL INFORMATION</b> .....	<b>21</b>
7.1	DOCUMENT HISTORY.....	21

### 3 ABBREVIATIONS

IFA	Inverted F Antenna
ISM	Industrial, Scientific and Medical
LOS	Line Of Sight
PCB	Printed Circuit Board
PER	Packet Error Rate
VSWR	Voltage Standing Wave Ratio

## 4 ANTENNA DESIGN

The PCB antenna on the WLT5283M reference design is a meandered Inverted F Antenna (IFA). The IFA was designed to match an impedance of 50 ohm at 2.45 GHz. Thus no additional matching components are necessary.

### 4.1 Design Goals

The reflection at the feed point of the antenna determines how much of the applied power is delivered to the antenna. A reflection of less than -10 dB across the 2.4 GHz ISM band, when connected to a 50 ohm source, was a design goal. Reflection of less than -10 dB, or VSWR less than 2, ensures that more than 90% of the available power is delivered to the antenna. Bandwidth is in this document defined as the frequency band where more than 90% of the available power is delivered to the antenna. Another design goal was to fit the size of the PCB antenna on a USB dongle and to obtain good performance also when the dongle is connected to a computer.

### 4.2 Simulation

IE3D from Zeland, which is an electromagnetic simulation tool, was used to design the antenna. The accuracy of the simulation is controlled by the mesh. An increase of the mesh increases the simulation time. Thus, for initial simulations mesh = 1 should be used. When a fairly good result is achieved a higher mesh should be used to obtain more accurate results. Comparison of simulation and measurement results shows that the measured reflection is between the result obtained with mesh = 5 and mesh = 1; see Figure 2 for details.

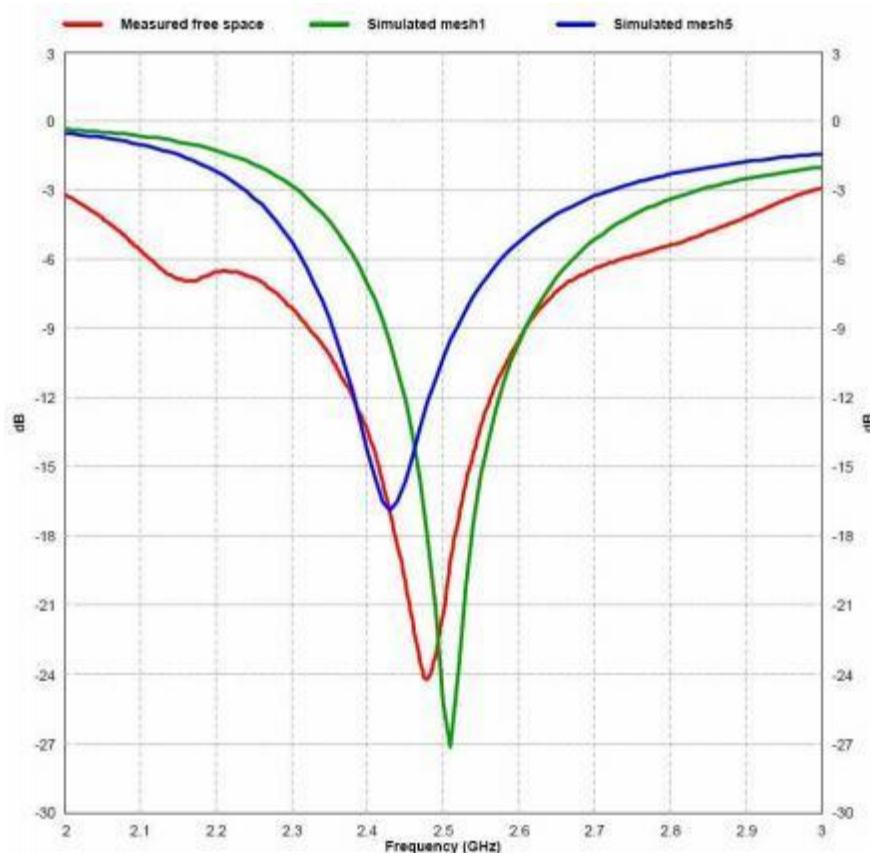


Figure 2: Comparison of Simulation and Measurements Results



## 5 TEST RESULTS

Reflection, radiation pattern and variation of output power across a wide frequency band were measured to verify the performance of the PCB antenna. Measurements of the dongle in free space and when connected to a laptop were performed to verify that the antenna is suitable both for USB dongle designs and in a standalone application. Free space is in this document interpreted as a measurement performed without connecting the dongle to a computer. In such a measurement the dongle is only powered by a battery.

### 5.1 Reflection

All the reflection measurements were performed with a network analyzer connected to a semi-rigid coax cable, which was soldered to the feed point of the antenna. Because of the small size antenna and the small ground plane this kind of measurements is heavily affected by the presence and placement of the coax cable. This influence can result in a small uncertainty in resonance frequency and measured reflection. Typically different placement of the semi-rigid coax cable could change the resonance frequency with 5 -10 MHz and the reflection with 3 - 4 dB.

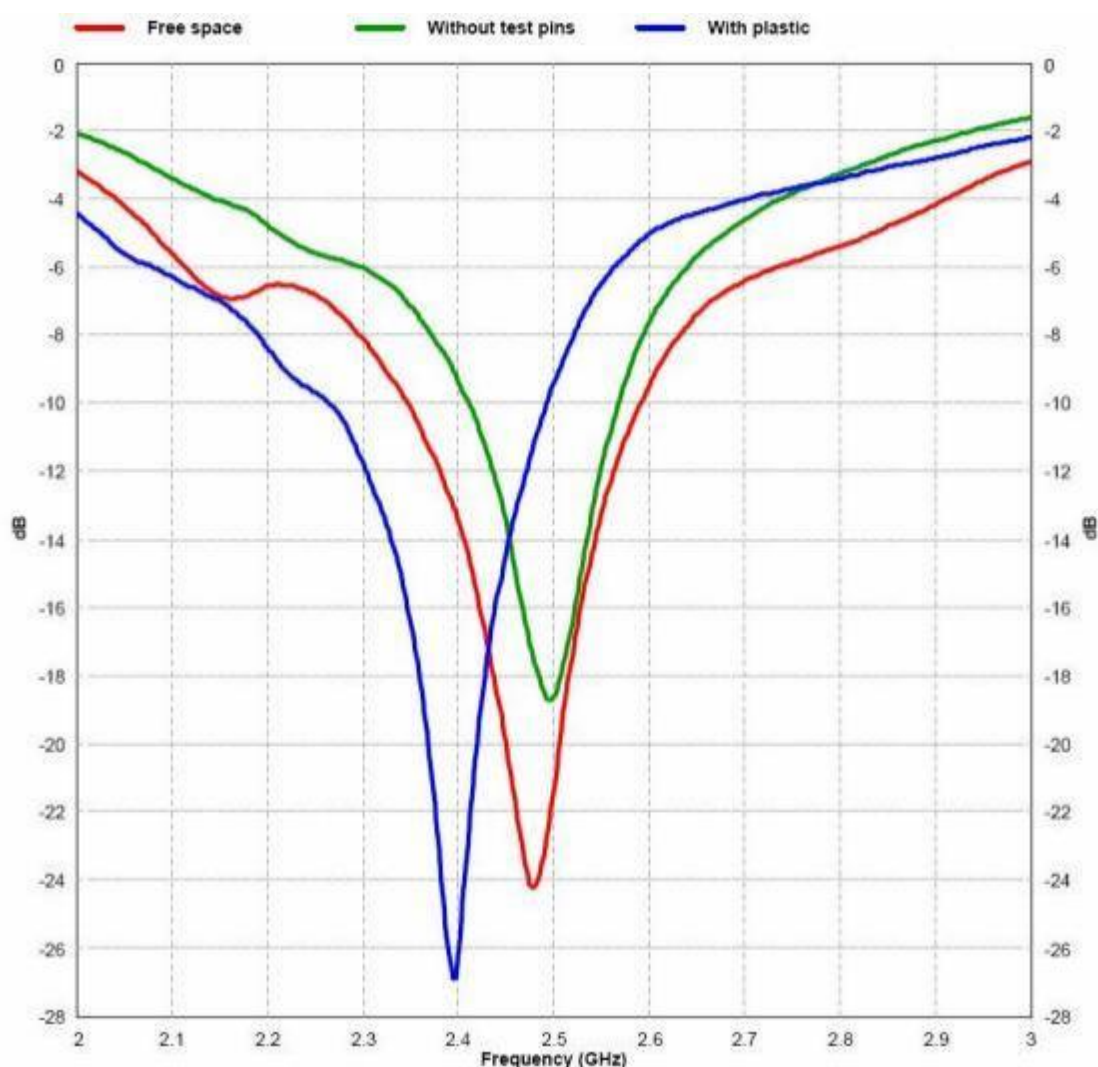


Figure 4: Influence of Plastic Encapsulation and Test Pins

# ApplicationNote AN043

A small part on the WLT5283M PCB is equipped with test pins. These are intended for use during development. This part of the PCB will typically be omitted in a final application. The red and green graph on Figure 4 shows that removing this part of the PCB has a small impact on the performance. Figure 4 also shows that plastic encapsulation of the dongle will shift the resonance frequency to a lower frequency. This can be compensated by making the antenna slightly shorter.

The size of the ground plane affects the performance of the PCB antenna. Connecting the USB dongle to a computer increases the size of the ground plane and thus the performance is affected. Figure 5 shows how the performance is affected when the USB dongle is connected to a laptop. In free space the antenna has a bandwidth of approximately 250 MHz. When the USB dongle is connected to the laptop the bandwidth is reduced to around 100 MHz, which still is enough to cover the whole 2.4 GHz ISM band.

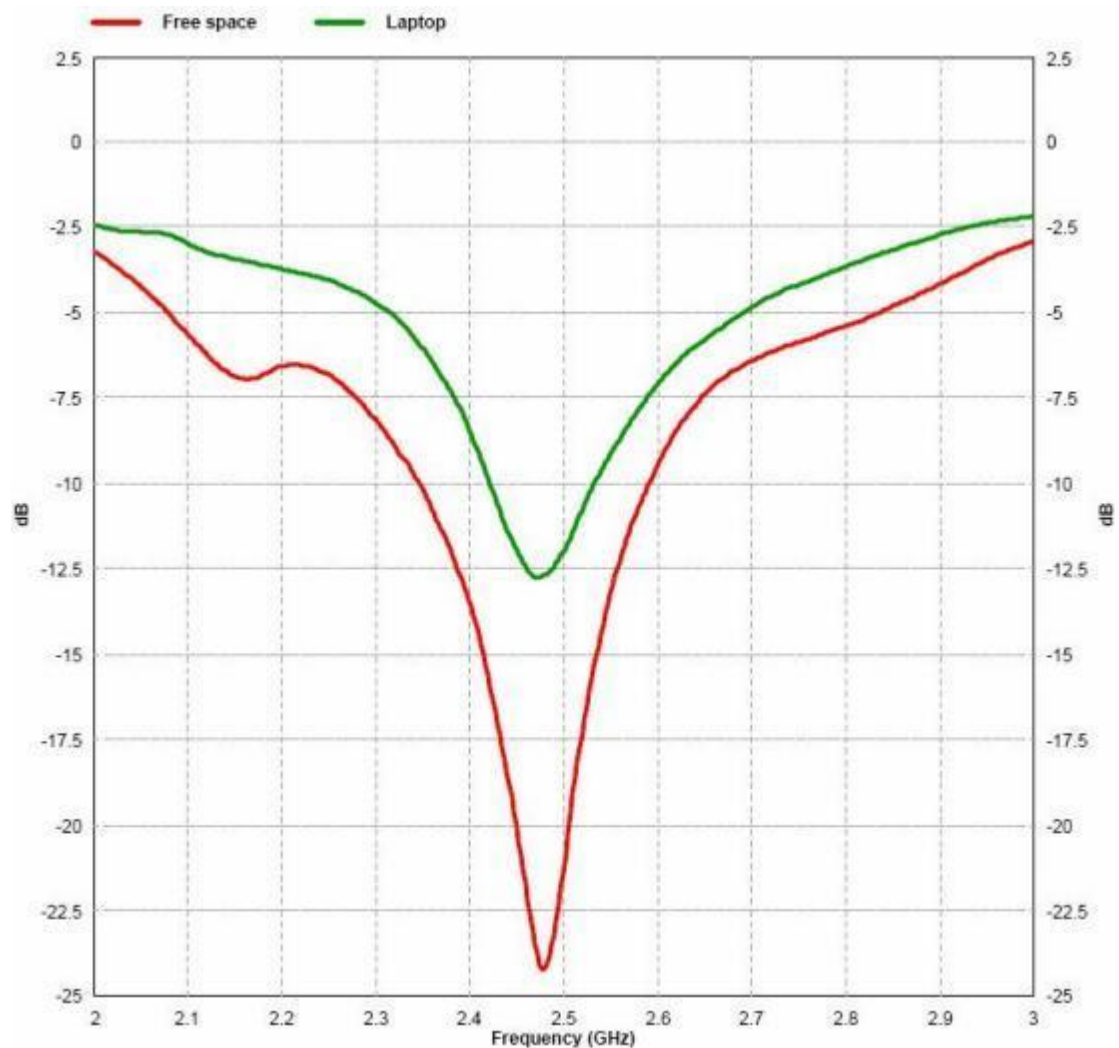


Figure 5: Comparison of Performance

## 5.2 Radiation Pattern

The radiation pattern for the antenna implemented on the WLT5283M reference design has been measured in an anechoic chamber. Figure 7 through Figure 12 shows radiation patterns for three planes, XY, XZ and YZ, measured with vertical and horizontal polarization. All these measurement were performed without connecting the dongle to a computer. Figure 13 and Figure 14 shows the radiation pattern when the dongle is connected to a laptop. All measurements were performed with 0 dBm output power.

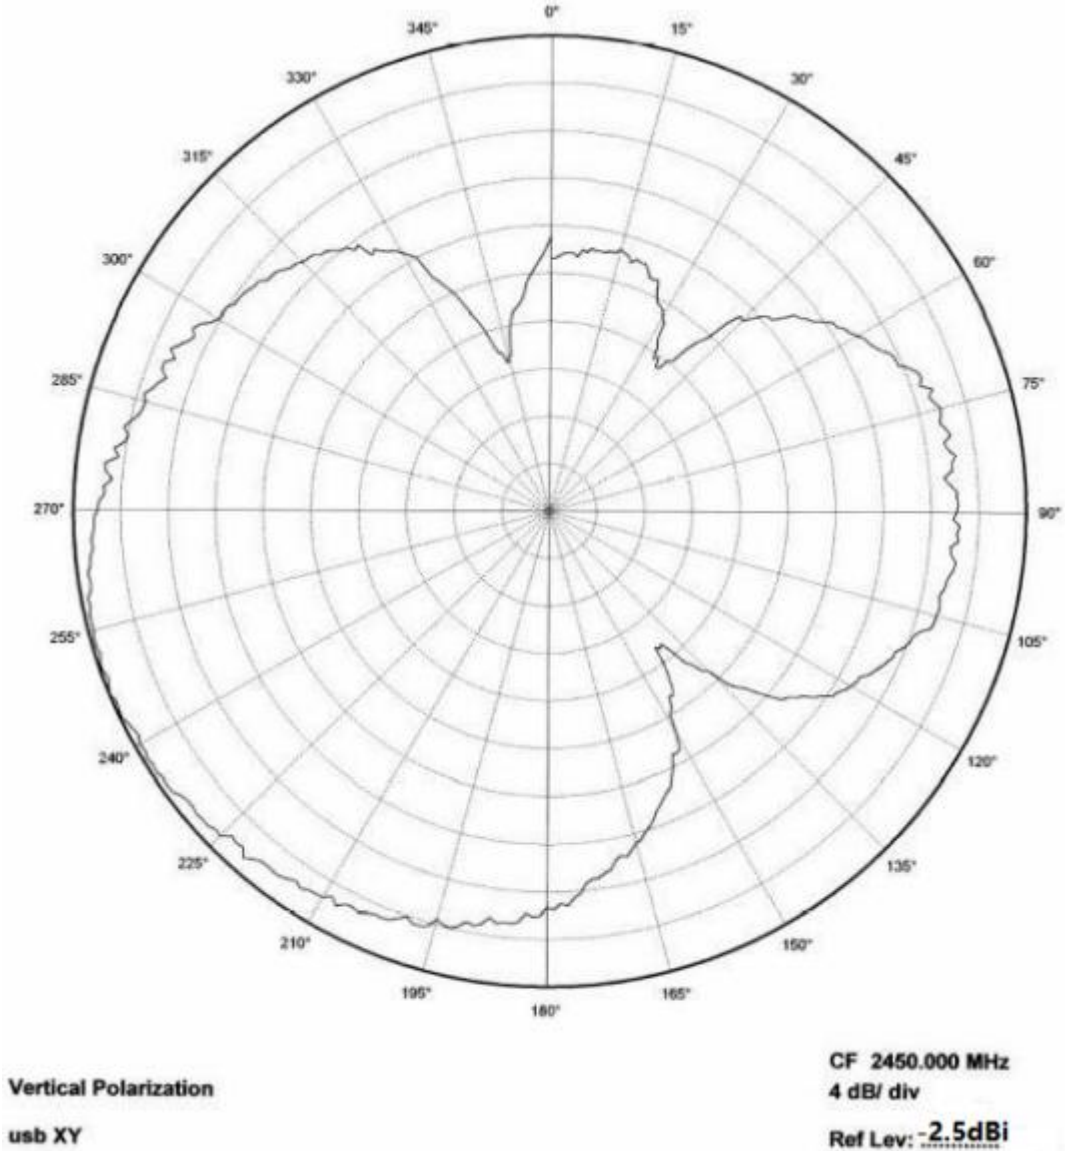


Figure 7: WLT5283M XY Plane



# Application Note AN043

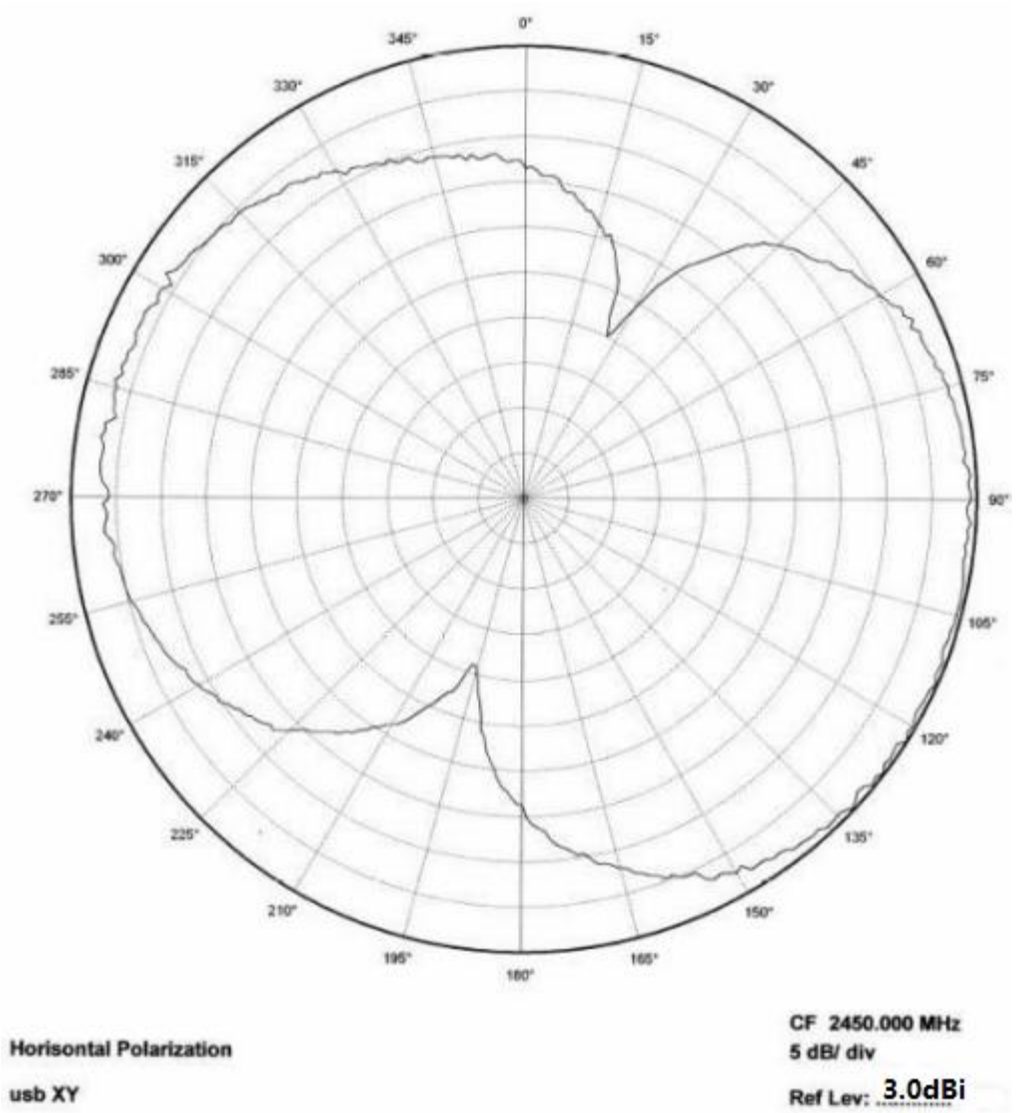


Figure 8: WLT5283M XY Plane

# Application Note AN043


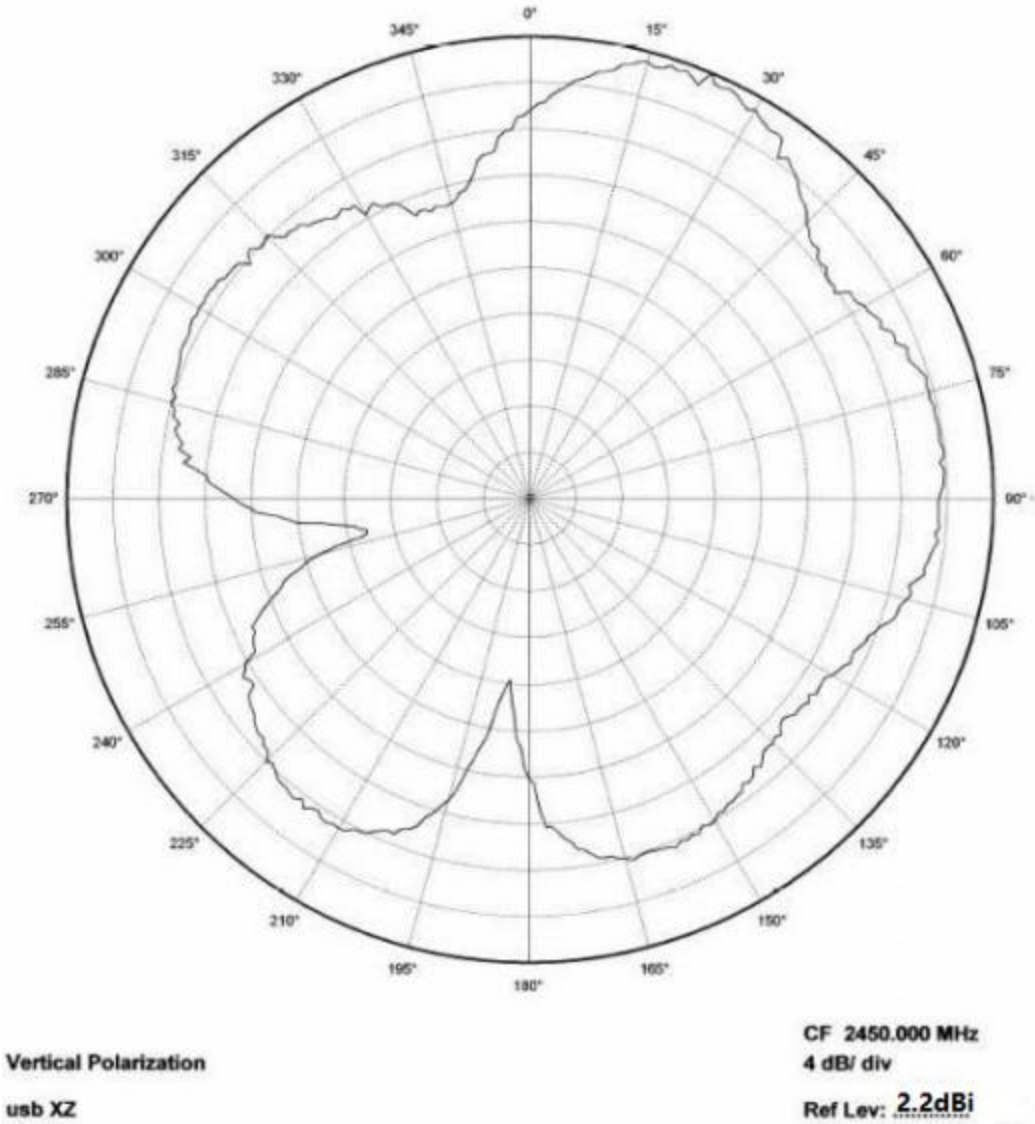


Figure 9: WLT5283M XZ Plane

# Application Note AN043

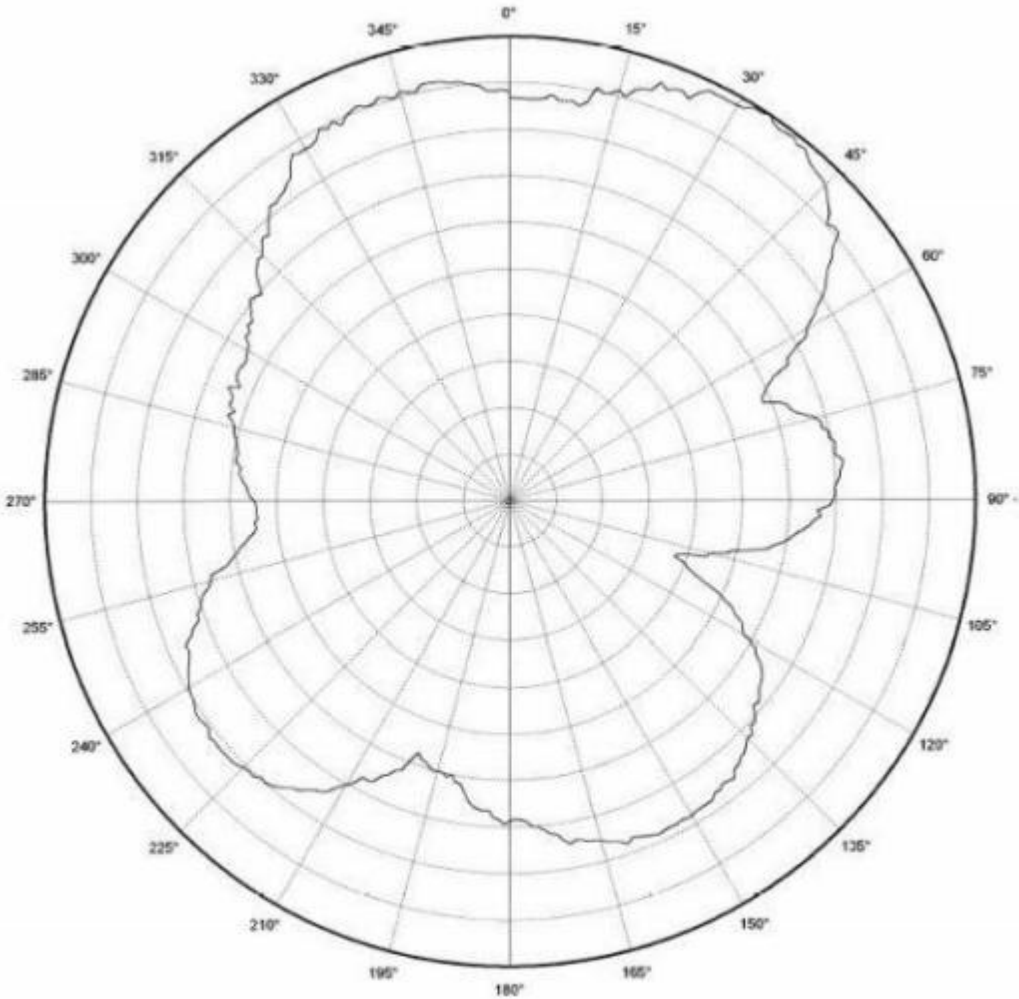


Horizontal Polarization  
usb XZ

CF 2450.000 MHz  
4 dB/ div  
Ref Lev: 1.3dBi

Figure 10: WLT5283M XZ Plane

# Application Note AN043

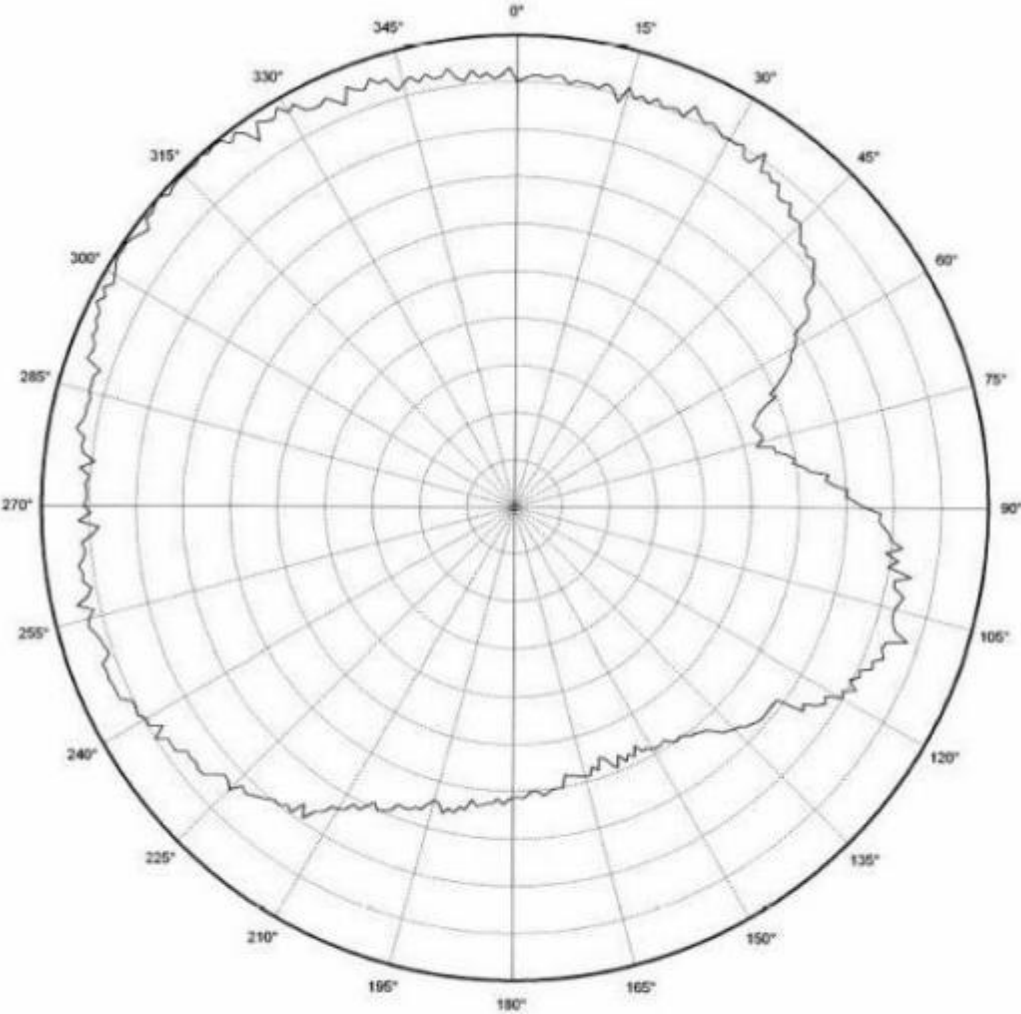

Vertical Polarization  
usb YZ

CF 2450.000 MHz  
2 dB/div  
Ref Lev: 1.3dBi

Figure 11: WLT5283M YZ Plane

# Application Note AN043

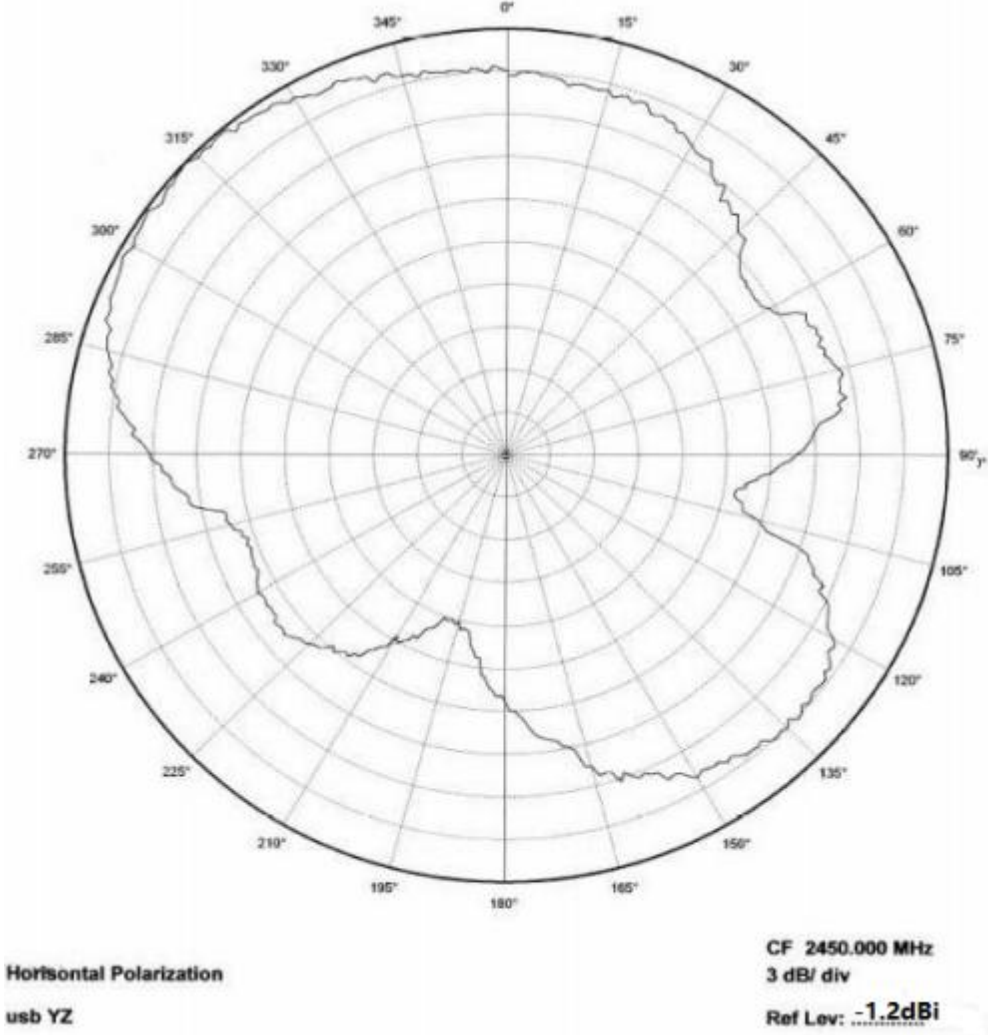


Figure 12: WLT5283M YZ Plane

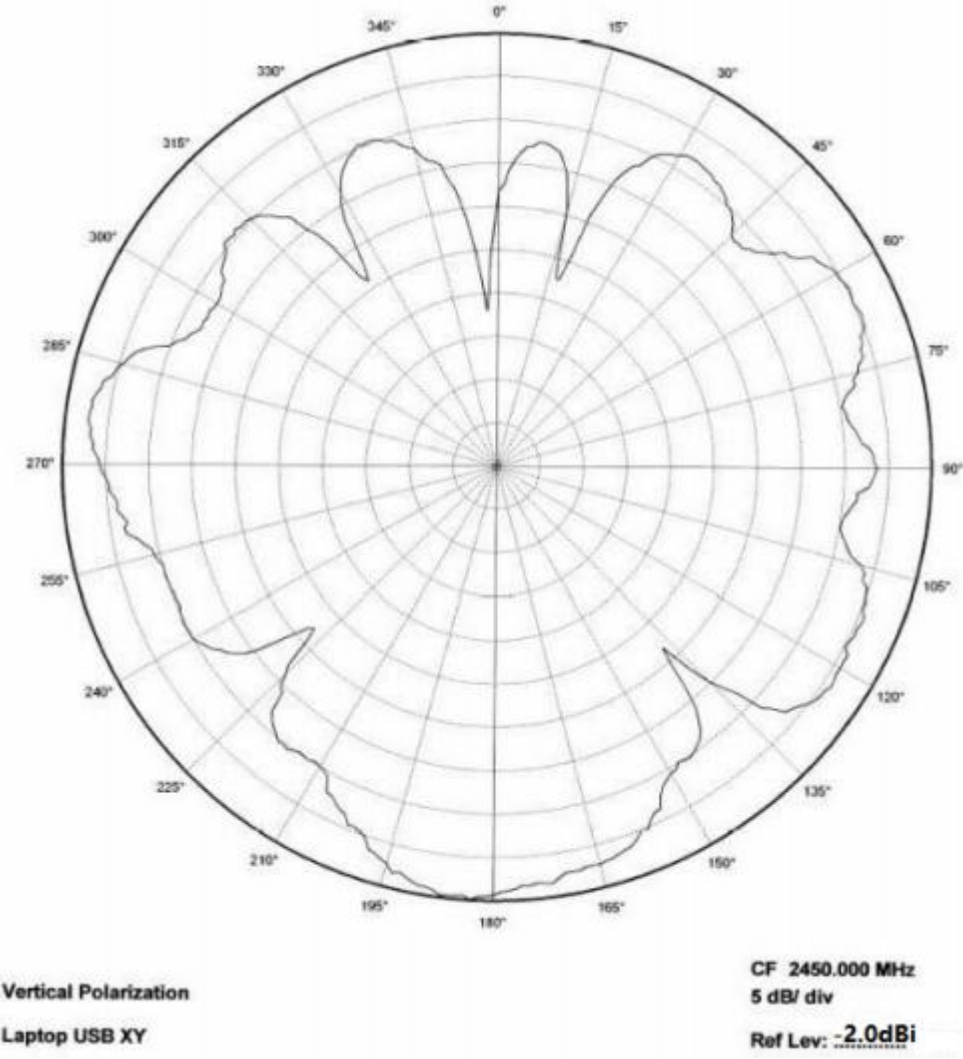


Figure 13: WLT5283M in Laptop XY Plane



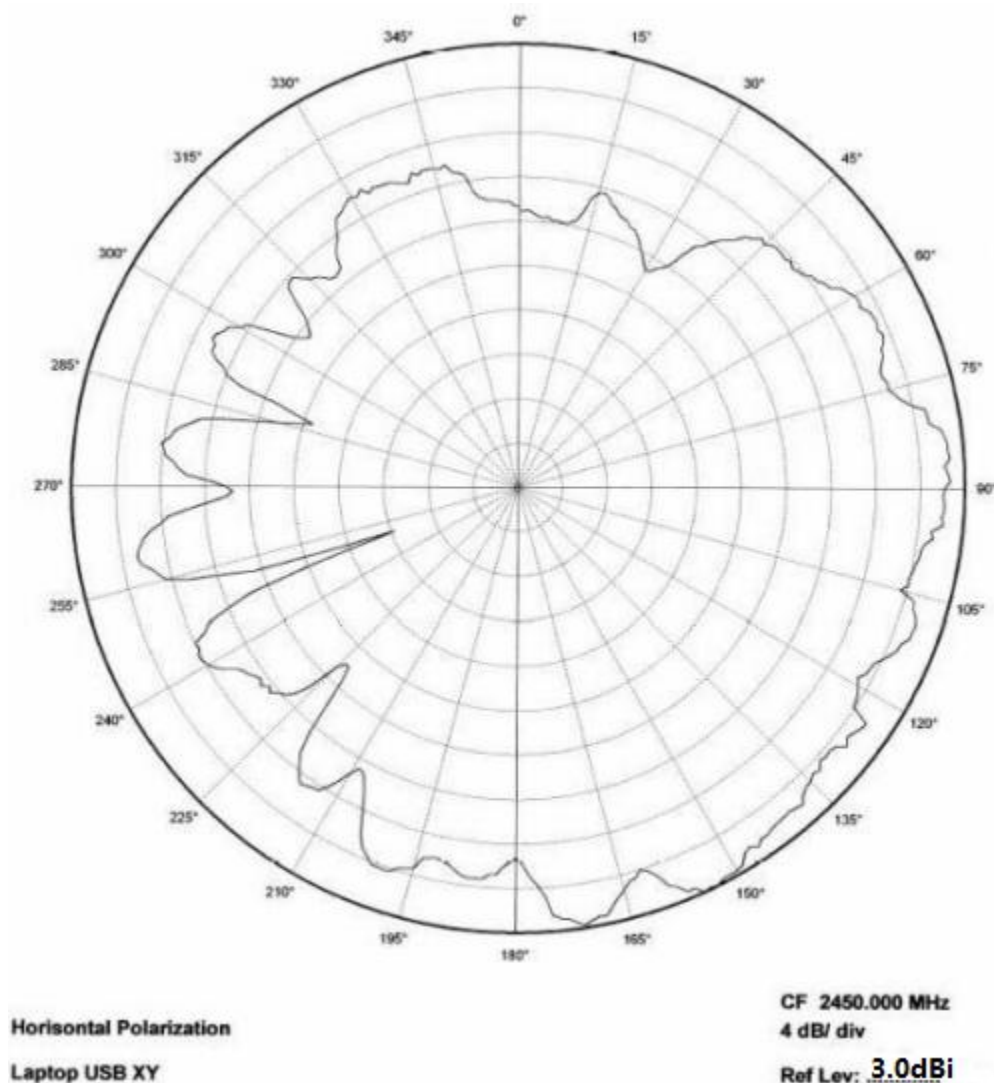


Figure 14: WLT5283M in Laptop XY Plane

### 5.3 Output Power

To make a realistic bandwidth measurement of the antenna a small test program was used. The test program stepped the center frequency of a carrier from 2.3 to 2.8 GHz. This bandwidth measurement was also done to verify the result from the reflection measurements, described in section 5.1. The output power was measured using max hold on a spectrum analyzer. WLT5283M was programmed for 0 dBm output power and the antenna was horizontally oriented and directed towards the receiving antenna. This corresponds to 0° in the XY plane on Figure 6. The bandwidth measurements were not performed with a correction factor on the spectrum analyzer. Thus, the results in Figure 15 and Figure 16 only show the relative changes in output power and not the actual level.

Figure 15 shows the bandwidth of the antenna when the dongle is not connected to a computer. The result shows that the antenna has a variation in output power of less than 3 dB across a frequency band of more than 350 MHz. This demonstrates that the antenna has a

# ApplicationNote AN043

broadband characteristic. Maximum output power is measured to be at 2.54 GHz. Thus if the same antenna is implemented on a PCB with similar size and if the application is only intended for stand alone usage the antenna could be made slightly longer to obtain best performance at 2.42 GHz .


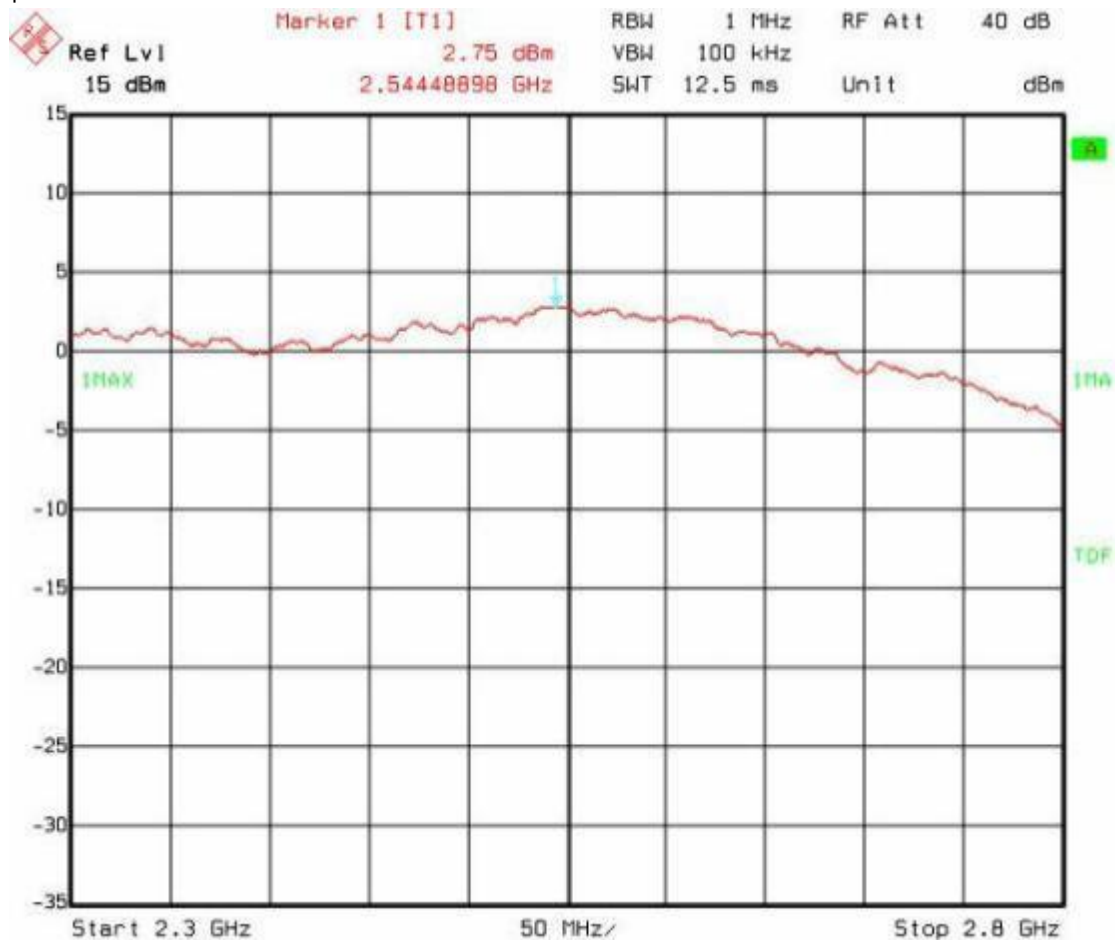


Figure 15: Output Power, USB Dongle

The reflection results in Figure 5 indicate that the output power will be slightly reduced when the dongle is connected to a laptop. Comparison of the results in Figure 15 and Figure 16 shows that the output power is reduced by approximately 2 dB when the dongle is connected to a laptop. This agrees with the results in Figure 5.



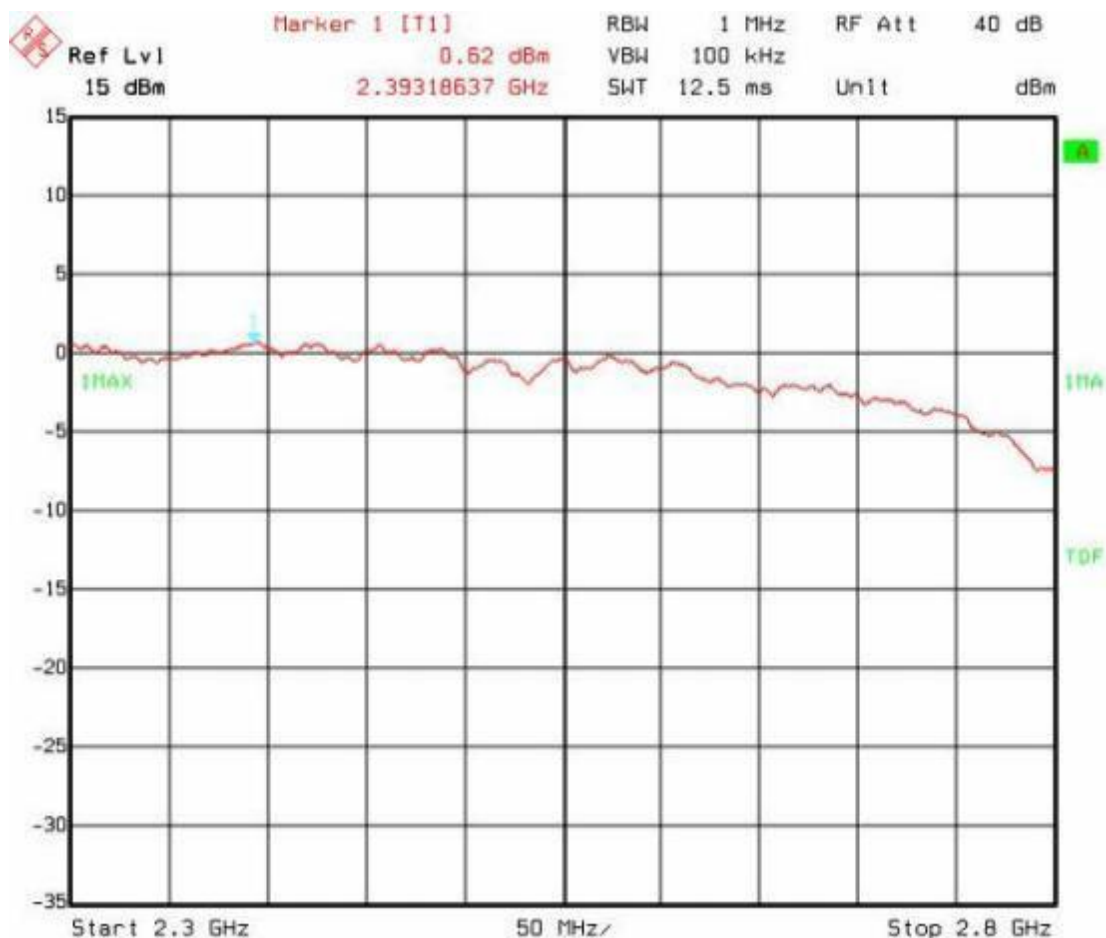

**Figure 16: Output Power, USB Dongle in Laptop**

#### 5.4 Spurious Emission and Harmonics

Table 2 shows measured output power and emission at the second harmonic. Above the second harmonic no peaks were detected when measuring TX emission. This can be seen from Figure 17 and Figure 18. These measurements were performed according to FCC requirements. An approximate conversion to dBm can be done by subtracting 95 from the measured value in dB $\mu$ V/m. Since the measurement setup for ETSI and FCC is different this conversion will not give an exact result, but typically it will give a result that is within 1-2 dB of the result from a correct ETSI measurement.

Output power	2.44 GHz	4.88 GHz
1 dBm	96.9 dB $\mu$ V/m	56.1 dB $\mu$ V/m
0 dBm	96.1 dB $\mu$ V/m	54.3 dB $\mu$ V/m
-2 dBm	93.1 dB $\mu$ V/m	52.5 dB $\mu$ V/m

**Table 2: Measured Level of Output Power and Harmonics**

ETSI and FCC limits for output power and TX spurious emission are shown in Table 3. FCC allows for up to 20 dB higher emission if duty cycling is used. Thus, it is possible to use the antenna described in this document and be compliant with both ETSI and FCC regulation.


# Application Note AN043

	EN 300 328	EN 300 440	FCC 15.247	FCC 15.249
2.4 – 2.483 GHz	20 dBm	10 dBm*	125 dB $\mu$ V/m 1 16 dB $\mu$ V/m**	94 dB $\mu$ V/m
2. harm	-30 dBm	-30 dBm	54 dB $\mu$ V/m	54 dB $\mu$ V/m

\* Depends on the power class .


\*\* Depends on the number of channels being used.

**Table 3: ETSI and FCC Limits**

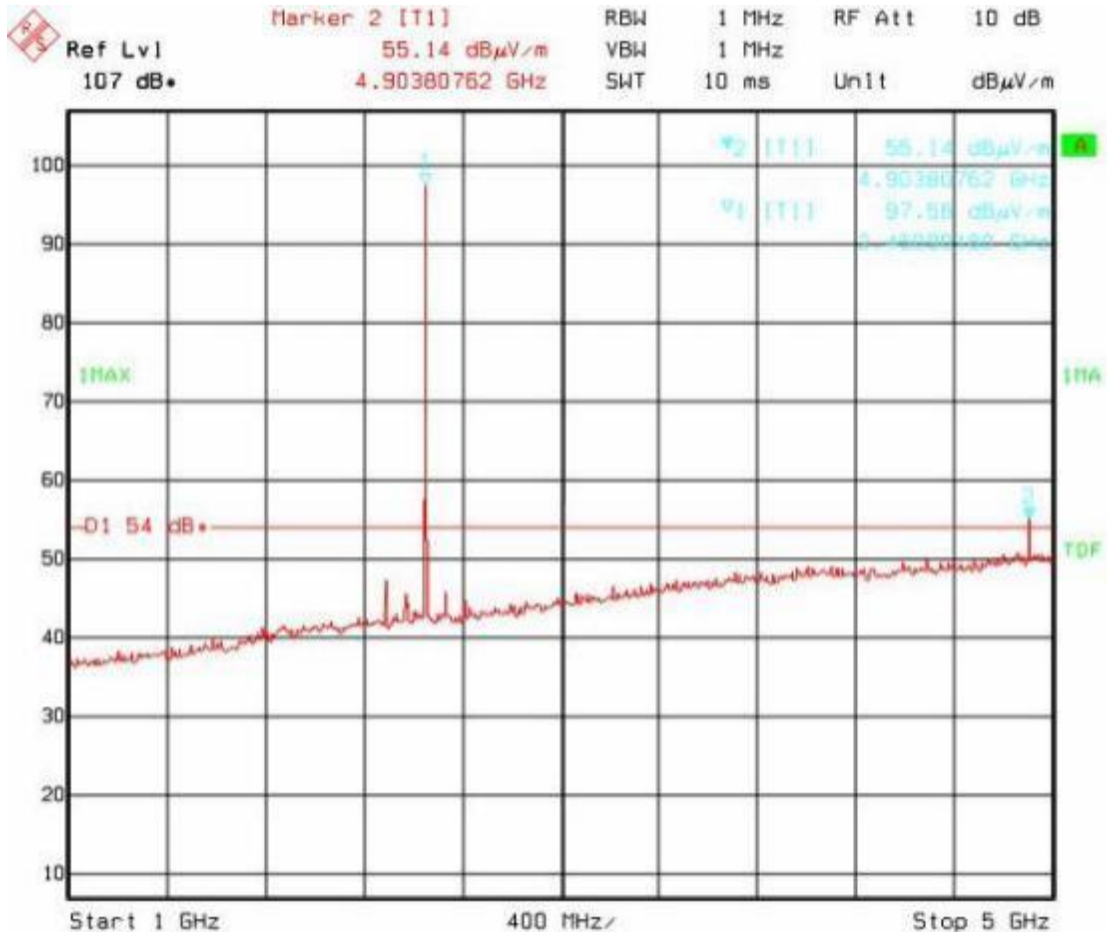

**Figure 17: TX Spurious Emission 1 – 5 GHz**

# Application Note AN043

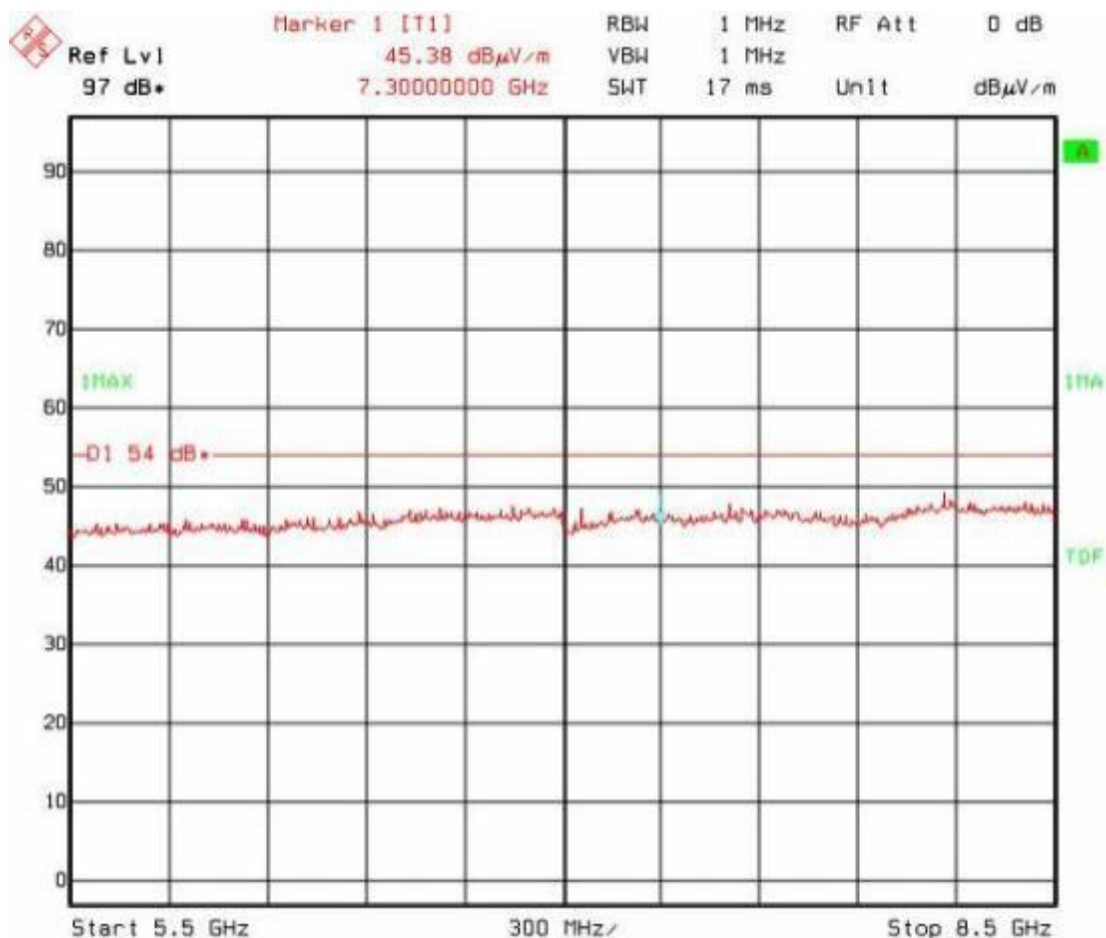

**Figure 18: TX Spurious Emission 5.5 – 8.5 GHz**

As opposed to FCC, ETSI has specific RX emission requirements. Table 4 and Table 5 list the ETSI RX spurious requirements.

	Narrowband spurious emission	W ideband spurious emission
30 MHz to 1 GHz	-57 dBm	- 107 dBm/Hz
1 GHz to 12 .75 GHz	-47 dBm	-97 dBm/Hz

**Table 4: EN 300 328 RX Spurious Requirements**

25 MHz to 1 GHz	-57 dBm
1 GHz to 10 times the carrier frequency*	-47 dBm

\* Applies for equipment operating between 1 GHz and 20 GHz.

**Table 5: EN 300 440 RX Spurious Requirements**

The only signal detected above the noise floor when measuring RX spurious emission was the VCO leakage at 4.89 GHz. Figure 19 shows that the measured VCO leakage is below ETSI limits.

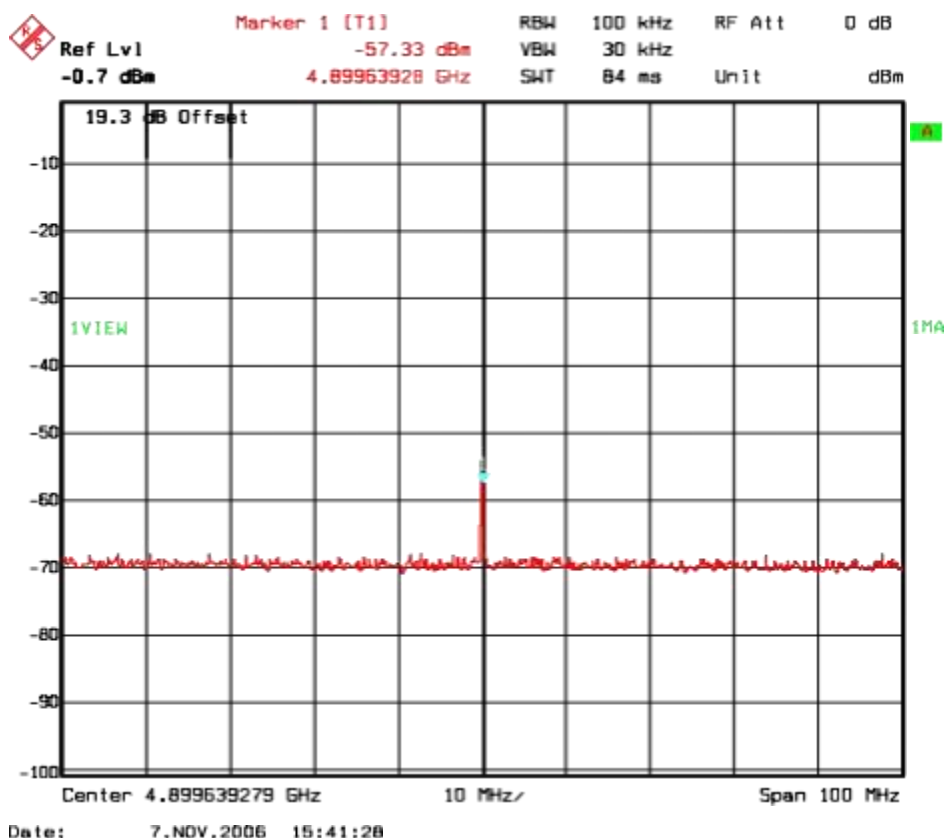


Figure 19: RX Spurious Emission

## 6 CONCLUSION

This application note shows that it is possible to implement a 2.4 GHz antenna on a small area and still achieve good performance. Table 6 lists the most important properties of the Inverted F Antenna, described in this document. The free line of sight (LOS) range was measured with 250 kbps and 1 % PER.

Gain in XY plane	3.0 dBi
Gain in XZ plane	2.8 dBi
Gain in YZ plane	2.9 dBi
Gain in XY plane , connected to laptop	3.0 dBi
LOS range	140 m
Antenna size	15 .2 x 5 .7 mm

Table 6: IFA Properties (Measured on WLT5283M Reference Design)

The results provided in section 5 shows that it is possible to comply with both ETSI and FCC regulations when implementing the suggested antenna together with WLT5283M.

## 7 Antenna Gain

### 7.1 Antenna Gain

Frequency / MHz	Gain/ dBi
2400	2.0
2410	2.3
2420	2.8
2430	3.0
2440	2.9
2450	2.6
2460	2.2
2470	1.9
2480	1.8