




Quick Install Guide




Recommended wiring: 18/6 shielded for main device, and 18/4 shielded for optional Wiegand devices.


Items Included in Kit

1. Watchman Unit
2. 12 Volt DC Power Supply
3.  Magnetic Read Switch
4. **NOTE** Leave one key with the customer
5. Nuts X 4
6. Bolts X 4
7. Quick Install Guide
8. Activation & Test Process
9. Customer Information Packet


Watchman Unit

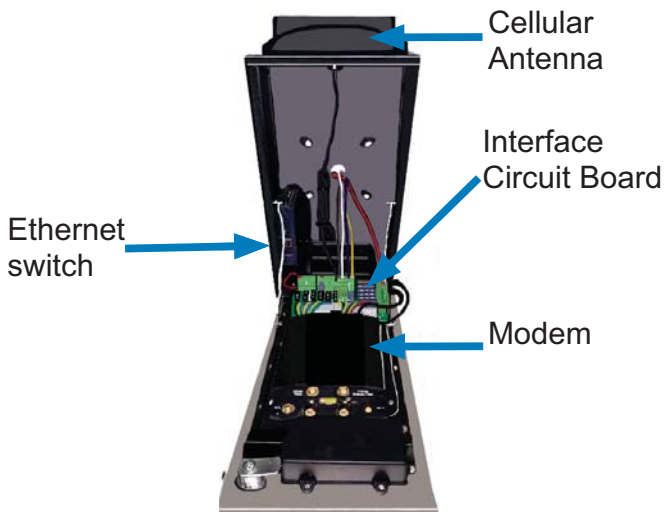


Power Supply Wiring

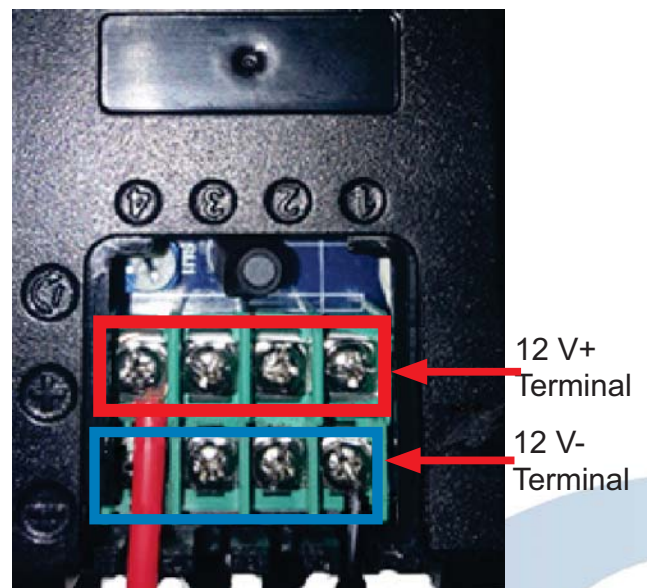

Interface Circuit Board (Oriented the same as the Watchman install)

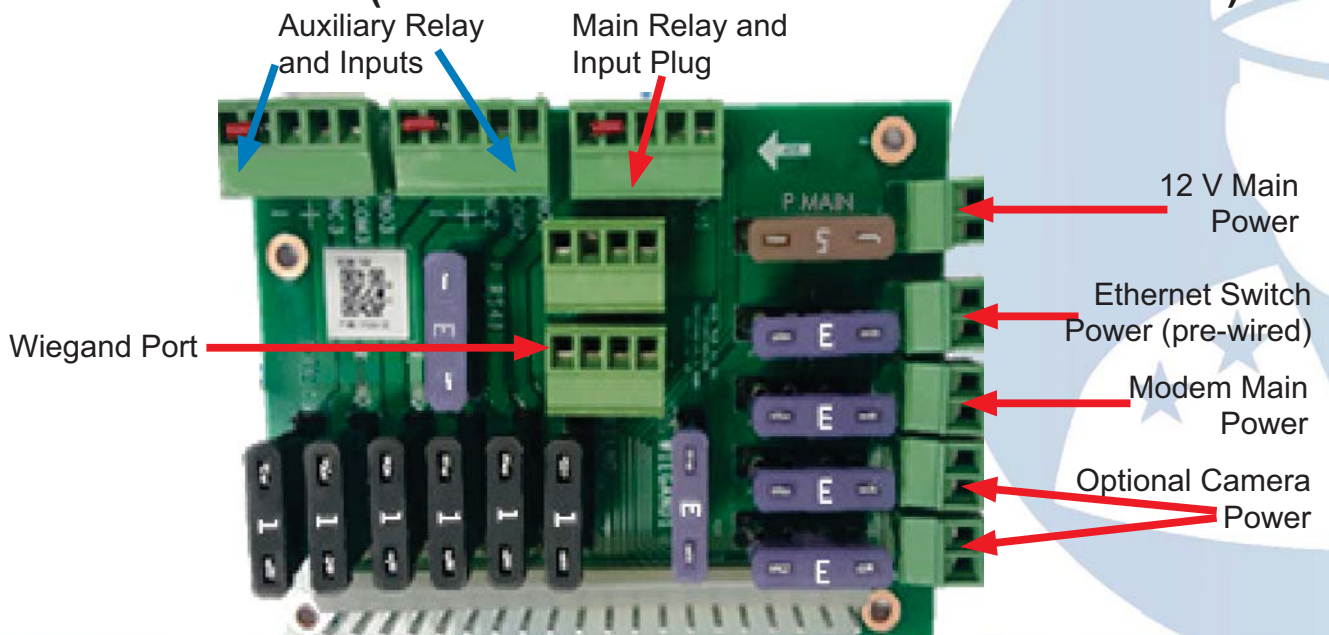

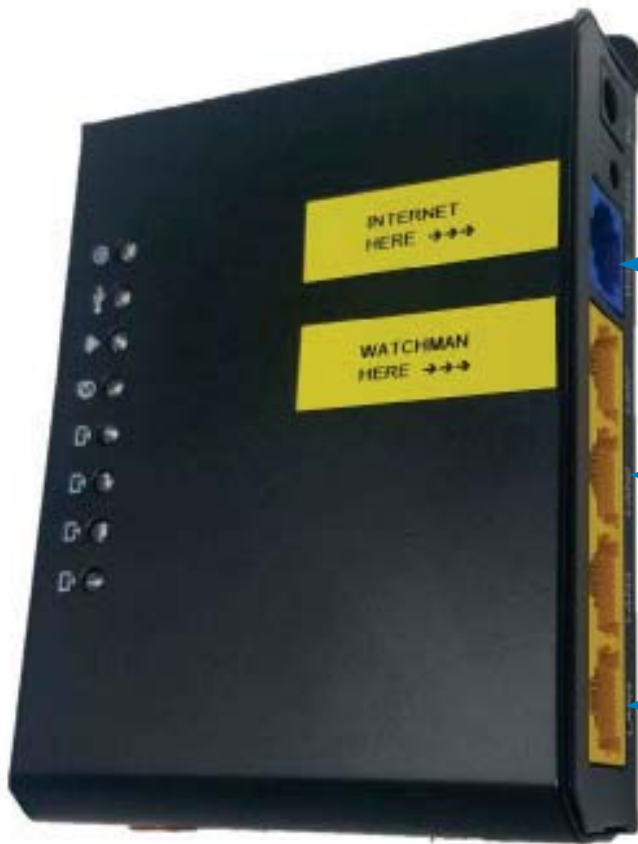

Plug customer internet into the blue port

Plug Watchman into any yellow port

Plug optional external cameras into any yellow port

18 ga stranded: up to 25 ft.
16 ga stranded: up to 50 ft.
12 ga stranded: up to 60 ft.

Interface Wiring Diagram

Oriented the same as the Watchman install

To Magnetic Switch or Dry Contact on Operator

Gray: Negative
White: Positive

3

To Gate Operator

Free Exit or Exit Terminal

Yellow: Positive

Blue: Common Ground

Normally Open Connection

2

Optional Wiegand 26-Bit Connection

Red: 12 V power

Black: Ground

Green: Data 0



White: Data 1

4

Main Power


12 V Input Power

1

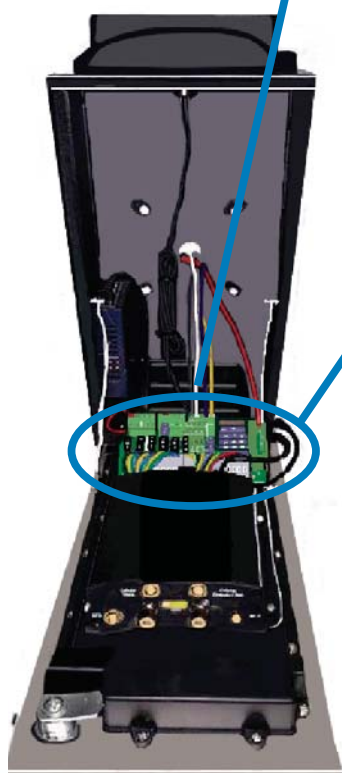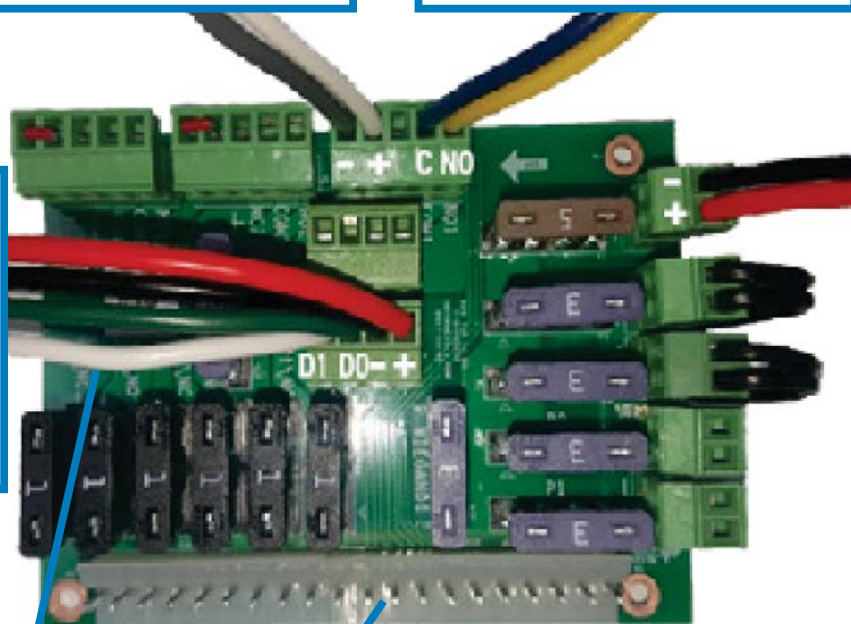


6-Wire Installation Instructions

1. Wire main power from the transformer to the power connector on the circuit board.
2. Connect gate trigger wires from the Normally Open (NO) and Common (C) to the free-exit or exit terminals on the gate operator.
3. Connect the gate status wires on the 6 pin connector on the main relay and input plug to the magnetic switch or a Dry Contact, Normally Closed (NC) relay on the gate operator.
4. If using an optional 26-bit reader (e.g., keypad, card reader, RFID, clicker), wire the device to the Wiegand connection on the interface circuit board.
5. Use *Camera Guide* if adding external camera.
6. Test and activate using the test credentials on the *Activation & Test Process* document.



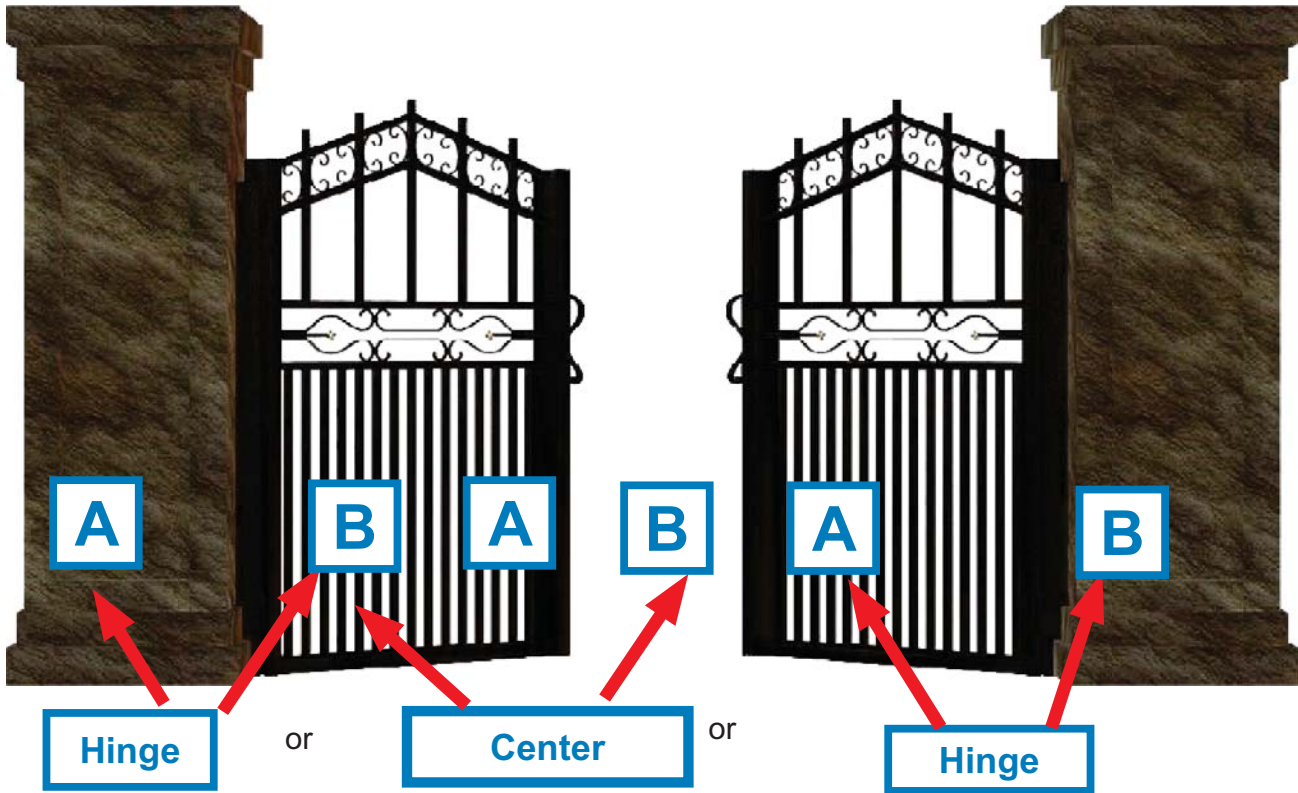


Place the Mag Switch anywhere you can pull A and B at least 2 inches away from each other when the gate is open, and where you can pull A and B 1.5 inches apart when the gate is open.



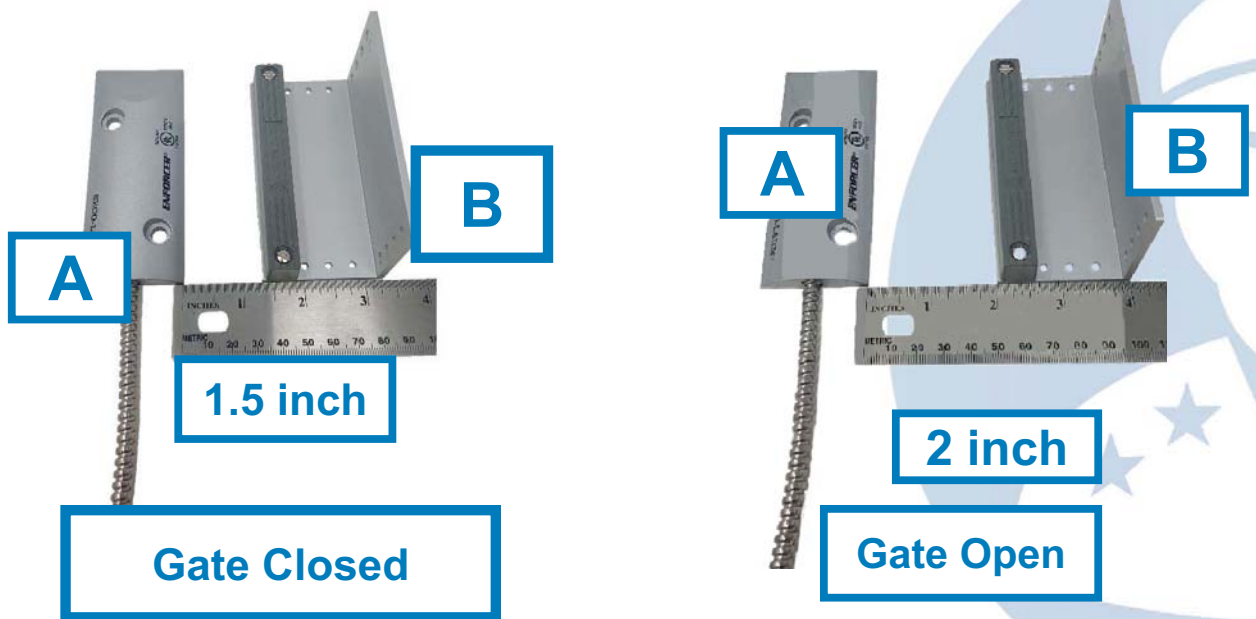


Note: Gate statuses can be inverted. If needed, please call Cellgate to invert.

Mounting to Standard Pedestal Mount

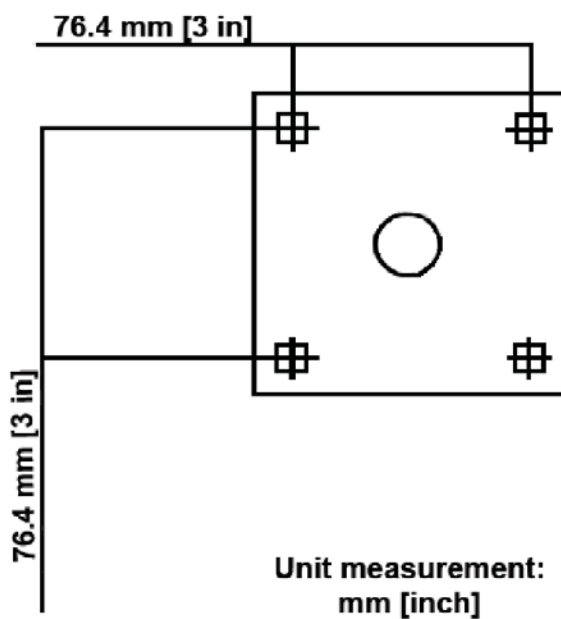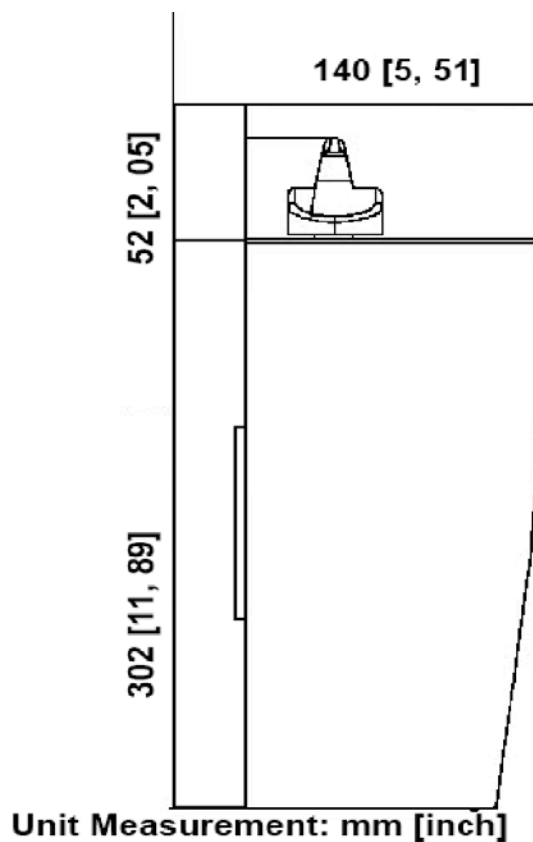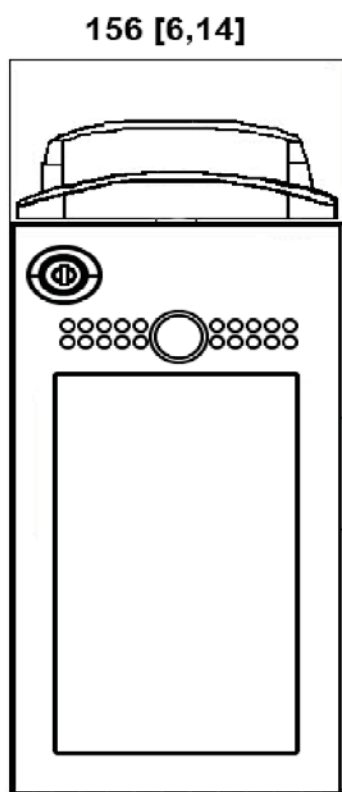

Mounting to Standard Pedestal Mount, Continued

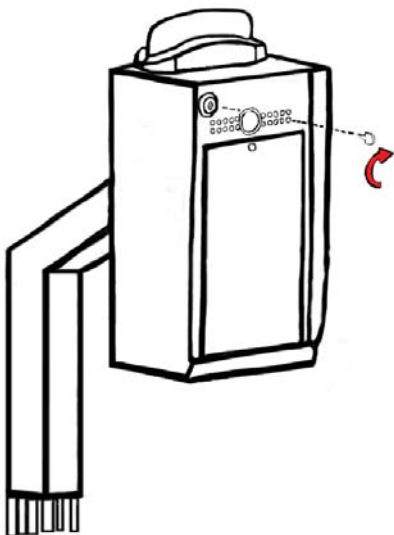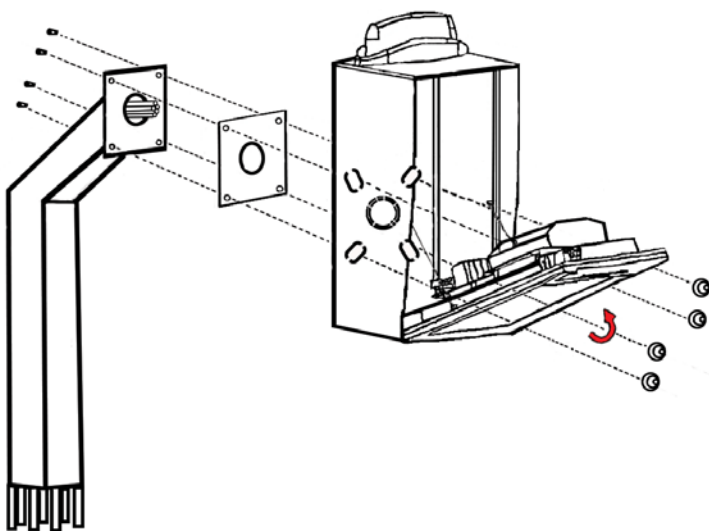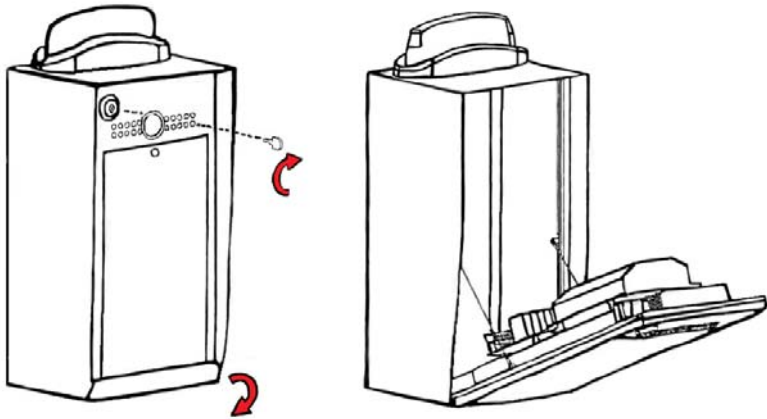



Login Credentials

Username: _____

Password: _____



Write down your login credentials above for your future reference.



End User Guide

Table of Contents

Table of Contents.....	2
User Profile Descriptions.....	3-11
Web Portal Introduction	12-13
Manage Callgroup > Video Callgroup.....	14
Adding Callgroups.....	15
Editing Callgroups.....	16
Invite User / Add User	17
Manage Callgroup > Import Video Callgroup.....	18
Reviewing/Importing Callgroups.....	19
Tenant Resources – Password Creation and Introduction Video.....	20
Tenant Resources – Editing Callgroup.....	21
Tenant Resources – Inviting and Adding Sub-users	22
Tenant Resources – Subscribe Page.....	23
Adding Users and Access Codes	24-27
Viewing/Filtering Logs.....	28
Viewing/Editing My Account.....	29
Viewing/Editing Billing	30
Setting Schedules	31

User Profile Descriptions

Administrator	4
Senior Manager	4
Multi-Property Manager	5
Property Manager.....	5
HOA Manager	6
Dealer Distributor Manager.....	6
Callgroup Manager with Remote Access	7
Callgroup Manager.....	7
Callgroup User with Remote Access.....	8
Callgroup User	8
Voice Callgroup Manager with Remote Access.....	9
Voice Callgroup Manager	9
Voice Callgroup User with Remote Access.....	10
Voice Only Callgroup User	10
Access Code User Only	11
CellGate App User Only	11

NOTE: No one can edit/remove someone in the group above them.

For example: The Senior Manager cannot edit/remove the Administrator, but the Administrator can edit/remove the Senior Manager.

Administrator

Can Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Senior Manager

Can Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Administrator

Multi-Property Manager

Can Do (for their properties only):

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Senior Manager

Property Manager

Can Do (for their property only):

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Multi-Property Manager

HOA Manager

Can Do (for their property only):

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Property Manager
- Manage Billing

Dealer Distributor Manager

Can Do (for their property only):

- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate

Can't Do:

- Use CellGate App
- Import Callgroups
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Callgroup Manager with Remote Access

Can Do (for their callgroup only):

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Users in Web Portal

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Callgroup Manager

Can Do (for their callgroup only):

- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Users in Web Portal

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Callgroup User with Remote Access

Can Do:

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Callgroup User

Can Do:

- Momentarily Open Gate During Call

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Voice Callgroup Manager with Remote Access

Can Do (for their callgroup only):

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Numbers in Web Portal

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Voice Callgroup Manager

Can Do (for their callgroup only):

- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Numbers in Web Portal

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Voice Callgroup User with Remote Access

Can Do:

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Voice Only Callgroup User

Can Do:

- Momentarily Open Gate During Call

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Access Code User Only

Can Do:

- Momentarily Open Gate on Demand

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

CellGate App User Only

Can Do:

- Use CellGate App
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos

Can't Do:

- Import Callgroups
- Momentarily Open Gate During Call
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users


Web Portal Introduction

Log into the Web Portal at user.zapopen.com with your email address and password.

(855) MY GATES | (855) 694 2837 |

A screenshot of the "Cellgate TrueCloud Portal - Sign In" page. It features a white background with a red header. Below the header are two input fields: the first for an email address (containing "youremail@email.com") and the second for a password (containing "*****"). Below these fields is a prominent blue "Sign in" button, which is highlighted by a large blue arrow pointing to it from the right. Below the button is a link for "Forgot Password?".

As soon as you login, you will be redirected to the Dashboard (Home Page).

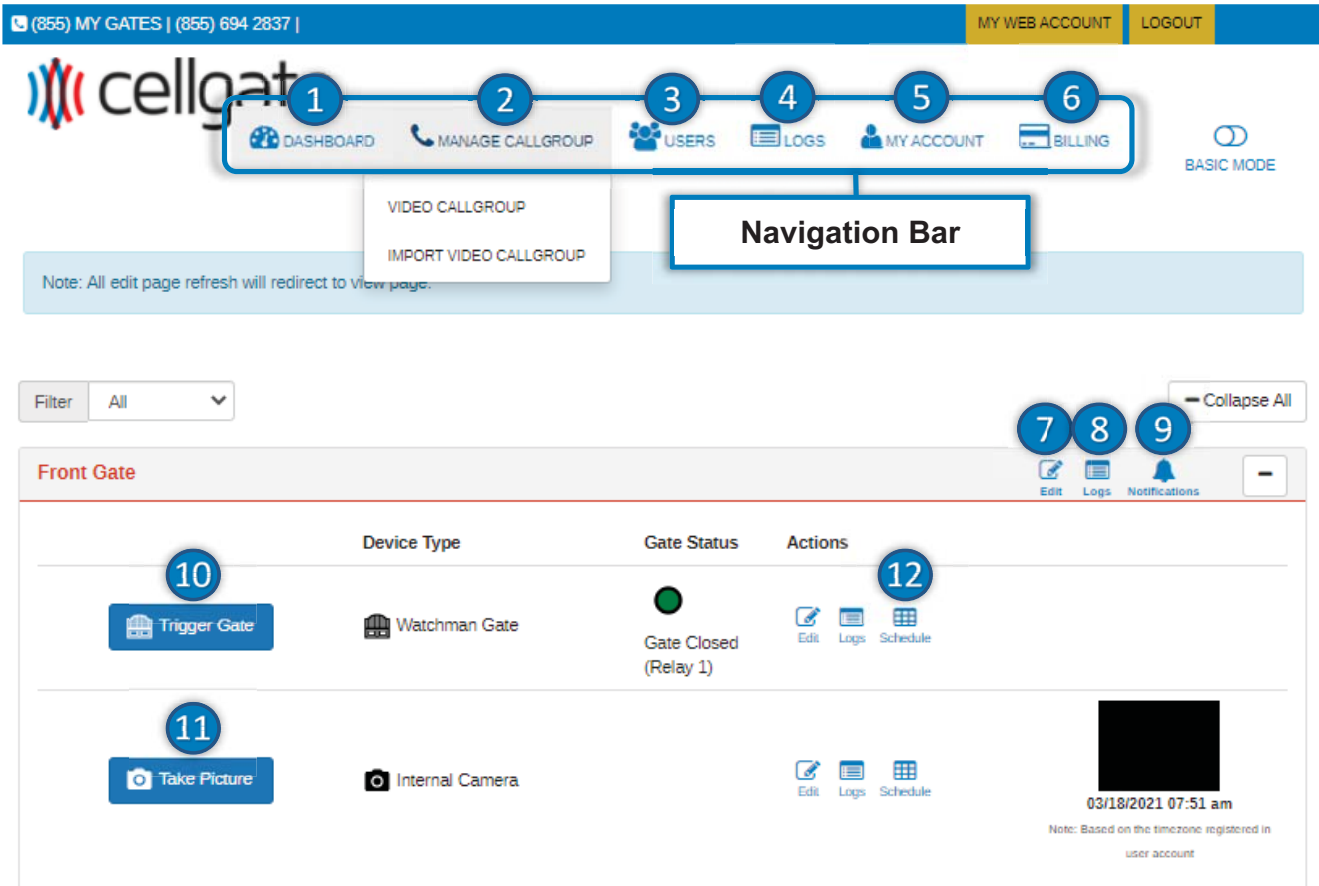

- | | |
|--|---|
| <ul style="list-style-type: none"> 1 Dashboard (current page). 2 View/Import callgroups. 3 Add/Edit users and access codes. 4 View logs and gate/camera history. 5 View/Edit your account information. 6 View/Edit your billing information. | <ul style="list-style-type: none"> 7 Edit the name of your gate. 8 View the logs for this specific gate. 9 Setup text/email notifications. 10 Trigger this gate. 11 Take a photo from the gate's camera. 12 Set a schedule for this gate. |
|--|---|

Manage Callgroup > Video Callgroup

When you click **VIDEO CALLGROUP**, you will be redirected here where you can filter your callgroups by a variety of options.

Filter

Display Name Address Phone Number

User Login Created Active In Active Video Callgroup Active Active In Active

Here, you can add callgroups, remove callgroups, or copy them to other devices.

Video Callgroups

<input type="checkbox"/>	Display Name	Address	User Login Created	Callgroup Active	Device	Action
<input type="checkbox"/>	Front Gate		●	●	1 Device	<input type="button" value="Edit Callgroup"/>

Here, you can resend an invite for someone to set up their callgroup.

Here, you can edit your callgroup.

Here, you can export your callgroups to a spreadsheet.

When you click **Resend Notifications**, this window will pop up allowing you to send an invite via email, text, or both. You can also choose to send the invite now or at another scheduled time.

Send/Schedule Notifications ✕

Notification Type

Sending Option Send Now Schedule it for later

Adding Callgroups

When you click **+Add**, you will be redirected here.

Video Callgroup Swap Go to Add User Wizard

Display Name:

Address:

Devices: [Assign To Device](#)

EVO App Calls - all users simultaneously called for 30 seconds

First Called

Select..

Select..

Select..

EVO App Calls - all users simultaneously called for 30 seconds - (Optional Skipped if empty)

Second Called

Select..

Select..

Select..

Telephone Entry Calls - All numbers are called simultaneously for 30 seconds

Telephone entry calls will ring last in sequence. Calls will come from 972-231-1999. Press * to allow visitors to enter.

Third Called

() _ _ - _

() _ _ - _

() _ _ - _

Cancel Save All

This field is optional for your records.

This is the name that will appear on the unit for this callgroup.

First set of app users called.

Second set of app users called.

Third set of phone numbers called.

NOTE: When you receive a call from the unit, you must press 1 to be connected to the call. To open the gate, press star (*) or 9.

Edit Callgroups

When you click Edit Callgroup, you will be redirected here. Since you're editing an existing callgroup, you can invite a user to setup their own password or add them and create their password yourself.

Video Callgroup

Display Name:

Address:

Devices: [1 Devices](#)

EVO App Calls - all users simultaneously called for 30 seconds

	<input type="text" value="CellGate"/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
First Called	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>

EVO App Calls - all users simultaneously called for 30 seconds - (Optional Skipped if empty)

	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
Second Called	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>

Telephone Entry Calls - All numbers are called simultaneously for 30 seconds

Telephone entry calls will ring last in sequence. Calls will come from 972-231-1999. Press * to allow visitor

	<input type="text" value="() _ - _"/>		
Third Called	<input type="text" value="() _ - _"/>		
	<input type="text" value="() _ - _"/>		

Here, you can invite a user to setup their own password. They will be added to whatever slot the button is next to.

Here, you can add a user to whatever slot the button is next to and set up their password for them.


NOTE: When you receive a call from the unit, you must press 1 to be connected to the call. To open the gate, press star (*) or 9.

This guide provided by CellGate is intended as a reference guide for the gate access portal interface. It is not intended to be used as a public resource outside of CellGate.


16

Invite User / Add User

When you click **+ Invite User**, this window will pop up allowing you to send an invite via email, text, or both. This will prompt the user to setup their own password and download the CellGate App.

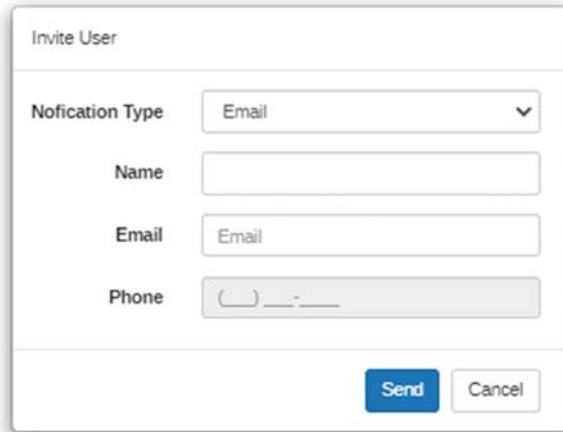

When you click **+ Add User**, this window will pop up allowing you to add a user and create a password for them.

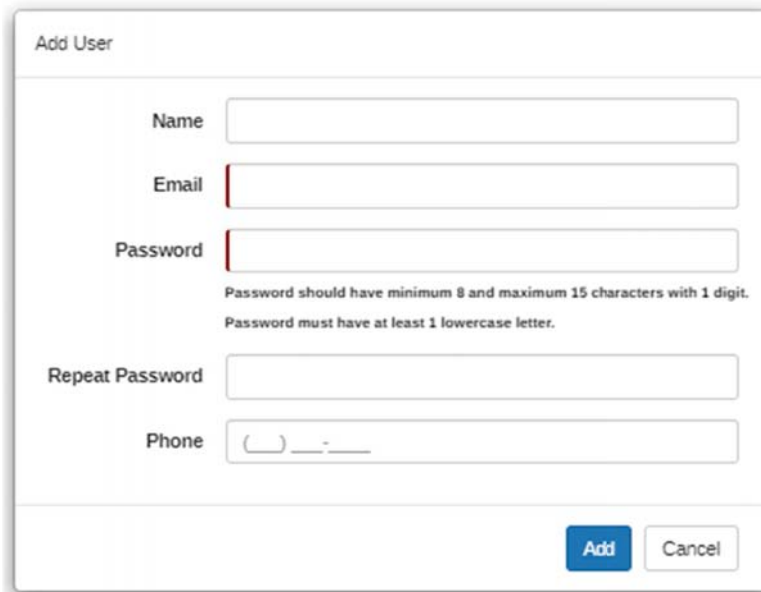

Manage Callgroup > Import Video Callgroup

When you click **IMPORT VIDEO CALLGROUP**, you will be redirected here where you can load your callgroups and import them through the use of a template.

Import Video Callgroups

Here, you can download a blank CellGate or DoorKing template.

Standard Template | DoorKing Template

Select File

Choose File StandardCel...elmpor.xlsx

Choose completed template from your computer.

Load your template or clear it if you picked the wrong file.

Clear Load Template

Filter

Expand filter options.

Show Only Errors Yes No

Here, you can copy callgroups to other devices, merge them, remove them, or apply them to user groups.

Review Errors Apply Restrictions Copy To Devices Merge Remove User Groups

<input type="checkbox"/>	User Group	Receive Text	Device	Restriction	Display Name	First Name	Last Name	Email
<input type="checkbox"/>	C&M	●	No Device	No Template	Smith, J.	John	Smith	jsmith@email.com
<input type="checkbox"/>	C&M	●	No Device	No Template	Jones, M.	Michael	Jones	mjones@email.com
<input type="checkbox"/>	C&M	●	No Device	No Template	Stuart, J.	Josh	Stuart	jstuart@email.com

Here, you can review any import errors.

Undo All Edits Save changes for later use Review and Import

Here, you can save your import for later or import now.

Reviewing/Importing Callgroups

When you click Review and Import, you will be redirected here where you can view the email and text templates that will be sent to your users.

Your users will be prompted to create a password and download the CellGate App for either iOS or Android. They will also be provided a link to the CellGate App Guide and the Property Manager’s contact information.

Import Review

Property administrator email:

Property administrator phone:

Example of email callgroup manager will be receiving:

WATCHMAN®

Dear John Smith, you are receiving this email because Front Gate is installing a Watchman telephone entry system. Take these [2 Easy Steps](#) to set up and activate your callgroups: **IMPORTANT - to receive calls and video from the gate, callgroups MUST be set up.**

- **STEP 1:** a password by clicking on the link below.
Link to create password: [Create Password](#)

**note, password must be a minimum of 8 characters and must include at least one number and one letter; cannot be all caps. After you have created your password, you will then be able to add users and set up your callgroup.*

- **STEP 2:** download the CellGate App:
 - Click here for iOS →
 - Click here for Android →

If you have any questions, please call your property manager. For your reference, here's a link to the CellGate App Guide: [Download](#)

We hope you enjoy your new Watchman system.

Example Phone text callgroup manager will be receiving:

Front Gate has a new entry system. To receive video calls from visitors on your phone, click the link below and create your login. For questions, contact CellGate at 9722311999. Link

This contact information will populate on the enrollment emails.

Here, you can import your callgroups now or schedule a time for them to be imported.

NOTE: Emails will have the subject line "IMPORTANT - [Property Name] - New access control system being installed" and will come from alerts@cell-gate.com.

Tenant Resources – Password Creation and Introduction Video

When tenants click on the link to create their password, this web page will pop up prompting them to do so.

(855) MY GATES | (855) 694 2837 |



Create Master User Password

Email

Password

Password should have minimum 8 and maximum 15 characters with 1 digit.
 Password must have at least 1 lowercase letter.

Repeat Password

Create Password

These are the password requirements. Please also note there can be no symbols and the password cannot be in all capital letters.

After setting up their password, tenants will be redirected to this page where they can watch a video on how to configure their callgroup.

(855) MY GATES | (855) 694 2837 | LOGIN



Watchman System Configuration

Your property has invested a significant amount to increase your security and convenience. You can learn more about Watchman by going to cellgate.com/watchman. Watchman allows you to have a live video conversation with a visitor, using your smart phone, anywhere you are. You will be able to create the users in your apartment, home or business that you want to receive calls and the order in which they are received. Watchman uses an app on iPhone or Android to receive calls. The system will call up to 3 people simultaneously. If nobody answers within 30 seconds, then a second group of up to 3 people can be called. Finally, if nobody answers, it can call a voice only number like a landline or cellphone voice number, but of course this will only have audio like a telephone entry system.

Tenant Resources – Editing Callgroup

After logging in, tenants will be able to configure their callgroup by adding sub-users or phone numbers.

To add codes or other methods of access to the property, tenants will have to contact the account’s administrator.

Video Callgroup

Display Name:

Address:

Devices: [1 Devices](#)

EVO App Calls - all users simultaneously called for 30 seconds

	<input type="text" value="CellGate"/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
First Called	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>

EVO App Calls - all users simultaneously called for 30 seconds - (Optional Skipped if empty)

	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
Second Called	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>
	<input type="text" value="Select..."/>	<input type="button" value="+ Invite User"/>	<input type="button" value="+ Add User"/>

Telephone Entry Calls - All numbers are called simultaneously for 30 seconds

Telephone entry calls will ring last in sequence. Calls will come from 972-231-1999. Press * to allow visitors to enter.

	<input type="text" value="() _ _ - _ _"/>		
Third Called	<input type="text" value="() _ _ - _ _"/>		
	<input type="text" value="() _ _ - _ _"/>		

NOTE: When using the “Invite User” function, the contact MUST be made aware to check for their invite email or text and subscribe to be able to use the CellGate App.

Tenant Resources – Inviting and Adding Sub-users

When tenants click on **Invite User**, they will be prompted to enter the notification type (email, text or both), the name of the sub-user they’re inviting, and the sub-user’s contact method (email or text).

Invite User


Notification Type

Name

Email

Phone

Below is an example of what the invite email could look like.

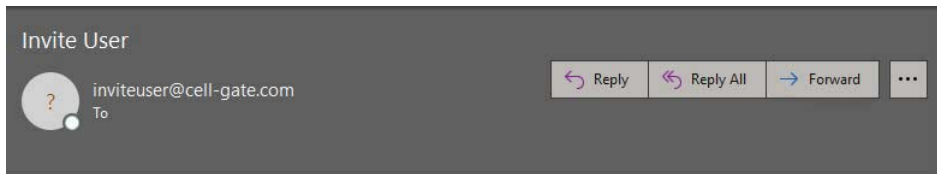

Hi,

2102 Main Street, Briarwood, Tx 75555 has a new entry system. to receive video calls from visitors on your phone, click the link below and create your login. For questions, contact your system administrator.

[Subscribe](#)

Thanks,
Cellgate

When tenants click on **Add User**, they will be prompted to enter their sub-user’s name and login information manually. Sub-users cannot reset their own password; this is done by callgroup managers or system administrators.

Add User

Name

Email

Password
Password should have minimum 8 and maximum 15 characters with 1 digit.
 Password must have at least 1 lowercase letter.

Repeat Password

Phone

Tenant Resources – Subscribe Page

After invited users click on “Subscribe”, they will be redirected to this web page where they enter in their desired username (email) and password.

After this, they will be able to download the CellGate App and login with their new credentials to receive video calls.



Subscribe Callgroup

Subscribe

User Name Should be

- Mail format.
- Alphabet letters (A to Z and a to z), Digits (0 to 9), Hyphen(-) and Special characters (i.e. !#\$%&*+./=:? ^_{}~).

Password Should be

- Minimum eight characters, at least one letter and one number

Adding Users and Access Codes

When you click  **USERS** on the Navigation Bar, you will be redirected here.

ACCOUNT USERS

Access Codes with an asterisk are stored on device.

Name

Name	Properties/Locations	Access	Restrictions	User Group	User Profiles
CellGate	All devices on this account	Gate Code: [1234*]		Administrator	Administrator Manager Profile

Here, you can filter your Users.

Add an Access Code or User.

When you click , you will be redirected here.

ADD CODE

User Details

Name

Access Properties/Install Locations

Access to All Properties/Install Locations?

Name of who the Access Code is assigned to.

Yes: Access Code can be used at all locations.

No: You choose which locations this Access Code can access.

When you click **+ Add Code**, you will be redirected here (continued).

Access Methods

**4 – 5 digit
Access
Code below
65534.**

Save to Device

Yes: Access Code has no restrictions.

No: Access Code can be restricted (see below).

Access Restrictions

What date range can they access? Specific

What time frame can they access? Specific

What days can they access? Specific

How many times can they access? Specific

Restrict Access Code by:

- Date Range
- Time Frame
- Days of the Week
- Number of Times it Can Be Used

Each device can have one Hold Open Code. This code is automatically created and can only be edited by CellGate. To create a new code, the old one must be deleted first.

Hold Open Codes open the gate indefinitely until a code is re-entered or the "Close Gate" function is used via the app or web portal.

ACCOUNT USERS

Access Codes with an asterisk are stored on device.

Name	Properties/Locations	Access	Restrictions	User Group	User Profiles
CellGate	All devices on this account	Gate Code: [1234*]		Administrator	Administrator Manager Profile
Hold Open Code	All devices on this account	Gate Code: [12345*]		Hold Open Code User	Hold Open Code User Profile

When you click **+ Add User**, you will be redirected to this page with 5 different sections.

ADD USER

USER DETAILS USER PROFILE ACCESS LOCATIONS ACCESS METHODS RESTRICTIONS

Add New User

WHO DO YOU WANT TO ADD TO THE SYSTEM?

Name

Email

Phone Number

Timezone

Next

Name of the User.

These fields are optional but are available for your reference.

Add New User

WHAT PROFILES SHOULD JOHN SMITH HAVE?

Select Group:

Add Group and Profiles

Back **Next**

Select from one of the profiles listed and assign it to your user.

Add New User

WHAT SHOULD JOHN SMITH HAVE ACCESS TO?

Should John Smith have access to all CellGate properties/install locations?



Yes No

Which CellGate properties/install locations should John Smith have access to?

- Dallas, TX
- Front Gate

Yes: Access Code can be used at all locations.

No: You choose which locations this Access Code can access.

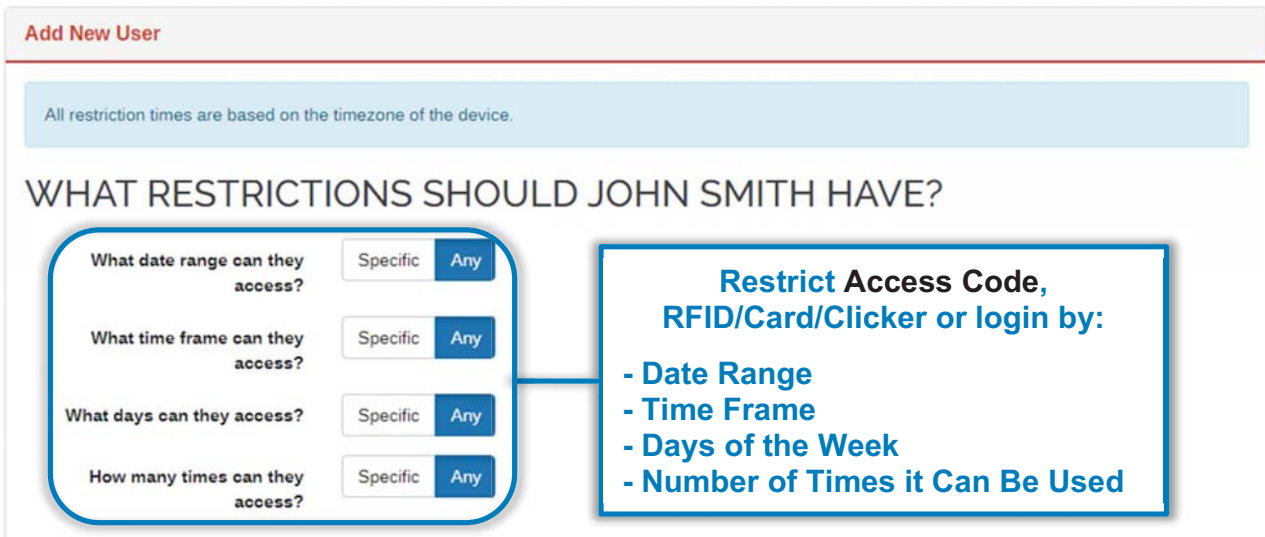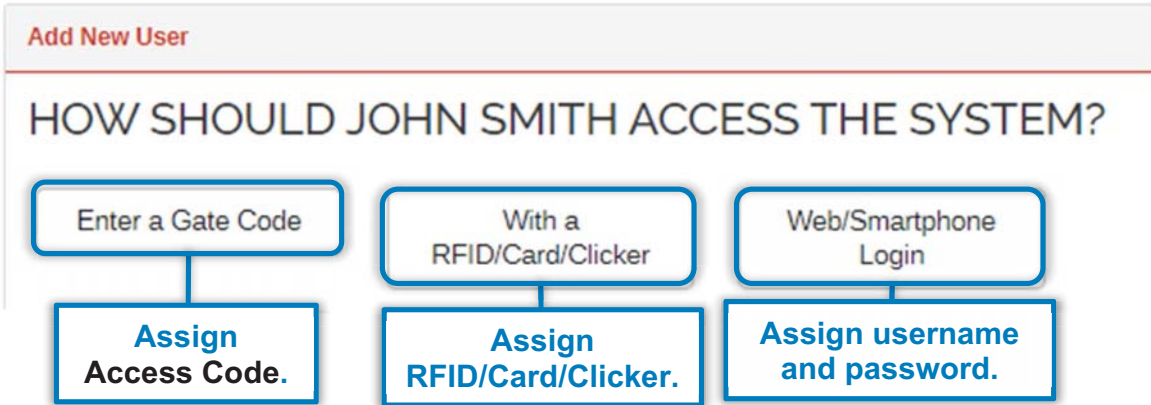

Viewing/Filtering Logs

When you click  LOGS, you will be redirected to this page where you can filter Logs and gate/camera history.

LOGS

Log Filter

Install Location

Access Code

Zap Open Number

Phone Number

Callgroup Name

Log Types Images Devices Alarms
 Device Actions Access

Date From... To...

Response Successful Failed Pending

Filter By Schedule


Activity

Happened On	Device	Initiated By	Action	Response
03/24/2021 02:52 am CST	Watchman Gate Front Gate	Cellgate (Admin) Scheduled Event	Gate Closed	Success
03/24/2021 02:48 am CST	Watchman Gate Front Gate	Cellgate (Admin) Scheduled Event	Gate Opened	Success
03/24/2021 02:44 am CST	Watchman Gate Front Gate	Cellgate (Admin) Scheduled Event	Gate Closed	Success

Export Logs to a spreadsheet.

Viewing/Editing My Account

When you click  **MY ACCOUNT** on the Navigation Bar, you will be redirected here.

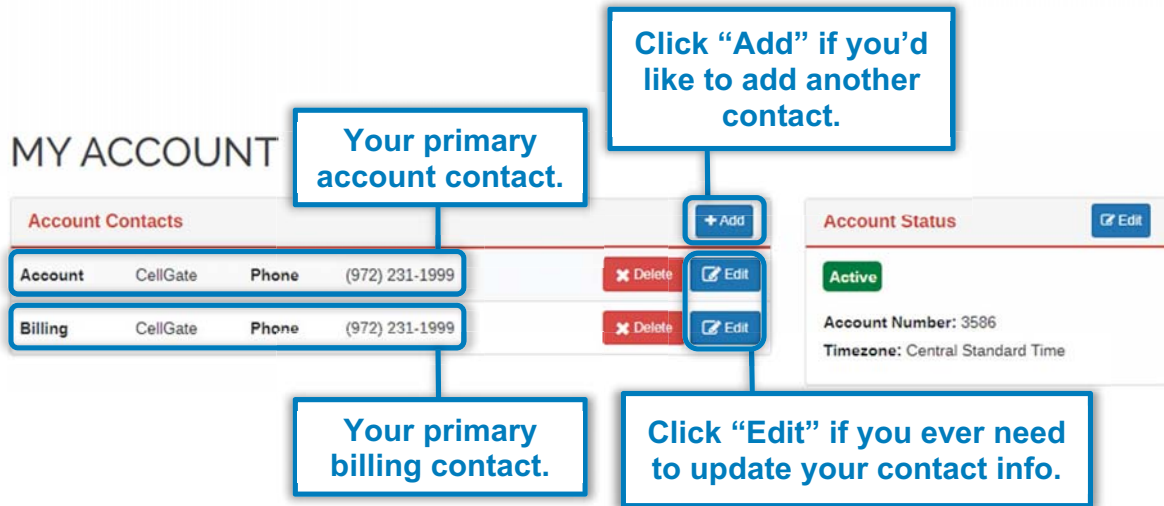

The screenshot shows the 'MY ACCOUNT' interface. On the left, there is a table titled 'Account Contacts' with two rows: 'Account' and 'Billing'. Both rows show 'CellGate' as the contact name and '(972) 231-1999' as the phone number. Each row has 'Delete' and 'Edit' buttons. A callout box points to the 'Account' row, stating 'Your primary account contact.' Another callout points to the 'Add' button above the table, stating 'Click "Add" if you'd like to add another contact.' A third callout points to the 'Edit' button for the 'Account' row, stating 'Click "Edit" if you ever need to update your contact info.' On the right, there is an 'Account Status' section showing 'Active' and 'Account Number: 3586'.

When you click  across from Account or Billing, you will be redirected to this page where you can update your contact info.

Contact Details

Contact Type	<input type="text" value="Account"/>
Name	<input type="text" value="CellGate"/>
Country	<input style="border-bottom: 1px solid #ccc;" type="text" value="United States"/>
Address	<input type="text" value="2150 Chenault Drive"/>
	<input type="text" value="Unit #"/>
	<input type="text" value="Carrollton"/>
	<input style="border-bottom: 1px solid #ccc;" type="text" value="Texas"/> <input type="text" value="75006"/>
Email	<input type="text" value="your@email.com"/>
Phone	<input type="text" value="(972) 231-1999"/> <input style="border-bottom: 1px solid #ccc;" type="text" value="Phone"/> <input type="button" value="+ Add Another"/>

Viewing/Editing Billing

When you click  on the Navigation Bar, you will be redirected here.

BILLING

Your reoccurring bill amount.

Monthly Recurring

Monthly would bill \$0.00 + tax bill every month

Payment Information

 Edit

MONTHLY RECURRING

Click "Edit" if you ever need to update your credit card info.

**** 1111
11 / 2020

CellGate
2150 Chenault Drive
Carrollton, TX 75006
US

Your billing address.

Email
your@email.com


Email where invoices and receipts will be sent.

INVOICES

No Invoices Found


Setting Schedules

To set a Schedule, you will need to navigate back to the Dashboard.

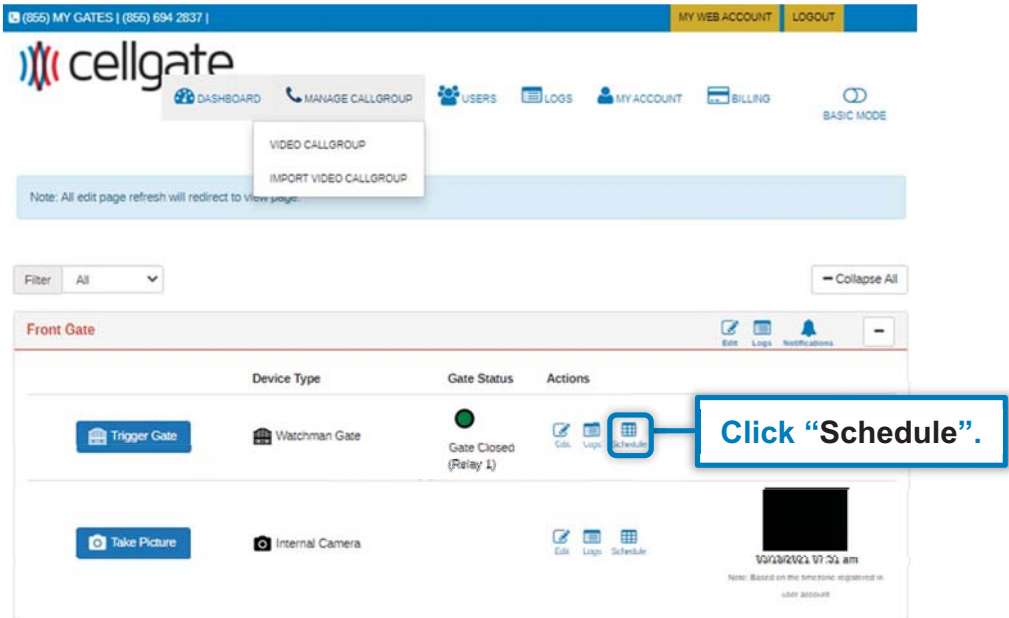

When you click , you will be redirected here.

EDIT SCHEDULE

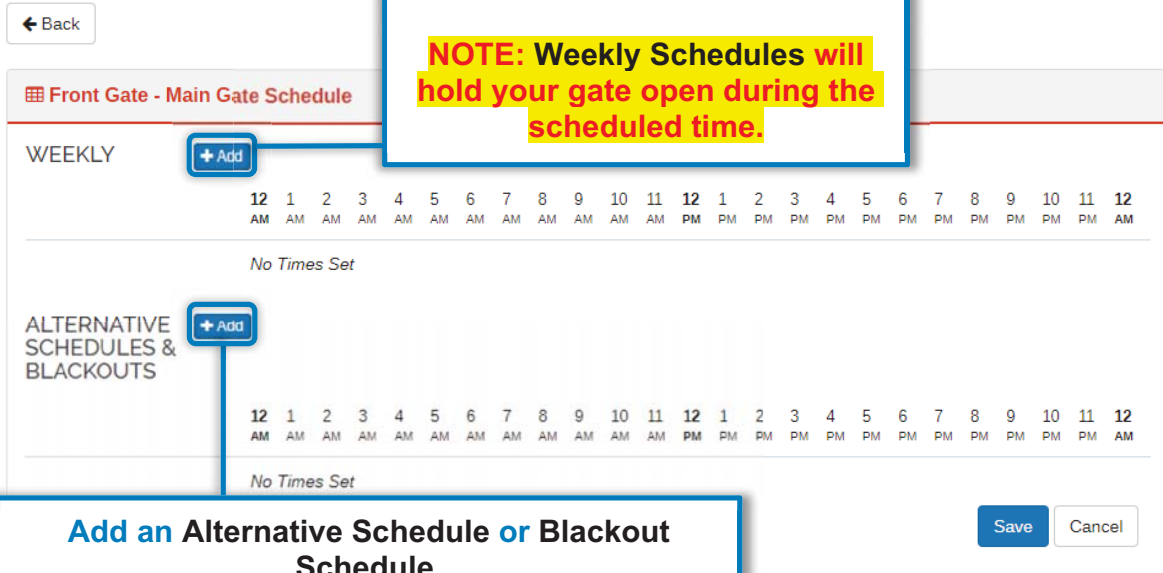

Add an Alternative Schedule or Blackout Schedule.

Alternative Schedule: Will override the default schedule for the selected date(s).

Blackout Schedule: Will ignore all schedules for the selected date(s).

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.