

TEST REPORT

Product Name: Media Player
FCC ID: 2AOQN-YM05
Trademark: Lunzn
Model Number: YM05
Prepared For: Shenzhen Lunzn Technology CO., Ltd.
Address: Room606, Gangtou Development Building, No. 133 Xuegang North Road, Bantian Street, Longgang District, Shenzhen, China
Manufacturer: Shenzhen Lunzn Technology CO., Ltd.
Address: Room606, Gangtou Development Building, No. 133 Xuegang North Road, Bantian Street, Longgang District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 05, 2023
Sample tested Date: Jan. 05, 2023 to Jan. 11, 2023
Issue Date: Jan. 11, 2023
Report No.: CTB230109013RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

ChenZheng

Chen Zheng

Arron Liu

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit.....	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup.....	15
7.2 Limit.....	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup.....	39
8.2 Limit.....	39
8.3 Test procedure	39
9. CONDUCTED OUTPUT POWER.....	56
9.1 Block Diagram Of Test Setup.....	56
9.2 Limit.....	56
9.3 Test procedure	56
9.4 Test Result	57
10. 6DB OCCUPIED BANDWIDTH.....	58
10.1 Block Diagram Of Test Setup.....	58
10.2 Limit.....	58
10.3 Test procedure	58
10.4 Test Result	59
11. POWER SPECTRAL DENSITY.....	69
11.1 Block Diagram Of Test Setup.....	69
11.2 Limit.....	69
11.3 Test procedure	69
11.4 Test Result	70
12. ANTENNA REQUIREMENT	79
13. EUT PHOTOGRAPHS.....	80
14. EUT TEST SETUP PHOTOGRAPHS.....	81

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230109013RFX	Jan. 11, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	YM05
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 14.589dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G) : Ant1: 3.21dBi Ant2: 3.21dBi
Ratings:	INPUT:100-240V AC 50/60Hz Max 0.2A OUTPUT: 12V 1A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Monitor	DELL	SE2218HV	N/A	N/A
2.	USB flash disk	Kingston	USB25630	/	/
3	AC adapter	Shenzhen Lunzn Technology Co., Ltd.	BJF-215-10W-NL	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.2dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120
Normal Temperature(°C)	23



Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

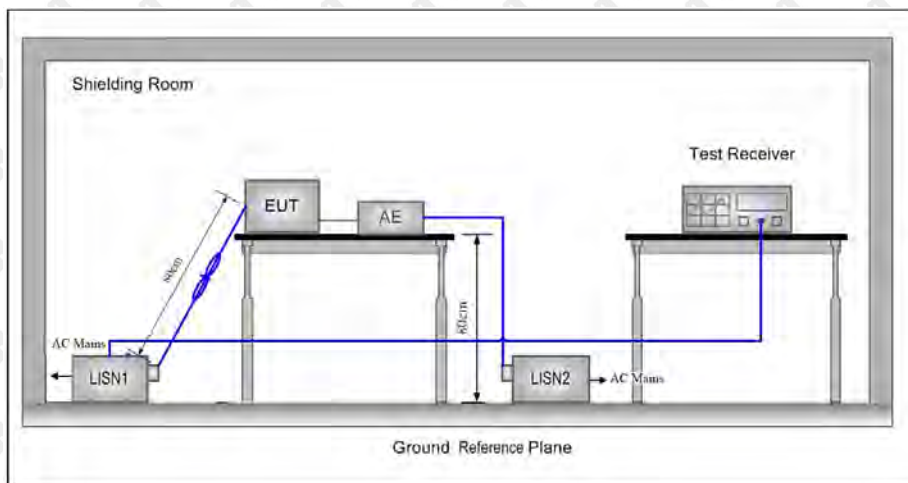

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

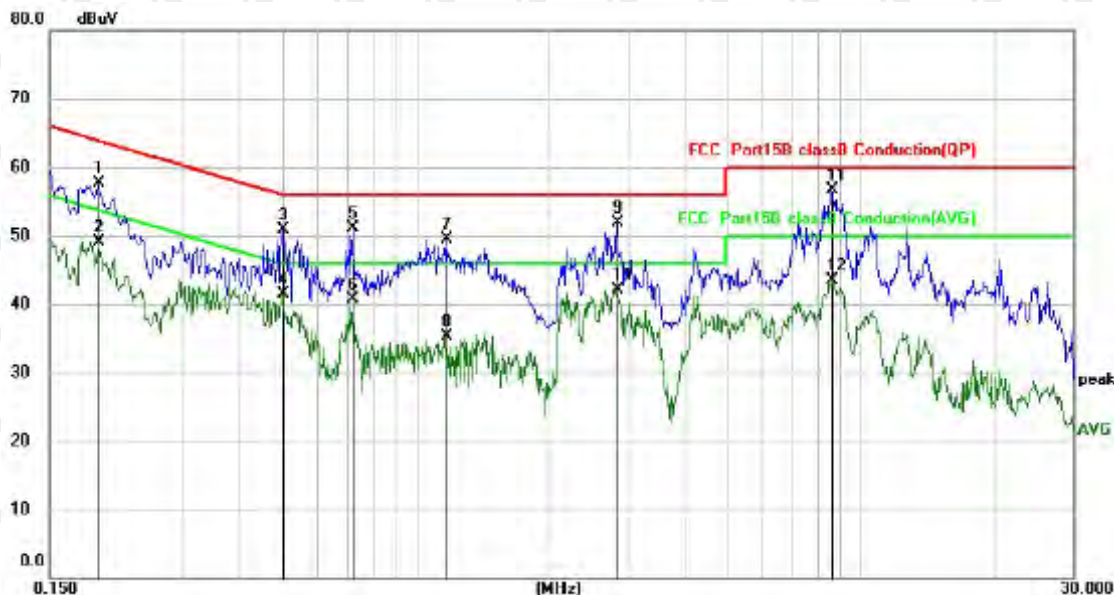

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1940	47.76	10.00	57.76	63.86	-6.10	QP
2		0.1940	39.02	10.00	49.02	53.86	-4.84	AVG
3		0.5020	40.90	9.97	50.87	56.00	-5.13	QP
4		0.5020	31.62	9.97	41.59	46.00	-4.41	AVG
5		0.7219	41.11	9.97	51.08	56.00	-4.92	QP
6		0.7219	30.71	9.97	40.68	46.00	-5.32	AVG
7		1.1739	39.52	9.99	49.51	56.00	-6.49	QP
8		1.1739	25.39	9.99	35.38	46.00	-10.62	AVG
9		2.8300	41.75	10.07	51.82	56.00	-4.18	QP
10		2.8300	32.09	10.07	42.16	46.00	-3.84	AVG
11	*	8.5579	46.34	10.30	56.64	60.00	-3.36	QP
12		8.5579	33.14	10.30	43.44	50.00	-6.56	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

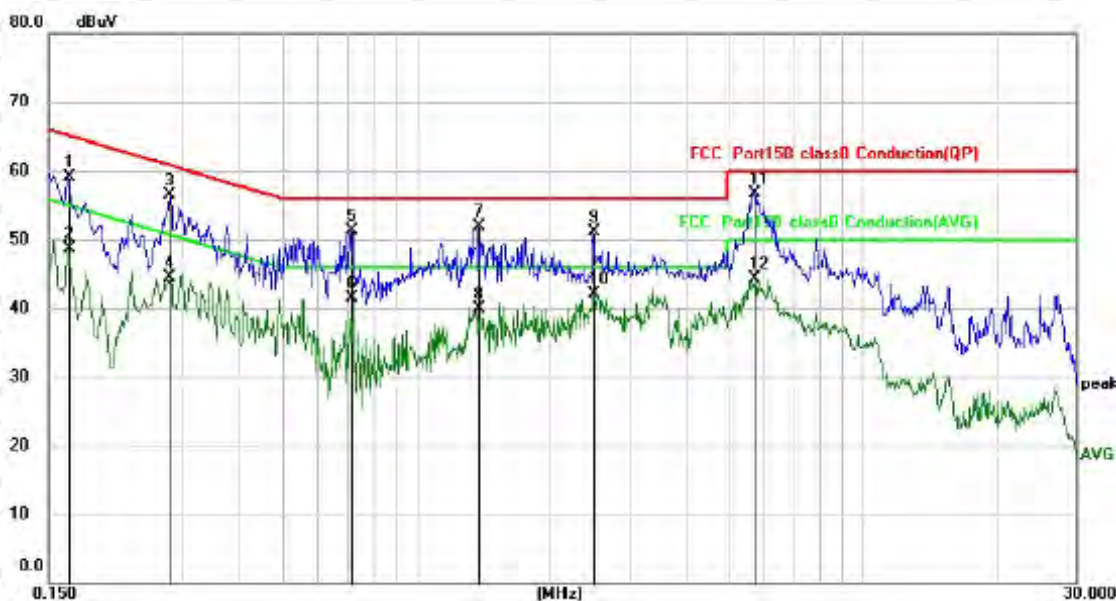

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Over	Detector
		MHz	Level	Factor	dBuV	dBuV	dB	
1		0.1660	49.18	10.01	59.19	65.16	-5.97	QP
2		0.1660	38.74	10.01	48.75	55.16	-6.41	AVG
3		0.2802	46.56	10.00	56.56	60.81	-4.25	QP
4		0.2802	34.47	10.00	44.47	50.81	-6.34	AVG
5		0.7138	41.41	9.97	51.38	56.00	-4.62	QP
6		0.7138	31.49	9.97	41.46	46.00	-4.54	AVG
7		1.3778	41.84	10.00	51.84	56.00	-4.16	QP
8		1.3778	29.89	10.00	39.89	46.00	-6.11	AVG
9		2.4980	41.05	10.05	51.10	56.00	-4.90	QP
10		2.4980	32.07	10.05	42.12	46.00	-3.88	AVG
11	*	5.6859	46.61	10.19	56.80	60.00	-3.20	QP
12		5.6859	34.12	10.19	44.31	50.00	-5.69	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

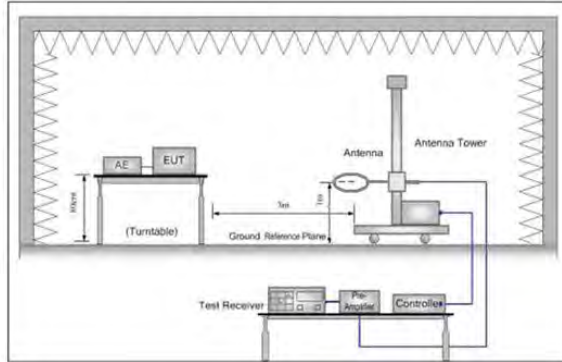


Figure 1. Below 30MHz

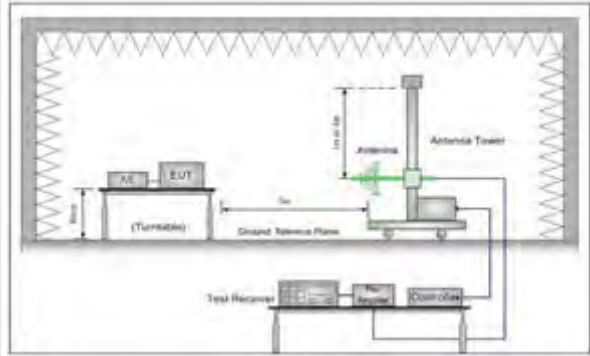


Figure 2. 30MHz to 1GHz

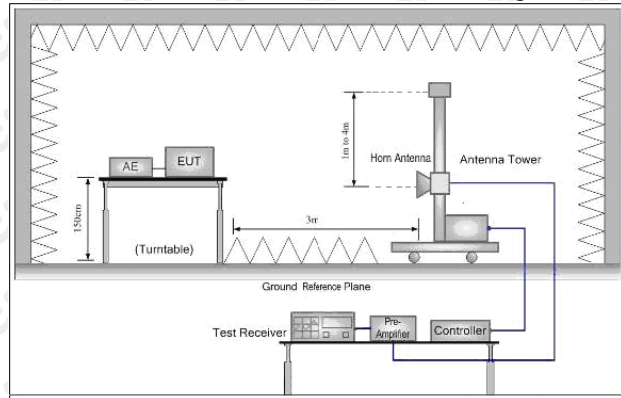


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.3534	31.90	-6.52	25.38	40.00	-14.62	QP
2		84.4054	39.96	-10.37	29.59	40.00	-10.41	QP
3		136.6993	42.23	-5.77	36.46	43.50	-7.04	QP
4	*	217.5443	50.63	-9.03	41.60	46.00	-4.40	QP
5		596.1772	28.36	2.36	30.72	46.00	-15.28	QP
6		965.5421	34.79	7.83	42.62	54.00	-11.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Over dB	Detector
1		31.4142	37.42	-6.84	30.58	40.00	-9.42	QP
2	!	72.6750	44.73	-9.46	35.27	40.00	-4.73	QP
3	*	137.9028	47.10	-5.68	41.42	43.50	-2.08	QP
4	!	176.8000	47.16	-7.52	39.64	43.50	-3.86	QP
5	!	204.5961	50.66	-9.32	41.34	43.50	-2.16	QP
6		948.7610	31.52	7.63	39.15	46.00	-6.85	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.12	-3.64	61.48	74	-12.52	peak
4824	48.92	-3.64	45.28	54	-8.72	AVG
7236	58.54	-0.95	57.59	74	-16.41	peak
7236	45.53	-0.95	44.58	54	-9.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.60	-3.64	60.96	74	-13.04	peak
4824	47.43	-3.64	43.79	54	-10.21	AVG
7236	56.69	-0.95	55.74	74	-18.26	peak
7236	43.62	-0.95	42.67	54	-11.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.53	-3.51	61.02	74	-12.98	peak
4874	49.45	-3.51	45.94	54	-8.06	AVG
7311	59.29	-0.82	58.47	74	-15.53	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.98	-3.51	61.47	74	-12.53	peak
4874	46.71	-3.51	43.20	54	-10.80	AVG
7311	58.65	-0.82	57.83	74	-16.17	peak
7311	43.87	-0.82	43.05	54	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.74	-3.43	61.31	74	-12.69	peak
4924	47.14	-3.43	43.71	54	-10.29	AVG
7386	58.62	-0.75	57.87	74	-16.13	peak
7386	43.02	-0.75	42.27	54	-11.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.22	-3.43	61.79	74	-12.21	peak
4924	45.84	-3.43	42.41	54	-11.59	AVG
7386	58.47	-0.75	57.72	74	-16.28	peak
7386	41.54	-0.75	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	66.05	-3.64	62.41	74	-11.59	peak
4824	50.09	-3.64	46.45	54	-7.55	AVG
7236	56.84	-0.95	55.89	74	-18.11	peak
7236	45.43	-0.95	44.48	54	-9.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	64.34	-3.64	60.70	74	-13.30	peak
4824	48.42	-3.64	44.78	54	-9.22	AVG
7236	58.73	-0.95	57.78	74	-16.22	peak
7236	45.23	-0.95	44.28	54	-9.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.46	-3.51	60.95	74	-13.05	peak
4874	49.01	-3.51	45.50	54	-8.50	AVG
7311	58.26	-0.82	57.44	74	-16.56	peak
7311	44.22	-0.82	43.40	54	-10.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.38	-3.51	60.87	74	-13.13	peak
4874	48.90	-3.51	45.39	54	-8.61	AVG
7311	58.83	-0.82	58.01	74	-15.99	peak
7311	45.06	-0.82	44.24	54	-9.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.44	-3.43	60.01	74	-13.99	peak
4924	47.38	-3.43	43.95	54	-10.05	AVG
7386	57.86	-0.75	57.11	74	-16.89	peak
7386	44.86	-0.75	44.11	54	-9.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.79	-3.43	61.36	74	-12.64	peak
4924	47.96	-3.43	44.53	54	-9.47	AVG
7386	58.77	-0.75	58.02	74	-15.98	peak
7386	41.18	-0.75	40.43	54	-13.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.63	-3.64	61.99	74	-12.01	peak
4824	50.08	-3.64	46.44	54	-7.56	AVG
7236	59.55	-0.95	58.60	74	-15.40	peak
7236	45.12	-0.95	44.17	54	-9.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.69	-3.64	63.05	74	-10.95	peak
4824	49.16	-3.64	45.52	54	-8.48	AVG
7236	58.35	-0.95	57.40	74	-16.60	peak
7236	43.89	-0.95	42.94	54	-11.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.73	-3.51	60.22	74	-13.78	peak
4874	48.78	-3.51	45.27	54	-8.73	AVG
7311	59.15	-0.82	58.33	74	-15.67	peak
7311	44.34	-0.82	43.52	54	-10.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.28	-3.51	59.77	74	-14.23	peak
4874	47.16	-3.51	43.65	54	-10.35	AVG
7311	58.26	-0.82	57.44	74	-16.56	peak
7311	43.99	-0.82	43.17	54	-10.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.62	-3.43	61.19	74	-12.81	peak
4924	47.19	-3.43	43.76	54	-10.24	AVG
7386	58.74	-0.75	57.99	74	-16.01	peak
7386	45.00	-0.75	44.25	54	-9.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.60	-3.43	60.17	74	-13.83	peak
4924	47.58	-3.43	44.15	54	-9.85	AVG
7386	58.24	-0.75	57.49	74	-16.51	peak
7386	41.57	-0.75	40.82	54	-13.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.40	-3.63	60.77	74	-13.23	peak
4844	47.69	-3.63	44.06	54	-9.94	AVG
7266	60.01	-0.94	59.07	74	-14.93	peak
7266	46.50	-0.94	45.56	54	-8.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.60	-3.63	60.97	74	-13.03	peak
4844	47.86	-3.63	44.23	54	-9.77	AVG
7266	57.85	-0.94	56.91	74	-17.09	peak
7266	44.63	-0.94	43.69	54	-10.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.06	-3.51	59.55	74	-14.45	peak
4874	49.07	-3.51	45.56	54	-8.44	AVG
7311	59.25	-0.82	58.43	74	-15.57	peak
7311	45.49	-0.82	44.67	54	-9.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.33	-3.51	58.82	74	-15.18	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.61	-3.43	61.18	74	-12.82	peak
4904	48.92	-3.43	45.49	54	-8.51	AVG
7356	57.06	-0.75	56.31	74	-17.69	peak
7356	41.95	-0.75	41.20	54	-12.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	61.86	-3.43	58.43	74	-15.57	peak
4904	46.21	-3.43	42.78	54	-11.22	AVG
7356	58.96	-0.75	58.21	74	-15.79	peak
7356	44.10	-0.75	43.35	54	-10.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.11	-5.81	51.30	74	-22.70	peak
2390	/	-5.81	/	54	/	AVG
2399	64.61	-5.84	58.77	74	-15.23	peak
2399	48.93	-5.84	43.09	54	-10.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.80	-5.81	50.99	74	-23.01	peak
2390	/	-5.81	/	54	/	AVG
2399	62.73	-5.84	56.89	74	-17.11	peak
2399	46.61	-5.84	40.77	54	-13.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.34	-5.65	50.69	74	-23.31	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.21	-5.65	50.56	74	-23.44	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.62	-5.81	52.81	74	-21.19	peak
2390	/	-5.81	/	54	/	AVG
2399	63.33	-5.84	57.49	74	-16.51	peak
2399	47.55	-5.84	41.71	54	-12.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.97	-5.81	51.16	74	-22.84	peak
2390	/	-5.81	/	54	/	AVG
2399	62.48	-5.84	56.64	74	-17.36	peak
2399	45.30	-5.84	39.46	54	-14.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.50	-5.65	51.85	74	-22.15	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.40	-5.65	51.75	74	-22.25	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.62	-5.81	51.81	74	-22.19	peak
2390	/	-5.81	/	54	/	AVG
2399	62.53	-5.84	56.69	74	-17.31	peak
2399	48.03	-5.84	42.19	54	-11.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.26	-5.81	50.45	74	-23.55	peak
2390	/	-5.81	/	54	/	AVG
2399	61.63	-5.84	55.79	74	-18.21	peak
2399	47.20	-5.84	41.36	54	-12.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.54	-5.65	50.89	74	-23.11	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	55.30	-5.65	49.65	74	-24.35	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.83	-5.81	53.02	74	-20.98	peak
2390	/	-5.81	/	54	/	AVG
2399	62.23	-5.84	56.39	74	-17.61	peak
2399	45.62	-5.84	39.78	54	-14.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.71	-5.81	51.90	74	-22.10	peak
2390	/	-5.81	/	54	/	AVG
2399	60.60	-5.84	54.76	74	-19.24	peak
2399	45.69	-5.84	39.85	54	-14.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.73	-5.65	52.08	74	-21.92	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.81	-5.65	52.16	74	-21.84	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

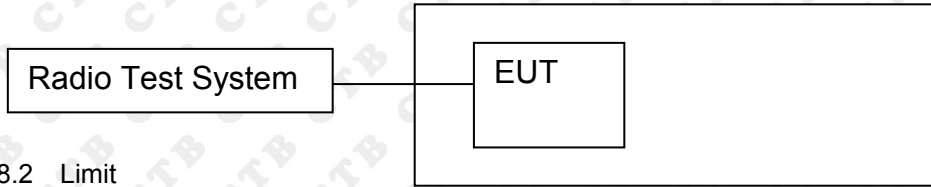


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result
ANT1:

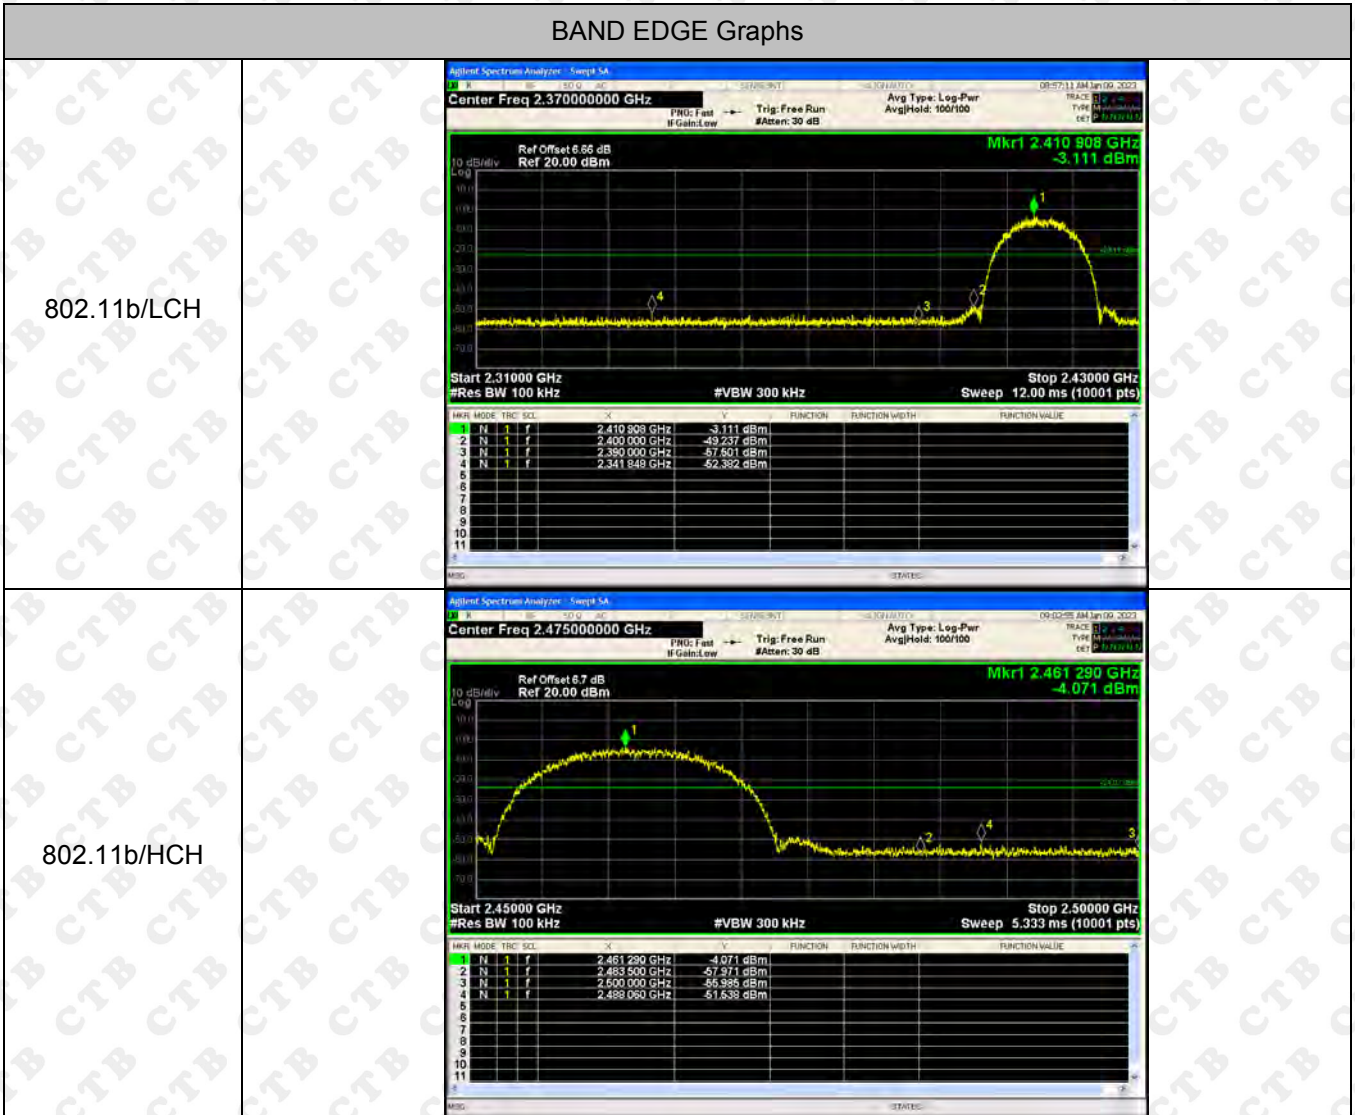


BAND EDGE Graphs

802.11g/LCH

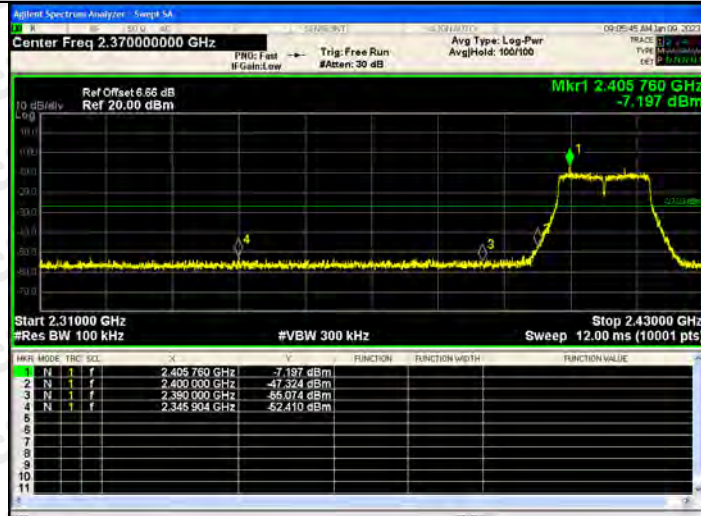


802.11g/HCH

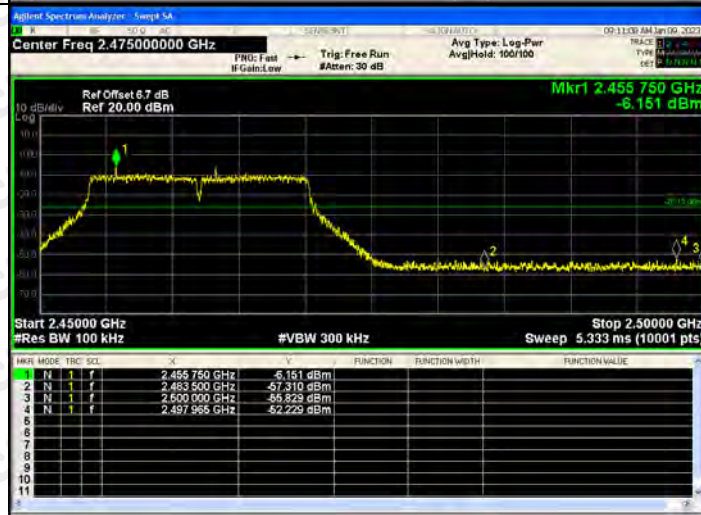

BAND EDGE Graphs

802.11n(HT20)/L
CH

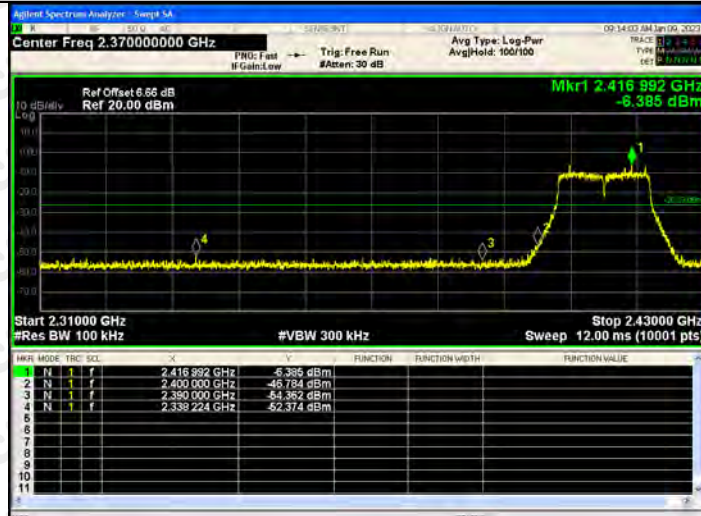


802.11n(HT20)/H
CH



BAND EDGE Graphs

802.11n(HT40)/L
CH

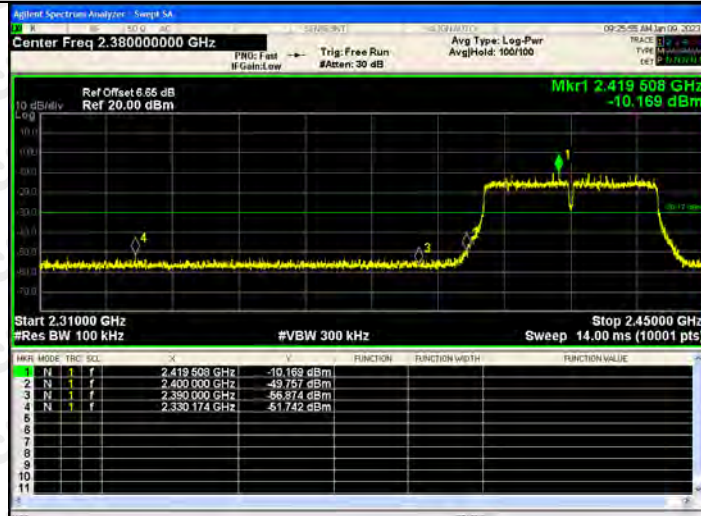


802.11n(HT40)/H
CH



RF Conducted Spurious Emissions Graphs






RF Conducted Spurious Emissions Graphs

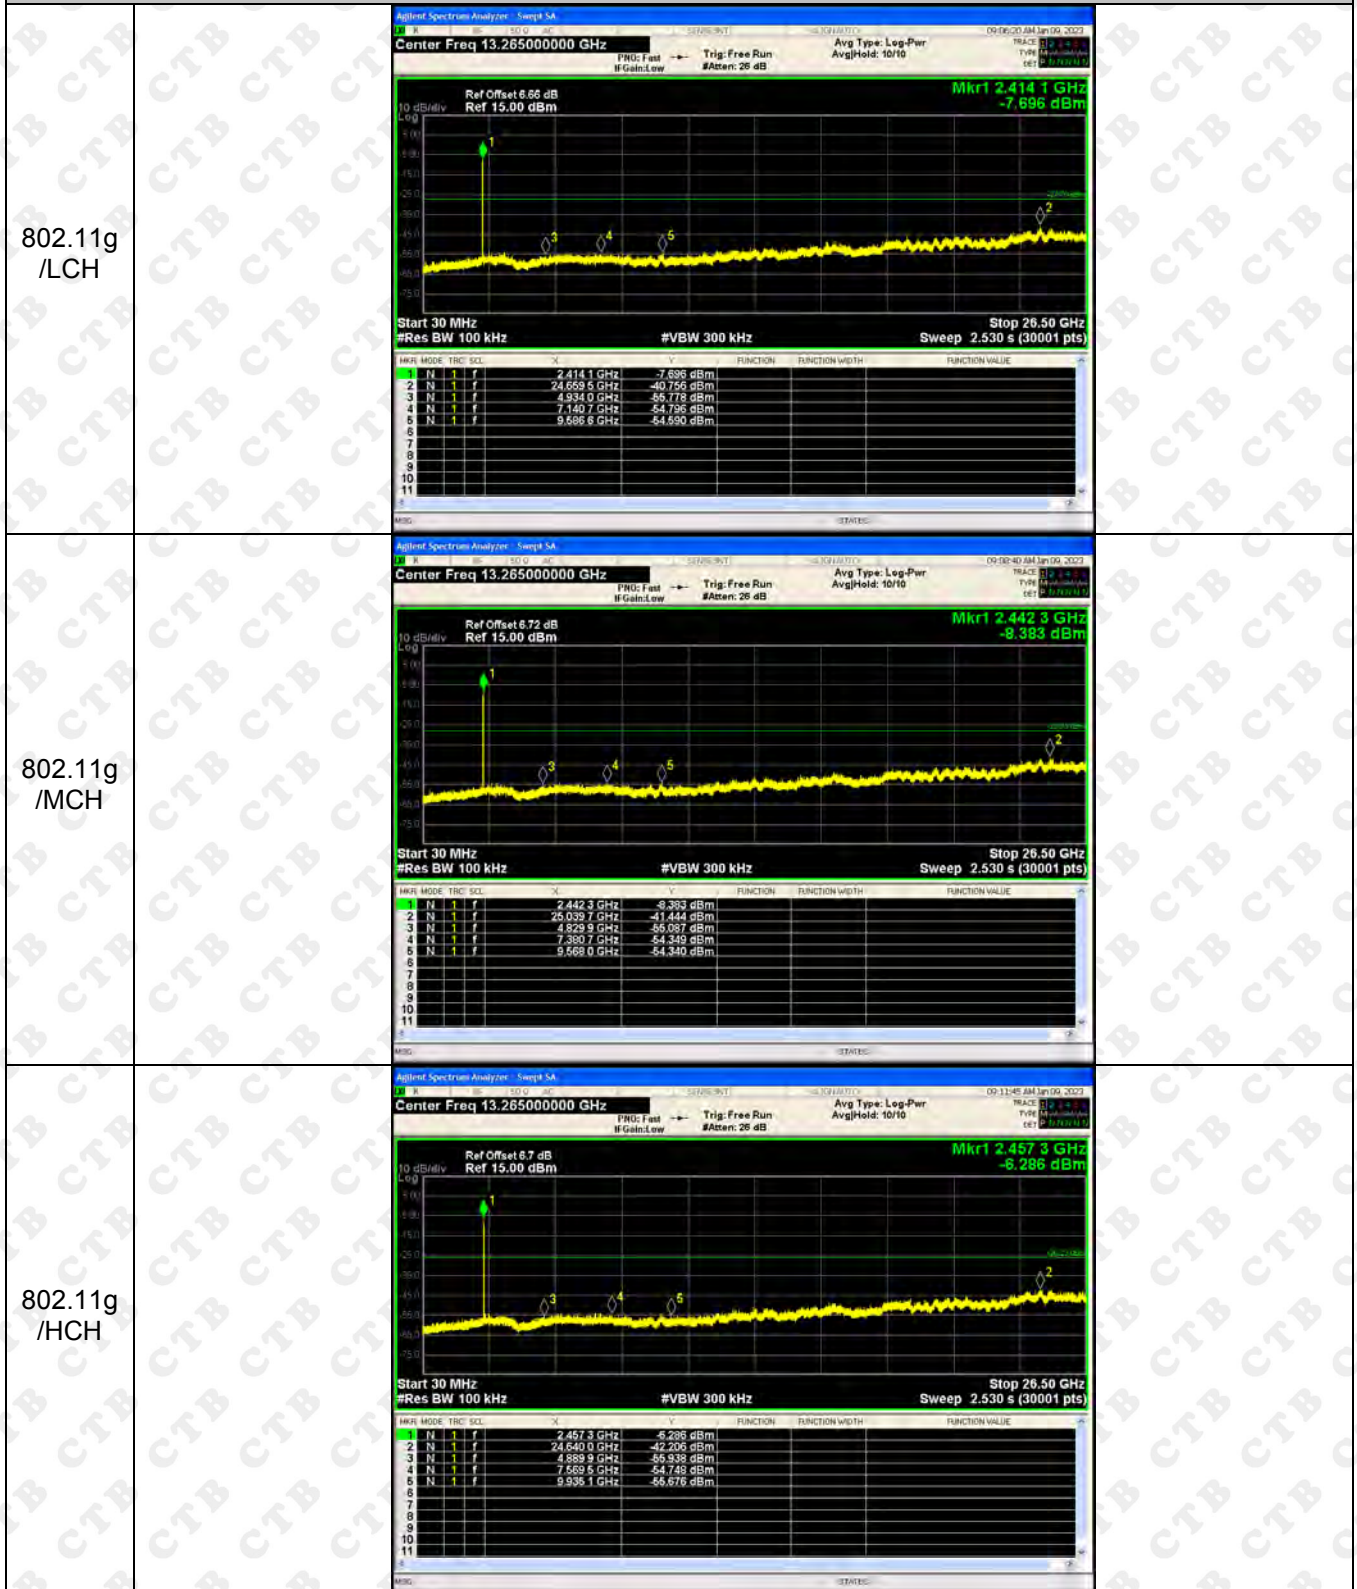

RF Conducted Spurious Emissions Graphs


<p>802.11n (HT20)/ LCH</p>	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>FREQ</th> <th>LEVEL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.415 8 GHz</td> <td>-10.115 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>25.053 0 GHz</td> <td>-42.042 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>4.804 3 GHz</td> <td>-55.542 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>7.384 2 GHz</td> <td>-54.508 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>9.819 5 GHz</td> <td>-54.429 dBm</td> </tr> </tbody> </table>	MkR	MODE	FREQ	LEVEL	1	N	2.415 8 GHz	-10.115 dBm	2	N	25.053 0 GHz	-42.042 dBm	3	N	4.804 3 GHz	-55.542 dBm	4	N	7.384 2 GHz	-54.508 dBm	5	N	9.819 5 GHz	-54.429 dBm	
MkR	MODE	FREQ	LEVEL																							
1	N	2.415 8 GHz	-10.115 dBm																							
2	N	25.053 0 GHz	-42.042 dBm																							
3	N	4.804 3 GHz	-55.542 dBm																							
4	N	7.384 2 GHz	-54.508 dBm																							
5	N	9.819 5 GHz	-54.429 dBm																							
<p>802.11 n(HT20) /MCH</p>	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>FREQ</th> <th>LEVEL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.431 7 GHz</td> <td>-10.856 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>24.843 6 GHz</td> <td>-42.384 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>4.912 0 GHz</td> <td>-54.669 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>7.436 3 GHz</td> <td>-53.269 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>9.933 6 GHz</td> <td>-54.753 dBm</td> </tr> </tbody> </table>	MkR	MODE	FREQ	LEVEL	1	N	2.431 7 GHz	-10.856 dBm	2	N	24.843 6 GHz	-42.384 dBm	3	N	4.912 0 GHz	-54.669 dBm	4	N	7.436 3 GHz	-53.269 dBm	5	N	9.933 6 GHz	-54.753 dBm	
MkR	MODE	FREQ	LEVEL																							
1	N	2.431 7 GHz	-10.856 dBm																							
2	N	24.843 6 GHz	-42.384 dBm																							
3	N	4.912 0 GHz	-54.669 dBm																							
4	N	7.436 3 GHz	-53.269 dBm																							
5	N	9.933 6 GHz	-54.753 dBm																							
<p>802.11 n(HT20) /HCH</p>	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>FREQ</th> <th>LEVEL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.456 4 GHz</td> <td>-9.943 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>24.670 9 GHz</td> <td>-42.090 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>4.818 4 GHz</td> <td>-54.771 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>7.604 2 GHz</td> <td>-55.077 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>10.033 0 GHz</td> <td>-55.853 dBm</td> </tr> </tbody> </table>	MkR	MODE	FREQ	LEVEL	1	N	2.456 4 GHz	-9.943 dBm	2	N	24.670 9 GHz	-42.090 dBm	3	N	4.818 4 GHz	-54.771 dBm	4	N	7.604 2 GHz	-55.077 dBm	5	N	10.033 0 GHz	-55.853 dBm	
MkR	MODE	FREQ	LEVEL																							
1	N	2.456 4 GHz	-9.943 dBm																							
2	N	24.670 9 GHz	-42.090 dBm																							
3	N	4.818 4 GHz	-54.771 dBm																							
4	N	7.604 2 GHz	-55.077 dBm																							
5	N	10.033 0 GHz	-55.853 dBm																							
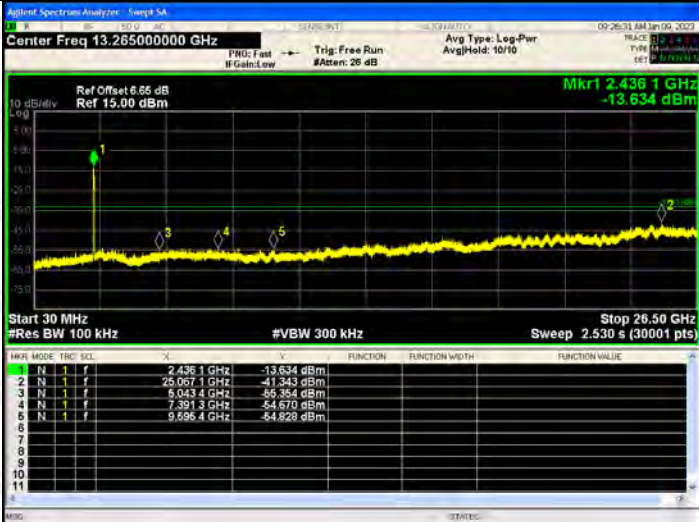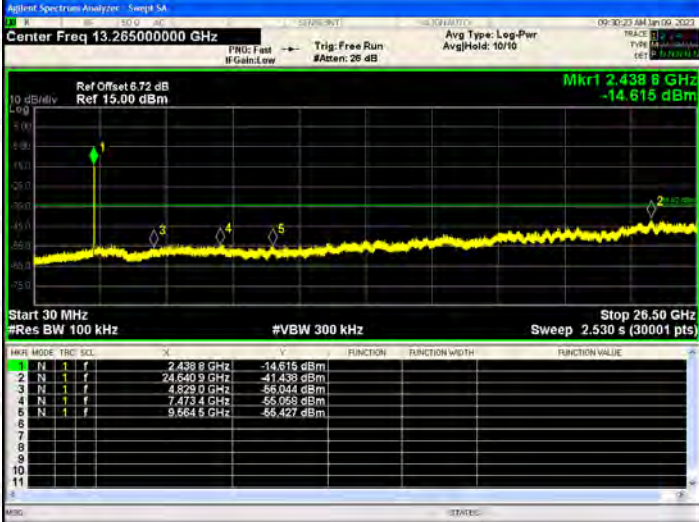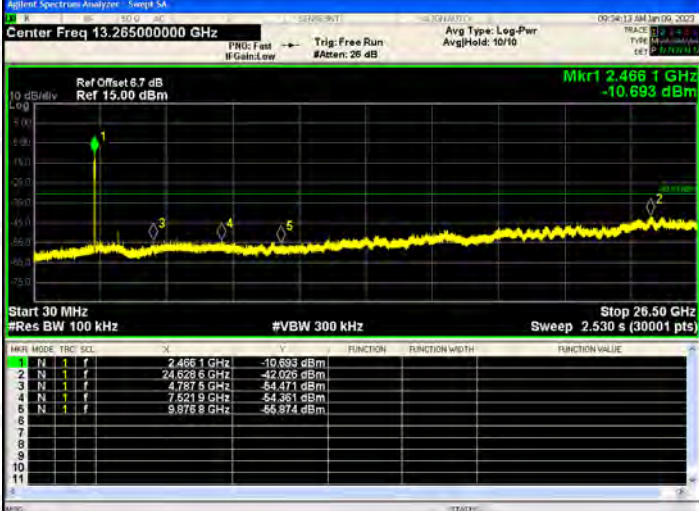
<p>802.11n (HT40)/ LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 13.265000000 GHz</p> <p>Ref Offset 6.65 dB Ref 15.00 dBm</p> <p>Mkr1 2.4361 GHz -13.634 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TBC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4361 GHz</td> <td>-13.634 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0571 GHz</td> <td>-41.343 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0434 GHz</td> <td>-55.354 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3913 GHz</td> <td>-54.670 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6964 GHz</td> <td>-54.828 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4361 GHz	-13.634 dBm				2	N	1	f	25.0571 GHz	-41.343 dBm				3	N	1	f	5.0434 GHz	-55.354 dBm				4	N	1	f	7.3913 GHz	-54.670 dBm				5	N	1	f	9.6964 GHz	-54.828 dBm				
MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4361 GHz	-13.634 dBm																																																			
2	N	1	f	25.0571 GHz	-41.343 dBm																																																			
3	N	1	f	5.0434 GHz	-55.354 dBm																																																			
4	N	1	f	7.3913 GHz	-54.670 dBm																																																			
5	N	1	f	9.6964 GHz	-54.828 dBm																																																			
<p>802.11n (HT40) /MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 13.265000000 GHz</p> <p>Ref Offset 6.72 dB Ref 15.00 dBm</p> <p>Mkr1 2.4386 GHz -14.615 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TBC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4386 GHz</td> <td>-14.615 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6409 GHz</td> <td>-41.438 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8230 GHz</td> <td>-55.044 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4734 GHz</td> <td>-55.058 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6645 GHz</td> <td>-55.427 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4386 GHz	-14.615 dBm				2	N	1	f	24.6409 GHz	-41.438 dBm				3	N	1	f	4.8230 GHz	-55.044 dBm				4	N	1	f	7.4734 GHz	-55.058 dBm				5	N	1	f	9.6645 GHz	-55.427 dBm				
MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4386 GHz	-14.615 dBm																																																			
2	N	1	f	24.6409 GHz	-41.438 dBm																																																			
3	N	1	f	4.8230 GHz	-55.044 dBm																																																			
4	N	1	f	7.4734 GHz	-55.058 dBm																																																			
5	N	1	f	9.6645 GHz	-55.427 dBm																																																			
<p>802.11n (HT40) /HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 13.265000000 GHz</p> <p>Ref Offset 6.7 dB Ref 15.00 dBm</p> <p>Mkr1 2.4661 GHz -10.693 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TBC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4661 GHz</td> <td>-10.693 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6286 GHz</td> <td>-42.026 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7815 GHz</td> <td>-54.471 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.6219 GHz</td> <td>-54.381 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8758 GHz</td> <td>-55.874 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4661 GHz	-10.693 dBm				2	N	1	f	24.6286 GHz	-42.026 dBm				3	N	1	f	4.7815 GHz	-54.471 dBm				4	N	1	f	7.6219 GHz	-54.381 dBm				5	N	1	f	9.8758 GHz	-55.874 dBm				
MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4661 GHz	-10.693 dBm																																																			
2	N	1	f	24.6286 GHz	-42.026 dBm																																																			
3	N	1	f	4.7815 GHz	-54.471 dBm																																																			
4	N	1	f	7.6219 GHz	-54.381 dBm																																																			
5	N	1	f	9.8758 GHz	-55.874 dBm																																																			


ANT2:

BAND EDGE Graphs

802.11b/LCH

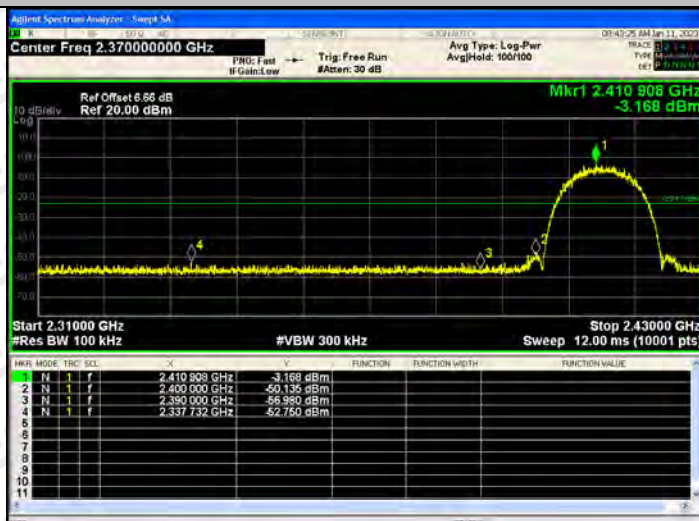


802.11b/HCH

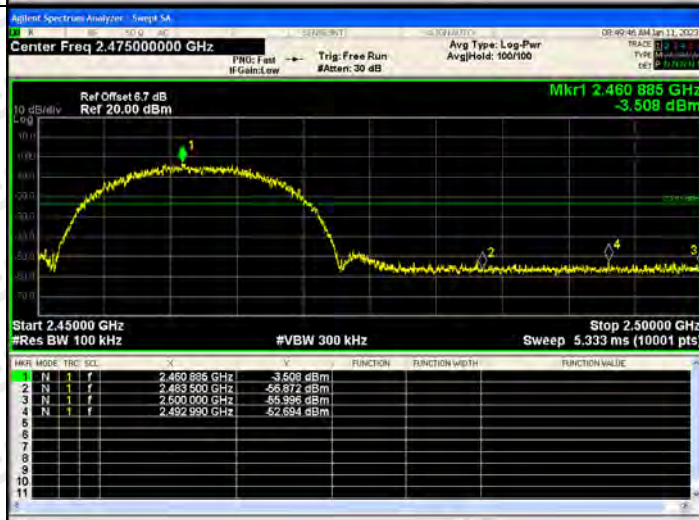


BAND EDGE Graphs

802.11g/LCH

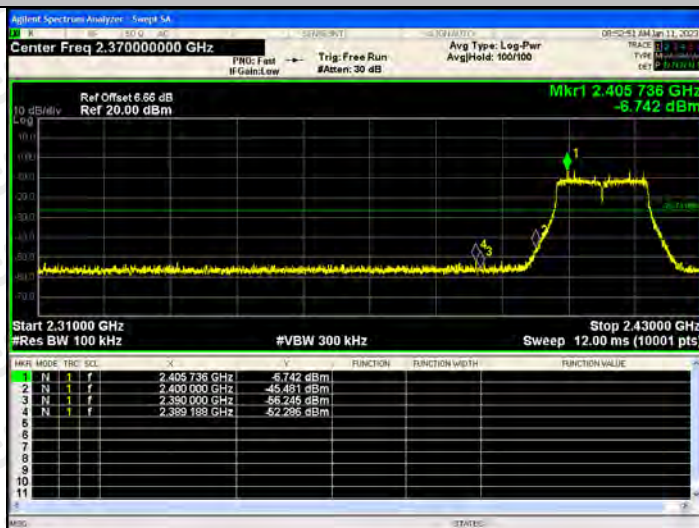


802.11g/HCH

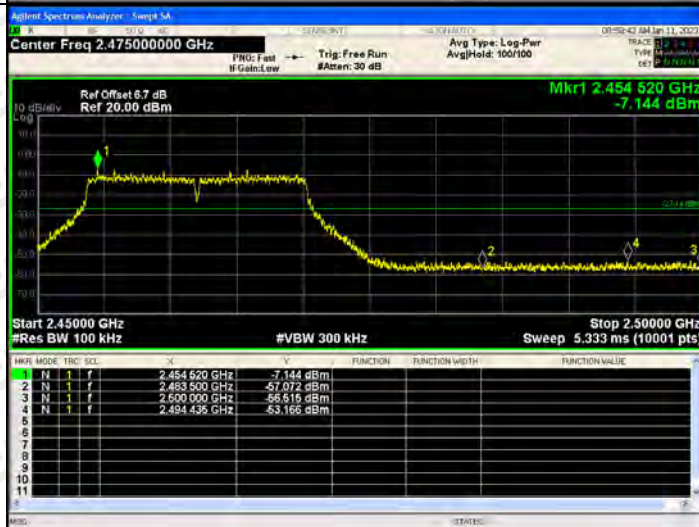


BAND EDGE Graphs

802.11n(HT20)/L
CH

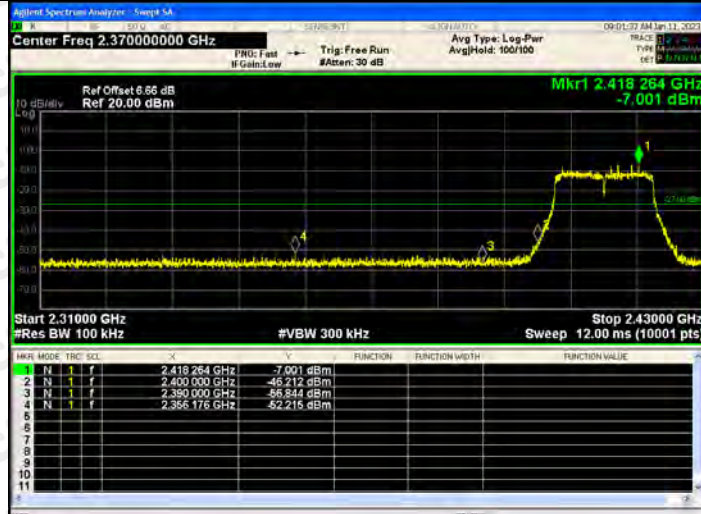


802.11n(HT20)/H
CH

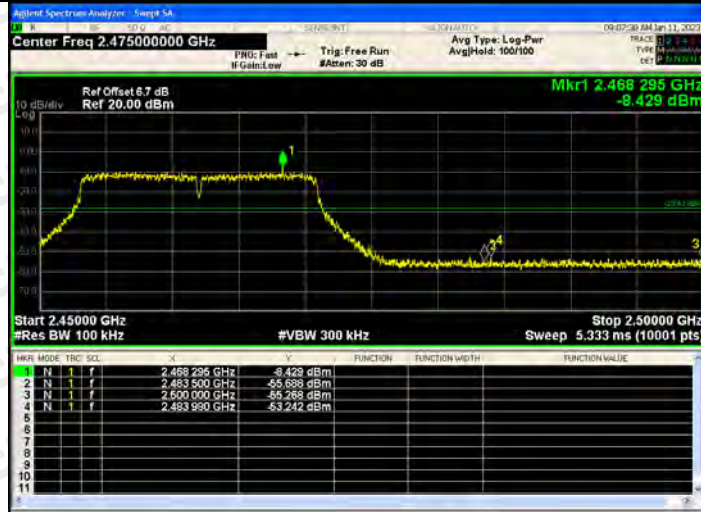


BAND EDGE Graphs

802.11n(HT40)/L
CH

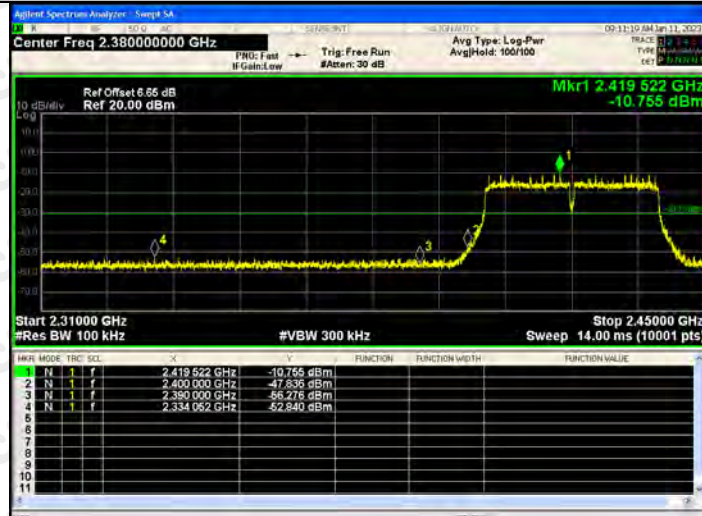

802.11n(HT40)/H
CH

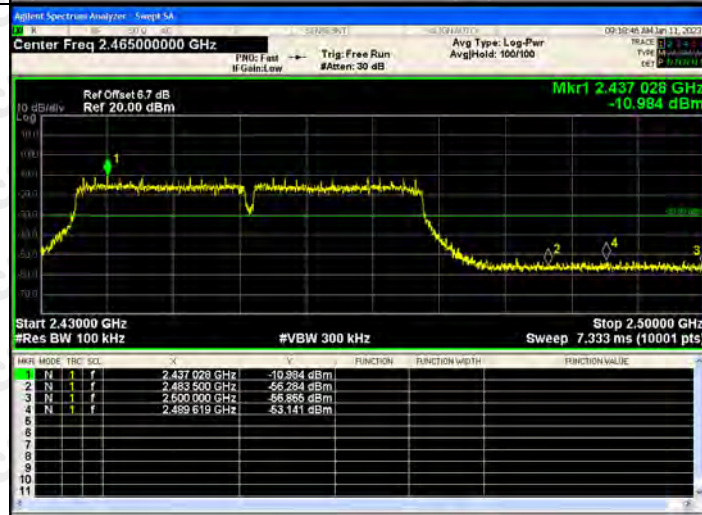




RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs

<p>802.11g /LCH</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>POWER</th> </tr> </thead> <tbody> <tr><td>1</td><td>2.405 2 GHz</td><td>-10.753 dBm</td></tr> <tr><td>2</td><td>25.084 7 GHz</td><td>-42.312 dBm</td></tr> <tr><td>3</td><td>4.672 8 GHz</td><td>-55.889 dBm</td></tr> <tr><td>4</td><td>7.067 5 GHz</td><td>-54.734 dBm</td></tr> <tr><td>5</td><td>9.844 7 GHz</td><td>-55.259 dBm</td></tr> </tbody> </table>	MKR MODE	FREQ	POWER	1	2.405 2 GHz	-10.753 dBm	2	25.084 7 GHz	-42.312 dBm	3	4.672 8 GHz	-55.889 dBm	4	7.067 5 GHz	-54.734 dBm	5	9.844 7 GHz	-55.259 dBm	
MKR MODE	FREQ	POWER																		
1	2.405 2 GHz	-10.753 dBm																		
2	25.084 7 GHz	-42.312 dBm																		
3	4.672 8 GHz	-55.889 dBm																		
4	7.067 5 GHz	-54.734 dBm																		
5	9.844 7 GHz	-55.259 dBm																		
<p>802.11g /MCH</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>POWER</th> </tr> </thead> <tbody> <tr><td>1</td><td>2.433 5 GHz</td><td>-10.704 dBm</td></tr> <tr><td>2</td><td>24.616 2 GHz</td><td>-42.323 dBm</td></tr> <tr><td>3</td><td>4.792 0 GHz</td><td>-54.771 dBm</td></tr> <tr><td>4</td><td>7.249 4 GHz</td><td>-54.460 dBm</td></tr> <tr><td>5</td><td>9.654 9 GHz</td><td>-55.570 dBm</td></tr> </tbody> </table>	MKR MODE	FREQ	POWER	1	2.433 5 GHz	-10.704 dBm	2	24.616 2 GHz	-42.323 dBm	3	4.792 0 GHz	-54.771 dBm	4	7.249 4 GHz	-54.460 dBm	5	9.654 9 GHz	-55.570 dBm	
MKR MODE	FREQ	POWER																		
1	2.433 5 GHz	-10.704 dBm																		
2	24.616 2 GHz	-42.323 dBm																		
3	4.792 0 GHz	-54.771 dBm																		
4	7.249 4 GHz	-54.460 dBm																		
5	9.654 9 GHz	-55.570 dBm																		
<p>802.11g /HCH</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>POWER</th> </tr> </thead> <tbody> <tr><td>1</td><td>2.466 1 GHz</td><td>-10.407 dBm</td></tr> <tr><td>2</td><td>24.623 3 GHz</td><td>-41.486 dBm</td></tr> <tr><td>3</td><td>5.110 5 GHz</td><td>-55.279 dBm</td></tr> <tr><td>4</td><td>7.609 7 GHz</td><td>-55.017 dBm</td></tr> <tr><td>5</td><td>9.997 7 GHz</td><td>-54.841 dBm</td></tr> </tbody> </table>	MKR MODE	FREQ	POWER	1	2.466 1 GHz	-10.407 dBm	2	24.623 3 GHz	-41.486 dBm	3	5.110 5 GHz	-55.279 dBm	4	7.609 7 GHz	-55.017 dBm	5	9.997 7 GHz	-54.841 dBm	
MKR MODE	FREQ	POWER																		
1	2.466 1 GHz	-10.407 dBm																		
2	24.623 3 GHz	-41.486 dBm																		
3	5.110 5 GHz	-55.279 dBm																		
4	7.609 7 GHz	-55.017 dBm																		
5	9.997 7 GHz	-54.841 dBm																		

RF Conducted Spurious Emissions Graphs

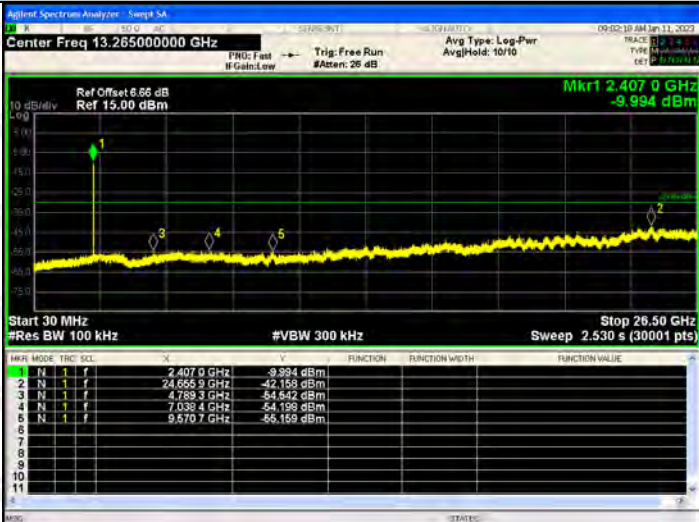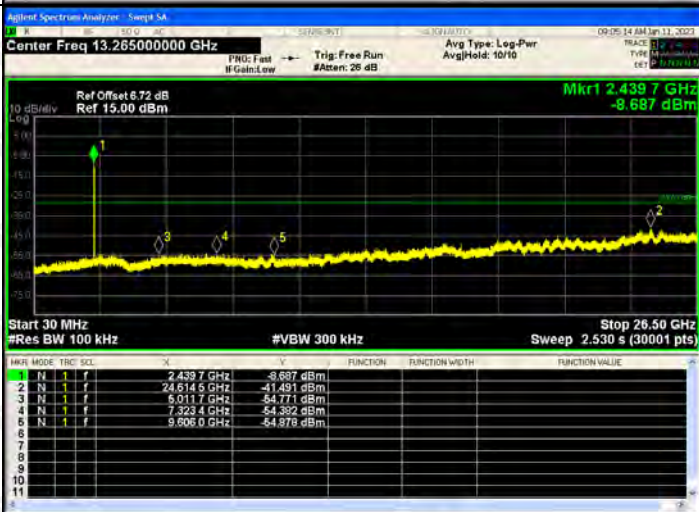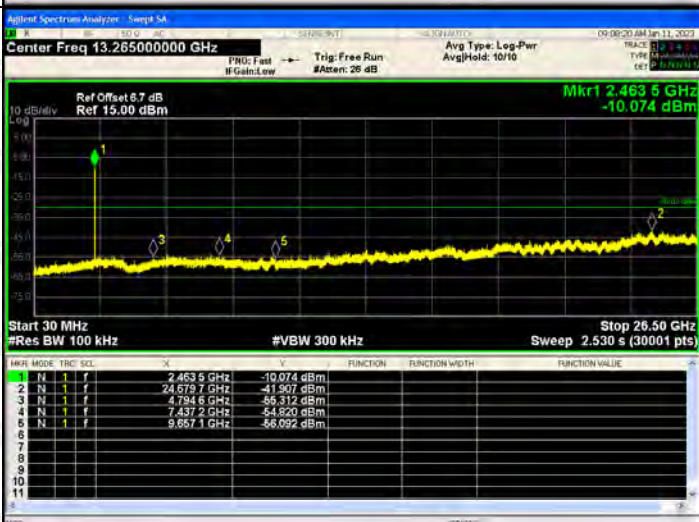
<p>802.11n (HT20)/ LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.26500000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.407 0 GHz -9.994 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>FREQ</th> <th>POWER</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.407 0 GHz</td> <td>-9.994 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.655 9 GHz</td> <td>-42.158 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.789 3 GHz</td> <td>-54.642 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.038 4 GHz</td> <td>-54.158 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.570 7 GHz</td> <td>-55.158 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.407 0 GHz	-9.994 dBm				2	N	24.655 9 GHz	-42.158 dBm				3	N	4.789 3 GHz	-54.642 dBm				4	N	7.038 4 GHz	-54.158 dBm				5	N	9.570 7 GHz	-55.158 dBm			
MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.407 0 GHz	-9.994 dBm																																								
2	N	24.655 9 GHz	-42.158 dBm																																								
3	N	4.789 3 GHz	-54.642 dBm																																								
4	N	7.038 4 GHz	-54.158 dBm																																								
5	N	9.570 7 GHz	-55.158 dBm																																								
<p>802.11 n(HT20) /MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.26500000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.439 7 GHz -8.687 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>FREQ</th> <th>POWER</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.439 7 GHz</td> <td>-8.687 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.614 5 GHz</td> <td>-41.491 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>5.011 7 GHz</td> <td>-54.771 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.323 4 GHz</td> <td>-54.392 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.508 0 GHz</td> <td>-54.978 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.439 7 GHz	-8.687 dBm				2	N	24.614 5 GHz	-41.491 dBm				3	N	5.011 7 GHz	-54.771 dBm				4	N	7.323 4 GHz	-54.392 dBm				5	N	9.508 0 GHz	-54.978 dBm			
MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.439 7 GHz	-8.687 dBm																																								
2	N	24.614 5 GHz	-41.491 dBm																																								
3	N	5.011 7 GHz	-54.771 dBm																																								
4	N	7.323 4 GHz	-54.392 dBm																																								
5	N	9.508 0 GHz	-54.978 dBm																																								
<p>802.11 n(HT20) /HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.26500000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.463 5 GHz -10.074 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>FREQ</th> <th>POWER</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.463 5 GHz</td> <td>-10.074 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.678 7 GHz</td> <td>-41.907 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.794 6 GHz</td> <td>-56.312 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.437 2 GHz</td> <td>-54.820 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.652 1 GHz</td> <td>-56.092 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.463 5 GHz	-10.074 dBm				2	N	24.678 7 GHz	-41.907 dBm				3	N	4.794 6 GHz	-56.312 dBm				4	N	7.437 2 GHz	-54.820 dBm				5	N	9.652 1 GHz	-56.092 dBm			
MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.463 5 GHz	-10.074 dBm																																								
2	N	24.678 7 GHz	-41.907 dBm																																								
3	N	4.794 6 GHz	-56.312 dBm																																								
4	N	7.437 2 GHz	-54.820 dBm																																								
5	N	9.652 1 GHz	-56.092 dBm																																								

RF Conducted Spurious Emissions Graphs



9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

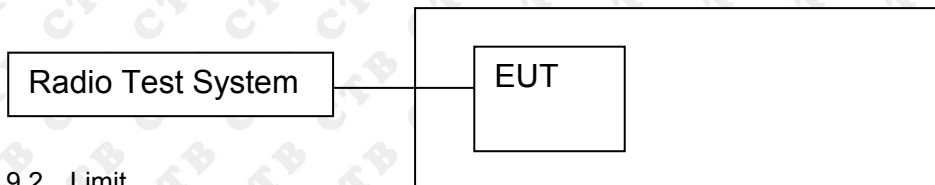

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	12.625	12.085	/	30
	MCH	12.403	12.36	/	30
	HCH	12.358	12.417	/	30
802.11g	LCH	11.411	11.344	/	30
	MCH	11.566	11.159	/	30
	HCH	11.887	11.172	/	30
802.11n(HT20)	LCH	11.776	11.372	14.589	30
	MCH	11.667	11.075	14.391	30
	HCH	11.573	11.311	14.454	30
802.11n(HT40)	LCH	10.675	10.222	13.465	30
	MCH	10.516	10.13	13.338	30
	HCH	10.517	10.528	13.533	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

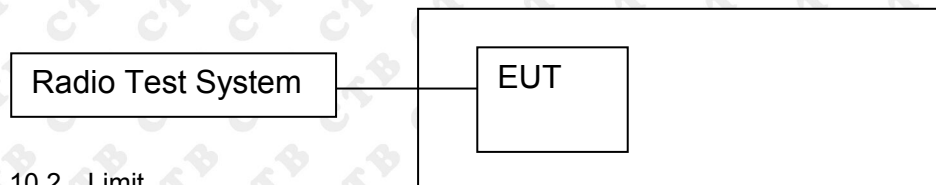

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:


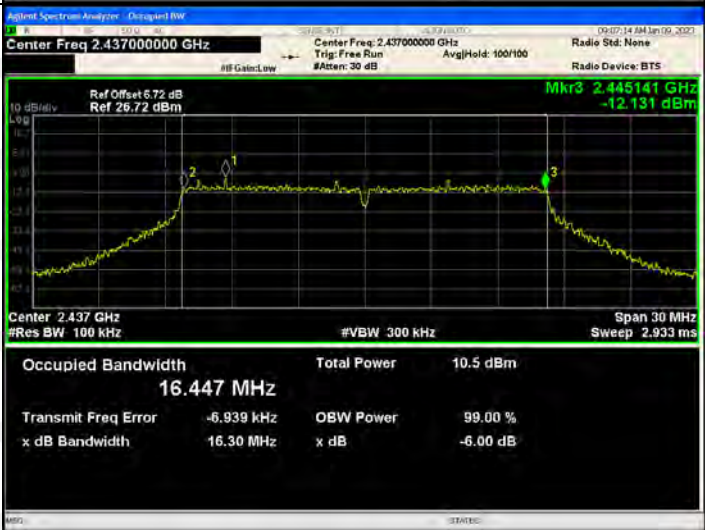

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.986	500	PASS
	MCH	10.678	500	PASS
	HCH	10.162	500	PASS
802.11g	LCH	16.361	500	PASS
	MCH	16.297	500	PASS
	HCH	16.375	500	PASS
802.11n(HT20)	LCH	16.377	500	PASS
	MCH	17.094	500	PASS
	HCH	17.5	500	PASS
802.11n(HT40)	LCH	35.717	500	PASS
	MCH	35.582	500	PASS
	HCH	35.406	500	PASS


ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.131	500	PASS
	MCH	9.8	500	PASS
	HCH	10.241	500	PASS
802.11g	LCH	16.389	500	PASS
	MCH	16.332	500	PASS
	HCH	16.333	500	PASS
802.11n(HT20)	LCH	16.908	500	PASS
	MCH	17.564	500	PASS
	HCH	17.34	500	PASS
802.11n(HT40)	LCH	35.476	500	PASS
	MCH	35.406	500	PASS
	HCH	35.533	500	PASS

ANT1:
Test Graph:

Graphs	
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3: 2.41702 GHz</p> <p>-8.0716 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.803 MHz</p> <p>Total Power: 13.8 dBm</p> <p>Transmit Freq Error: 26.390 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 9.986 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.442355 GHz</p> <p>-11.566 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.900 MHz</p> <p>Total Power: 13.7 dBm</p> <p>Transmit Freq Error: 15.458 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.68 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3: 2.467035 GHz</p> <p>-10.986 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.912 MHz</p> <p>Total Power: 13.8 dBm</p> <p>Transmit Freq Error: -46.166 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.16 MHz</p> <p>x dB: -6.00 dB</p>




<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420178 GHz -13.788 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.3 dBm</td> </tr> <tr> <td colspan="3">16.427 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.3 dBm	16.427 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.3 dBm											
16.427 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.445141 GHz -12.131 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.5 dBm</td> </tr> <tr> <td colspan="3">16.447 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.5 dBm	16.447 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.5 dBm											
16.447 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470183 GHz -13.688 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.7 dBm</td> </tr> <tr> <td colspan="3">16.469 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.7 dBm	16.469 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.7 dBm											
16.469 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											




<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420188 GHz -13.460 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.6 dBm</td> </tr> <tr> <td colspan="3">16.465 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>16.38 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	10.6 dBm	16.465 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			16.38 MHz
Occupied Bandwidth	Total Power	10.6 dBm														
16.465 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		16.38 MHz														
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.445535 GHz -12.290 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.4 dBm</td> </tr> <tr> <td colspan="3">17.597 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.09 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	10.4 dBm	17.597 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.09 MHz
Occupied Bandwidth	Total Power	10.4 dBm														
17.597 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.09 MHz														
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470744 GHz -12.671 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.6 dBm</td> </tr> <tr> <td colspan="3">17.620 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.50 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	10.6 dBm	17.620 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.50 MHz
Occupied Bandwidth	Total Power	10.6 dBm														
17.620 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.50 MHz														

<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

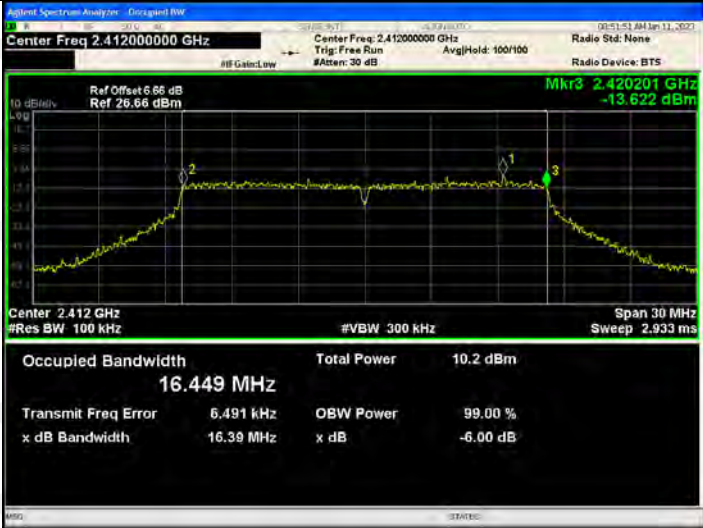ANT2:
Test Graph:

Graphs	
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3: 2.417084 GHz</p> <p>-10.511 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 15.015 MHz</p> <p>Total Power: 13.4 dBm</p> <p>Transmit Freq Error: 18.659 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.13 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.441917 GHz</p> <p>-10.518 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.919 MHz</p> <p>Total Power: 13.8 dBm</p> <p>Transmit Freq Error: 16.928 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 9.800 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3: 2.467035 GHz</p> <p>-9.3038 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.814 MHz</p> <p>Total Power: 13.9 dBm</p> <p>Transmit Freq Error: -35.917 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.24 MHz</p> <p>x dB: -6.00 dB</p>

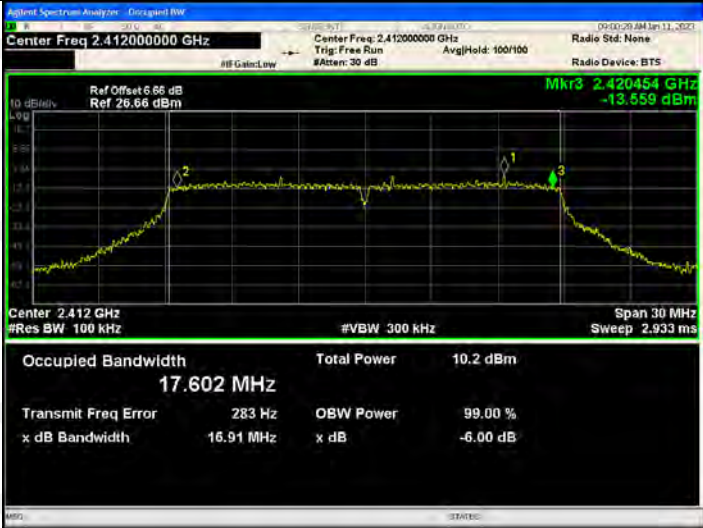
<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420201 GHz -13.622 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.2 dBm</td> </tr> <tr> <td colspan="3">16.449 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.2 dBm	16.449 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.2 dBm											
16.449 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.44516 GHz -12.711 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.1 dBm</td> </tr> <tr> <td colspan="3">16.438 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.1 dBm	16.438 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.1 dBm											
16.438 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470159 GHz -12.469 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.4 dBm</td> </tr> <tr> <td colspan="3">16.456 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.4 dBm	16.456 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.4 dBm											
16.456 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420454 GHz -13.559 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.2 dBm</td> </tr> <tr> <td colspan="3">17.602 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.2 dBm	17.602 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.2 dBm											
17.602 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.445778 GHz -14.093 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.97 dBm</td> </tr> <tr> <td colspan="3">17.603 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.97 dBm	17.603 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.97 dBm											
17.603 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470666 GHz -14.292 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.3 dBm</td> </tr> <tr> <td colspan="3">17.598 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	10.3 dBm	17.598 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	10.3 dBm											
17.598 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

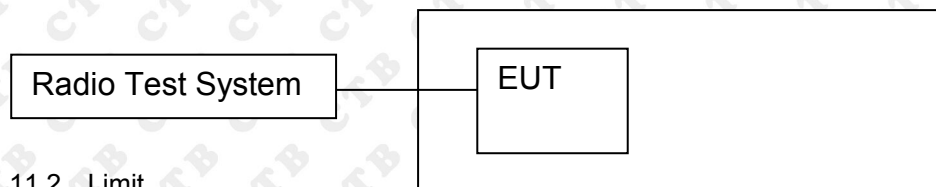

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-17.728	-17.605	/	7.79
	MCH	-17.465	-17.682	/	7.79
	HCH	-17.693	-17.352	/	7.79
802.11g	LCH	-20.879	-19.803	/	7.79
	MCH	-20.14	-20.693	/	7.79
	HCH	-19.998	-19.763	/	7.79
802.11n(H T20)	LCH	-20.732	-21.054	-17.880	7.79
	MCH	-20.957	-21.715	-18.309	7.79
	HCH	-20.825	-20.736	-17.770	7.79
802.11n(H T40)	LCH	-24.575	-24.976	-21.761	7.79
	MCH	-25.474	-25.854	-22.650	7.79
	HCH	-23.573	-24.505	-21.004	7.79

**ANT1:
Test Graph**

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.410 23 GHz -17.228 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 91 GHz -17.486 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.460 20 GHz -17.593 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>


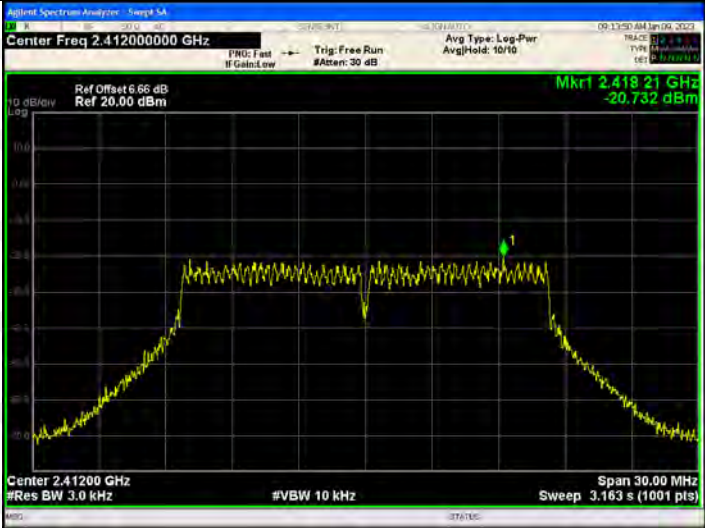

<p>802.11g/LCH</p>		
<p>802.11g/MCH</p>		
<p>802.11g/HCH</p>		

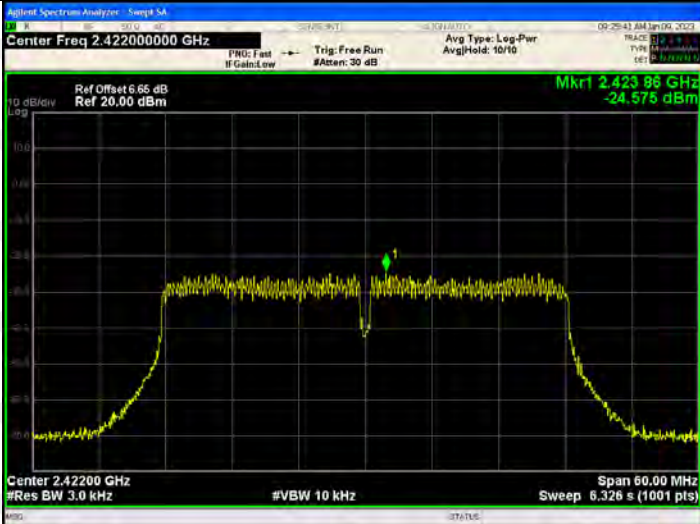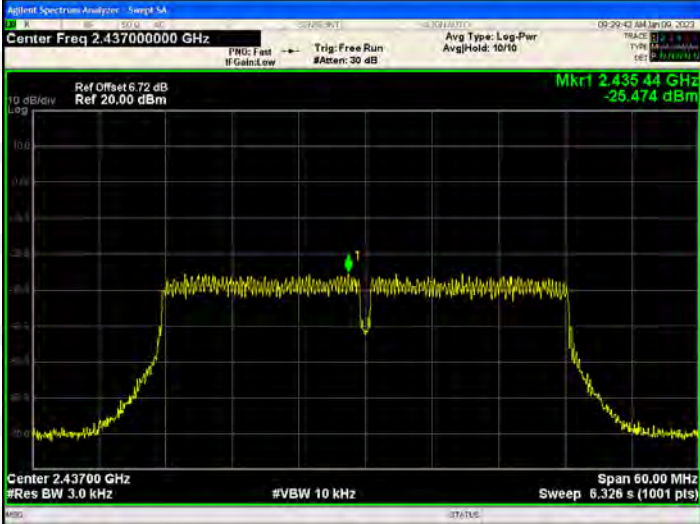


<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		

<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

ANT 2:
Test Graph

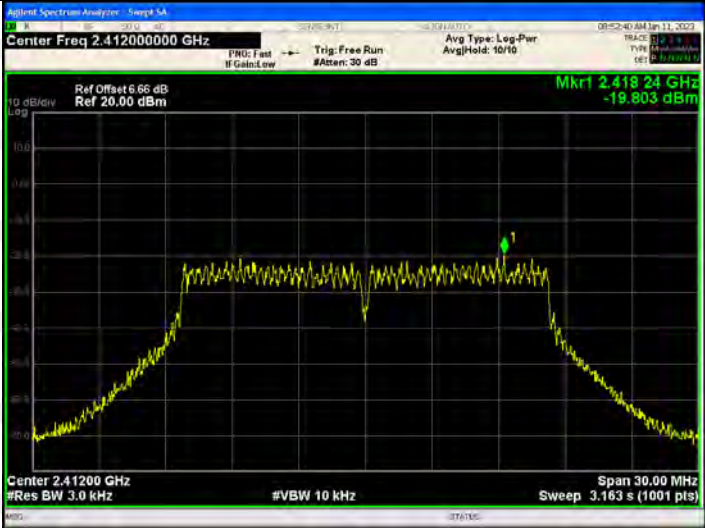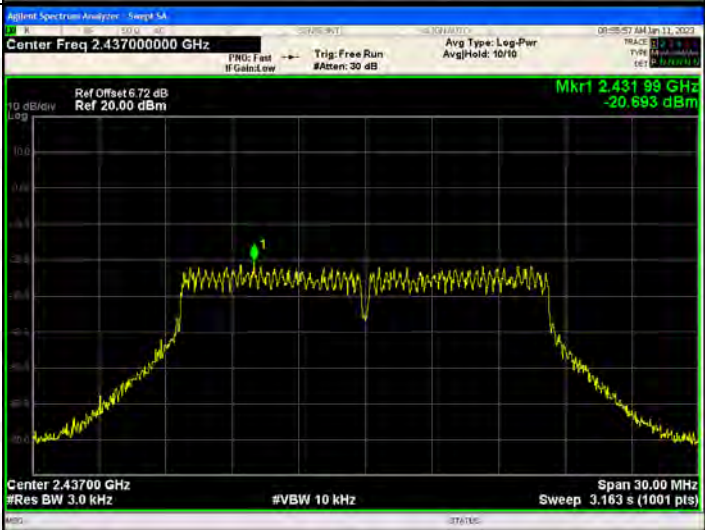Graphs	
802.11b /LCH	
802.11b /MCH	
802.11b/HCH	
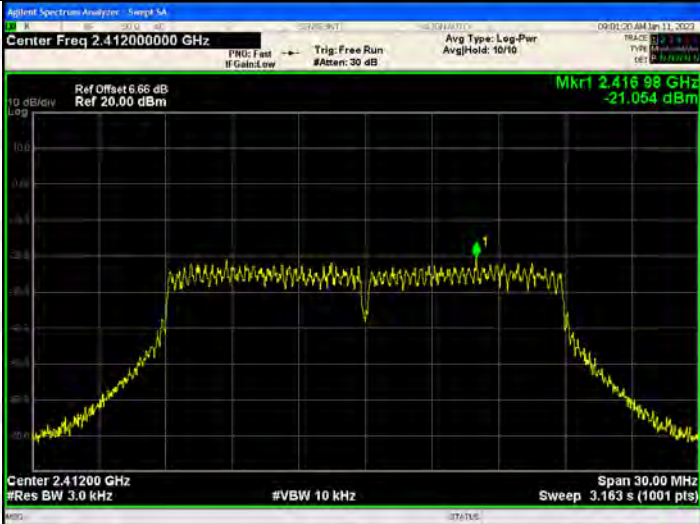
<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 20.00 dBm</p> <p>Mkr1: 2.43730 GHz -24.976 dBm</p> <p>Center: 2.42200 GHz #Res BW: 3.0 kHz #VBW: 10 kHz Span: 60.00 MHz Sweep: 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 20.00 dBm</p> <p>Mkr1: 2.42200 GHz -25.854 dBm</p> <p>Center: 2.43700 GHz #Res BW: 3.0 kHz #VBW: 10 kHz Span: 60.00 MHz Sweep: 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 20.00 dBm</p> <p>Mkr1: 2.46574 GHz -24.505 dBm</p> <p>Center: 2.45200 GHz #Res BW: 3.0 kHz #VBW: 10 kHz Span: 60.00 MHz Sweep: 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is 3.21dBi.

13. EUT PHOTOGRAPHS

External Photos EUT Photo 1




EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

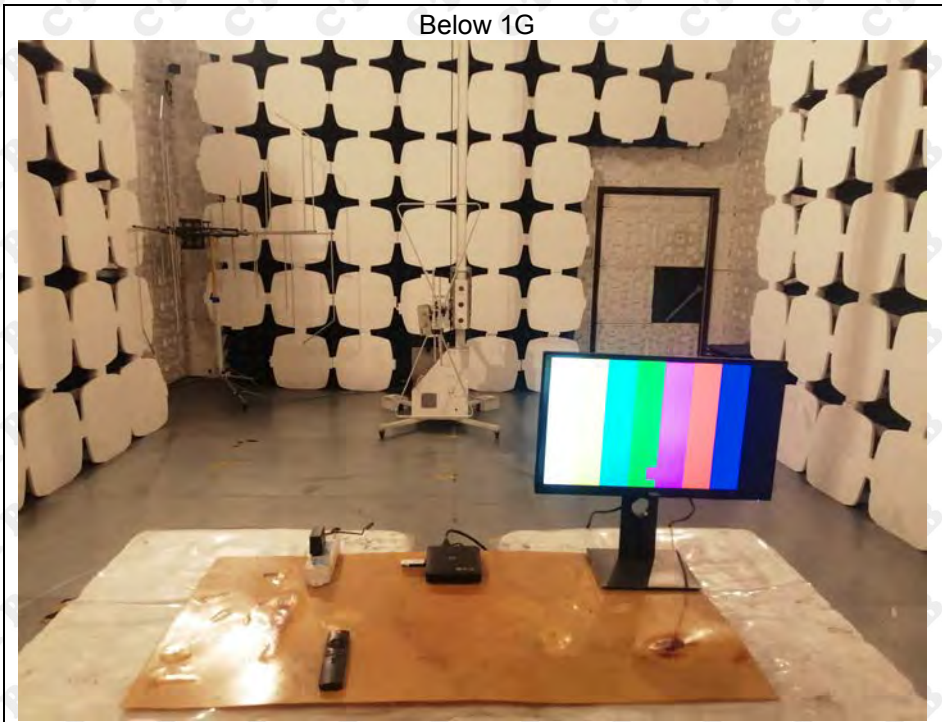

Above 1G



Conducted Emission

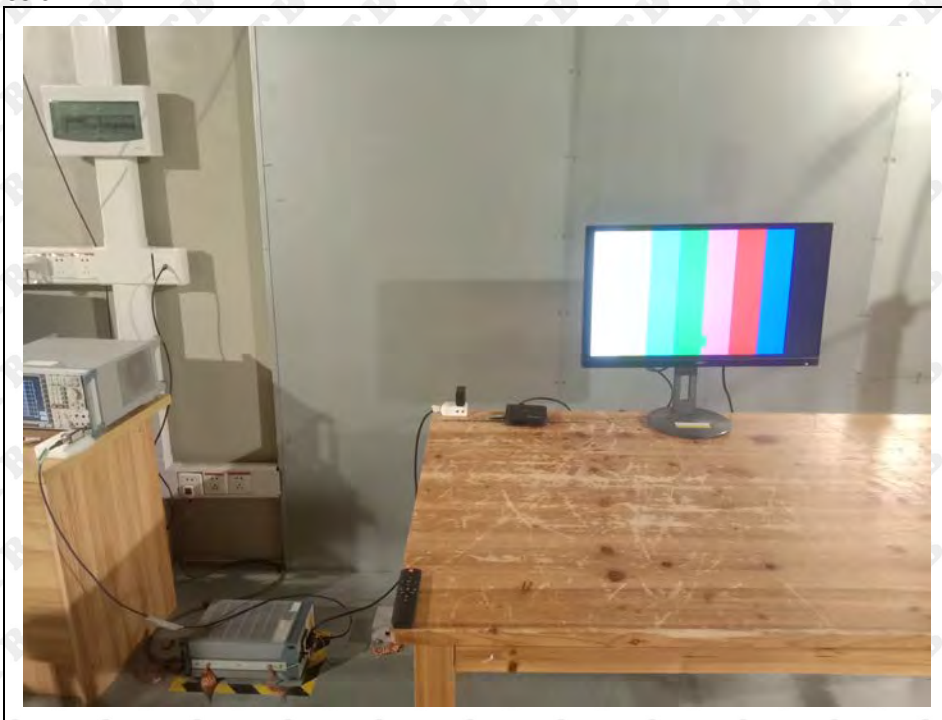

※※※※ END OF REPORT ※※※※