



## FCC AND ISED CERTIFICATION TEST REPORT

<b>Applicant</b>	:	Mercku Inc.
<b>Address of Applicant</b>	:	3600 Steeles Avenue East, Suite C108B, Markham, Ontario, L3R 9Z7, Canada
<b>Manufacturer</b>	:	Mercku Technology (China), Inc.
<b>Address of Manufacturer</b>	:	Block B1, Southern Software Park No.1 Software Road, Tangjia Zhuhai, Guangdong, China
<b>Equipment under Test</b>	:	Mercku M6s Nano Mesh Wi-Fi Router
<b>Model No.</b>	:	MBAA0
<b>FCC ID</b>	:	2APR4-M6SN
<b>IC</b>	:	23877-M6SN
<b>Test Standard(s)</b>	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
<b>Report No.</b>	:	DDT-RE23111605-2E05
<b>Issue Date</b>	:	2024/03/02
<b>Issue By</b>	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

# REPORT

## Table of Contents

1.	Summary of Test Results .....	7
2.	General Test Information .....	8
2.1.	Description of EUT .....	8
2.2.	Accessories of EUT .....	9
2.3.	Block diagram of EUT configuration for test .....	9
2.4.	Decision of final test mode .....	9
2.5.	Deviations of test standard .....	10
2.6.	Test environment conditions .....	10
2.7.	Test laboratory .....	10
2.8.	Measurement uncertainty .....	11
3.	Equipment Used During Conductive Test .....	12
4.	6dB Bandwidth .....	13
4.1.	Block diagram of test setup .....	13
4.2.	Limits .....	13
4.3.	Test procedure .....	13
4.4.	Test result .....	14
4.5.	Test graphs .....	15
5.	99% Bandwidth .....	27
5.1.	Block diagram of test setup .....	27
5.2.	Limits .....	27
5.3.	Test procedure .....	27
5.4.	Test result .....	28
5.5.	Test graphs .....	29
6.	Conducted Output Power .....	41
6.1.	Block diagram of test setup .....	41
6.2.	Limits .....	41
6.3.	Test procedure .....	41
6.4.	Test result average .....	42
7.	Power Spectral Density .....	43
7.1.	Block diagram of test setup .....	43
7.2.	Limits .....	43
7.3.	Test procedure .....	43
7.4.	Test result .....	44
7.5.	Test graphs .....	45
8.	Band Edge Compliance (Conducted Method) .....	57
8.1.	Block diagram of test setup .....	57

8.2.	Limits .....	57
8.3.	Test procedure .....	57
8.4.	Test result .....	58
8.5.	Test graphs .....	59
9.	RF Conducted Spurious Emissions .....	67
9.1.	Block diagram of test setup .....	67
9.2.	Limits .....	67
9.3.	Test procedure .....	67
9.4.	Test result .....	68
9.5.	Test graphs .....	69
10.	Duty Cycle .....	105
10.1.	Block diagram of test setup .....	105
10.2.	Limit .....	105
10.3.	Test procedure .....	105
10.4.	Test result .....	106
10.5.	Test graphs .....	107
11.	Radiated Emission .....	119
11.1.	Test equipment .....	119
11.2.	Block diagram of test setup .....	120
11.3.	Limits .....	120
11.4.	Assistant equipment used for test .....	122
11.5.	Test procedure .....	122
11.6.	Test result .....	124
11.7.	Test data .....	125
12.	Band Edge Compliance .....	133
12.1.	Test equipment .....	133
12.2.	Block diagram of test setup .....	134
12.3.	Limits .....	134
12.4.	Assistant equipment used for test .....	134
12.5.	Test procedure .....	134
12.6.	Test result .....	134
12.7.	Test data .....	135
13.	Power Line Conducted Emissions .....	167
13.1.	Test equipment .....	167
13.2.	Block diagram of test setup .....	167
13.3.	Limits .....	167
13.4.	Assistant equipment used for test .....	167
13.5.	Test procedure .....	167

13.6.	Test result .....	168
13.7.	Test data .....	169
14.	Test Setup Photograph .....	171
15.	Photos of the EUT .....	173

## Test Report Declare

<b>Applicant</b>	:	Mercku Inc.
<b>Address of Applicant</b>	:	3600 Steeles Avenue East, Suite C108B, Markham, Ontario, L3R 9Z7, Canada
<b>Equipment under Test</b>	:	Mercku M6s Nano Mesh Wi-Fi Router
<b>Model No.</b>	:	MBAA0
<b>Manufacturer</b>	:	Mercku Technology (China), Inc.
<b>Address of Manufacturer</b>	:	Block B1,Southern Software Park No.1 Software Road, Tangjia Zhuhai, Guangdong, China

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,  
 RSS-247 Issue 3 August 2023,  
 ANSI C63.10:2013,  
 RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

### We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

<b>Report No.:</b>	DDT-RE23111605-2E05		
<b>Date of Receipt:</b>	2023/11/20	<b>Date of Test:</b>	2023/11/20~2024/03/02

**Prepared By:**

*Tiger Mo*

**Tiger Mo/Engineer**

**Approved By:**



**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

## Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/03/02	

## 1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 5.2(a), RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 5.4(d)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 5.2(b)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
8	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

## 2. General Test Information

### 2.1. Description of EUT

EUT Name	: Mercku M6s Nano Mesh Wi-Fi Router
Model Number	: MBAA0
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 100~240V, 50-60Hz, 0.55A

Note: This EUT support 2.4 GHz WLAN, 5 GHz WLAN, this report only for 2.4 GHz WLAN.

Radio Technology	: IEEE 802.11b/g/n/ax
Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz IEEE 802.11ax HE20: 2412MHz-2462MHz IEEE 802.11ax HE40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna information				
Antenna Type	PCB			
		Ant1 gain	Ant2 gain	Directional gain
Max Antenna Gain(dBi)	IEEE 802.11b	5.29	5.29	/
	IEEE 802.11g	5.29	5.29	/
	IEEE 802.11n HT20	5.29	5.29	5.29
	IEEE 802.11n HT40	5.29	5.29	5.29
	IEEE 802.11ax HE20	5.29	5.29	5.29
	IEEE 802.11ax HE40	5.29	5.29	5.29

Note: This EUT supports STBC, any transmit signals are uncorrelated with each other. So the Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10})/2]$  dBi

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.




“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

## 2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

## 2.3. Block diagram of EUT configuration for test

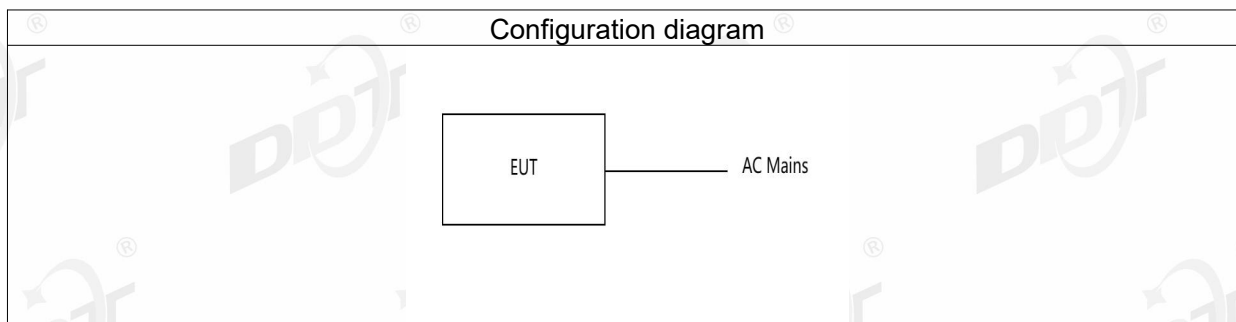

## 2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QATool\_Dbg.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information					
Mode	Setting Tx Power		Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	20.5	20.5	1	LCH: CH1	2412
	20.5	20.5	1	MCH: CH6	2437
	20.5	20.5	1	HCH: CH11	2462
IEEE 802.11g	17	17	6	LCH: CH1	2412
	17	17	6	MCH: CH6	2437
	17	17	6	HCH: CH11	2462
IEEE 802.11n HT20	15	15	MCS 8	LCH: CH1	2412
	15	15	MCS 8	MCH: CH6	2437
	15	15	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	15	15	MCS 8	LCH: CH3	2422
	15	15	MCS 8	MCH: CH6	2437
	15	15	MCS 8	HCH: CH9	2452
IEEE 802.11ax	15	15	MCS 9	LCH: CH1	2412
	15	15	MCS 9	MCH: CH6	2437

HE20	15	15	MCS 9	HCH: CH11	2462
IEEE 802.11ax HE40	15	15	MCS 9	LCH: CH3	2422
	15	15	MCS 9	MCH: CH6	2437
	15	15	MCS 9	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15 °C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

## 2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com).

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

## 2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 <sup>-8</sup> (Antenna couple method)
	5.5 x 10 <sup>-8</sup> (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 <sup>-8</sup>
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
<input checked="" type="checkbox"/> RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2024/04/26
Wideband Radio Communication Tester	R&S	CMW500	120259	2024/07/14
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2024/04/26
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2024/04/26
RF Control Unit	Tonsend	JS0806-2	158060010	2024/04/26
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2024/05/14
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

## 4. 6dB Bandwidth

### 4.1. Block diagram of test setup

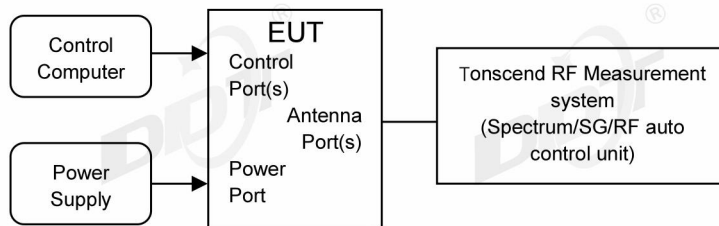

### 4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### 4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:
 

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold




Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report




## 4.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.6℃,64%RH	Test Date:	2024.01.29-2024.02.02
Test Power Supply:	AC230V/50Hz	EUT:	Mercku M6s Nano Mesh Wi-Fi Router
Sample Number:	S23111605-01	Model No.:	MBAA0

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.04	2408.00	2416.04	0.5	PASS
	Ant2	2412	8.00	2408.00	2416.00	0.5	PASS
	Ant1	2437	8.00	2433.00	2441.00	0.5	PASS
	Ant2	2437	8.04	2432.96	2441.00	0.5	PASS
	Ant1	2462	8.00	2458.00	2466.00	0.5	PASS
	Ant2	2462	8.00	2458.00	2466.00	0.5	PASS
11G	Ant1	2412	16.04	2403.84	2419.88	0.5	PASS
	Ant2	2412	16.04	2404.08	2420.12	0.5	PASS
	Ant1	2437	15.92	2428.84	2444.76	0.5	PASS
	Ant2	2437	15.76	2429.12	2444.88	0.5	PASS
	Ant1	2462	15.52	2454.24	2469.76	0.5	PASS
	Ant2	2462	16.04	2453.84	2469.88	0.5	PASS
11N20MI MO	Ant1	2412	16.68	2403.48	2420.16	0.5	PASS
	Ant2	2412	17.56	2403.20	2420.76	0.5	PASS
	Ant1	2437	16.52	2428.60	2445.12	0.5	PASS
	Ant2	2437	17.12	2428.24	2445.36	0.5	PASS
	Ant1	2462	15.72	2453.84	2469.56	0.5	PASS
	Ant2	2462	17.52	2453.24	2470.76	0.5	PASS
11N40MI MO	Ant1	2422	35.04	2404.48	2439.52	0.5	PASS
	Ant2	2422	35.04	2404.48	2439.52	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.04	2434.48	2469.52	0.5	PASS
11AX20M IMO	Ant1	2412	18.08	2402.68	2420.76	0.5	PASS
	Ant2	2412	18.32	2402.76	2421.08	0.5	PASS
	Ant1	2437	18.40	2427.60	2446.00	0.5	PASS
	Ant2	2437	18.36	2427.96	2446.32	0.5	PASS
	Ant1	2462	18.24	2452.76	2471.00	0.5	PASS
	Ant2	2462	18.48	2452.76	2471.24	0.5	PASS
11AX40M IMO	Ant1	2422	36.96	2403.52	2440.48	0.5	PASS
	Ant2	2422	36.32	2404.48	2440.80	0.5	PASS
	Ant1	2437	36.08	2419.48	2455.56	0.5	PASS
	Ant2	2437	36.32	2419.48	2455.80	0.5	PASS
	Ant1	2452	37.12	2433.20	2470.32	0.5	PASS
	Ant2	2452	36.88	2433.92	2470.80	0.5	PASS


### 4.5. Test graphs

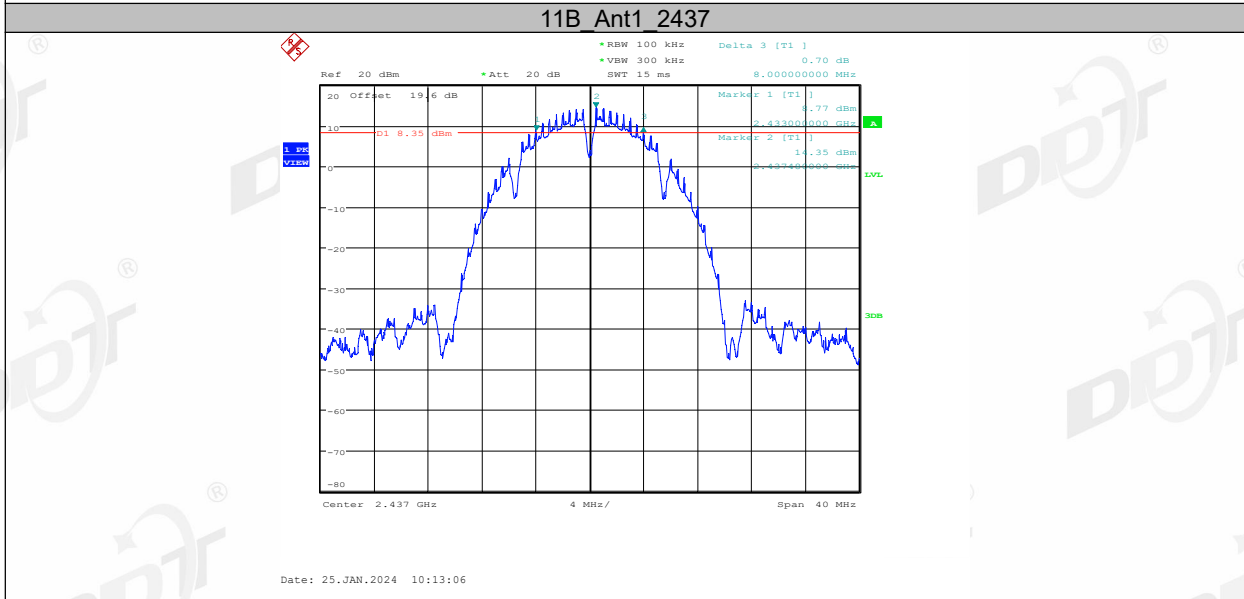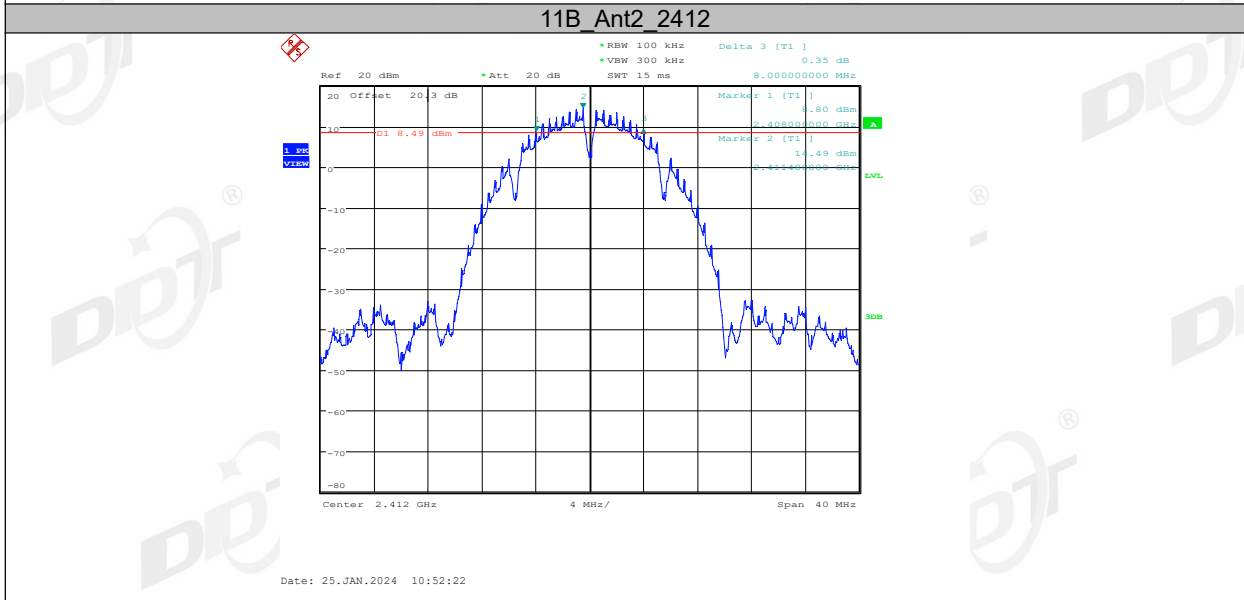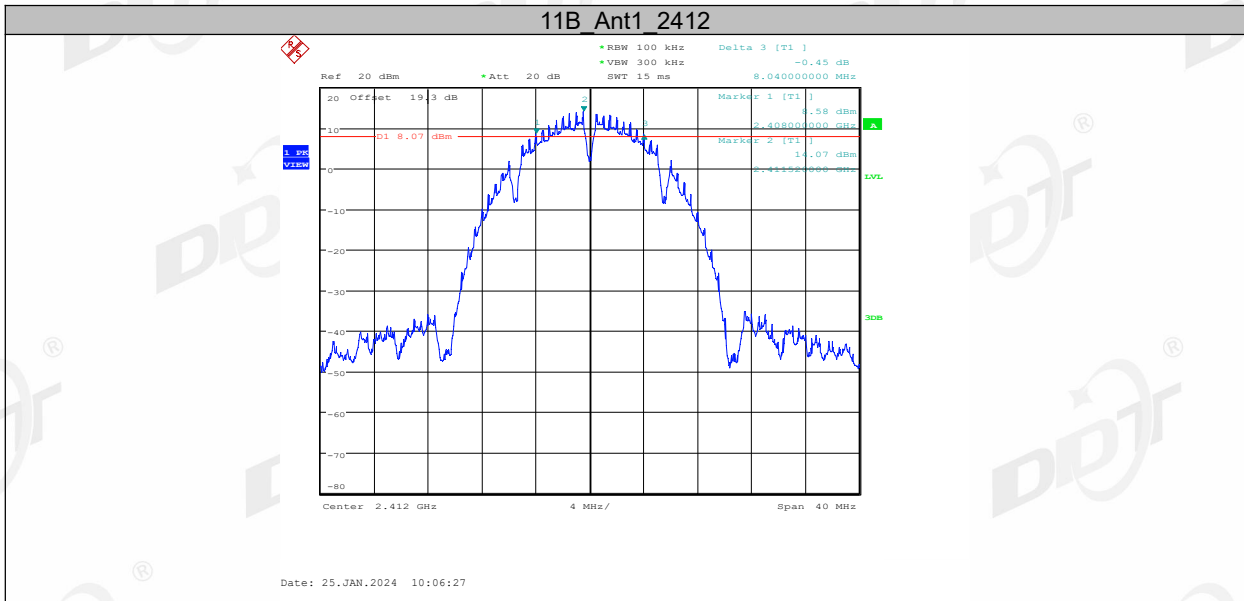

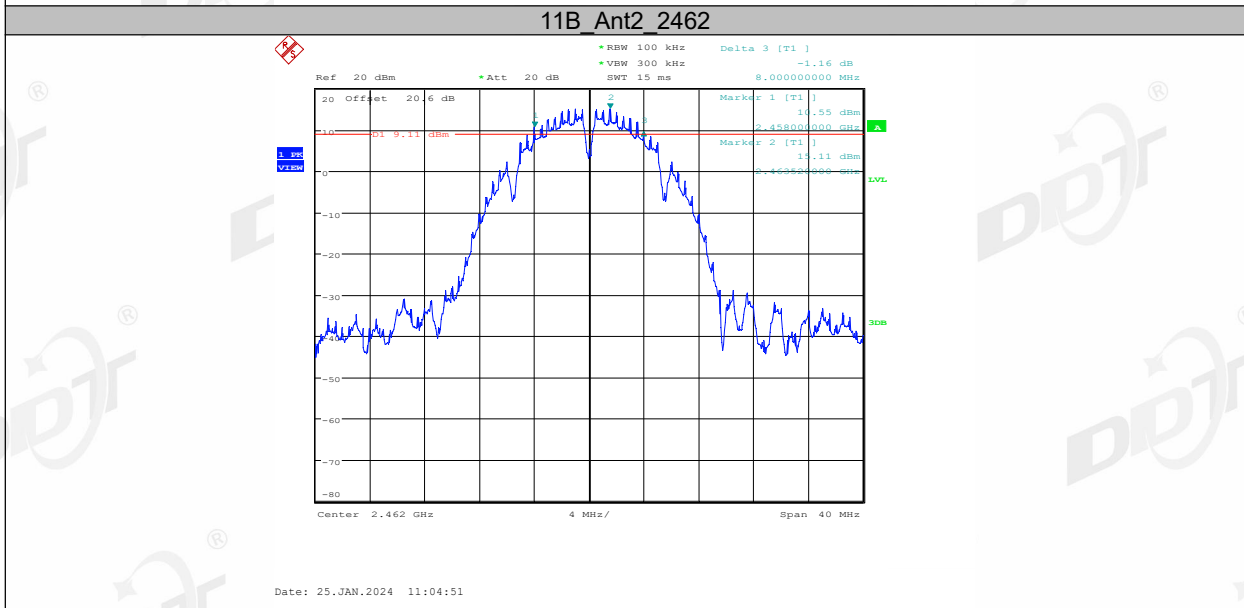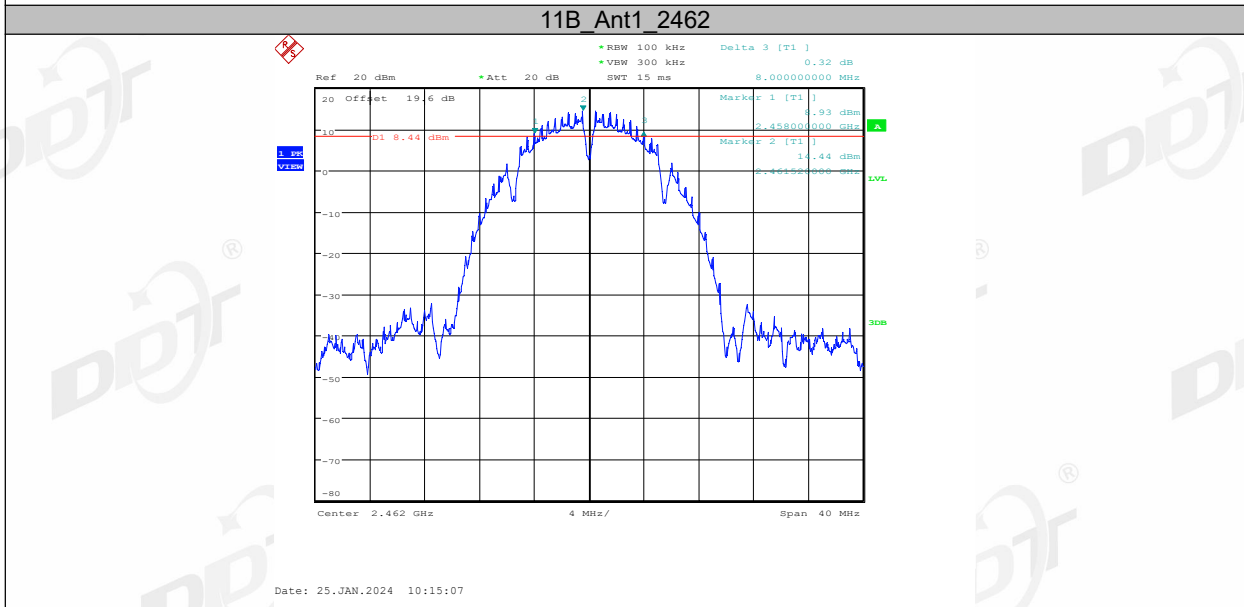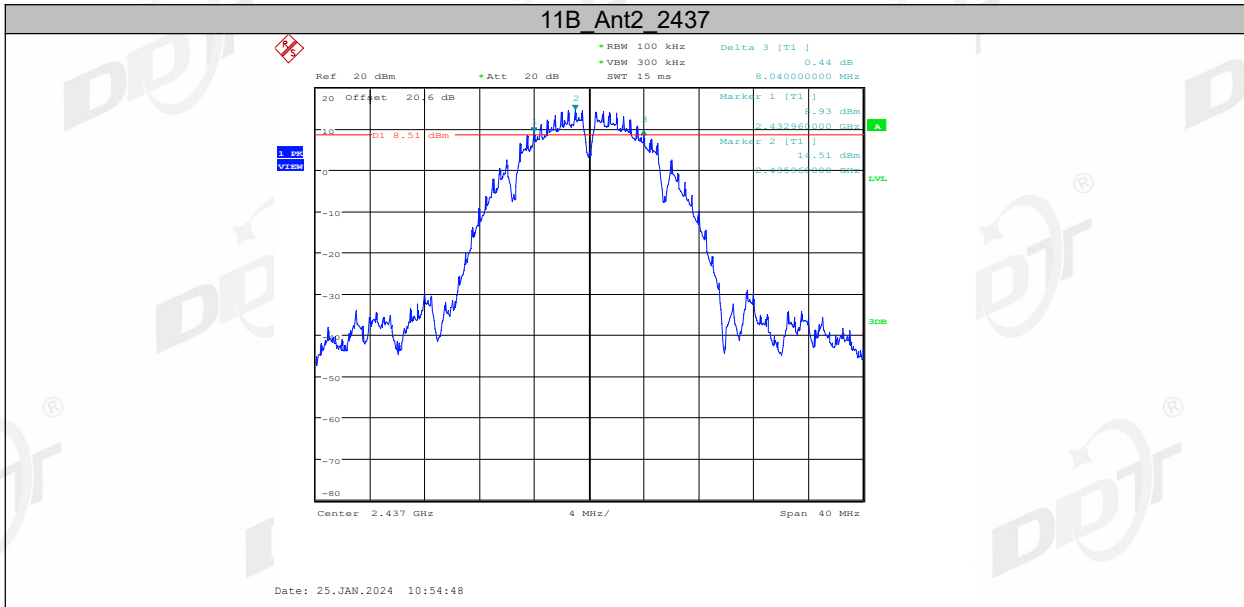


### 11G\_Ant1\_2412




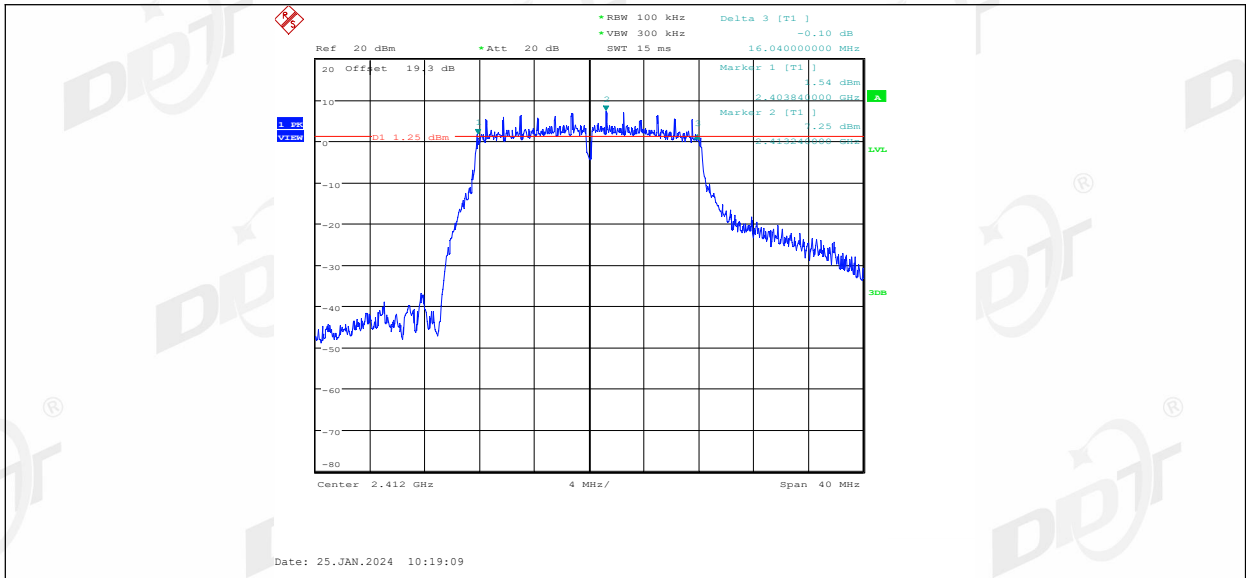


11G Ant2\_2412

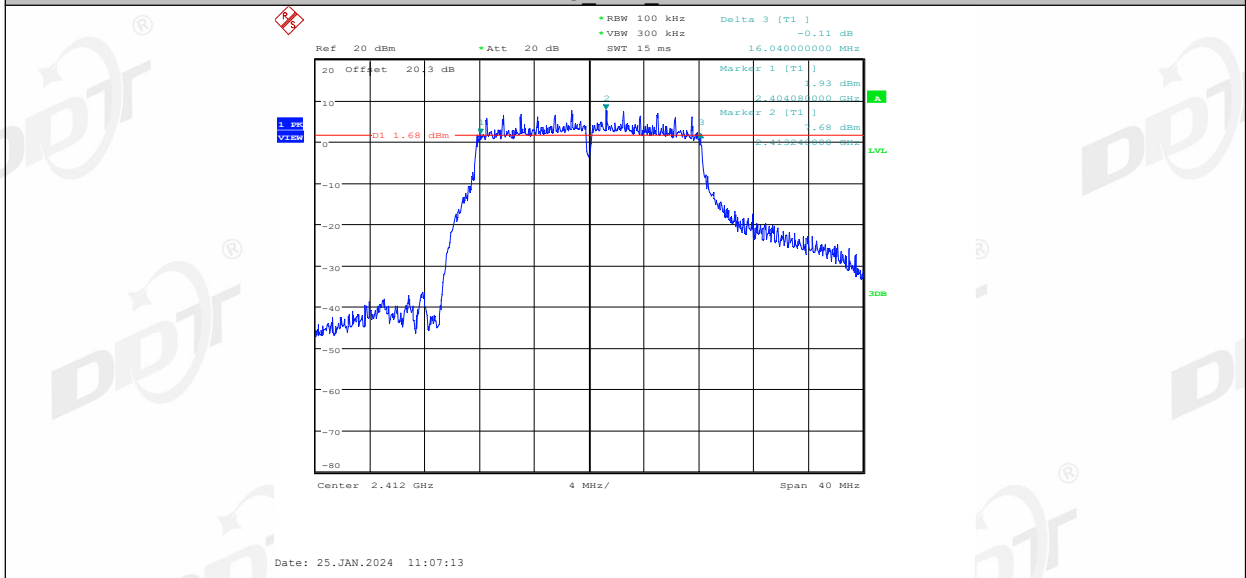


11G Ant1\_2437

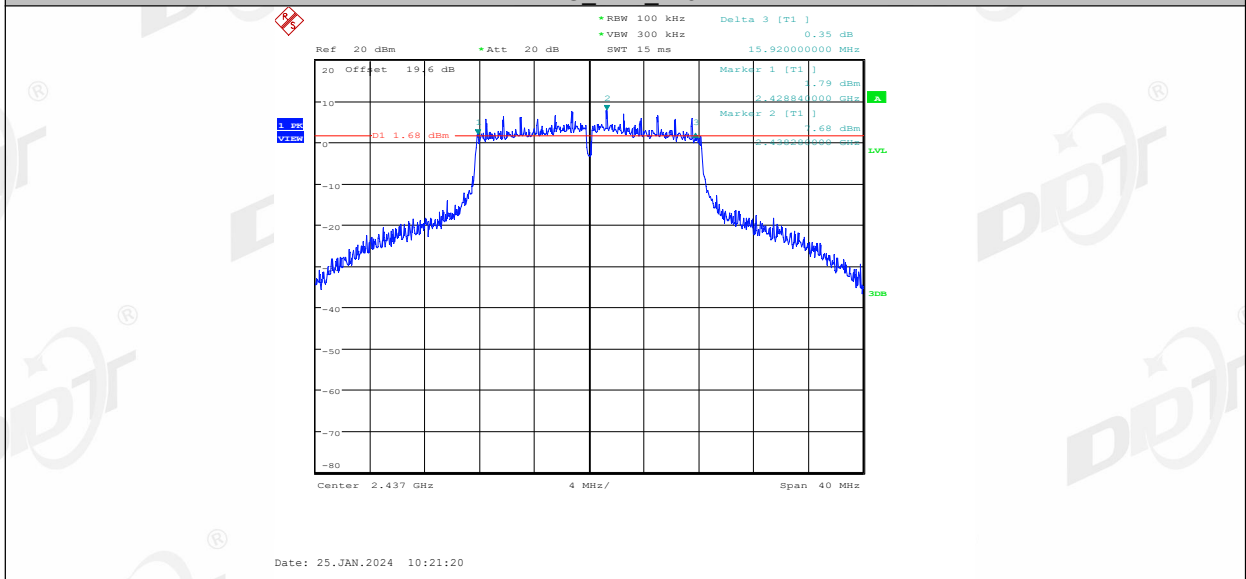


11G Ant2\_2437

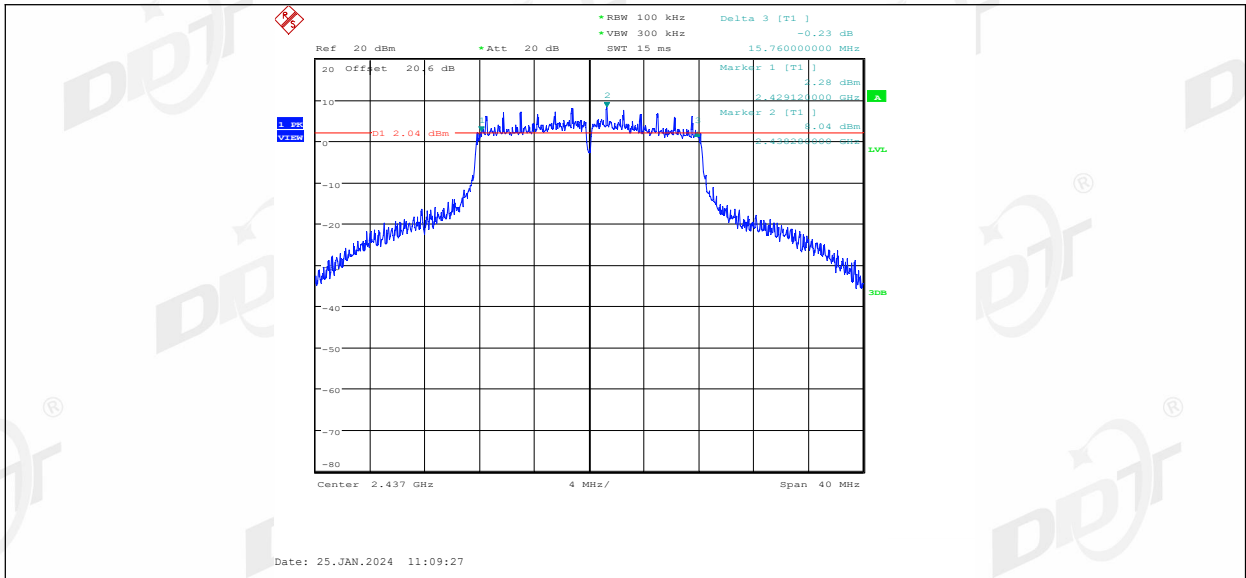


11G Ant1\_2462

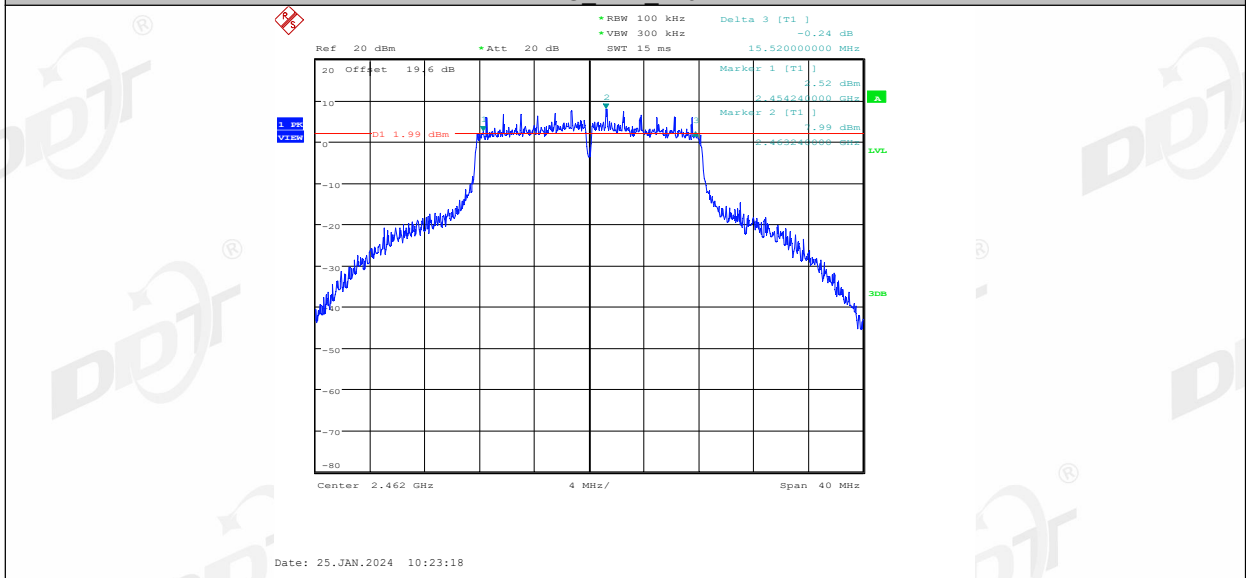


11G Ant2\_2462

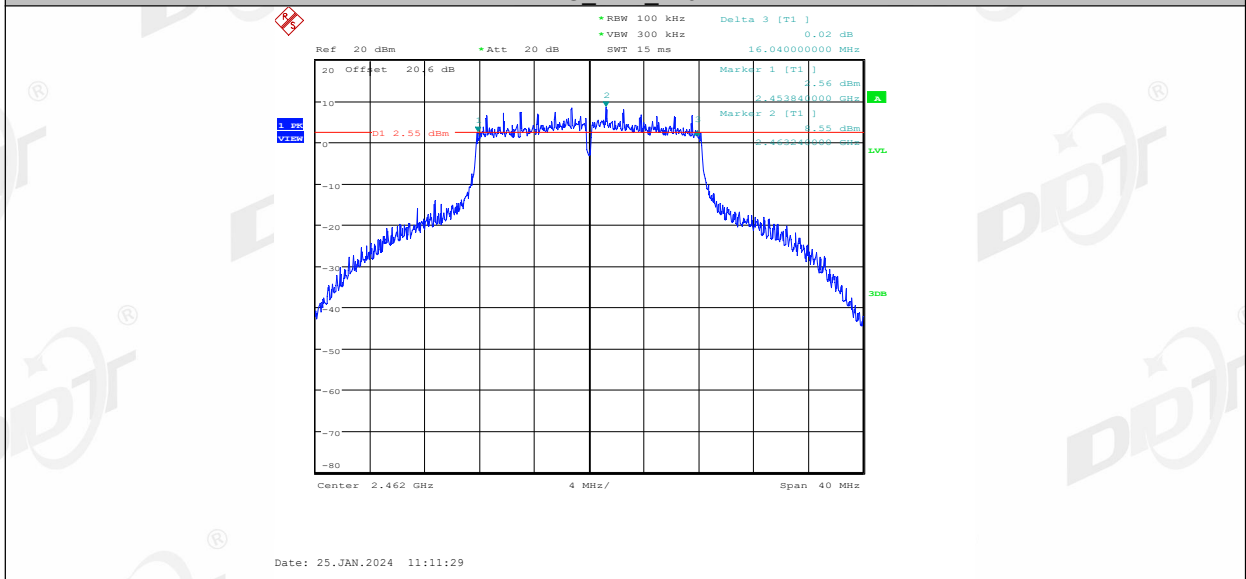


11N20MIMO\_Ant1\_2412

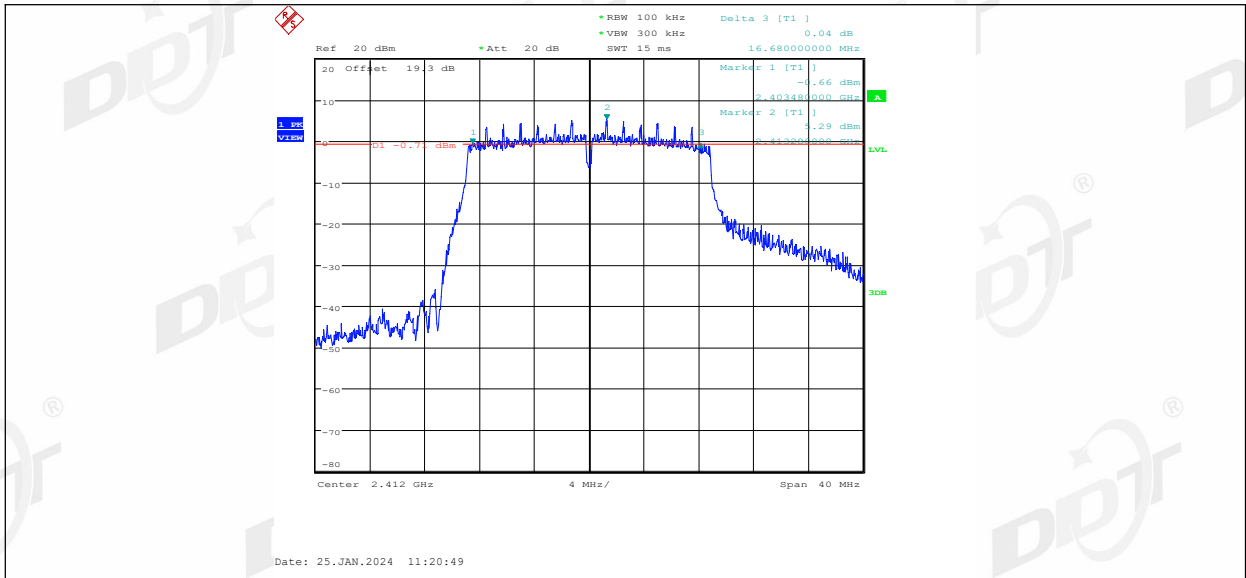


11N20MIMO\_Ant2\_2412

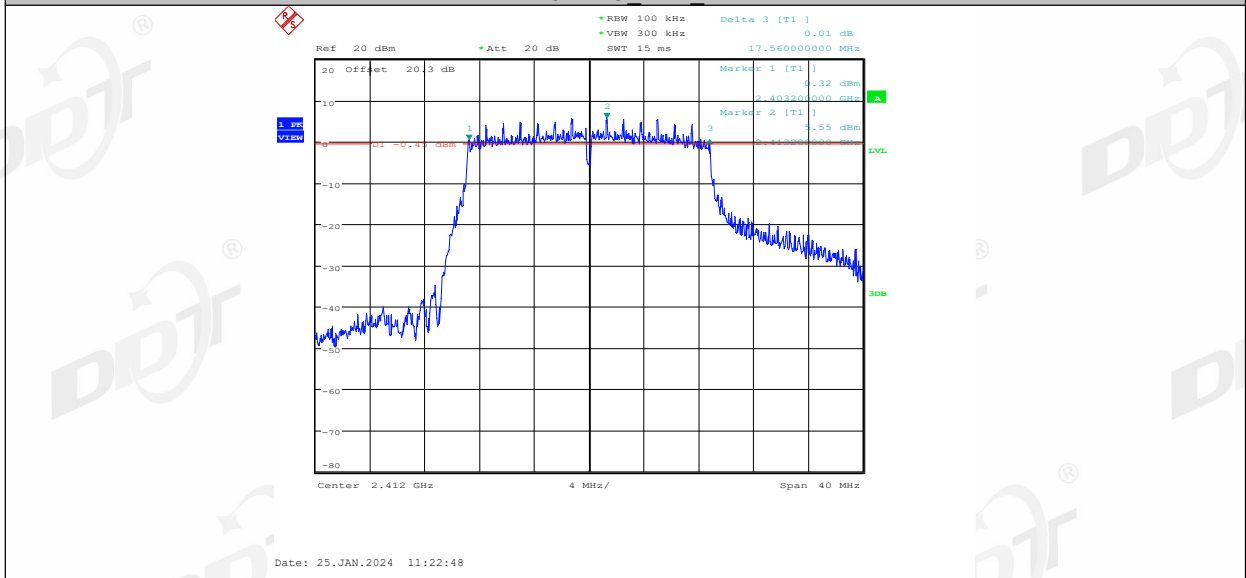


11N20MIMO\_Ant1\_2437

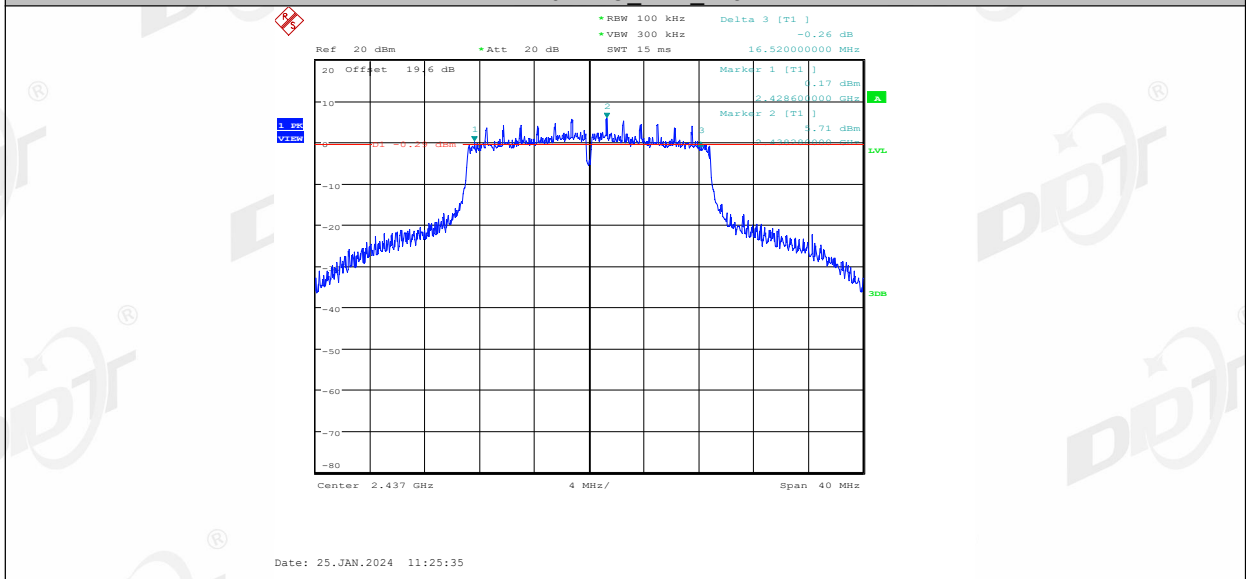


11N20MIMO\_Ant2\_2437

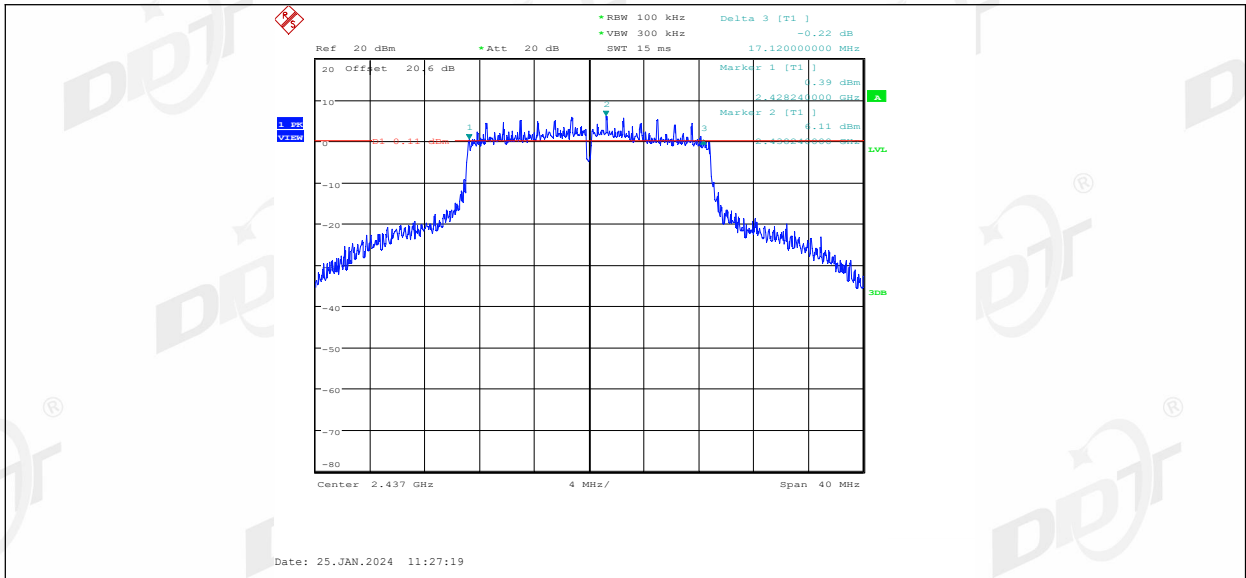


11N20MIMO\_Ant1\_2462

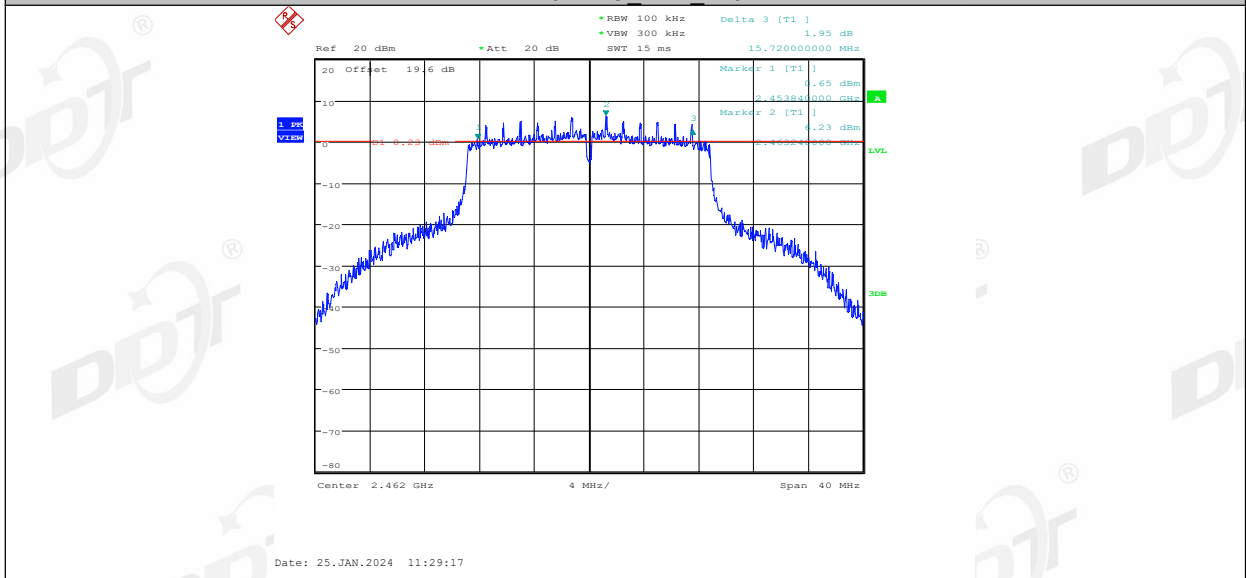


11N20MIMO\_Ant2\_2462

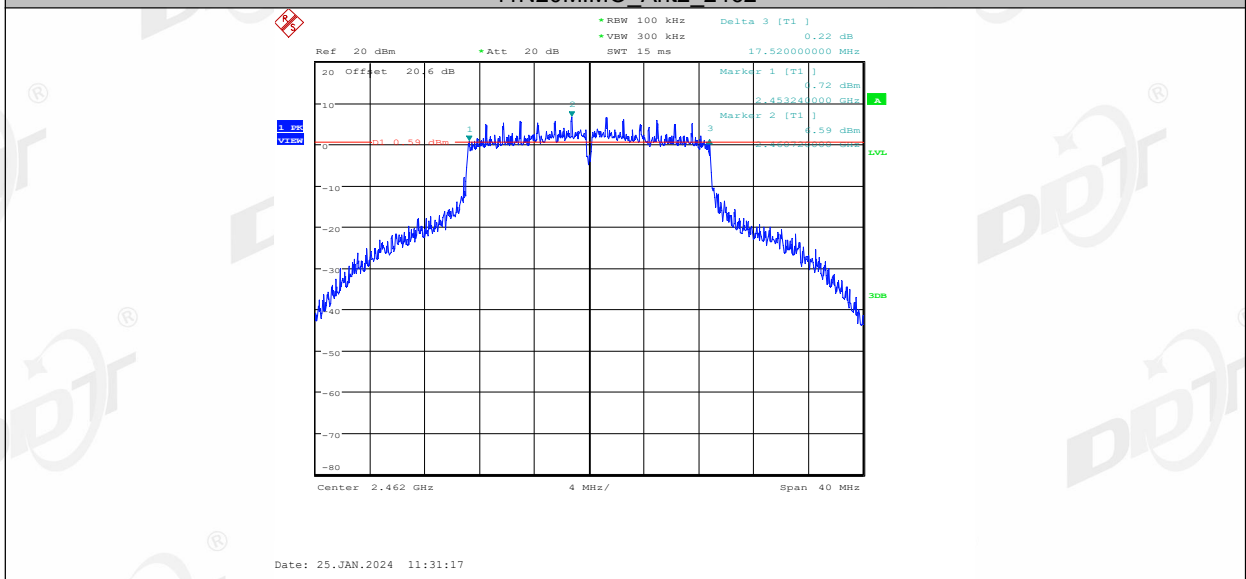


11N40MIMO\_Ant1\_2422

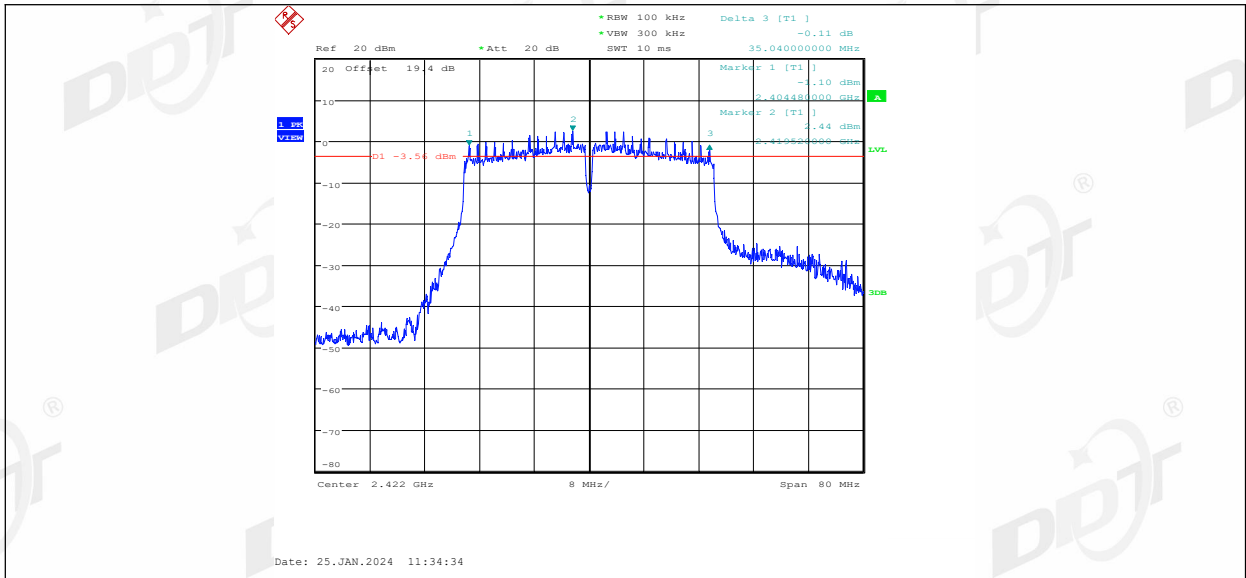


11N40MIMO\_Ant2\_2422

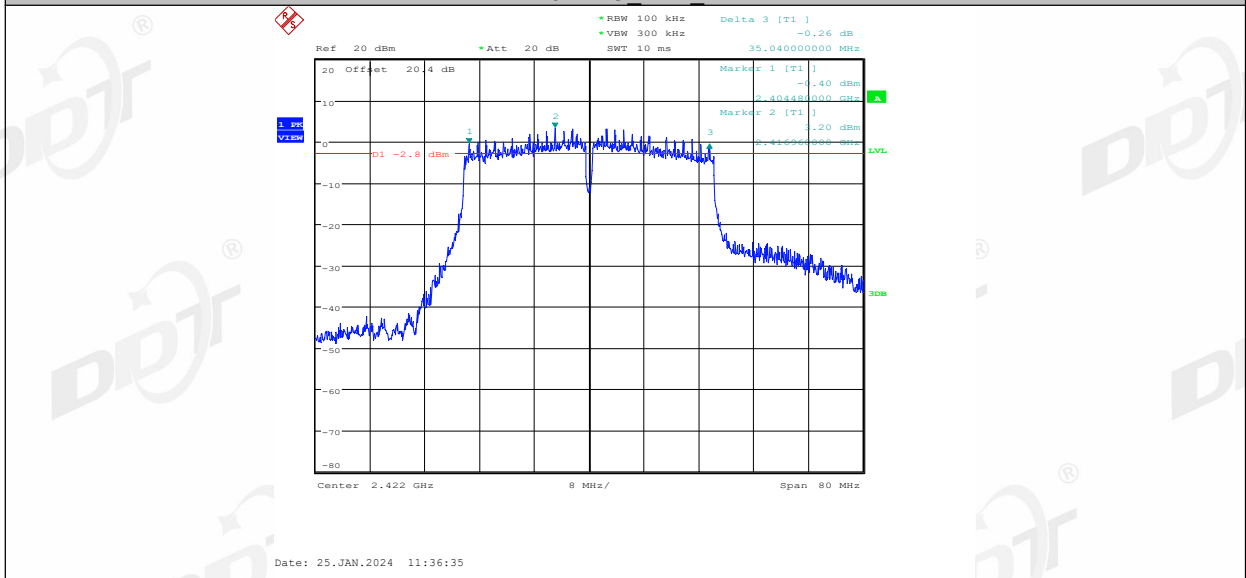


11N40MIMO\_Ant1\_2437

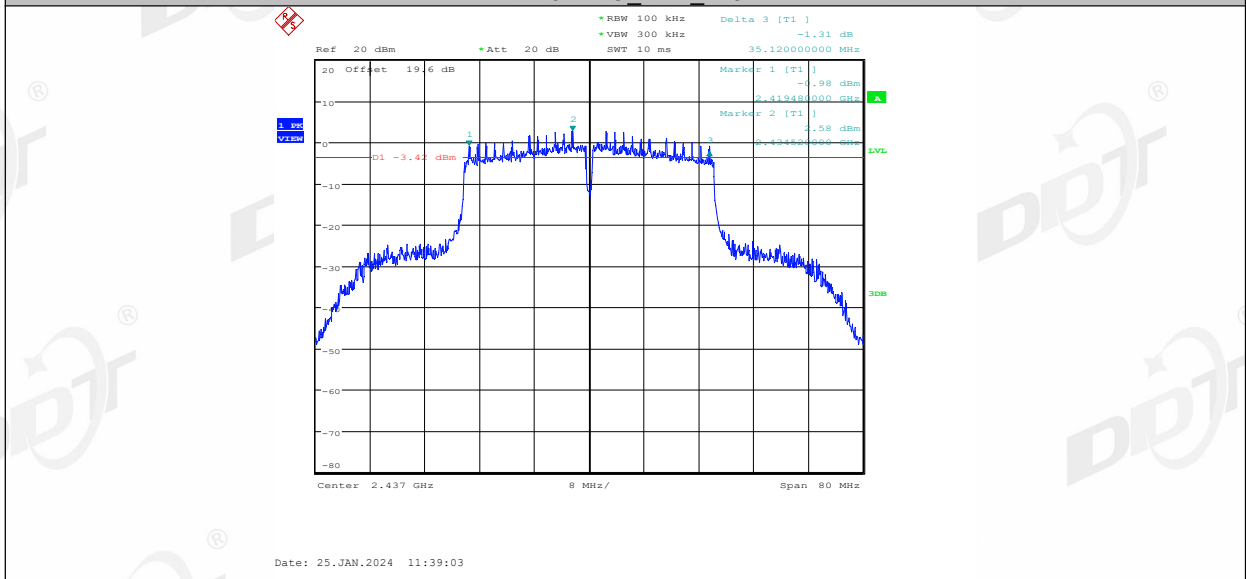


11N40MIMO\_Ant2\_2437

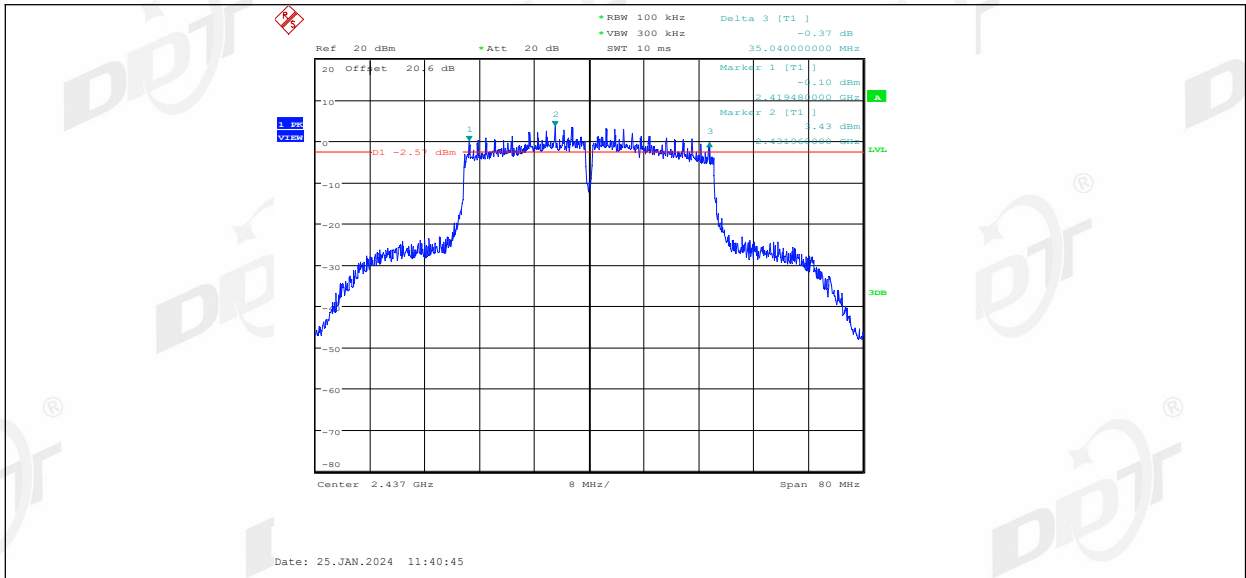


11N40MIMO\_Ant1\_2452

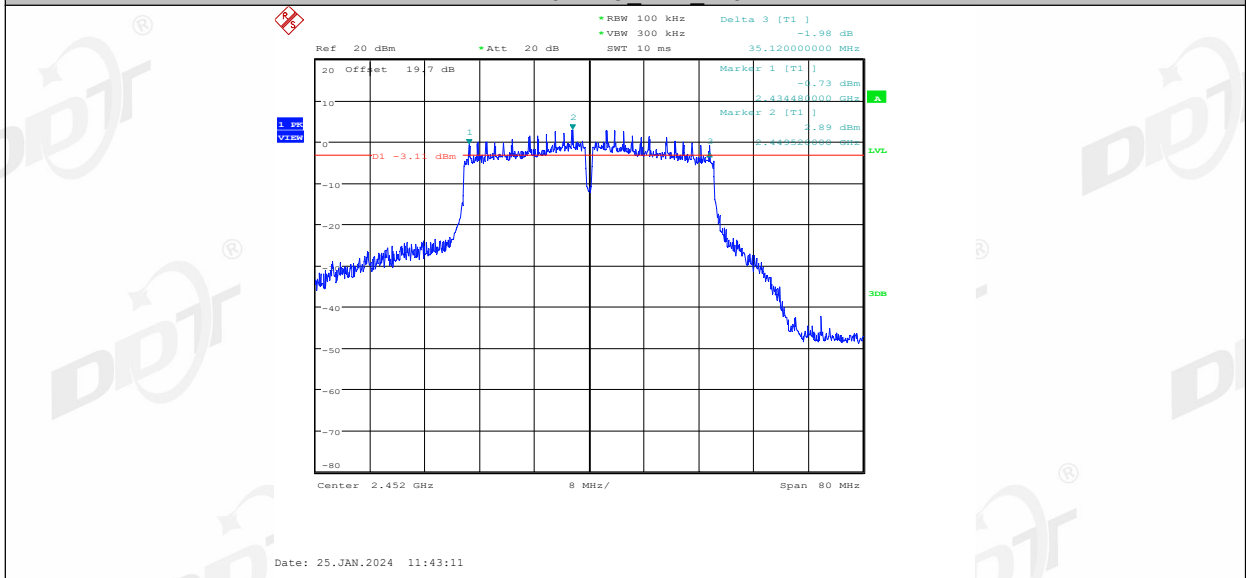


11N40MIMO\_Ant2\_2452

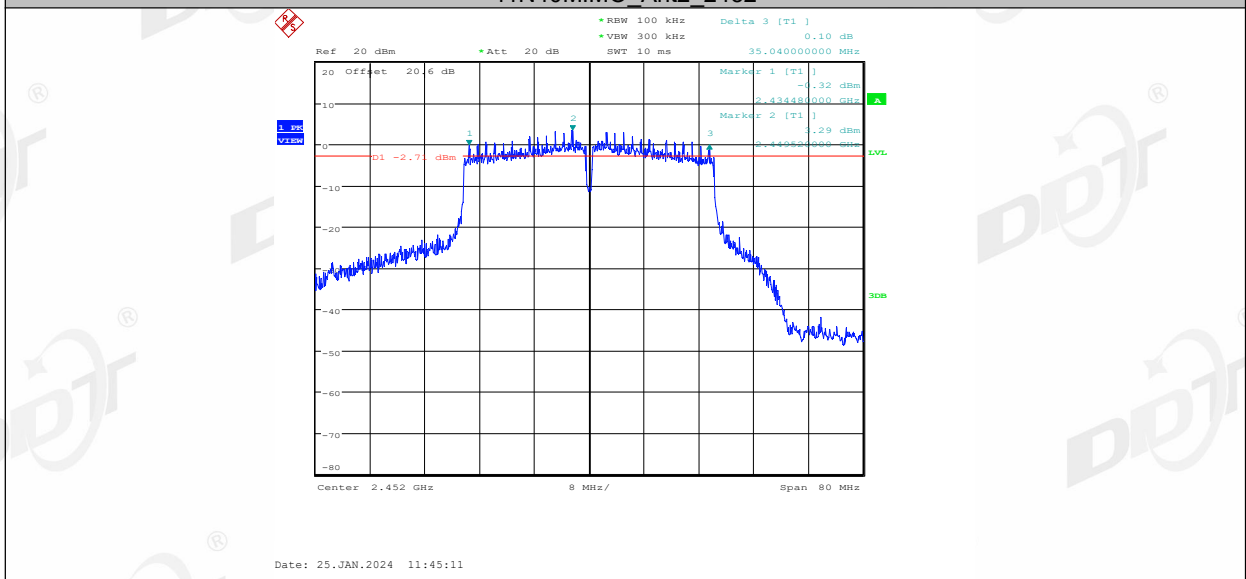


11AX20MIMO\_Ant1\_2412

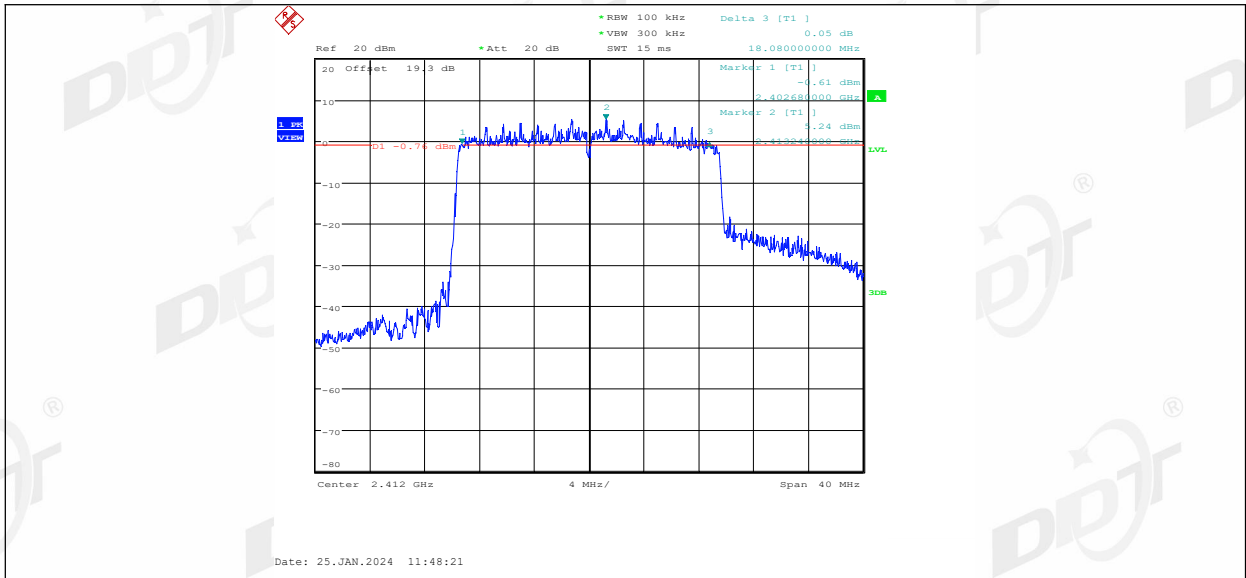


11AX20MIMO Ant2 2412

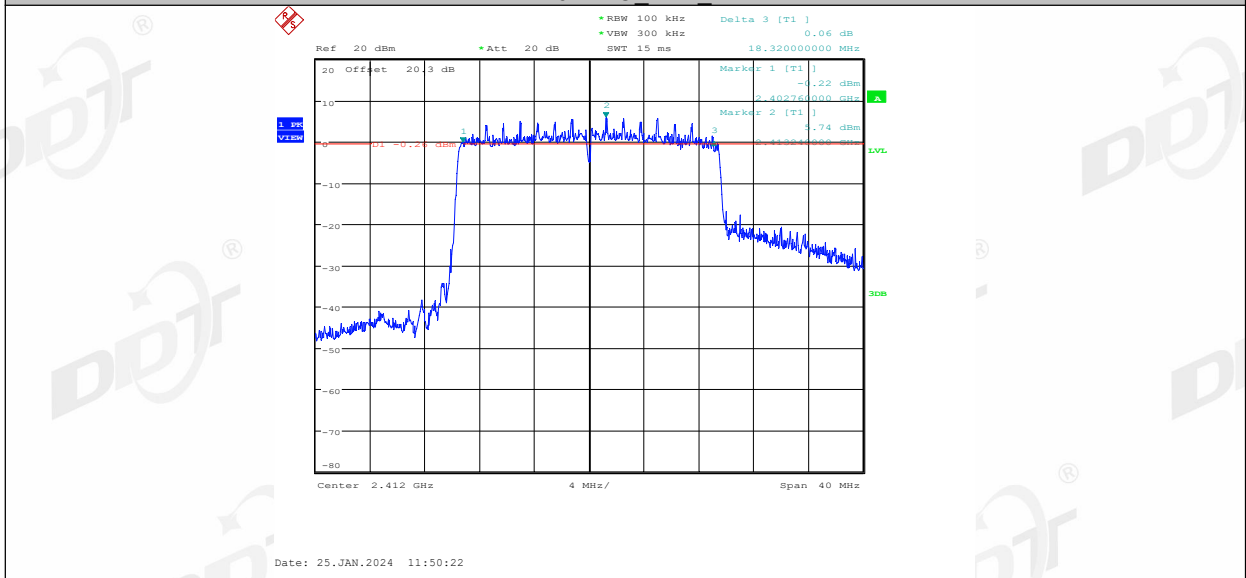


11AX20MIMO Ant1 2437

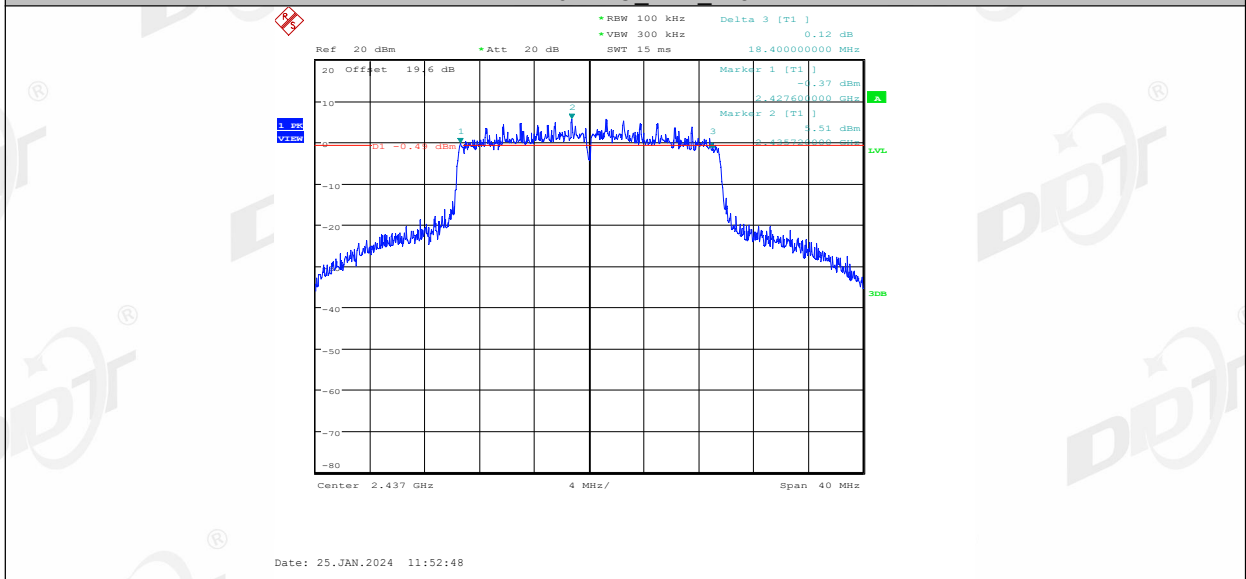


11AX20MIMO Ant2 2437

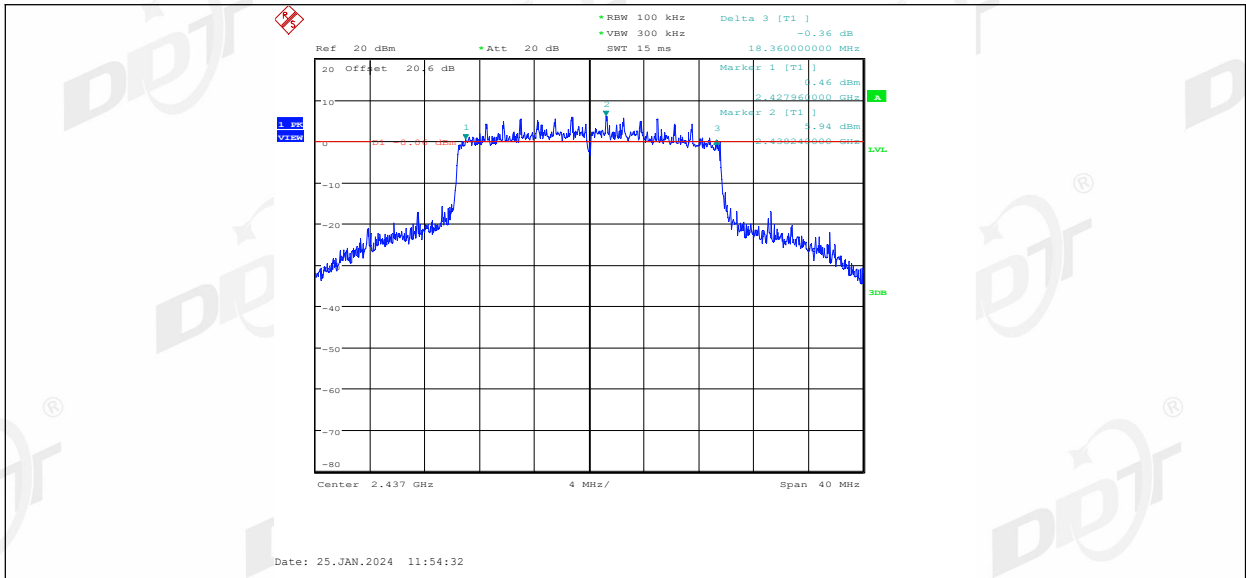

11AX20MIMO Ant1 2462

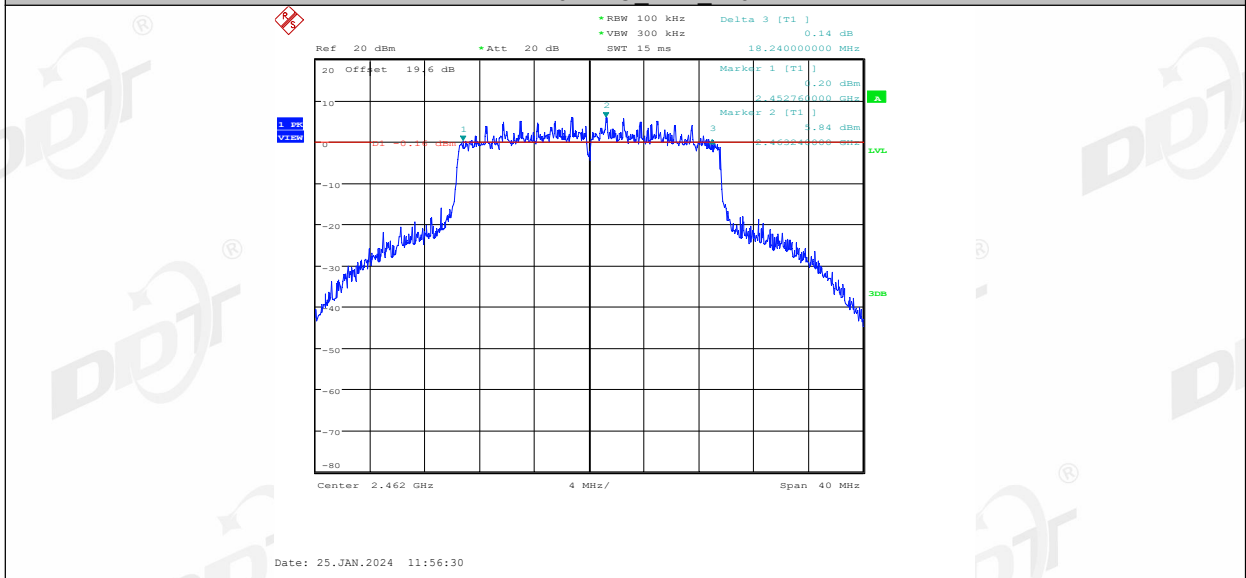


11AX20MIMO Ant2 2462

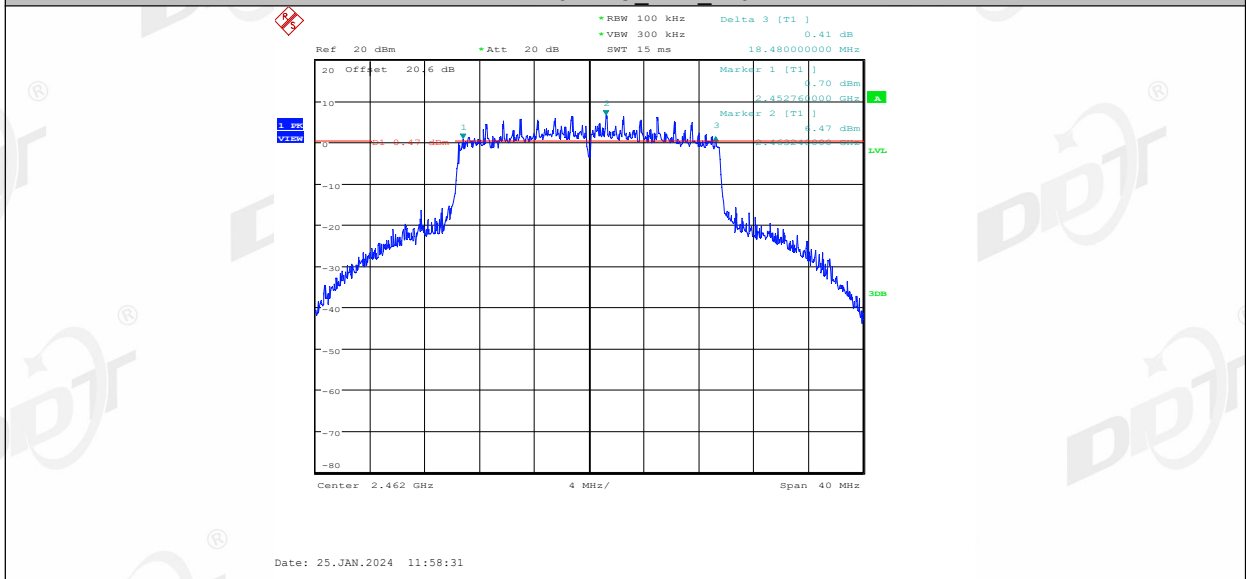


11AX40MIMO Ant1 2422




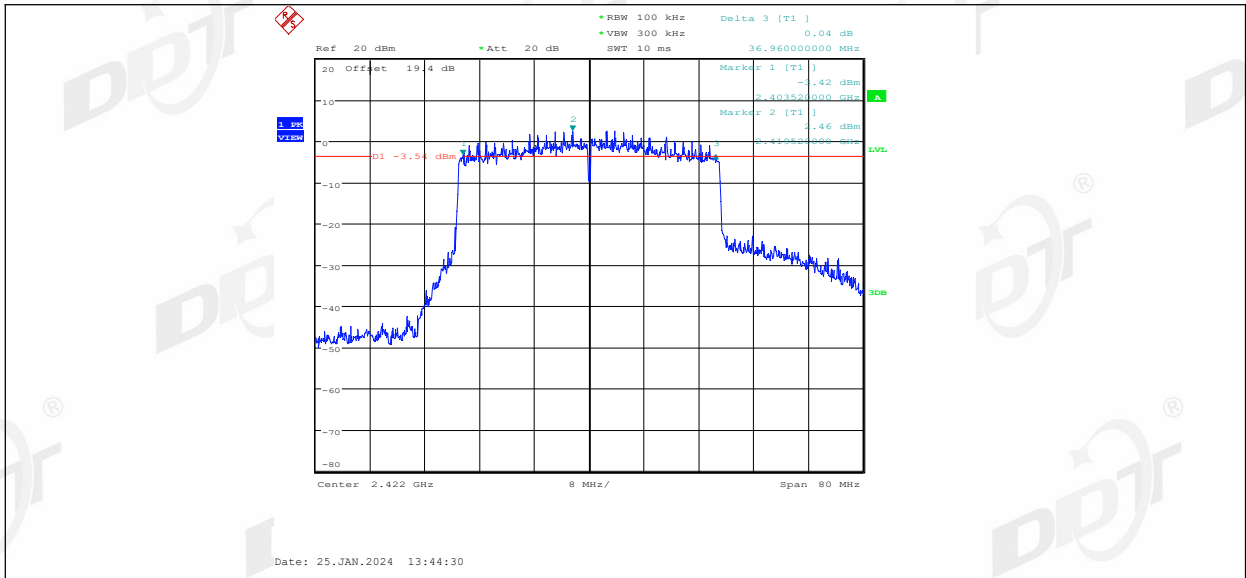


11AX40MIMO Ant2 2422

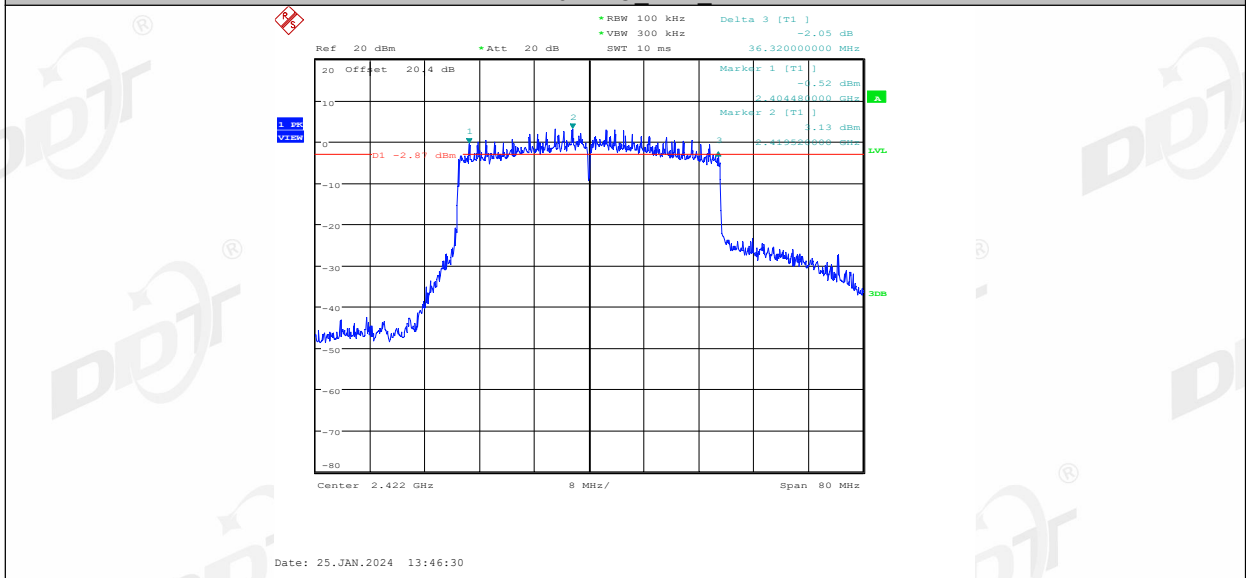


11AX40MIMO Ant1 2437

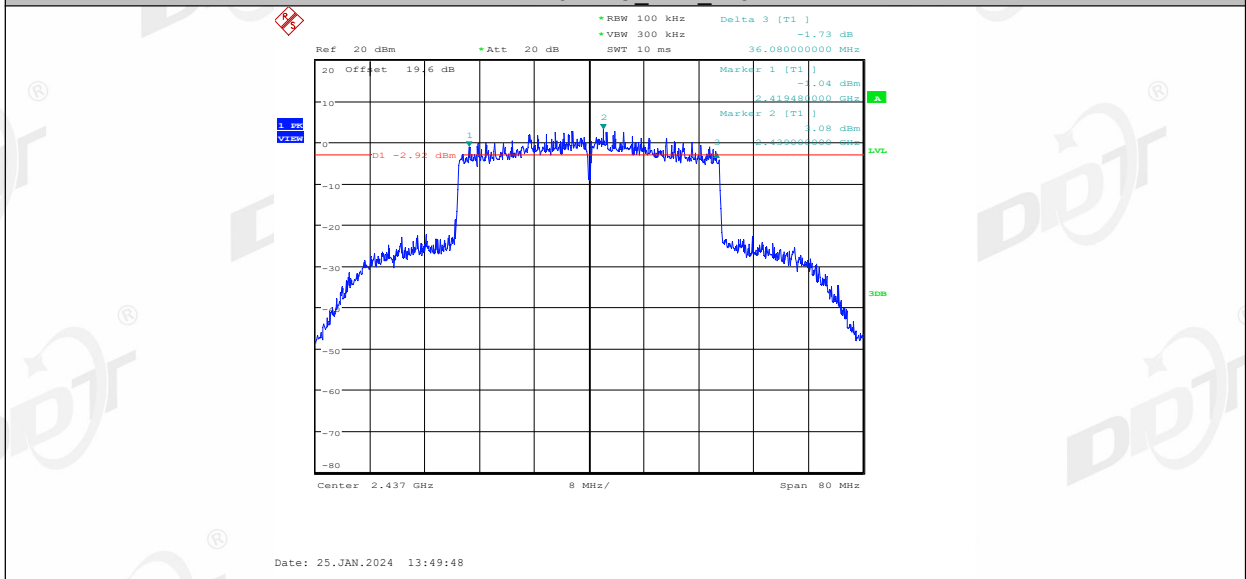


11AX40MIMO Ant2 2437

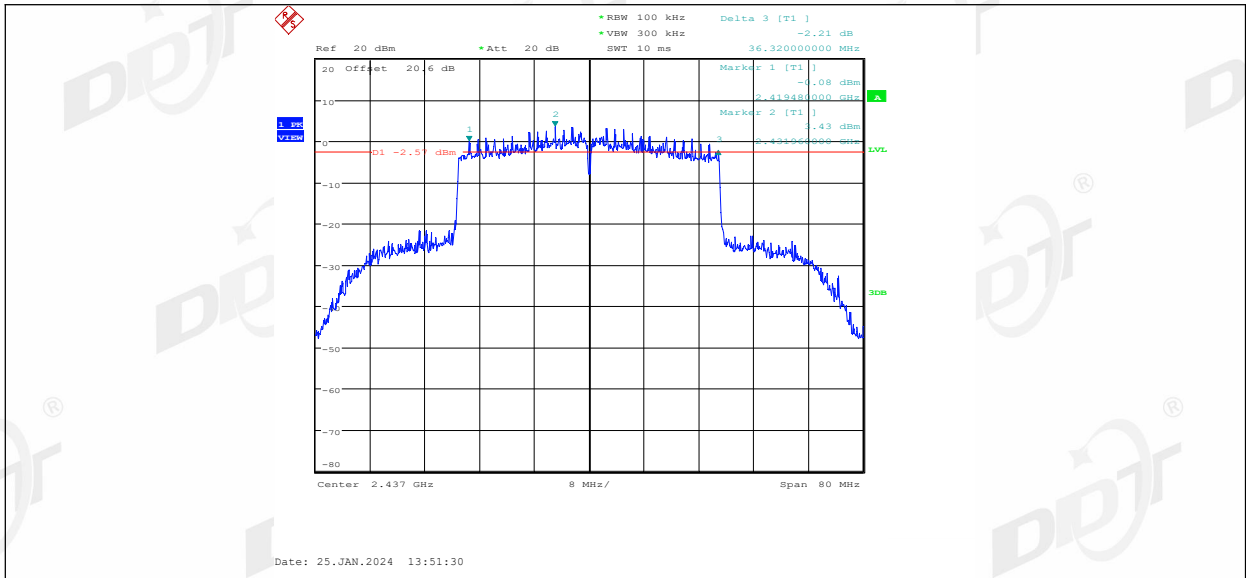

11AX40MIMO Ant1 2452

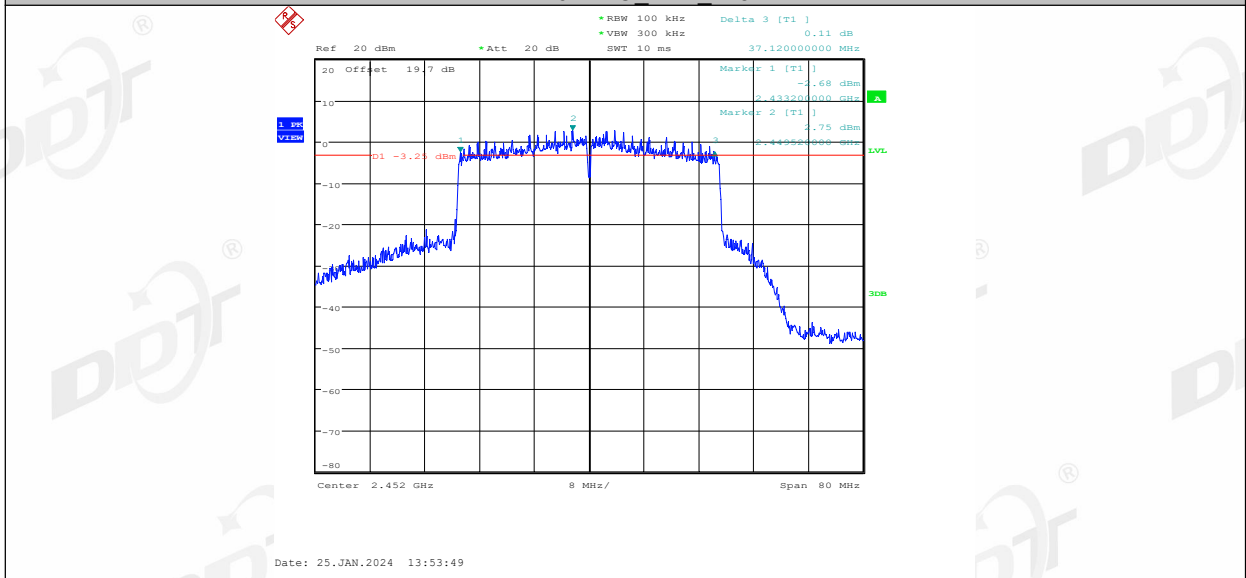


11AX40MIMO Ant2 2452

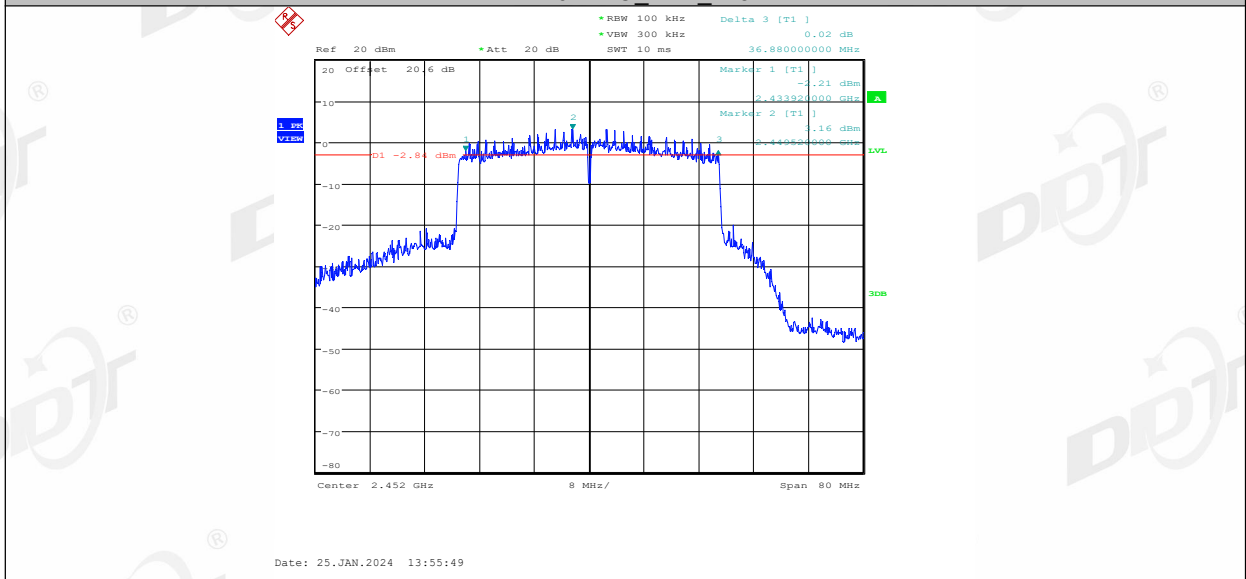

## 5. 99% Bandwidth

### 5.1. Block diagram of test setup

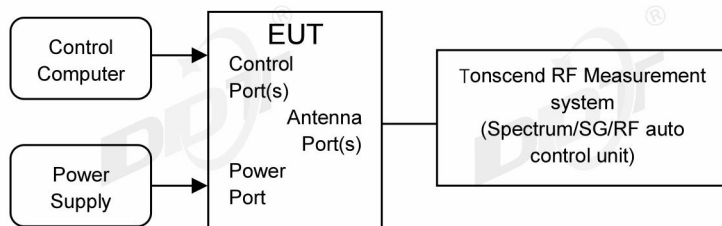

### 5.2. Limits

Just for Report.

### 5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:
 

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold




Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.




## 5.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.6℃,64%RH	Test Date:	2024.01.29-2024.02.02
Test Power Supply:	AC230V/50Hz	EUT:	Mercku M6s Nano Mesh Wi-Fi Router
Sample Number:	S23111605-01	Model No.:	MBAA0


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.72	2405.6400	2418.3600	---	---
	Ant2	2412	12.72	2405.6400	2418.3600	---	---
	Ant1	2437	12.68	2430.6400	2443.3200	---	---
	Ant2	2437	12.56	2430.6800	2443.2400	---	---
	Ant1	2462	12.48	2455.7600	2468.2400	---	---
	Ant2	2462	12.4	2455.8000	2468.2000	---	---
11G	Ant1	2412	17.52	2403.3600	2420.8800	---	---
	Ant2	2412	17.52	2403.4000	2420.9200	---	---
	Ant1	2437	17.6	2428.2000	2445.8000	---	---
	Ant2	2437	17.56	2428.1600	2445.7200	---	---
	Ant1	2462	17.48	2453.2400	2470.7200	---	---
	Ant2	2462	17.44	2453.2800	2470.7200	---	---
11N20MI MO	Ant1	2412	18.28	2402.9200	2421.2000	---	---
	Ant2	2412	18.16	2403.0000	2421.1600	---	---
	Ant1	2437	18.68	2427.6800	2446.3600	---	---
	Ant2	2437	18.32	2427.8000	2446.1200	---	---
	Ant1	2462	18.48	2452.7200	2471.2000	---	---
	Ant2	2462	18.36	2452.8400	2471.2000	---	---
11N40MI MO	Ant1	2422	36.72	2403.7600	2440.4800	---	---
	Ant2	2422	36.56	2403.7600	2440.3200	---	---
	Ant1	2437	36.88	2418.6000	2455.4800	---	---
	Ant2	2437	36.72	2418.6000	2455.3200	---	---
	Ant1	2452	36.8	2433.4400	2470.2400	---	---
	Ant2	2452	36.8	2433.4400	2470.2400	---	---
11AX20M IMO	Ant1	2412	19.08	2402.4800	2421.5600	---	---
	Ant2	2412	19.08	2402.5200	2421.6000	---	---
	Ant1	2437	19.36	2427.3200	2446.6800	---	---
	Ant2	2437	19.28	2427.3200	2446.6000	---	---
	Ant1	2462	19.24	2452.4000	2471.6400	---	---
	Ant2	2462	19.28	2452.3600	2471.6400	---	---
11AX40M IMO	Ant1	2422	38	2403.0400	2441.0400	---	---
	Ant2	2422	38	2403.0400	2441.0400	---	---
	Ant1	2437	38.16	2417.8800	2456.0400	---	---
	Ant2	2437	38.08	2417.9600	2456.0400	---	---
	Ant1	2452	38.08	2432.8800	2470.9600	---	---
	Ant2	2452	38.08	2432.8800	2470.9600	---	---

### 5.5. Test graphs

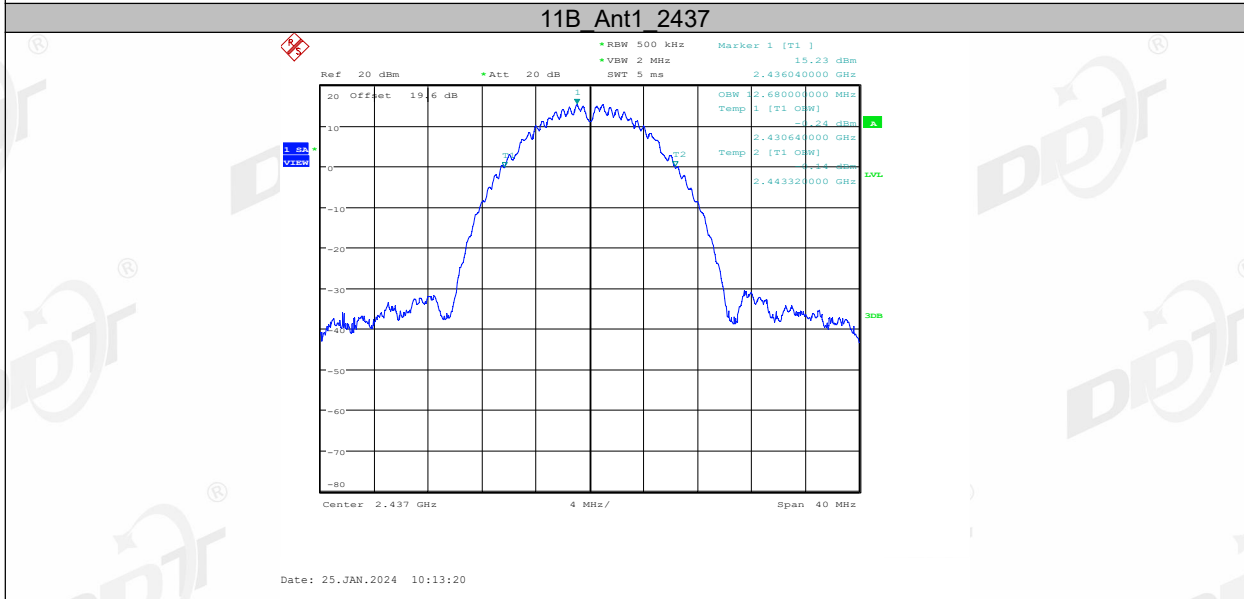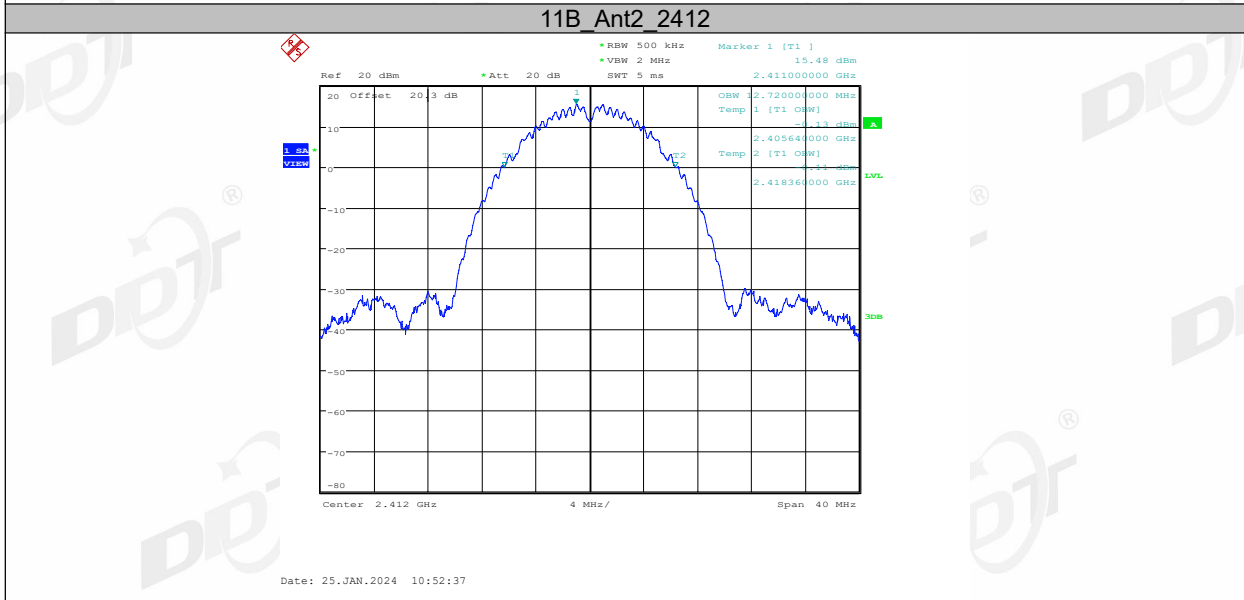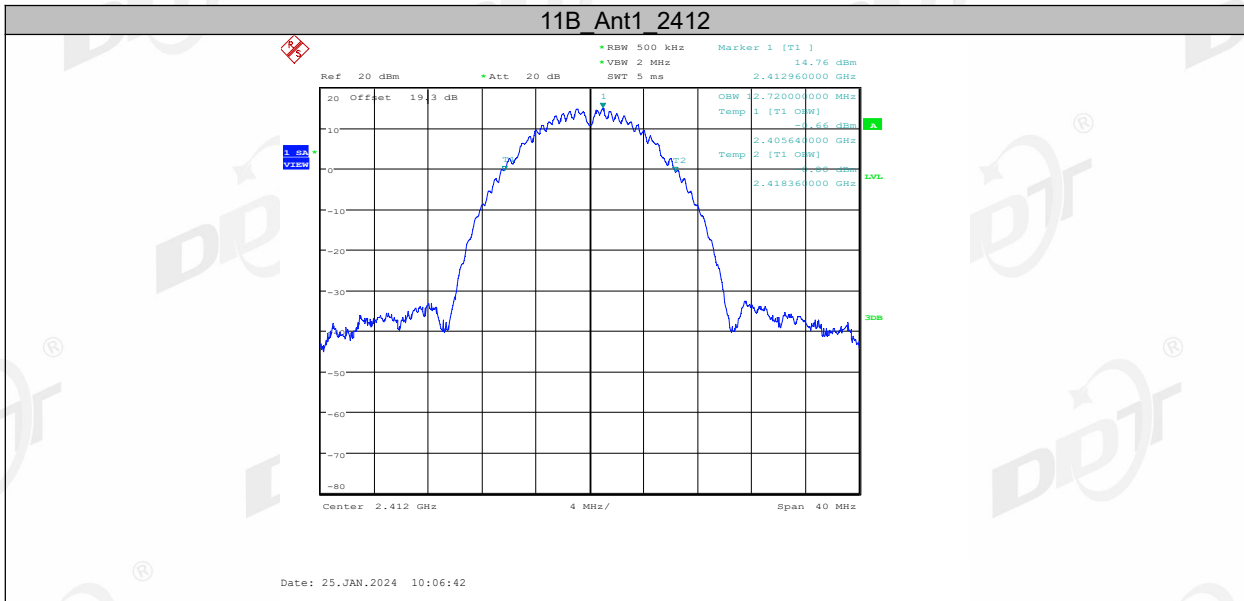


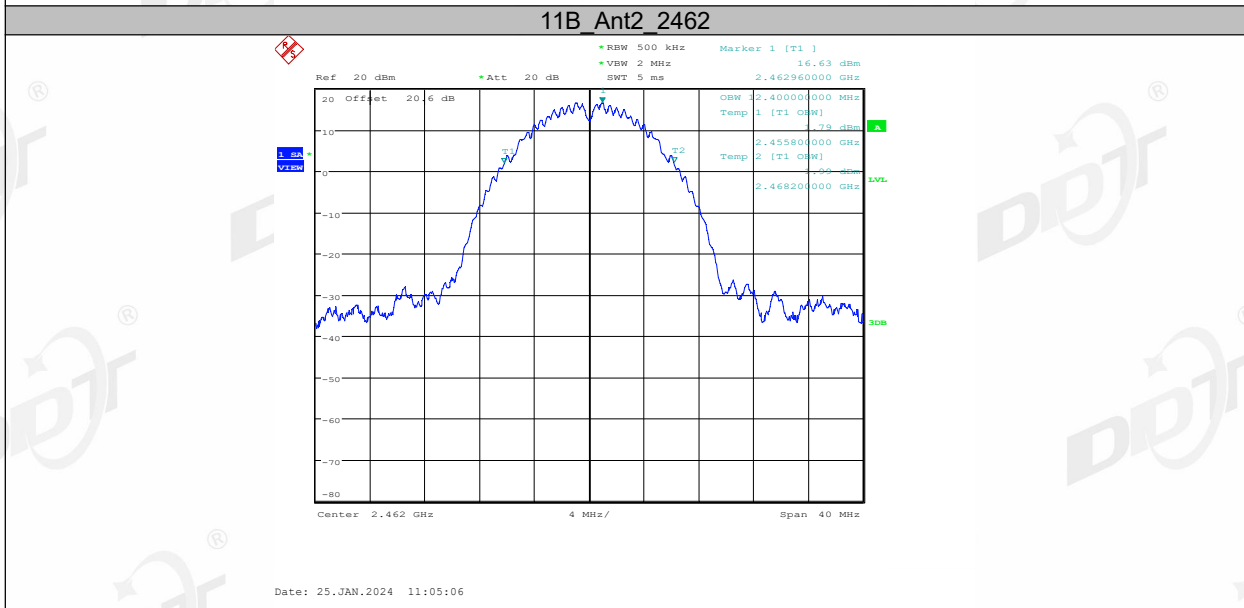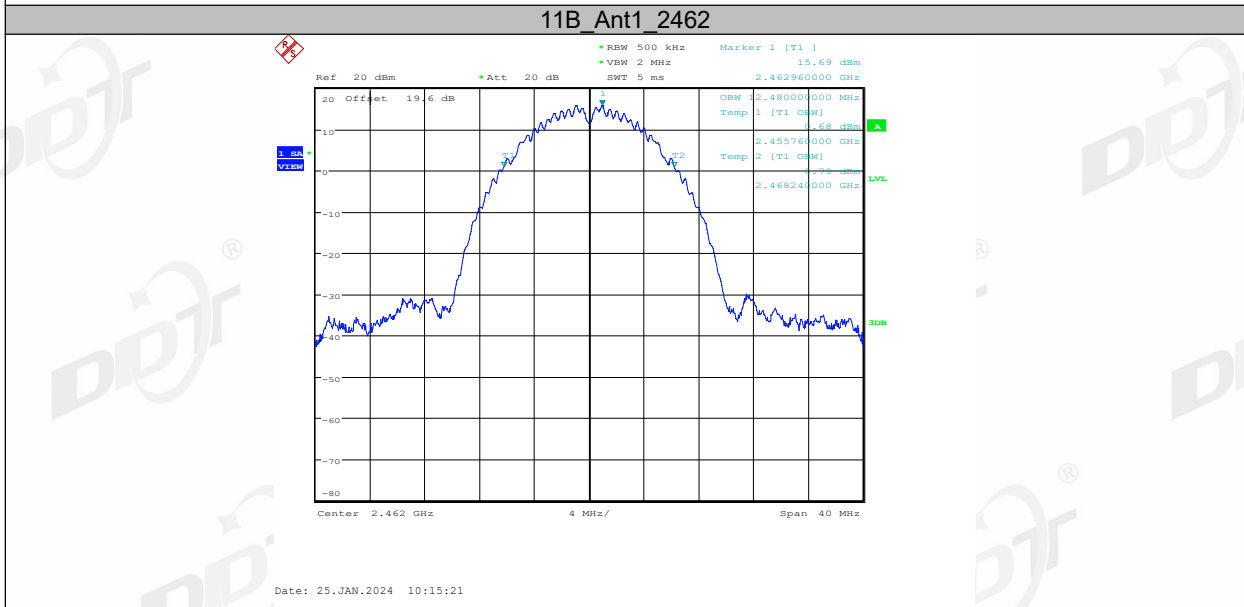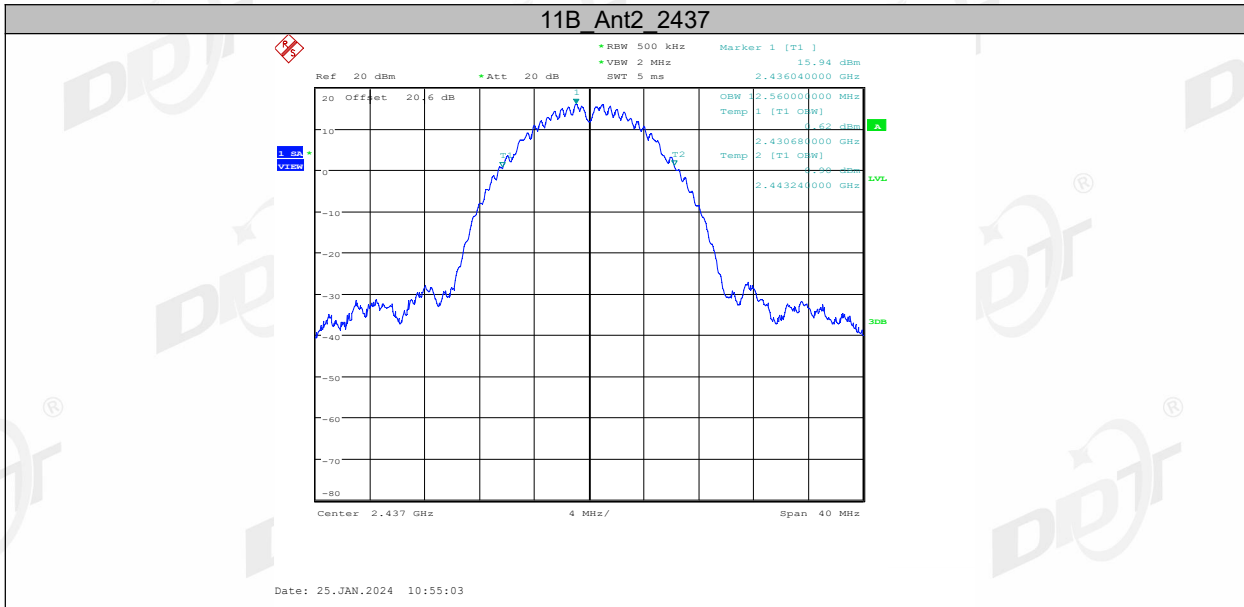


### 11G\_Ant1\_2412

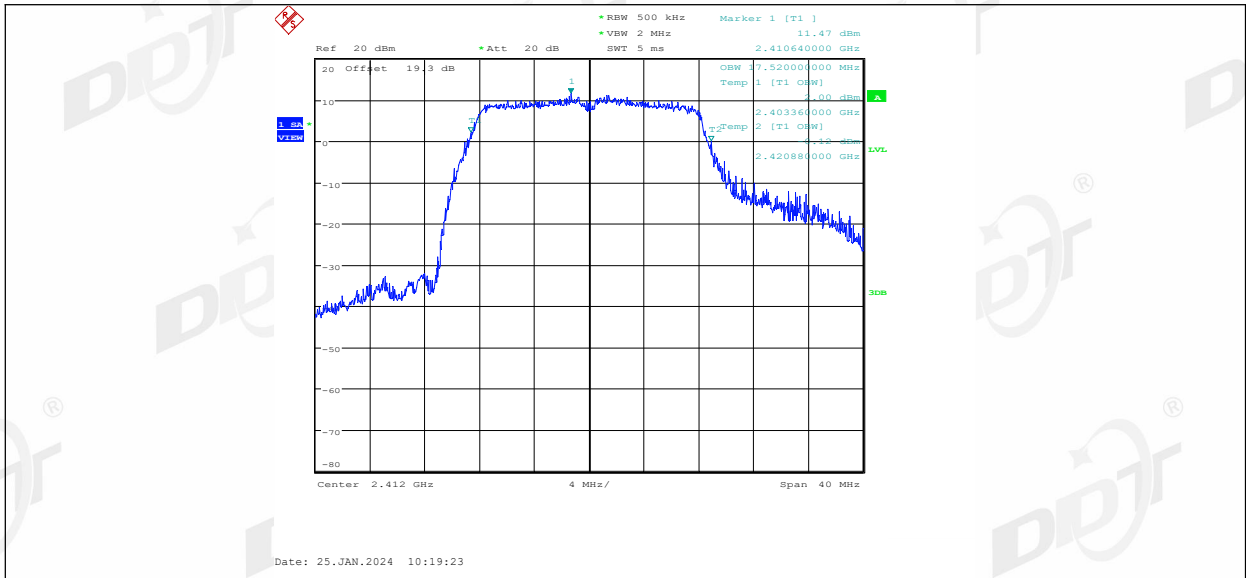


11G Ant2\_2412

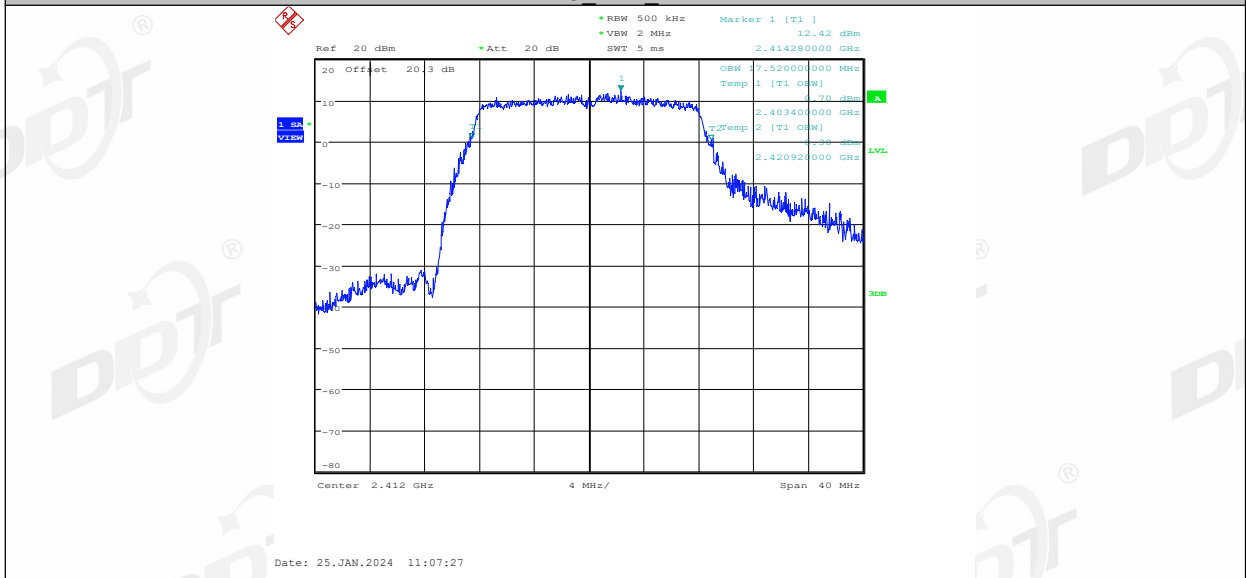


11G Ant1\_2437

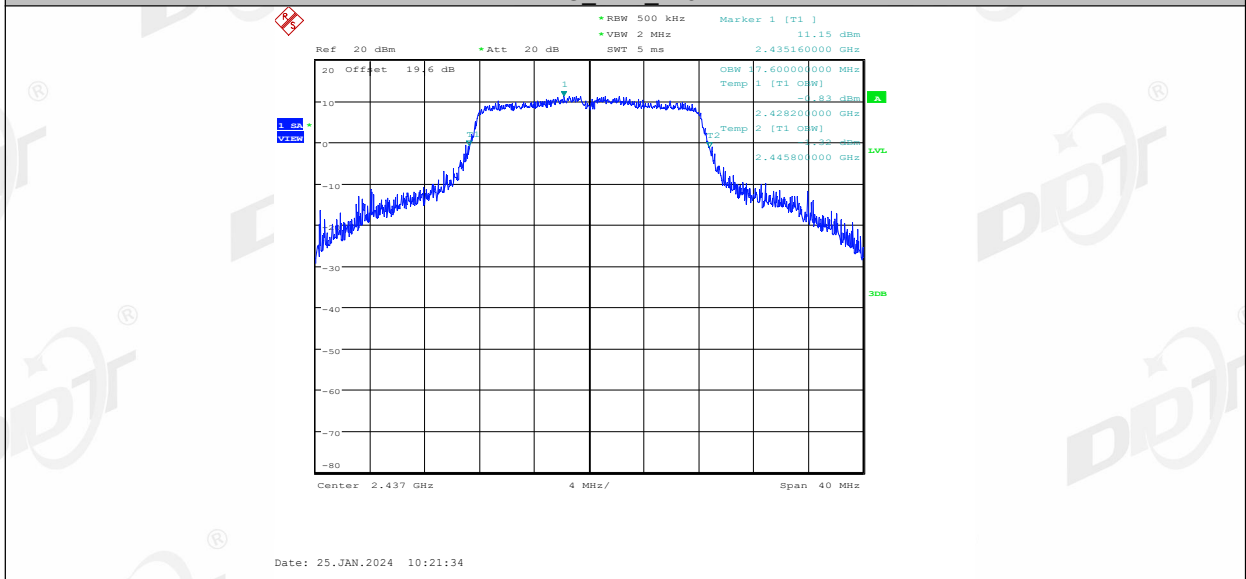


11G Ant2\_2437

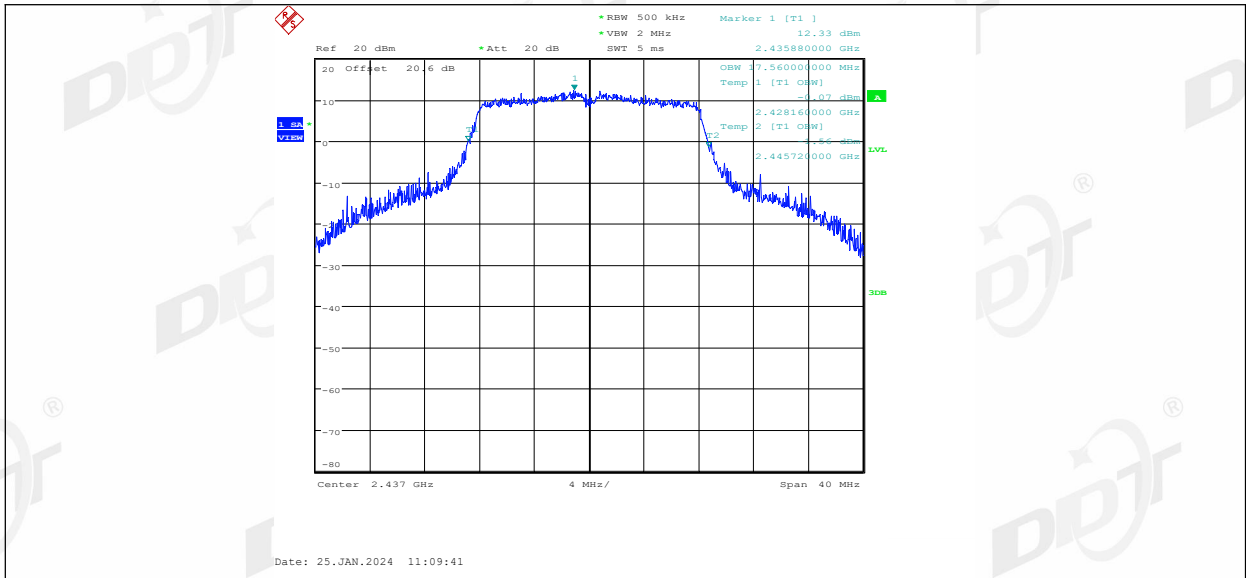

11G Ant1\_2462

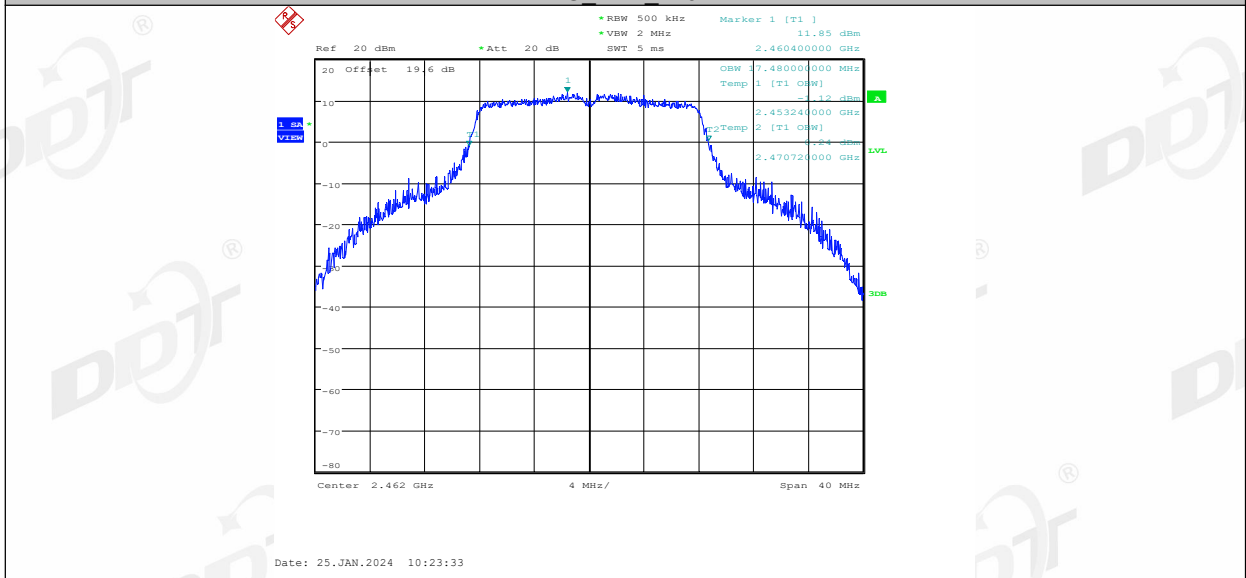


11G Ant2\_2462

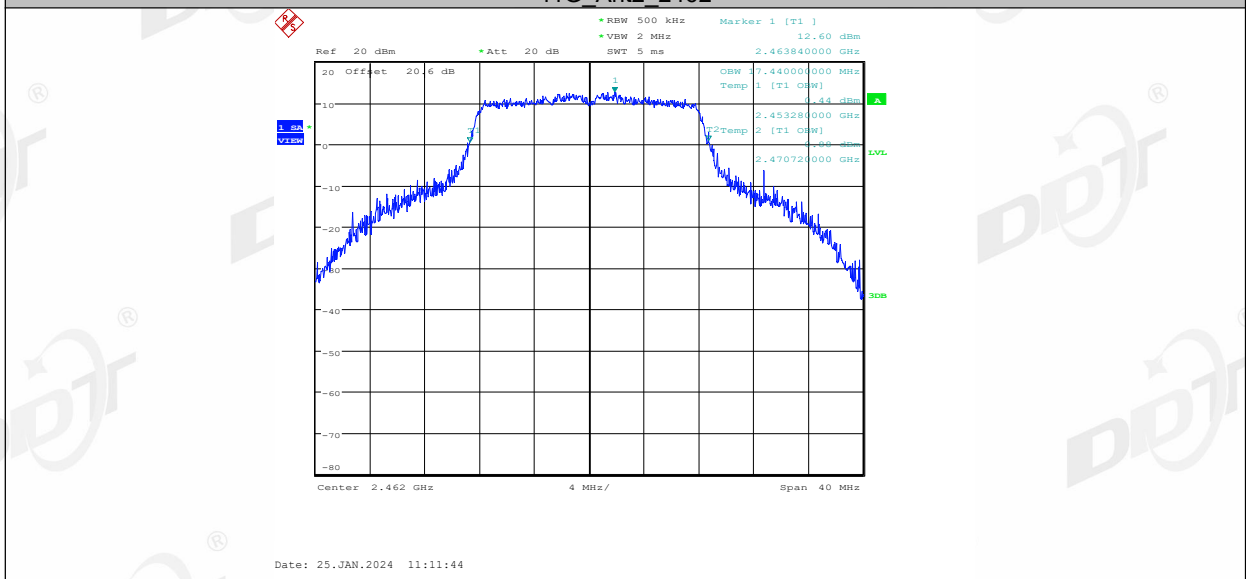


11N20MIMO\_Ant1\_2412




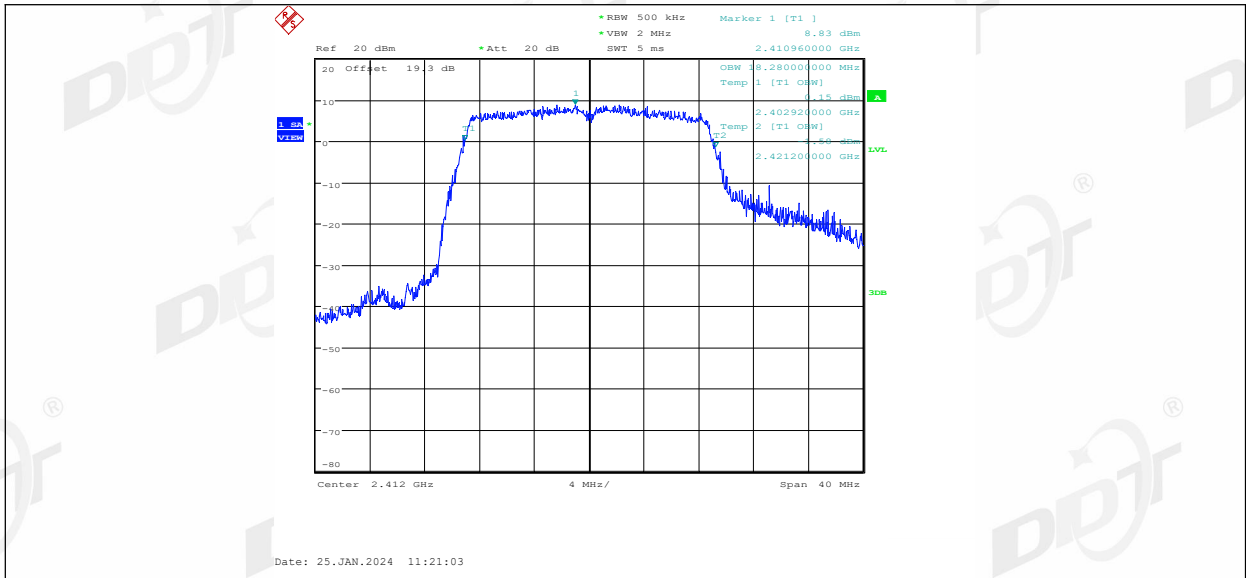


11N20MIMO\_Ant2\_2412

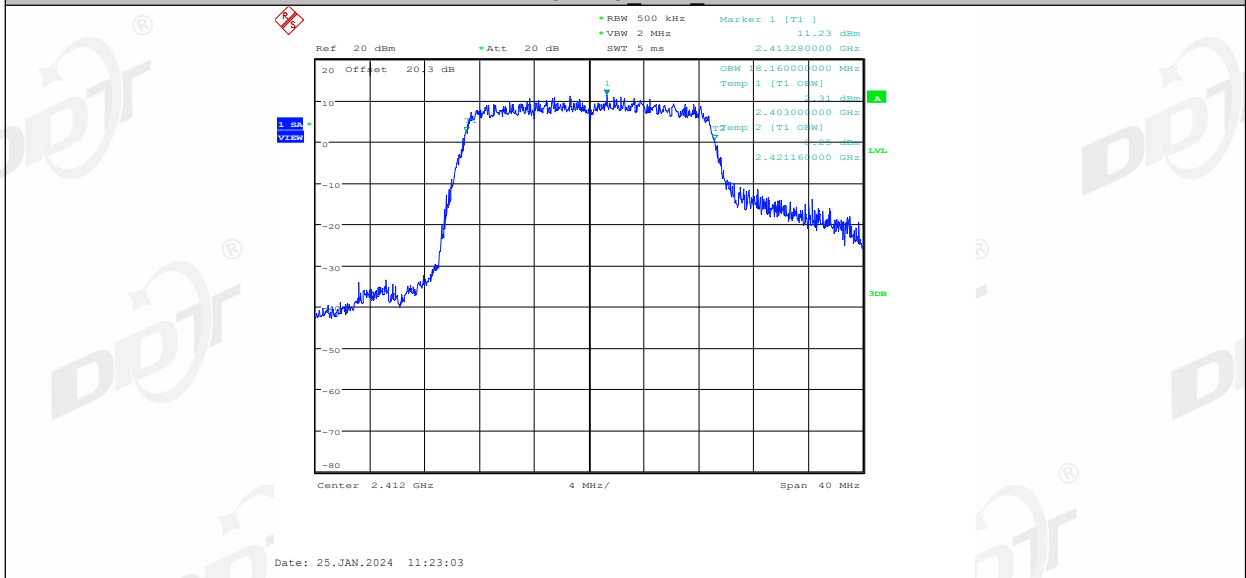


11N20MIMO\_Ant1\_2437

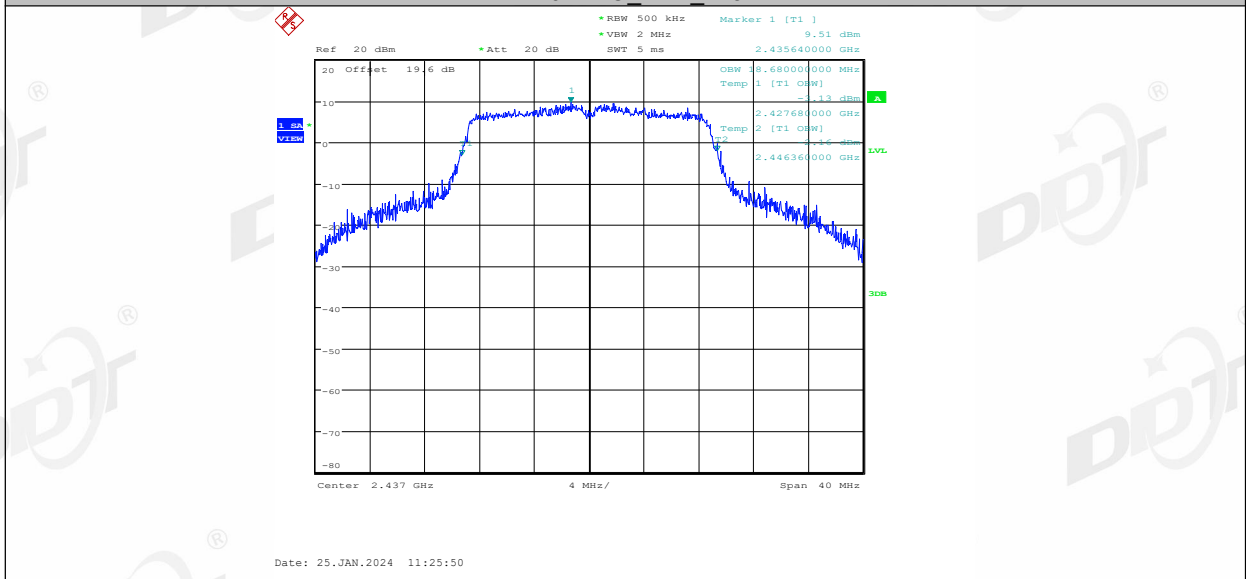


11N20MIMO\_Ant2\_2437

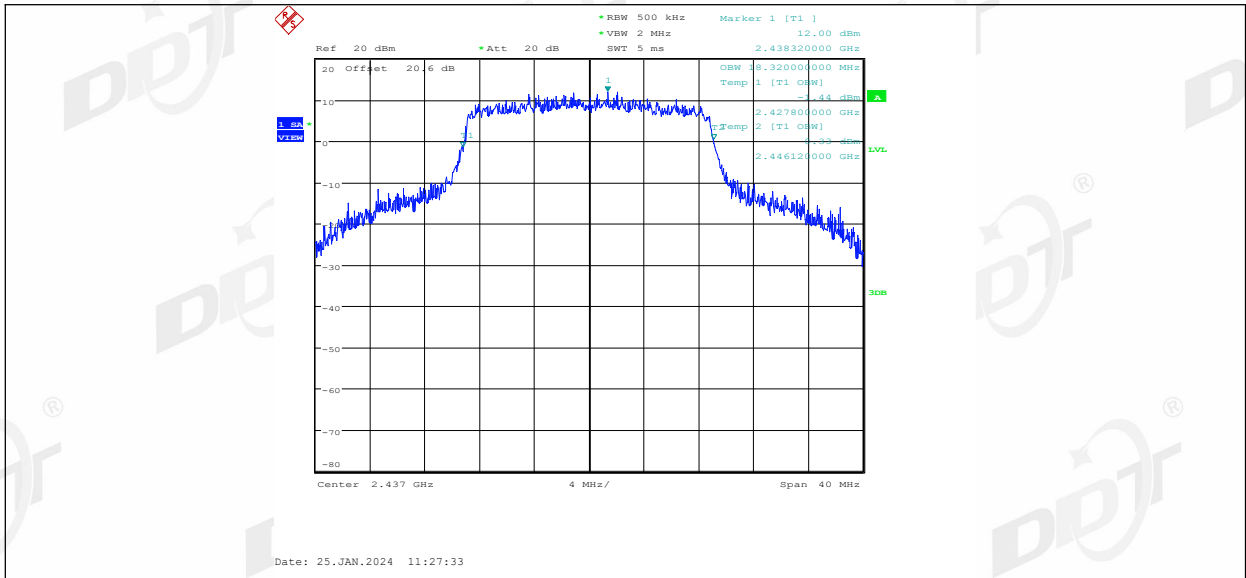


11N20MIMO Ant1\_2462

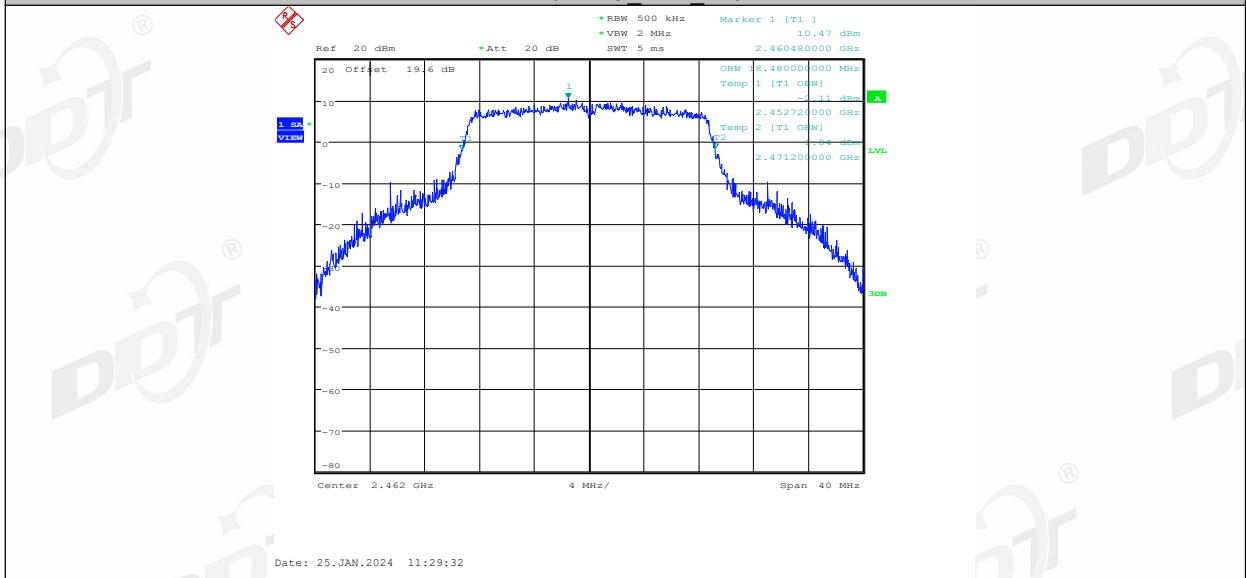


11N20MIMO Ant2\_2462

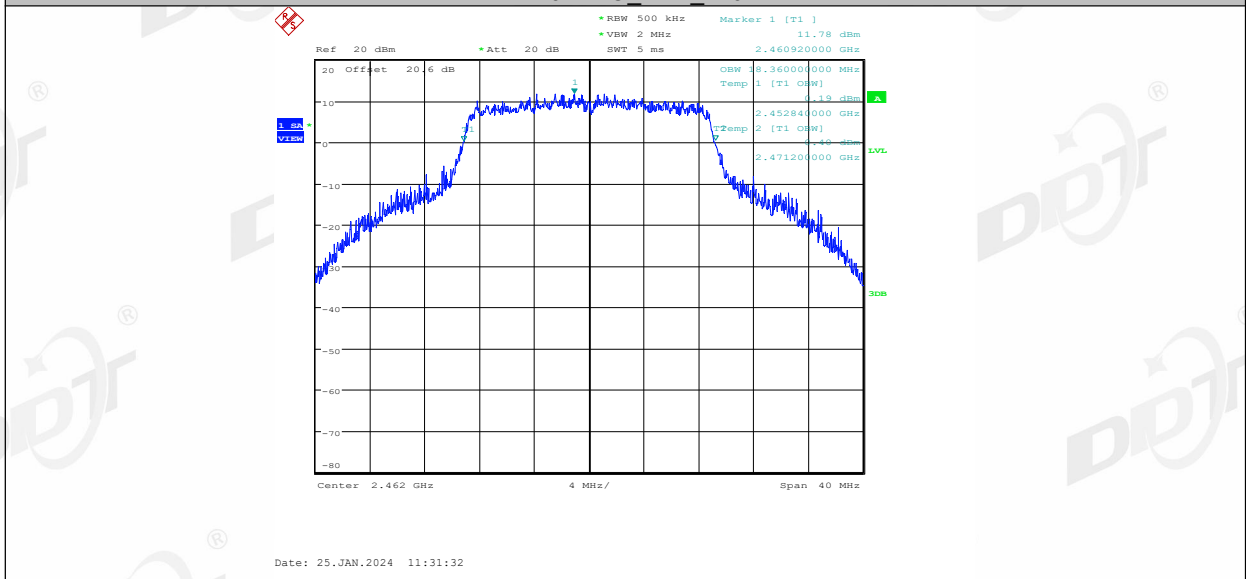


11N40MIMO Ant1\_2422

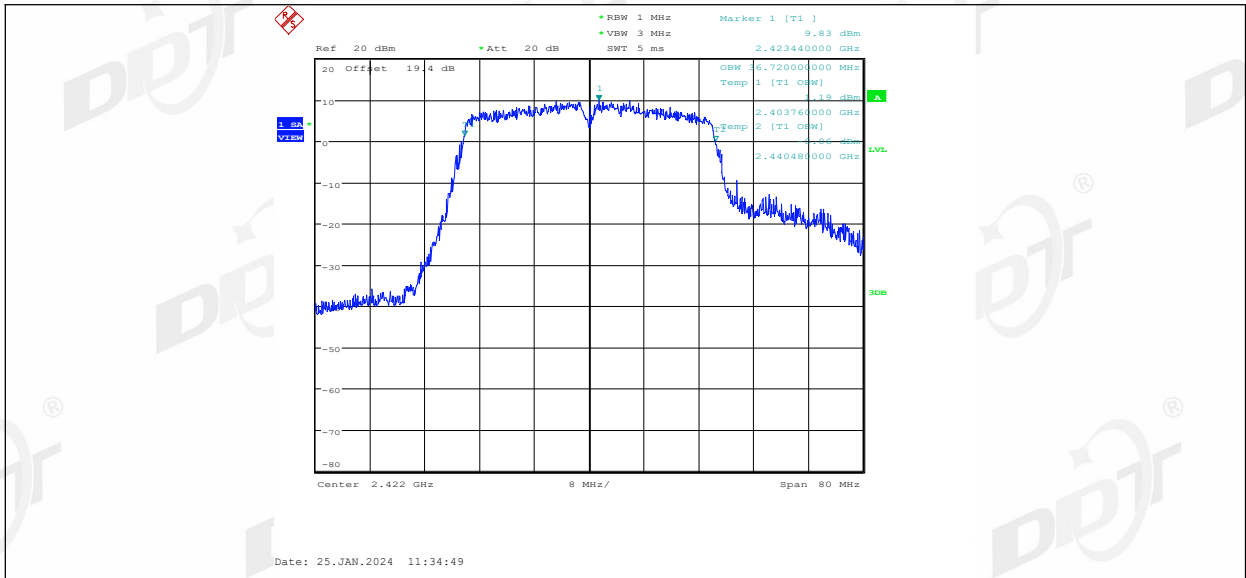


11N40MIMO\_Ant2\_2422

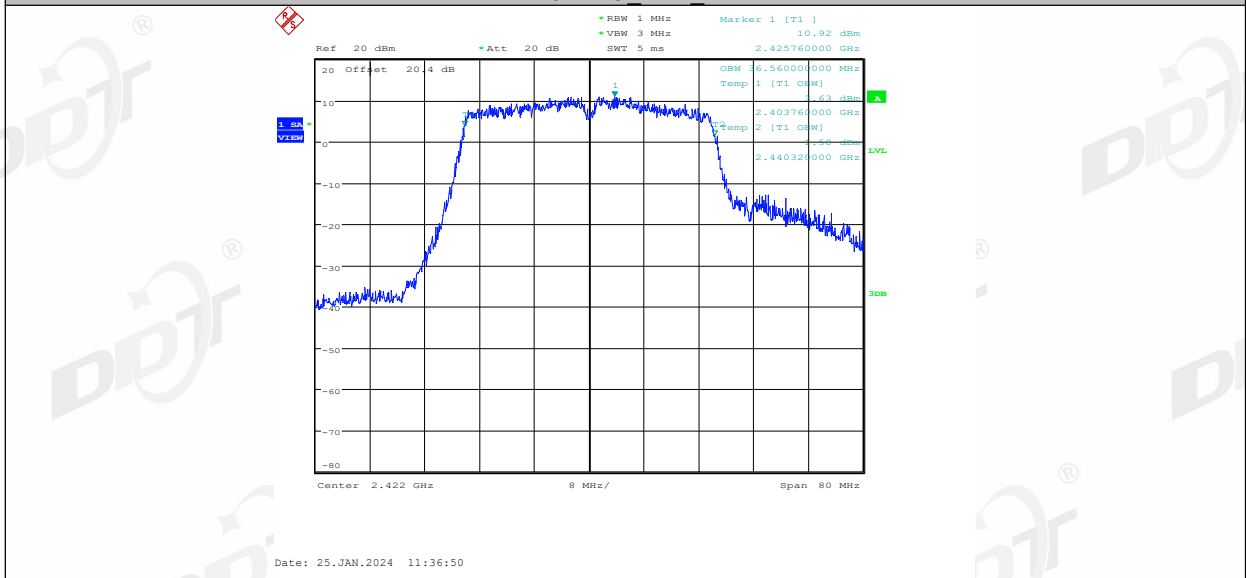


11N40MIMO\_Ant1\_2437

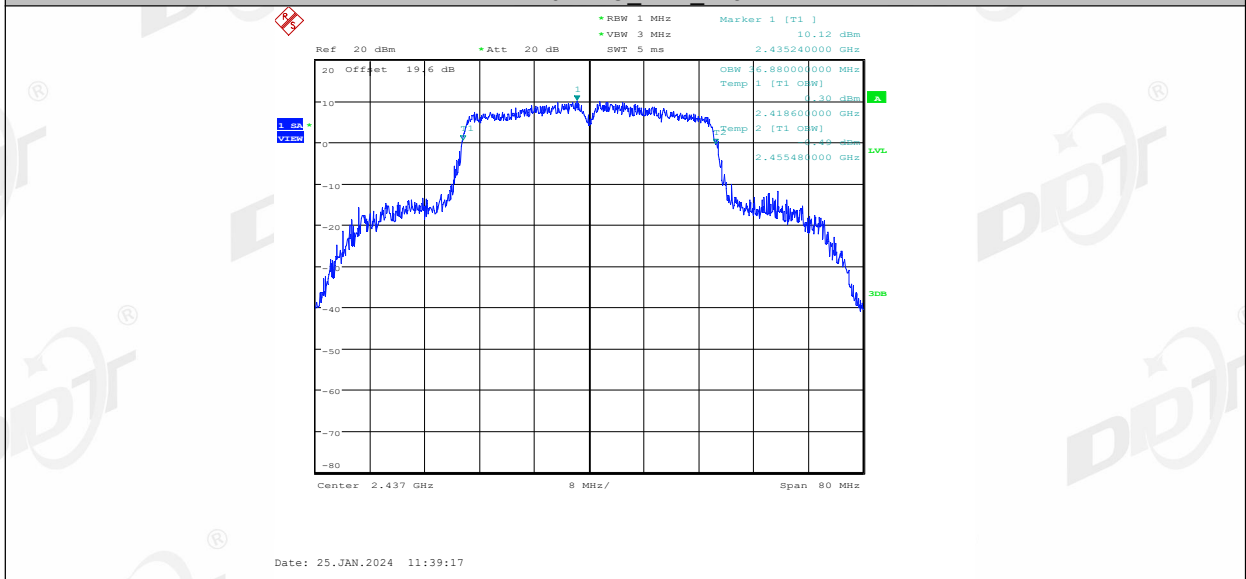


11N40MIMO\_Ant2\_2437

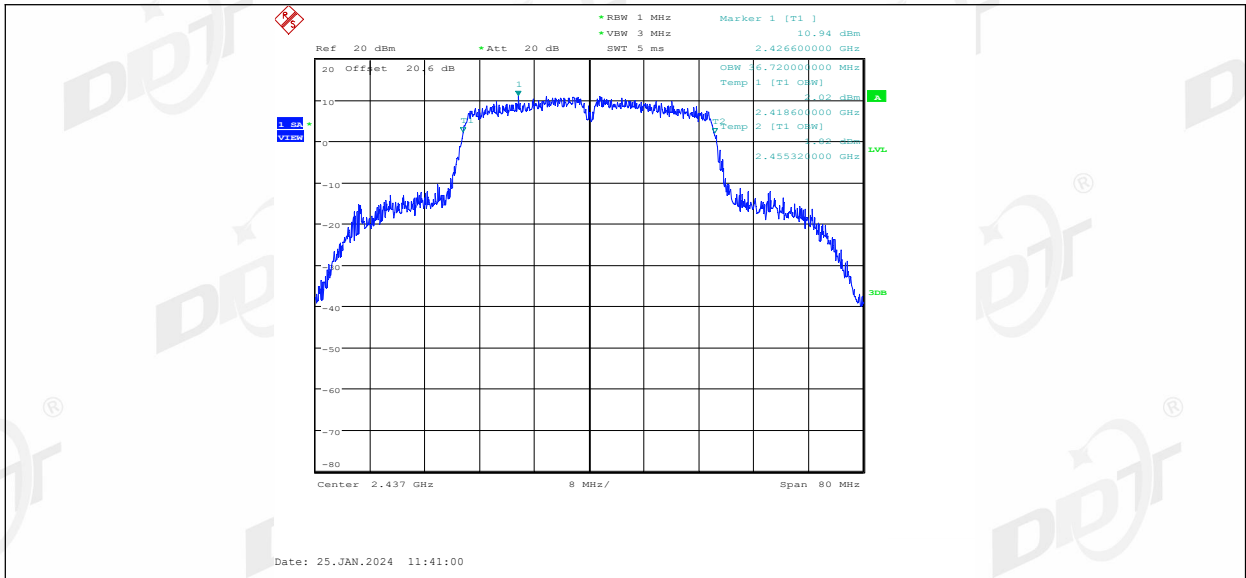


11N40MIMO\_Ant1\_2452

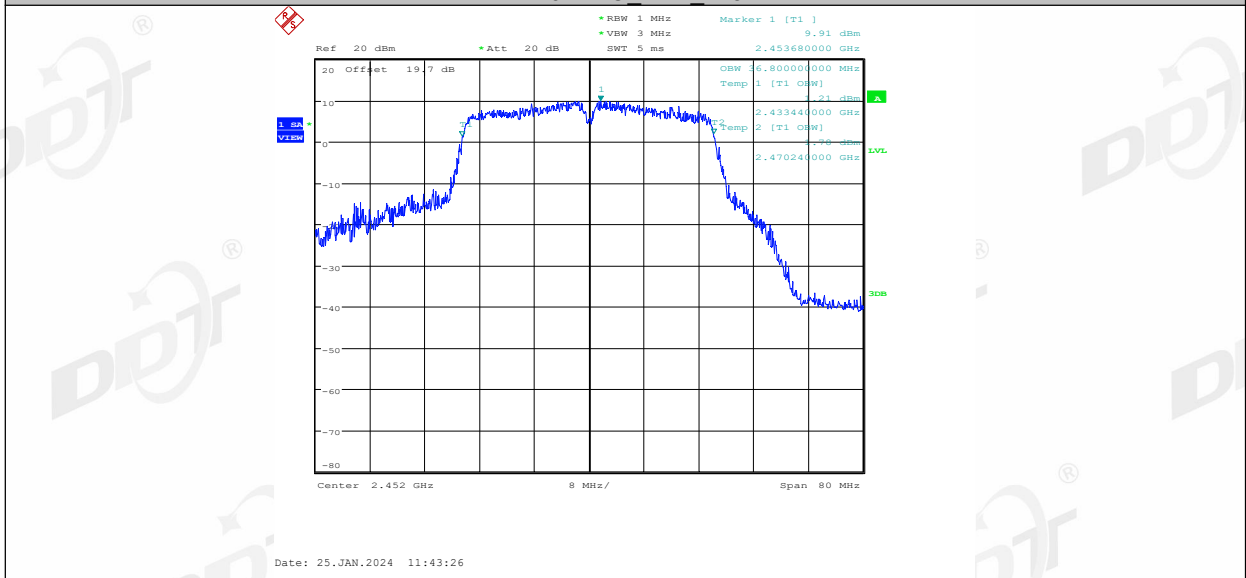


11N40MIMO\_Ant2\_2452

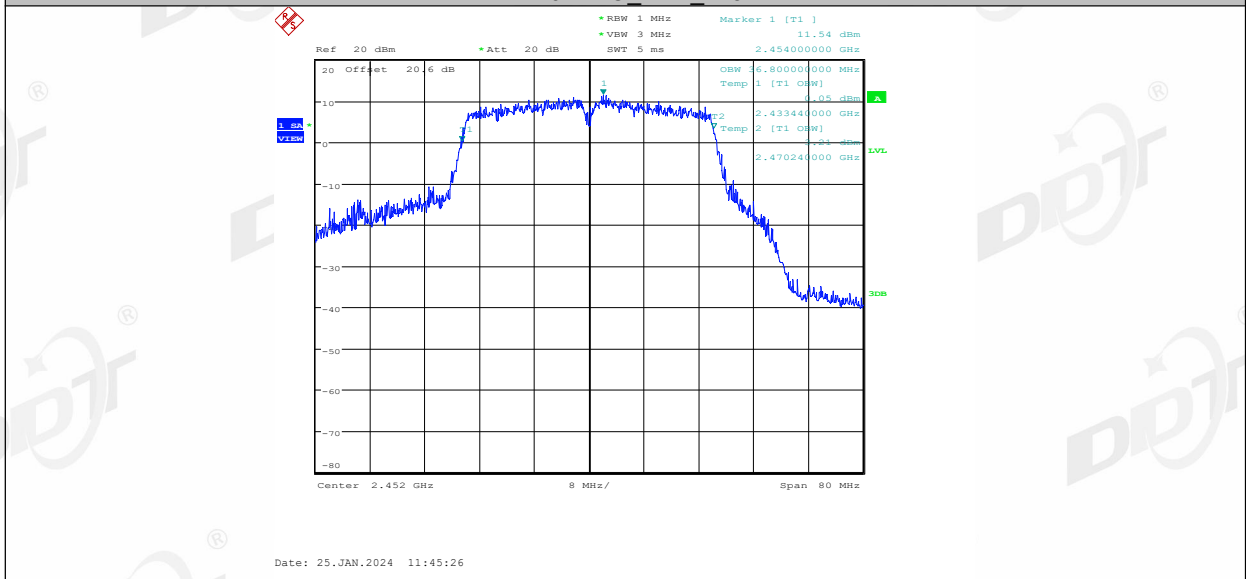


11AX20MIMO\_Ant1\_2412

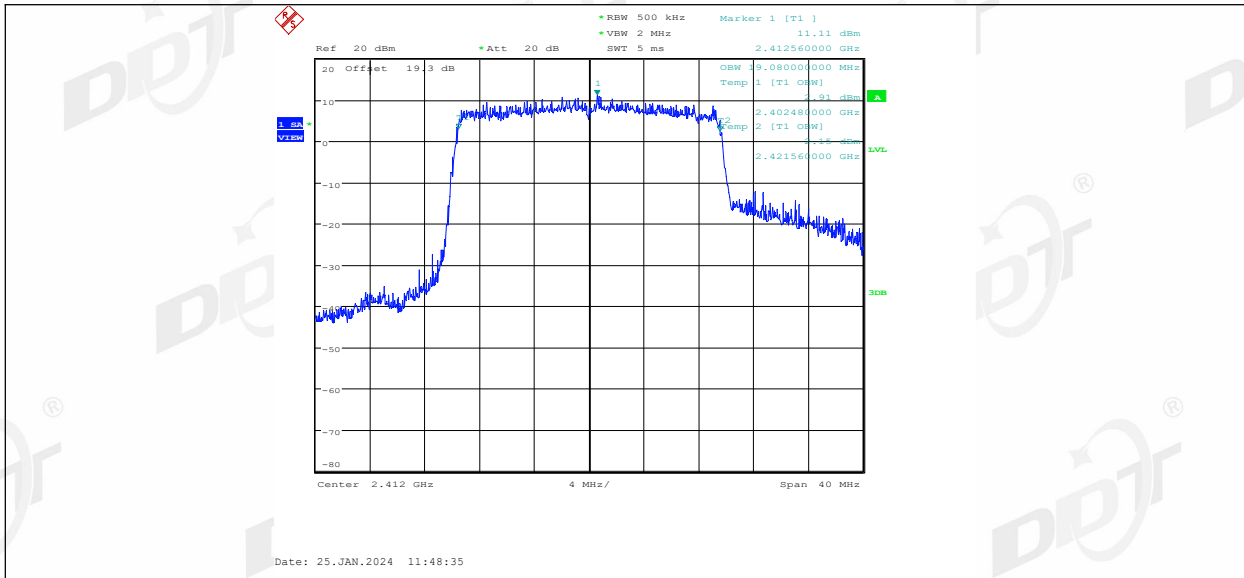


11AX20MIMO Ant2 2412

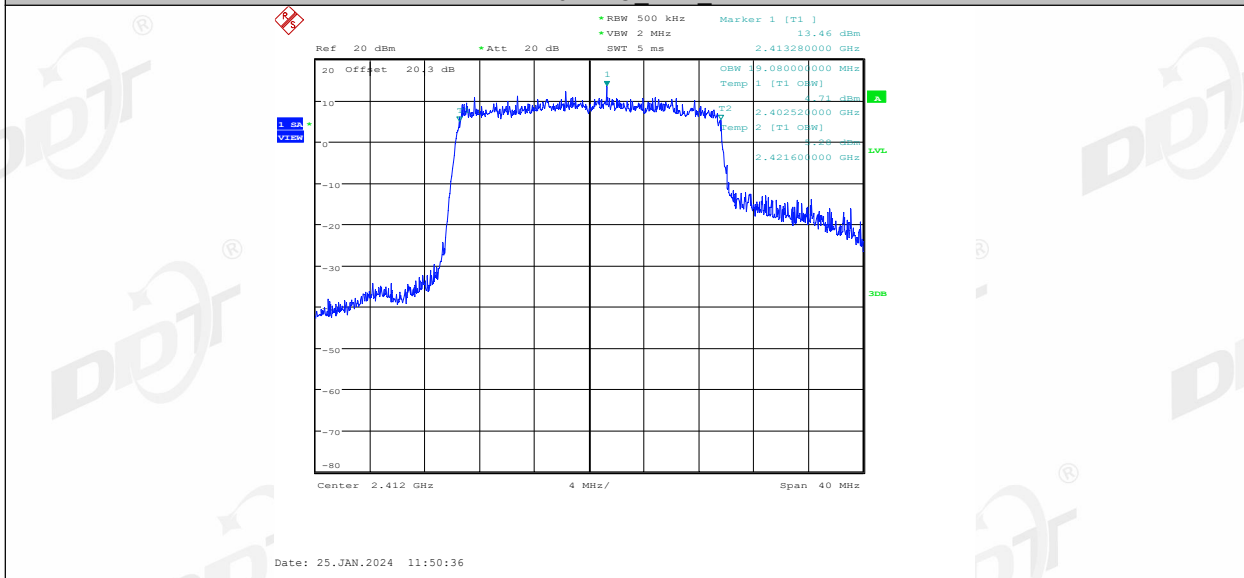


11AX20MIMO Ant1 2437

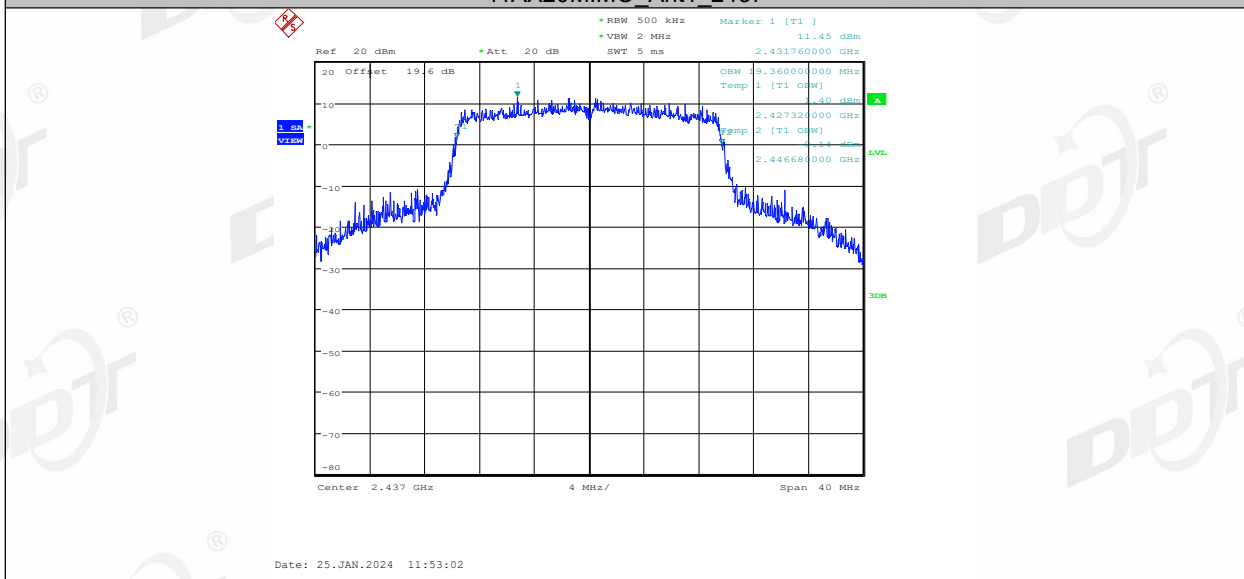


11AX20MIMO Ant2 2437

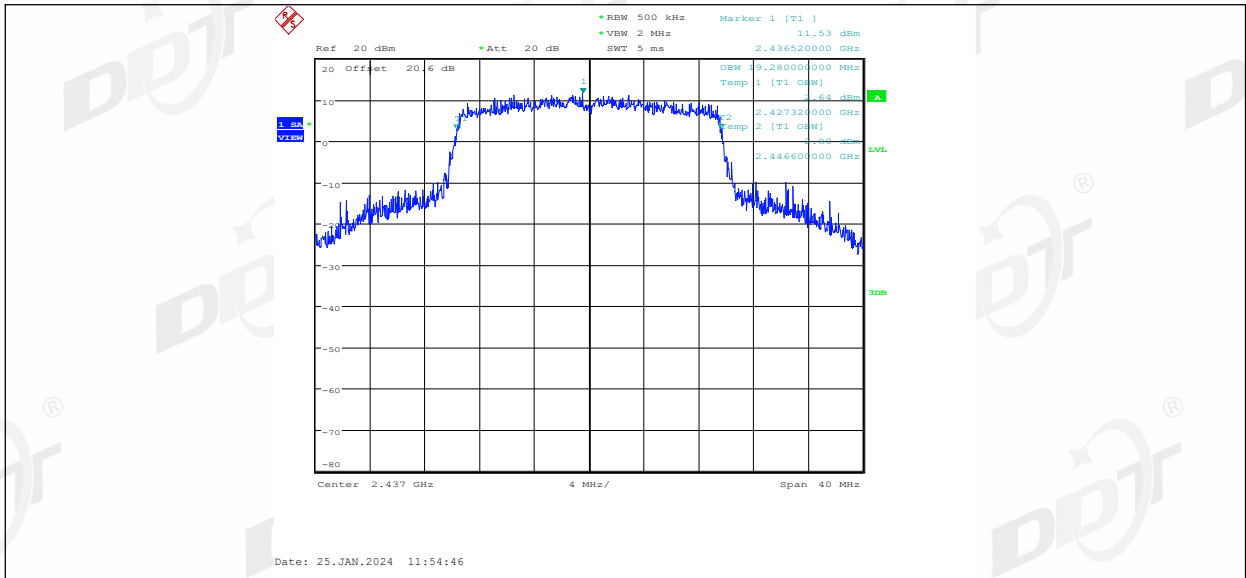


11AX20MIMO Ant1 2462

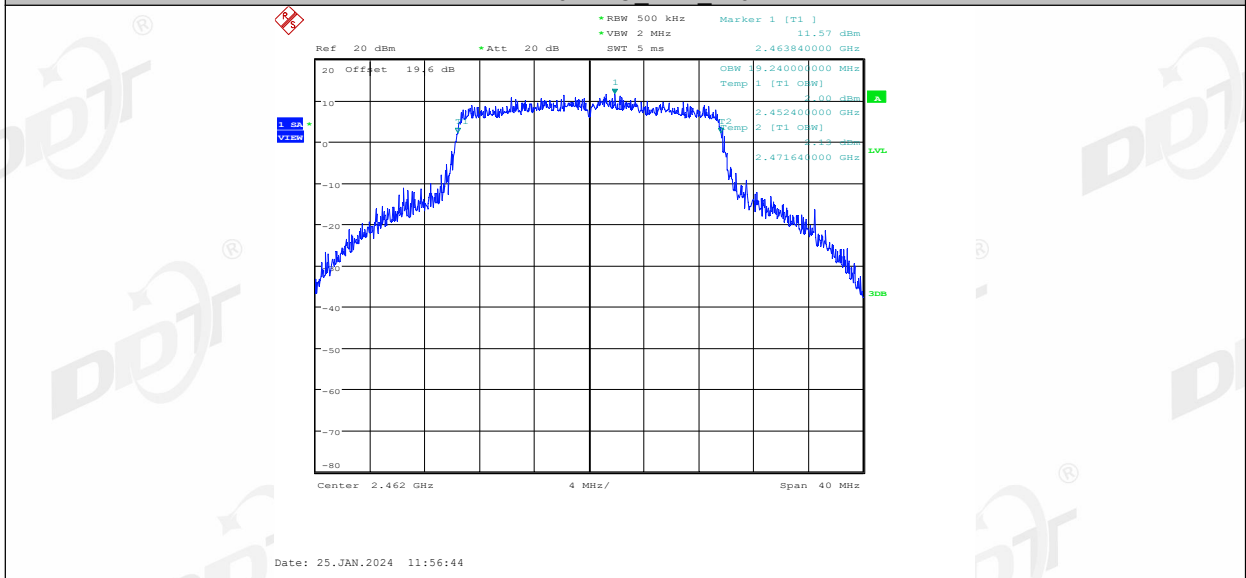


11AX20MIMO Ant2 2462

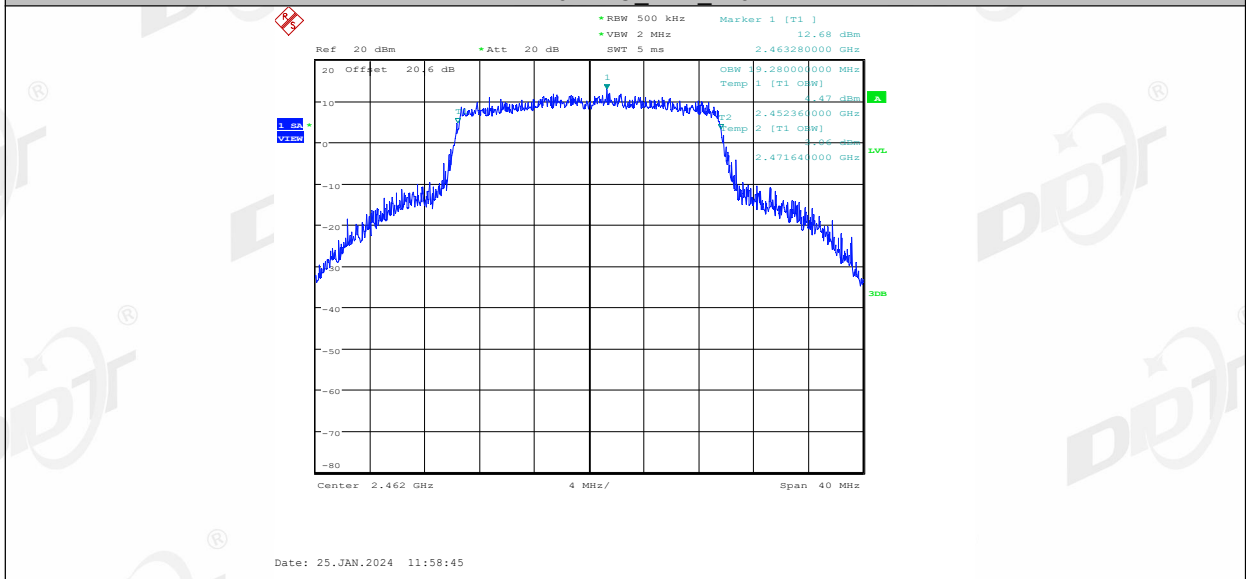


11AX40MIMO Ant1 2422

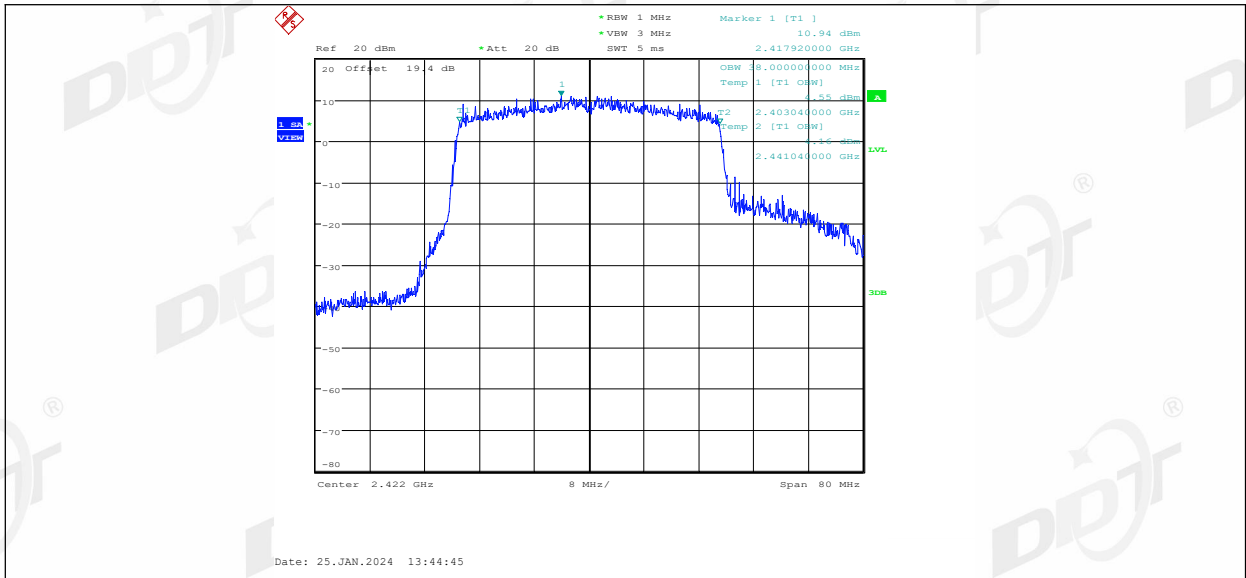


11AX40MIMO Ant2 2422

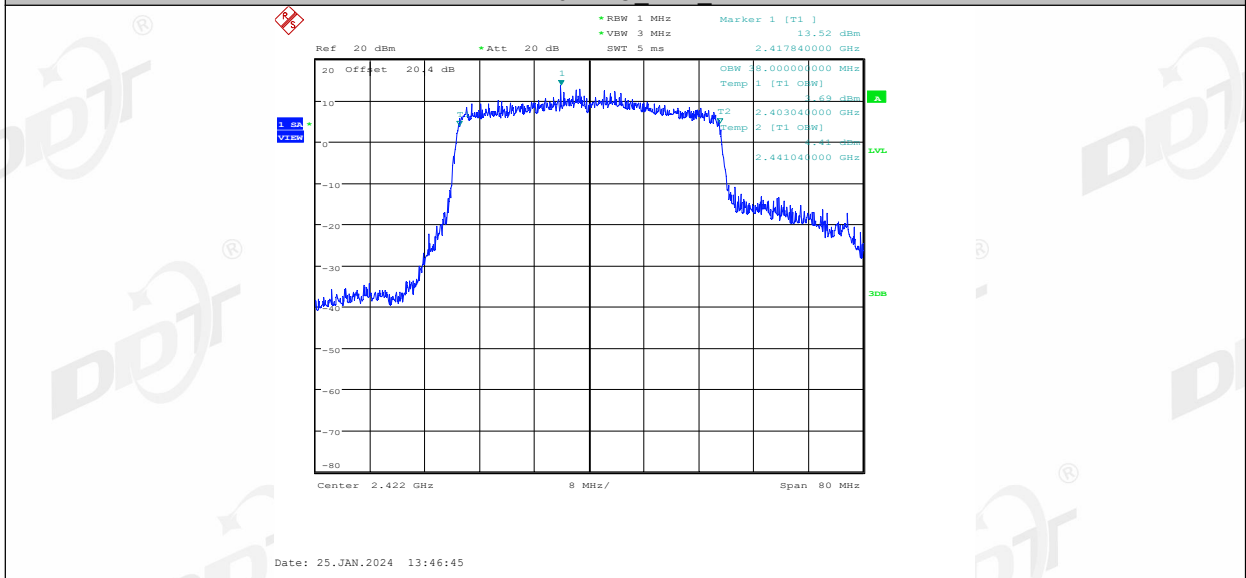


11AX40MIMO Ant1 2437

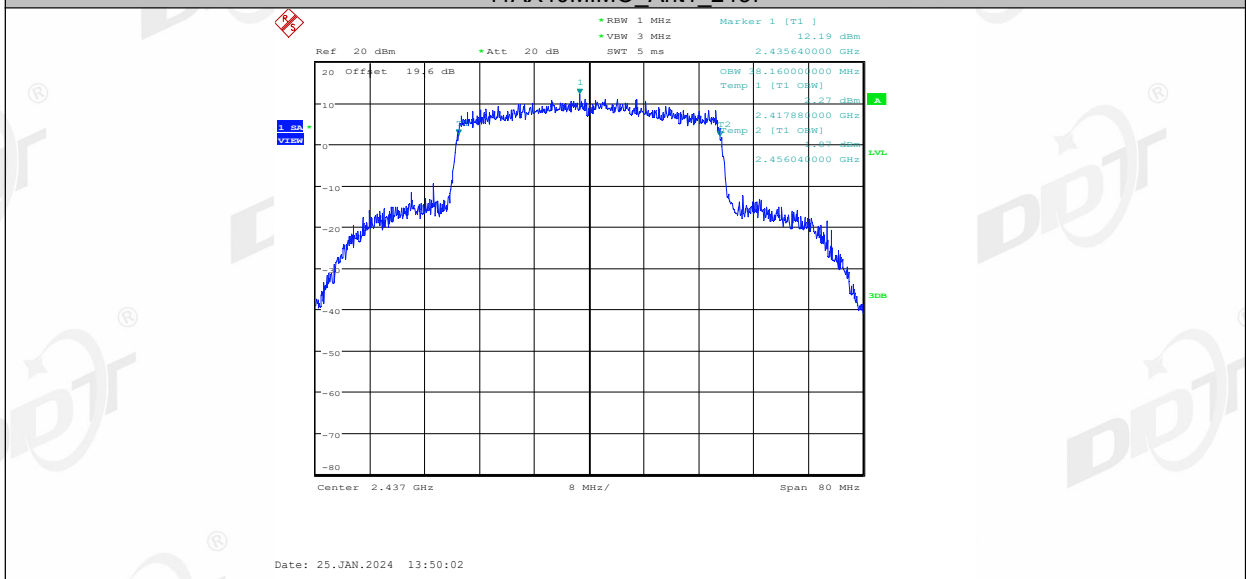


11AX40MIMO Ant2 2437

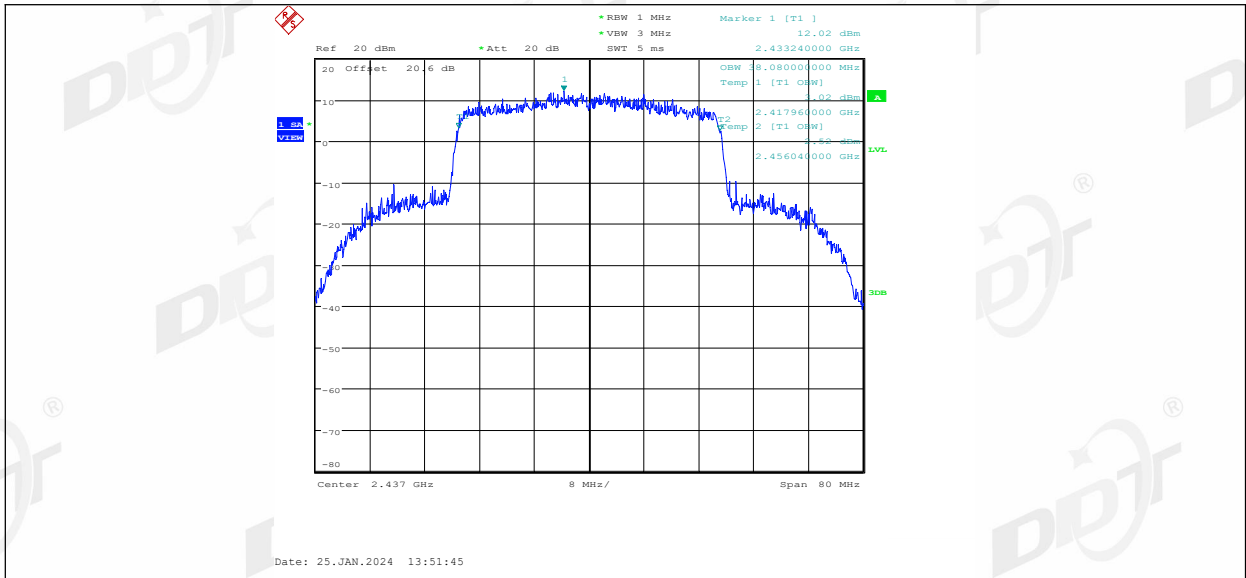

11AX40MIMO Ant1 2452

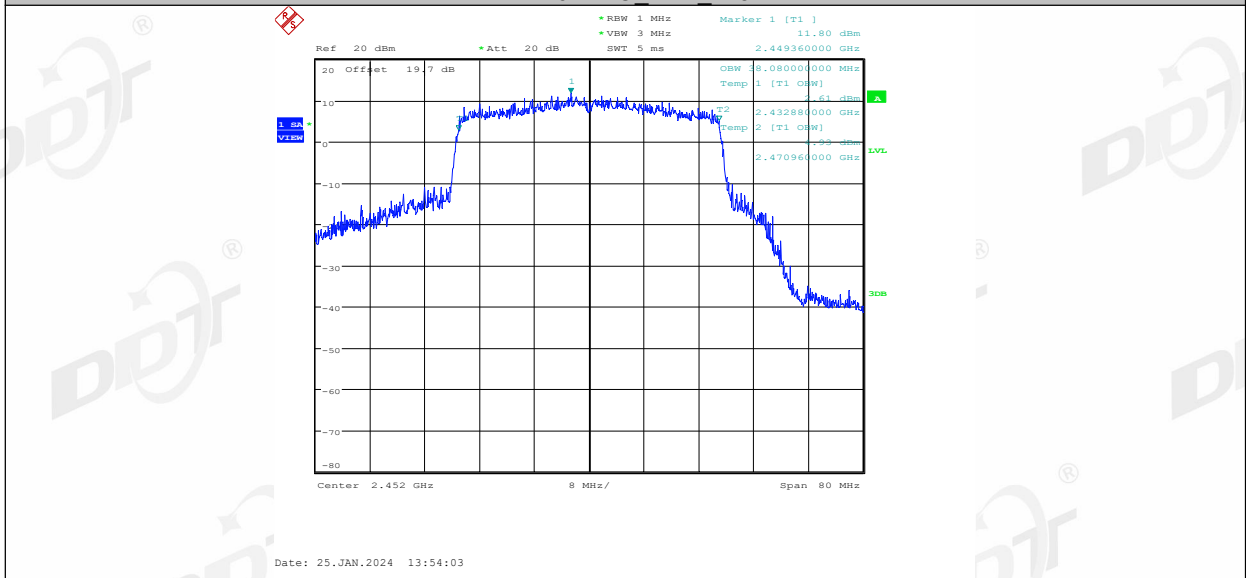


11AX40MIMO Ant2 2452

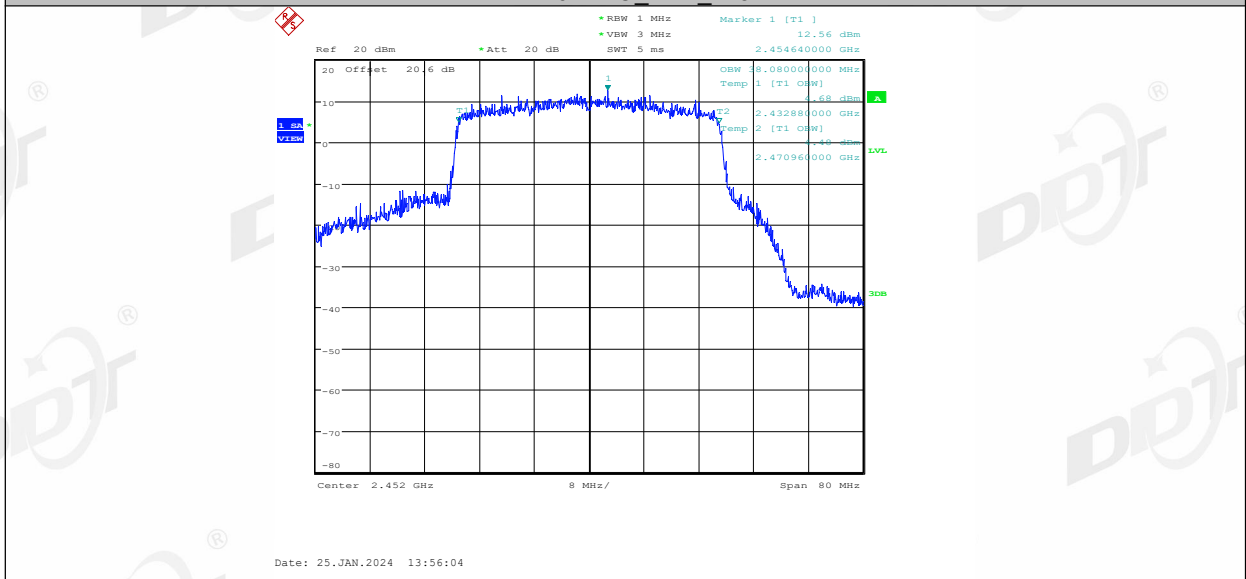



## 6. Conducted Output Power

### 6.1. Block diagram of test setup

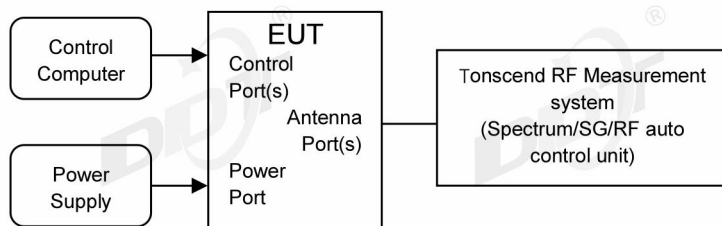

### 6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

#### 6.4. Test result average


Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.6℃,64%RH	Test Date:	2024.01.29-2024.02.02
Test Power Supply:	AC230V/50Hz	EUT:	Mercku M6s Nano Mesh Wi-Fi Router
Sample Number:	S23111605-01	Model No.:	MBAA0

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	21.99	99.41	0.03	22.02	≤30.00	27.31	≤36.00	PASS
	Ant2	2412	22.70	99.29	0.03	22.73	≤30.00	28.02	≤36.00	PASS
	Ant1	2437	22.19	99.29	0.03	22.22	≤30.00	27.51	≤36.00	PASS
	Ant2	2437	22.73	99.29	0.03	22.76	≤30.00	28.05	≤36.00	PASS
	Ant1	2462	22.63	99.29	0.03	22.66	≤30.00	27.95	≤36.00	PASS
	Ant2	2462	23.66	99.29	0.03	23.69	≤30.00	28.98	≤36.00	PASS
11G	Ant1	2412	17.42	95.92	0.18	17.60	≤30.00	22.89	≤36.00	PASS
	Ant2	2412	17.90	95.89	0.18	18.08	≤30.00	23.37	≤36.00	PASS
	Ant1	2437	17.48	95.89	0.18	17.66	≤30.00	22.95	≤36.00	PASS
	Ant2	2437	17.83	95.89	0.18	18.01	≤30.00	23.3	≤36.00	PASS
	Ant1	2462	18.00	95.89	0.18	18.18	≤30.00	23.47	≤36.00	PASS
	Ant2	2462	18.73	95.92	0.18	18.91	≤30.00	24.2	≤36.00	PASS
11N20 MIMO	Ant1	2412	15.24	91.89	0.37	15.61	≤30.00	20.9	≤36.00	PASS
	Ant2	2412	15.85	91.89	0.37	16.22	≤30.00	21.51	≤36.00	PASS
	total	2412	---	---	---	18.94	≤30.00	24.23	≤36.00	PASS
	Ant1	2437	15.32	91.89	0.37	15.69	≤30.00	20.98	≤36.00	PASS
	Ant2	2437	15.76	91.89	0.37	16.13	≤30.00	21.42	≤36.00	PASS
	total	2437	---	---	---	18.93	≤30.00	24.22	≤36.00	PASS
	Ant1	2462	15.89	91.89	0.37	16.26	≤30.00	21.55	≤36.00	PASS
	Ant2	2462	16.61	91.89	0.37	16.98	≤30.00	22.27	≤36.00	PASS
	total	2462	---	---	---	19.65	≤30.00	24.94	≤36.00	PASS
11N40 MIMO	Ant1	2422	14.67	85.37	0.69	15.36	≤30.00	20.65	≤36.00	PASS
	Ant2	2422	15.20	85.37	0.69	15.89	≤30.00	21.18	≤36.00	PASS
	total	2422	---	---	---	18.64	≤30.00	23.93	≤36.00	PASS
	Ant1	2437	14.70	85.37	0.69	15.39	≤30.00	20.68	≤36.00	PASS
	Ant2	2437	15.16	85.37	0.69	15.85	≤30.00	21.14	≤36.00	PASS
	total	2437	---	---	---	18.64	≤30.00	23.93	≤36.00	PASS
	Ant1	2452	14.74	85.37	0.69	15.43	≤30.00	20.72	≤36.00	PASS
	Ant2	2452	15.31	85.37	0.69	16.00	≤30.00	21.29	≤36.00	PASS
	total	2452	---	---	---	18.73	≤30.00	24.02	≤36.00	PASS
11AX20 MIMO	Ant1	2412	14.79	77.78	1.09	15.88	≤30.00	21.17	≤36.00	PASS
	Ant2	2412	15.37	77.78	1.09	16.46	≤30.00	21.75	≤36.00	PASS
	total	2412	---	---	---	19.19	≤30.00	24.48	≤36.00	PASS
	Ant1	2437	14.82	76.92	1.14	15.96	≤30.00	21.25	≤36.00	PASS
	Ant2	2437	15.32	77.78	1.09	16.41	≤30.00	21.7	≤36.00	PASS
	total	2437	---	---	---	19.20	≤30.00	24.49	≤36.00	PASS
	Ant1	2462	15.27	76.92	1.14	16.41	≤30.00	21.7	≤36.00	PASS
	Ant2	2462	16.10	77.78	1.09	17.19	≤30.00	22.48	≤36.00	PASS
	total	2462	---	---	---	19.83	≤30.00	25.12	≤36.00	PASS
11AX40 MIMO	Ant1	2422	14.80	84.21	0.75	15.55	≤30.00	20.84	≤36.00	PASS
	Ant2	2422	15.43	84.21	0.75	16.18	≤30.00	21.47	≤36.00	PASS
	total	2422	---	---	---	18.89	≤30.00	24.18	≤36.00	PASS
	Ant1	2437	14.85	84.21	0.75	15.60	≤30.00	20.89	≤36.00	PASS
	Ant2	2437	15.38	84.21	0.75	16.13	≤30.00	21.42	≤36.00	PASS
	total	2437	---	---	---	18.88	≤30.00	24.17	≤36.00	PASS
	Ant1	2452	14.87	84.21	0.75	15.62	≤30.00	20.91	≤36.00	PASS
	Ant2	2452	15.49	84.21	0.75	16.24	≤30.00	21.53	≤36.00	PASS
	total	2452	---	---	---	18.95	≤30.00	24.24	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

## 7. Power Spectral Density

### 7.1. Block diagram of test setup

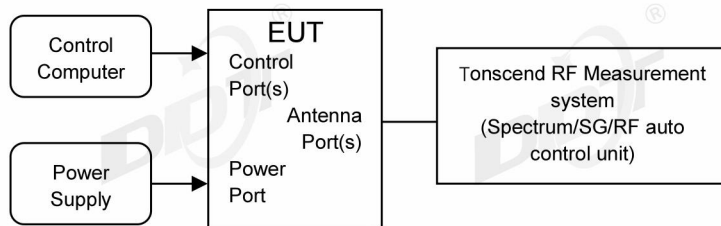

### 7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

- (5) Add  $[10 \log (1 / D)]$ , where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




## 7.4. Test result




Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.6°C,64%RH	Test Date:	2024.01.29-2024.02.02
Test Power Supply:	AC230V/50Hz	EUT:	Mercku M6s Nano Mesh Wi-Fi Router
Sample Number:	S23111605-01	Model No.:	MBAA0

Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-0.96	≤8.00	PASS
	Ant2	2412	-2.68	≤8.00	PASS
	Ant1	2437	-0.66	≤8.00	PASS
	Ant2	2437	-1.30	≤8.00	PASS
	Ant1	2462	-1.36	≤8.00	PASS
	Ant2	2462	-0.60	≤8.00	PASS
11G	Ant1	2412	-9.31	≤8.00	PASS
	Ant2	2412	-7.03	≤8.00	PASS
	Ant1	2437	-8.00	≤8.00	PASS
	Ant2	2437	-7.22	≤8.00	PASS
	Ant1	2462	-7.19	≤8.00	PASS
	Ant2	2462	-6.81	≤8.00	PASS
11N20MIMO	Ant1	2412	-10.92	≤8.00	PASS
	Ant2	2412	-9.12	≤8.00	PASS
	total	2412	-6.92	≤8.00	PASS
	Ant1	2437	-10.65	≤8.00	PASS
	Ant2	2437	-10.00	≤8.00	PASS
	total	2437	-7.30	≤8.00	PASS
	Ant1	2462	-10.67	≤8.00	PASS
	Ant2	2462	-8.60	≤8.00	PASS
total	2462	-6.50	≤8.00	PASS	
11N40MIMO	Ant1	2422	-21.06	≤8.00	PASS
	Ant2	2422	-20.15	≤8.00	PASS
	total	2422	-17.57	≤8.00	PASS
	Ant1	2437	-20.19	≤8.00	PASS
	Ant2	2437	-20.08	≤8.00	PASS
	total	2437	-17.12	≤8.00	PASS
	Ant1	2452	-20.55	≤8.00	PASS
	Ant2	2452	-19.88	≤8.00	PASS
total	2452	-17.19	≤8.00	PASS	
11AX20MIMO	Ant1	2412	-11.74	≤8.00	PASS
	Ant2	2412	-10.89	≤8.00	PASS
	total	2412	-8.28	≤8.00	PASS
	Ant1	2437	-11.27	≤8.00	PASS
	Ant2	2437	-9.26	≤8.00	PASS
	total	2437	-7.14	≤8.00	PASS
	Ant1	2462	-10.79	≤8.00	PASS
	Ant2	2462	-8.34	≤8.00	PASS
total	2462	-6.38	≤8.00	PASS	
11AX40MIMO	Ant1	2422	-21.38	≤8.00	PASS
	Ant2	2422	-20.43	≤8.00	PASS
	total	2422	-17.87	≤8.00	PASS
	Ant1	2437	-20.99	≤8.00	PASS
	Ant2	2437	-20.08	≤8.00	PASS
	total	2437	-17.50	≤8.00	PASS
	Ant1	2452	-21.10	≤8.00	PASS
	Ant2	2452	-20.17	≤8.00	PASS
total	2452	-17.60	≤8.00	PASS	


Note: The Duty Cycle Factor is compensated in the graph.

### 7.5. Test graphs

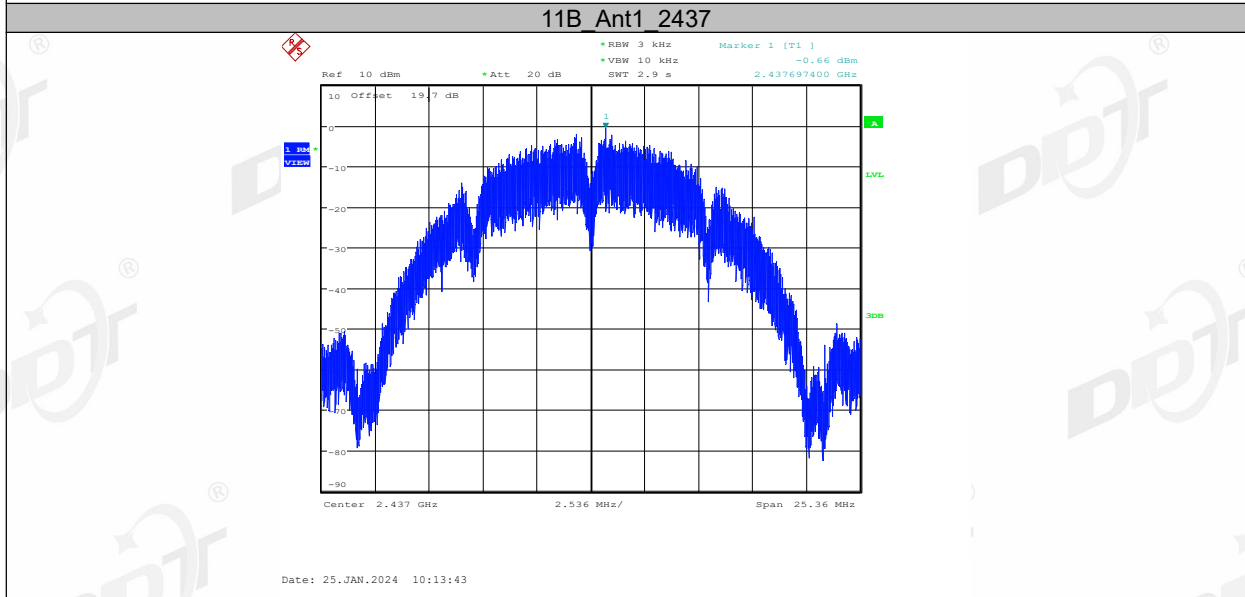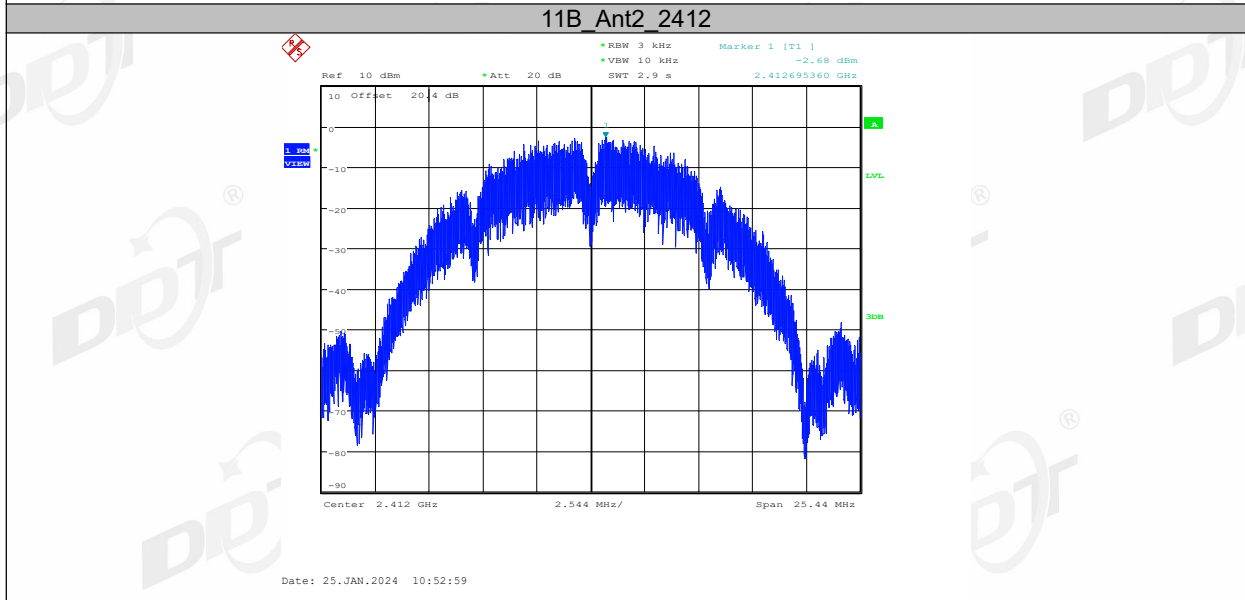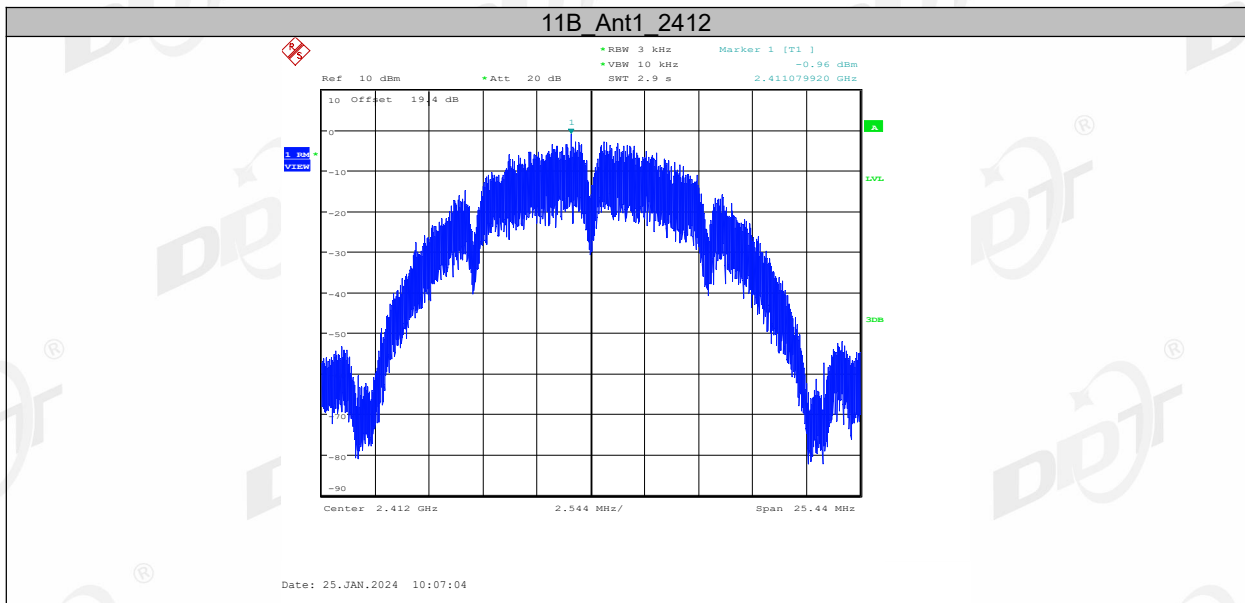


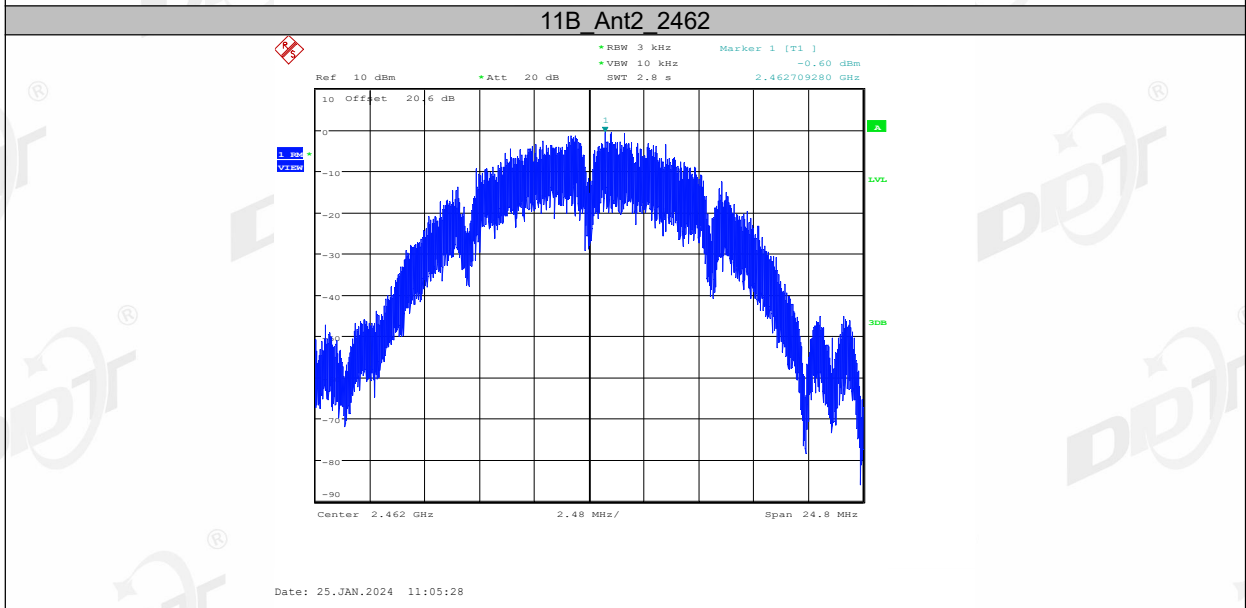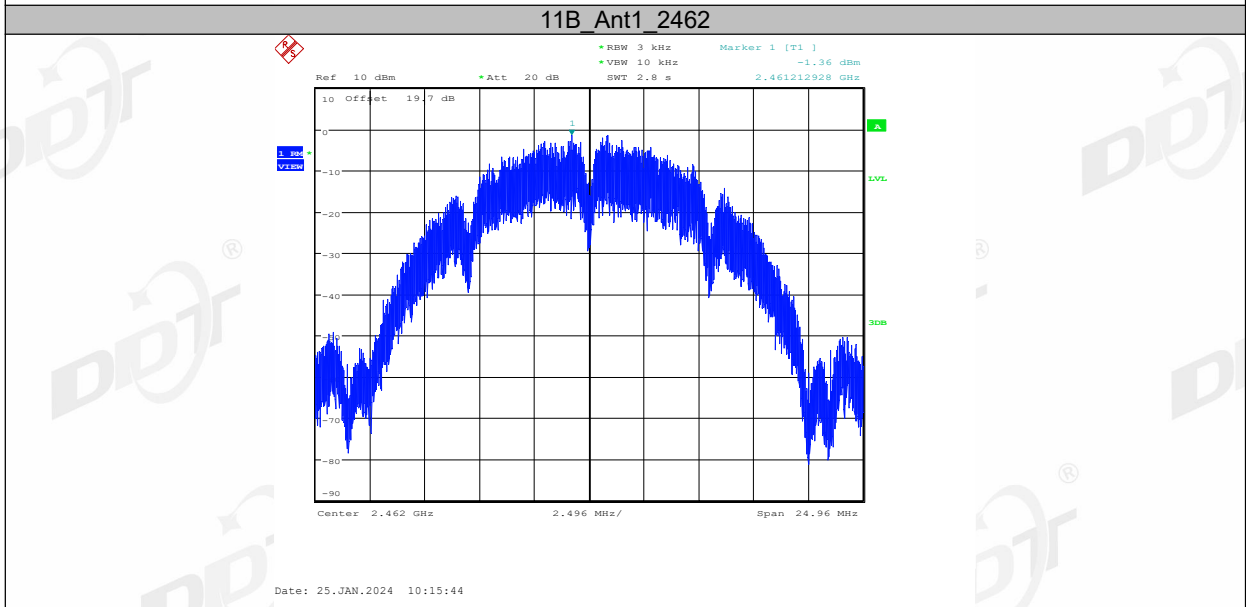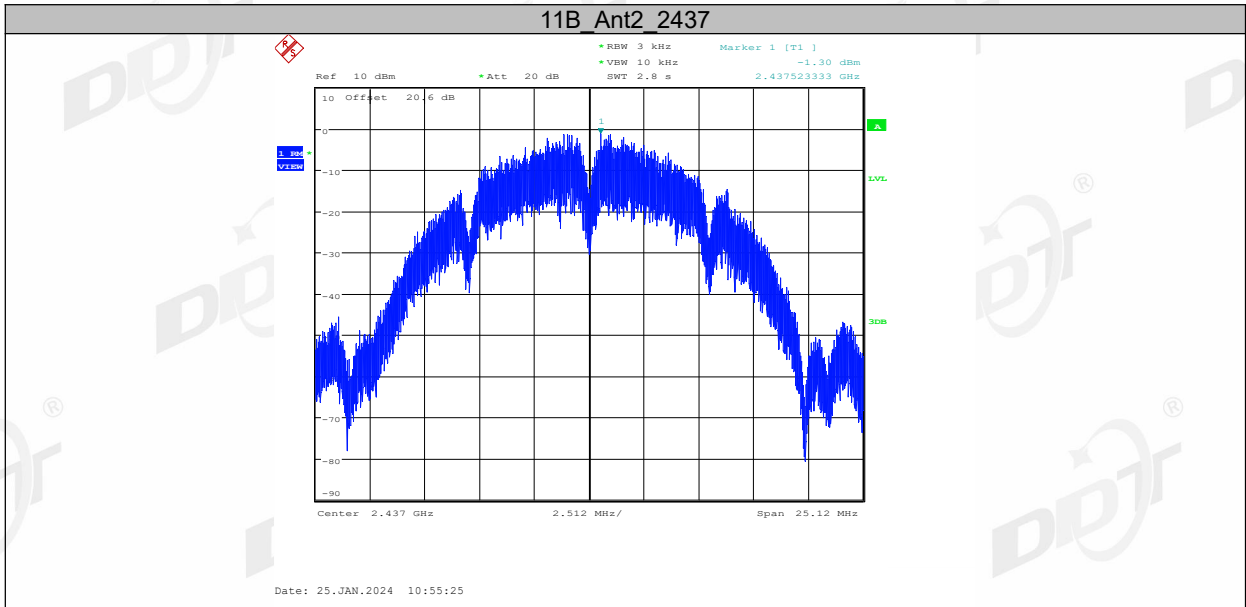


### 11G\_Ant1\_2412

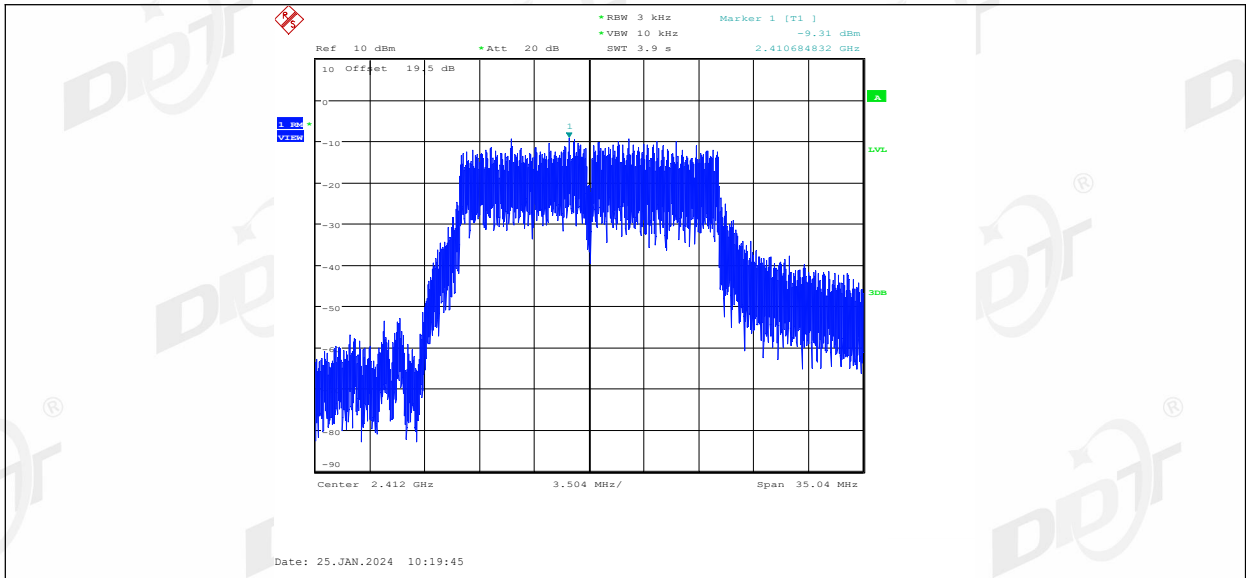


11G Ant2\_2412

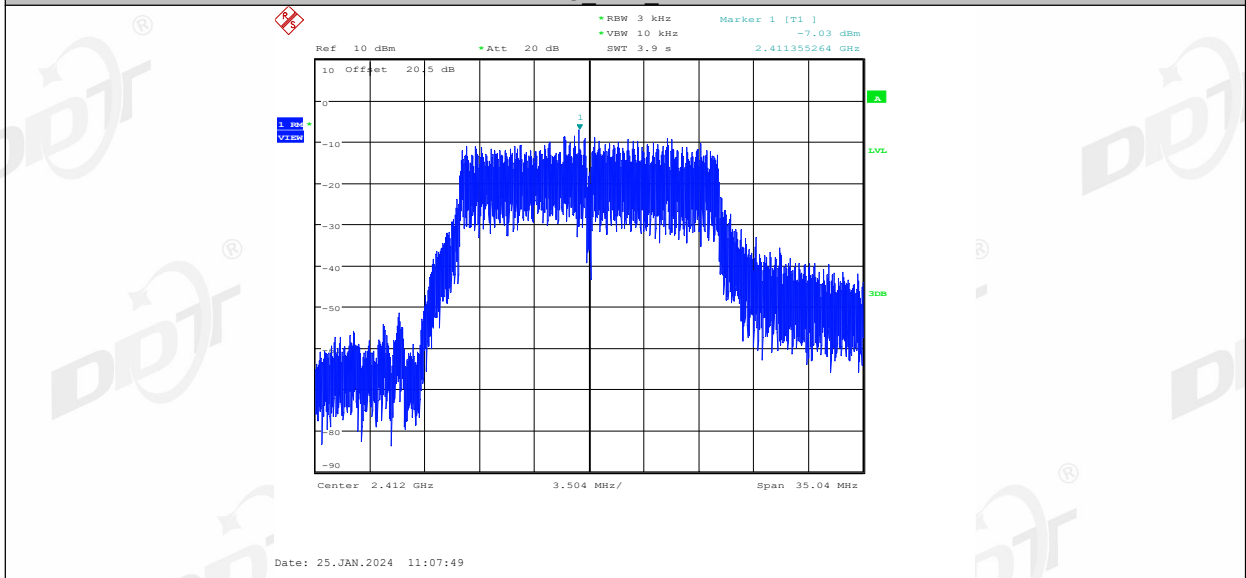


11G Ant1\_2437

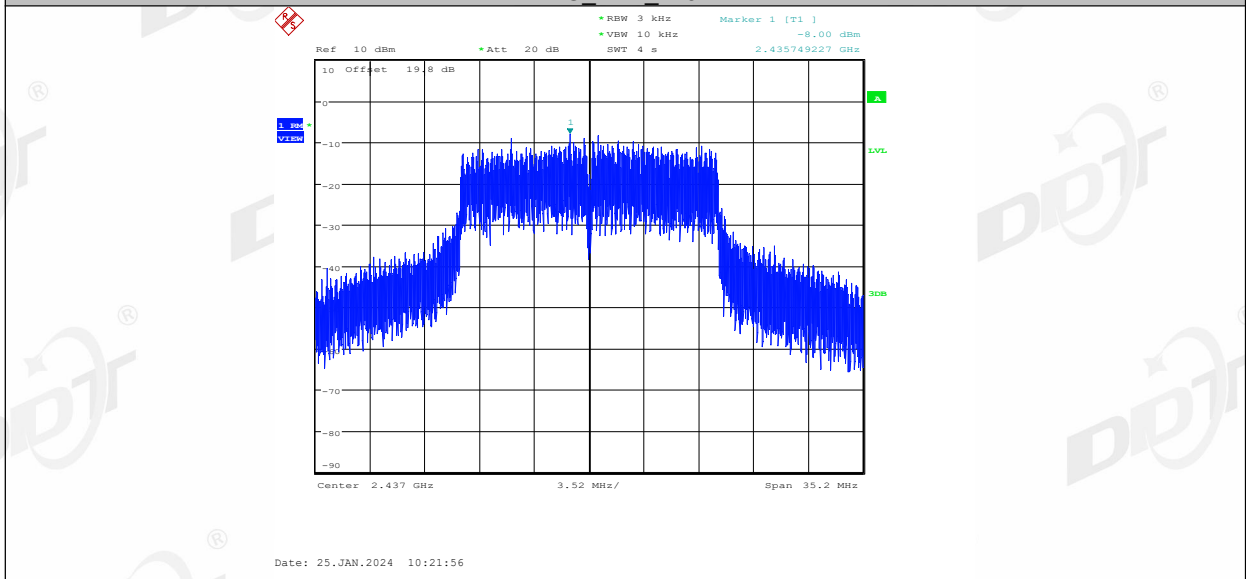


11G Ant2\_2437

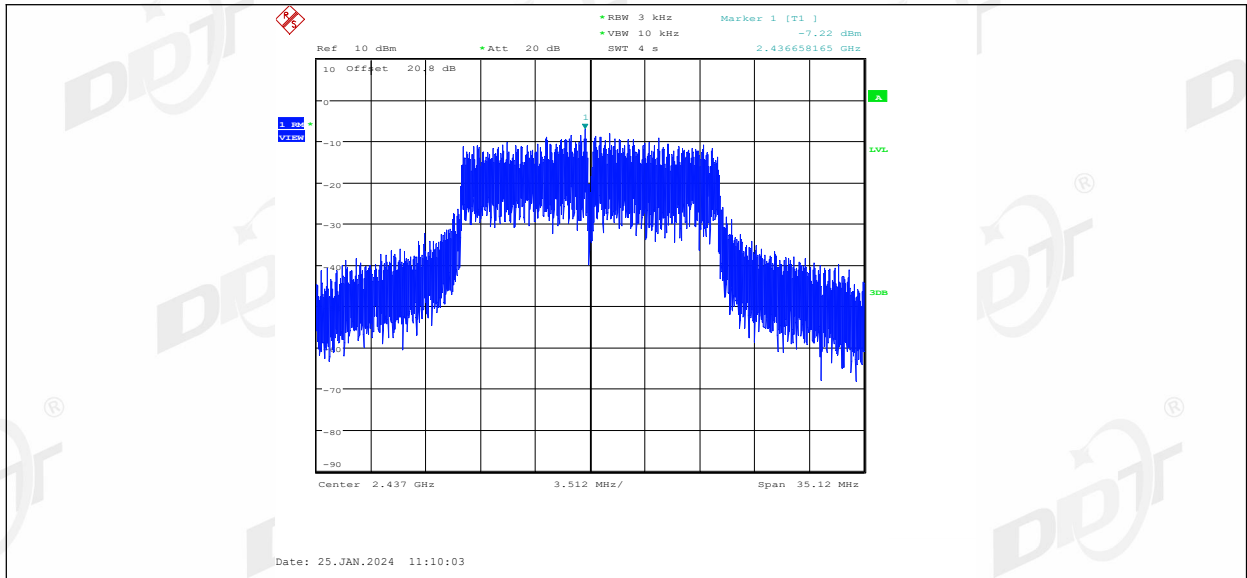

11G Ant1\_2462

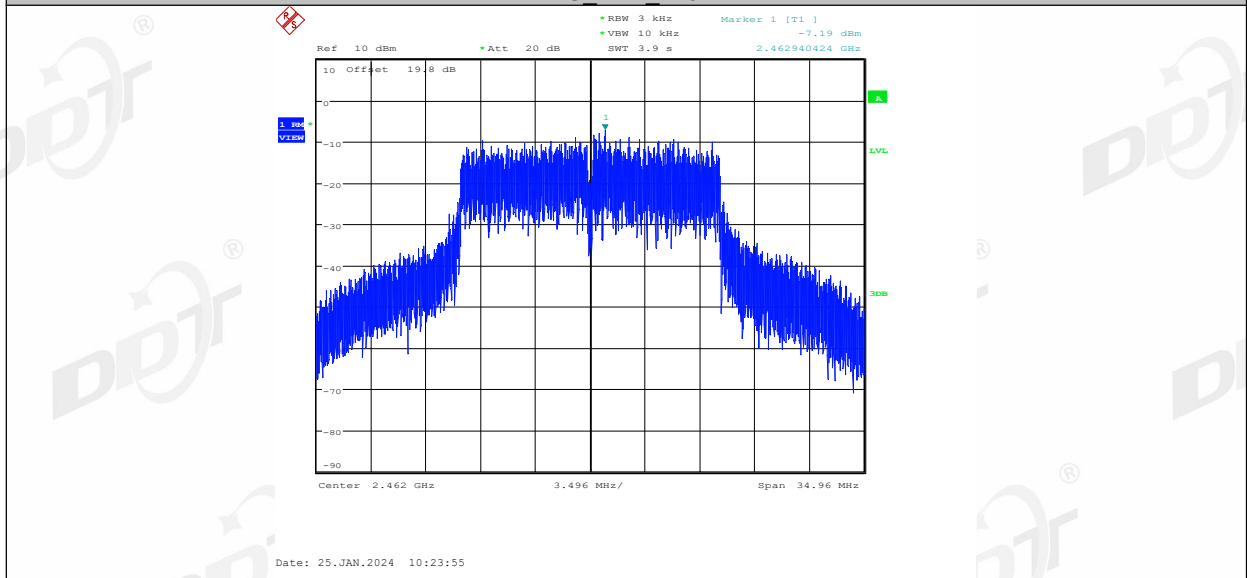


11G Ant2\_2462

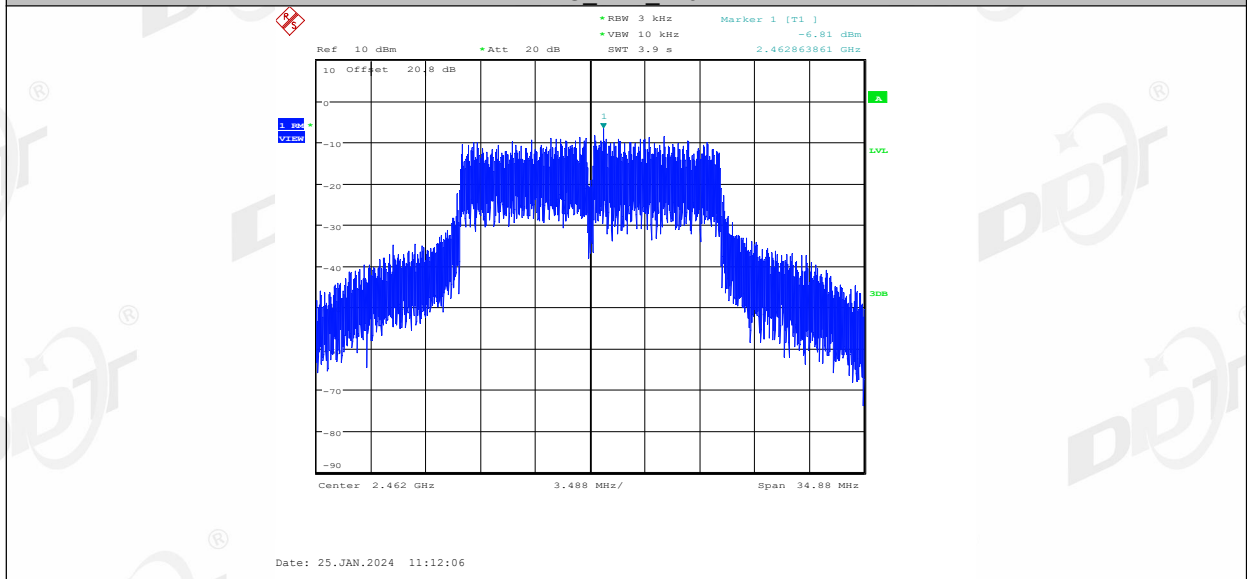


11N20MIMO Ant1\_2412




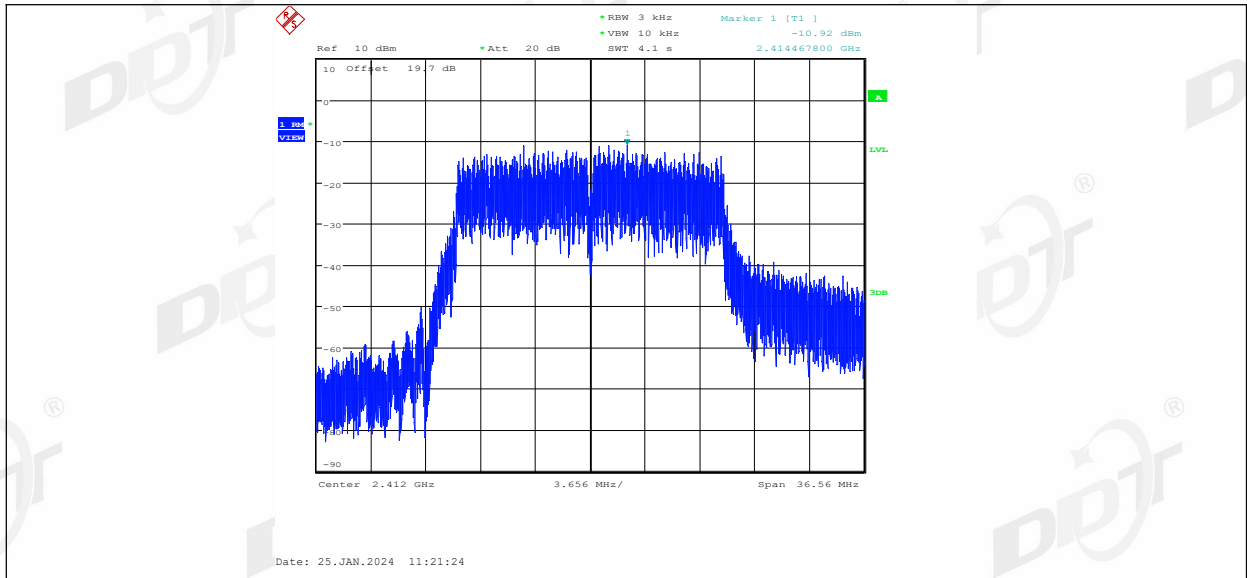


11N20MIMO\_Ant2\_2412

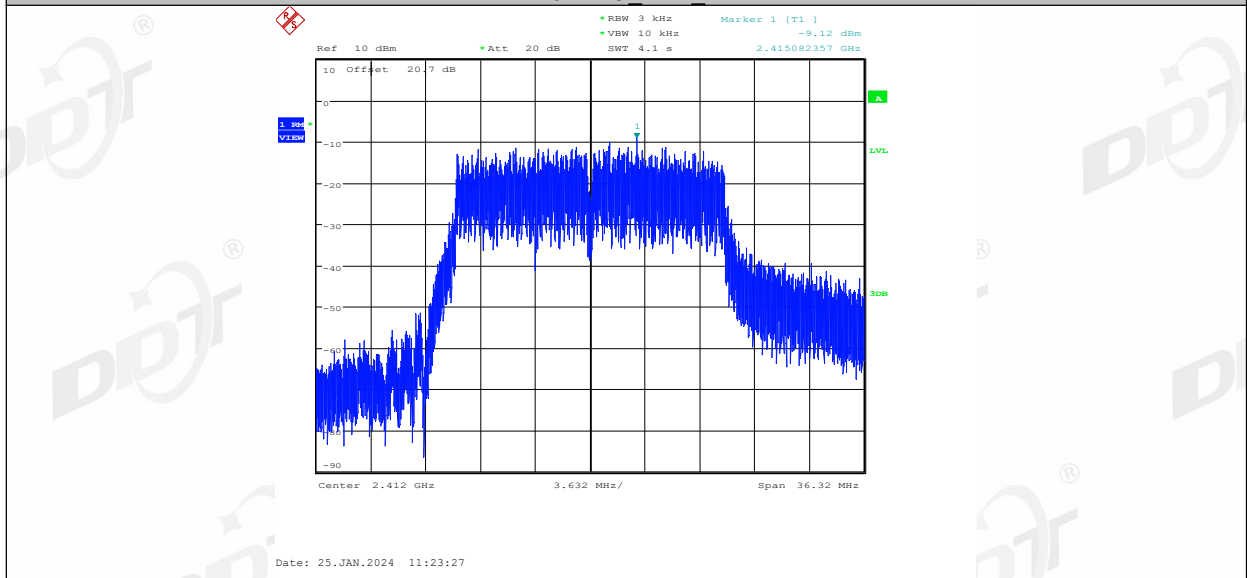


11N20MIMO\_Ant1\_2437

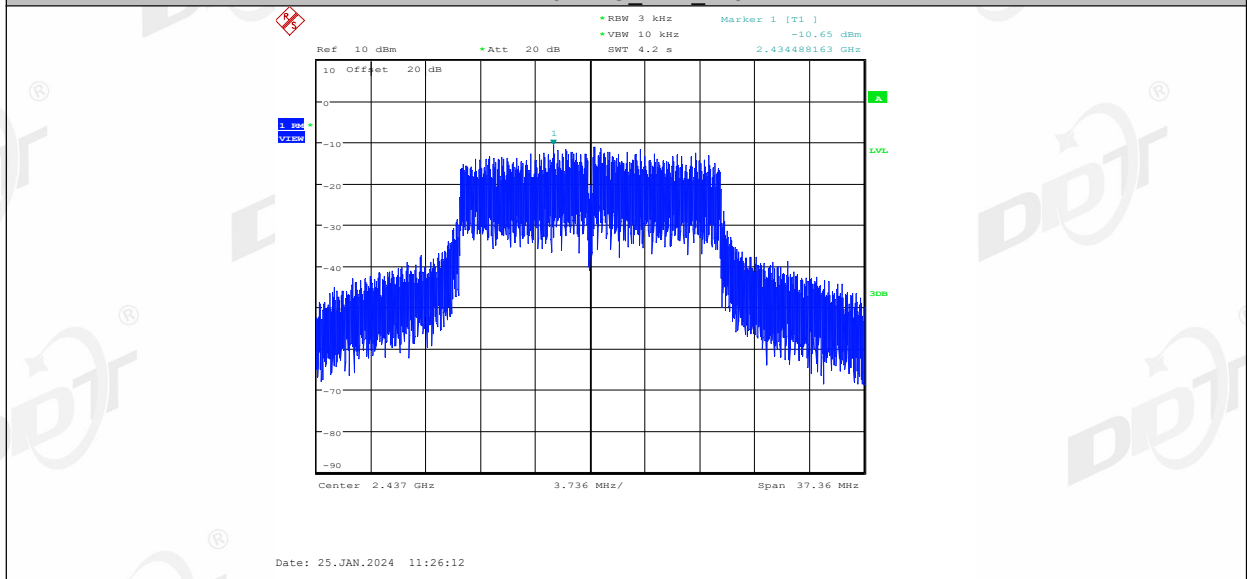


11N20MIMO\_Ant2\_2437

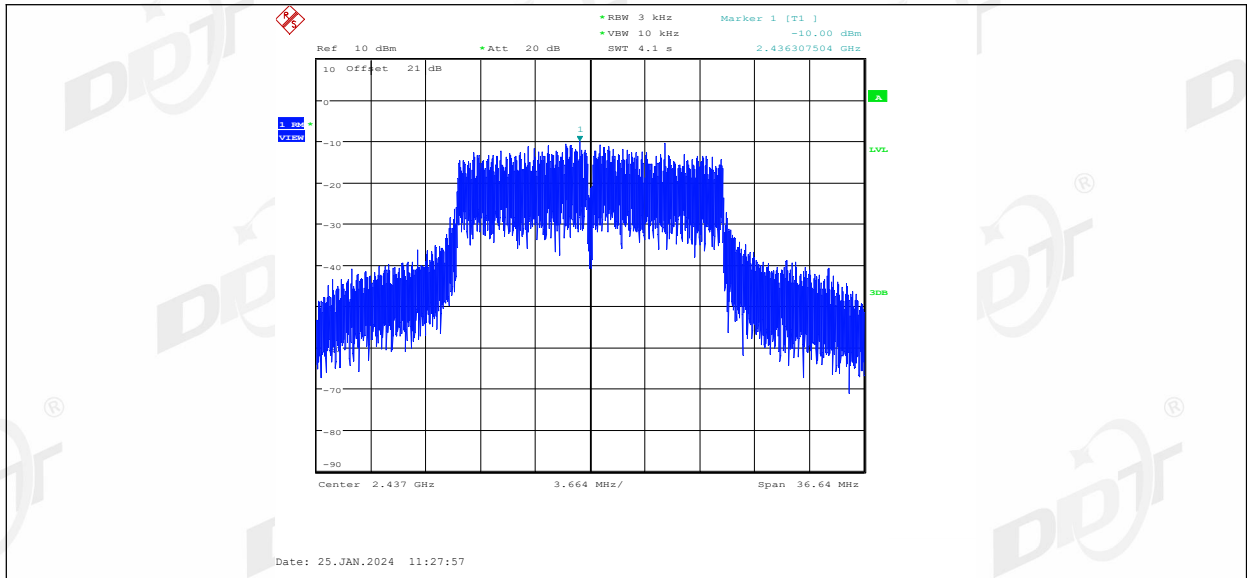


11N20MIMO\_Ant1\_2462

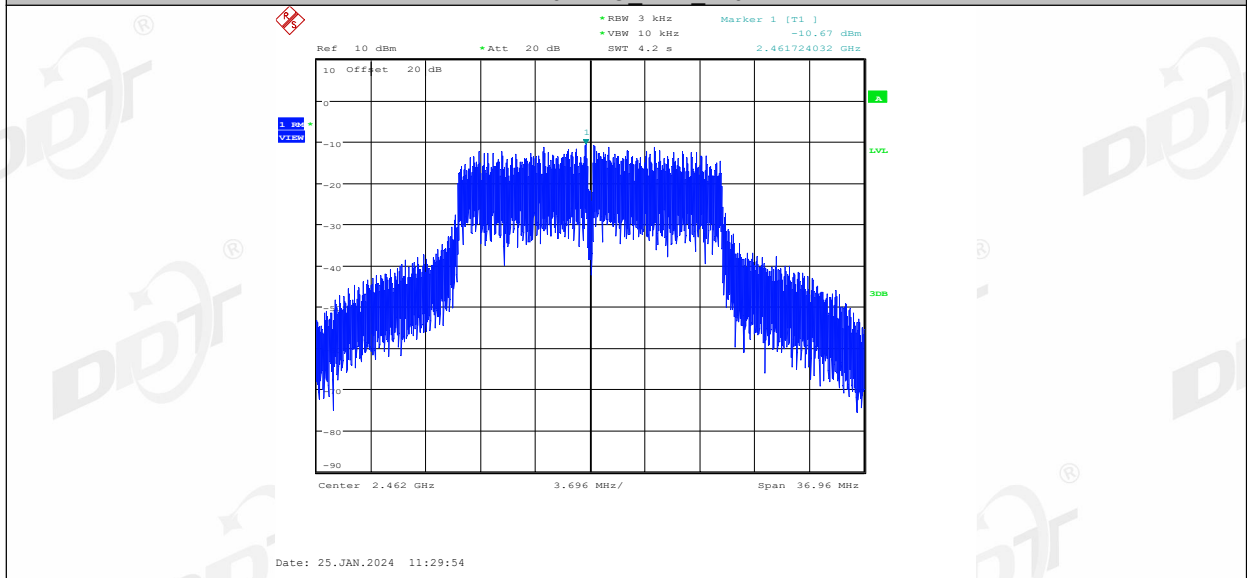


11N20MIMO\_Ant2\_2462

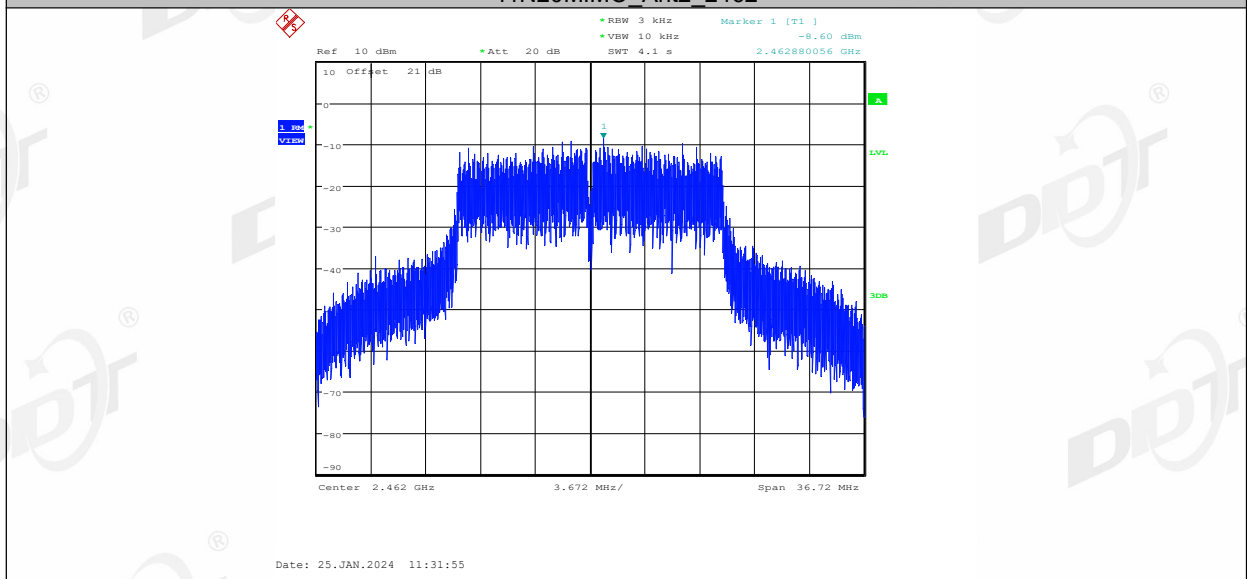


11N40MIMO\_Ant1\_2422

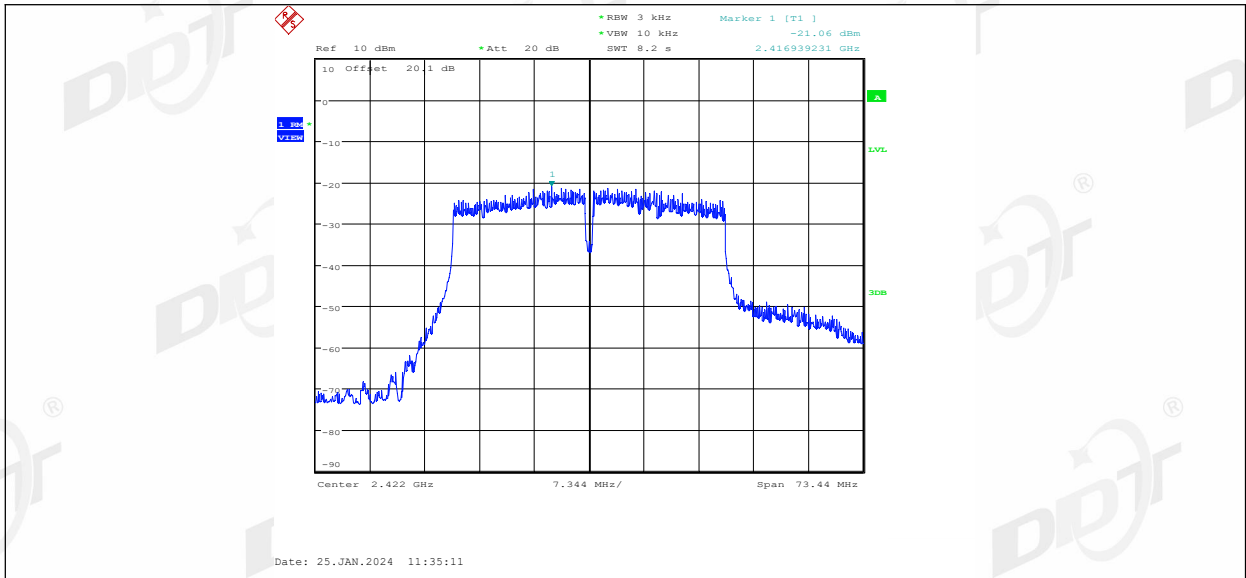


11N40MIMO\_Ant2\_2422

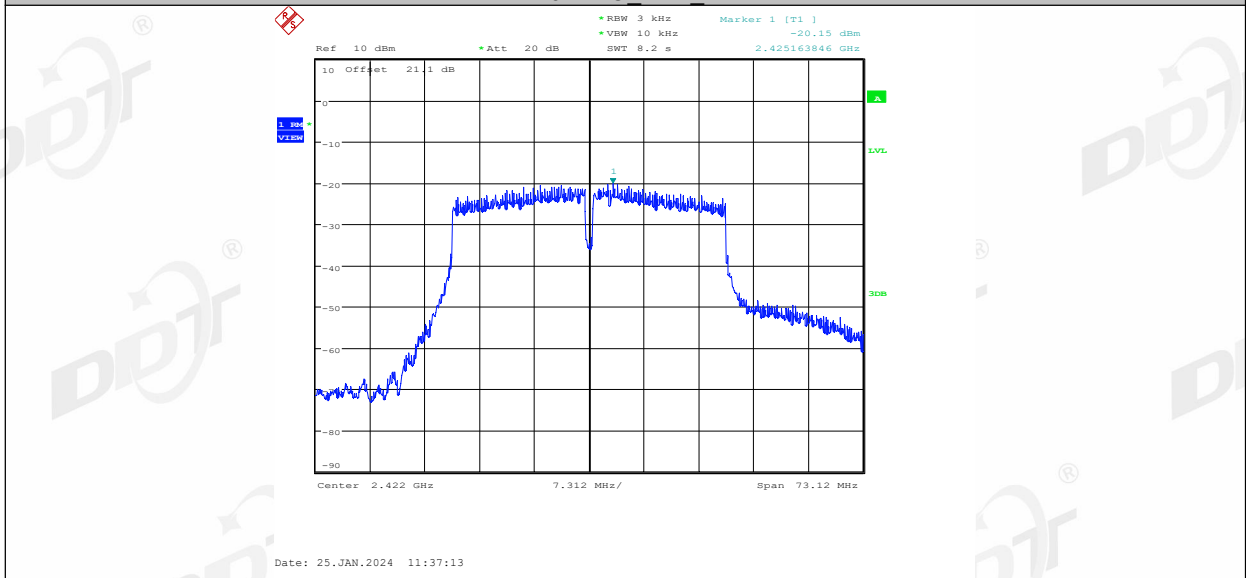


11N40MIMO\_Ant1\_2437

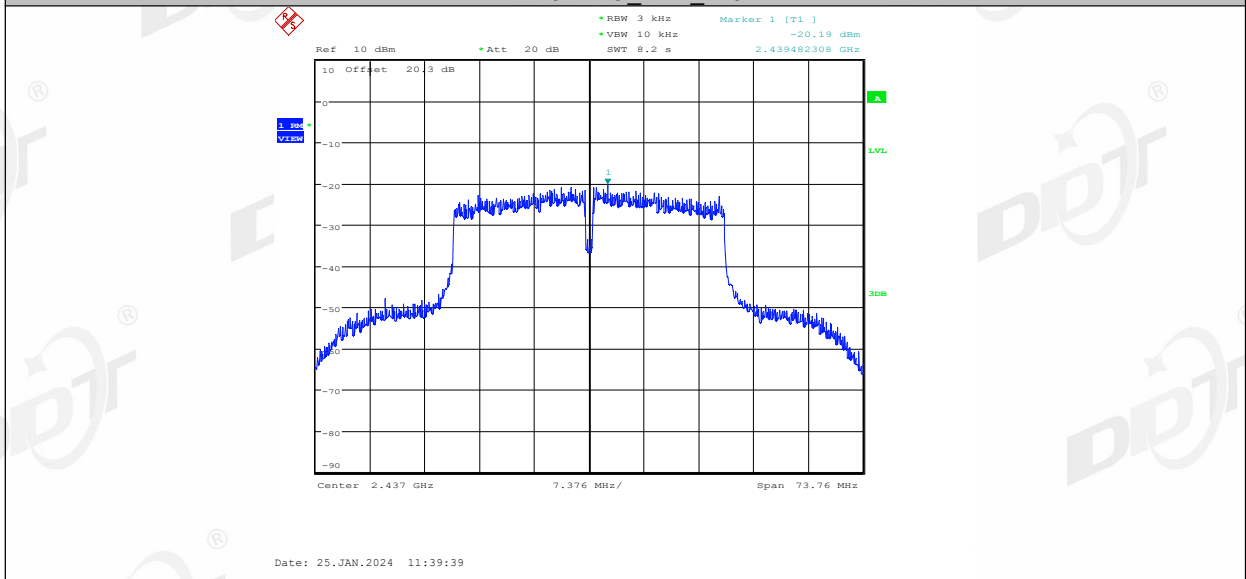


11N40MIMO\_Ant2\_2437

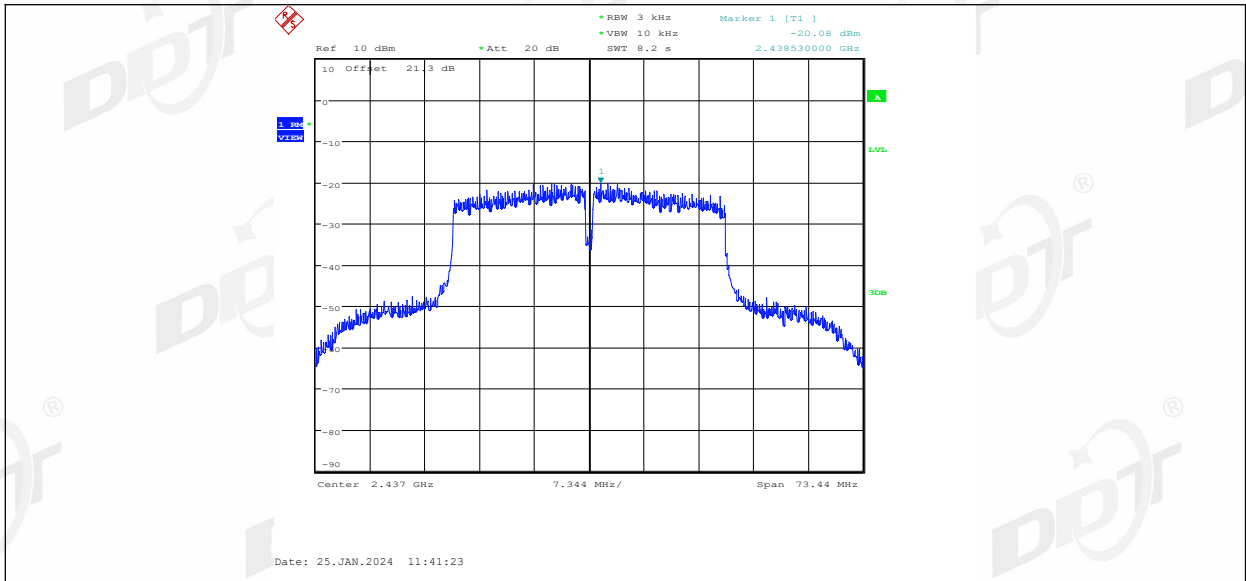


11N40MIMO\_Ant1\_2452

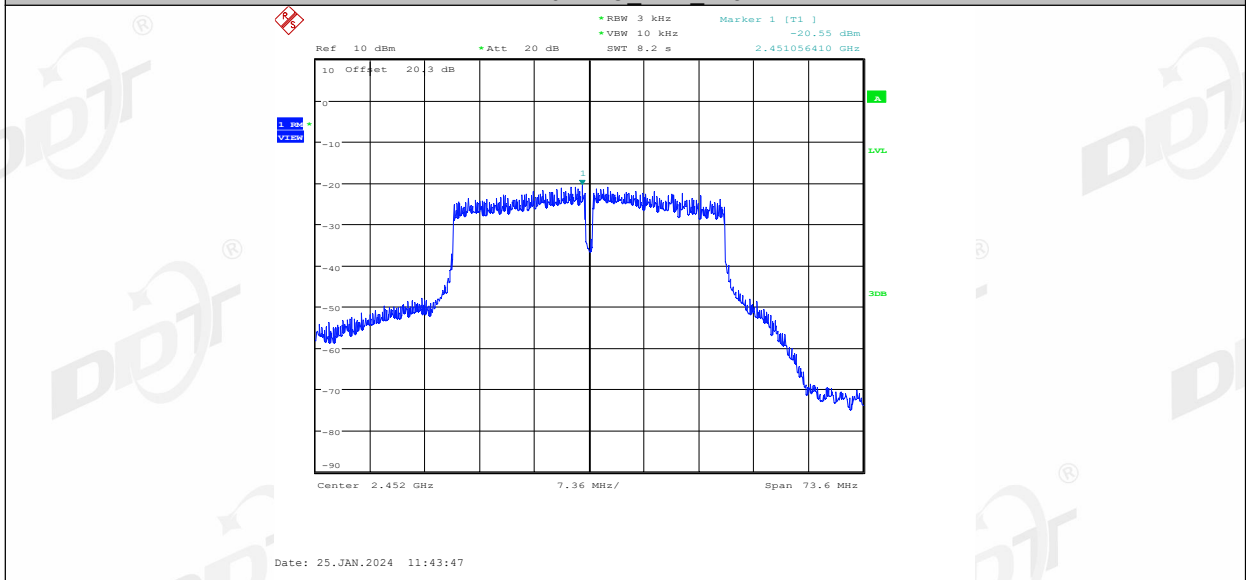


11N40MIMO\_Ant2\_2452

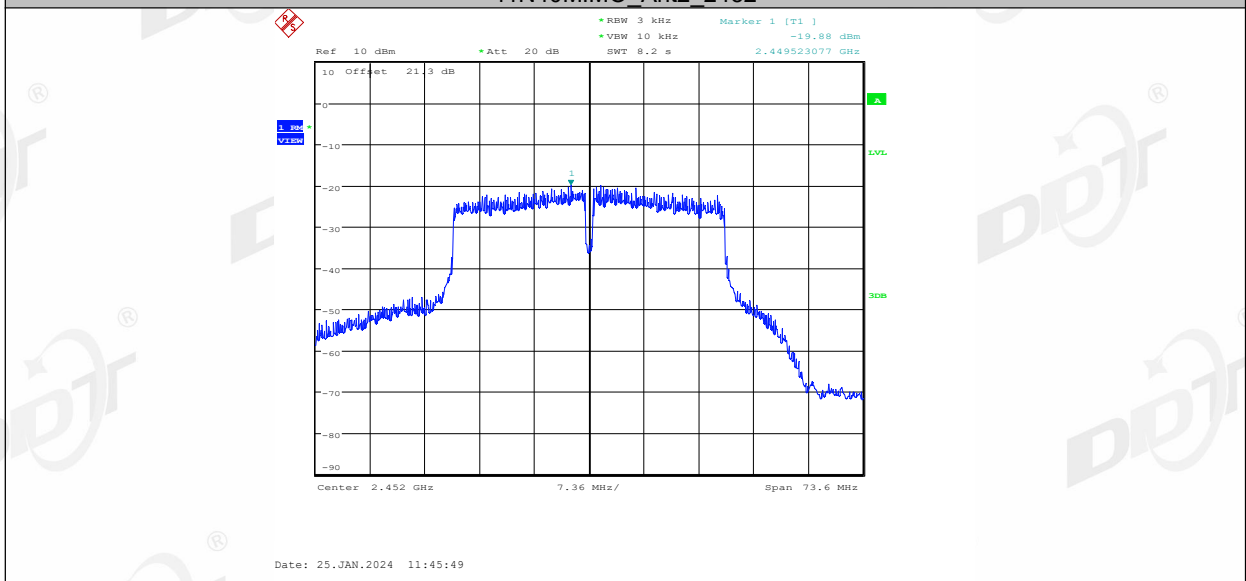


11AX20MIMO\_Ant1\_2412

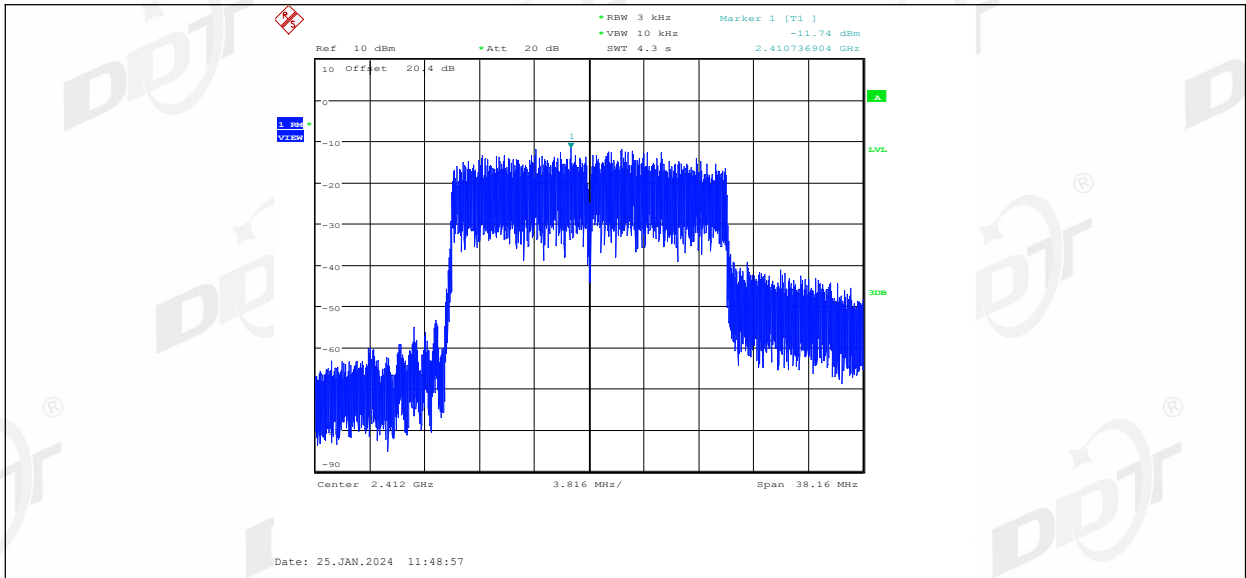


11AX20MIMO Ant2 2412

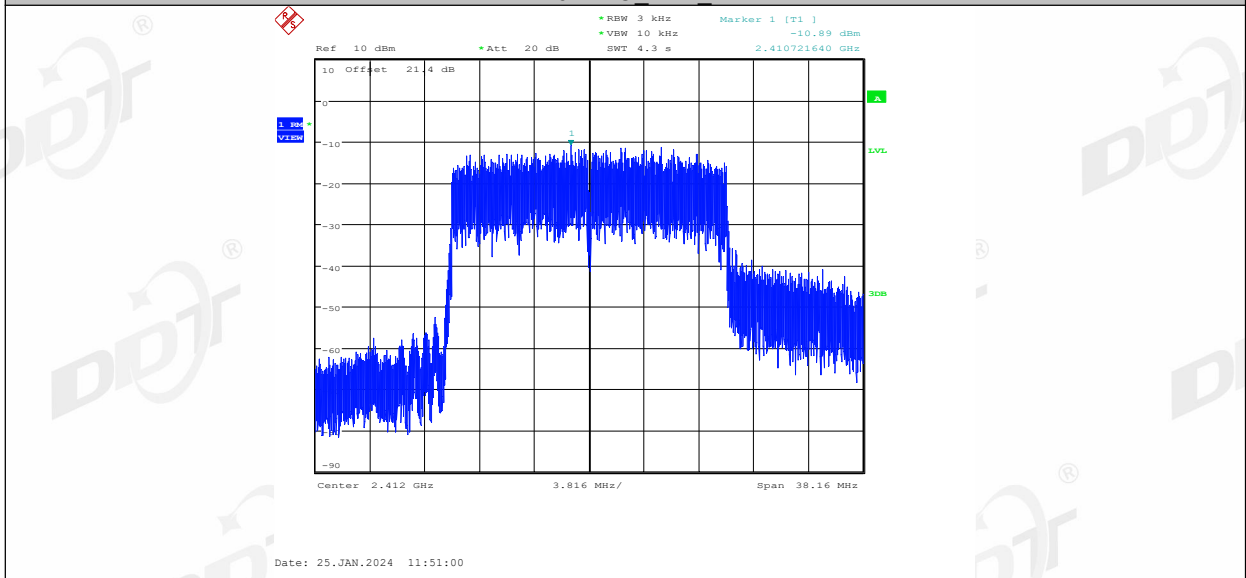


11AX20MIMO Ant1 2437

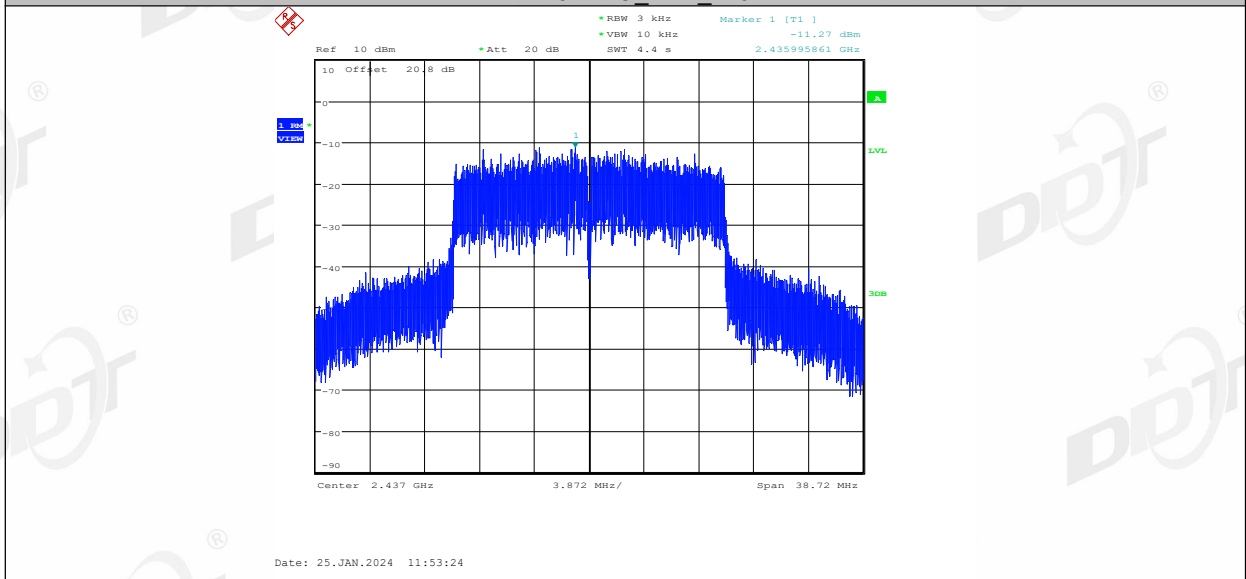


11AX20MIMO Ant2 2437

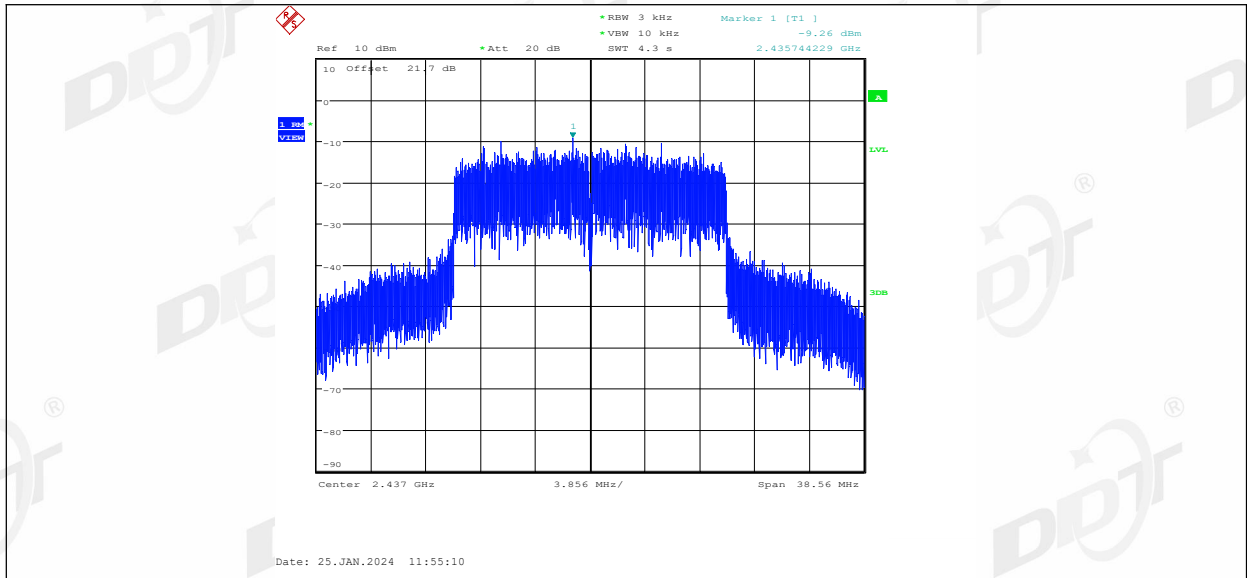


11AX20MIMO Ant1 2462

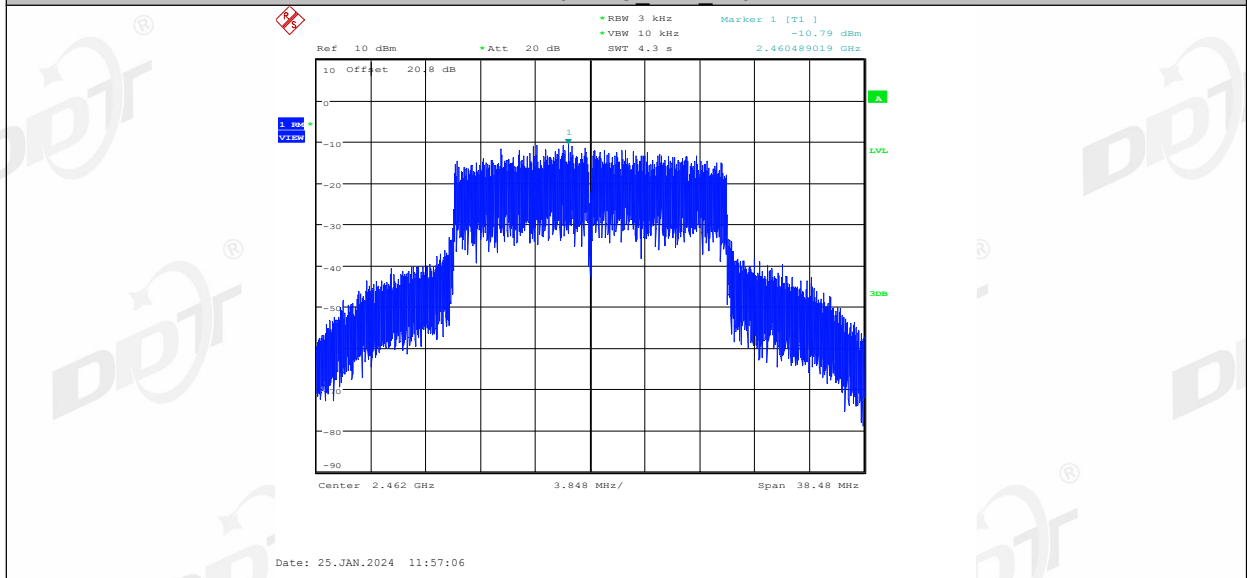


11AX20MIMO Ant2 2462

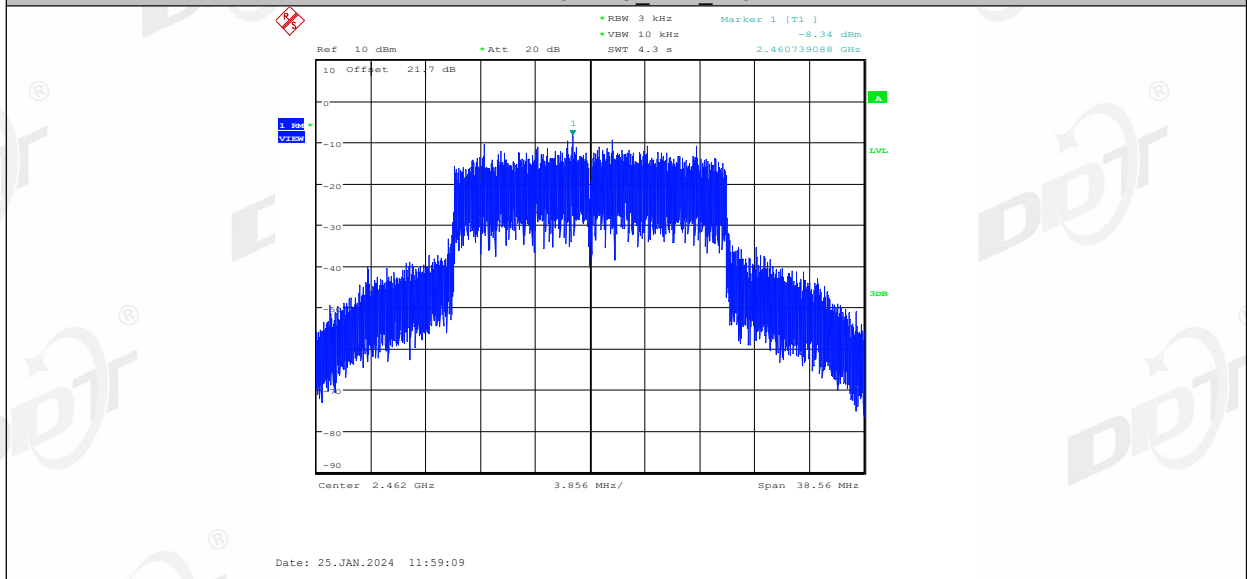


11AX40MIMO Ant1 2422

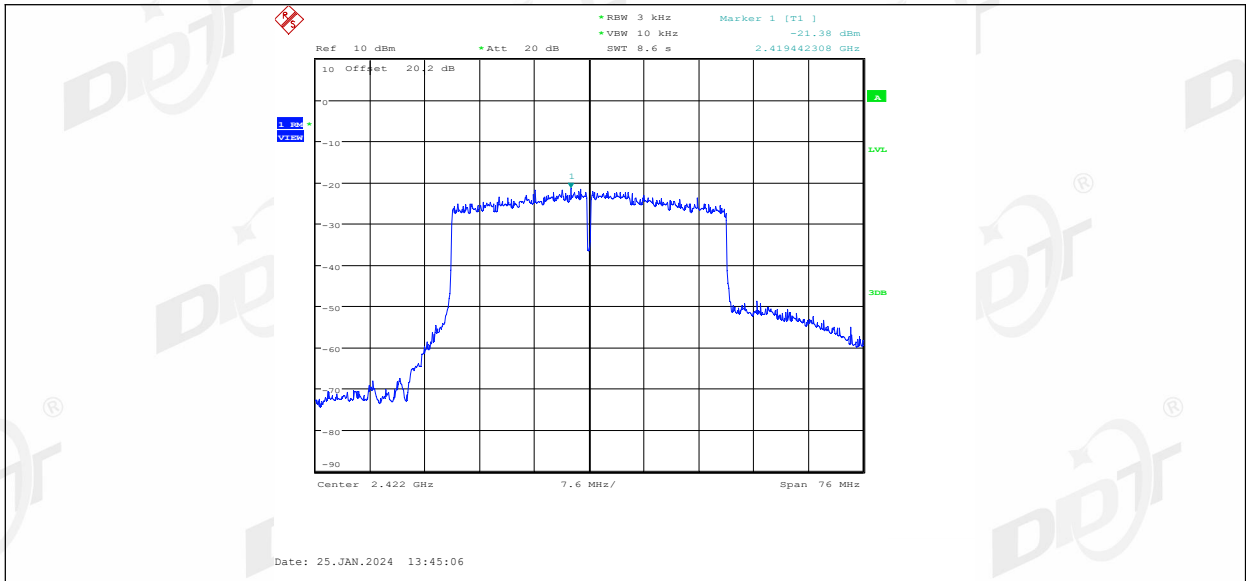


11AX40MIMO Ant2 2422

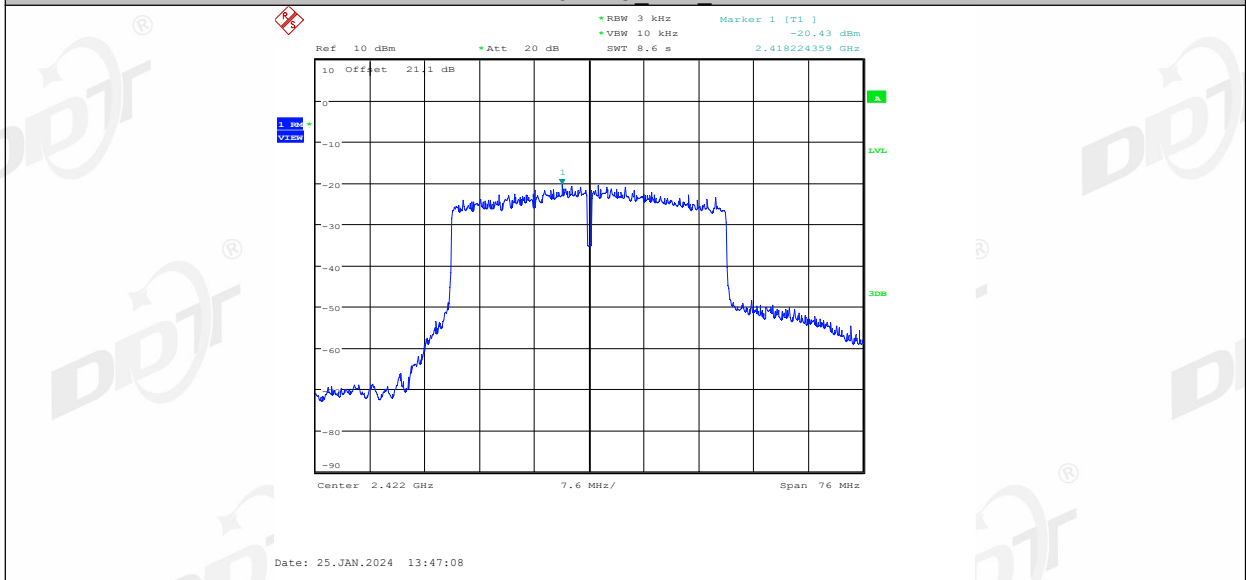


11AX40MIMO Ant1 2437

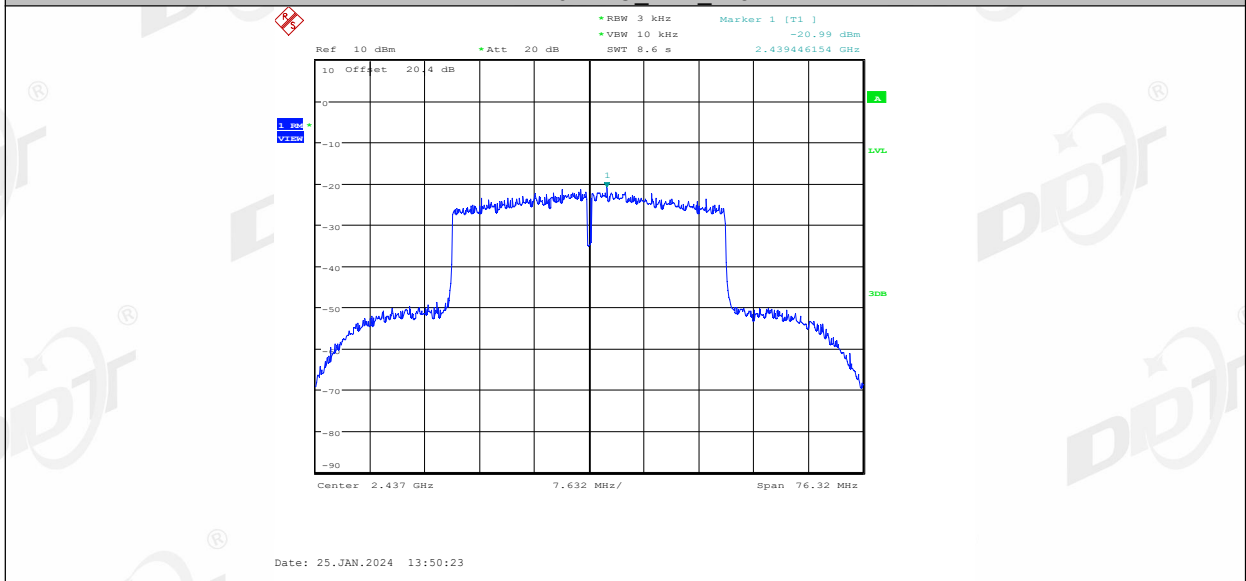


11AX40MIMO Ant2 2437

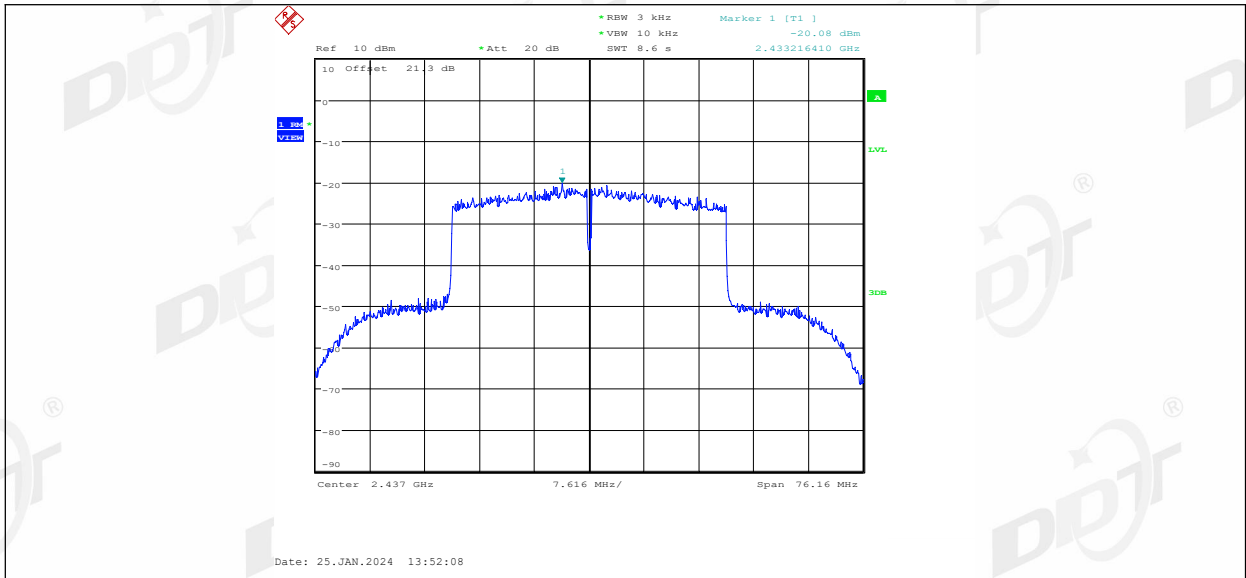

11AX40MIMO Ant1 2452

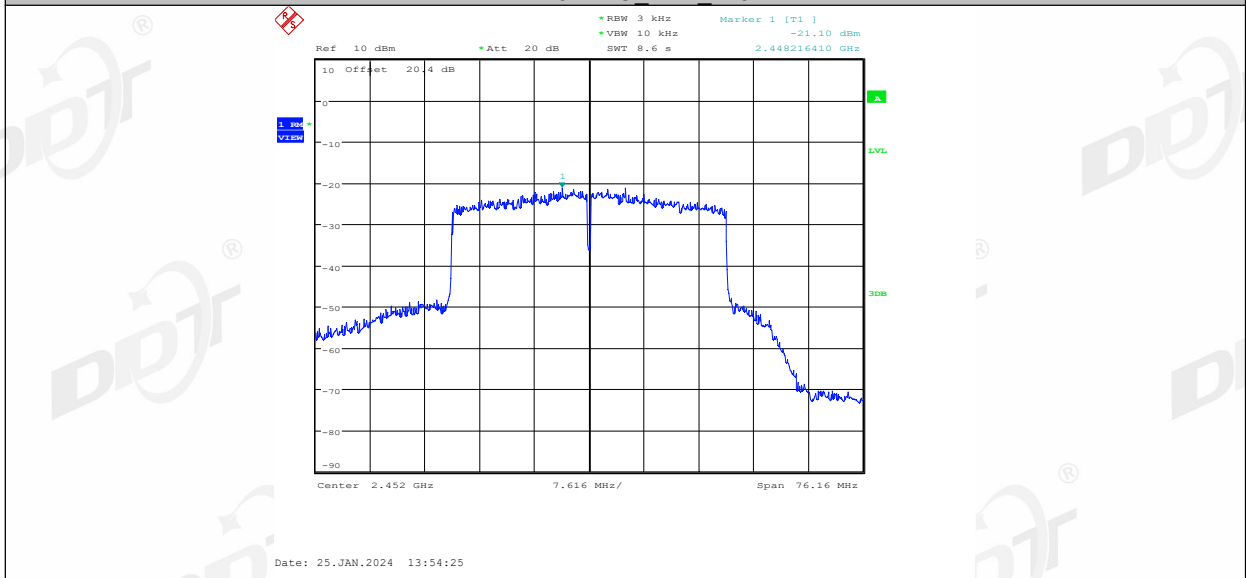


11AX40MIMO Ant2 2452

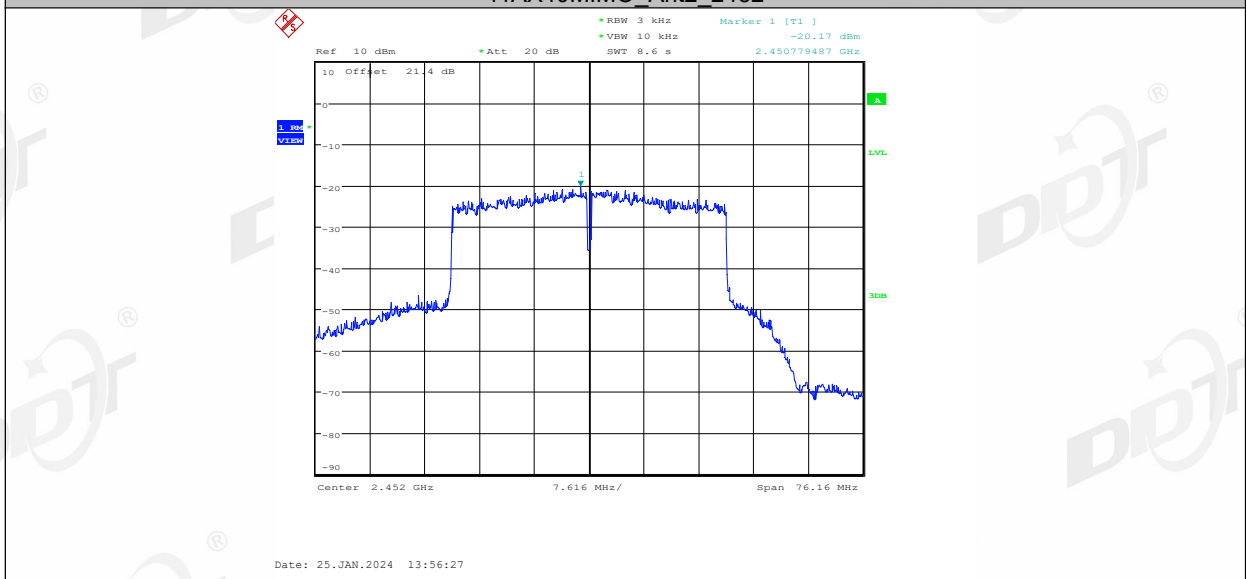



## 8. Band Edge Compliance (Conducted Method)

### 8.1. Block diagram of test setup

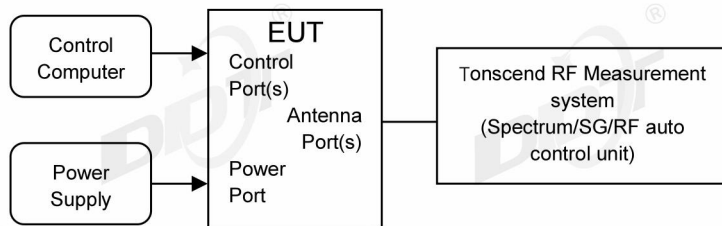

### 8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.




Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.




#### 8.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.6°C,64%RH	Test Date:	2024.01.29-2024.02.02
Test Power Supply:	AC230V/50Hz	EUT:	Mercku M6s Nano Mesh Wi-Fi Router
Sample Number:	S23111605-01	Model No.:	MBAA0


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass

### 8.5. Test graphs

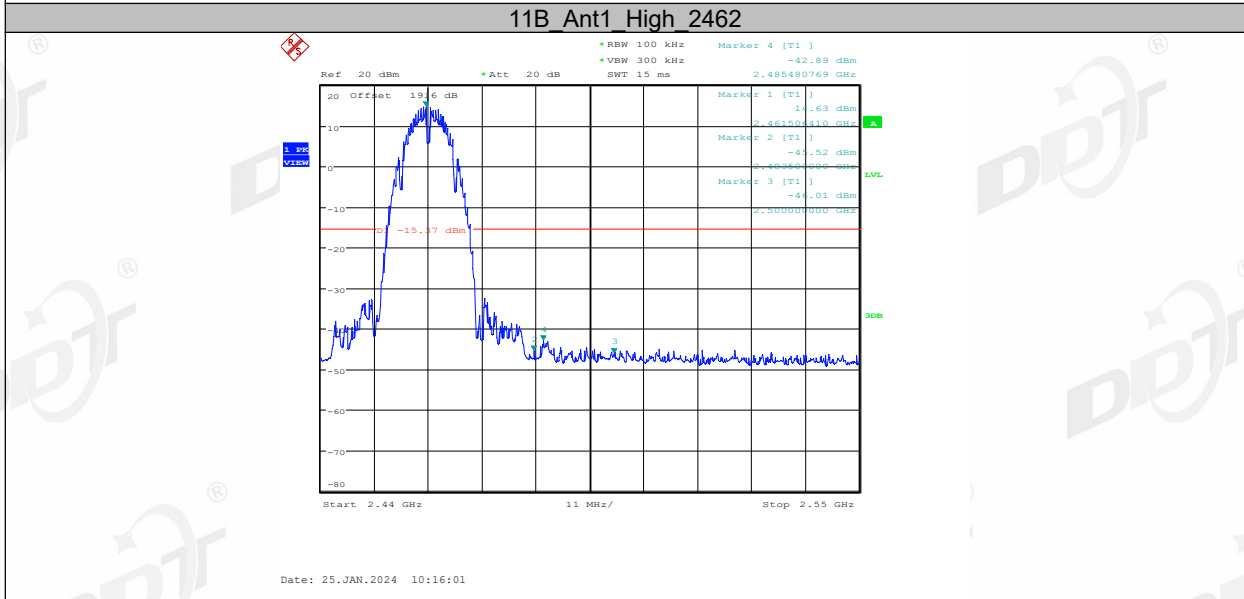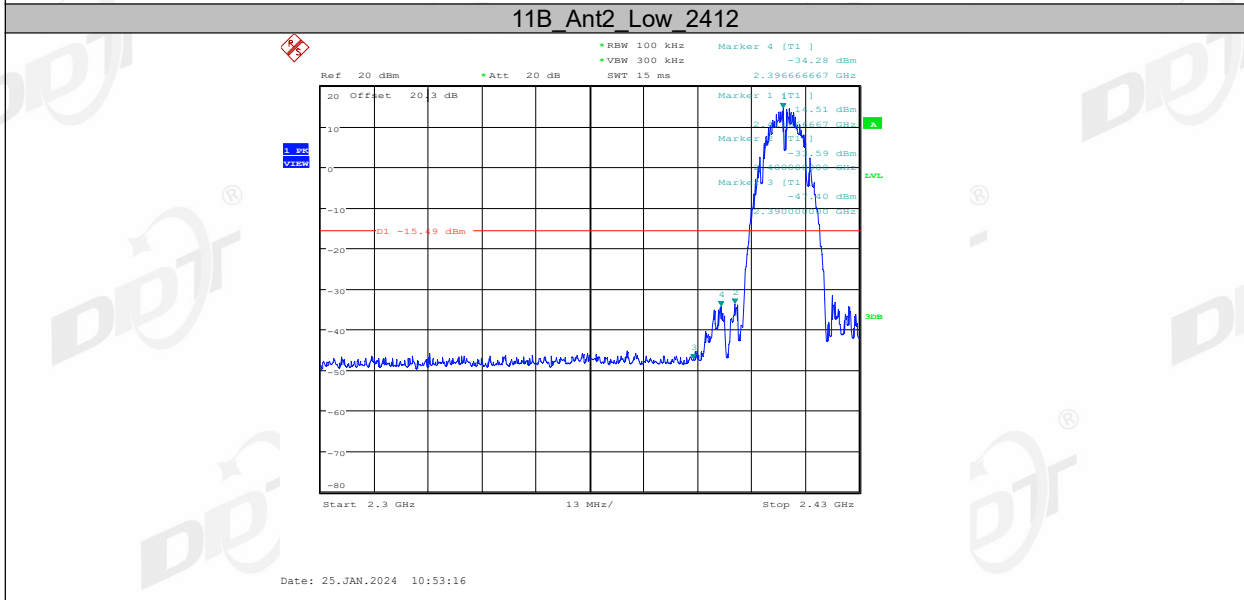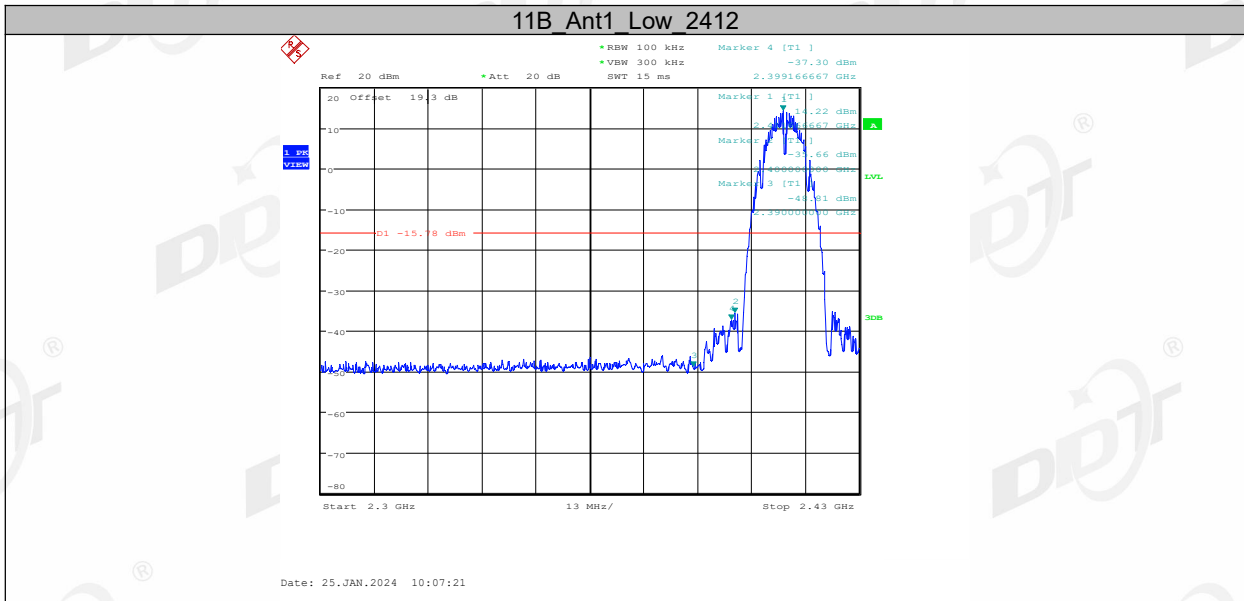


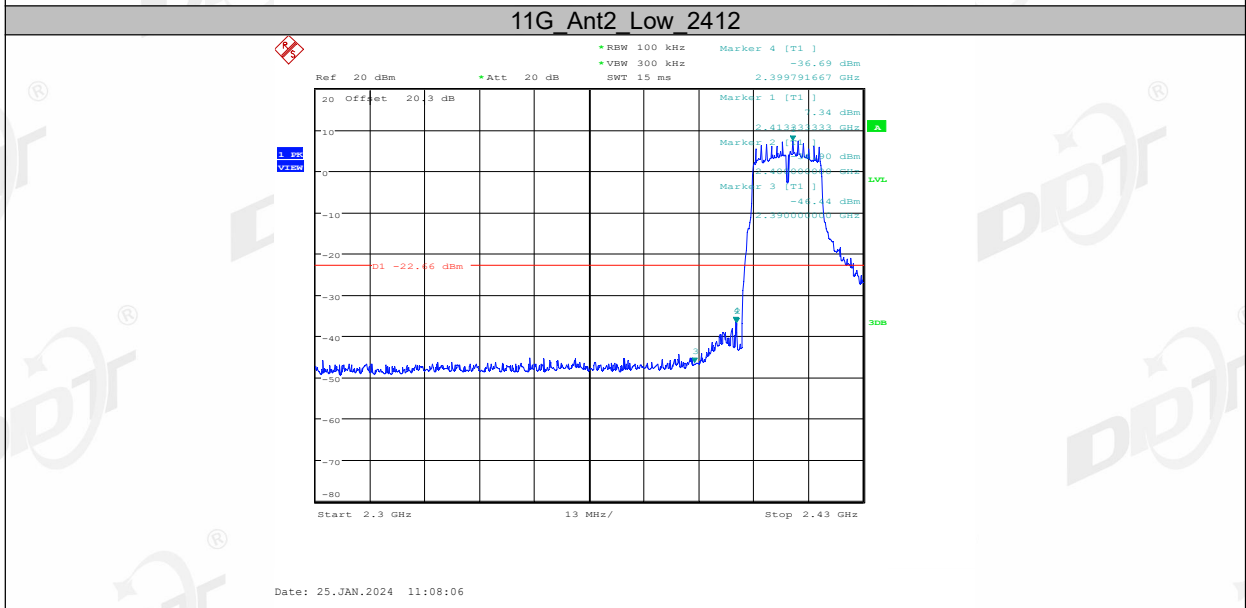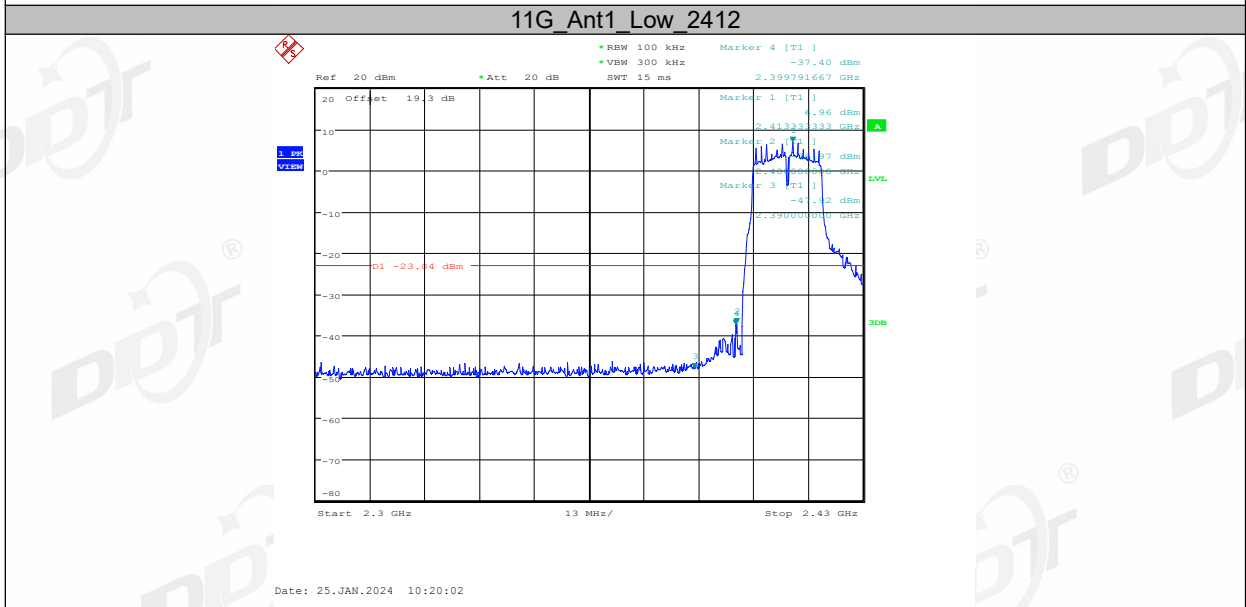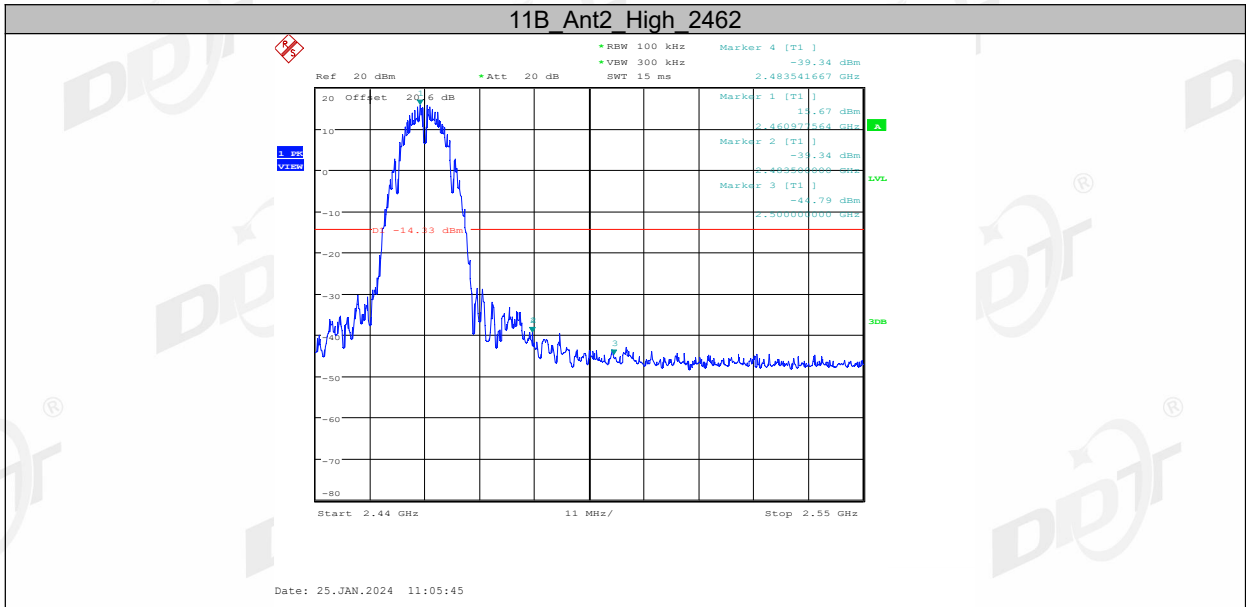

### 11G\_Ant1\_High\_2462

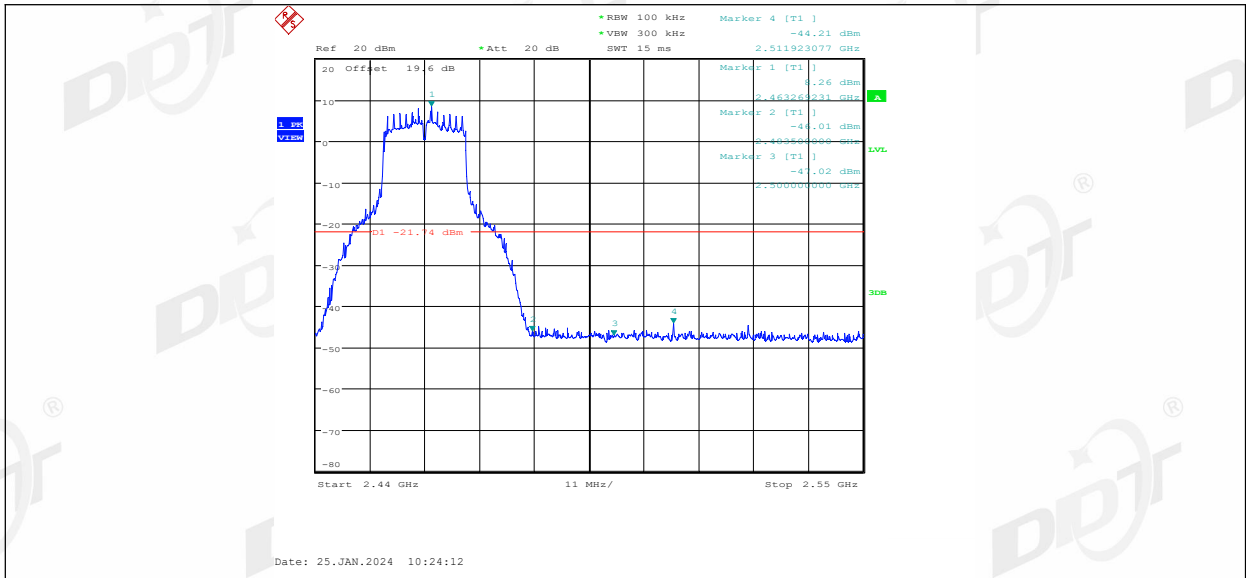


11G Ant2 High 2462

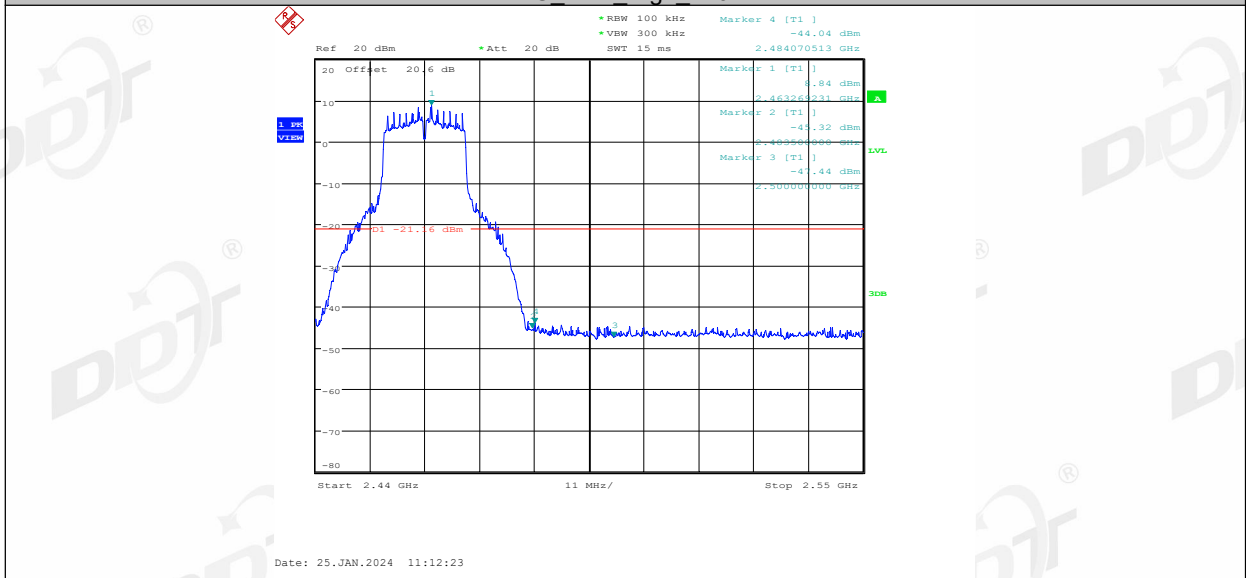


11N20MIMO Ant1 Low 2412




11N20MIMO Ant2 Low 2412

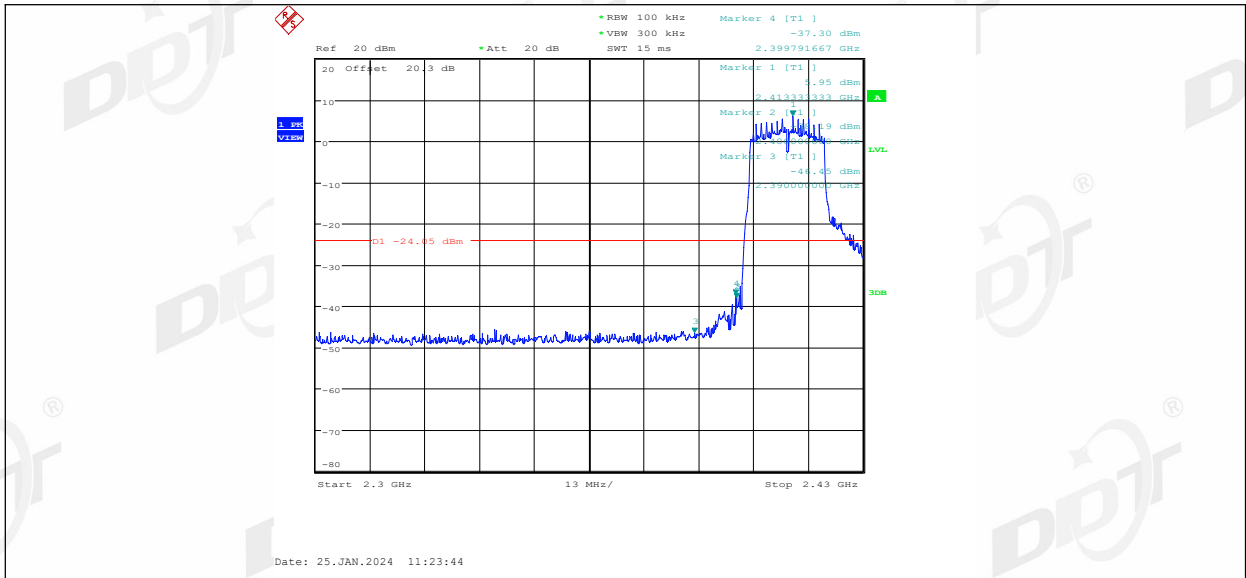


11N20MIMO Ant1 High 2462

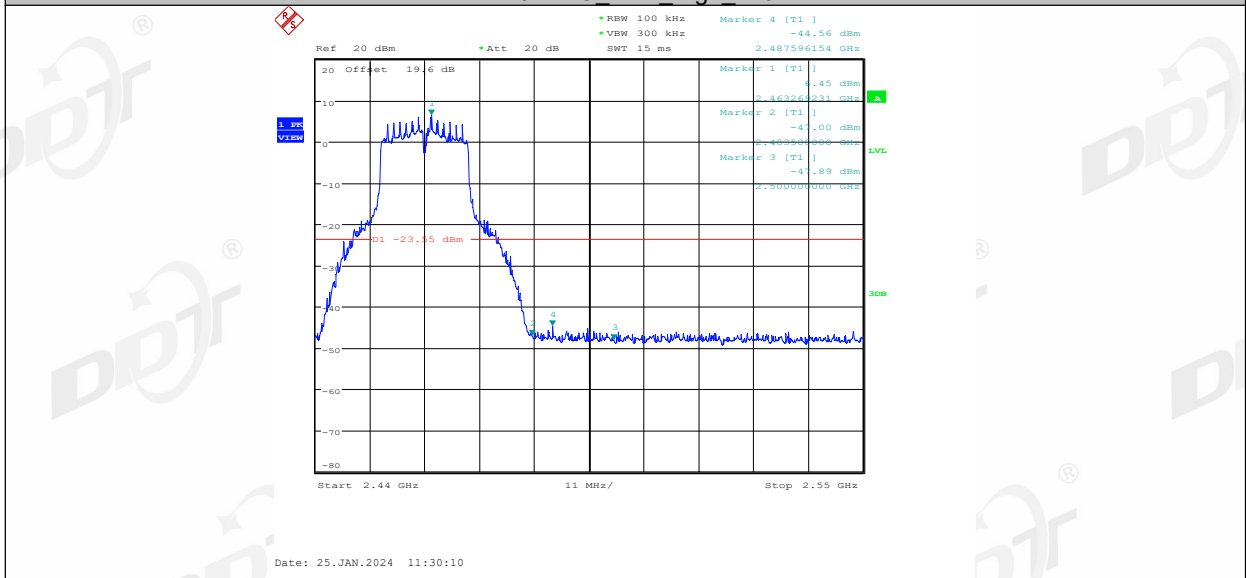


11N20MIMO Ant2 High 2462

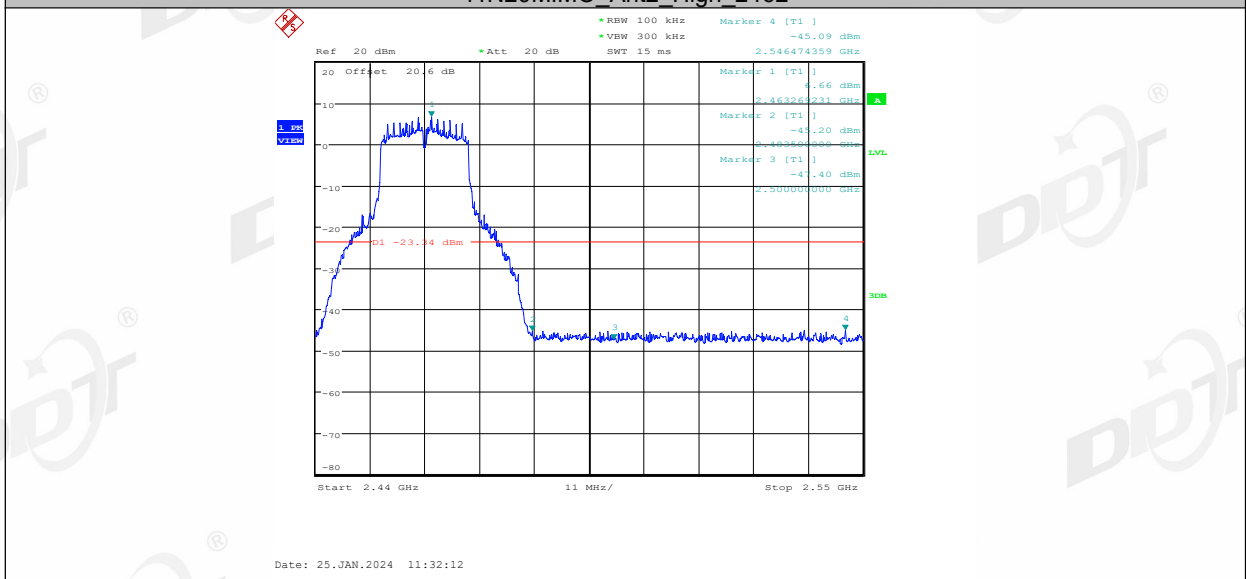

11N40MIMO Ant1 Low 2422

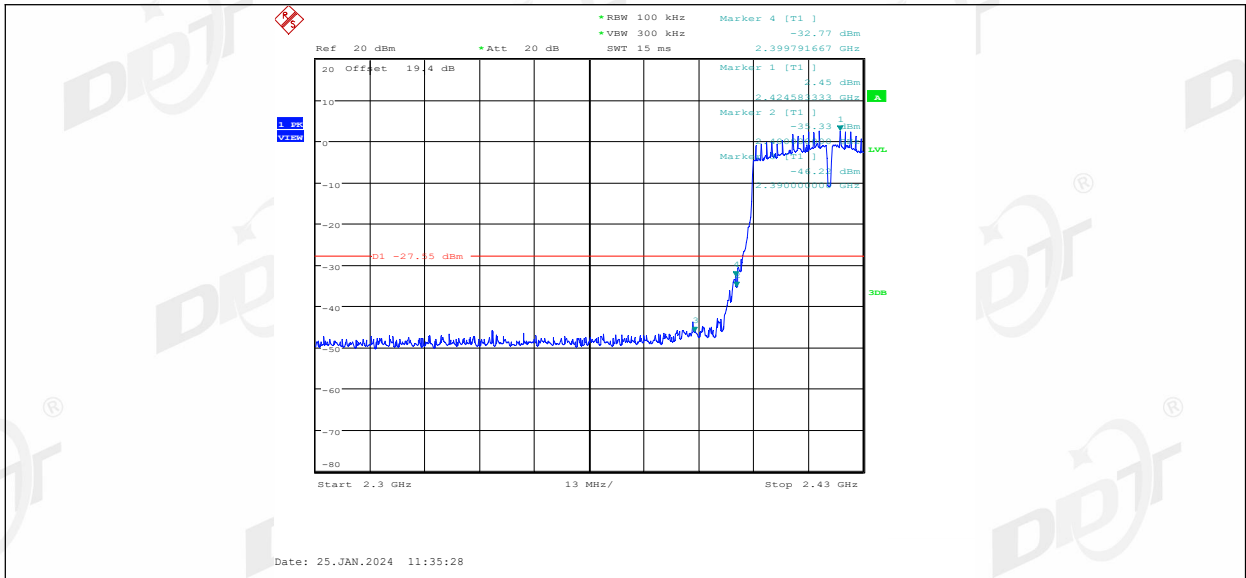


11N40MIMO Ant2 Low 2422

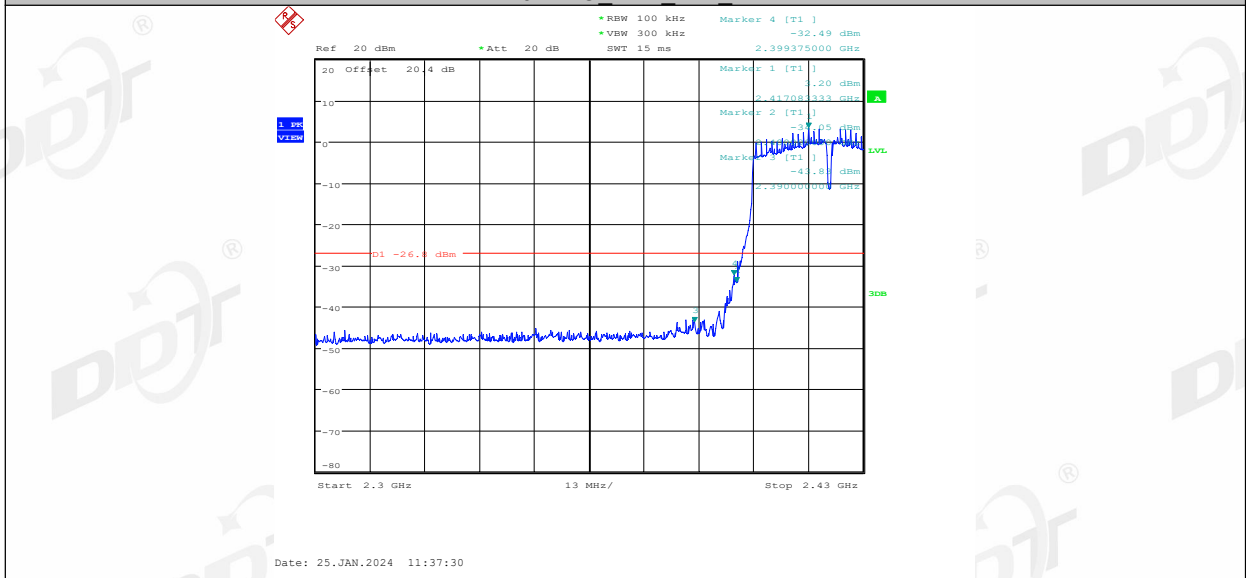


11N40MIMO Ant1 High 2452



11N40MIMO Ant2 High 2452

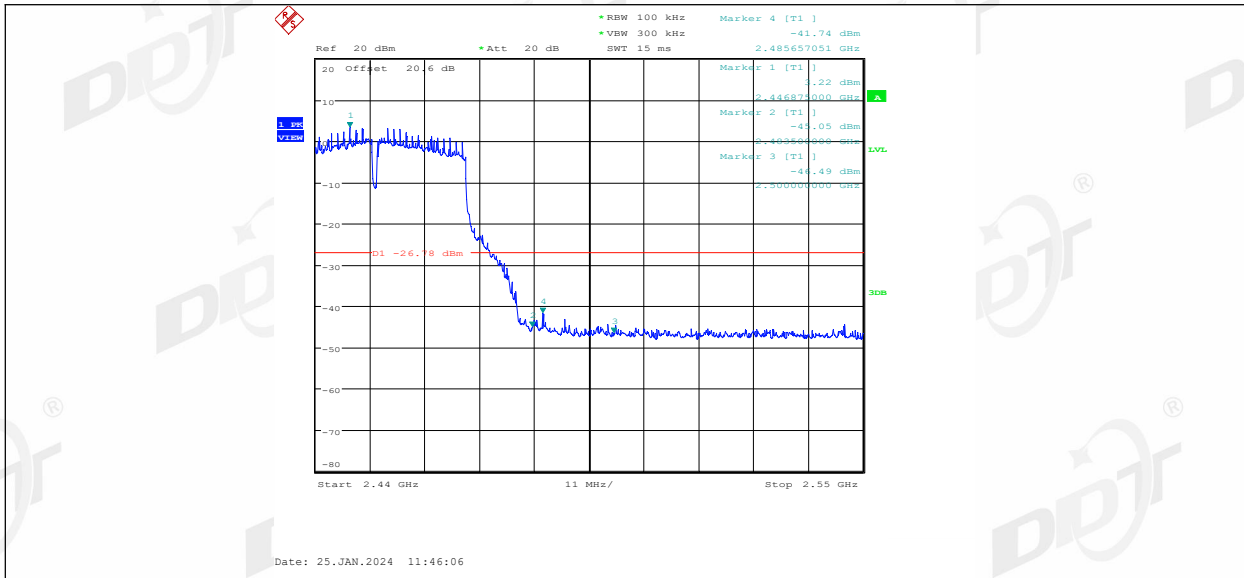

11AX20MIMO Ant1 Low 2412

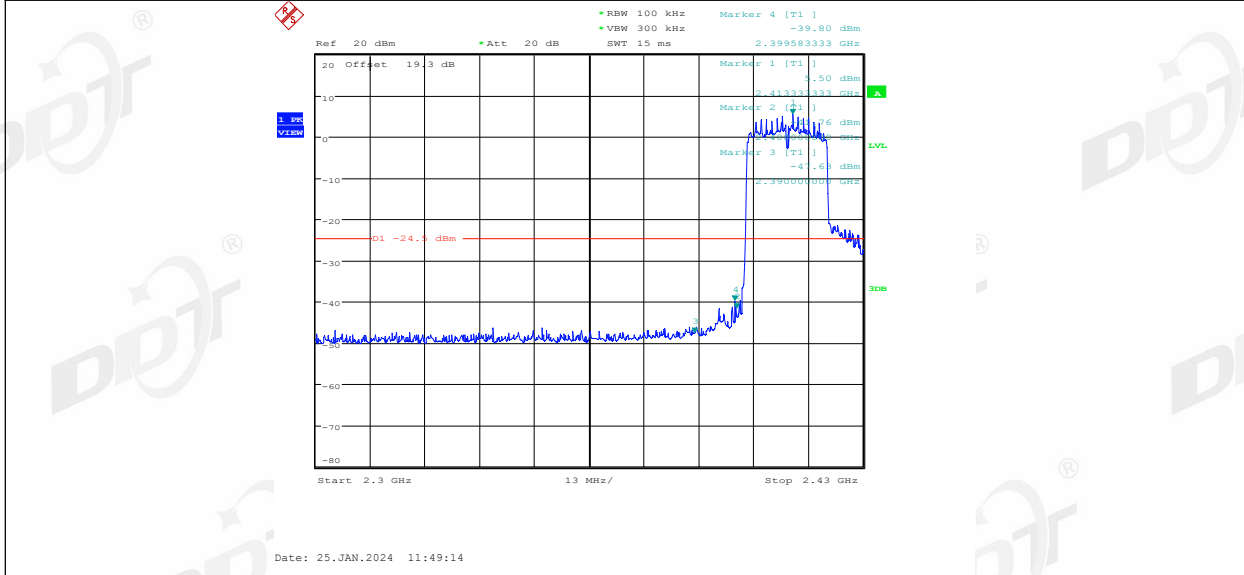


11AX20MIMO Ant2 Low 2412




11AX20MIMO Ant1 High 2462




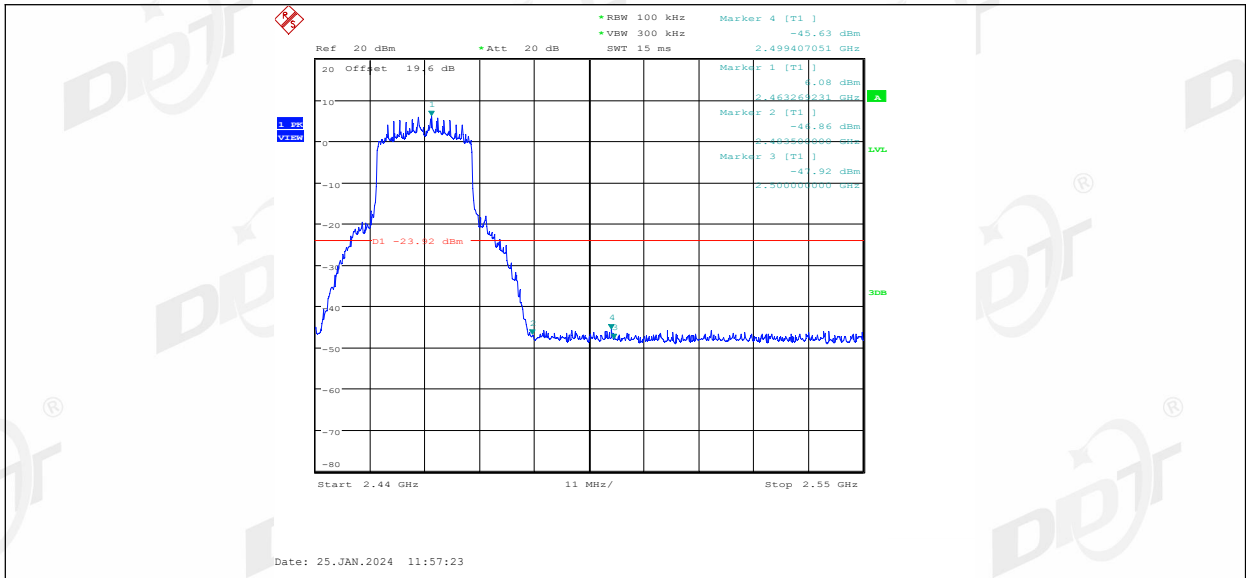


11AX20MIMO Ant2 High 2462

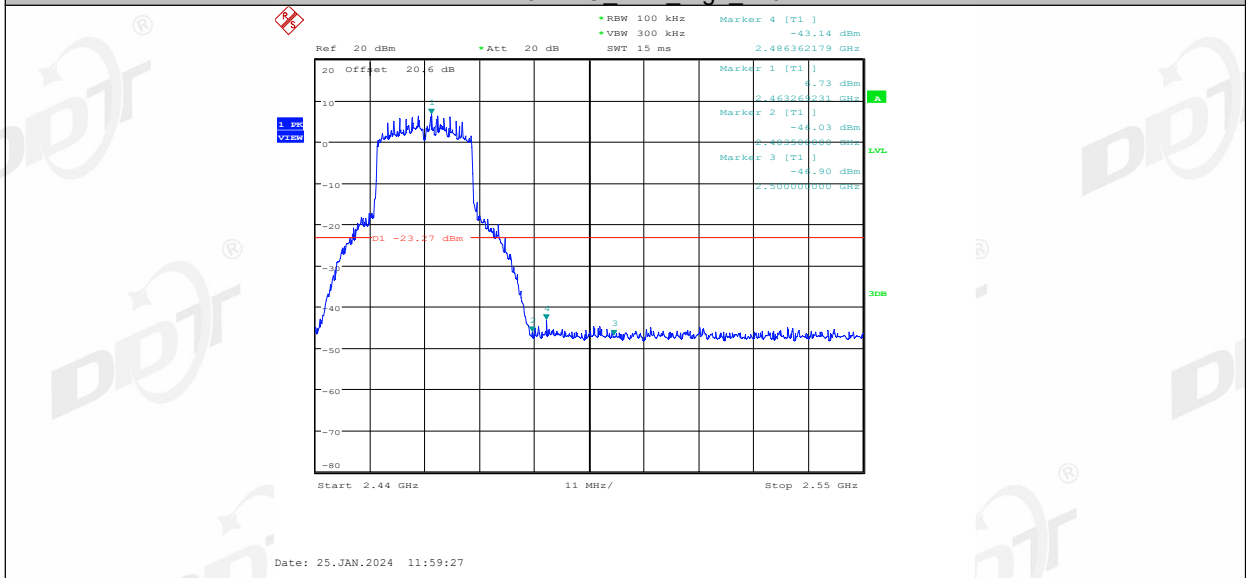


11AX40MIMO Ant1 Low 2422

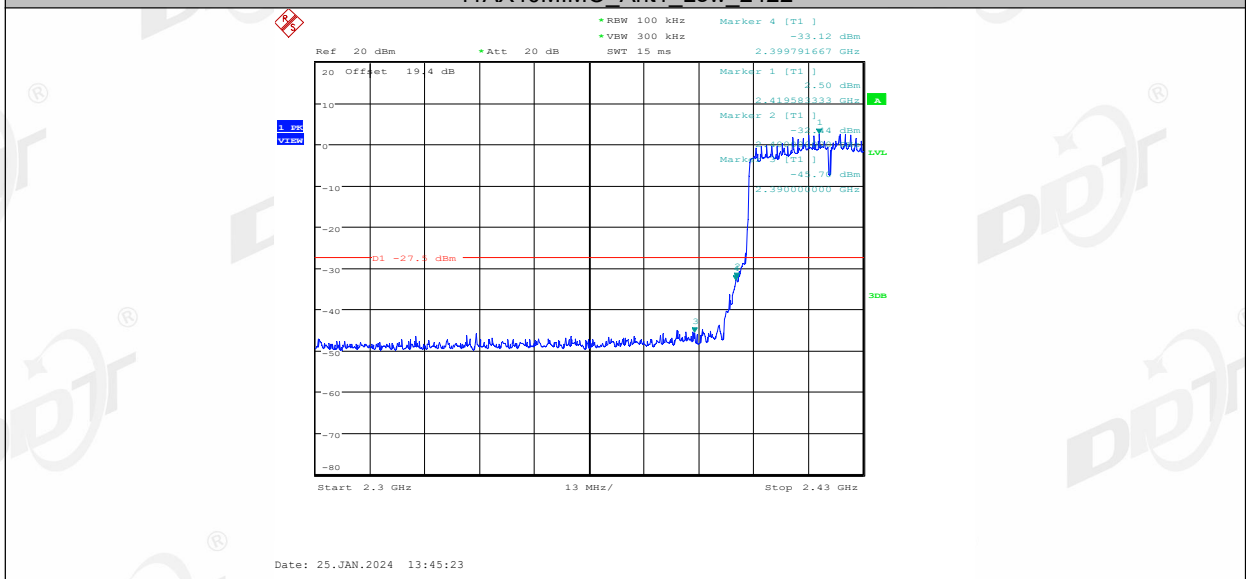


11AX40MIMO Ant2 Low 2422

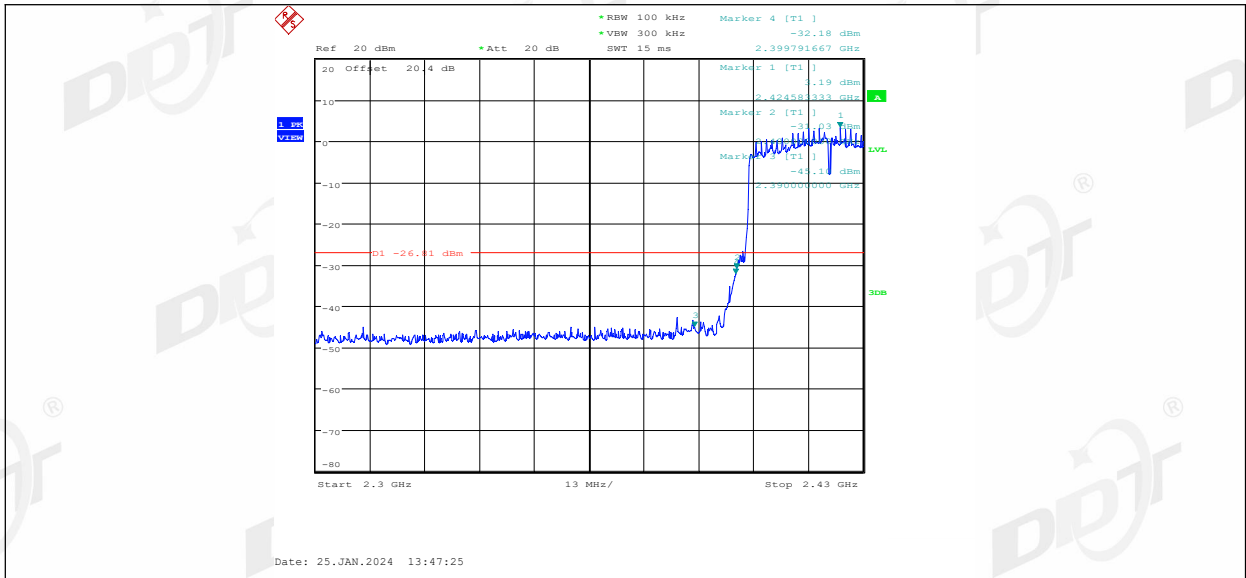

11AX40MIMO Ant1 High 2452

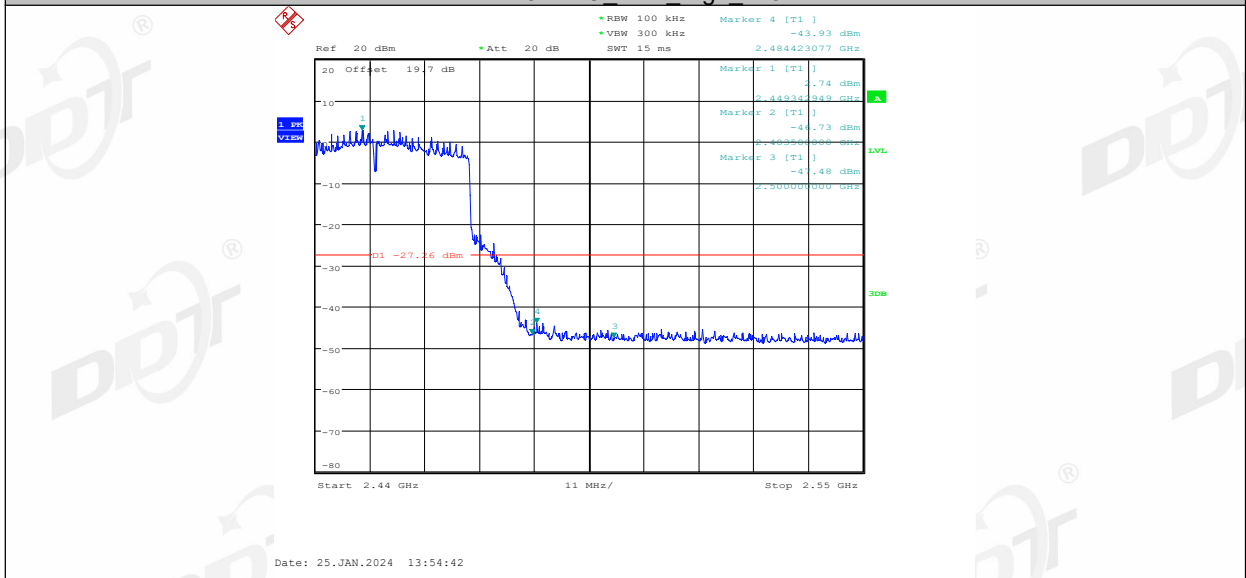


11AX40MIMO Ant2 High 2452

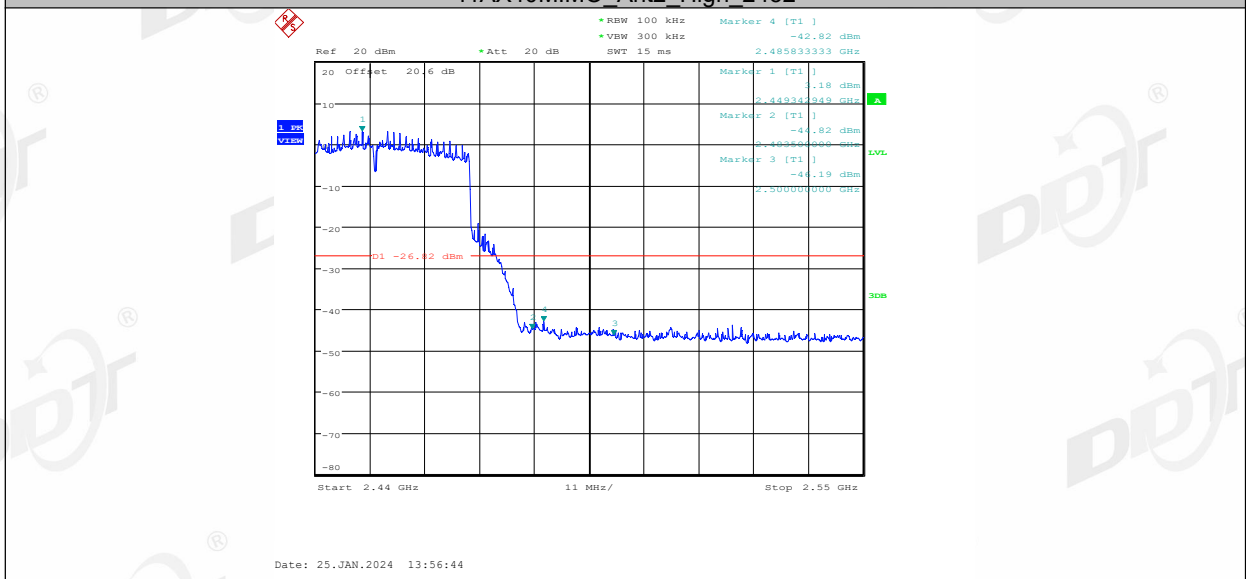

## 9. RF Conducted Spurious Emissions

### 9.1. Block diagram of test setup

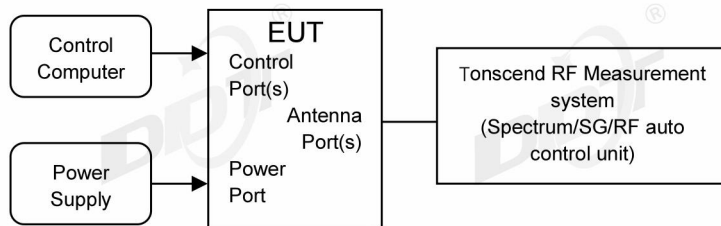

### 9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold




- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band




#### 9.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.6°C,64%RH	Test Date:	2024.01.29-2024.02.02
Test Power Supply:	AC230V/50Hz	EUT:	Mercku M6s Nano Mesh Wi-Fi Router
Sample Number:	S23111605-01	Model No.:	MBAA0


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass

### 9.5. Test graphs

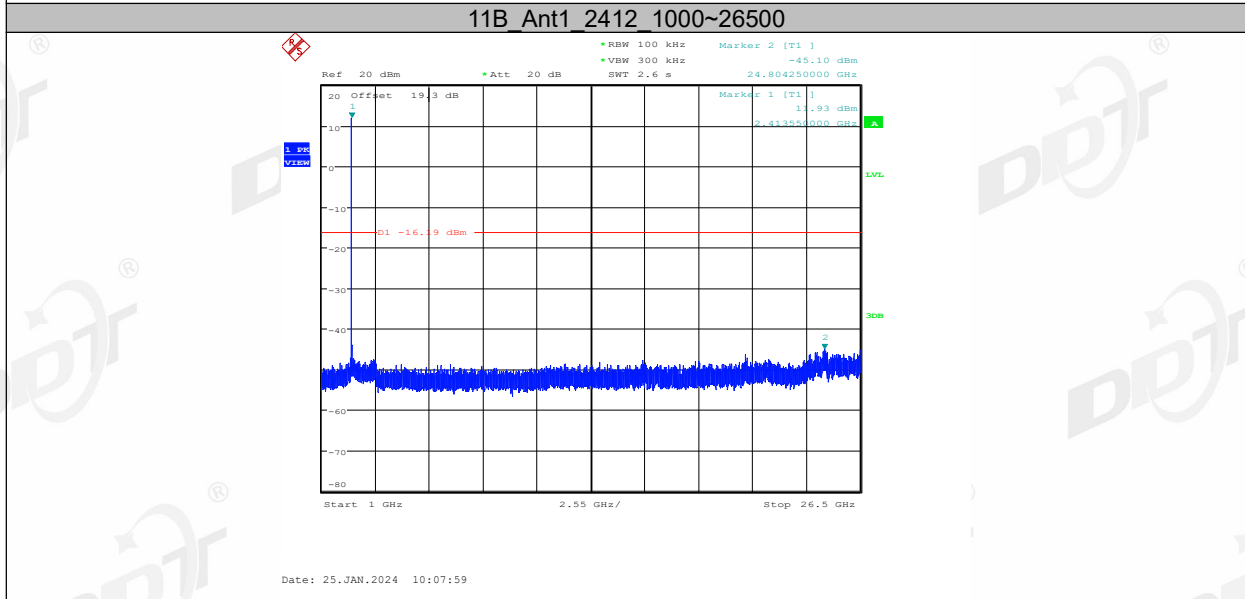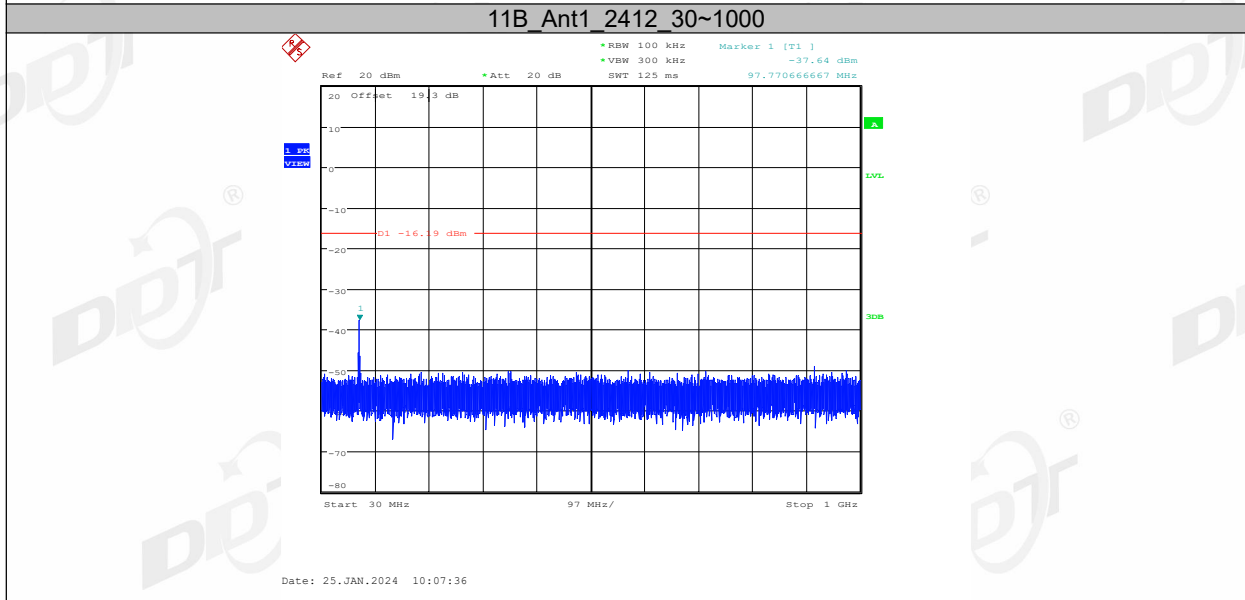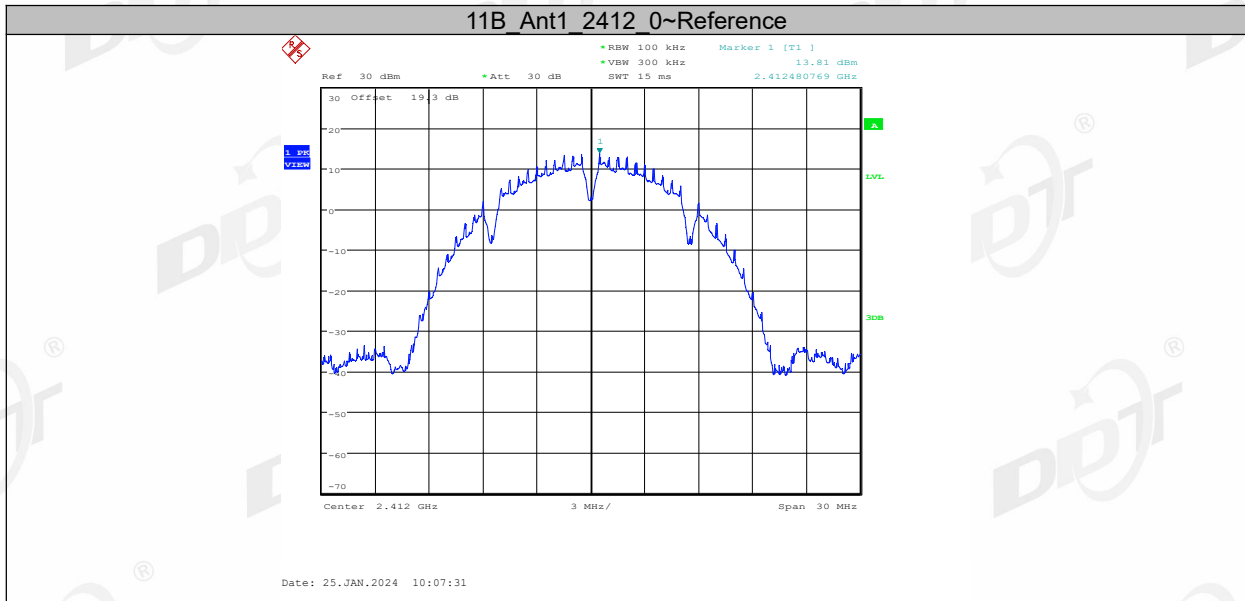


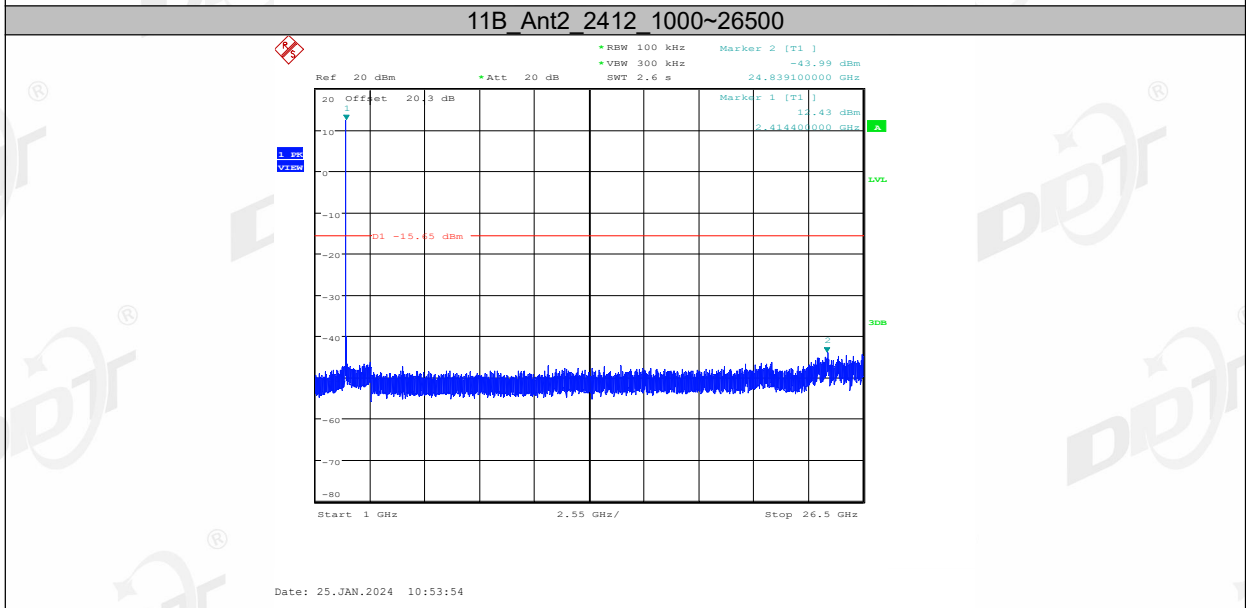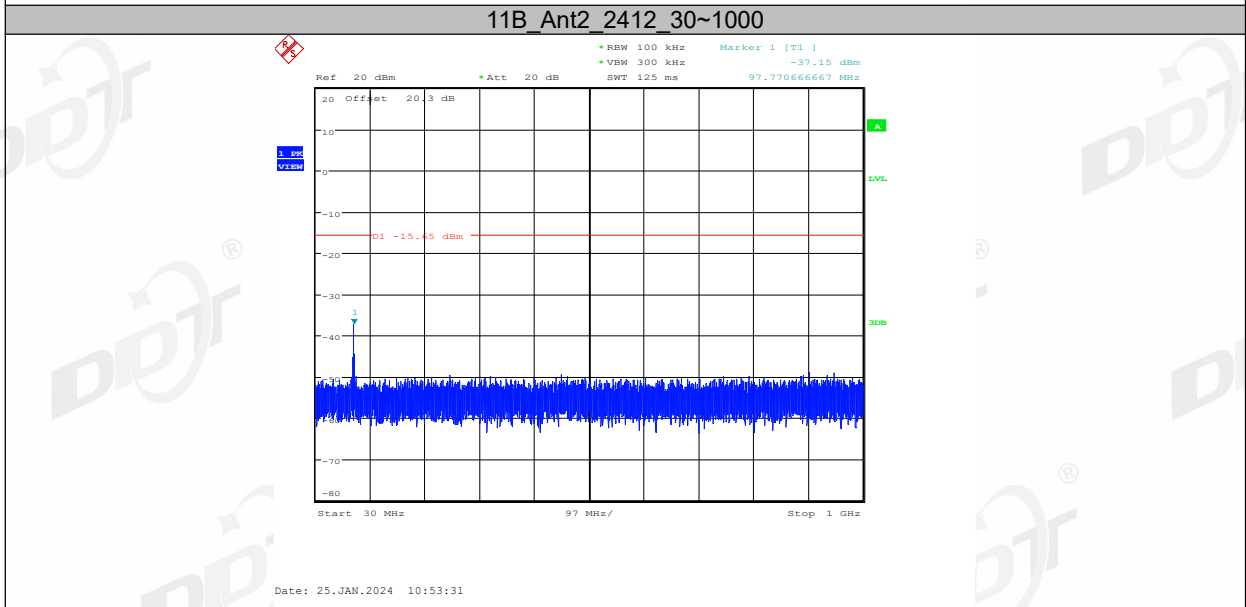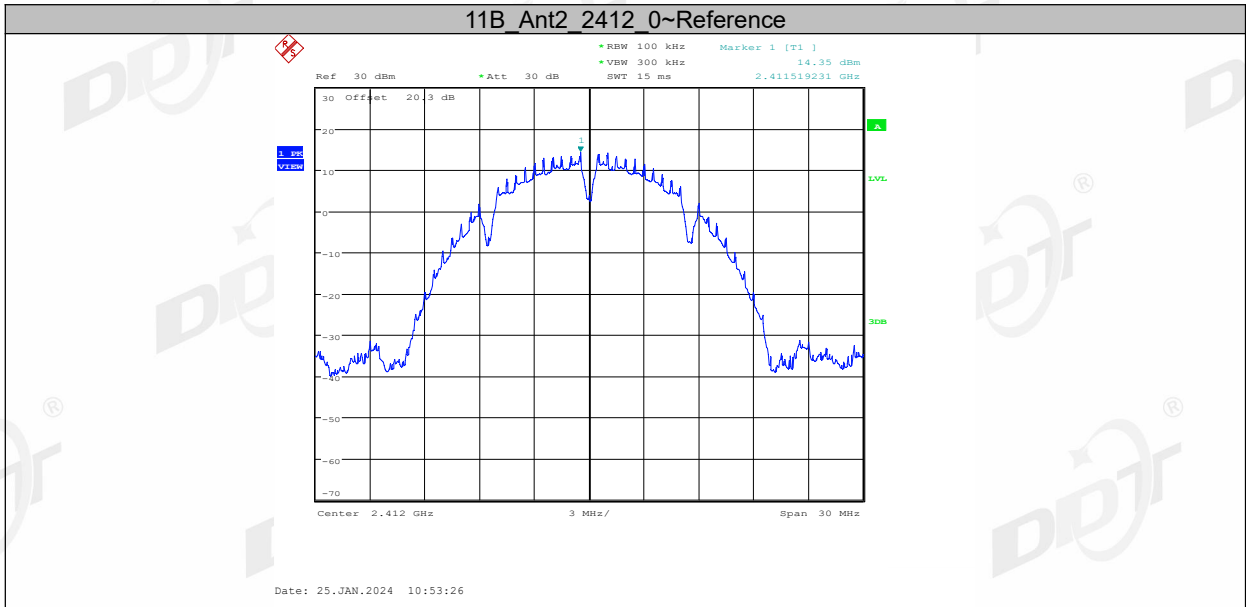


11B\_Ant1\_2437\_0~Reference

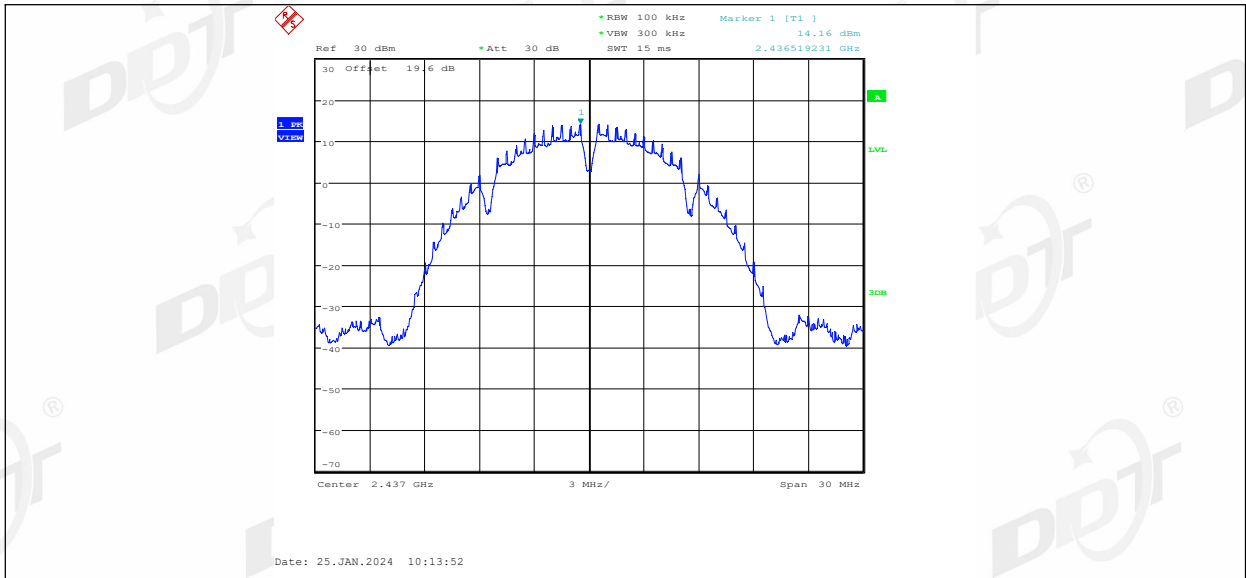


11B Ant1 2437 30~1000

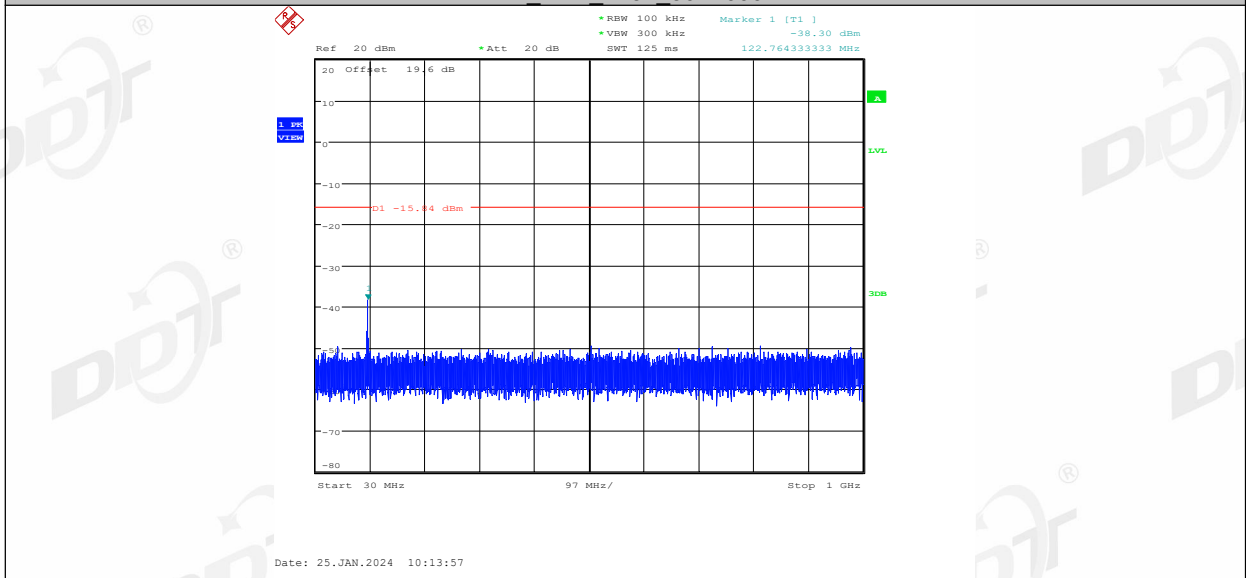


11B Ant1 2437 1000~26500

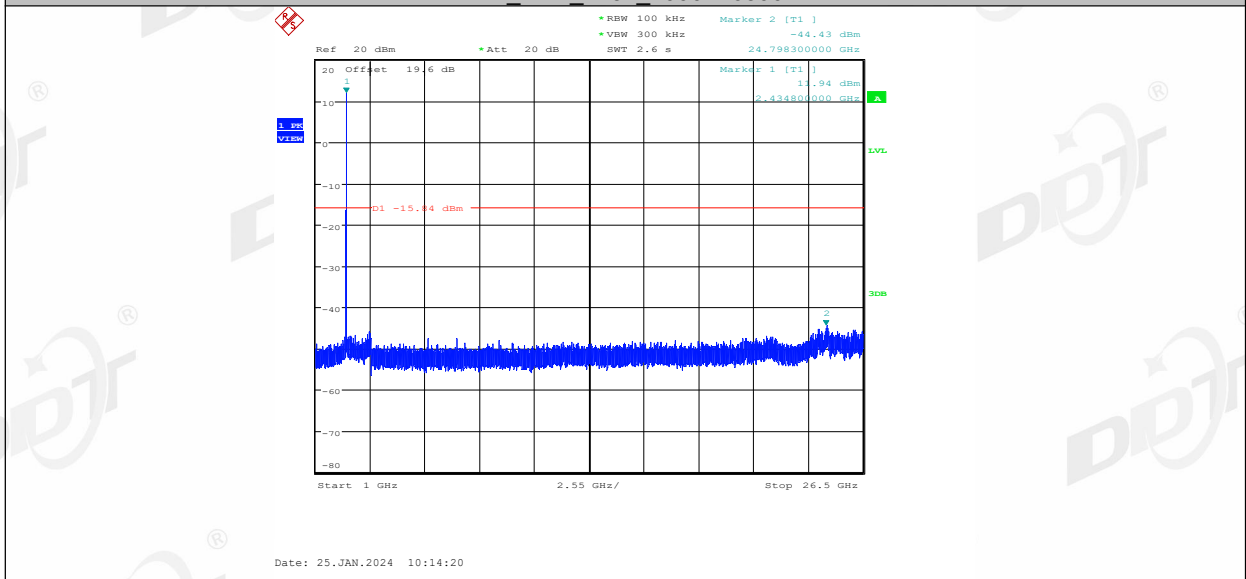


11B Ant2 2437 0~Reference

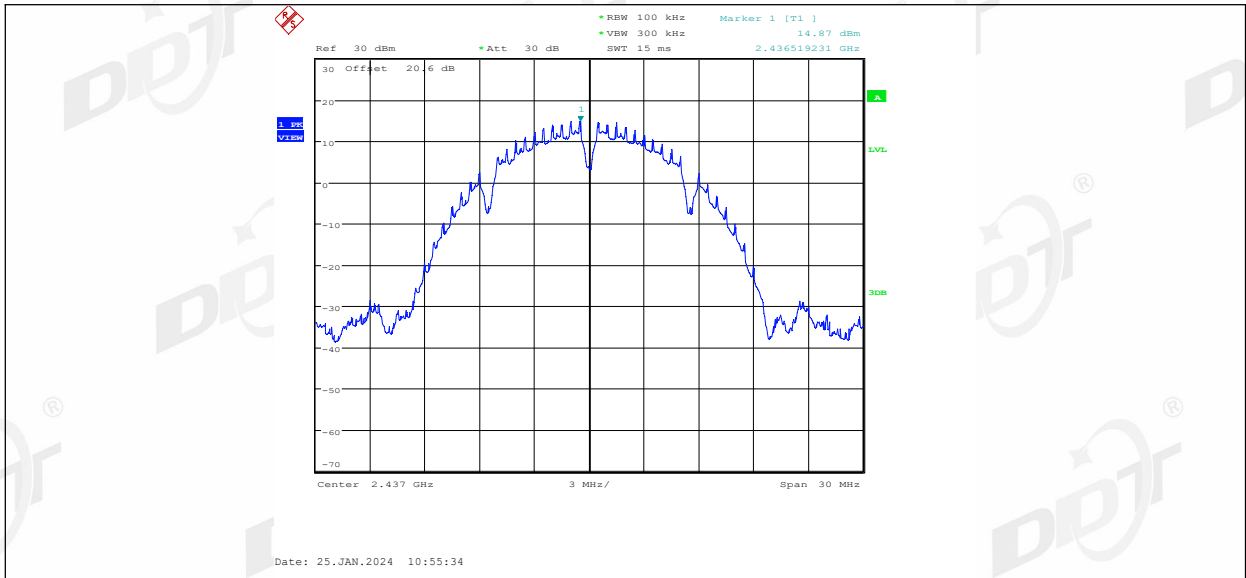

11B Ant2 2437 30~1000

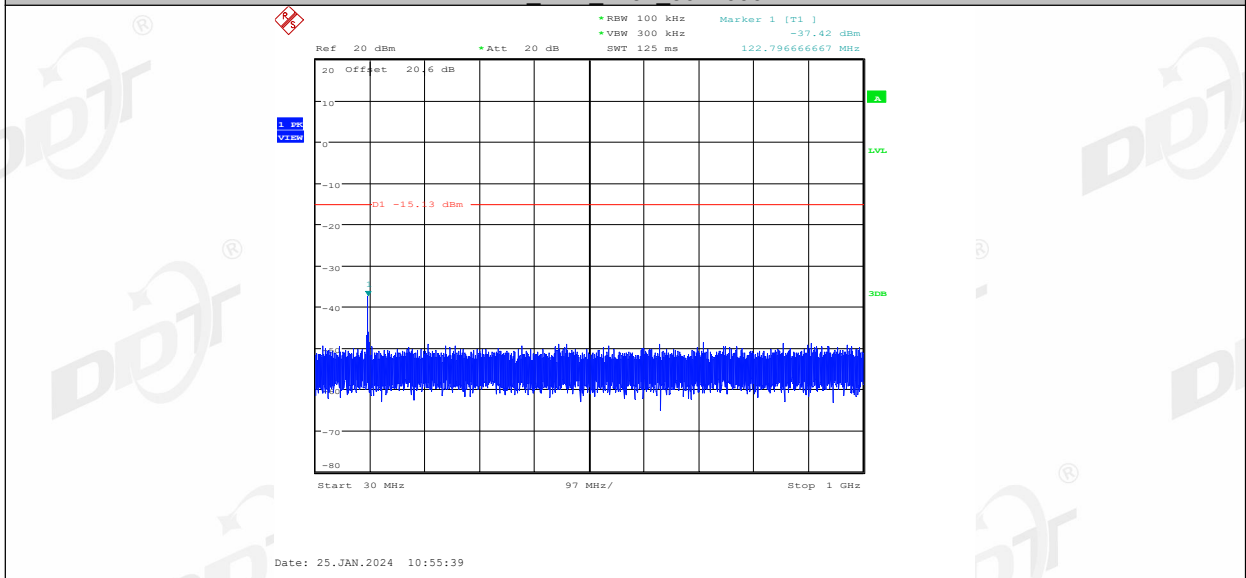


11B Ant2 2437 1000~26500

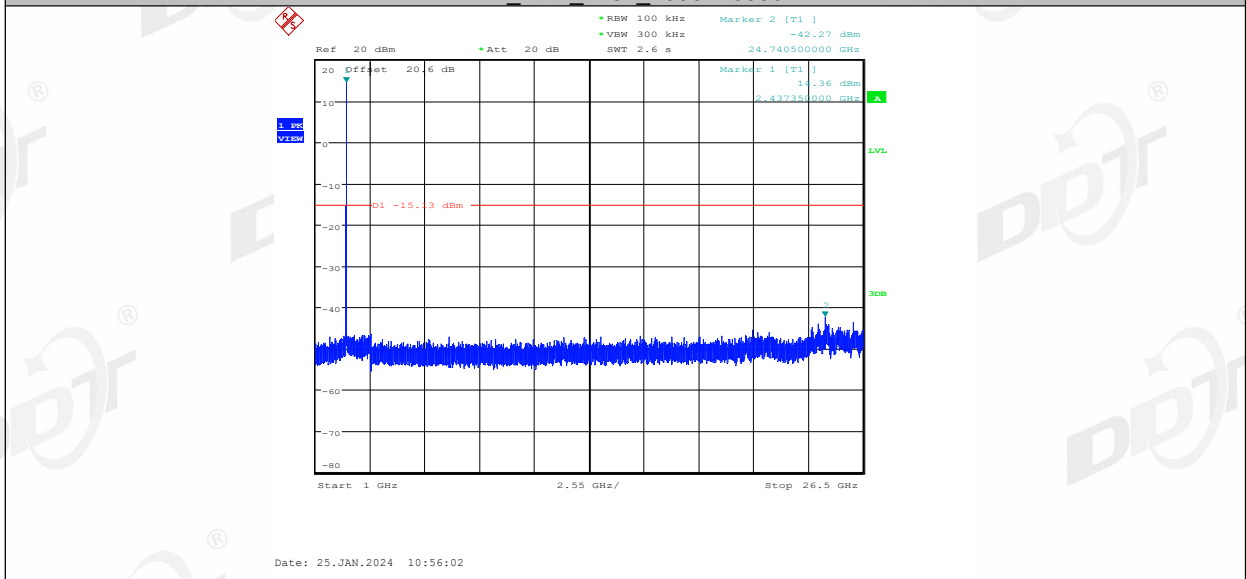


11B Ant1 2462 0~Reference




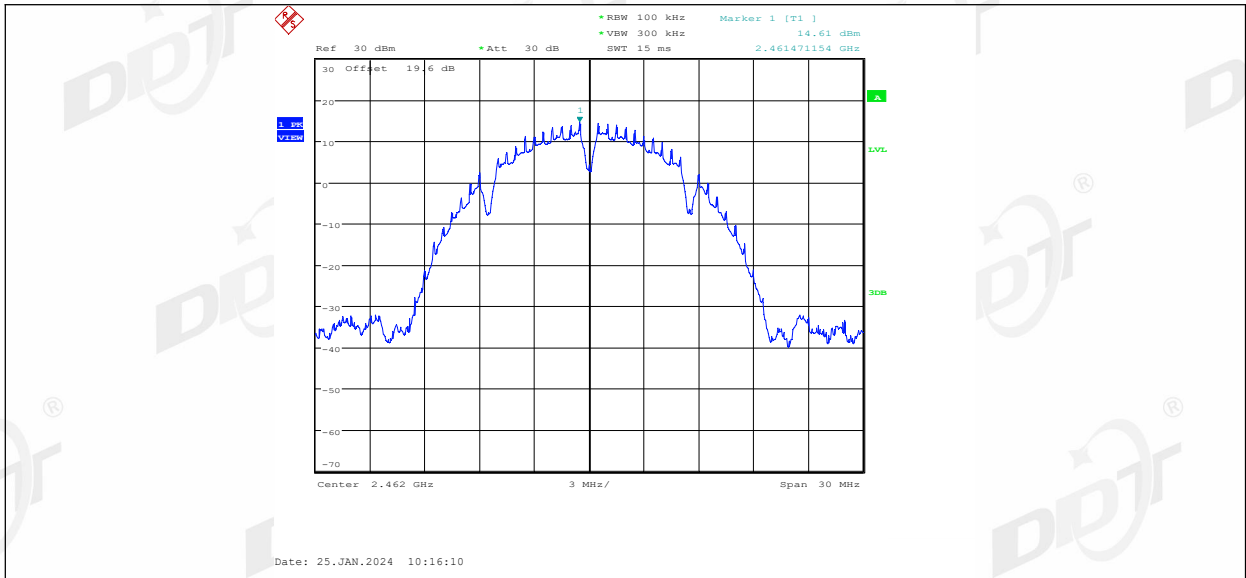


11B Ant1 2462\_30~1000

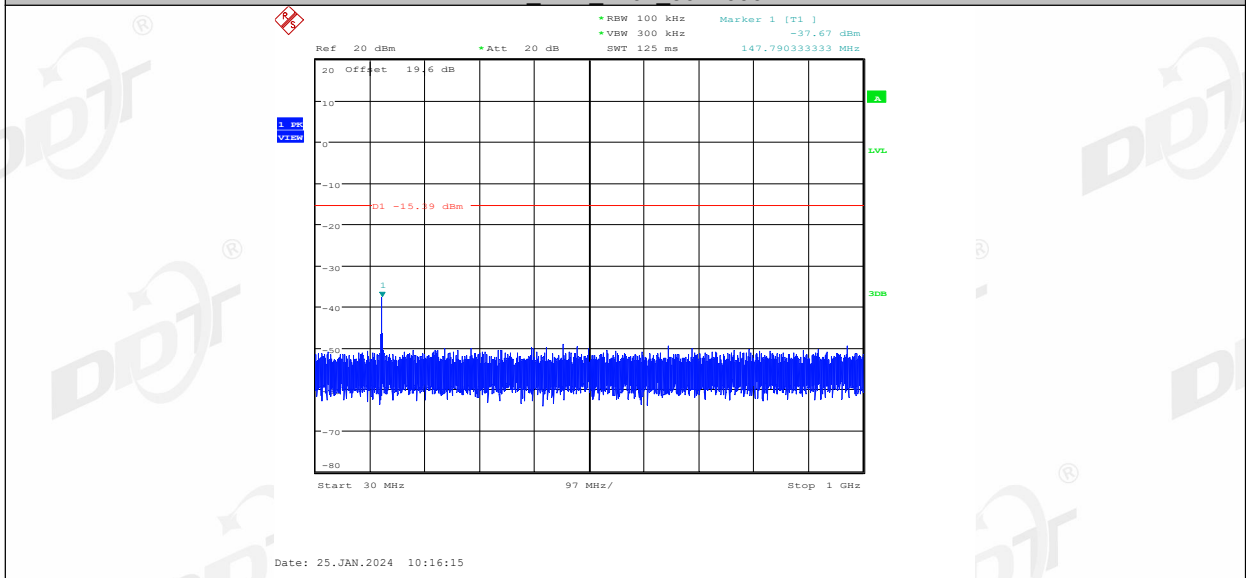


11B Ant1 2462\_1000~26500

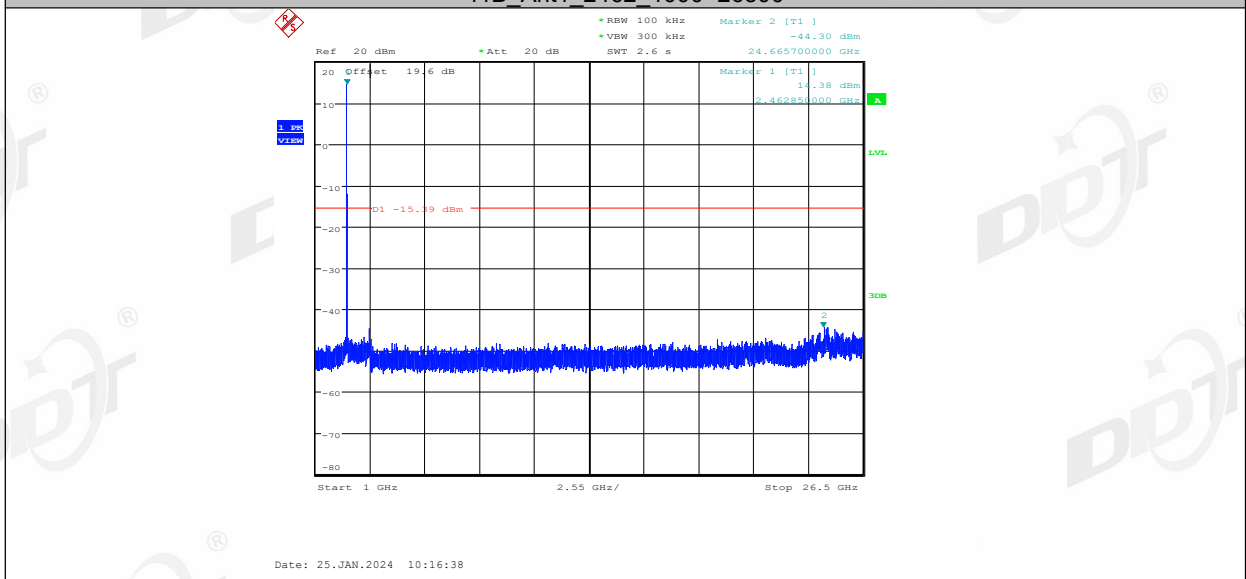


11B Ant2 2462\_0~Reference

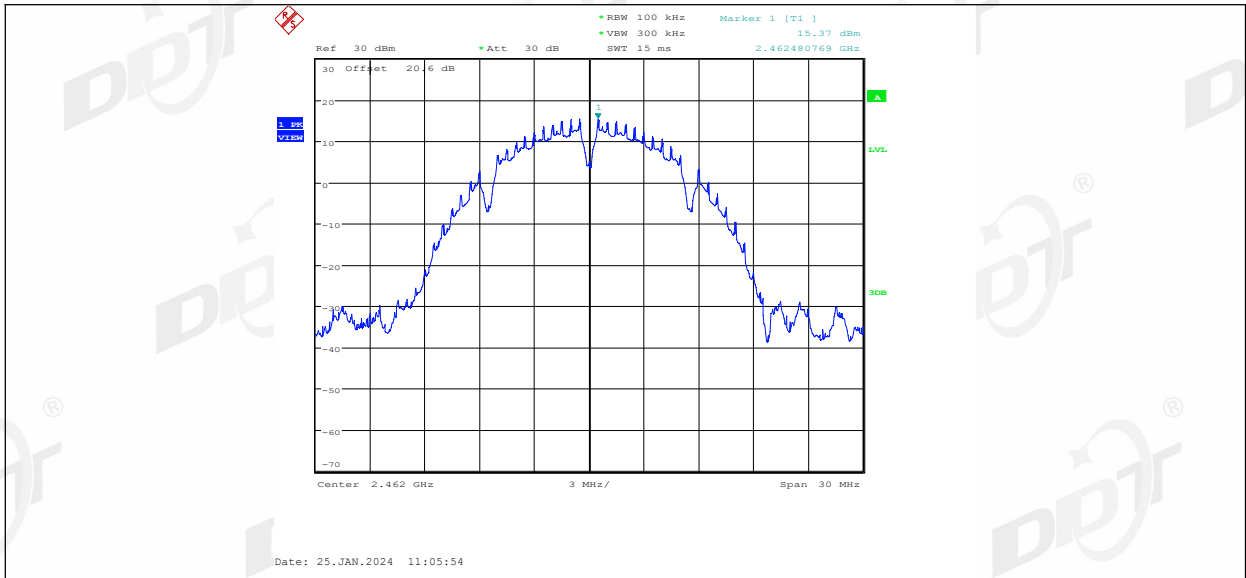


11B Ant2\_2462\_30~1000

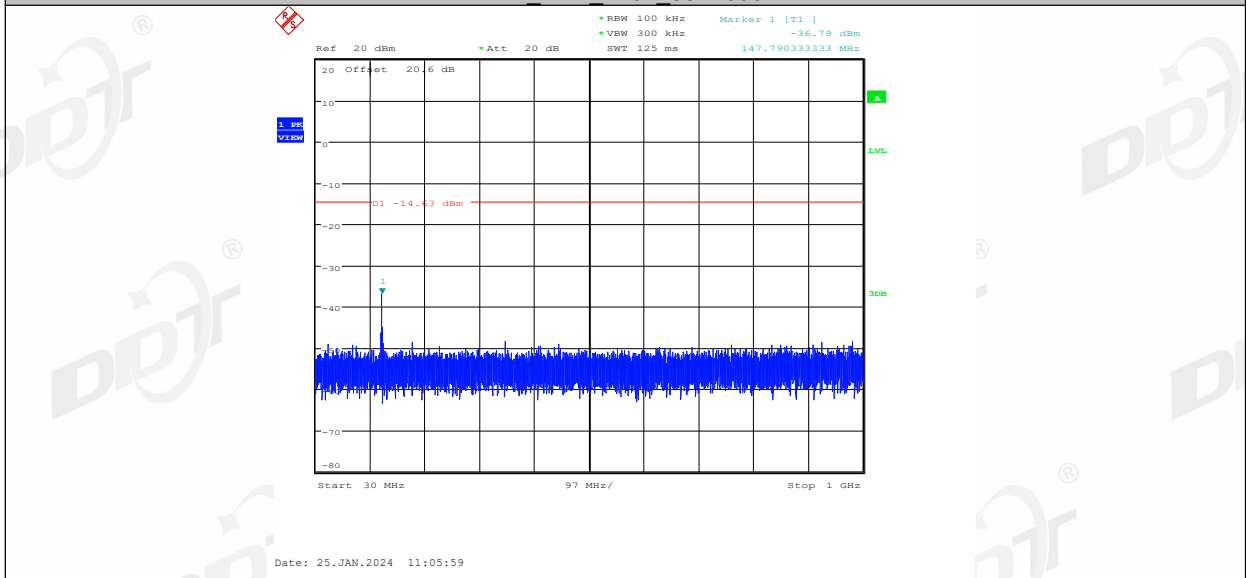


11B Ant2\_2462\_1000~26500

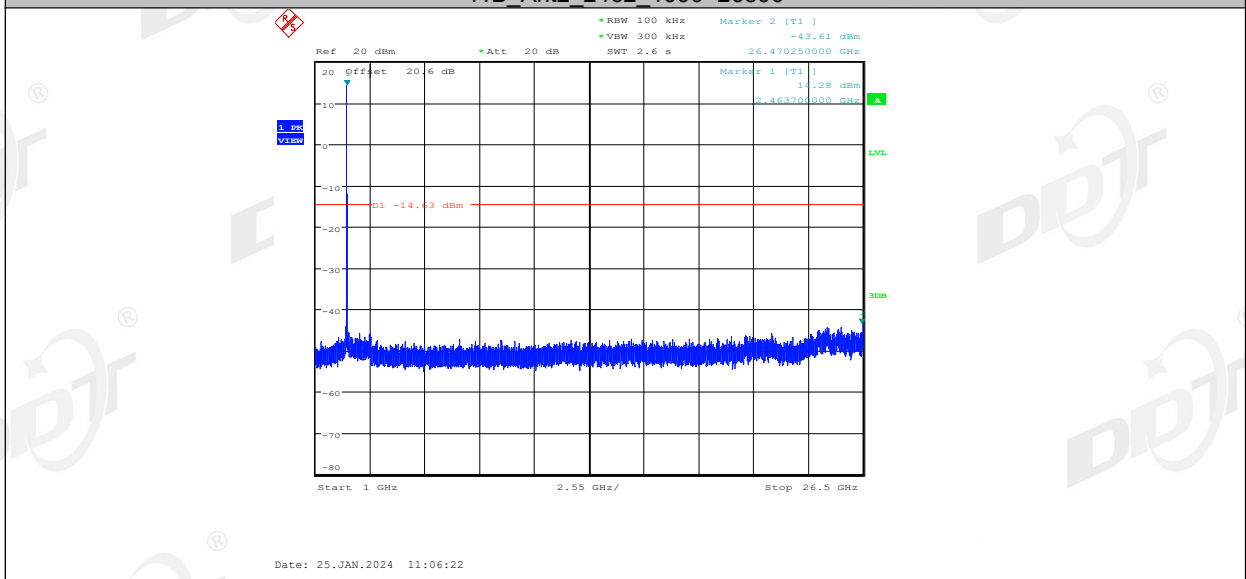


11G\_Ant1\_2412\_0~Reference

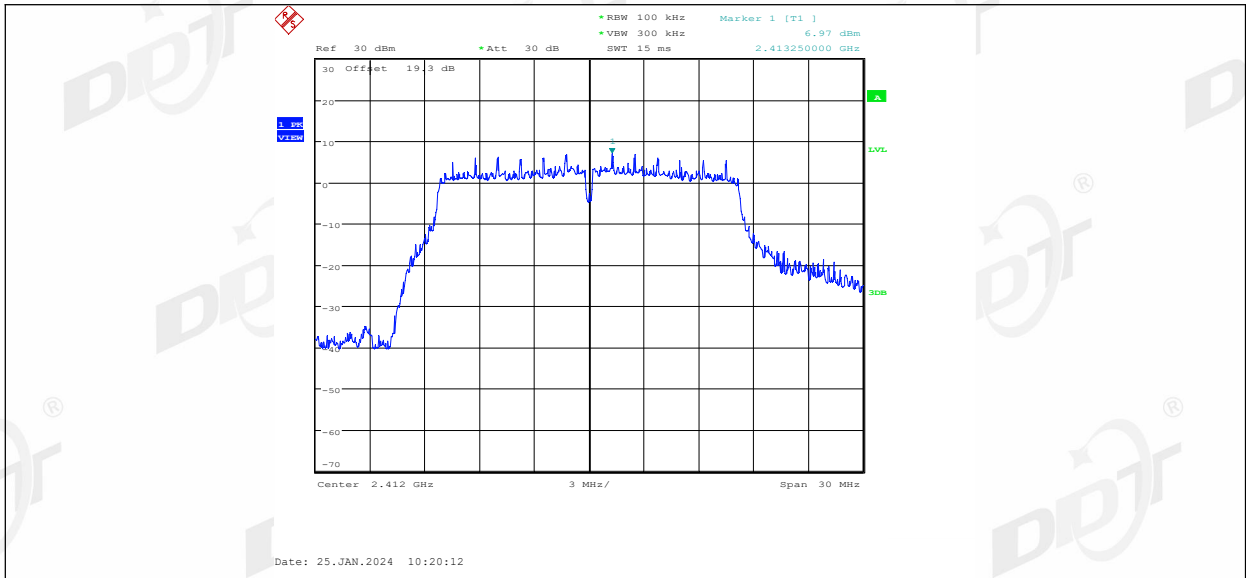


11G Ant1 2412\_30~1000

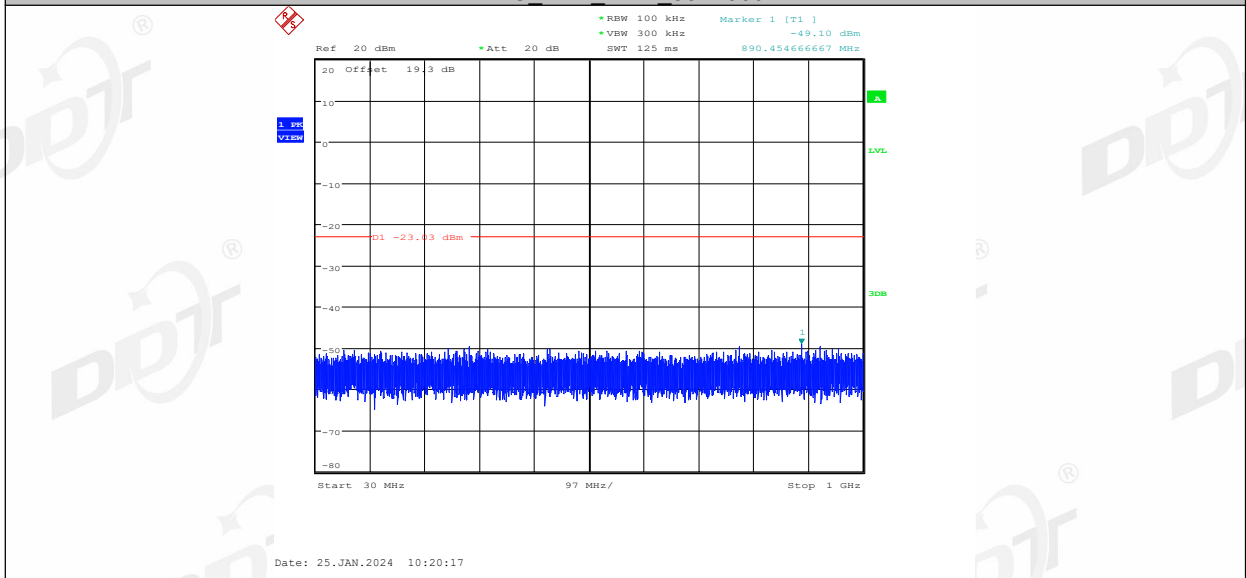


11G Ant1 2412\_1000~26500

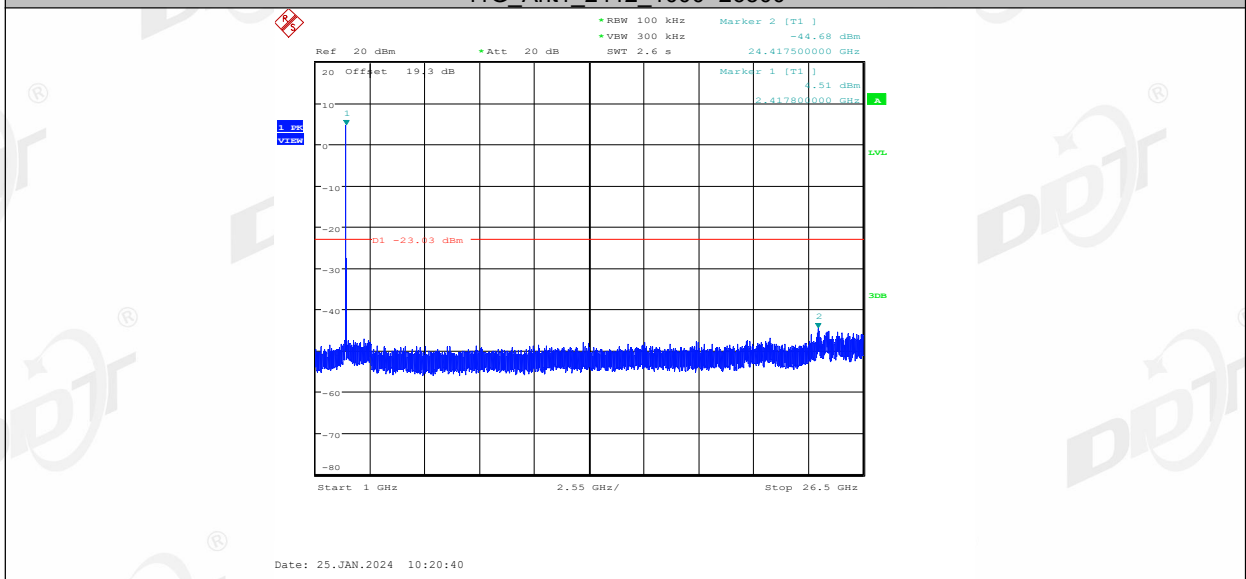


11G\_Ant2\_2412\_0~Reference

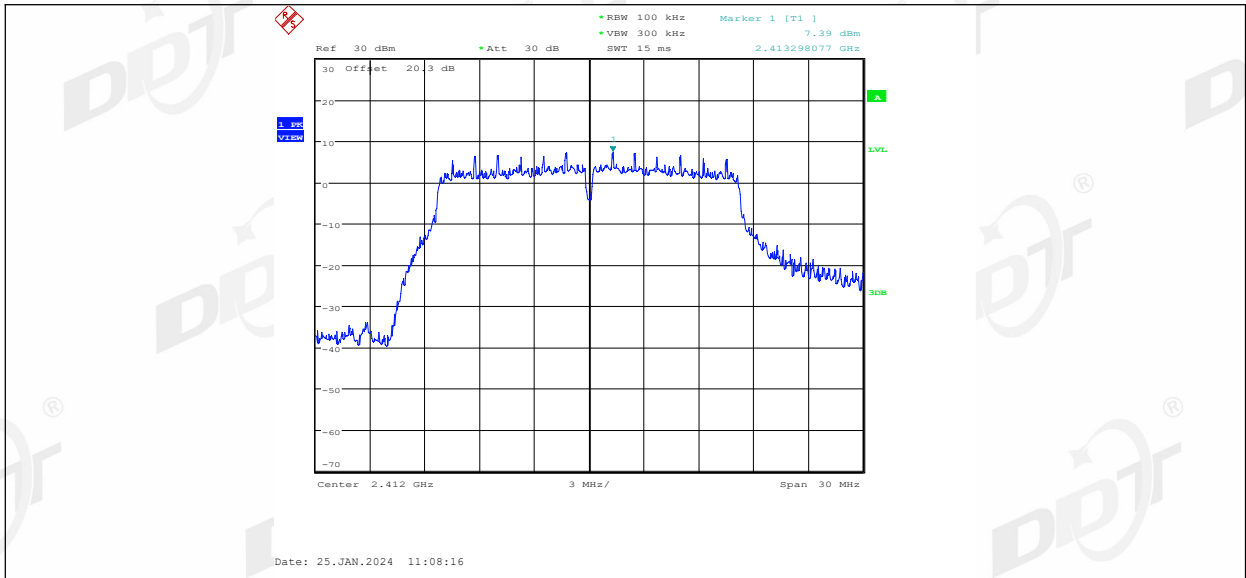


11G Ant2 2412\_30~1000

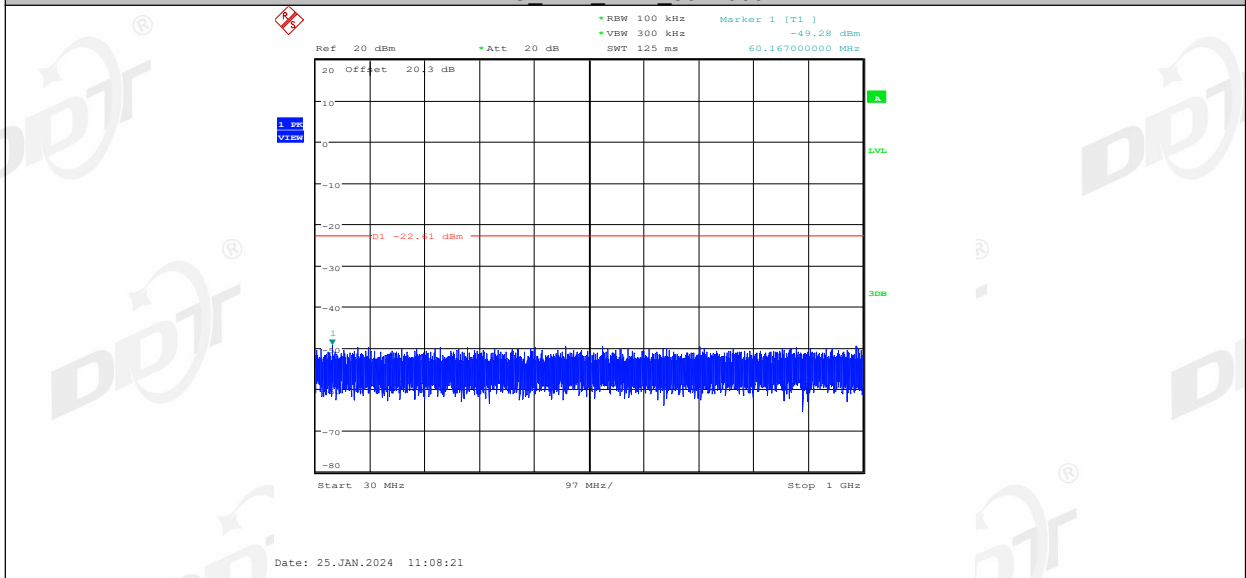


11G Ant2 2412\_1000~26500

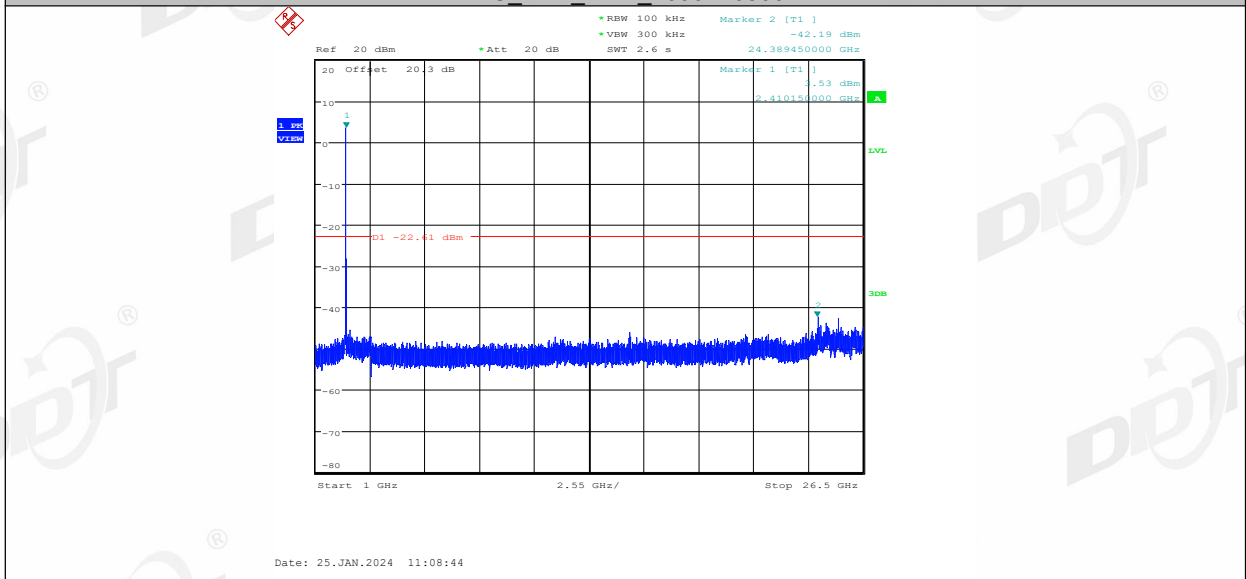


11G Ant1 2437\_0~Reference

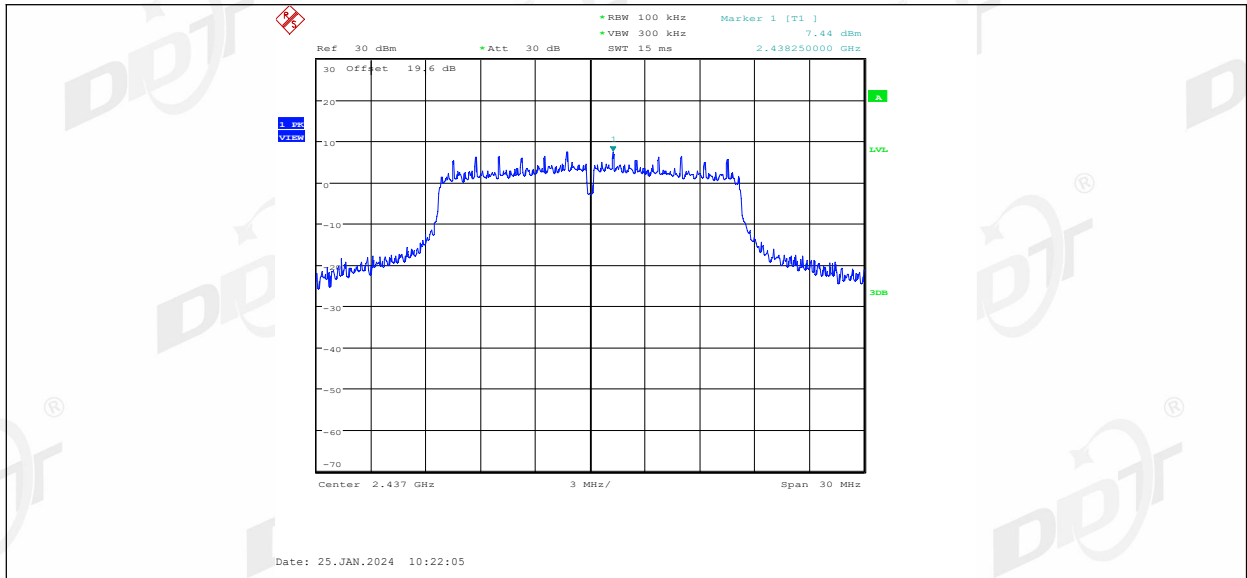


11G Ant1 2437 30~1000

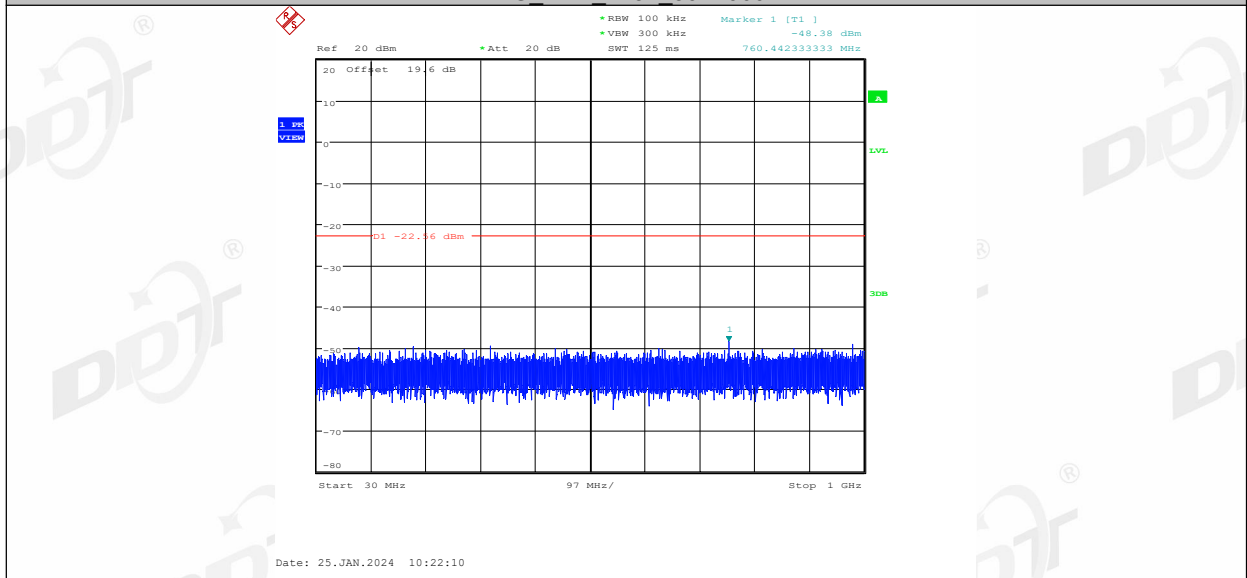


11G Ant1 2437 1000~26500

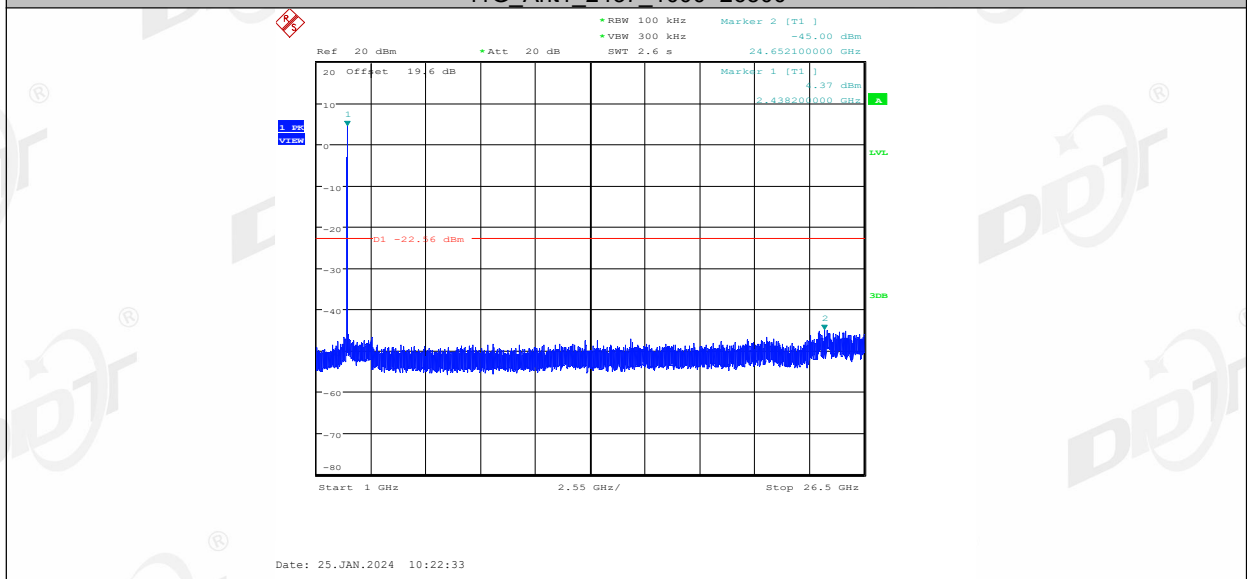


11G Ant2 2437 0~Reference

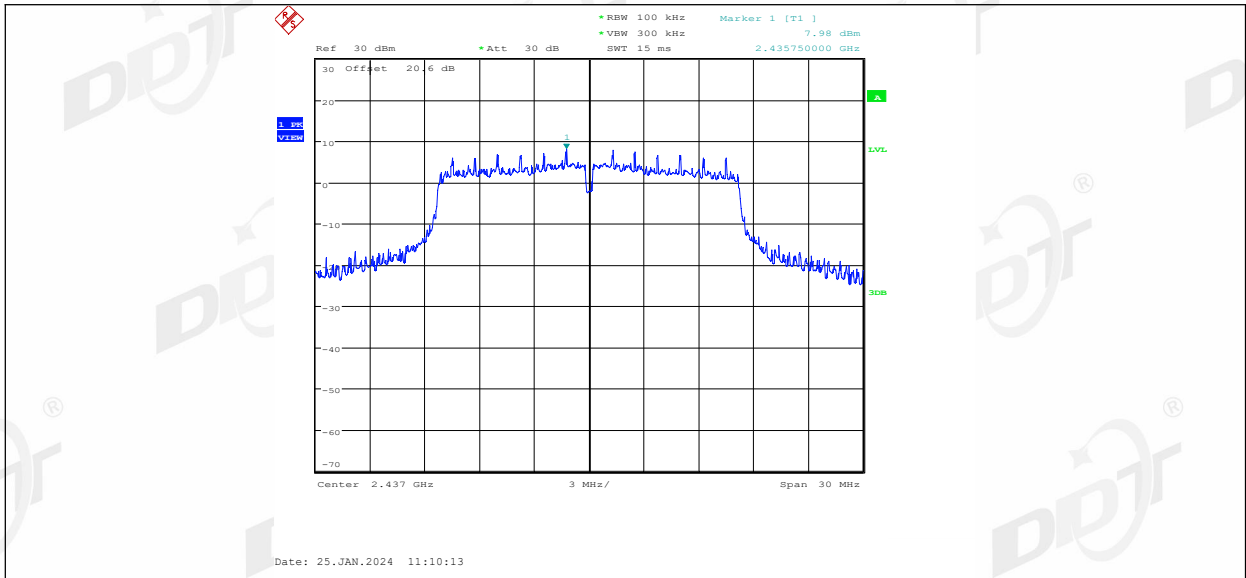


11G Ant2 2437 30~1000

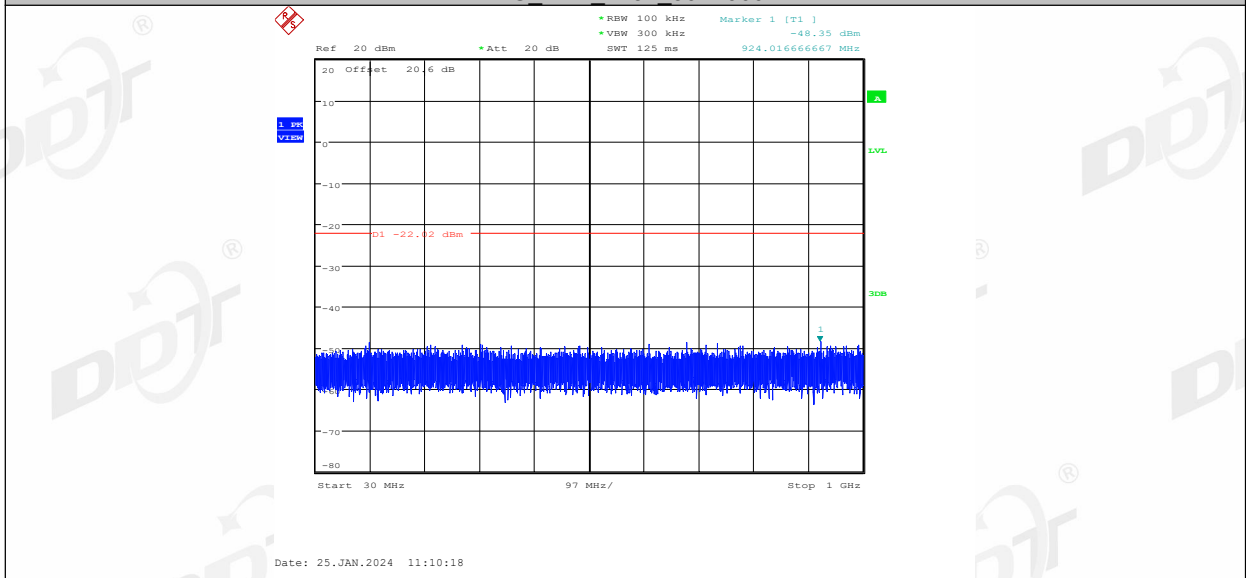


11G Ant2 2437 1000~26500

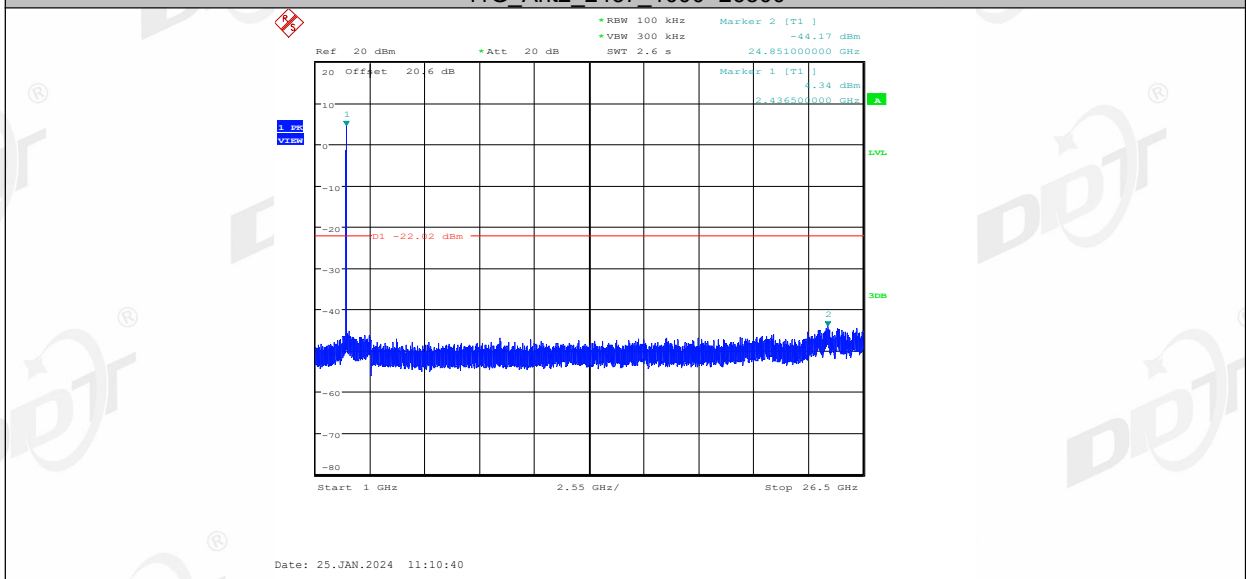


11G Ant1 2462 0~Reference

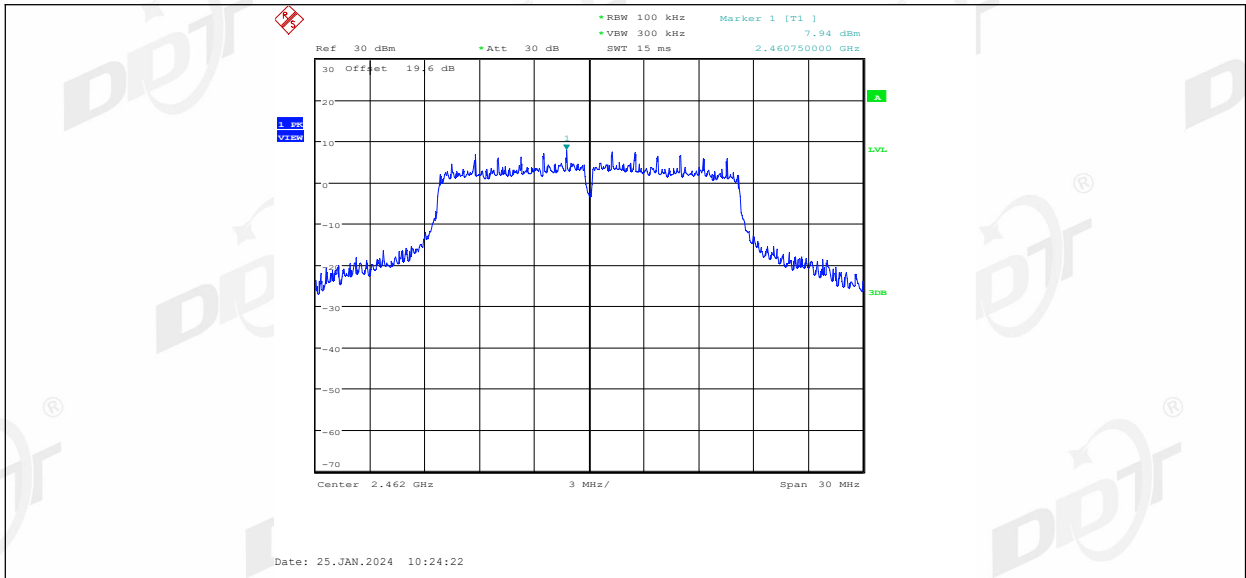


11G Ant1\_2462\_30~1000

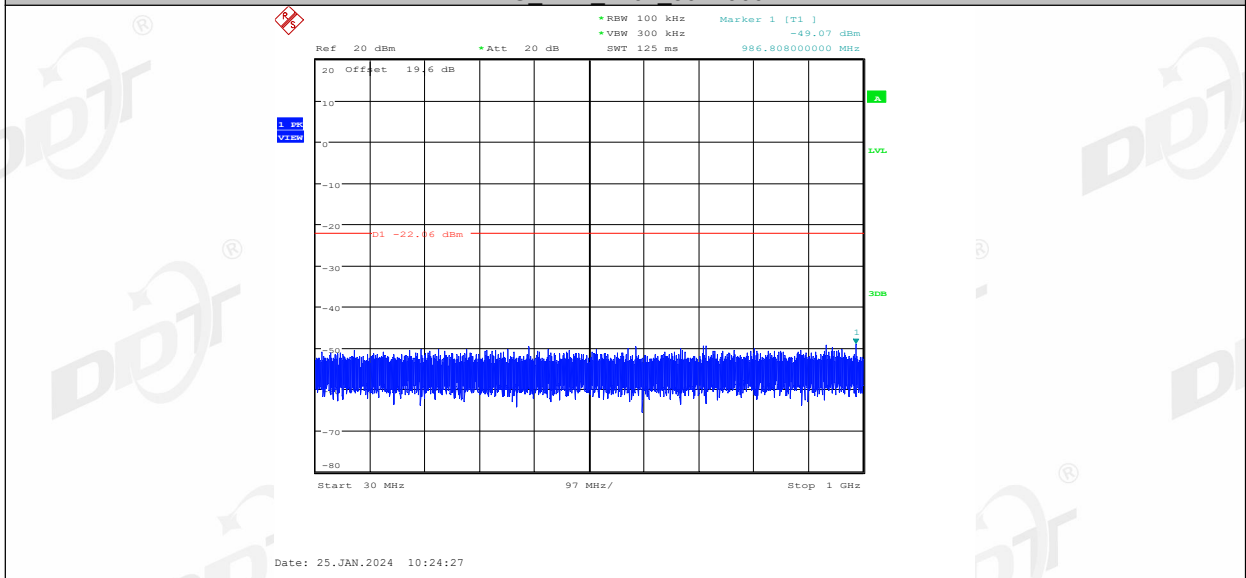


11G Ant1\_2462\_1000~26500

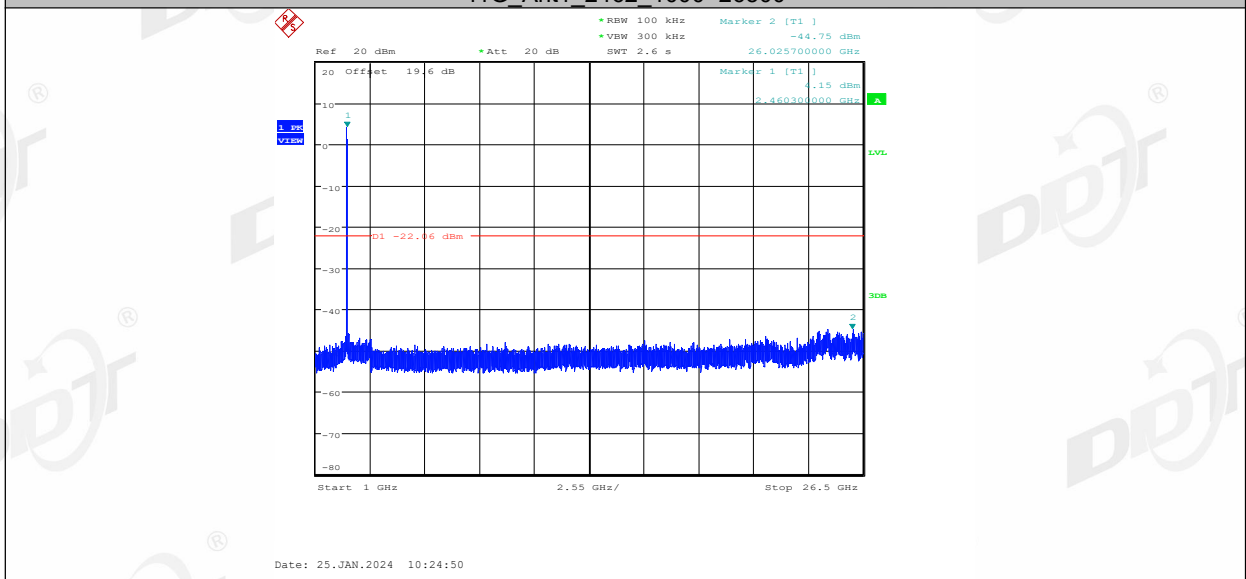


11G\_Ant2\_2462\_0~Reference

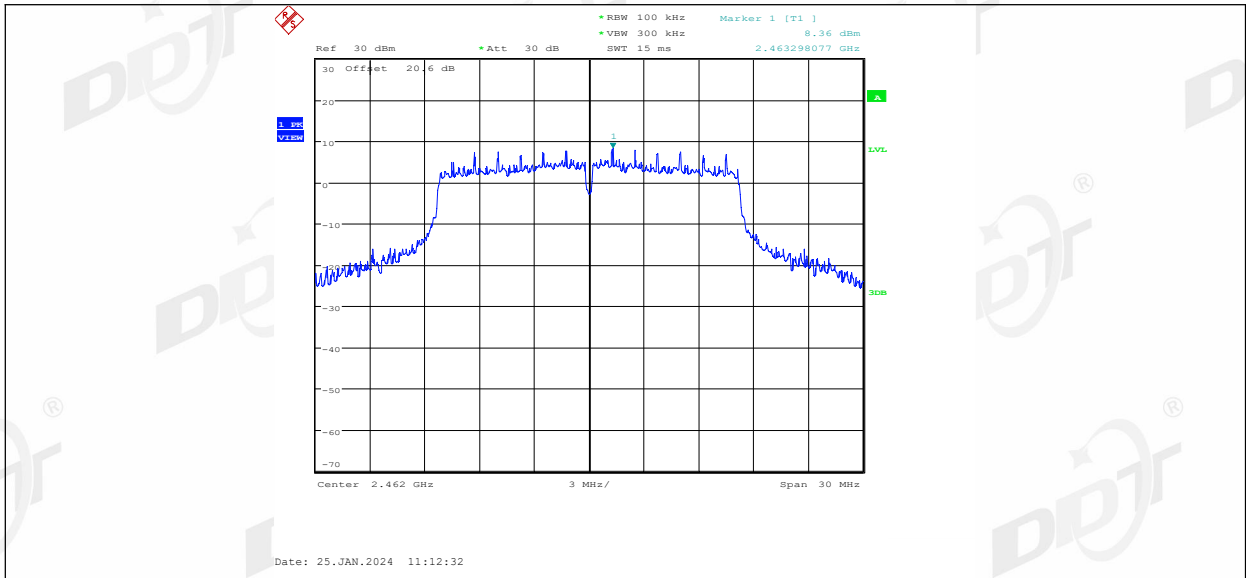

11G Ant2\_2462\_30~1000

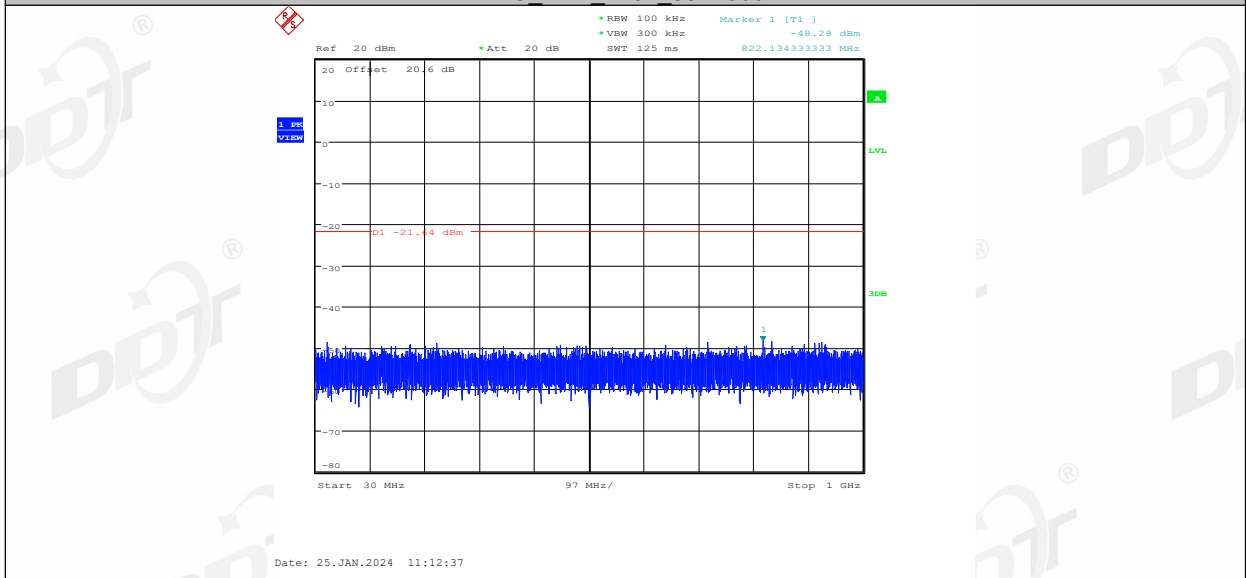


11G Ant2\_2462\_1000~26500

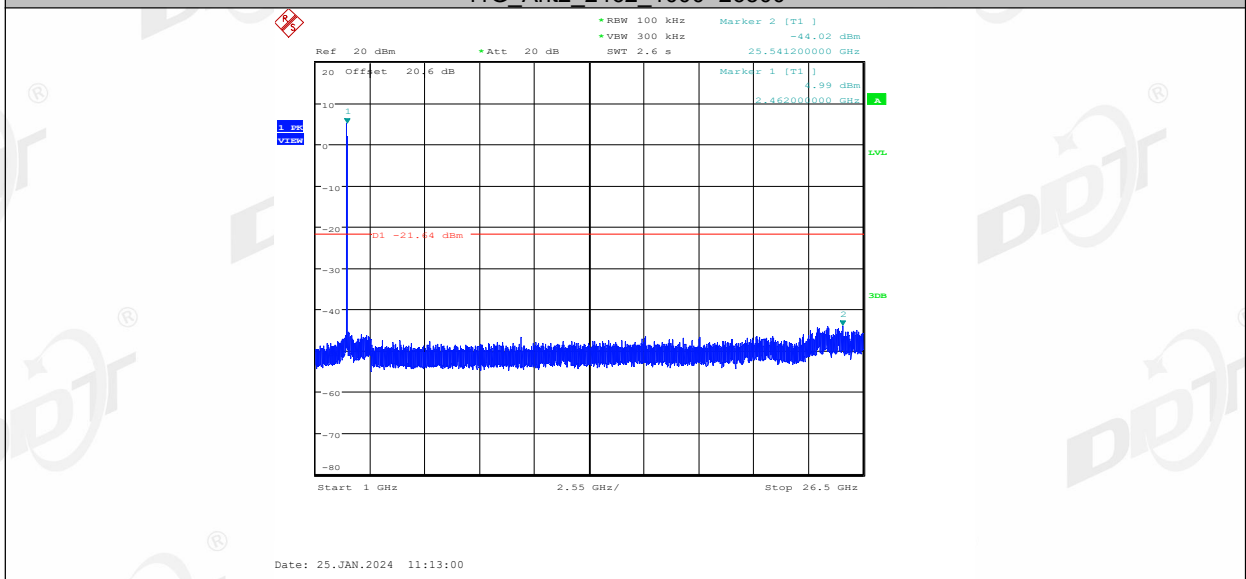


11N20MIMO\_Ant1\_2412\_0~Reference




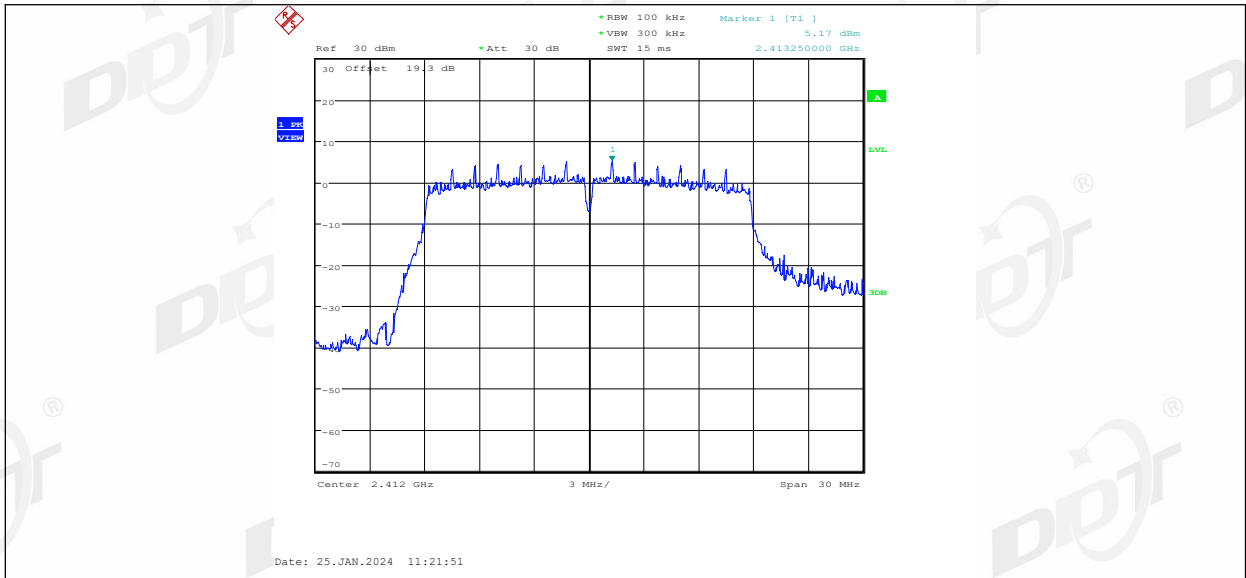


11N20MIMO Ant1 2412 30~1000

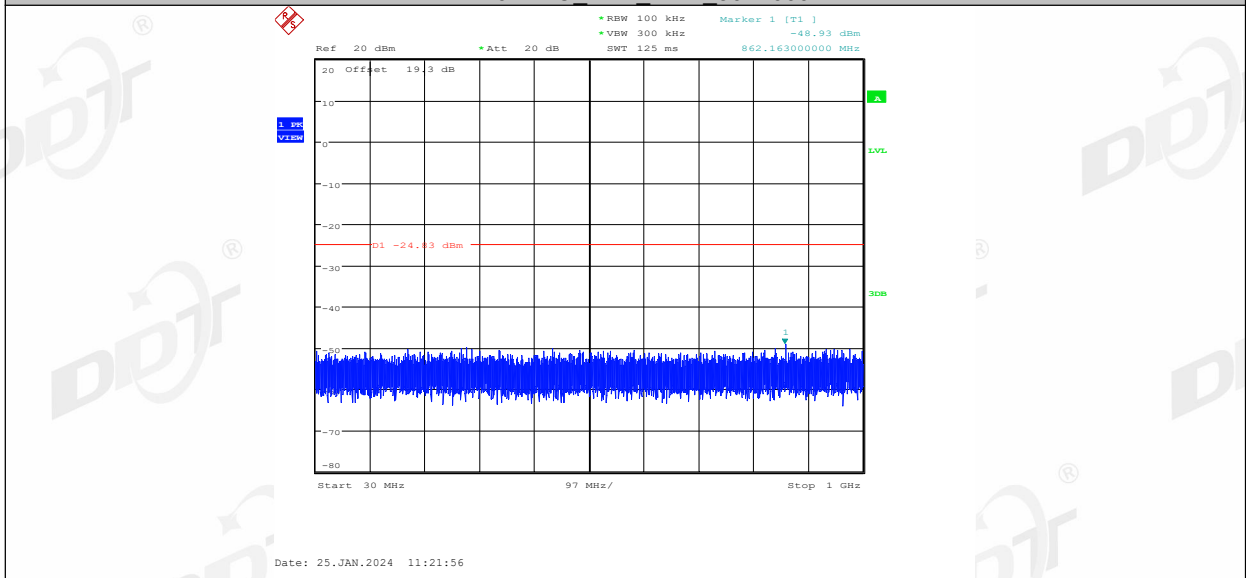


11N20MIMO Ant1 2412 1000~26500

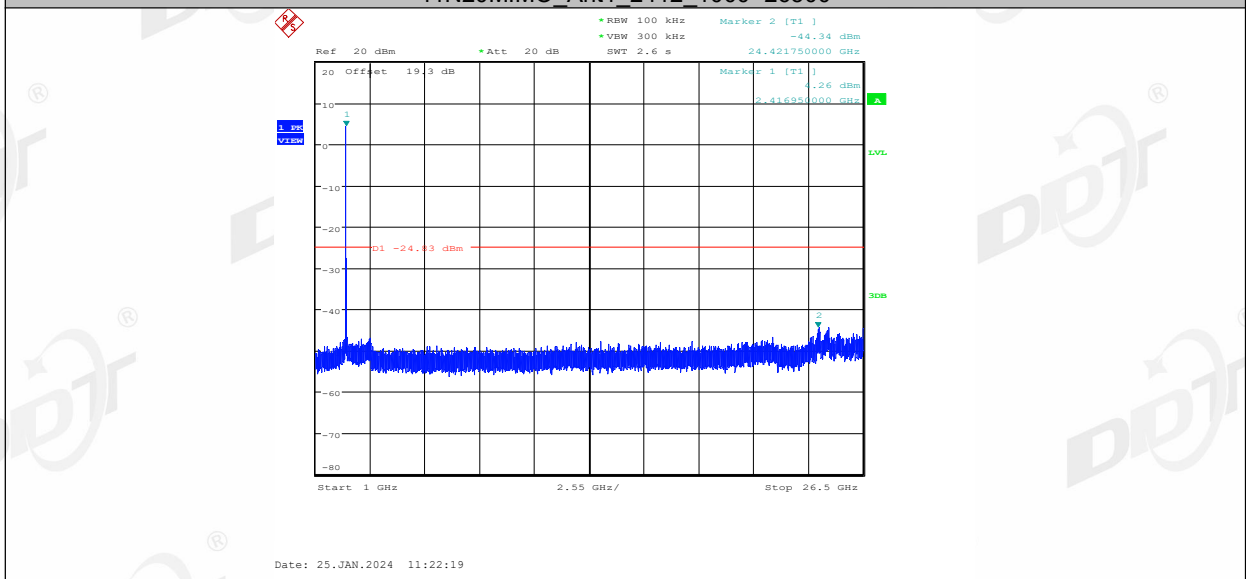


11N20MIMO Ant2 2412 0~Reference

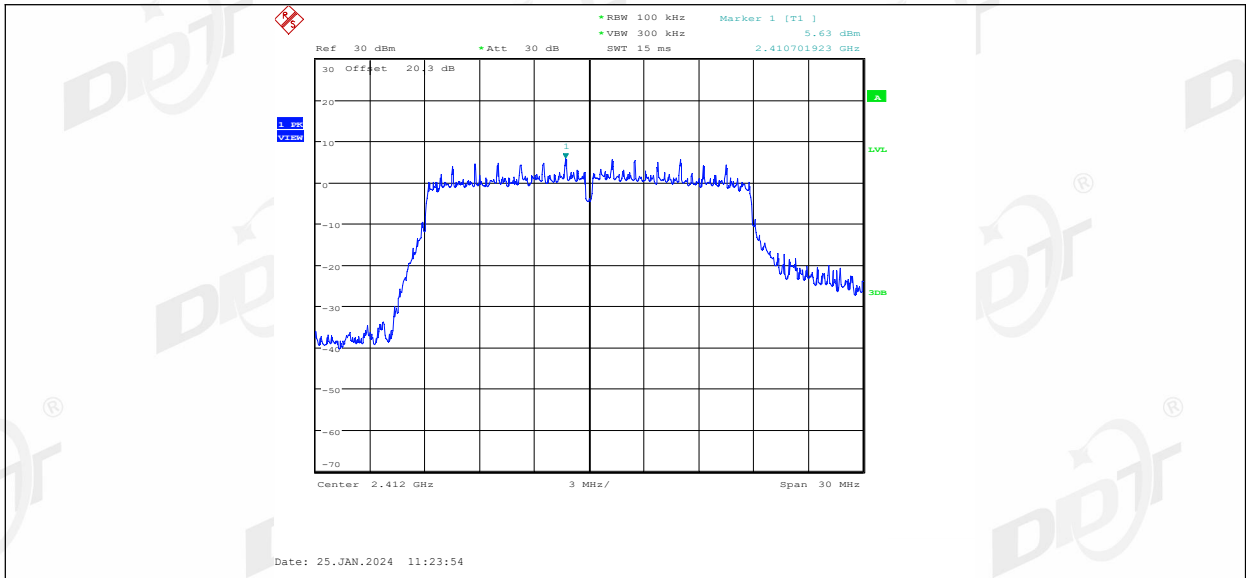


11N20MIMO Ant2 2412 30~1000

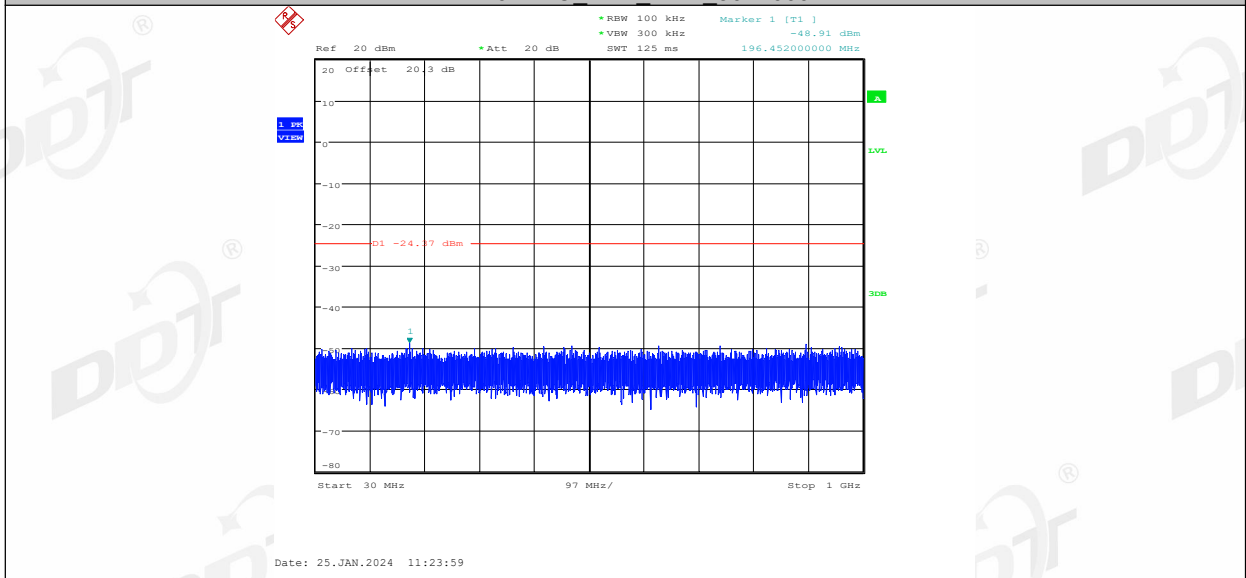


11N20MIMO Ant2 2412 1000~26500

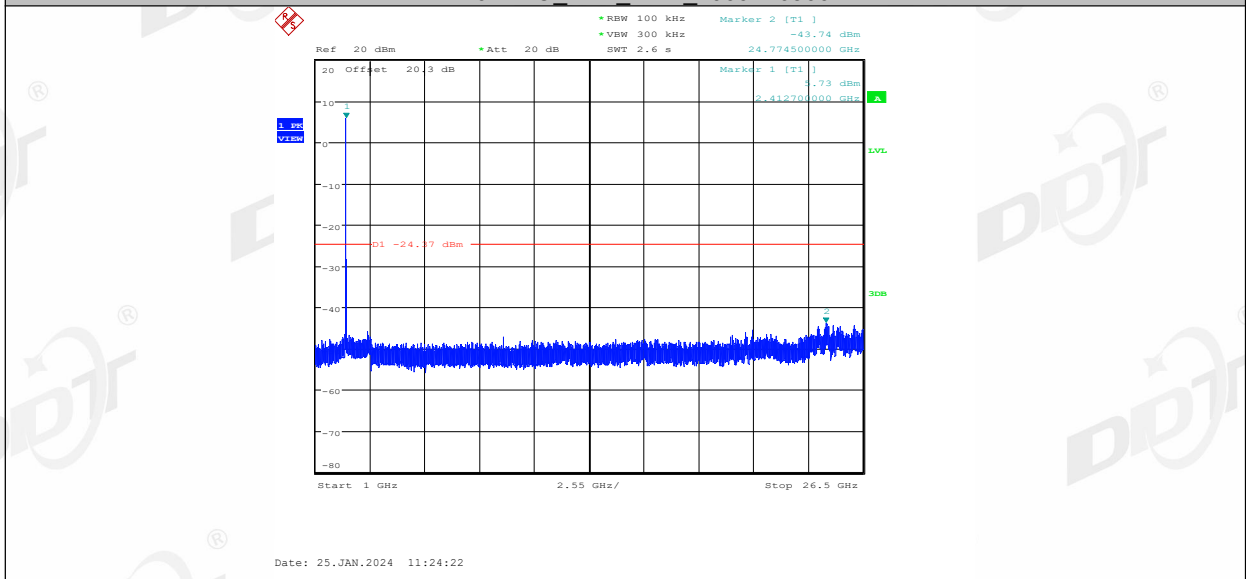


11N20MIMO Ant1 2437 0~Reference

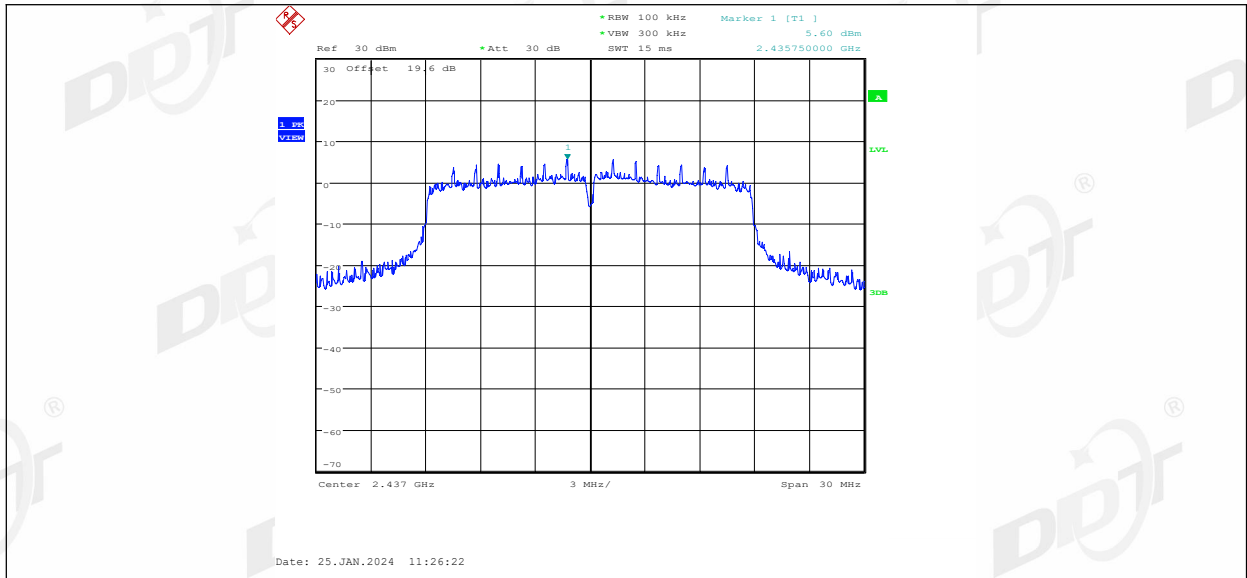


11N20MIMO Ant1 2437 30~1000

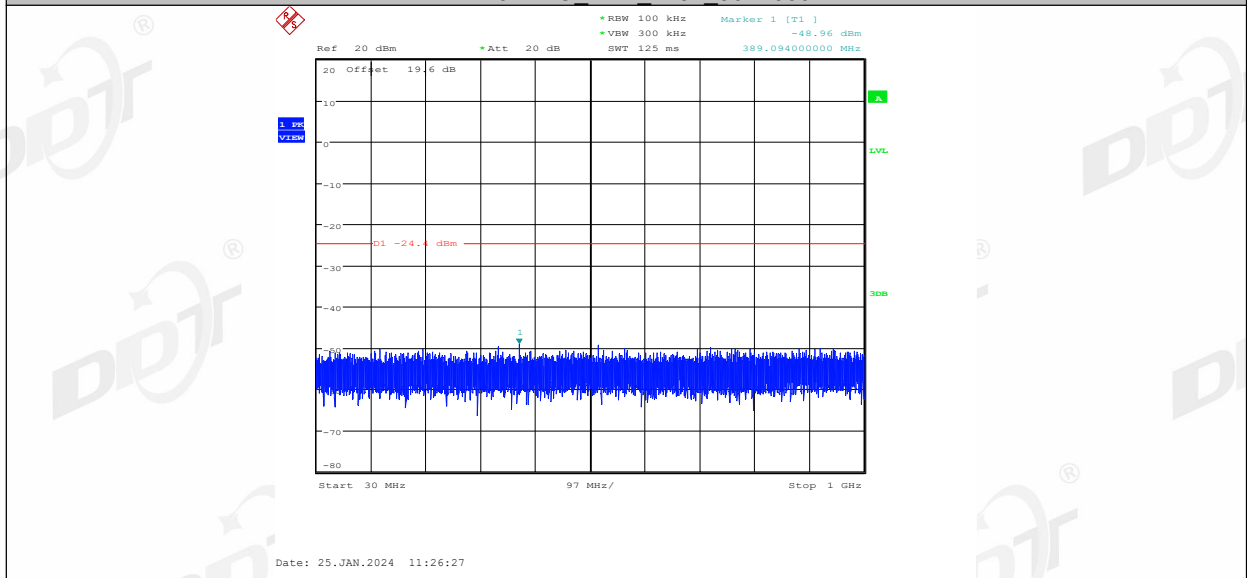


11N20MIMO Ant1 2437 1000~26500

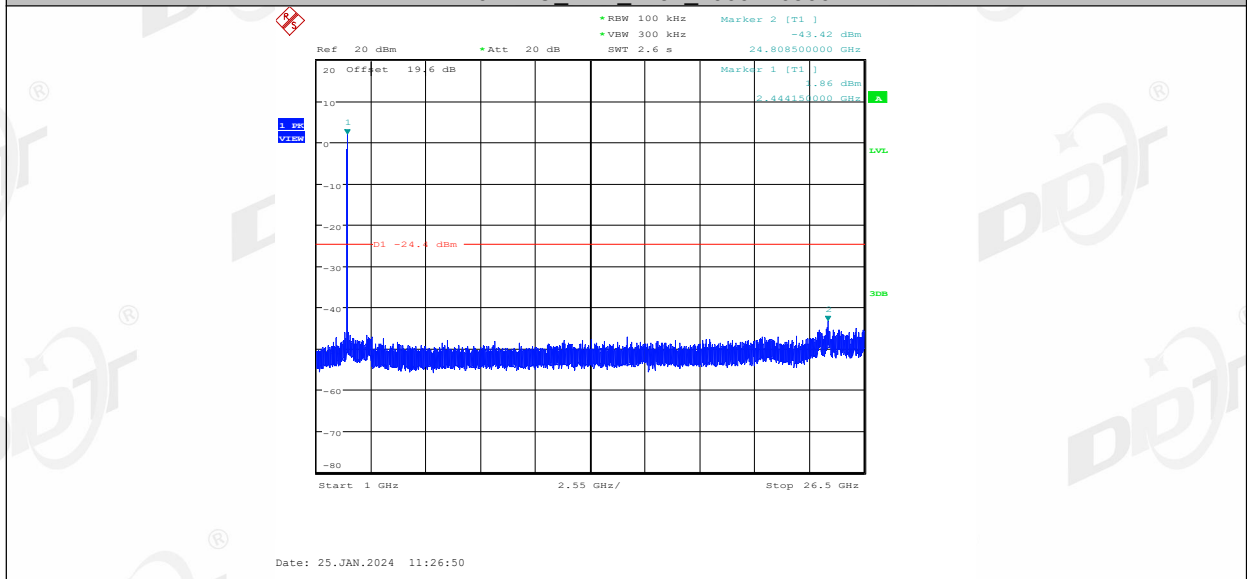


11N20MIMO Ant2 2437 0~Reference

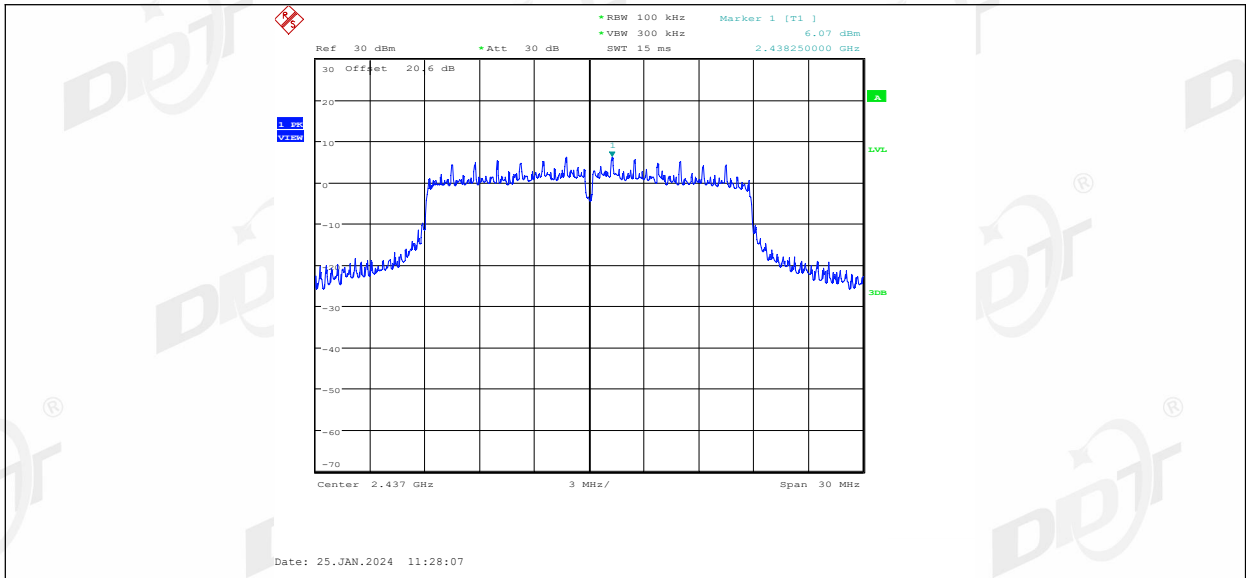


11N20MIMO Ant2 2437 30~1000

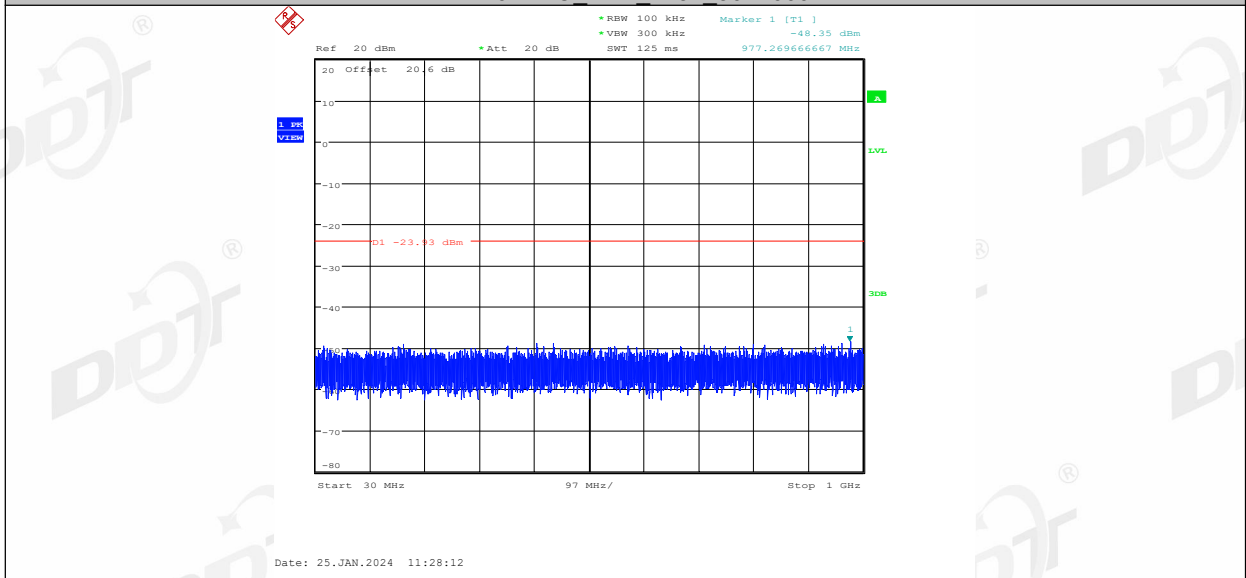


11N20MIMO Ant2 2437 1000~26500

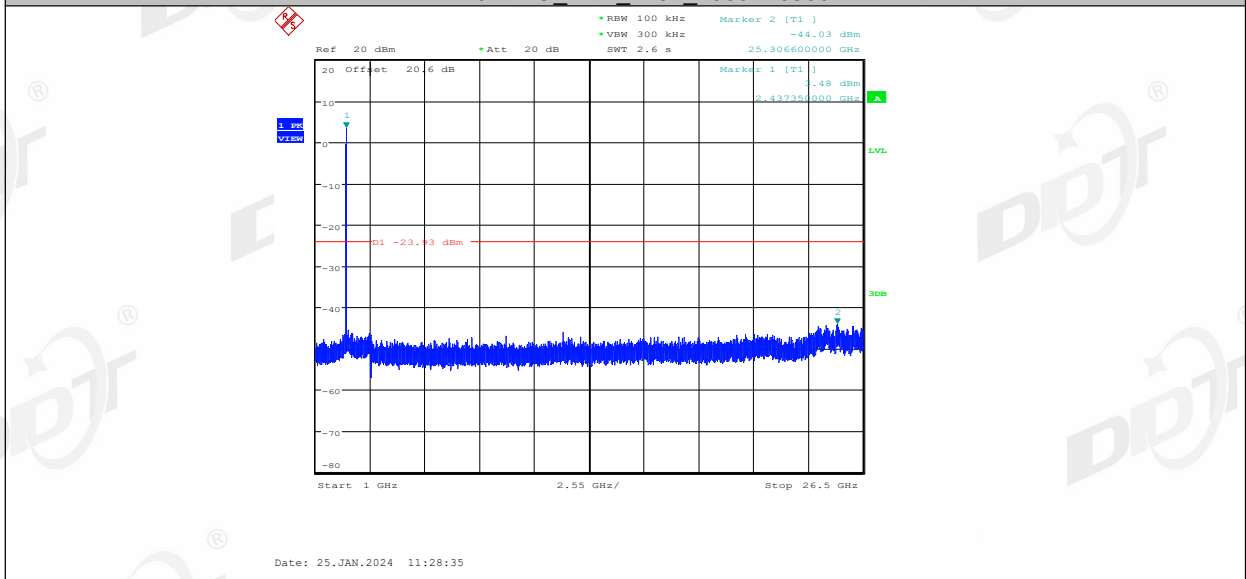


11N20MIMO Ant1 2462 0~Reference

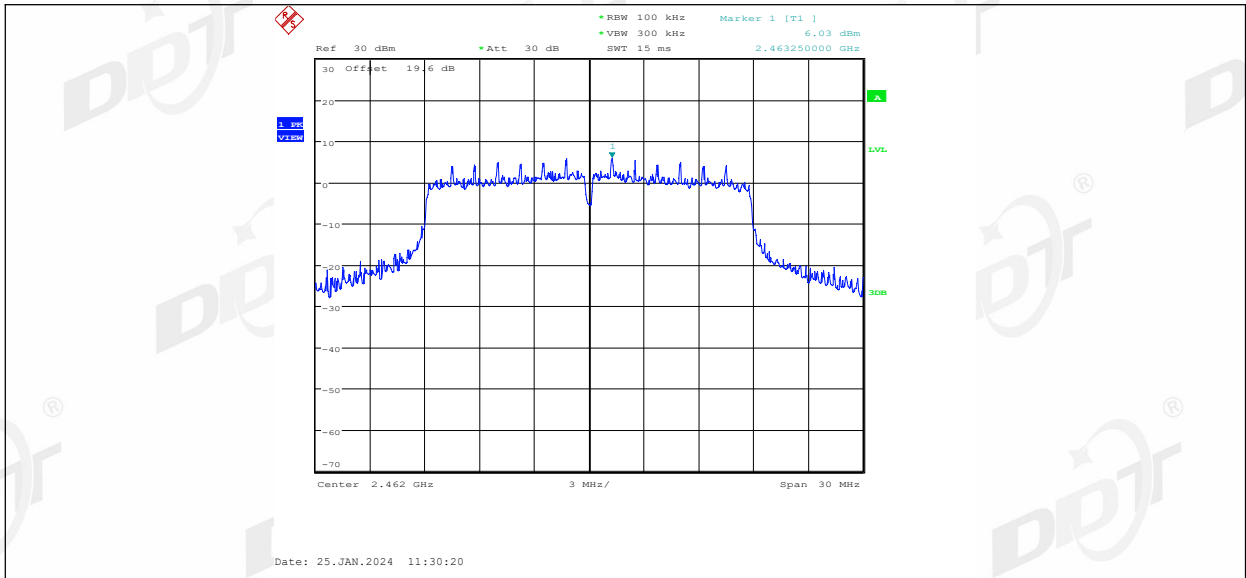


11N20MIMO Ant1 2462 30~1000

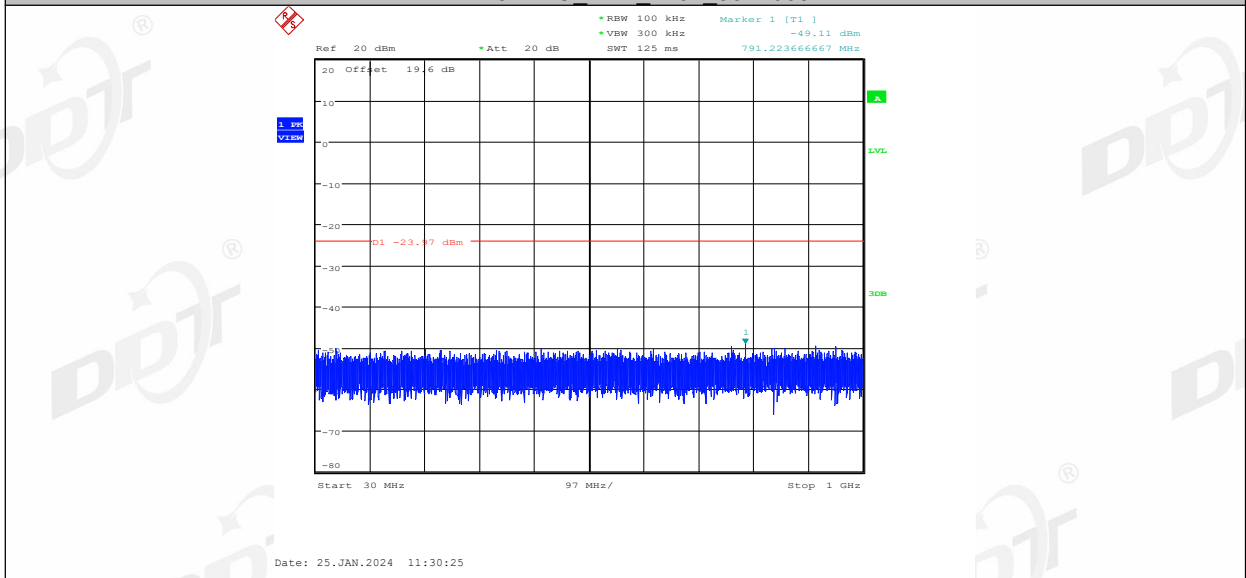


11N20MIMO Ant1 2462 1000~26500

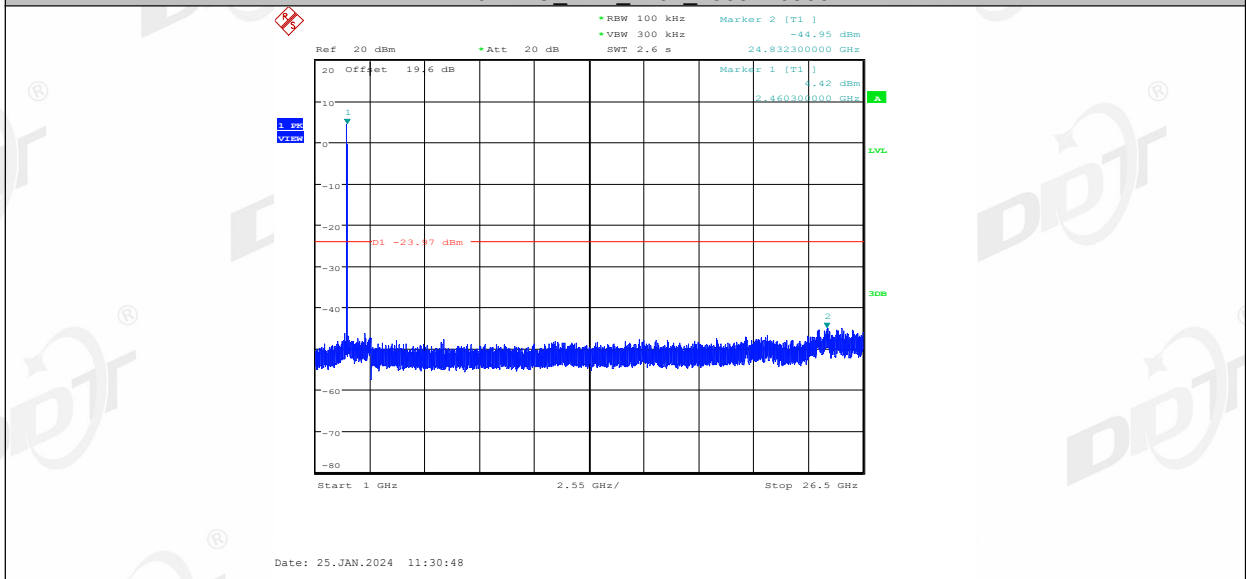


11N20MIMO Ant2 2462 0~Reference

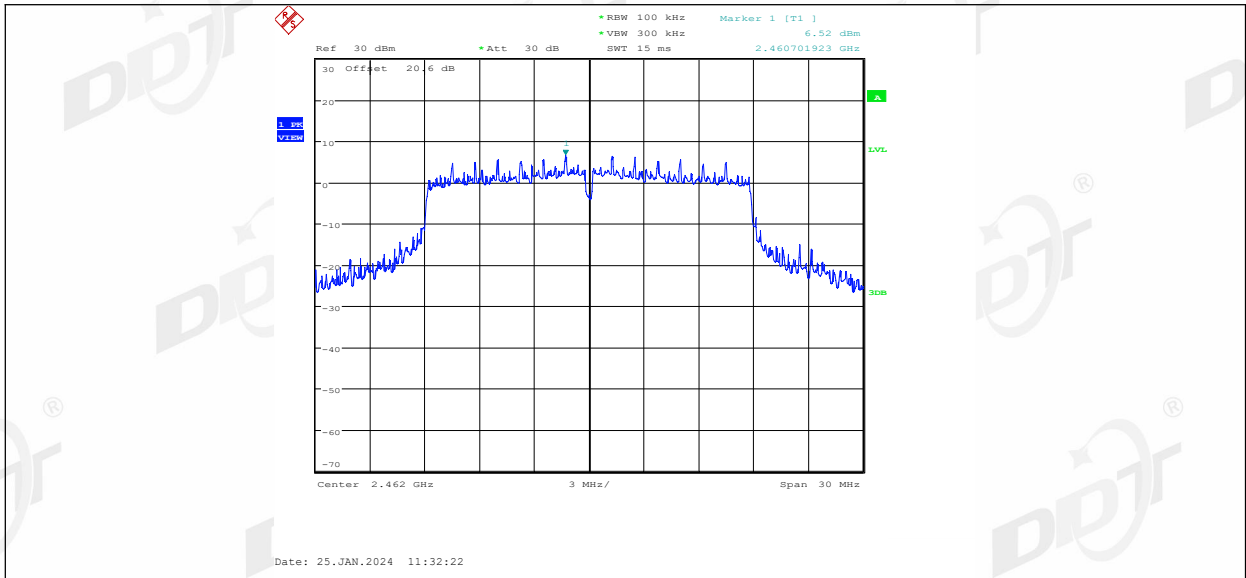


11N20MIMO Ant2 2462 30~1000

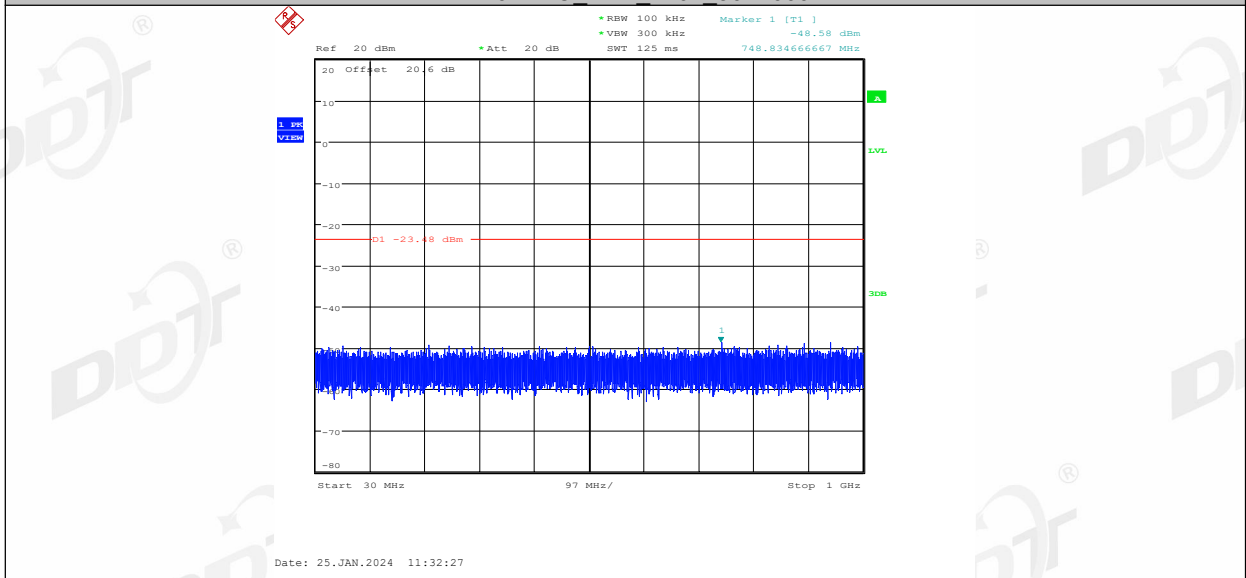


11N20MIMO Ant2 2462 1000~26500

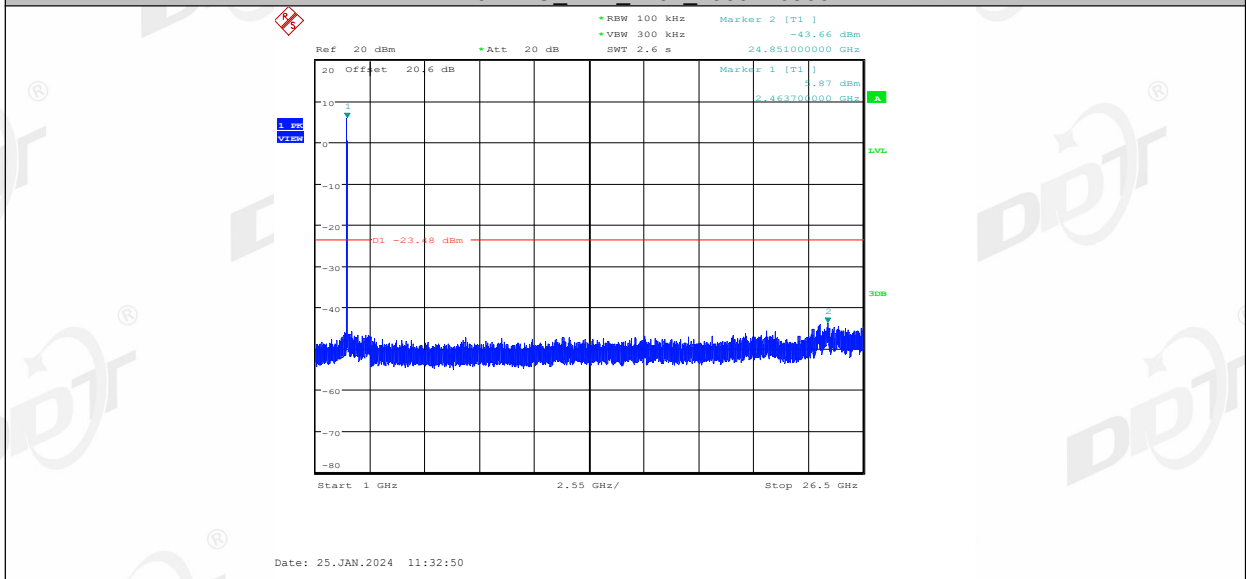


11N40MIMO Ant1 2422 0~Reference

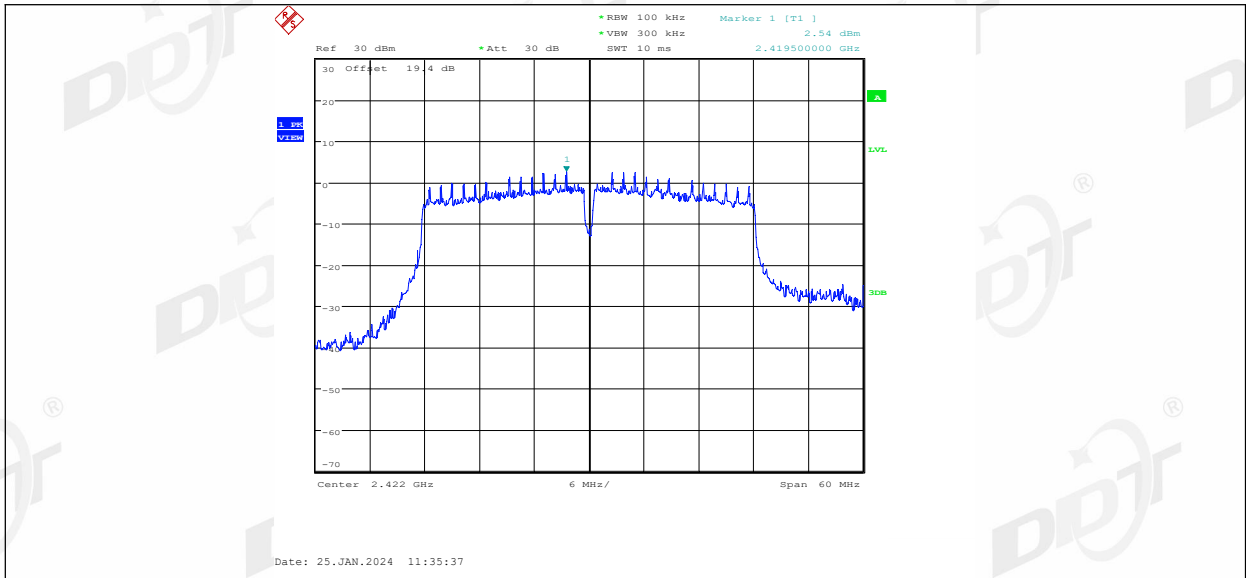


11N40MIMO Ant1 2422 30~1000

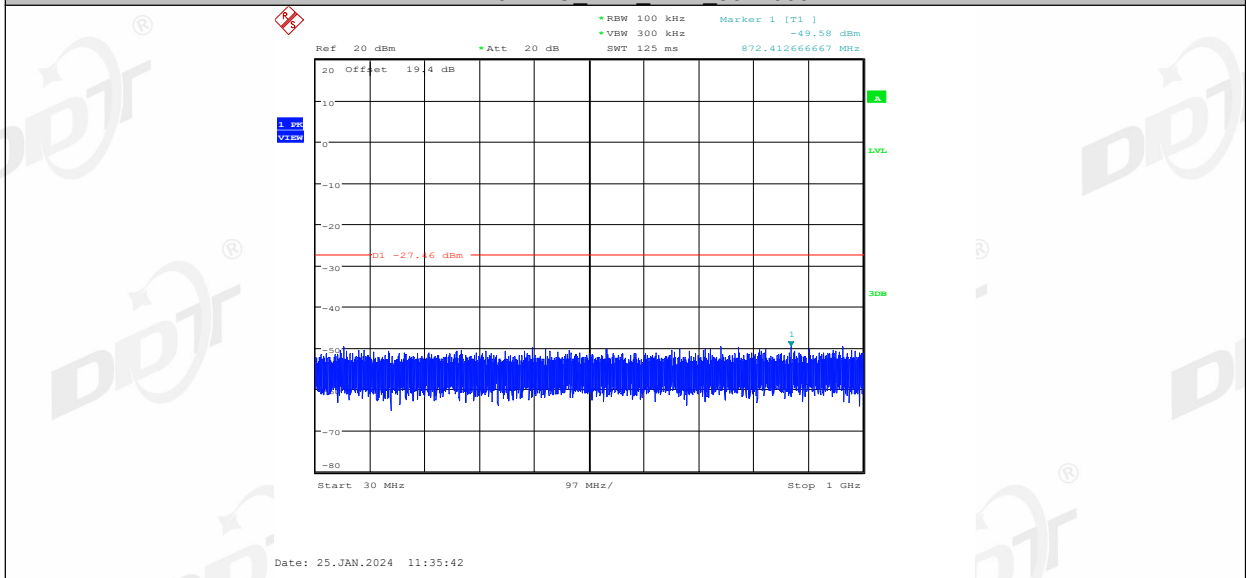


11N40MIMO Ant1 2422 1000~26500

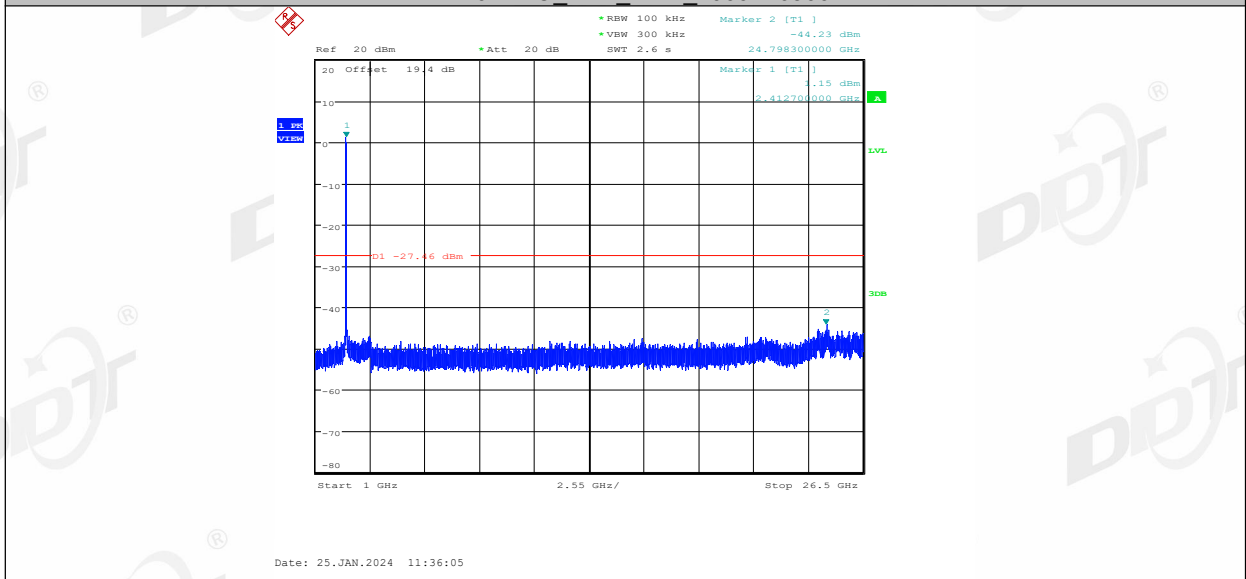


11N40MIMO Ant2 2422 0~Reference

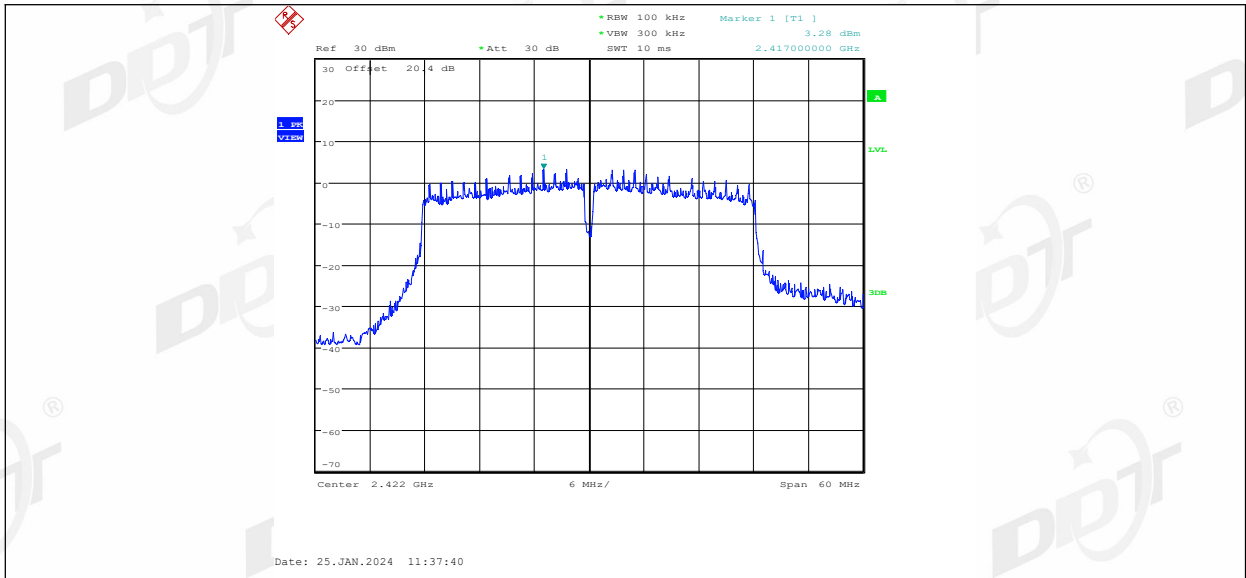

11N40MIMO Ant2 2422 30~1000

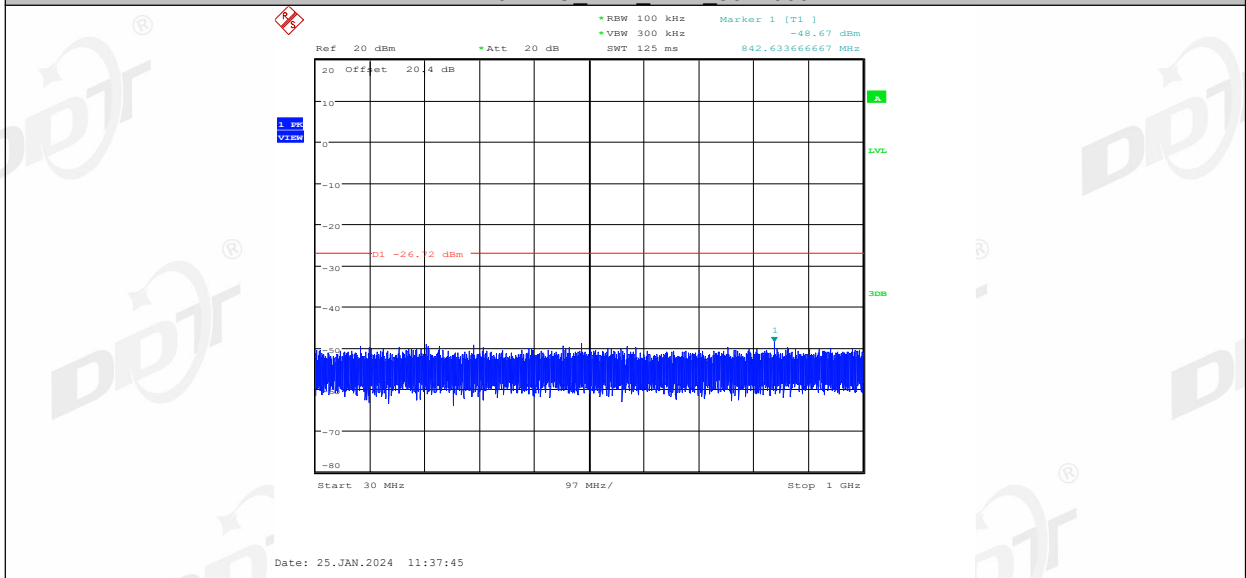


11N40MIMO Ant2 2422 1000~26500

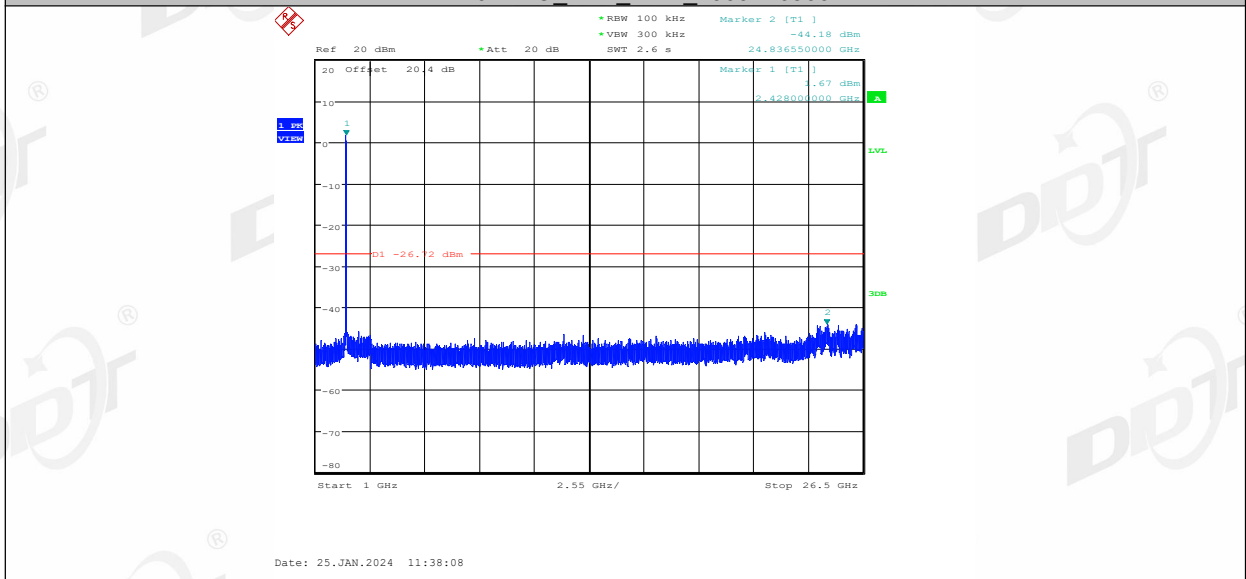


11N40MIMO Ant1 2437 0~Reference




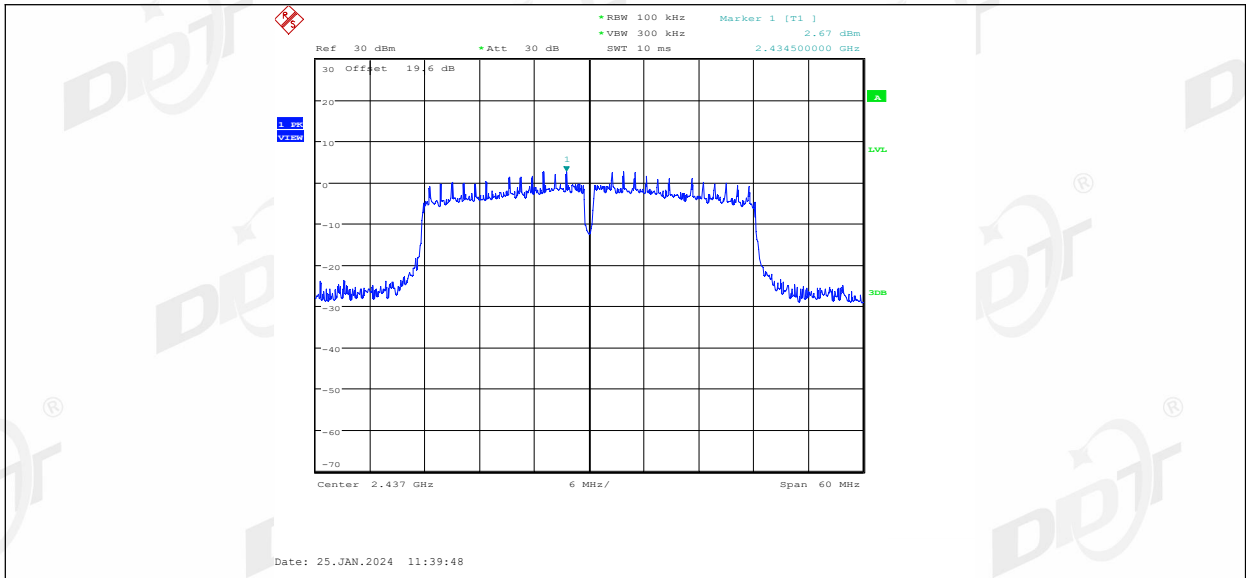


11N40MIMO Ant1 2437 30~1000

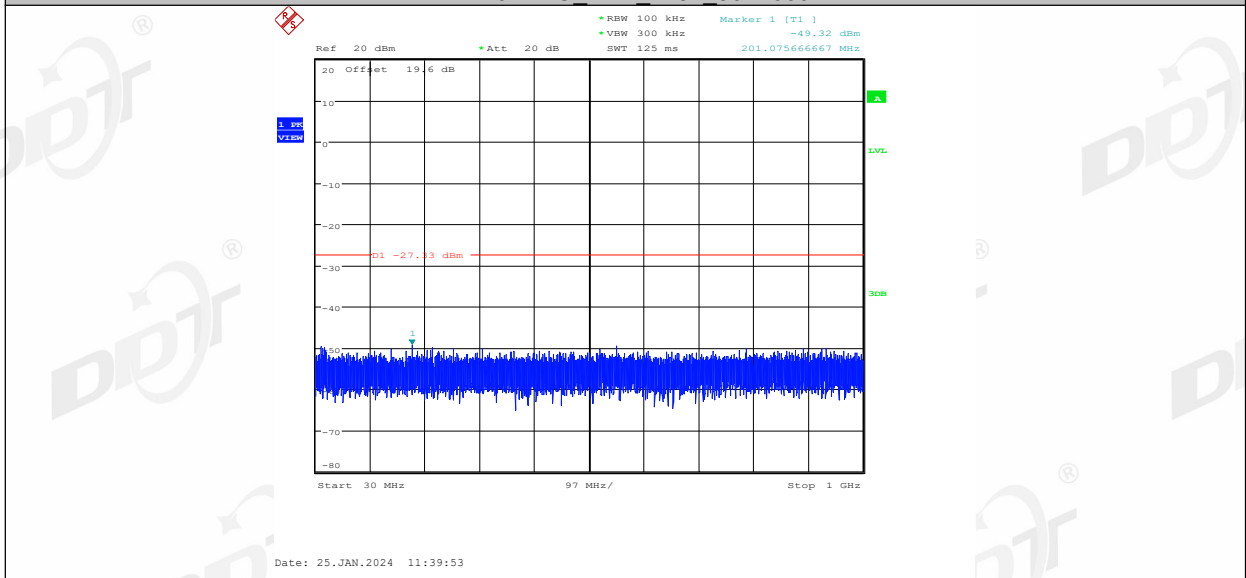


11N40MIMO Ant1 2437 1000~26500

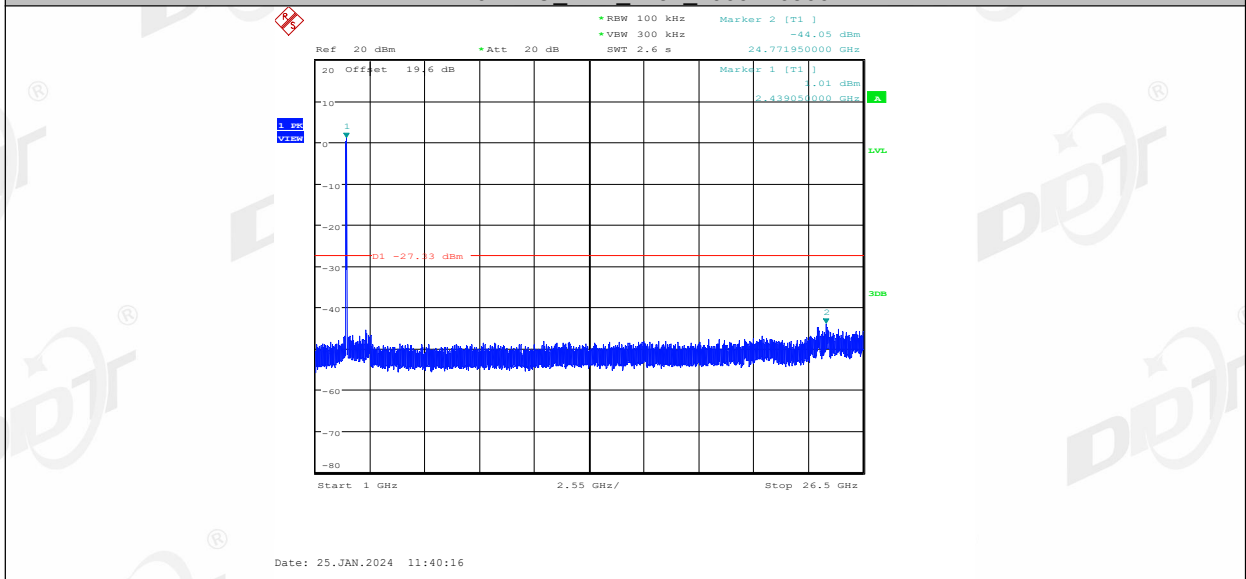


11N40MIMO Ant2 2437 0~Reference

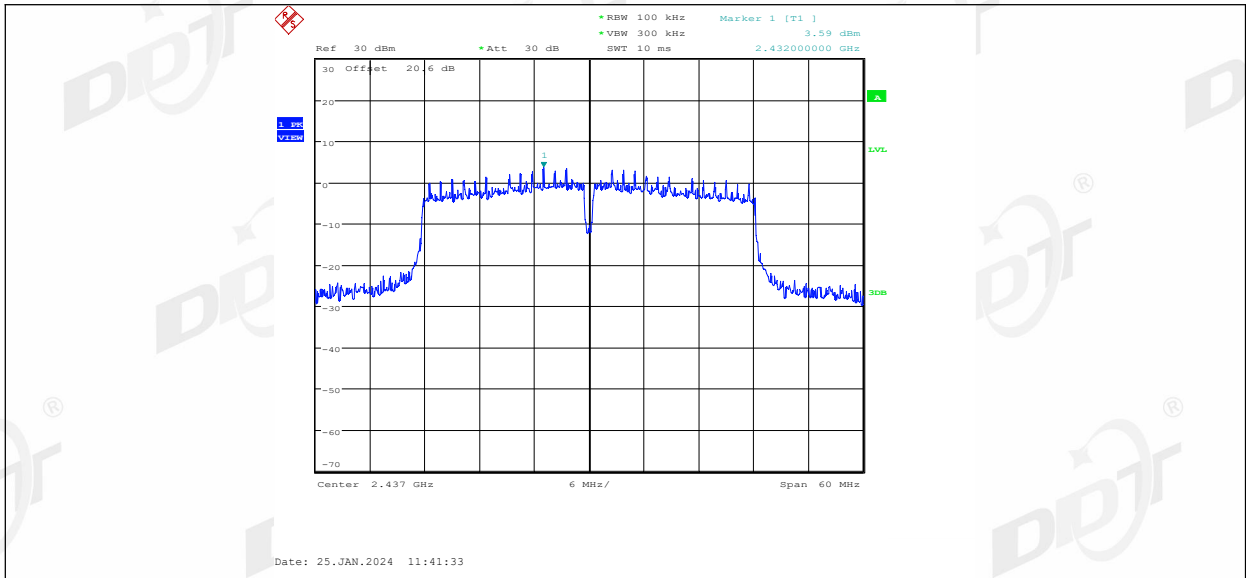


11N40MIMO Ant2 2437 30~1000

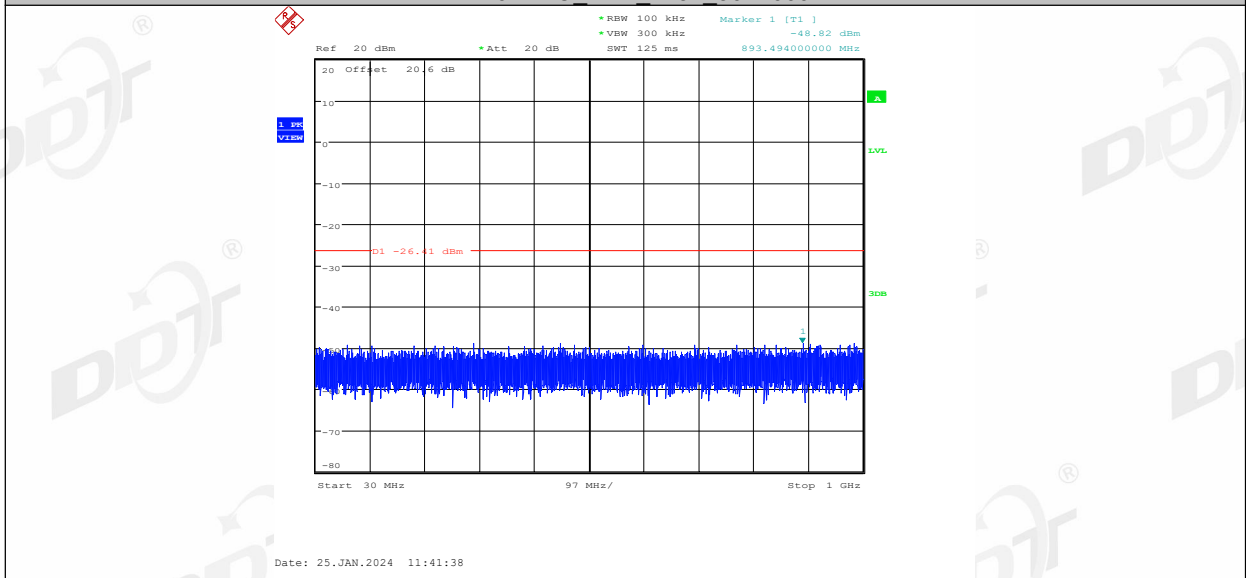


11N40MIMO Ant2 2437 1000~26500

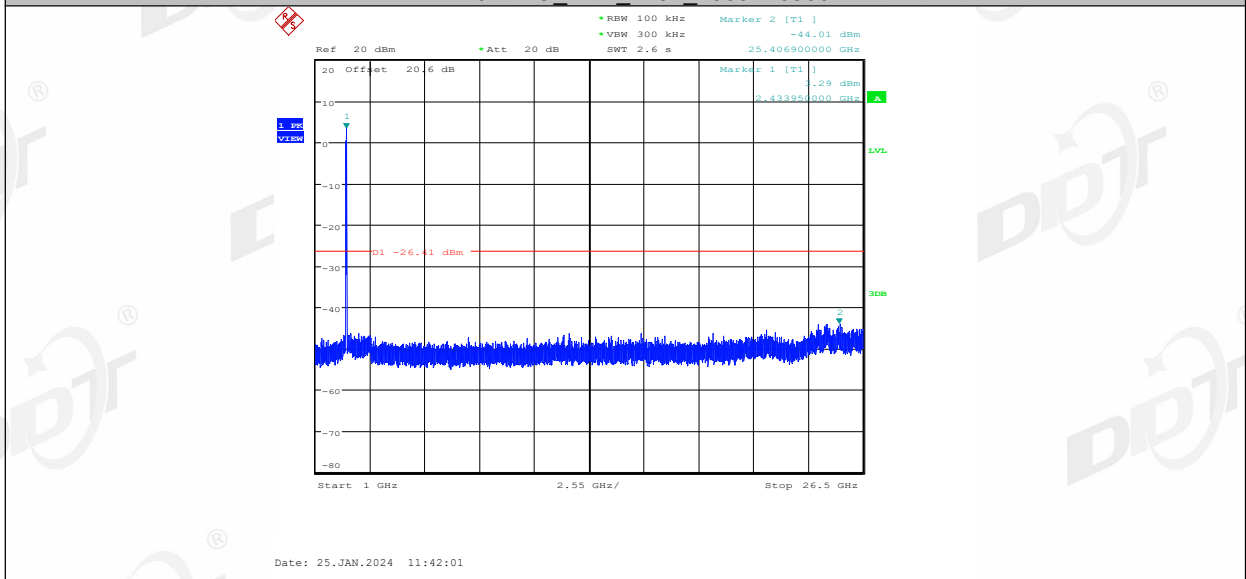


11N40MIMO Ant1 2452 0~Reference

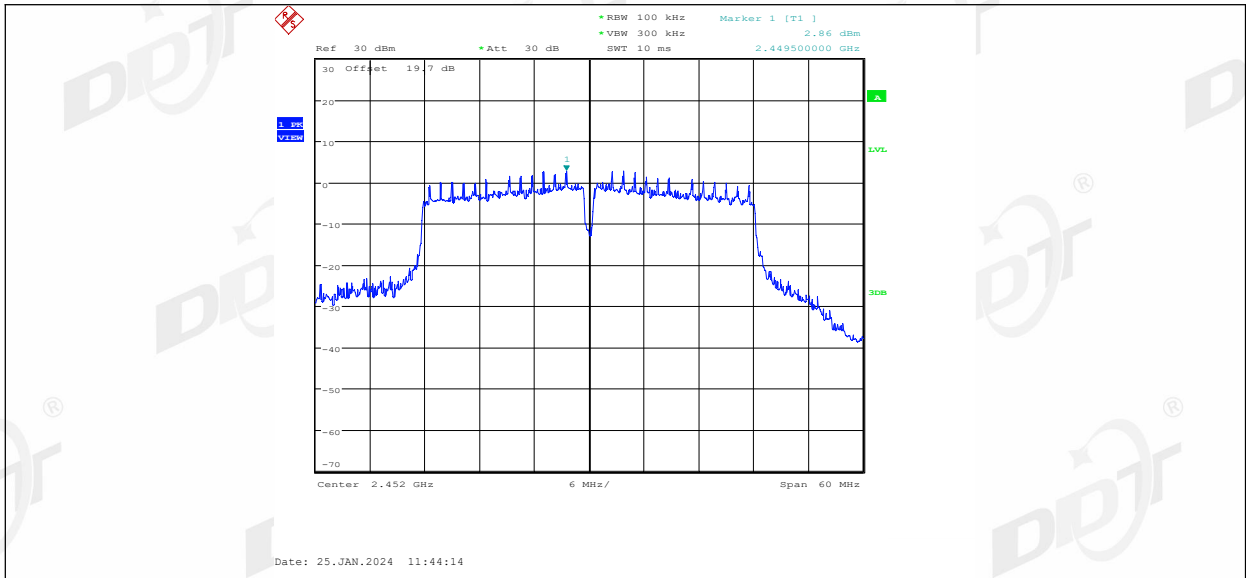


11N40MIMO Ant1 2452 30~1000

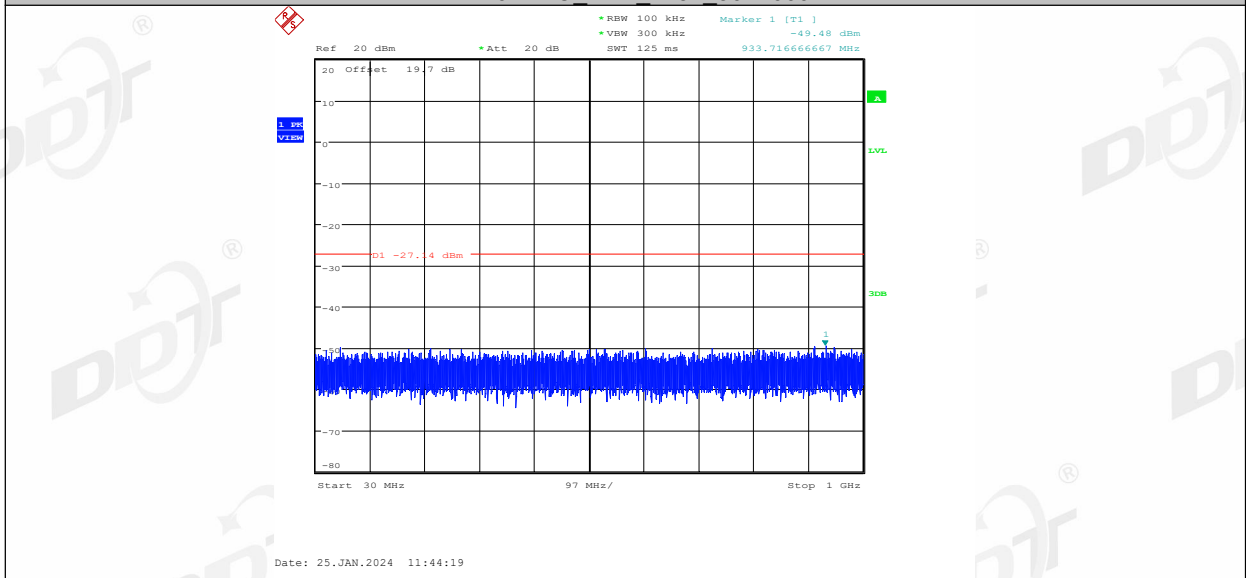


11N40MIMO Ant1 2452 1000~26500

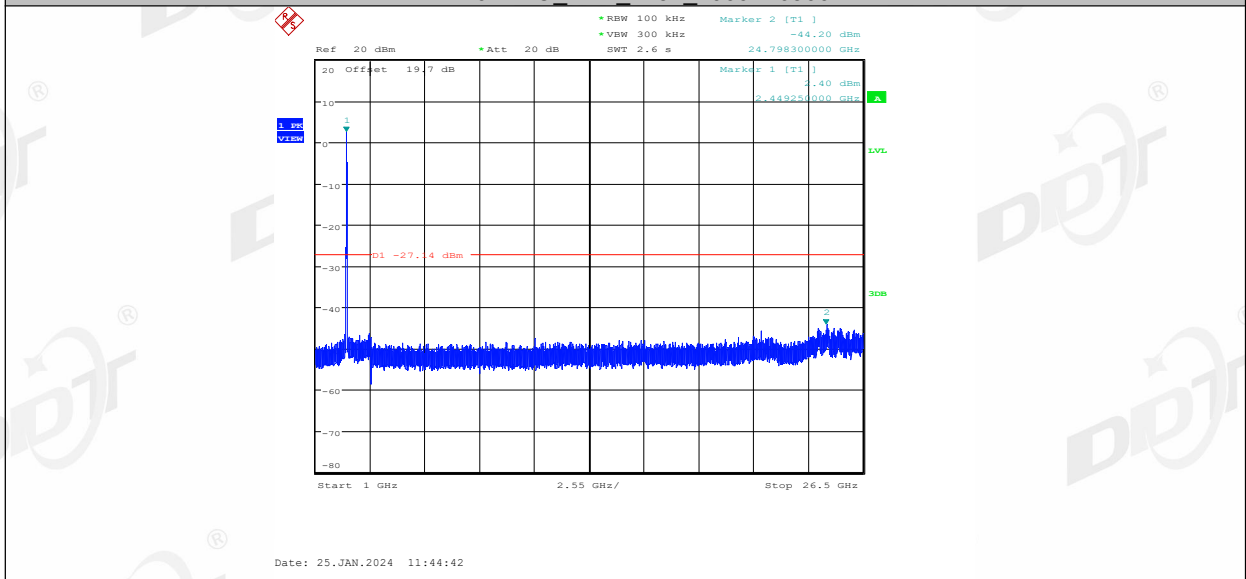


11N40MIMO Ant2 2452 0~Reference

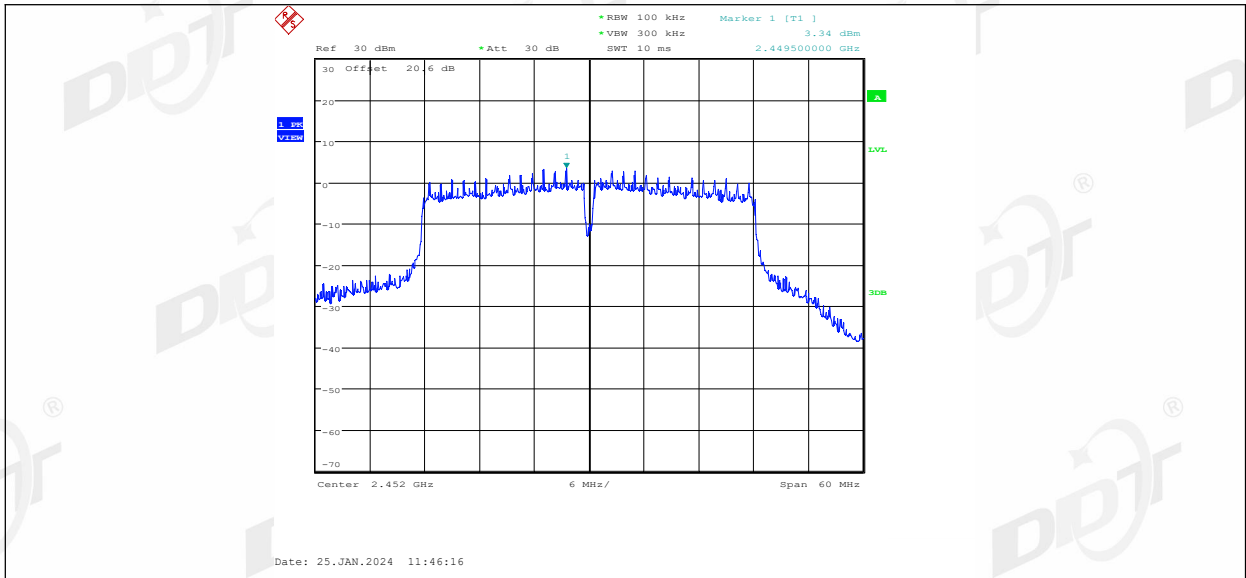


11N40MIMO Ant2 2452 30~1000

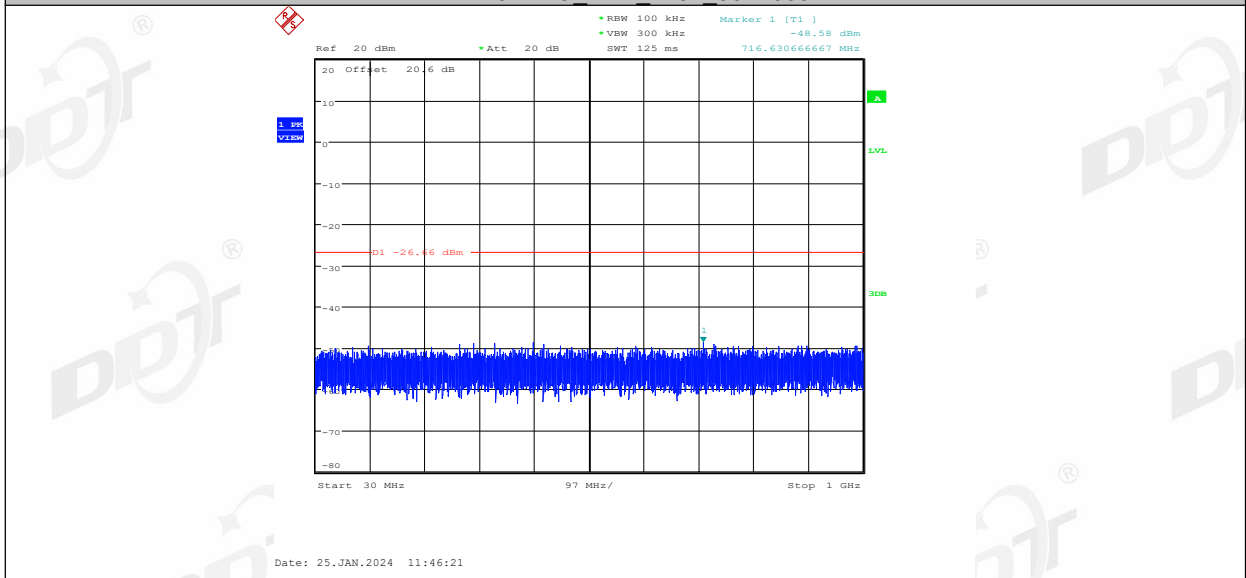


11N40MIMO Ant2 2452 1000~26500

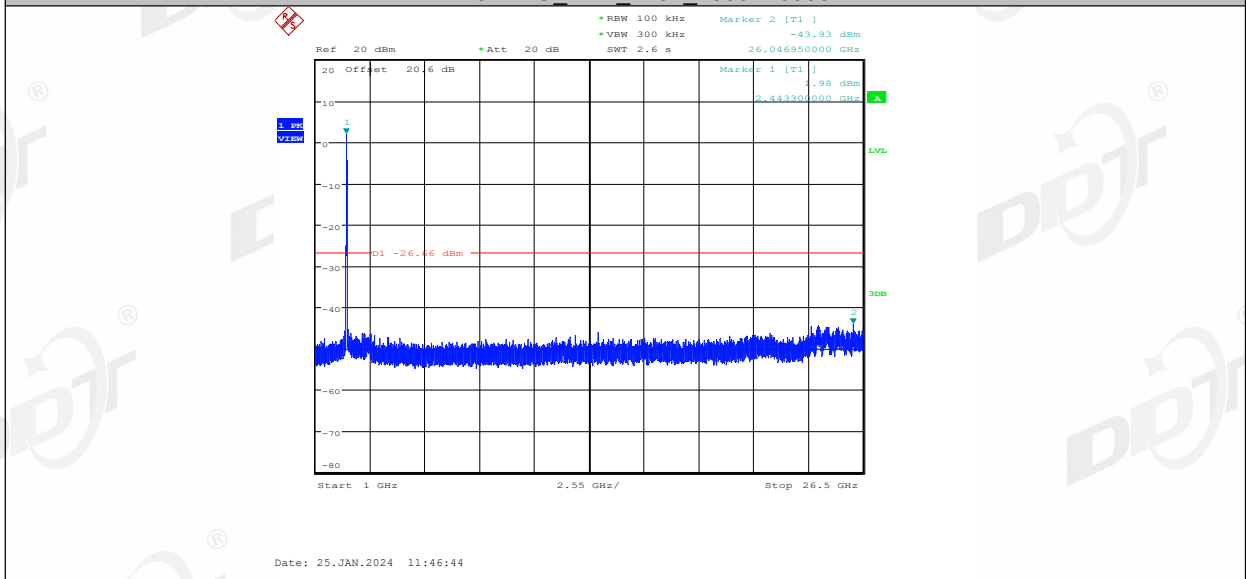


11AX20MIMO Ant1 2412 0~Reference

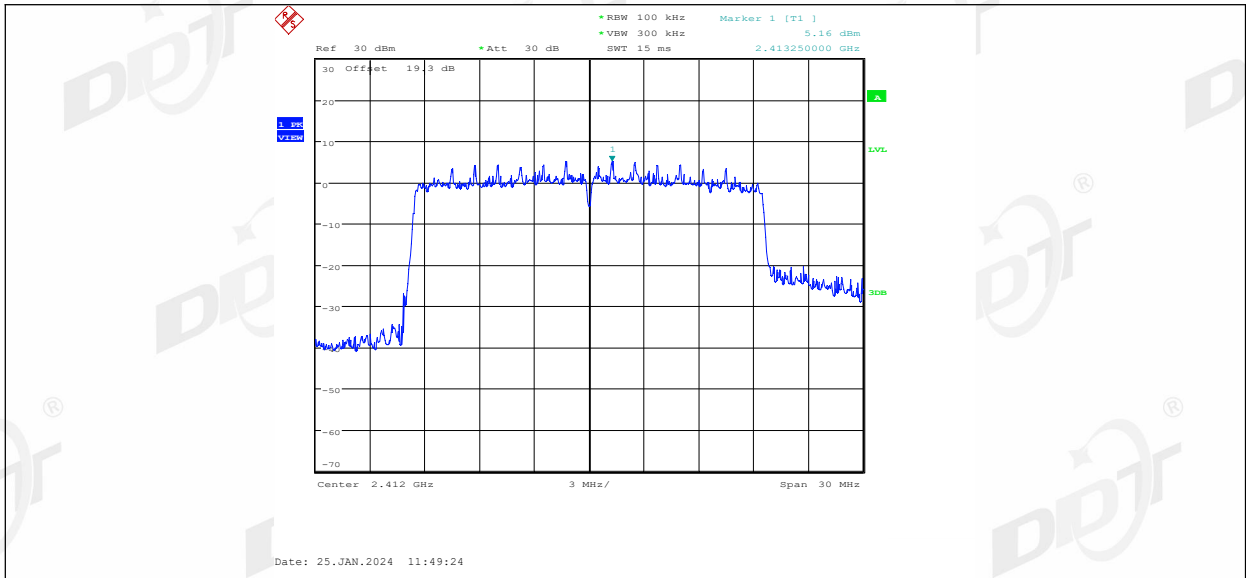


11AX20MIMO\_Ant1\_2412\_30~1000

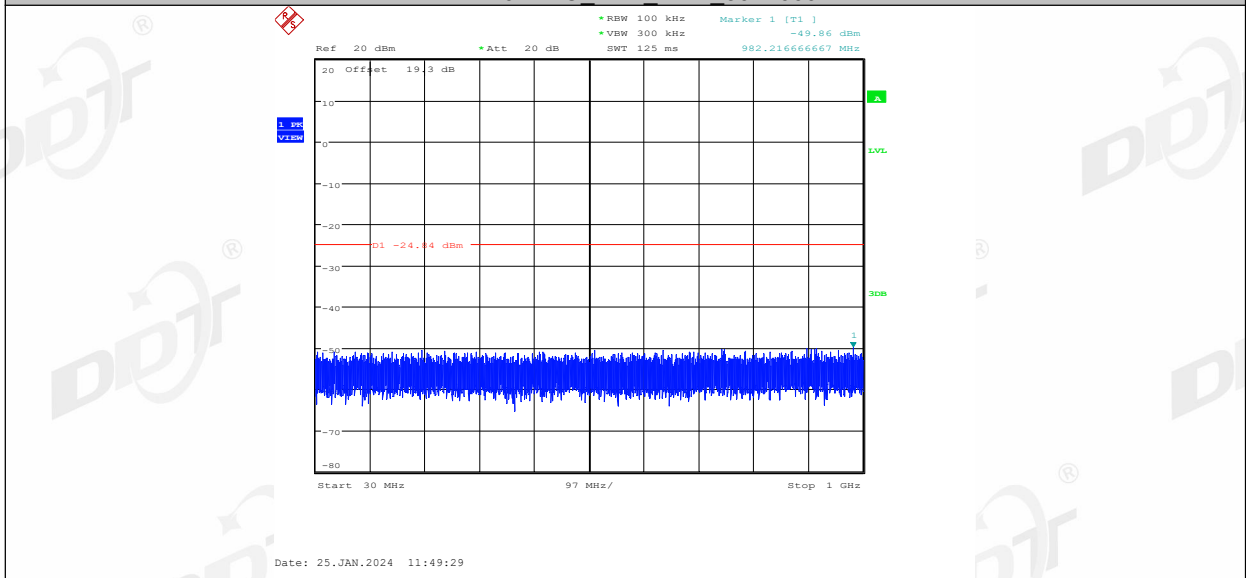


11AX20MIMO\_Ant1\_2412\_1000~26500

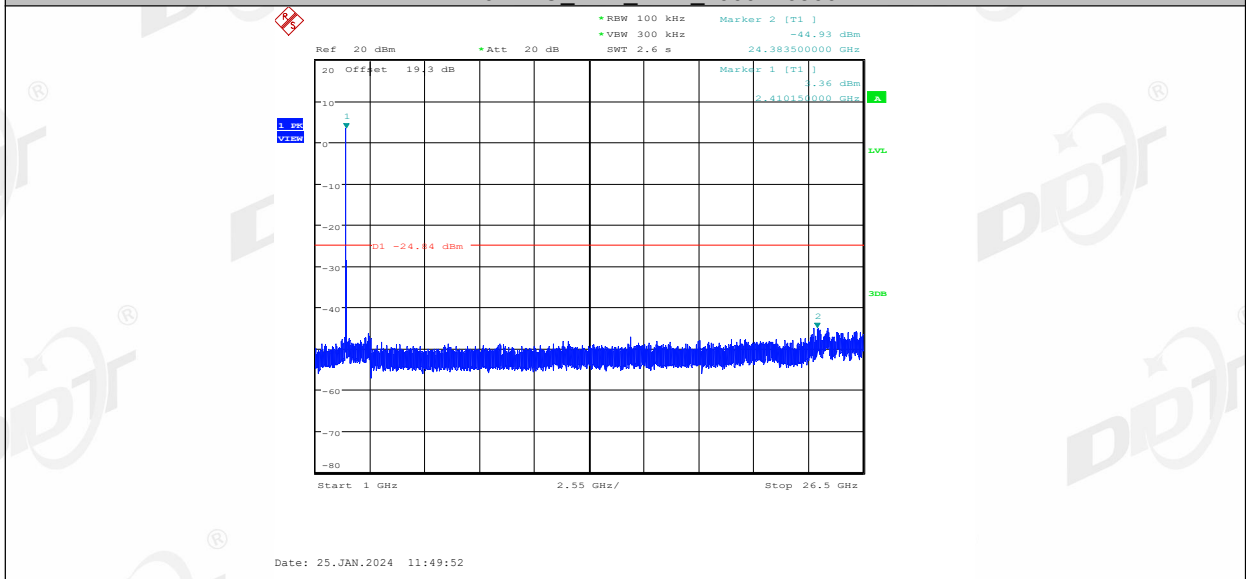


11AX20MIMO\_Ant2\_2412\_0~Reference

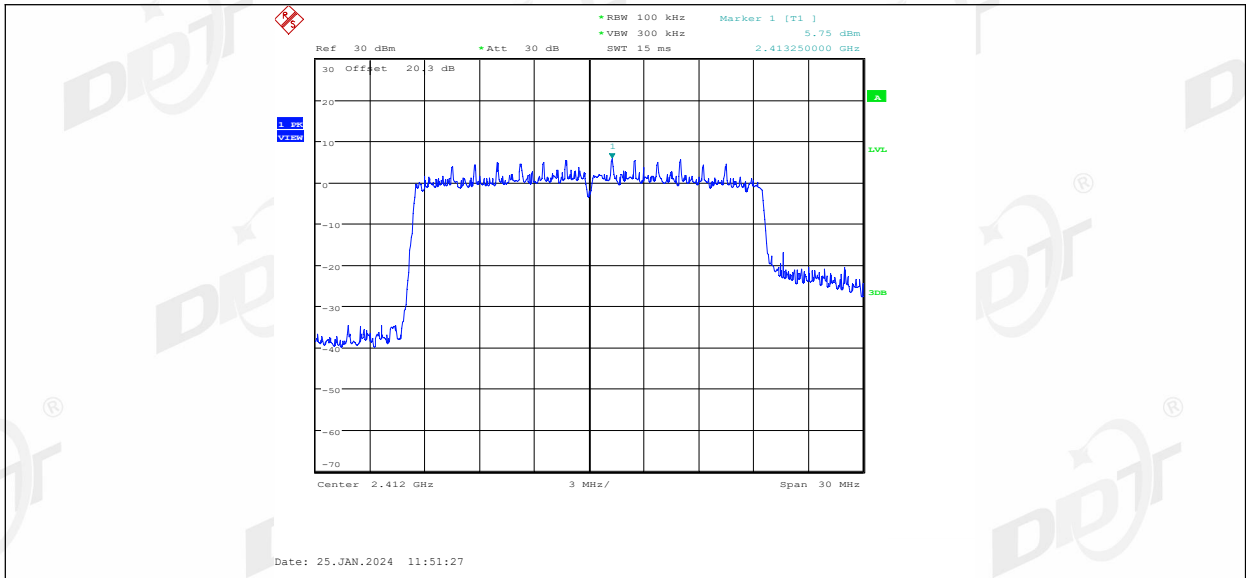


11AX20MIMO\_Ant2\_2412\_30~1000

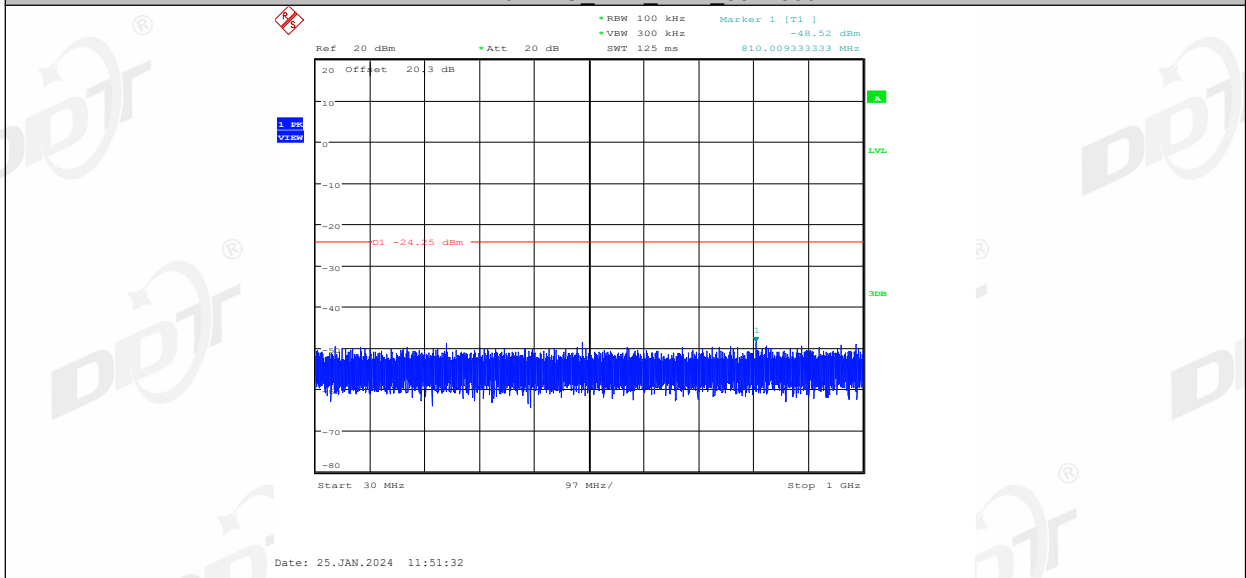


11AX20MIMO\_Ant2\_2412\_1000~26500

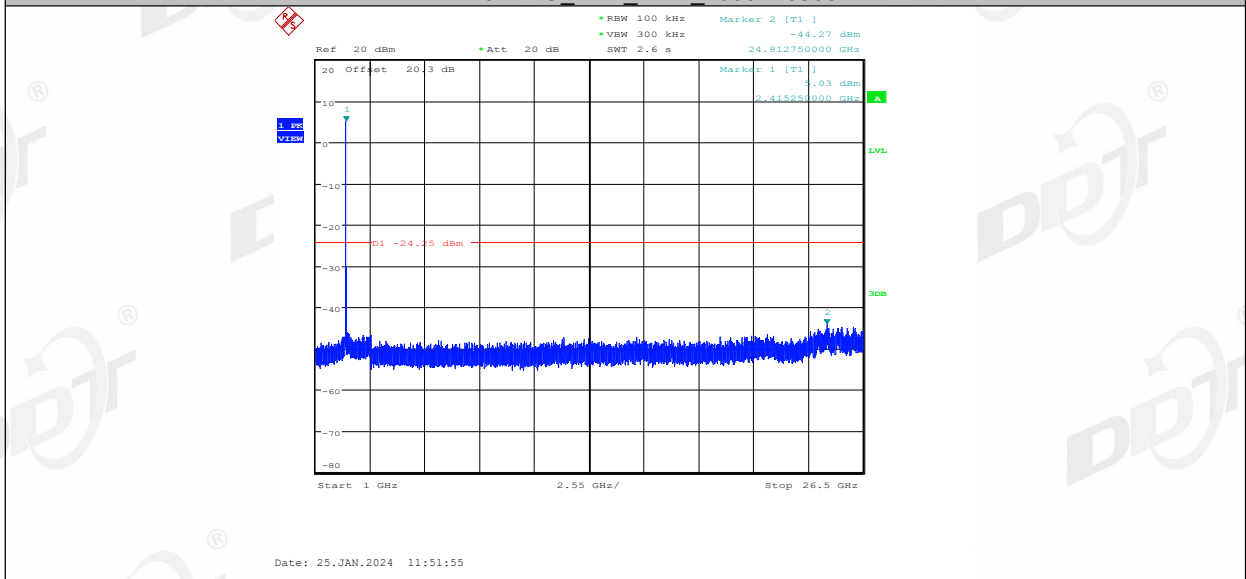


11AX20MIMO\_Ant1\_2437\_0~Reference

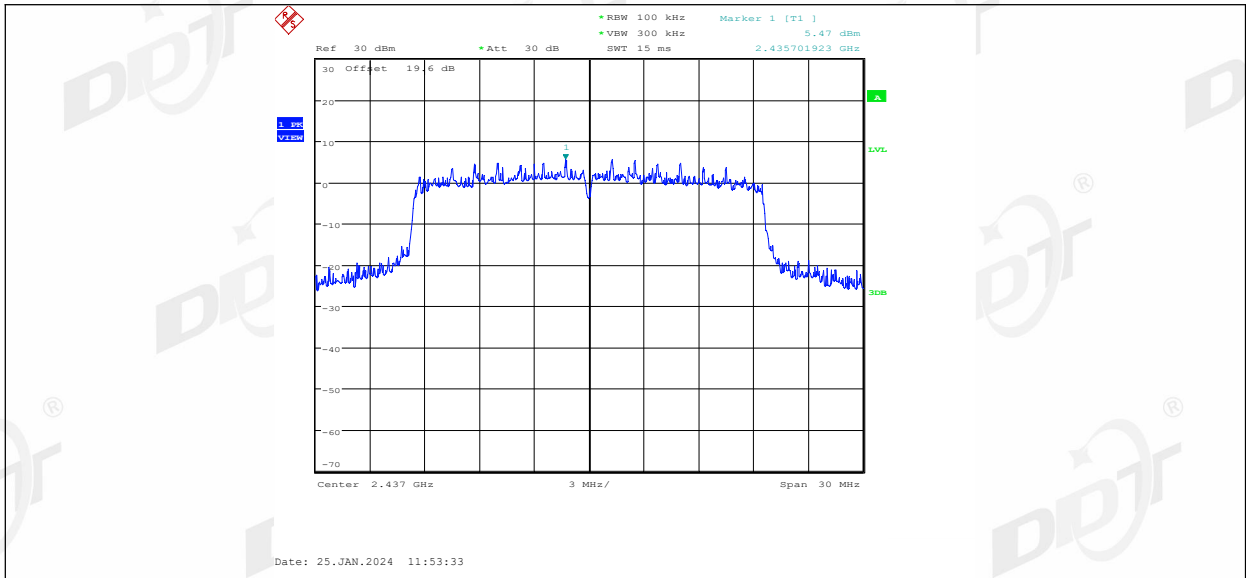


11AX20MIMO\_Ant1\_2437\_30~1000

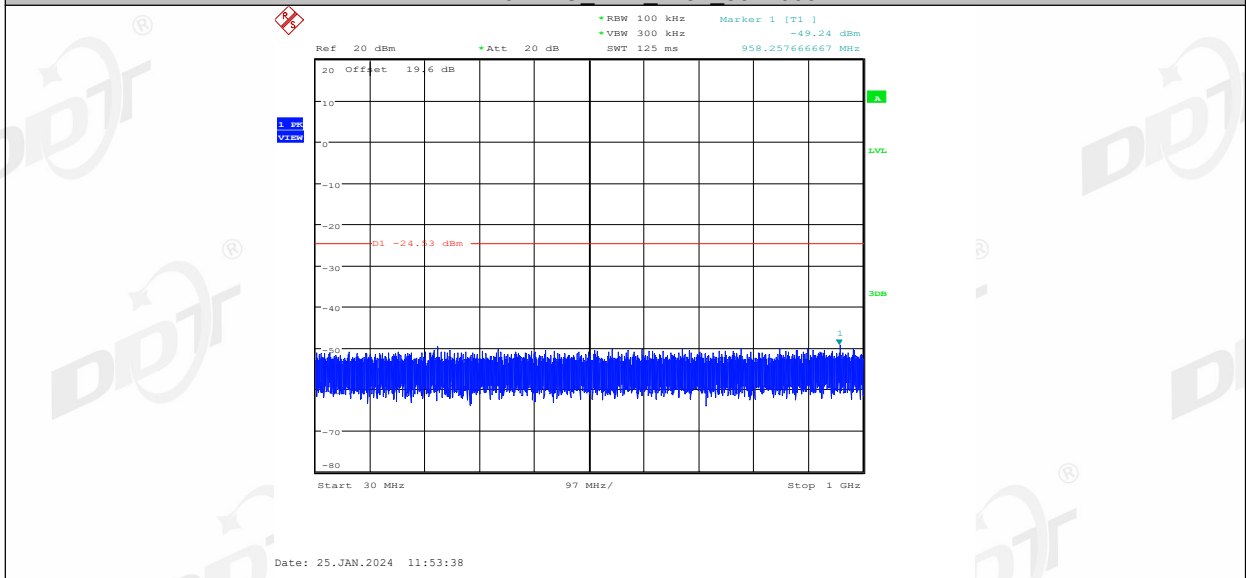


11AX20MIMO\_Ant1\_2437\_1000~26500

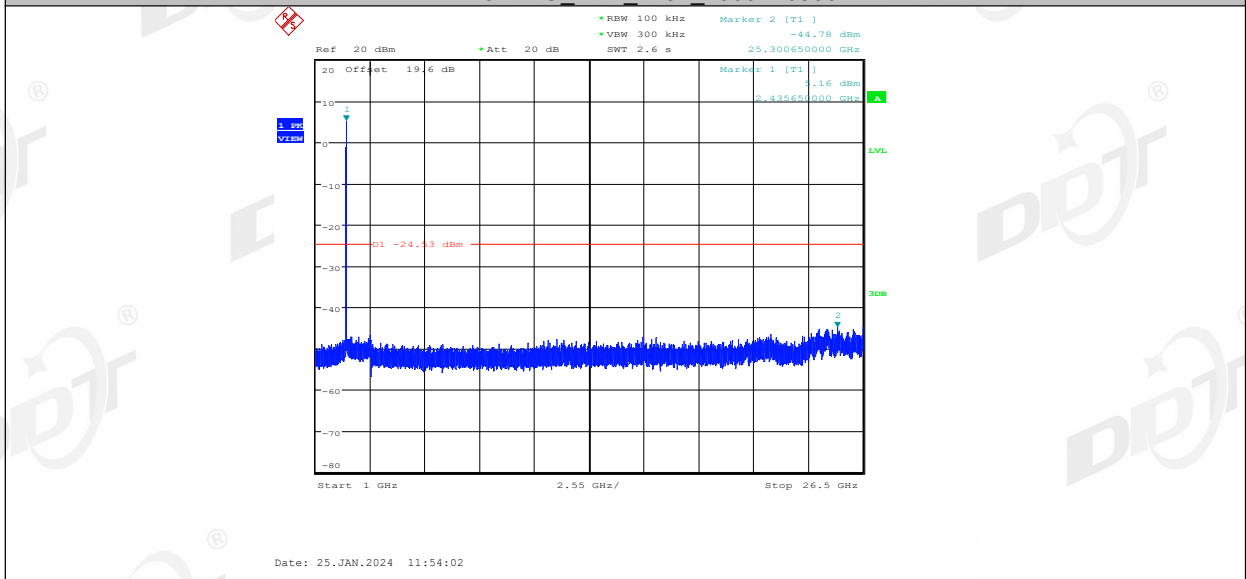


11AX20MIMO\_Ant2\_2437\_0~Reference

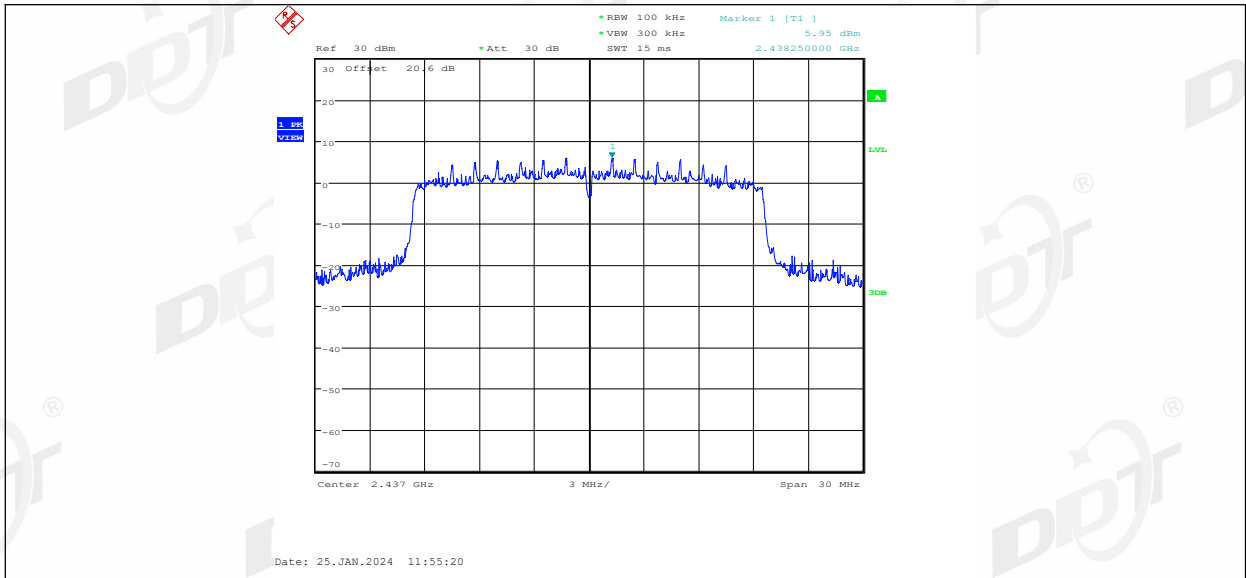

11AX20MIMO\_Ant2\_2437\_30~1000

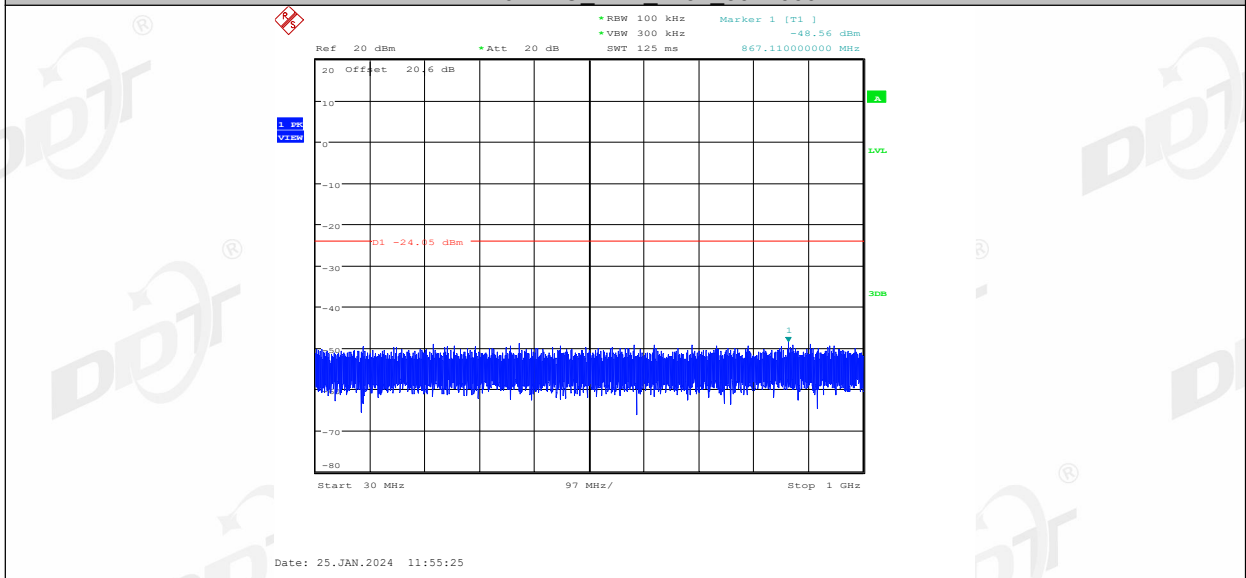


11AX20MIMO\_Ant2\_2437\_1000~26500

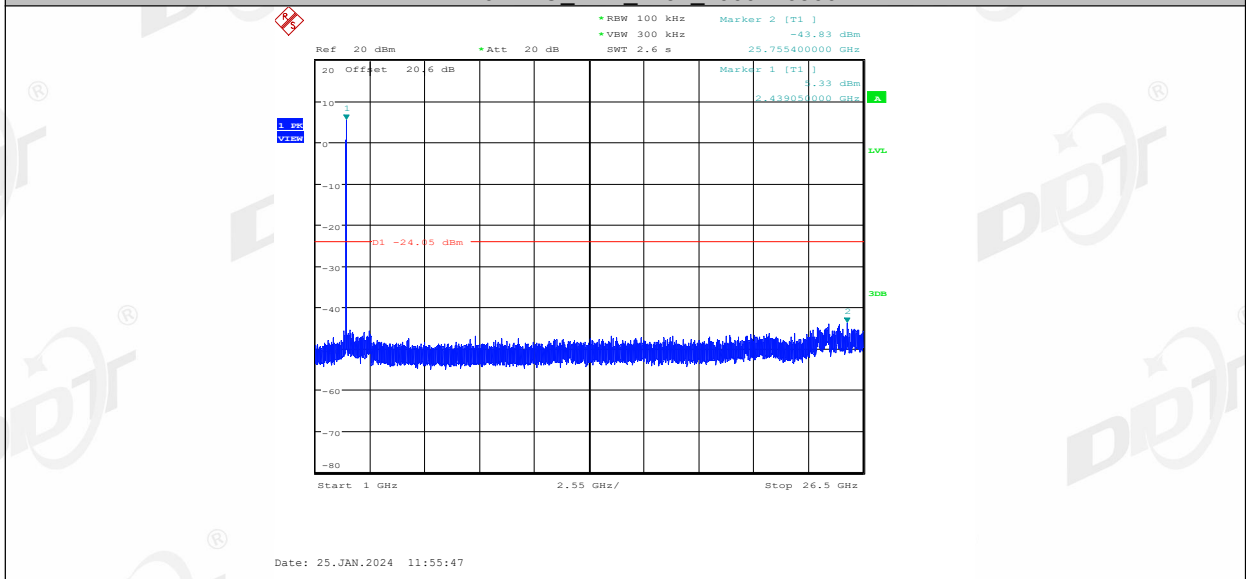


11AX20MIMO\_Ant1\_2462\_0~Reference




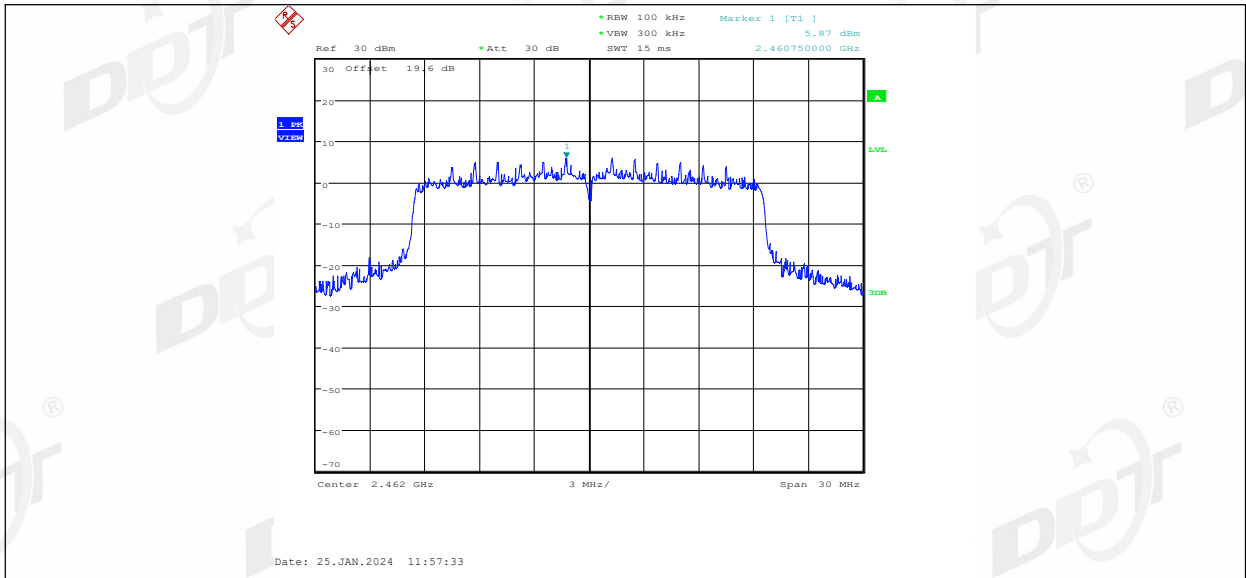


11AX20MIMO\_Ant1\_2462\_30~1000

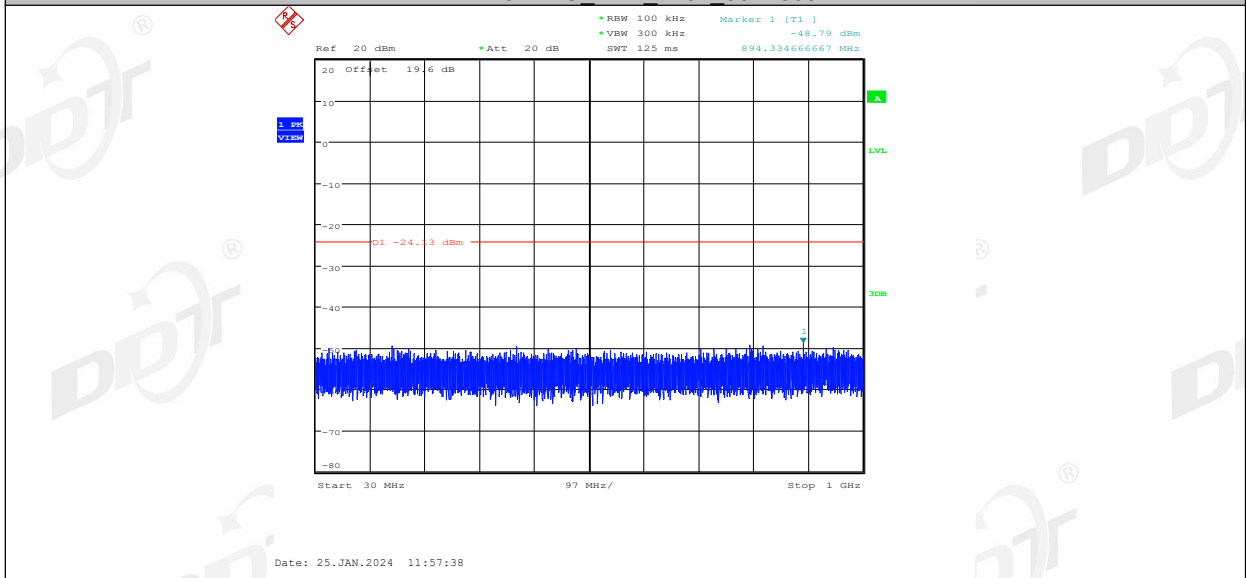


11AX20MIMO\_Ant1\_2462\_1000~26500

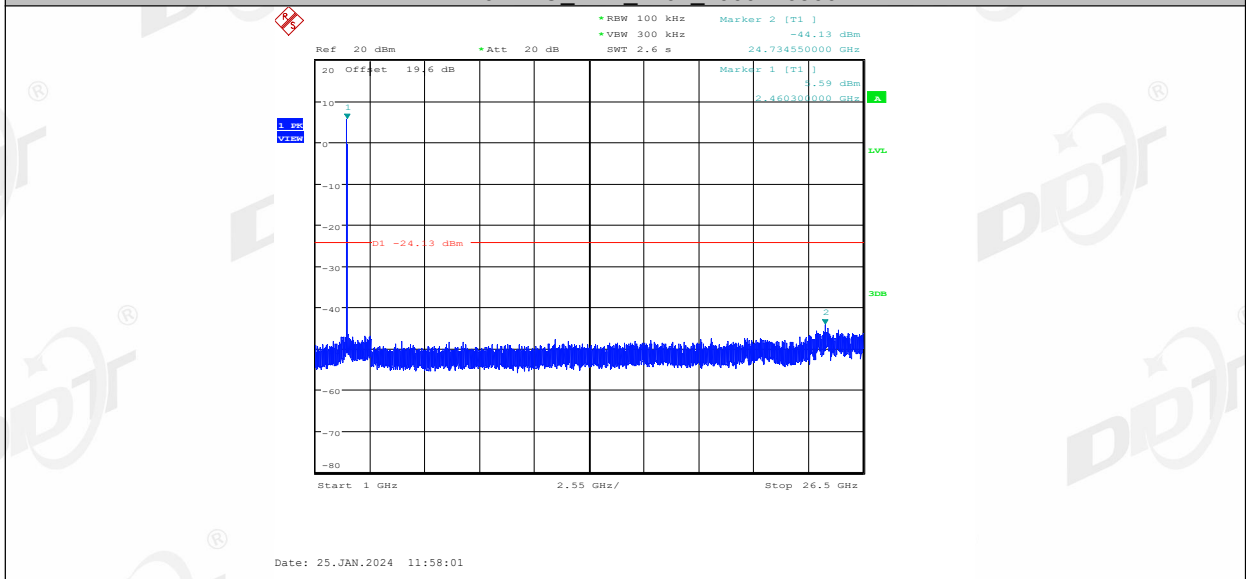


11AX20MIMO\_Ant2\_2462\_0~Reference

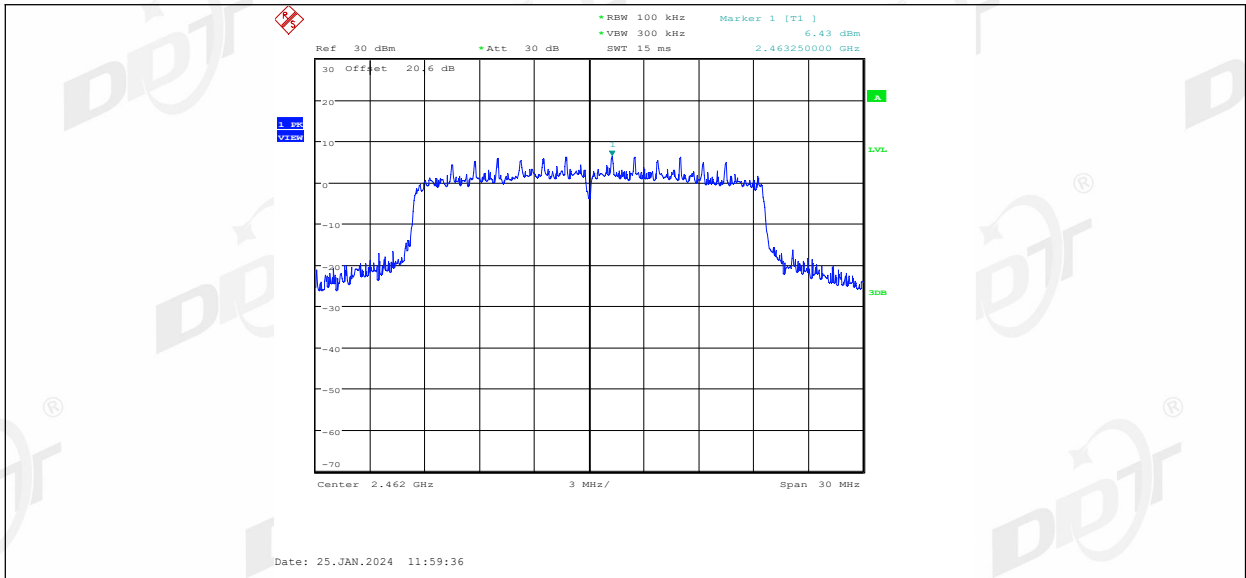


11AX20MIMO\_Ant2\_2462\_30~1000

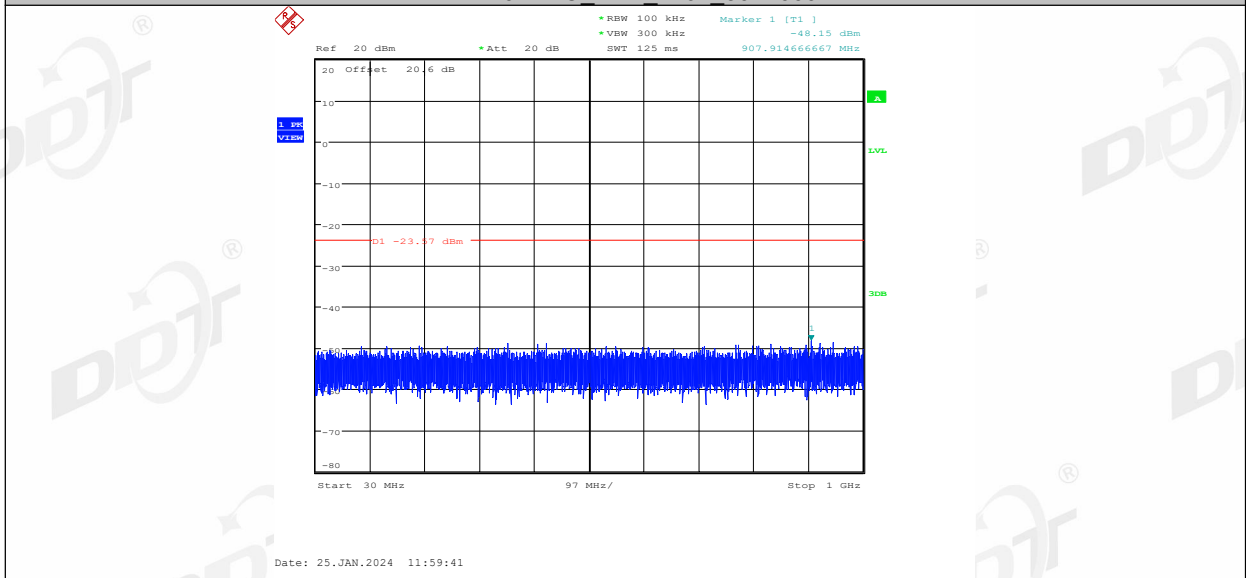


11AX20MIMO\_Ant2\_2462\_1000~26500

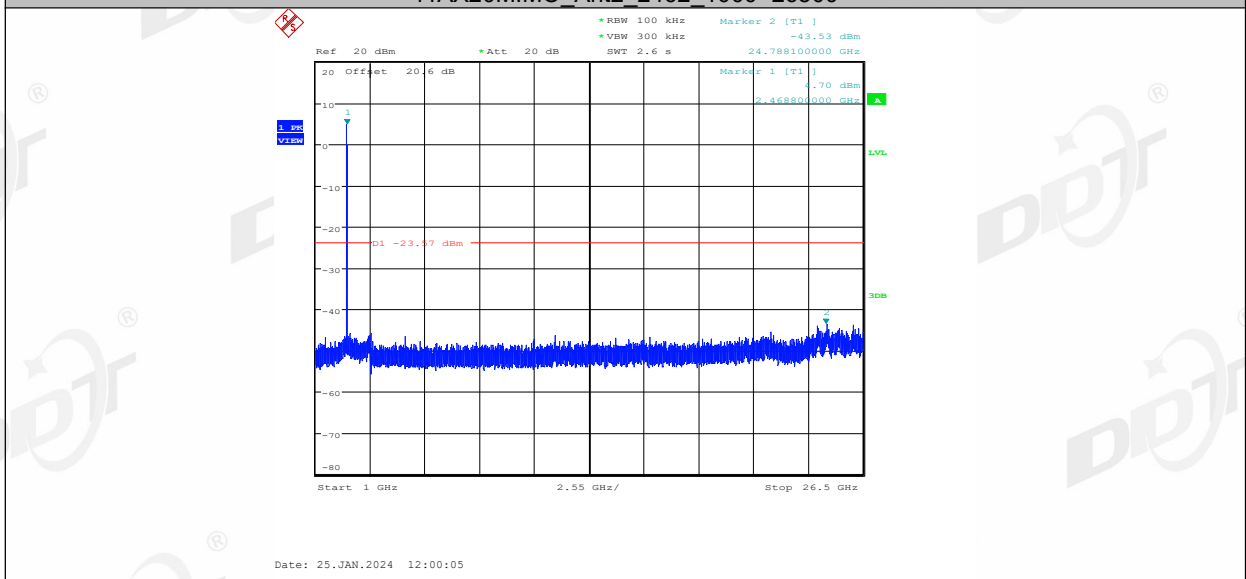


11AX40MIMO\_Ant1\_2422\_0~Reference

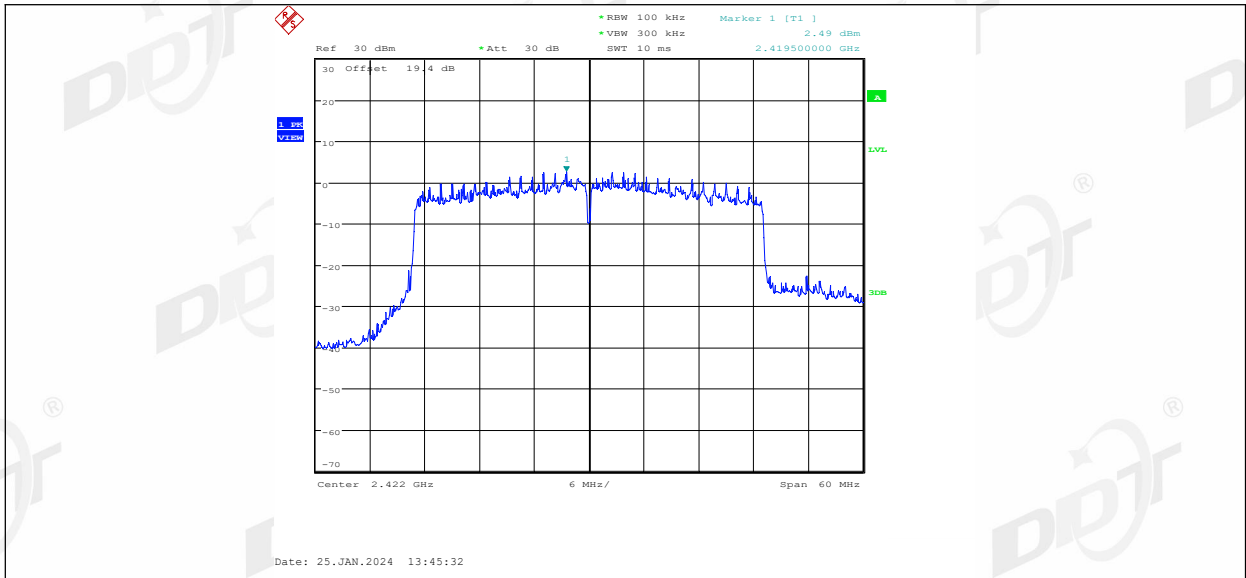


11AX40MIMO\_Ant1\_2422\_30~1000

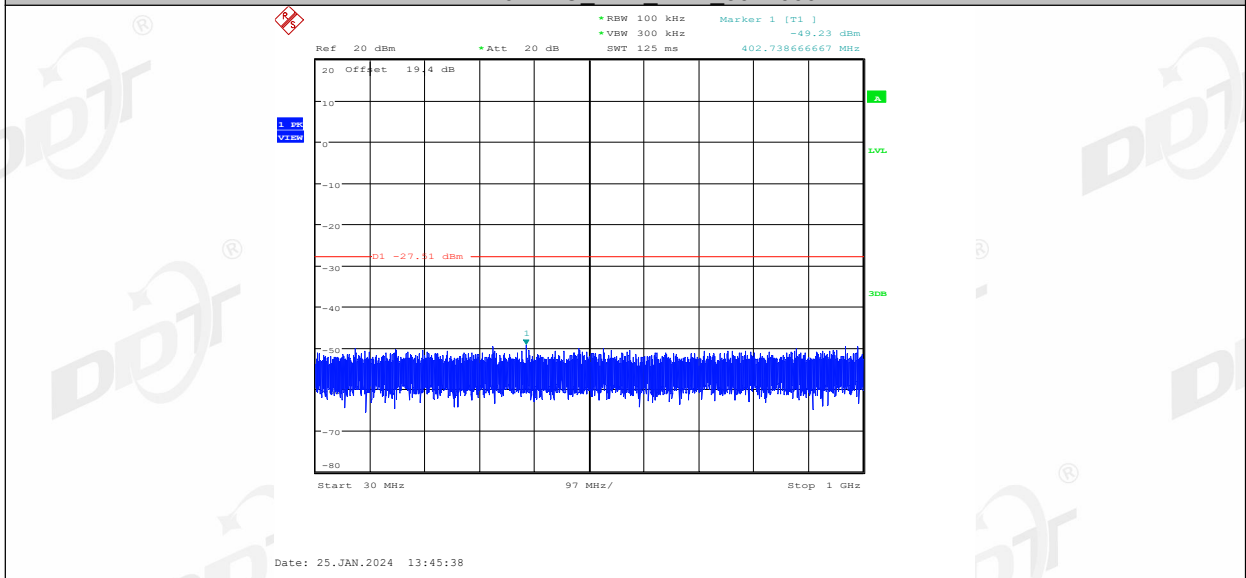


11AX40MIMO\_Ant1\_2422\_1000~26500

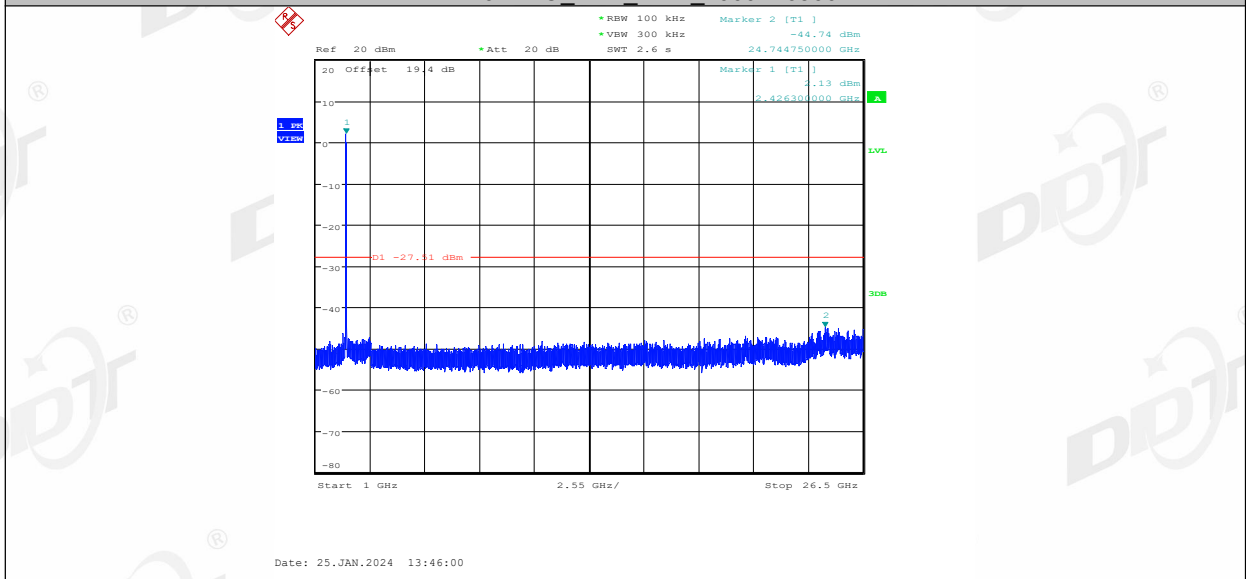


11AX40MIMO\_Ant2\_2422\_0~Reference

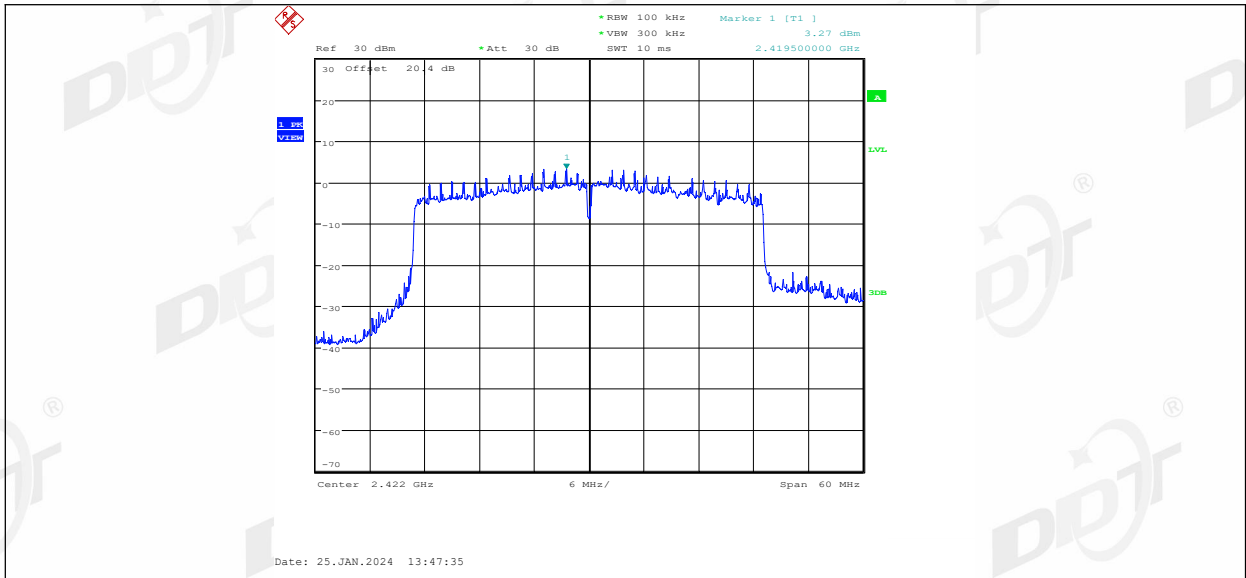

11AX40MIMO Ant2 2422 30~1000

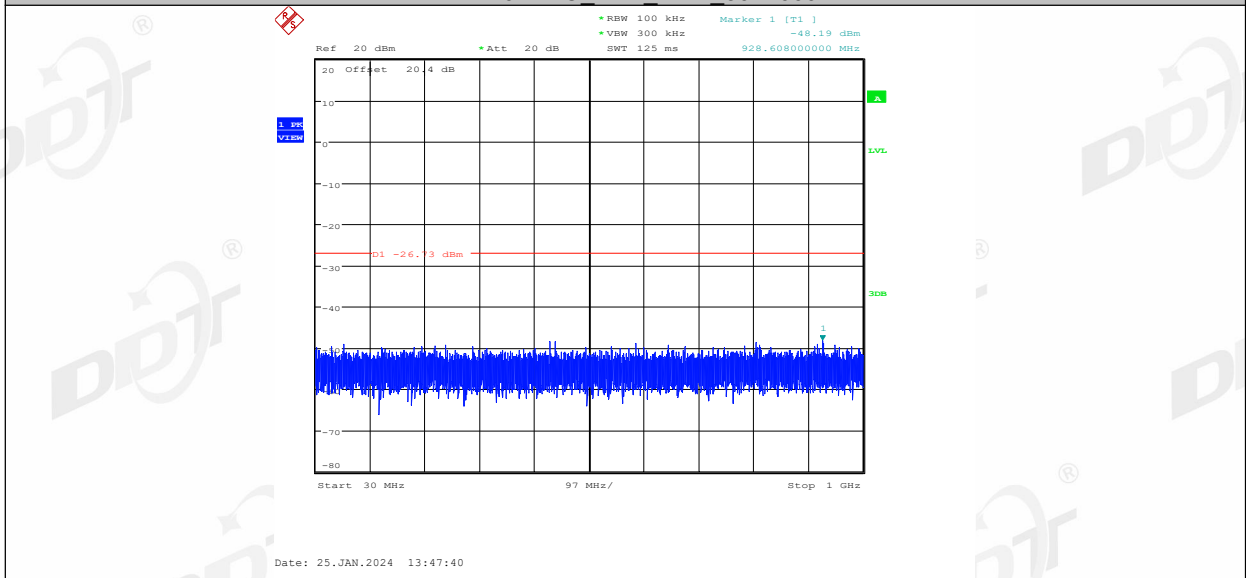

11AX40MIMO Ant2 2422 1000~26500

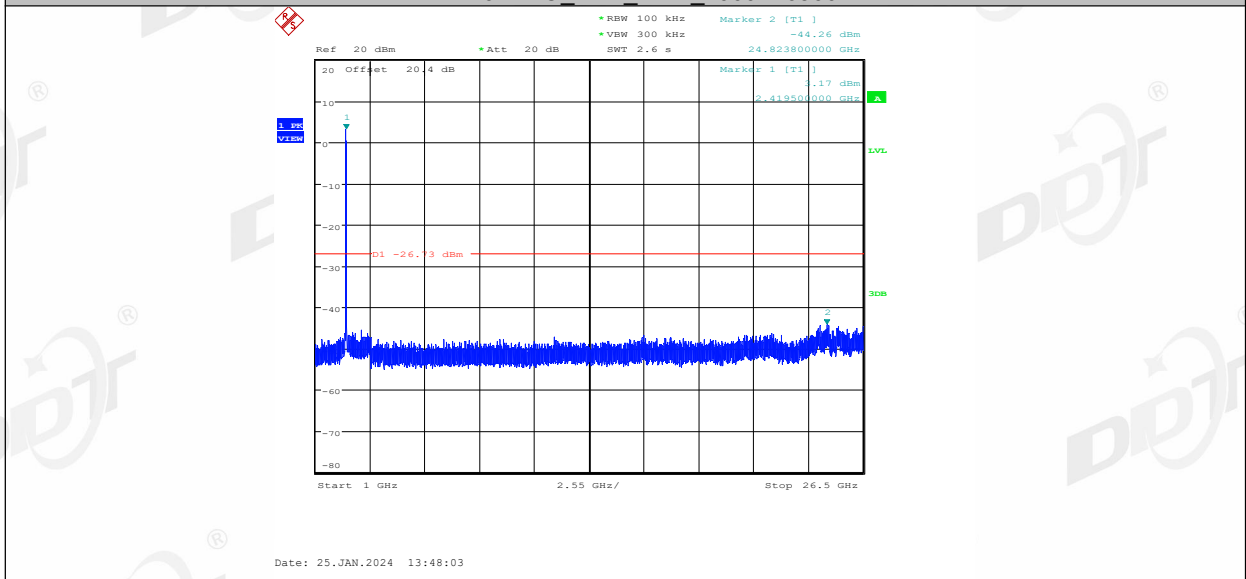

11AX40MIMO Ant1 2437 0~Reference