

Appendix B

RF Test Data for BT V4.0(BT LE) (Conducted Measurement)

Product Name: Smart Phone


Test Model: ELUGA RAY 800

Environmental Conditions

Temperature:	24.5 °C
Relative Humidity:	52.9%
ATM Pressure:	100.0 kPa
Test Engineer:	Wang Chuang
Supervised by:	Calvin Weng


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

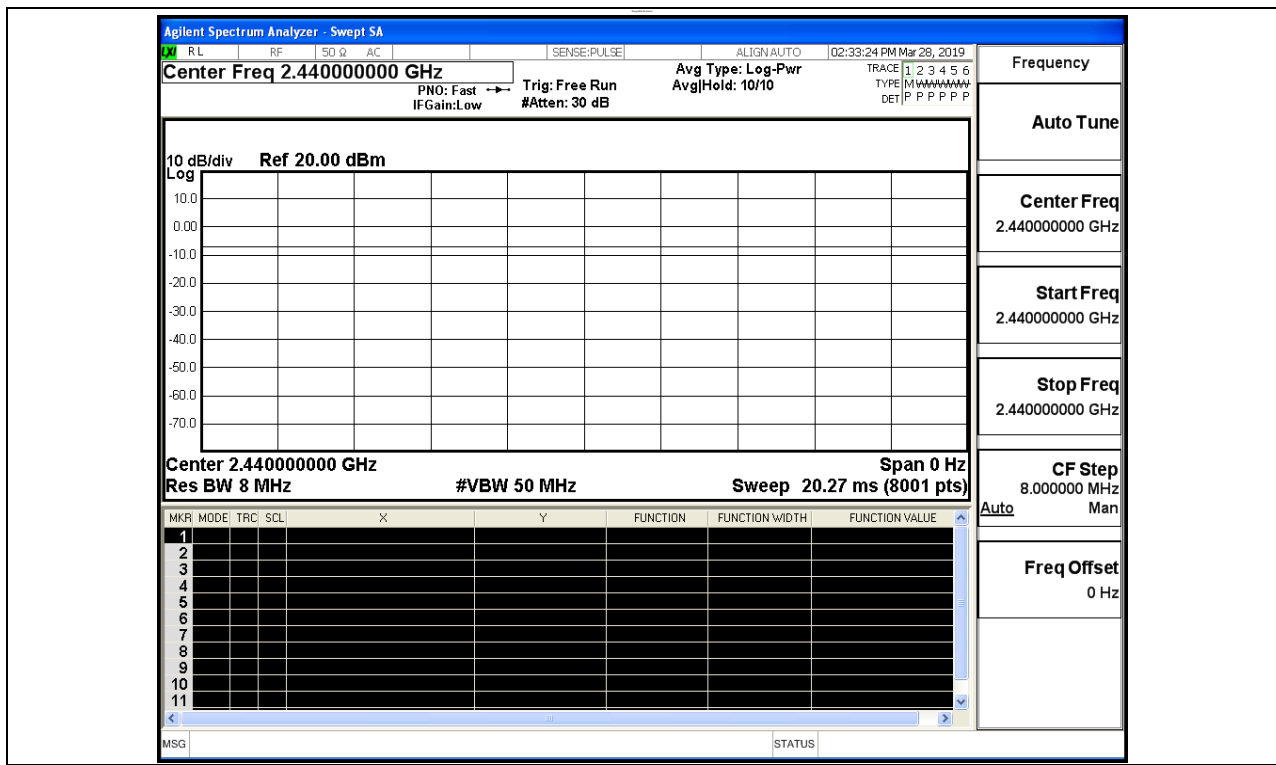


B.2 Maximum Conducted Peak Output Power


Mode	Channel	Conduct Peak Power[dBm]	Conduct Average Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.229	0.051	30	PASS
BT LE	MCH	0.844	0.647	30	PASS
BT LE	HCH	0.278	0.070	30	PASS

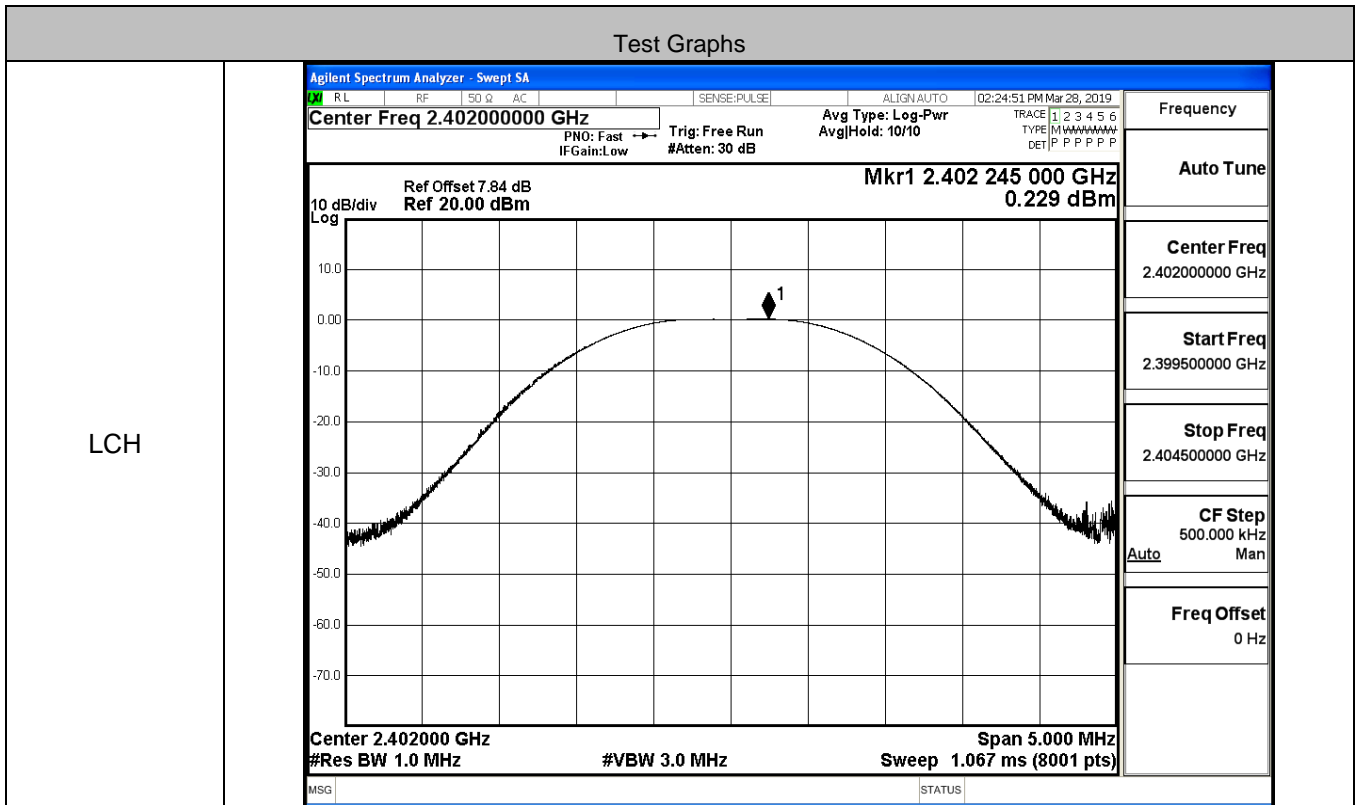

MCH

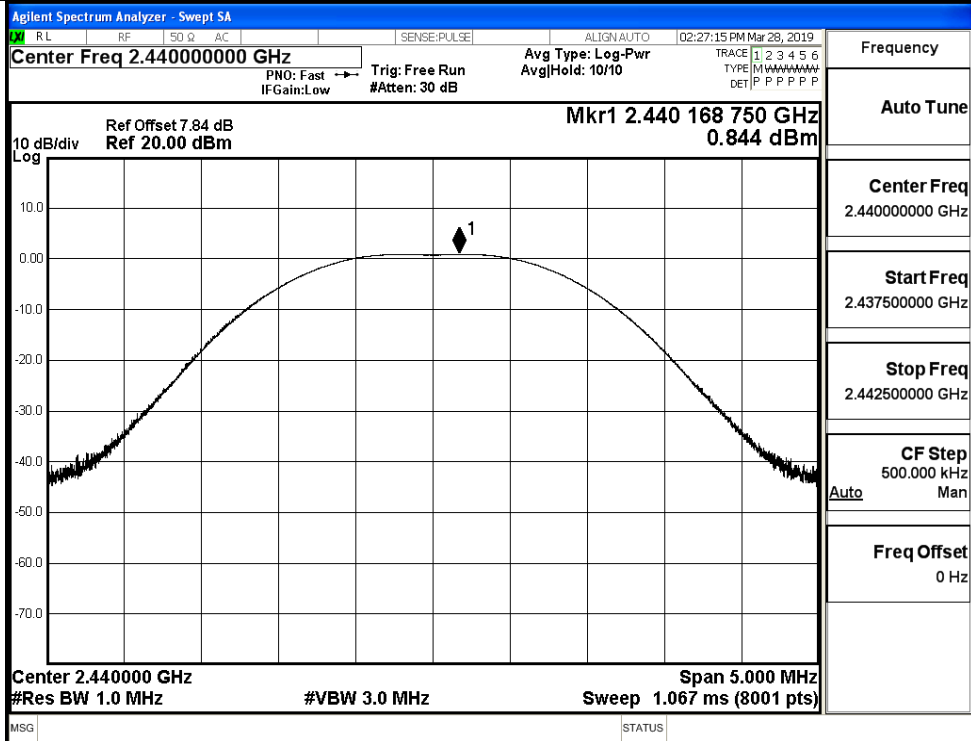



HCH

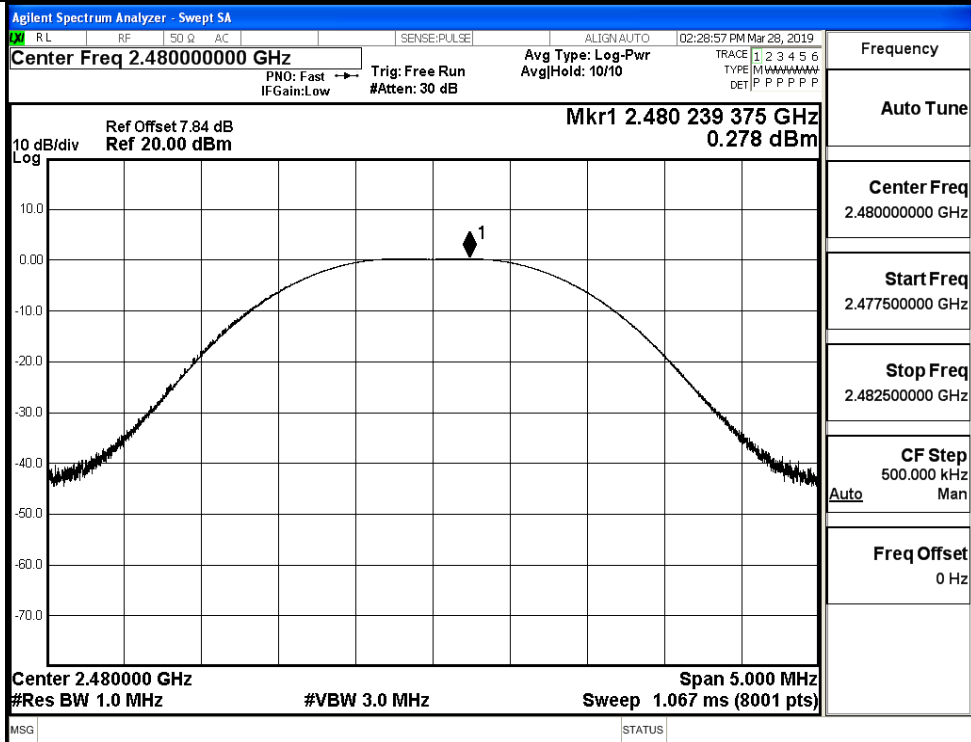


B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-14.784	8	PASS
BT LE	MCH	-14.026	8	PASS
BT LE	HCH	-14.592	8	PASS

Test Graphs

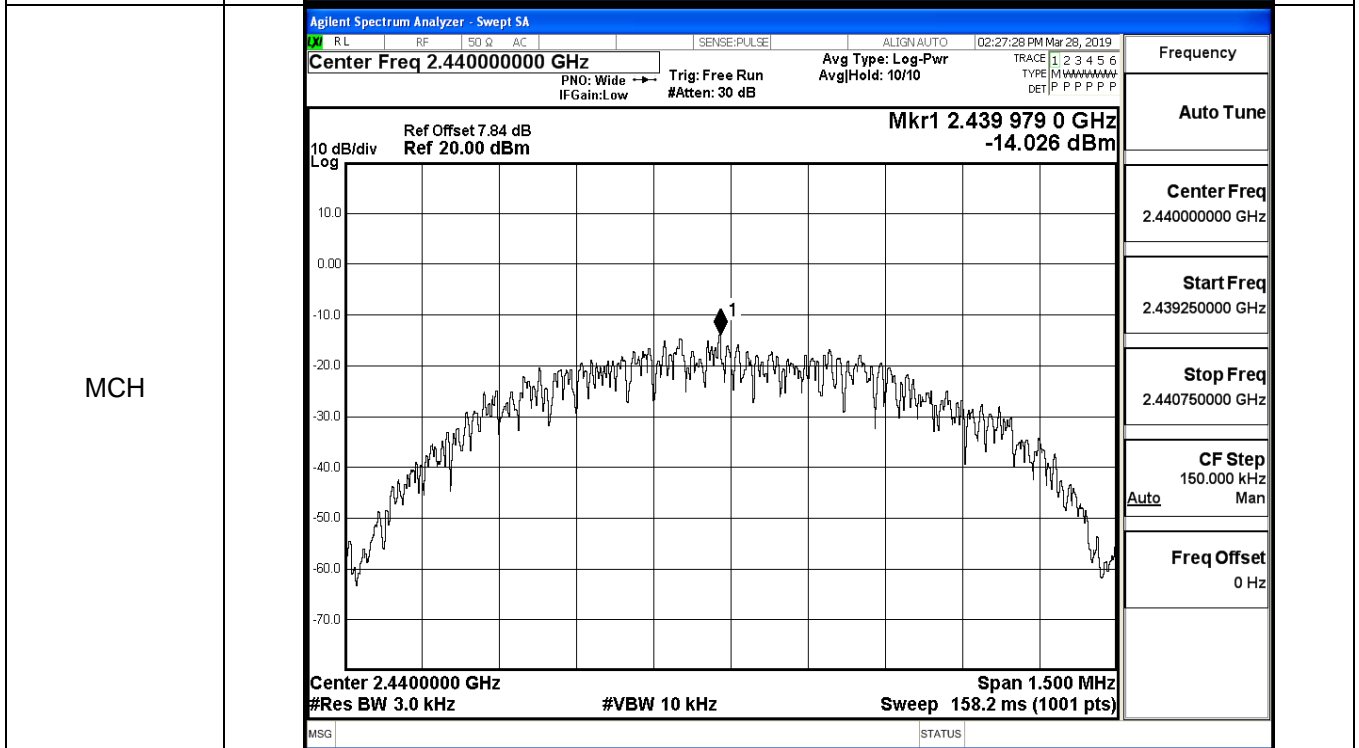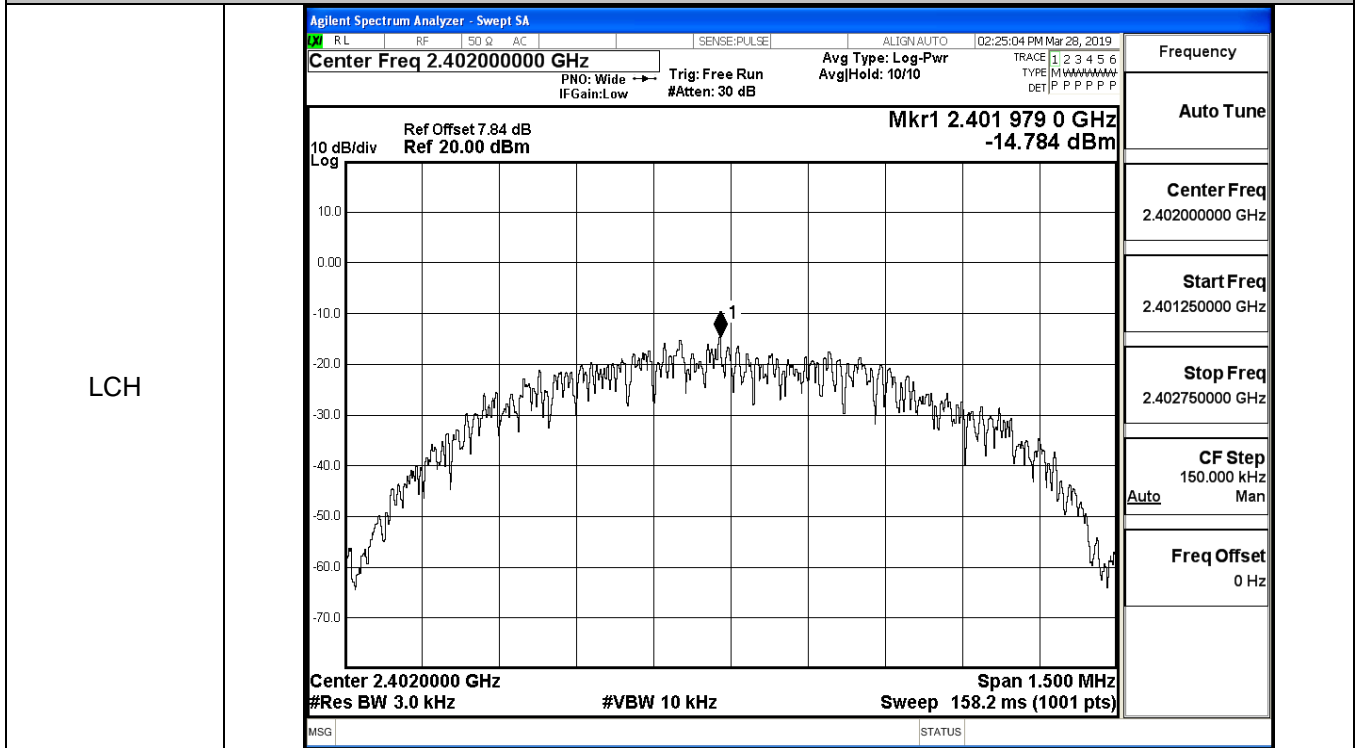


HCH

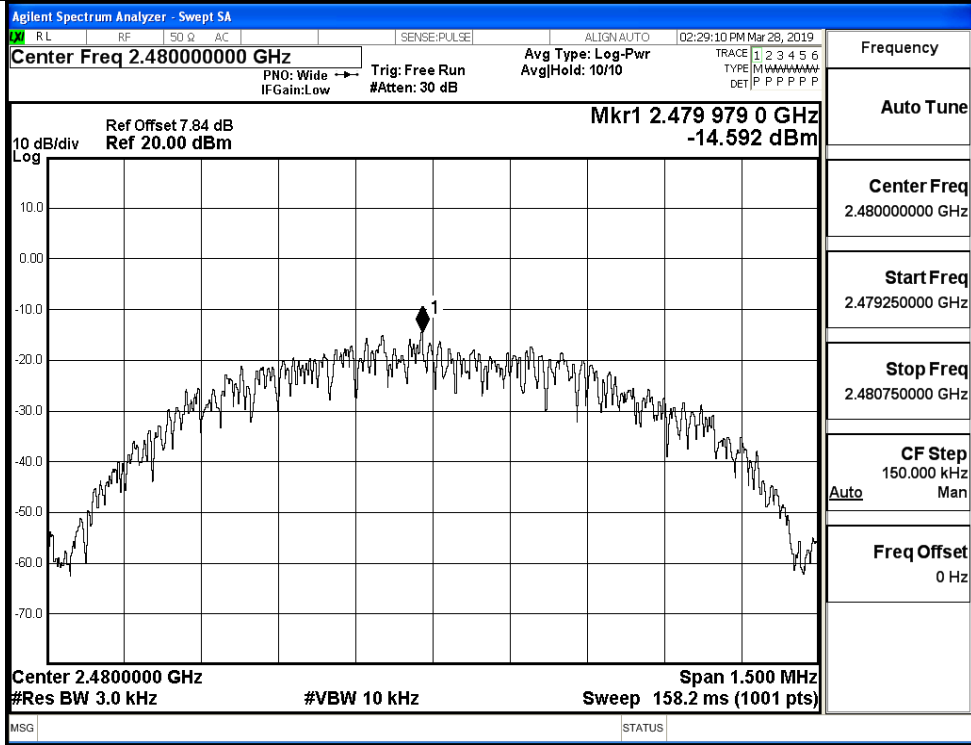

B.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6918	≥0.5	PASS
BT LE	MCH	0.6911	≥0.5	PASS
BT LE	HCH	0.6911	≥0.5	PASS

Test Graphs																	
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 02:24:39 PM Mar 28, 2019</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold: >1/1 #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4019974 GHz -0.59298 dBm</p> </div> <p style="margin: 0;">Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; border-collapse: collapse; font-size: small;"> <tr> <td style="width: 50%;">Occupied Bandwidth</td> <td style="width: 50%;">Total Power</td> <td colspan="2">6.48 dBm</td> </tr> <tr> <td colspan="4" style="text-align: center;">1.0523 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>6.031 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>691.8 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	6.48 dBm		1.0523 MHz				Transmit Freq Error	6.031 kHz	OBW Power	99.00 %	x dB Bandwidth	691.8 kHz	x dB	-6.00 dB
Occupied Bandwidth	Total Power	6.48 dBm															
1.0523 MHz																	
Transmit Freq Error	6.031 kHz	OBW Power	99.00 %														
x dB Bandwidth	691.8 kHz	x dB	-6.00 dB														
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 02:27:04 PM Mar 28, 2019</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4399963 GHz 0.078928 dBm</p> </div> <p style="margin: 0;">Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; border-collapse: collapse; font-size: small;"> <tr> <td style="width: 50%;">Occupied Bandwidth</td> <td style="width: 50%;">Total Power</td> <td colspan="2">7.16 dBm</td> </tr> <tr> <td colspan="4" style="text-align: center;">1.0493 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>4.378 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>691.1 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	7.16 dBm		1.0493 MHz				Transmit Freq Error	4.378 kHz	OBW Power	99.00 %	x dB Bandwidth	691.1 kHz	x dB	-6.00 dB
Occupied Bandwidth	Total Power	7.16 dBm															
1.0493 MHz																	
Transmit Freq Error	4.378 kHz	OBW Power	99.00 %														
x dB Bandwidth	691.1 kHz	x dB	-6.00 dB														

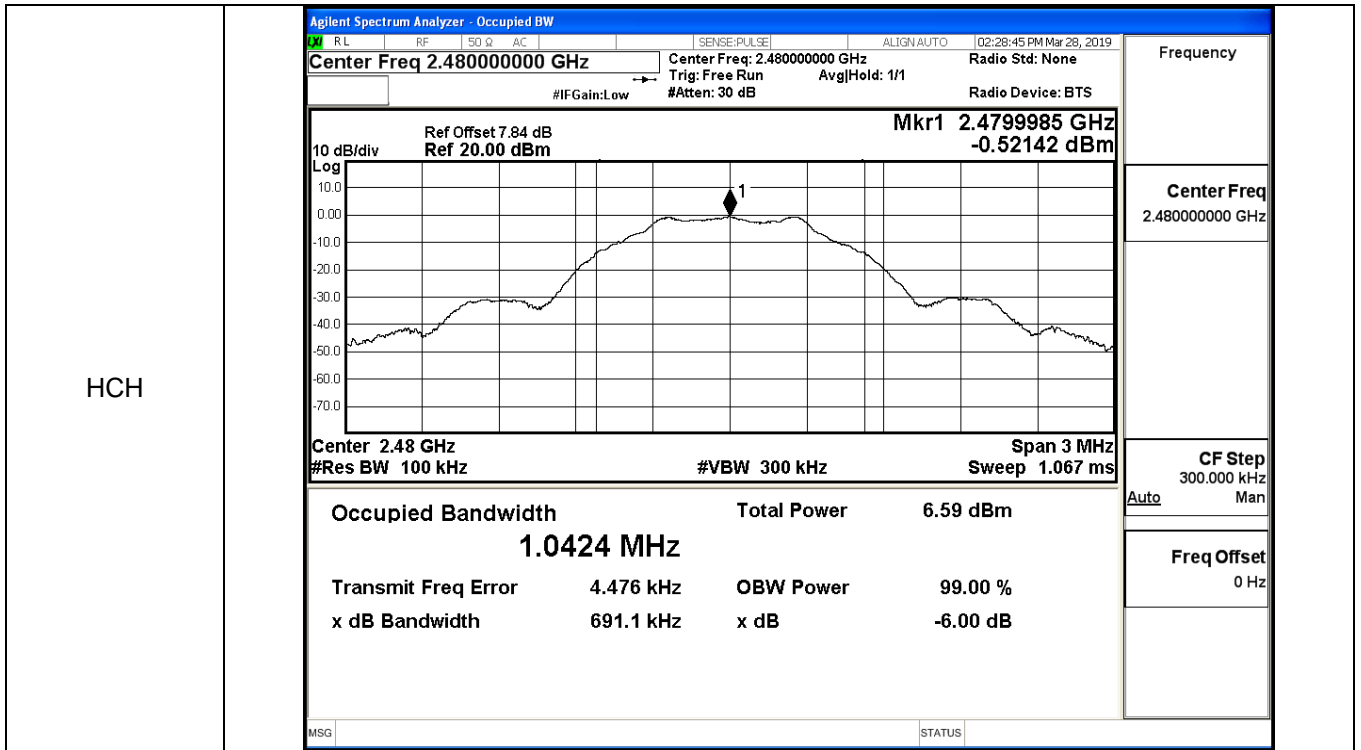


B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.611	-43.525	-20.611	PASS
BT LE	MCH	0.126	-42.415	-19.874	PASS
BT LE	HCH	-0.551	-41.178	-20.551	PASS

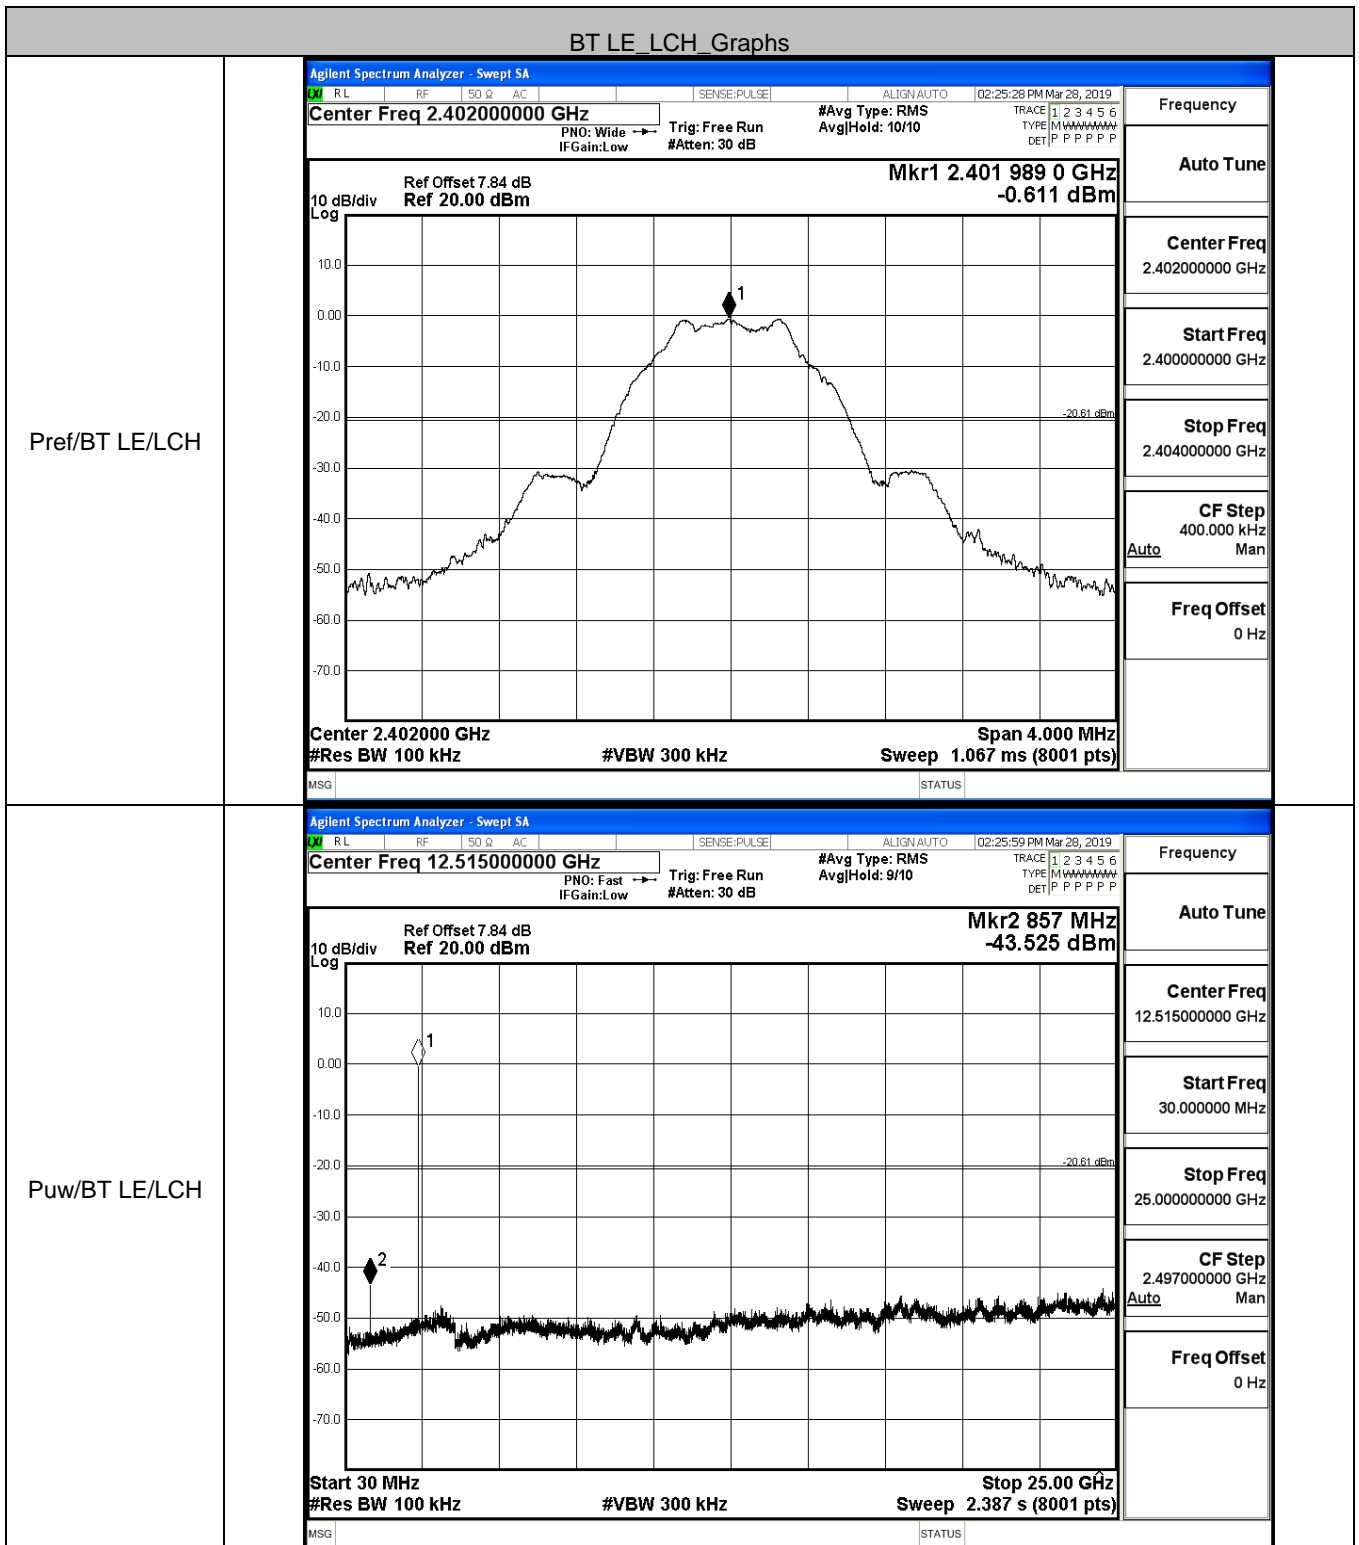


BT LE_MCH_Graphs

Pref/BT LE/MCH

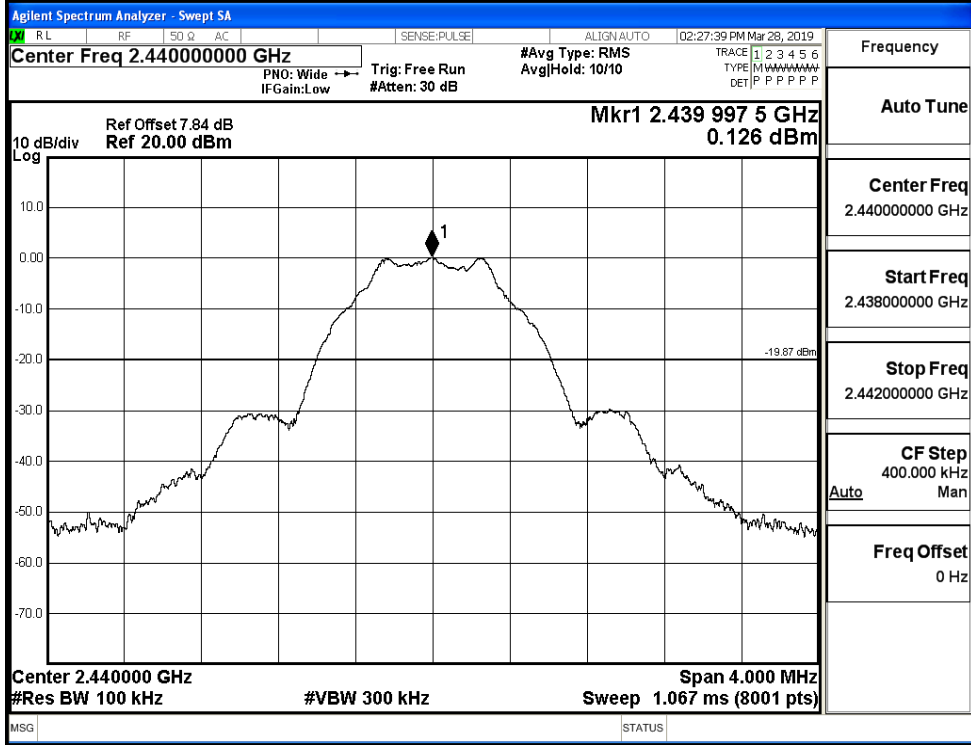


Puw/BT LE/MCH

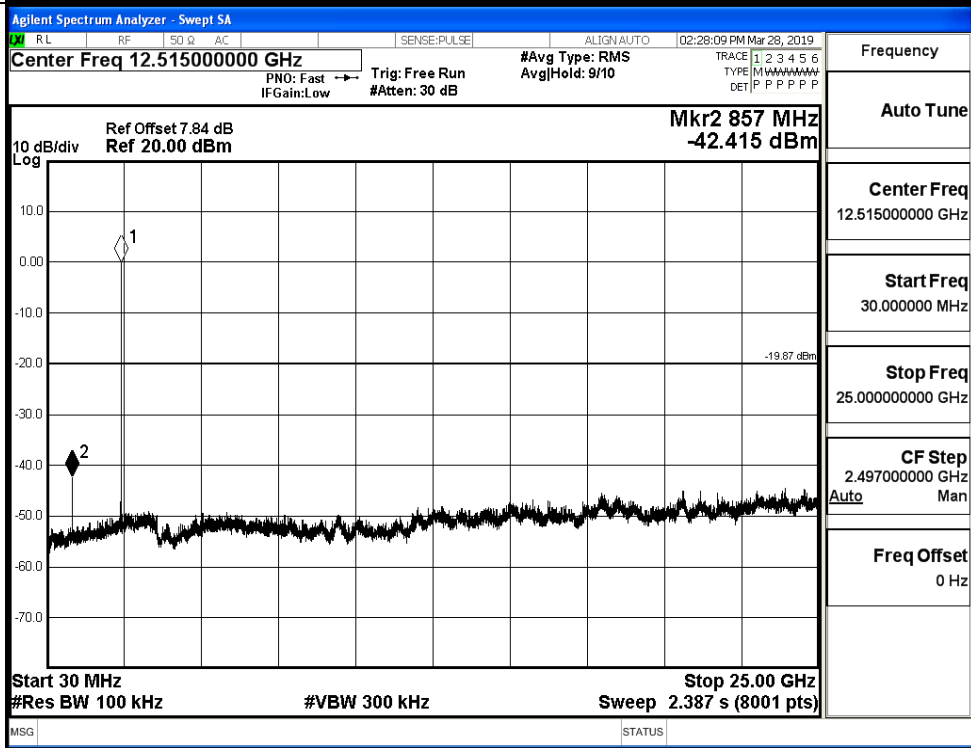


BT LE_HCH_Graphs

Pref/BT LE/HCH

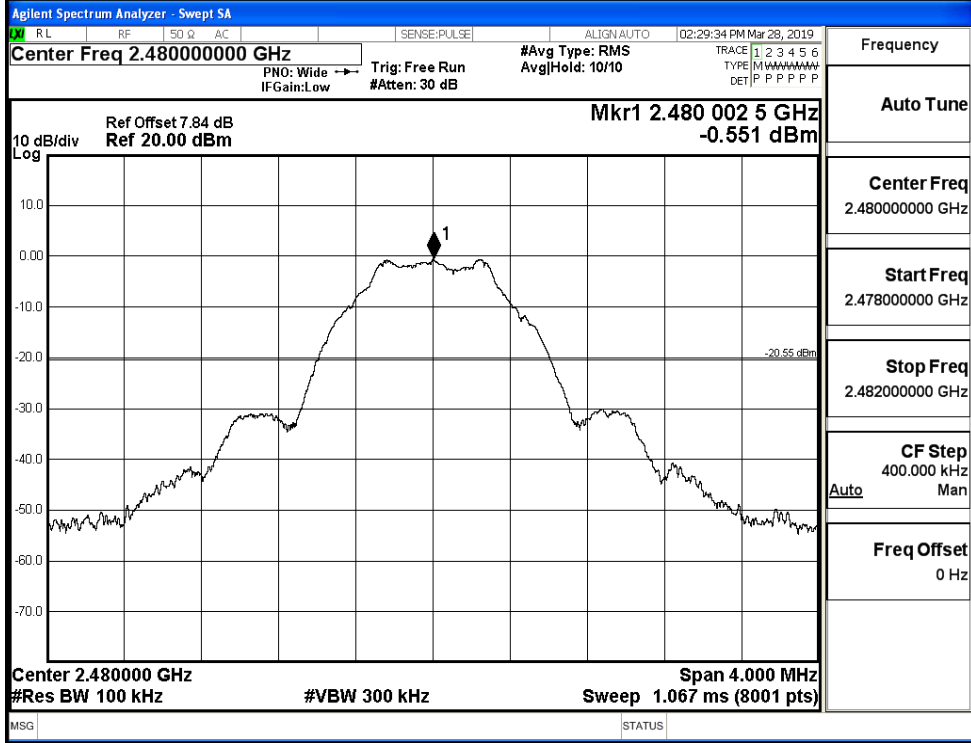

Puw/BT LE/HCH

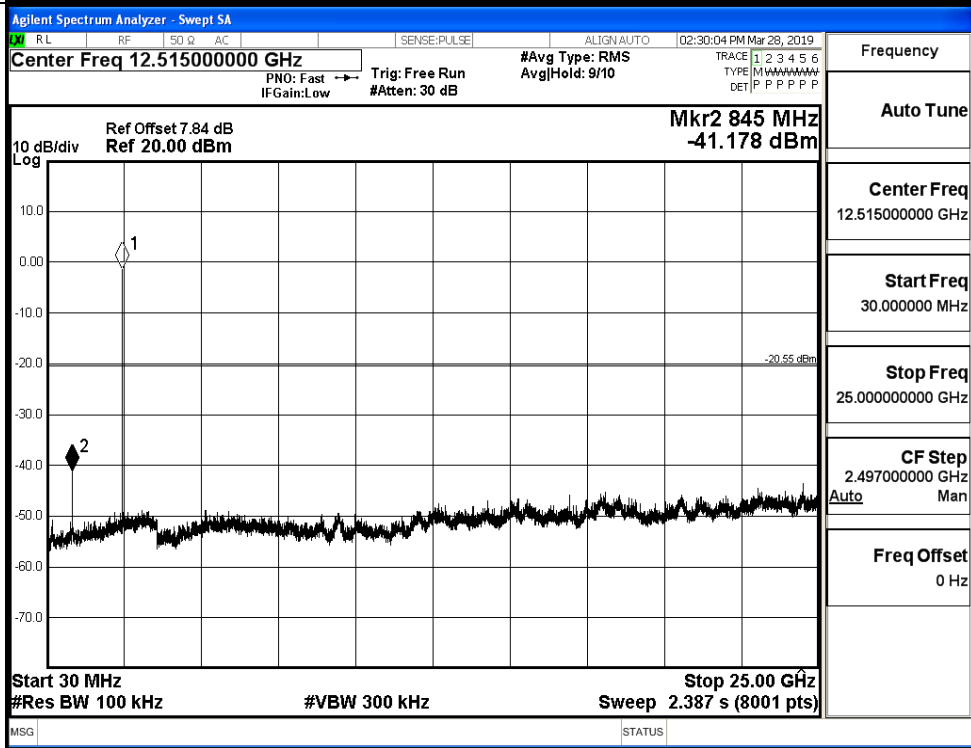

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.642	-50.096	-20.64	PASS
BT LE	HCH	-0.331	-20.33	PASS	

Test Graphs

LCH

Frequency

Auto Tune

Center Freq
2.35700000 GHz

Start Freq
2.31000000 GHz

Stop Freq
2.40400000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

HCH

Frequency

Auto Tune

Center Freq
2.48900000 GHz

Start Freq
2.47800000 GHz

Stop Freq
2.50000000 GHz


CF Step
2.200000 MHz

Freq Offset
0 Hz


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BT LE	2402	Ant1	2310.0	-43.14	2.0	0	52.12	PEAK	74	PASS
		Ant1	2310.0	-53.87	2.0	0	41.39	AV	54	PASS
		Ant1	2390.0	-43.66	2.0	0	51.60	PEAK	74	PASS
		Ant1	2390.0	-53.57	2.0	0	41.69	AV	54	PASS
	2480	Ant1	2483.5	-44.32	2.0	0	50.94	PEAK	74	PASS
		Ant1	2483.5	-53.18	2.0	0	42.08	AV	54	PASS
		Ant1	2500.0	-43.21	2.0	0	52.05	PEAK	74	PASS
		Ant1	2500.0	-53.22	2.0	0	42.04	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

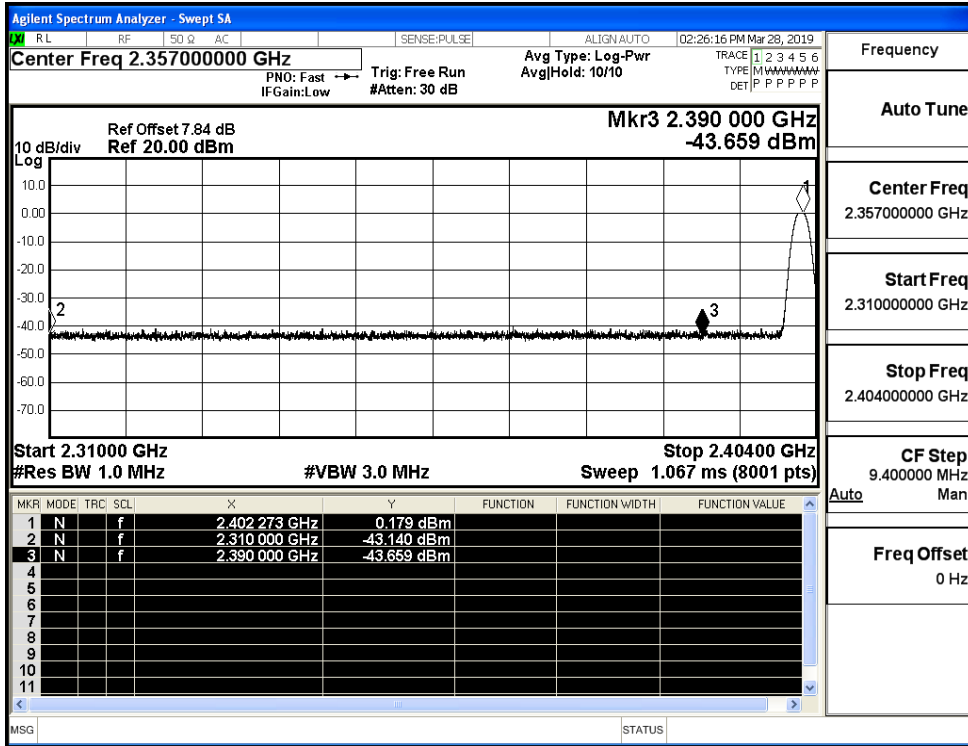

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

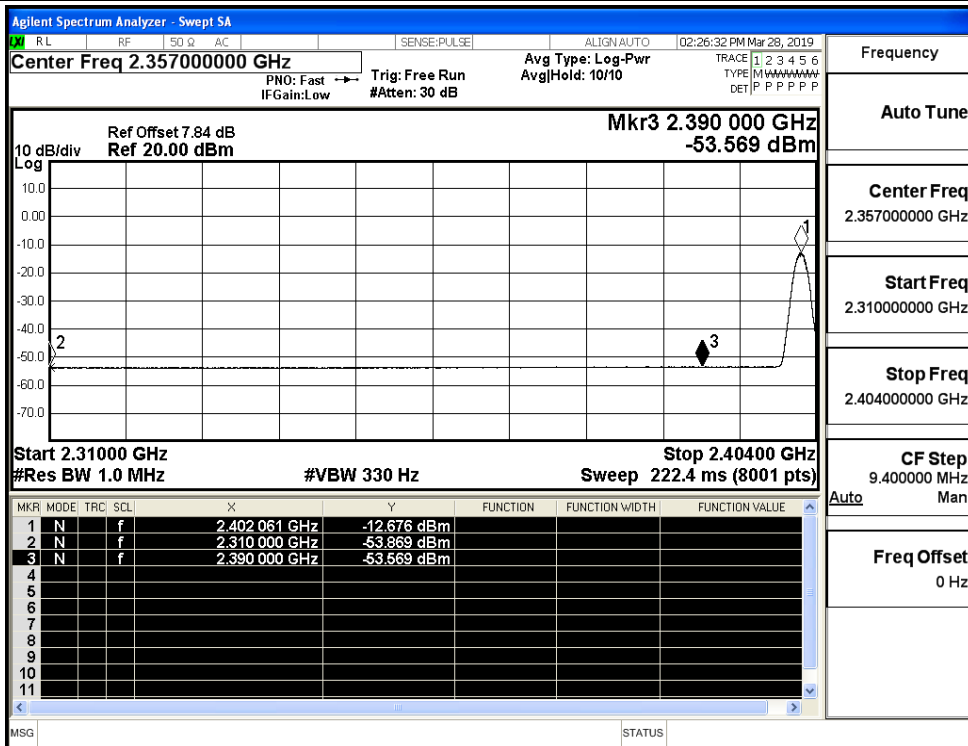

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

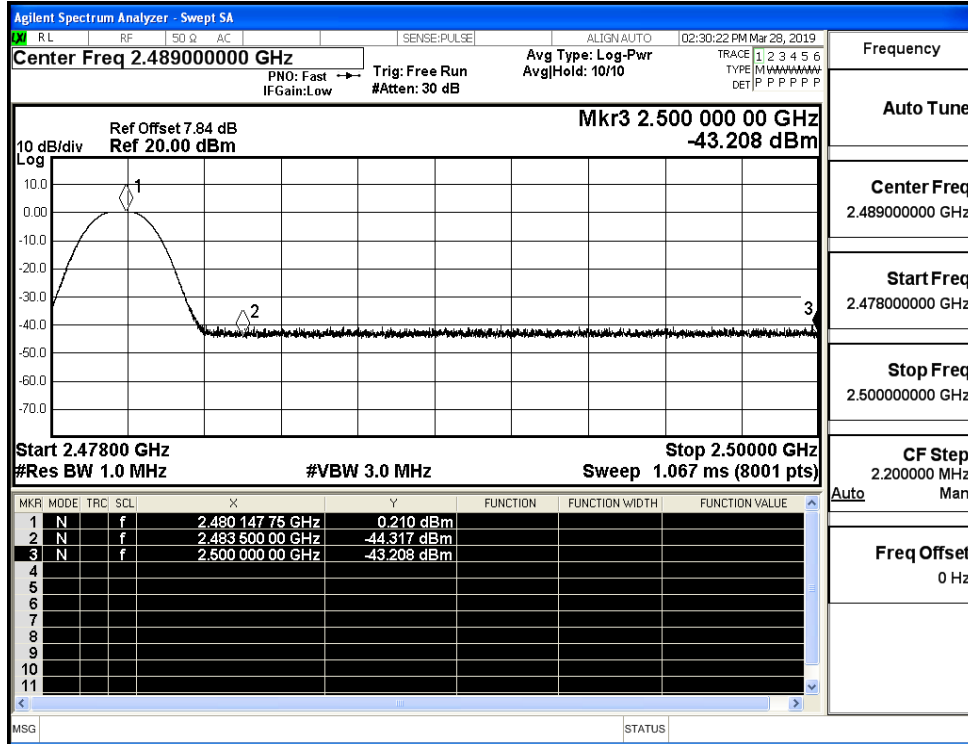

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

