


ZW35 Scene Control 700

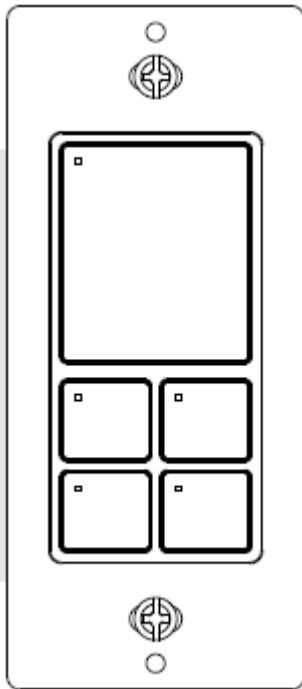

FIRMWARE VERSION 1.01

SPECIFICATIONS

Model: ZW35

Power: 120V AC, 60Hz

Signal (Frequency): 908.42 MHz

Maximum Load: 960W Incandescent, ½ HP Motor or 1800W (15A) Resistive

Range: Up to 100 feet line of sight

Controller (HUB) and the closest Z-Wave Module Operating Temperature Range: 32-104° F (0-40° C) For indoor use.

Approval: ETL/FCC/Z-Wave Plus Certified

FCC ID: 2AQRZW35

- Switch button: 15 A relay for Z-Wave on/off control
- 4 remote control buttons: trigger scenes and control other devices in your Z-Wave network from this switch
- NEW 700 series Z-Wave chip for better range and faster control
- Direct 3-Way: works with regular on/off switches In a 3-way
- Scene control: trigger actions with multi-tap (select hubs only)
- Smart bulb mode: disable relay and control the light via Z-Wave
- Adjustable LED indicator in 4 colors and 3 brightness levels
- S2 Security and SmartStart for easier inclusion

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.