

材质: 157G双铜

尺寸: 85\*65MM

风琴折



# User Manual

## BW-BTS8

CE FC

EC REP

UK REP

Name: VISHTEC Ltd  
Add: 3 rd floor office 5, Plovdiv 2 Liuben Karavelov bul., 4002 Bulgaria  
Email: compliances@vish-tec.com  
Phone: +359 32 540 357

Name: VISHTEC UK Co.,Ltd  
Add: 275 ISLINGTON SUITE 1405 NEW NORTH ROAD LONDON ENGLAND N1 7AA  
Email: Vincent.feng@vish-tec.com  
Phone: + 44 1594 679 384

| MP3 MODE        |  |
|-----------------|--|
| Switch MP3 Mode | Press power button twice (Power on status) |
| Pause/play      | Press power button once                    |
| Volume +/-      | Press + or - button once                   |
| Next song       | Press + button twice                       |
| Previous song   | Press - button twice                       |


| Specifications   |                    |
|------------------|--------------------|
| Model            | BW-BTS8            |
| BT version       | V5.3               |
| BT Protocol      | HSP/HFP/A2DP/AVRCP |
| Connect distance | 10m/33ft           |
| Built-in memory  | 32G                |
| Playback time    | Up to 10H          |
| Standby time     | About 240H         |

|                  |               |
|------------------|---------------|
| Charging time    | About 2 hours |
| Charging voltage | 5V            |
| Waterproof level | IPX8          |
| Weight           | 26g           |

### Storage & Maintenance

- \*Store the earphone in a cool and a dry place ,the working temperature is 0-45°C
- \*Do not put the earphone at a higher or lower temperature environment.
- \*Please charges it before using after a long time storages.
- \*Do not charge the earphone in the moist environment.
- \*Do not use the earphone during charging.
- \*Earphone resistance to water, but do not use under water for more than half an hour.


### Wearing Method



Separate the earphones with both hands, wear them in the appropriate position, and enjoy music companionship

Note:  
\*When using headphones, it is necessary to pay attention to wearing them correctly. Incorrect wearing methods can cause discomfort. The sound producing area of the headphones should be in front of your ears without inserting them into your ears.  
\*If the volume is not high enough, you can adjust the sound producing area of the headphones as close as possible to your ear holes

### FEATURES

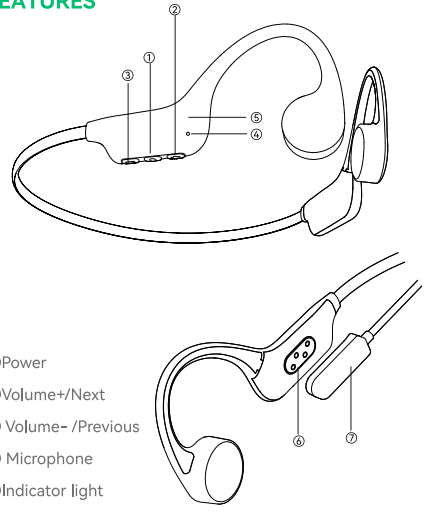

- ①Power
- ②Volume+/Next
- ③ Volume- /Previous
- ④ Microphone
- ⑤Indicator light
- ⑥Magnetic suction charging port
- ⑦Data transfer &charging cable

### Basic Operations

Power on /off:  
Press and hold the Power button for 3 seconds, when the indicator light flashes red and blue alternately, the headset has been turned on.When the red light turns on and off,the headset has been turned off.

**Pairing Method:**  
\*keep the headphone in the ranger of 1 meter if it's the first boot pairing  
\*When the red and blue light flash alternately. It means the headphone enters the automatic BT pairing mode.  
\*Open your smart device and find "BW-BTS8" from the BT list .Click on the connection.And the blue light flash slowly when being connected successfully.

### How to switch between BT mode and MP3 mode?

The headset is in Bluetooth mode by default . Press the "power on" button twice in a row to switch to MP3 mode.The same operation to switch to BT mode.

### How to charge the headphone ?

The battery capacity of the headphone will be displayed on the phone. When the headset prompts "Low power".

### Button Function

| BT MODE                 |  |
|-------------------------|--|
| Power on/off            | Press and hold on power button for 3s                    |
| Pause/play              | Press power button once                                  |
| Volume +/-              | Press + or - button once                                 |
| Next song               | Press + button twice                                     |
| Previous song           | Press - button twice                                     |
| Answer call             | Press power button once when incoming call               |
| Reject call             | Press and hold on power button for 2s when incoming call |
| Hang up                 | Press power button once during a call                    |
| SIRI                    | Press and hold on the + button for 2s                    |
| Game mode (Low latency) | Press and hold on the - button for 2s                    |
| Reset                   | Press + button 4 times                                   |

**FCC Warning Statement: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.**

**However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:**

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help.**

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

#### **FCC Radiation Exposure Statement**

**The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.**