




Safety Instruction



Thank you for purchasing Autoslide Wireless Push Button. Please refer to the following operation sheet before usage.

Product Overview

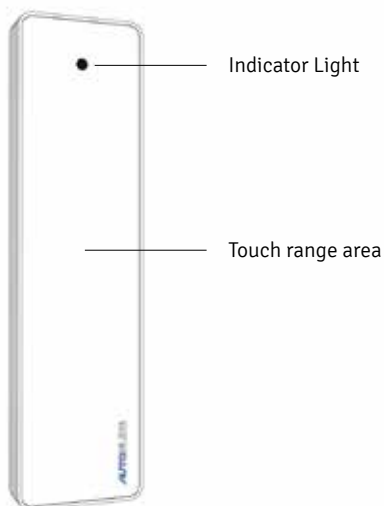

Wall mount options

Option 1




1. Undo the screw at the bottom of the switch.
2. Use 2 wall screws to fix the switch to the wall.

Option 2




Or use double side self-adhesive tape.

How to connect to Autoslide Controller

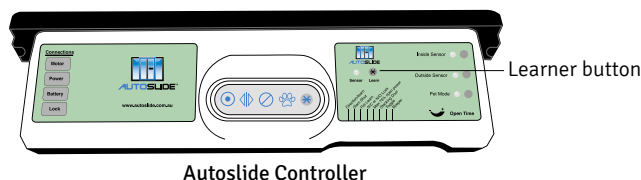

Autoslide Controller



1. Press the learn button on the Autoslide Controller.
2. Press the touch button, when the indicator light flashes red, the switch is connected.

The touch button now is connected to the controller and ready to activate the door.

Features

- Wireless touch button, no wiring required.
- Entire activation area, soft touch to activate the door.
- 2.4G wireless communication technology, stable frequency.
- Transmitter uses Low power transmission technology. It has long-range and low power consumption.
- Easy to connect with Autoslide operator.
- LED light indicates the switch is active.

Channel Selection

Autoslide Wireless Touch Button has two-channel selections, Master or Slave.

The onboard switch selects the preferred channel.



Technical Specifications

Rated voltage	3VDC (2x lithium coin batteries in parallel)
Rated current	Average 13uA
IP protection class	IP30
Product Maximum frequency	16MHz
RF transmitter specifications	
RF Frequency	433.92MHz
Type of modulation	ASK/OOK
Type of encoding	Pulse width modulation
Transmission bit rate	830 bit/sec
Transmission protocol	Keeloq
Length of transmitted packet	66 bits
Period of re-transmission when activated	Not re-transmitted until released
Transmitting power	<10dBm (nom 7dBm)



FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.