

**UNCLASSIFIED**

**SECURITY SUMMARY & SPECIAL HANDLING REQUIREMENTS**

**The Application Title is :** TrellisWare Shadow Radios (TW-900/TW-950)

**The System Name is :** TrellisWare Shadow Radios (TW-900/TW-950)

**The overall classification of this application is : UNCLASSIFIED**

**Refer to your Security Manual for further guidance.**

**The Application Level Special Handling is : A**

Approved for public release; distribution is unlimited (DoD Directive 5230.24)

**DOWNGRADING INSTRUCTIONS**

Special Handling Instruction : A

**CLASSIFICATION**

**UNCLASSIFIED**

<b>APPLICATION FOR EQUIPMENT FREQUENCY ALLOCATION</b>	<b>CLASSIFICATION UNCLASSIFIED</b>	<b>DATE</b> 4/25/2018	<b>PAGE 2</b>
<b>DOD GENERAL INFORMATION</b>			
<b>TO</b> (U) Army Spectrum Management Office (ASMO)  6916 Cooper Avenue, Fort Meade, MD 20755-9701	<b>FROM</b> (U) PdM Waveforms SFAE-CCC-TRW 6560 Surveillance Loop, Bldg 6007 Aberdeen Proving Ground, Maryland 21005		
<b>1. APPLICATION TITLE</b> (U) TrellisWare Shadow Radios (TW-900/TW-950)			
<b>2. SYSTEM NOMENCLATURE</b> (U) TrellisWare Shadow Radios (TW-900/TW-950)			
<b>3. STAGE OF ALLOCATION</b> (U) <input type="checkbox"/> <b>a. STAGE 1 CONCEPTUAL</b> <input type="checkbox"/> <b>b. STAGE 2 EXPERIMENTAL</b> <input type="checkbox"/> <b>c. STAGE 3 DEVELOPMENTAL</b> <input checked="" type="checkbox"/> <b>d. STAGE 4 OPERATIONAL</b>			
<b>4. FREQUENCY REQUIREMENTS</b> <b>a. FREQUENCY(IES)</b> <b>b. EMISSION DESIGNATORS</b>			
<b>5. TARGET STARTING DATE FOR SUBSEQUENT STAGES</b>			
<b>a. STAGE 2</b>	<b>b. STAGE 3</b>	<b>c. STAGE 4</b> (U) 6/29/2018	
<b>6. EXTENT OF USE</b> (U) Intermittent use of mesh network capabilities for demonstration and specific (See Data Overflow Page)			
<b>7. GEOGRAPHICAL AREA FOR</b>			
<b>a. STAGE 2</b>			
<b>b. STAGE 3</b>			
<b>c. STAGE 4</b> (U) US&P - Polygon			
<b>8. NUMBER OF UNITS</b>			
<b>a. STAGE 2</b>	<b>b. STAGE 3</b>	<b>c. STAGE 4</b> (U) 250	
<b>9. NUMBER OF UNITS OPERATING SIMULTANEOUSLY IN THE SAME ENVIRONMENT</b> (U) 250			
<b>10. OTHER J/F 12 APPLICATION ID(S) TO BE</b>  <input type="checkbox"/> <b>a. SUPERSEDED</b> <input type="checkbox"/> <b>b. RELATED</b>		<b>11. IS THERE ANY OPERATIONAL REQUIREMENT AS DESCRIBED IN THE INSTRUCTIONS FOR PARAGRAPH 11?</b>  <input type="checkbox"/> <b>a. YES</b> <input type="checkbox"/> <b>b. NO</b> <input type="checkbox"/> <b>c. NAVAIL</b>	
<b>12. NAMES AND TELEPHONE NUMBERS</b> (See Data Overflow Page)			
<b>(U) Sayeed Hasan, Ph. D.</b> Chief Engineer			
<b>13. REMARKS</b> (U) (U) See TrellisWare document titled "TSM Network Scalability Test Report" from 8/28/2017 for example of capability and scalability.  (U) Item 4a. Radios support the following frequency ranges: 225-450 MHz, 690-970 MHz, 1250-2620 MHz.			
<b>DOWNGRADING INSTRUCTIONS</b>  Special Handling Instruction : A			<b>CLASSIFICATION UNCLASSIFIED</b>

**DOD DATA OVERFLOW PAGE**

**6. EXTENT OF USE**

Cont. (U) fic exercise.

**12. NAMES AND TELEPHONE NUMBERS**

Cont. (U)

PdM Waveforms, PM Tactical Radios, PEO C3T

Desk: 443-395-2626

Mobile: 443-252-1865

**13. REMARKS**

(U) Item 4b. Radios support the following emission designators: 1M20G1D, 3M60G1D, 10M0G1D, 20M0G1D, 40M0G2D.

**DOWNGRADING INSTRUCTIONS**

Special Handling Instruction : A

CLASSIFICATION  
**UNCLASSIFIED**

**TRANSMITTER EQUIPMENT CHARACTERISTICS**

<b>1. NOMENCLATURE, MANUFACTURER'S MODEL NO.</b> (U) Shadow, (U) TW-900/TW-950 Shadow	<b>2. MANUFACTURER'S NAME</b> (See Data Overflow Page) (U) TrellisWare Technologies, Inc.,															
<b>3. TRANSMITTER INSTALLATION</b> (U) Portable, handheld	<b>4. TRANSMITTER TYPE</b> (U) Phase Modulation Communications															
<b>5. TUNING RANGE</b> (See Data Overflow Page) (U) 1250.600 - 2619.400 MHz (U) 225.6000 - 449.4000 MHz	<b>6. METHOD OF TUNING</b> (U) Synthesizer															
<b>7. RF CHANNELING CAPABILITY</b> (See Data Overflow Page) (U) 5.0000 kHz Increments (U) 5.0000 kHz Increments	<b>8. EMISSION DESIGNATORS</b> (See Data Overflow Page) (U) 10M0G1D															
<b>9. FREQUENCY TOLERANCE</b> (U) 0.5 ppm	<b>12. EMISSION BANDWIDTH</b>  <div style="text-align: center;"> <input type="checkbox"/> CALCULATED    <input checked="" type="checkbox"/> MEASURED                 </div> <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:33%;"><b>a. -3 dB</b></td> <td style="width:33%;">(U) 7400 kHz</td> <td style="width:33%;">(U) 6800 kHz</td> </tr> <tr> <td><b>b. -20 dB</b></td> <td>(U) 10400 kHz</td> <td>(U) 10400 kHz</td> </tr> <tr> <td><b>c. -40 dB</b></td> <td>(U) 16400 kHz</td> <td>(U) 15600 kHz</td> </tr> <tr> <td><b>d. -60 dB</b></td> <td>(U) 25200 kHz</td> <td>(U) 24000 kHz</td> </tr> <tr> <td><b>e. OC-BW</b></td> <td>(U) 10000 kHz</td> <td>(U) 10000 kHz</td> </tr> </table>	<b>a. -3 dB</b>	(U) 7400 kHz	(U) 6800 kHz	<b>b. -20 dB</b>	(U) 10400 kHz	(U) 10400 kHz	<b>c. -40 dB</b>	(U) 16400 kHz	(U) 15600 kHz	<b>d. -60 dB</b>	(U) 25200 kHz	(U) 24000 kHz	<b>e. OC-BW</b>	(U) 10000 kHz	(U) 10000 kHz
<b>a. -3 dB</b>		(U) 7400 kHz	(U) 6800 kHz													
<b>b. -20 dB</b>		(U) 10400 kHz	(U) 10400 kHz													
<b>c. -40 dB</b>		(U) 16400 kHz	(U) 15600 kHz													
<b>d. -60 dB</b>		(U) 25200 kHz	(U) 24000 kHz													
<b>e. OC-BW</b>	(U) 10000 kHz	(U) 10000 kHz														
<b>10. FILTER EMPLOYED</b> (U) Tunable BPF + Harmonic LPF																
<b>11. SPREAD SPECTRUM</b>  <input type="checkbox"/> a. YES <input checked="" type="checkbox"/> b. NO																
<b>13. MAXIMUM BIT RATE</b> (U) 40000000 bps																
<b>14. MODULATION TECHNIQUES AND CODING</b> (U) Digital																
<b>15. MAXIMUM MODULATION FREQUENCY</b> (U) 2620000 kHz (U) 450000 kHz																
<b>16. PRE-EMPHASIS</b>  <input type="checkbox"/> a. YES <input type="checkbox"/> b. NO	<b>17. DEVIATION RATIO</b>															
<b>19. POWER</b>	<b>18. PULSE CHARACTERISTICS</b>															
<b>a. MEAN</b>	<b>a. RATE</b>															
<b>b. PEP</b> (U) 0.125 W - (U) 2.00 W	<b>b. WIDTH</b>															
<b>c. CARRIER</b>	<b>c. RISE TIME</b>															
<b>20. OUTPUT DEVICE</b> (U) Integrated Circuit	<b>d. FALL TIME</b>															
<b>22. SPURIOUS LEVEL</b> (U) -60.0 dB	<b>e. COMP RATIO</b>															
<b>23. FCC TYPE ACCEPTANCE NO.</b> (U) N/A	<b>21. HARMONIC LEVEL</b>															
	<b>a.</b> (U) -53.0 dB															
	<b>b.</b> (U) -53.0 dB															
	<b>c.</b> (U) -60.0 dB															

**24. REMARKS (U)**

(U) Item 8. Radio has five operating bandwidth modes: 1.2 MHz, 3.6 MHz, 10 MHz, 20 MHz, and 40 MHz. All bandwidth modes utilize CPM modulation. The 10 MHz and 20 MHz modes each utilize two different CPM modulations for different types of traffic. The 40 MHz mode utilizes two adjacent 20 MHz channels to increase network capacity, but is only transmitting in one of the two 20 MHz channels at any given moment.

(U) Item 12. Measured data is provided for every combination of frequency band and emission designator. The measured data shows the widest possible spectrum utilization for each emission designator.

**TRANSMITTER DATA OVERFLOW PAGE**

**2. MANUFACTURER'S NAME**

(U)  
16516 Via Esprillo, Ste 300  
San Diego, CA 92127

**5. TUNING RANGE**

(U) 690.6000 MHz - (U) 969.4000 MHz

**7. RF CHANNELING CAPABILITY**

(U) 5.0000 kHz Increments

**8. EMISSION DESIGNATORS**

(U) 1M20G1D	(U) 20M0G1D	(U) 3M60G1D
(U) 40M0G2D		

**12. EMISSION BANDWIDTH**

-3.00 dB (U) 6000 kHz	-3.00 dB (U) 580 kHz	-3.00 dB (U) 156 kHz
-20.0 dB (U) 10400 kHz	-20.0 dB (U) 1420 kHz	-20.0 dB (U) 1360 kHz
-40.0 dB (U) 15600 kHz	-40.0 dB (U) 2200 kHz	-40.0 dB (U) 2200 kHz
-60.0 dB (U) 24000 kHz	-60.0 dB (U) 4000 kHz	-60.0 dB (U) 3200 kHz
Measured	Measured	Measured
OC-BW (U) 10000 kHz	OC-BW (U) 1200.0 kHz	OC-BW (U) 1200.0 kHz
-3.00 dB (U) 600 kHz	-3.00 dB (U) 18400 kHz	-3.00 dB (U) 18400 kHz
-20.0 dB (U) 1440 kHz	-20.0 dB (U) 24000 kHz	-20.0 dB (U) 24000 kHz
-40.0 dB (U) 2200 kHz	-40.0 dB (U) 38000 kHz	-40.0 dB (U) 38000 kHz
-60.0 dB (U) 3800 kHz	-60.0 dB (U) 76000 kHz	-60.0 dB (U) 76000 kHz
Measured	Measured	Measured
OC-BW (U) 1200.0 kHz	OC-BW (U) 20000 kHz	OC-BW (U) 20000 kHz
-3.00 dB (U) 18200 kHz	-3.00 dB (U) 1660 kHz	-3.00 dB (U) 620 kHz
-20.0 dB (U) 24000 kHz	-20.0 dB (U) 4200 kHz	-20.0 dB (U) 3800 kHz
-40.0 dB (U) 40000 kHz	-40.0 dB (U) 6200 kHz	-40.0 dB (U) 5400 kHz
-60.0 dB (U) 74000 kHz	-60.0 dB (U) 10400 kHz	-60.0 dB (U) 9400 kHz
Measured	Measured	Measured
OC-BW (U) 20000 kHz	OC-BW (U) 3600.0 kHz	OC-BW (U) 3600.0 kHz
-3.00 dB (U) 2200 kHz	-3.00 dB (U) 38000 kHz	-3.00 dB (U) 38000 kHz
-20.0 dB (U) 4200 kHz	-20.0 dB (U) 40000 kHz	-20.0 dB (U) 40000 kHz
-40.0 dB (U) 7000 kHz	-40.0 dB (U) 56000 kHz	-40.0 dB (U) 54000 kHz
-60.0 dB (U) 11000 kHz	-60.0 dB (U) 82000 kHz	-60.0 dB (U) 84000 kHz
Measured	Measured	Measured
OC-BW (U) 3600.0 kHz	OC-BW (U) 40000 kHz	OC-BW (U) 20000 kHz

**15. MAXIMUM MODULATION FREQUENCY**

(U) 970000 kHz	(U) 2620000 kHz	(U) 450000 kHz
(U) 970000 kHz	(U) 2620000 kHz	(U) 450000 kHz
(U) 970000 kHz	(U) 2620000 kHz	(U) 450000 kHz
(U) 970000 kHz	(U) 2620000 kHz	(U) 970000 kHz

**24. REMARKS**

(U) Item 16. N/A

(U) Item 17. N/A

**TRANSMITTER DATA OVERFLOW PAGE**

**24. REMARKS** (continued)

(U) Item 18. N/A

(U) Item 19. Radio has ALC with following selectable power levels: 0.100W, 0.250W, 0.5W, 1.0W, and 2.0W. Modulation is constant envelope. Transmitter is burst based, so transmit duty cycle (and mean transmit power) is dependent on requested data traffic.

(U) Item 20. Output device is an integrated circuit power amplifier.

(U) Item 21. Measured data.

**RECEIVER EQUIPMENT CHARACTERISTICS**

<b>1. NOMENCLATURE, MANUFACTURER'S MODEL NO.</b> (U) Shadow, (U) TW-900/TW-950 Shadow				<b>2. MANUFACTURER'S NAME</b> (See Data Overflow Page) (U) TrellisWare Technologies, Inc.,			
<b>3. RECEIVER INSTALLATION</b>				<b>4. RECEIVER TYPE</b> (U) Phase Modulation Communications			
<b>5. TUNING RANGE</b> (See Data Overflow Page) (U) 225.6000 - 449.4000 MHz (U) 690.6000 - 969.4000 MHz				<b>6. METHOD OF TUNING</b> (U) Synthesizer			
<b>7. RF CHANNELING CAPABILITY</b> (See Data Overflow Page) (U) 5.0000 kHz Increments (U) 5.0000 kHz Increments				<b>8. EMISSION DESIGNATORS</b> (See Data Overflow Page) (U) 10M0G1D			
<b>9. FREQUENCY TOLERANCE</b> (U) 0.5 ppm				<b>11. RF SELECTIVITY</b> (See Data Overflow Page) <input type="checkbox"/> CALCULATED <input checked="" type="checkbox"/> <b>MEASURED</b>			
<b>10. IF SELECTIVITY</b>	<b>1st</b>	<b>2nd</b>	<b>3rd</b>	<b>a. -3 dB</b> (U) 19400 kHz			
<b>a. -3 dB</b>				<b>b. -20 dB</b> (U) 22000 kHz			
<b>b. -20 dB</b>				<b>c. -60 dB</b> (U) 50000 kHz			
<b>c. -60 dB</b>				<b>d. Preselection Type</b> (U) Digitally Tunable			
<b>12. IF FREQUENCY</b> a. 1st b. 2nd c. 3rd				<b>13. MAXIMUM POST DETECTION FREQUENCY</b>			
<b>15. OSCILLATOR TUNED</b>				<b>14. MINIMUM POST DETECTION FREQUENCY</b>			
<b>a. ABOVE TUNED FREQUENCY</b>	<b>1st</b>	<b>2nd</b>	<b>3rd</b>	<b>16. MAXIMUM BIT RATE</b> (U) 40000000 bps			
<b>b. BELOW TUNED FREQUENCY</b>				<b>17. SENSITIVITY</b> (See Data Overflow Page)			
<b>c. EITHER ABOVE OR BELOW THE FREQUENCY</b>	(U) X			<b>a. SENSITIVITY</b> (U) -102 dBm			
<b>18. DE-EMPHASIS</b> <input type="checkbox"/> a. YES <input type="checkbox"/> b. NO				<b>b. CRITERIA</b> (U) 0.01 (U) Other			
<b>19. IMAGE REJECTION</b>				<b>c. NOISE FIG</b> (U) 8.00 dB			
<b>20. SPURIOUS REJECTION</b> (U) 80.0 dB				<b>d. NOISE TEMP</b> (U) 1540 K			

**21. REMARKS** (U)  
 (U) Item 10. N/A - Homodyne receiver.  
 (U) Item 11. 20 MHz data is measured. 1.2MHz, 3.6MHz, 10MHz data is calculated.  
 (U) Item 12. N/A - Homodyne receiver.  
 (U) Item 13. N/A - CPM Modulation.  
 (U) Item 14. N/A - CPM Modulation.

**RECEIVER DATA OVERFLOW PAGE**

**2. MANUFACTURER'S NAME**

(U)  
16516 Via Esprillo, Ste 300  
San Diego, CA 92127

**5. TUNING RANGE**

(U) 1250.600 MHz - (U) 2619.400 MHz

**7. RF CHANNELING CAPABILITY**

(U) 5.0000 kHz Increments

**8. EMISSION DESIGNATORS**

(U) 1M20G1D	(U) 20M0G1D	(U) 3M60G1D
(U) 40M0G2D		

**11. RF SELECTIVITY**

3.00 dB(U) 8000 kHz	3.00 dB(U) 3000 kHz	3.00 dB(U) 1000 kHz
20.0 dB(U) 10500 kHz	20.0 dB(U) 4600 kHz	20.0 dB(U) 1200 kHz
60.0 dB(U) 34000 kHz	60.0 dB(U) 14000 kHz	60.0 dB(U) 3500 kHz
Measured	Measured	Measured
3.00 dB(U) 19400 kHz	3.00 dB(U) 8000 kHz	3.00 dB(U) 3000 kHz
20.0 dB(U) 22000 kHz	20.0 dB(U) 10500 kHz	20.0 dB(U) 4600 kHz
60.0 dB(U) 50000 kHz	60.0 dB(U) 34000 kHz	60.0 dB(U) 14000 kHz
Measured	Measured	Measured
3.00 dB(U) 1000 kHz	3.00 dB(U) 19400 kHz	3.00 dB(U) 8000 kHz
20.0 dB(U) 1200 kHz	20.0 dB(U) 22000 kHz	20.0 dB(U) 10500 kHz
60.0 dB(U) 3500 kHz	60.0 dB(U) 50000 kHz	60.0 dB(U) 34000 kHz
Measured	Measured	Measured
3.00 dB(U) 3000 kHz	3.00 dB(U) 1000 kHz	
20.0 dB(U) 4600 kHz	20.0 dB(U) 1200 kHz	
60.0 dB(U) 14000 kHz	60.0 dB(U) 3500 kHz	
Measured	Measured	

**17. SENSITIVITY**

<b>a. SENSITIVITY</b>	(U) -102 dBm
<b>b. CRITERIA</b>	(U) 0.01 (U) Other
<b>c. NOISE FIGURE</b>	(U) 8.00 dB
<b>d. NOISE TEMPERATURE</b>	(U) 1540 K
<b>a. SENSITIVITY</b>	(U) -102 dBm
<b>b. CRITERIA</b>	(U) 0.01 (U) Other
<b>c. NOISE FIGURE</b>	(U) 8.00 dB
<b>d. NOISE TEMPERATURE</b>	(U) 1540 K
<b>a. SENSITIVITY</b>	(U) -102 dBm
<b>b. CRITERIA</b>	(U) 0.01 (U) Other
<b>c. NOISE FIGURE</b>	(U) 8.00 dB
<b>d. NOISE TEMPERATURE</b>	(U) 1540 K
<b>a. SENSITIVITY</b>	(U) -102 dBm
<b>b. CRITERIA</b>	(U) 0.01 (U) Other
<b>c. NOISE FIGURE</b>	(U) 8.00 dB
<b>d. NOISE TEMPERATURE</b>	(U) 1540 K



## RECEIVER DATA OVERFLOW PAGE

## 17. SENSITIVITY (continued)

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

a. SENSITIVITY (U) -102 dBm  
 b. CRITERIA (U) 0.01 (U) Other  
 c. NOISE FIGURE (U) 8.00 dB  
 d. NOISE TEMPERATURE (U) 1540 K

## 21. REMARKS

(U) Item 15. N/A - Homodyne receiver.

(U) Item 17b. Packet Error Rate.

(U) Item 18. N/A - Homodyne receiver.

**RECEIVER DATA OVERFLOW PAGE**

**21. REMARKS** (continued)

(U) Item 19. N/A - Homodyne receiver.

(U) Item 20. N/A - Homodyne receiver.

**ANTENNA EQUIPMENT CHARACTERISTICS**

<p>1. <input type="checkbox"/> a. TRANSMITTING      <input type="checkbox"/> b. RECEIVING      <input type="checkbox"/> c. TRANSMITTING AND RECEIVING</p>	
<p>2. NOMENCLATURE, MANUFACTURER'S MODEL NO. (U) TW-1161</p>	<p>3. MANUFACTURER'S NAME (See Data Overflow Page) (U) TrellisWare Technologies, Inc.,</p>
<p>4. FREQUENCY RANGE (U) 675.0000 - 2600.000 MHz</p>	<p>5. TYPE (U) Halfwave Dipole</p>
<p>6. POLARIZATION (U) Vertical</p>	<p>7. SCAN CHARACTERISTICS</p>
<p>8. GAIN</p>	<p>a. TYPE</p>
<p>a. MAIN BEAM (U) 1.00 dBi</p>	<p>b. VERTICAL SCAN</p>
<p>b. 1st MAJOR SIDE LOBE Horz. (U) 1 dB Actual    Vert. (U) 1 dB Actual</p>	<p>(1) Max Elev</p>
<p>9. BEAMWIDTH</p>	<p>(2) Min Elev</p>
<p>a. HORIZONTAL (U) 360 degrees</p>	<p>(3) Scan Rate</p>
<p>b. VERTICAL (U) 80.0 degrees</p>	<p>c. HORIZONTAL SCAN</p>
	<p>(1) Sector Scanned</p>
	<p>(2) Scan Rate</p>
	<p>d. SECTOR BLANKING      <input type="checkbox"/> (1) YES      <input type="checkbox"/> (2) NO</p>

10. REMARKS (U)

(U) Item 1. Antenna is both transmit and receive.

(U) Item 7. N/A - Antenna is not scanning.

(U) Item 8b. N/A - Antenna does not have sidelobes.

(U) Item 9b. 70-90 degrees depending on frequency.

**ANTENNA DATA OVERFLOW PAGE**

**3. MANUFACTURER'S NAME**

(U)

16516 Via Esprillo, Ste 300  
San Diego, CA 92127

**ANTENNA EQUIPMENT CHARACTERISTICS**

<p>1. <input type="checkbox"/> a. TRANSMITTING      <input type="checkbox"/> b. RECEIVING      <input type="checkbox"/> c. TRANSMITTING AND RECEIVING</p>	
<p>2. NOMENCLATURE, MANUFACTURER'S MODEL NO. (U) TW-1160</p>	<p>3. MANUFACTURER'S NAME (See Data Overflow Page) (U) TrellisWare Technologies, Inc.,</p>
<p>4. FREQUENCY RANGE (U) 675.0000 - 2600.000 MHz</p>	<p>5. TYPE (U) Halfwave Dipole</p>
<p>6. POLARIZATION (U) Vertical</p>	<p>7. SCAN CHARACTERISTICS</p>
<p>8. GAIN</p>	<p>a. TYPE</p>
<p>a. MAIN BEAM (U) 1.00 dBi</p>	<p>b. VERTICAL SCAN</p>
<p>b. 1st MAJOR SIDE LOBE Horz. (U) 1 dB Actual    Vert. (U) 1 dB Actual</p>	<p>(1) Max Elev</p>
<p>9. BEAMWIDTH</p>	<p>(2) Min Elev</p>
<p>a. HORIZONTAL (U) 360 degrees</p>	<p>(3) Scan Rate</p>
<p>b. VERTICAL (U) 80.0 degrees</p>	<p>c. HORIZONTAL SCAN</p>
	<p>(1) Sector Scanned</p>
	<p>(2) Scan Rate</p>
	<p>d. SECTOR BLANKING      <input type="checkbox"/> (1) YES      <input type="checkbox"/> (2) NO</p>

10. REMARKS (U)

(U) Item 1. Antenna is both transmit and receive.

(U) Item 7. N/A - Antenna is not scanning.

(U) Item 8b. N/A - Antenna does not have sidelobes.

(U) Item 9b. 70-90 degrees depending on frequency.

**ANTENNA DATA OVERFLOW PAGE**

**3. MANUFACTURER'S NAME**

(U)

16516 Via Esprillo, Ste 300  
San Diego, CA 92127

**ANTENNA EQUIPMENT CHARACTERISTICS**

<p>1. <input type="checkbox"/> a. TRANSMITTING</p>	<p><input type="checkbox"/> b. RECEIVING</p>	<p><input type="checkbox"/> c. TRANSMITTING AND RECEIVING</p>
<p><b>2. NOMENCLATURE, MANUFACTURER'S MODEL NO.</b> (U) TW-1155</p>	<p><b>3. MANUFACTURER'S NAME</b> (See Data Overflow Page) (U) TrellisWare Technologies, Inc.,</p>	
<p><b>4. FREQUENCY RANGE</b> (U) 700.0000 - 970.0000 MHz</p>	<p><b>5. TYPE</b> (U) Halfwave Dipole</p>	
<p><b>6. POLARIZATION</b> (U) Vertical</p>	<p><b>7. SCAN CHARACTERISTICS</b></p>	
<p><b>8. GAIN</b></p>	<p><b>a. TYPE</b></p>	
<p><b>a. MAIN BEAM</b> (U) 2.00 dBi</p>	<p><b>b. VERTICAL SCAN</b></p>	
<p><b>b. 1st MAJOR SIDE LOBE</b> Horz. (U) 2 dB Actual Vert. (U) 2 dB Actual</p>	<p><b>(1) Max Elev</b></p>	
<p><b>9. BEAMWIDTH</b></p>	<p><b>(2) Min Elev</b></p>	
<p><b>a. HORIZONTAL</b> (U) 360 degrees</p>	<p><b>(3) Scan Rate</b></p>	
<p><b>b. VERTICAL</b> (U) 80.0 degrees</p>	<p><b>c. HORIZONTAL SCAN</b></p>	
<p><b>10. REMARKS (U)</b></p> <p>(U) Item 1. Antenna is both transmit and receive.</p> <p>(U) Item 7. N/A - Antenna is not scanning.</p> <p>(U) Item 8b. N/A - Antenna does not have sidelobes.</p>		
<p><b>d. SECTOR BLANKING</b> <input type="checkbox"/> (1) YES <input type="checkbox"/> (2) NO</p>		

**ANTENNA DATA OVERFLOW PAGE**

**3. MANUFACTURER'S NAME**

(U)

16516 Via Esprillo, Ste 300  
San Diego, CA 92127



**ANTENNA EQUIPMENT CHARACTERISTICS**

<p>1. <input type="checkbox"/> a. TRANSMITTING</p>	<p><input type="checkbox"/> b. RECEIVING</p>	<p><input type="checkbox"/> c. TRANSMITTING AND RECEIVING</p>
<p>2. NOMENCLATURE, MANUFACTURER'S MODEL NO. (U) TW-1150</p>	<p>3. MANUFACTURER'S NAME (See Data Overflow Page) (U) TrellisWare Technologies, Inc.,</p>	
<p>4. FREQUENCY RANGE (U) 225.0000 - 470.0000 MHz</p>	<p>5. TYPE (U) Halfwave Whip</p>	
<p>6. POLARIZATION (U) Vertical</p>	<p>7. SCAN CHARACTERISTICS</p>	
<p>8. GAIN</p>	<p>a. TYPE</p>	
<p>a. MAIN BEAM (U) 0.000 dBi</p>	<p>b. VERTICAL SCAN</p>	
<p>b. 1st MAJOR SIDE LOBE Horz. (U) 0 dB Actual Vert. (U) 0 dB Actual</p>	<p>(1) Max Elev</p>	
<p>9. BEAMWIDTH</p>	<p>(2) Min Elev</p>	
<p>a. HORIZONTAL (U) 360 degrees</p>	<p>(3) Scan Rate</p>	
<p>b. VERTICAL (U) 80.0 degrees</p>	<p>c. HORIZONTAL SCAN</p>	
<p>10. REMARKS (U)</p> <p>(U) Item 1. Antenna is both transmit and receive.</p> <p>(U) Item 7. N/A - Antenna is not scanning.</p> <p>(U) Item 8b. N/A - Antenna does not have sidelobes.</p>		
<p>d. SECTOR BLANKING <input type="checkbox"/> (1) YES <input type="checkbox"/> (2) NO</p>		

**ANTENNA DATA OVERFLOW PAGE**

**3. MANUFACTURER'S NAME**

(U)

16516 Via Esprillo, Ste 300  
San Diego, CA 92127

<b>APPLICATION FOR SPECTRUM REVIEW</b>	<b>CLASSIFICATION UNCLASSIFIED</b>	<b>PAGE 19</b>
<b>NTIA GENERAL INFORMATION</b>		
1. <b>APPLICATION TITLE</b> (U) TrellisWare Shadow Radios (TW-900/TW-950)		
2. <b>SYSTEM NOMENCLATURE</b> (U) TrellisWare Shadow Radios (TW-900/TW-950)		
3. <b>STAGE OF ALLOCATION</b> (U) <input type="checkbox"/> a. <b>STAGE 1 CONCEPTUAL</b> <input type="checkbox"/> b. <b>STAGE 2 EXPERIMENTAL</b> <input type="checkbox"/> c. <b>STAGE 3 DEVELOPMENTAL</b> <input checked="" type="checkbox"/> d. <b>STAGE 4 OPERATIONAL</b>		
4. <b>FREQUENCY REQUIREMENTS</b> a. <b>FREQUENCY(IES)</b> b. <b>EMISSION DESIGNATORS</b>		
5. <b>PURPOSE OF SYSTEM, OPERATIONAL AND SYSTEM CONCEPTS</b> (U) Provide for the mobile mesh networking dissemination of voice, video and data traffic in tactical environments.    (WARTIME USE) (U) <input checked="" type="checkbox"/> a. <b>YES</b> <input type="checkbox"/> b. <b>NO</b>		
6. <b>INFORMATION TRANSFER REQUIREMENTS</b> (U) Ability to transmit voice, streaming video and IP data over multiple hops.		
7. <b>ESTIMATED INITIAL COST OF THE SYSTEM</b>		
8. <b>TARGET DATE FOR</b>		
a. <b>APPLICATION APPROVAL</b> (U) 6/29/2018	b. <b>SYSTEM ACTIVATION</b> (U) 6/29/2018	c. <b>SYSTEM TERMINATION</b>
9. <b>SYSTEM RELATIONSHIP AND ESSENTIALITY</b> (U) Tactical and assault operations in harsh RF environments that can include caves/tunnels, ships, and dense urban centers. The TSM Shadow system is designed to maintain robust connectivity. <span style="float:right;">(See Data Overflow Page)</span>		
10. <b>REPLACEMENT INFORMATION</b> (U) NA		
11. <b>RELATED ANALYSIS AND/OR TEST DATA</b>		
12. <b>NUMBER OF UNITS</b> (U) 250		
13. <b>GEOGRAPHICAL AREA FOR</b>		
a. <b>STAGE 2</b>		
b. <b>STAGE 3</b>		
c. <b>STAGE 4</b> (U) US&P - Polygon		
14. <b>LINE DIAGRAM</b> See Attached	15. <b>SPACE SYSTEMS</b>	
16. <b>TYPES OF SERVICE(S) FOR STAGE 4</b> Land Mobile	17. <b>STATION CLASS(ES) FOR STAGE 4</b> ML	
18. <b>REMARKS</b>		
<b>DOWNGRADING INSTRUCTIONS</b>  Special Handling Instruction : A		<b>CLASSIFICATION UNCLASSIFIED</b>

## NTIA DATA OVERFLOW PAGE

**9. SYSTEM RELATIONSHIP AND ESSENTIALITY**

Cont. (U) across all of the aforementioned RF environments providing multi-channel voice, streaming video and IP data through a mobile mesh network that requires no fixed infrastructure.

**DOWNGRADING INSTRUCTIONS**

Special Handling Instruction : A

CLASSIFICATION

UNCLASSIFIED

**Table of Contents For  
(U) TrellisWare Shadow Radios (TW-900/TW-950)**


1. (U) Security Page
2. (U) DoD Page
- 1494 Transmitter Pages
  4. (U) Shadow
- 1494 Receiver Pages
  7. (U) Shadow
- 1494 Antenna Pages
  11. (U) TW-1161
  13. (U) TW-1160
  15. (U) TW-1155
  17. (U) TW-1150
19. (U) NTIA Page

**ALSO:**

- (U) Line Diagram

UNCLASSIFIED

Line Diagram: TrellisWare Shadow Radios (TW-900/TW-950)

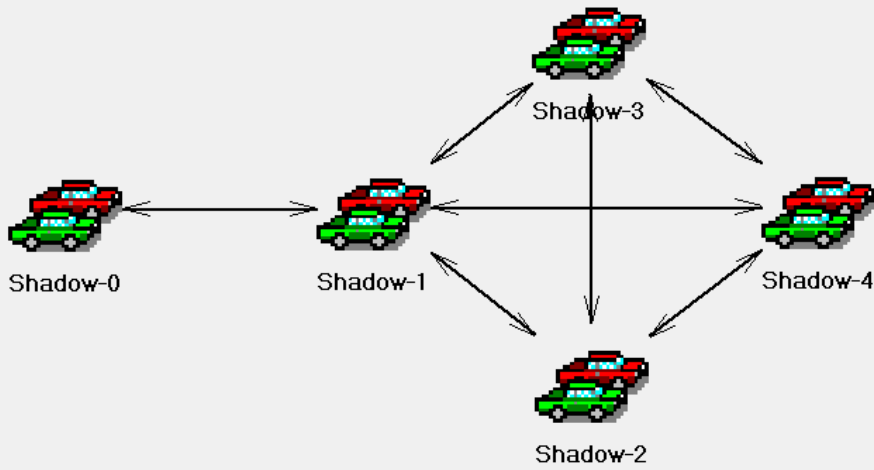

UNCLASSIFIED