



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com



1. Bandwidth


1.1 OBW

1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result		
1M	SISO	2402	1	1.026	Pass	
		2440	1	1.026	Pass	
		2480	1	1.028	Pass	

1.1.2 Test Graph

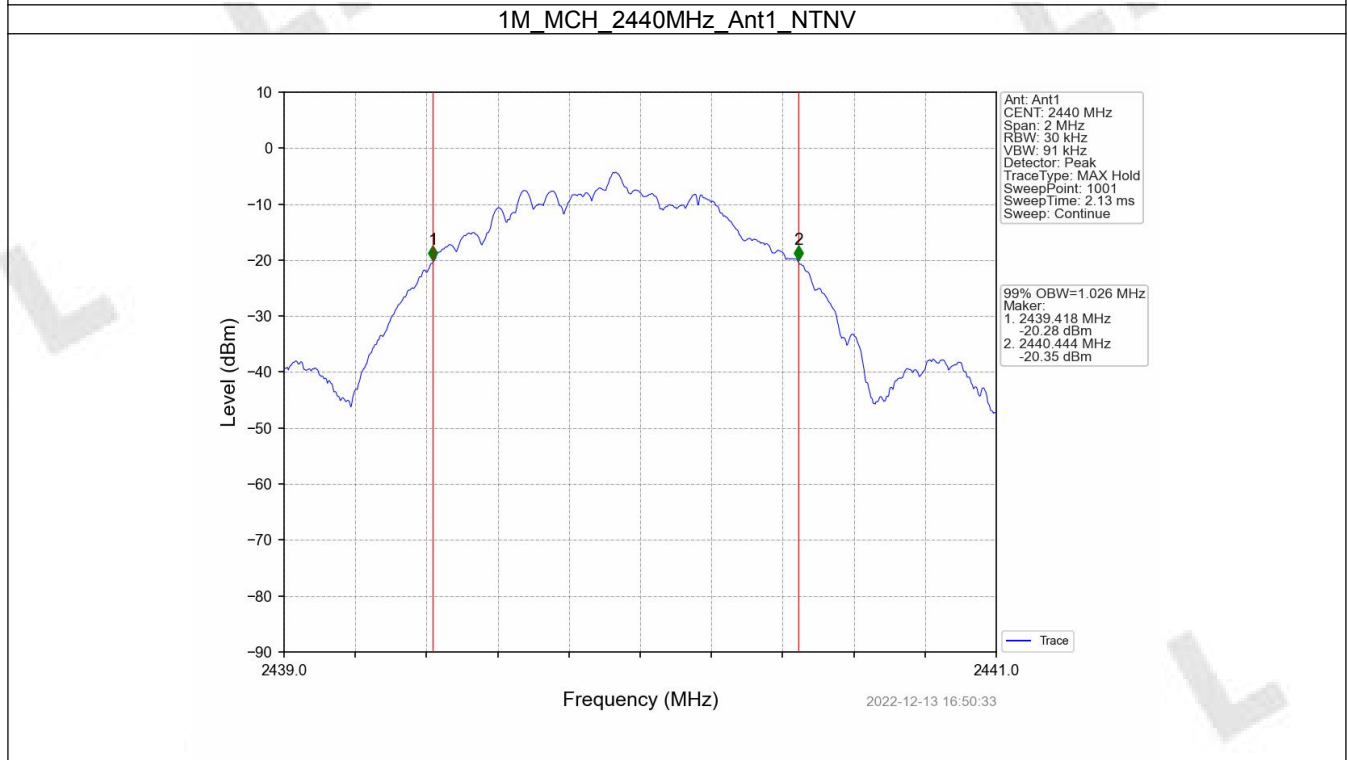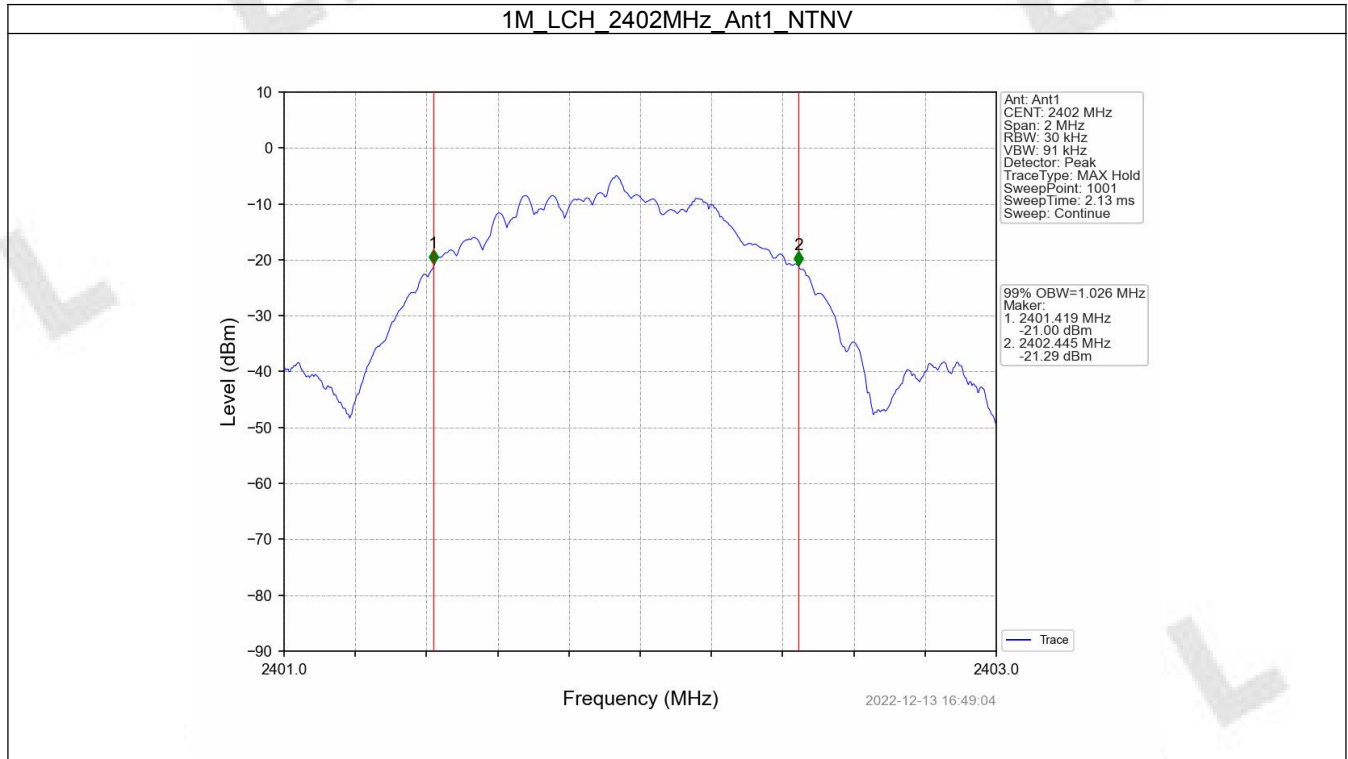


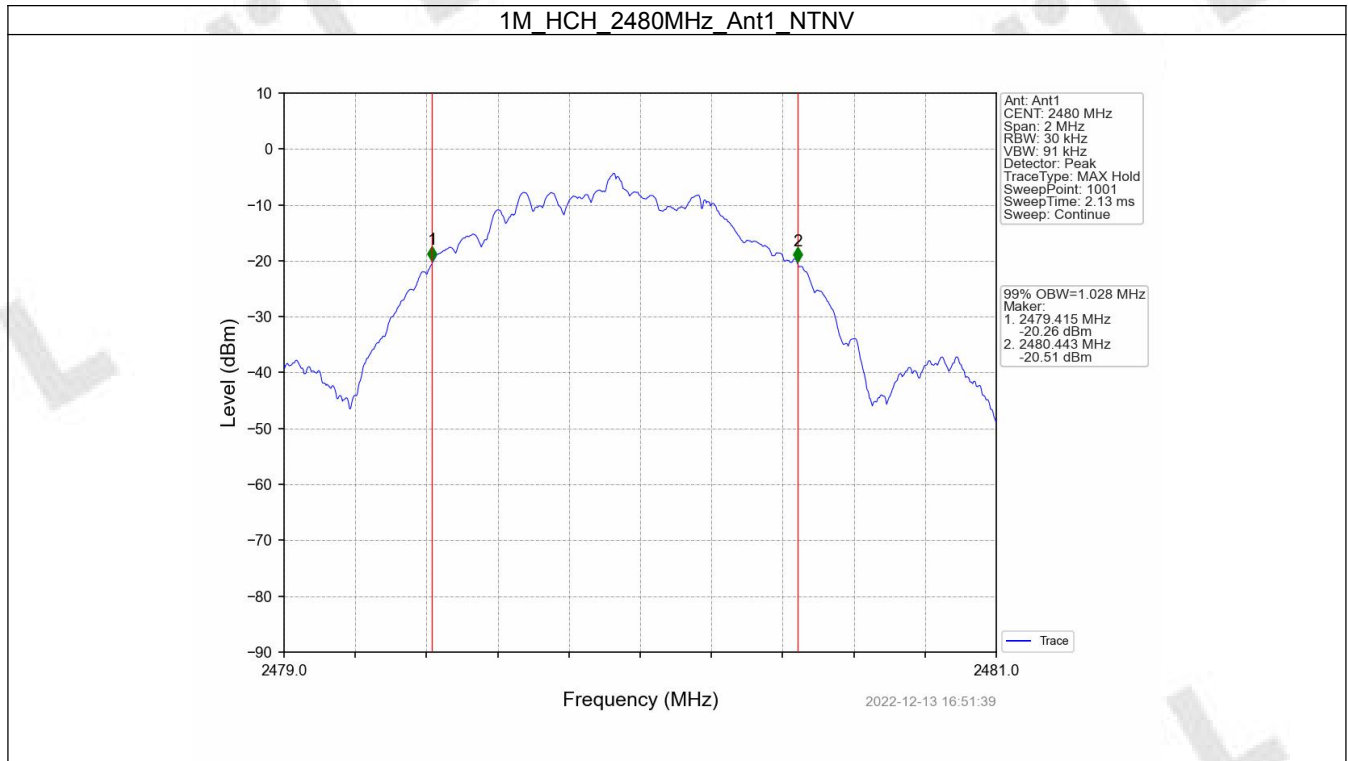



1.2 6dB BW

1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.640	≥ 0.5	Pass
		2440	1	0.640	≥ 0.5	Pass
		2480	1	0.633	≥ 0.5	Pass

1.2.2 Test Graph

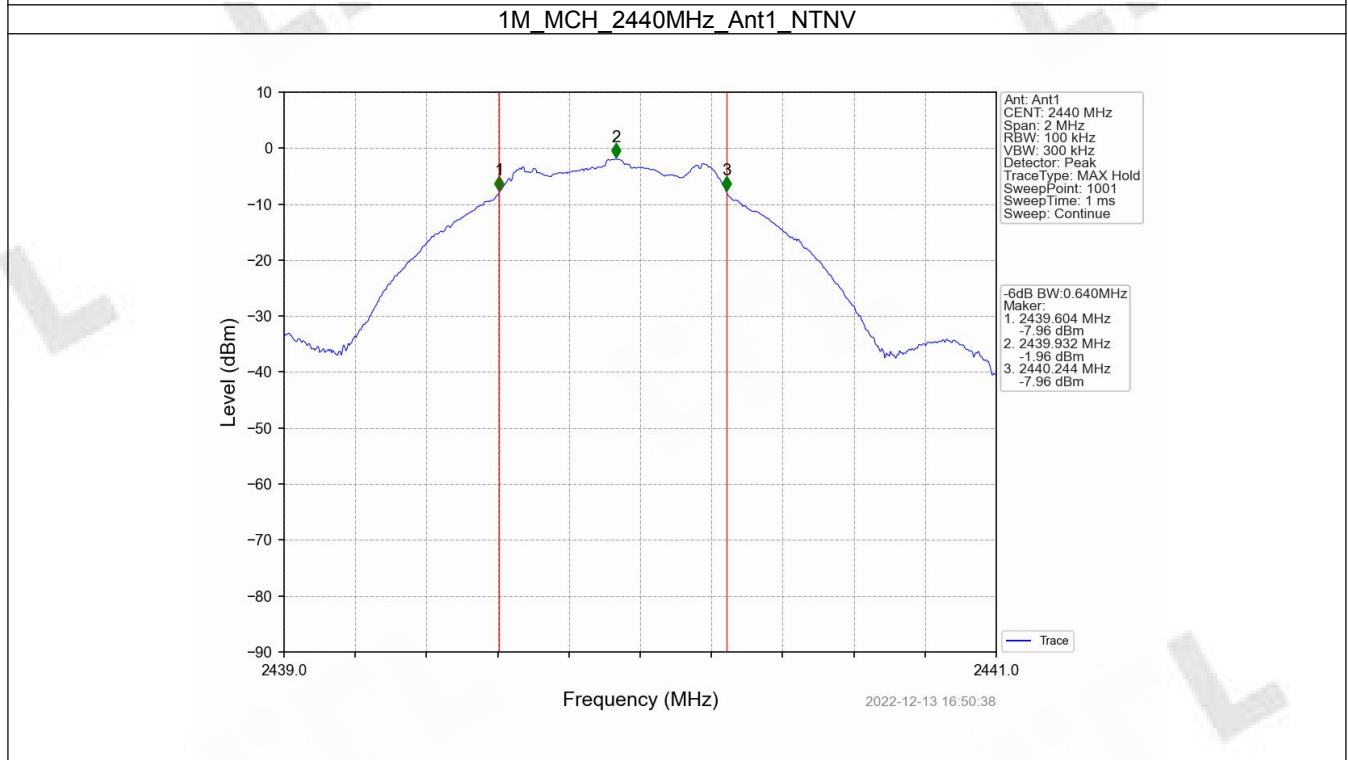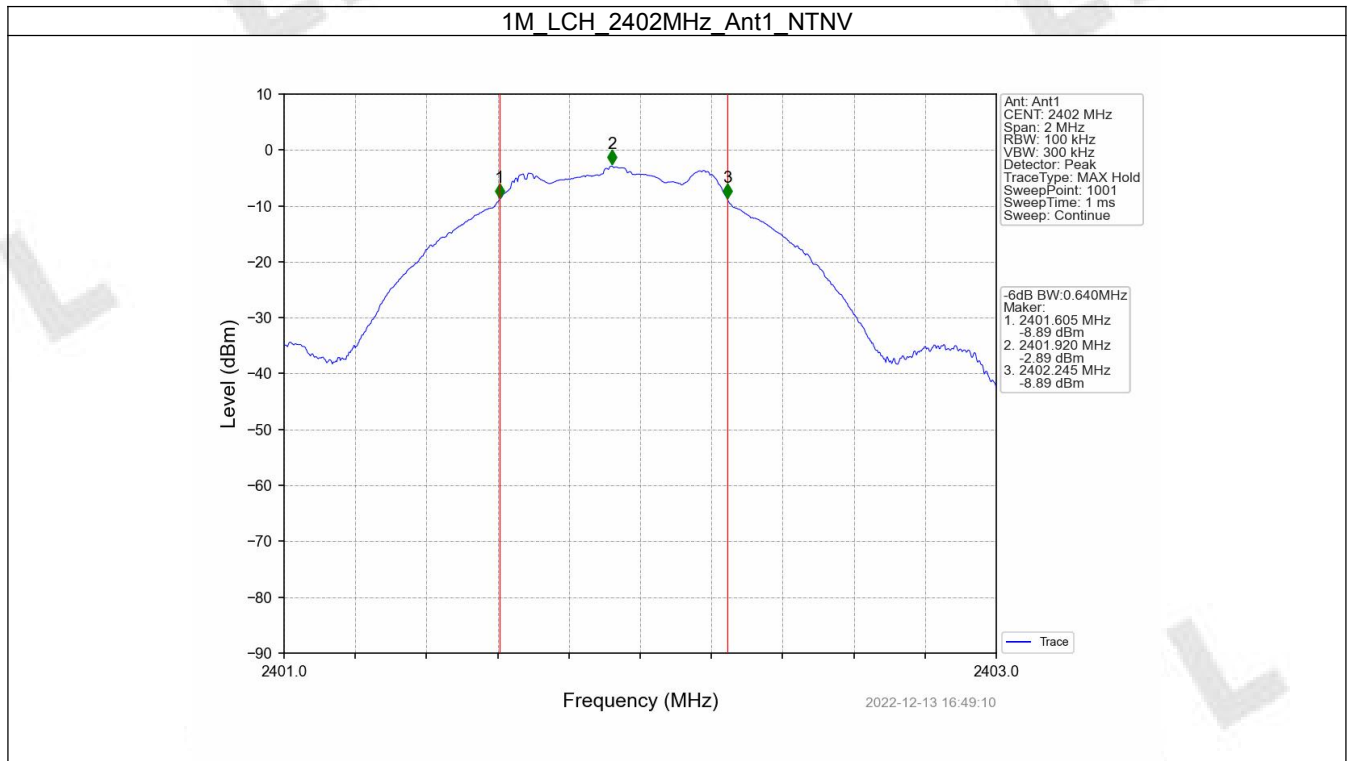

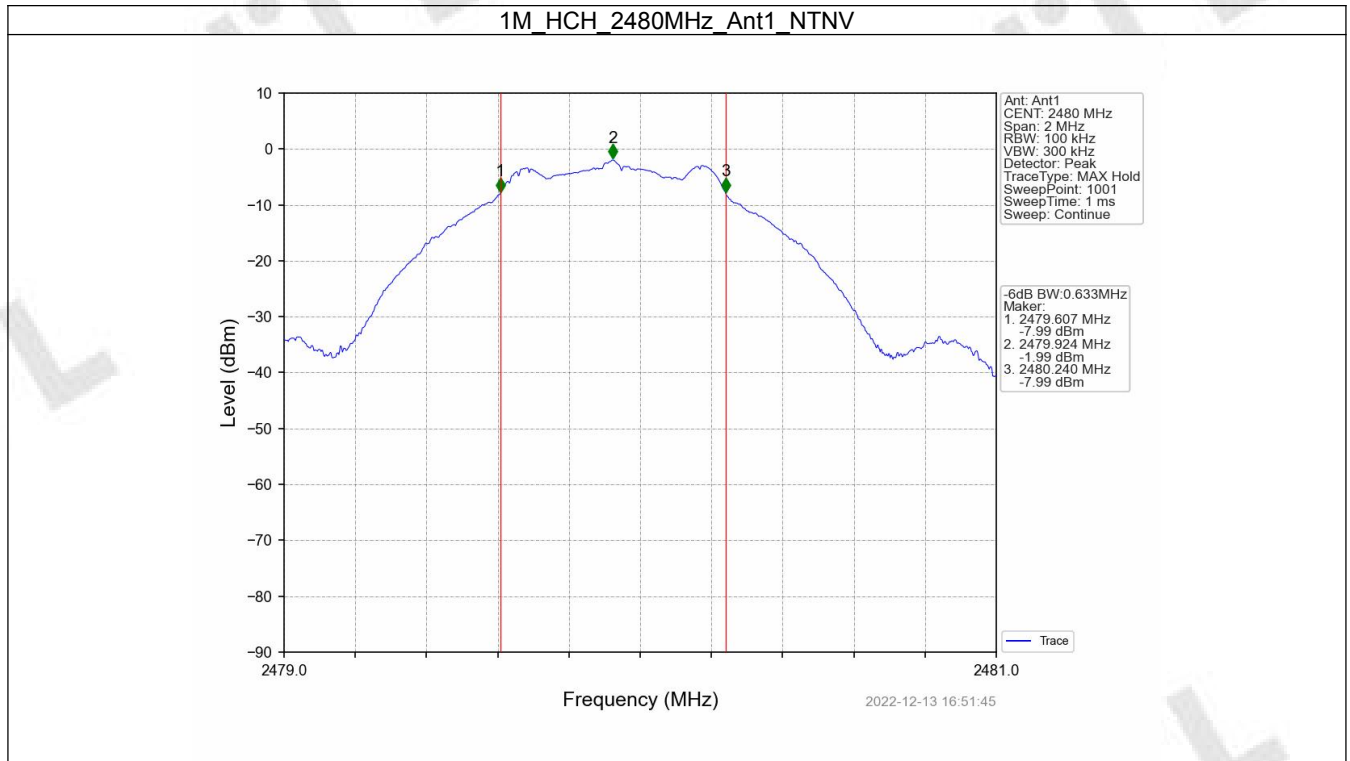

2. Maximum Conducted Output Power



2.1 Power


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-2.50	<=30	Pass
		2440	-1.63	<=30	Pass
		2480	-1.78	<=30	Pass

Note1: Antenna Gain: Ant1: 1.76dBi;

2.1.2 Test Graph

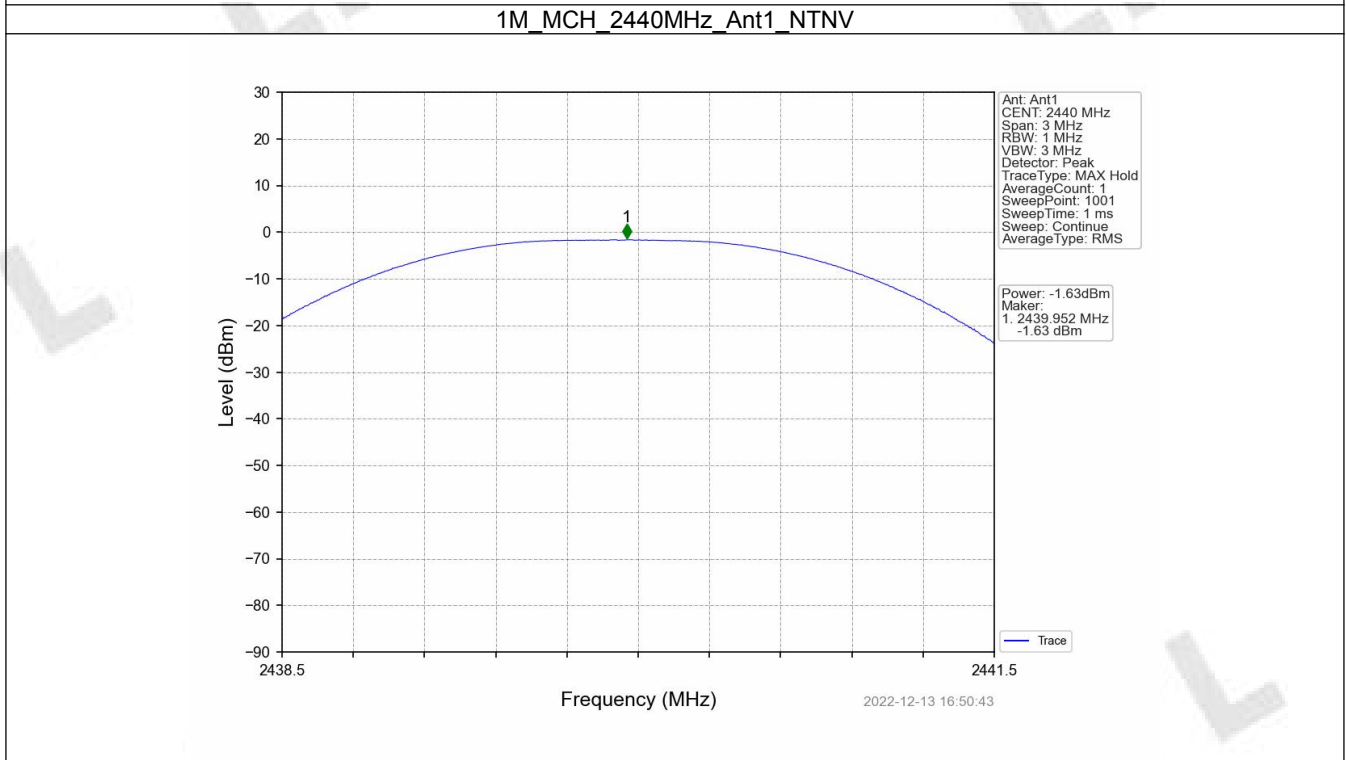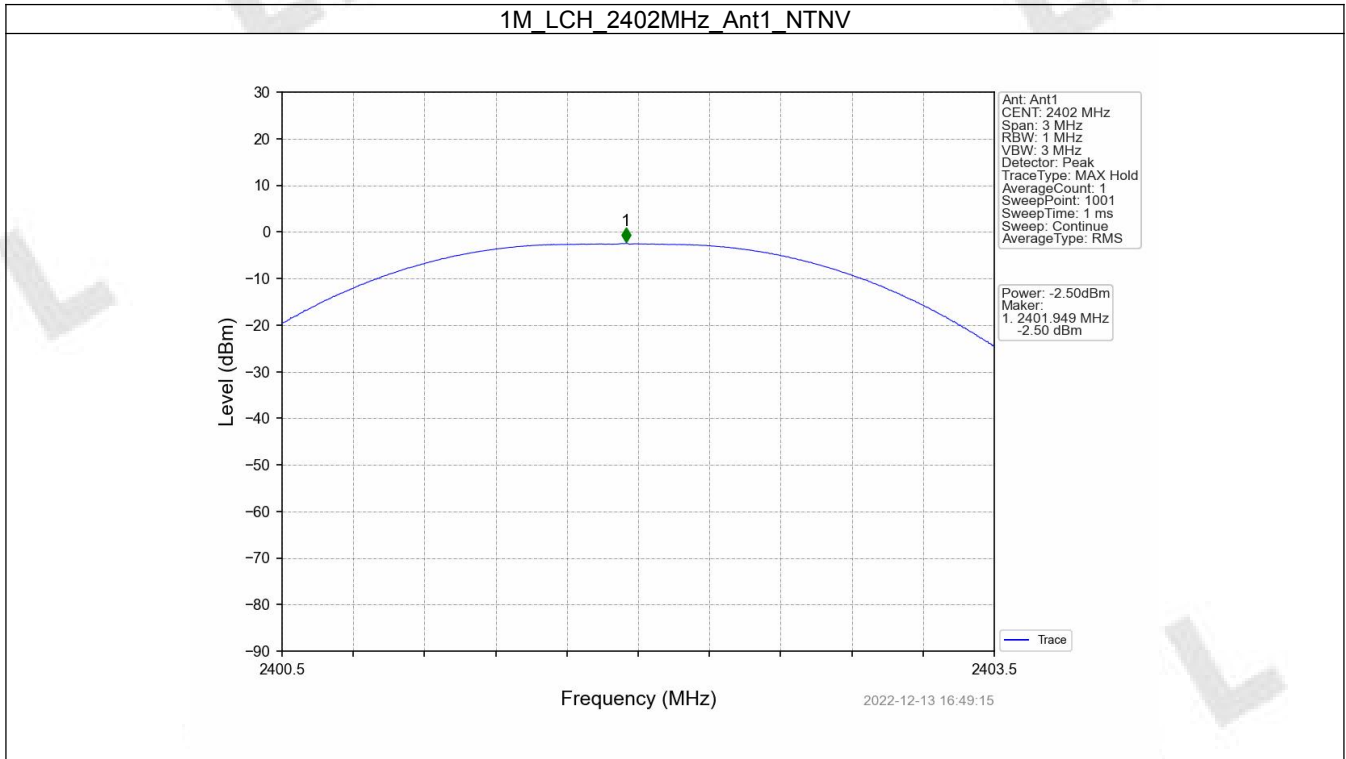

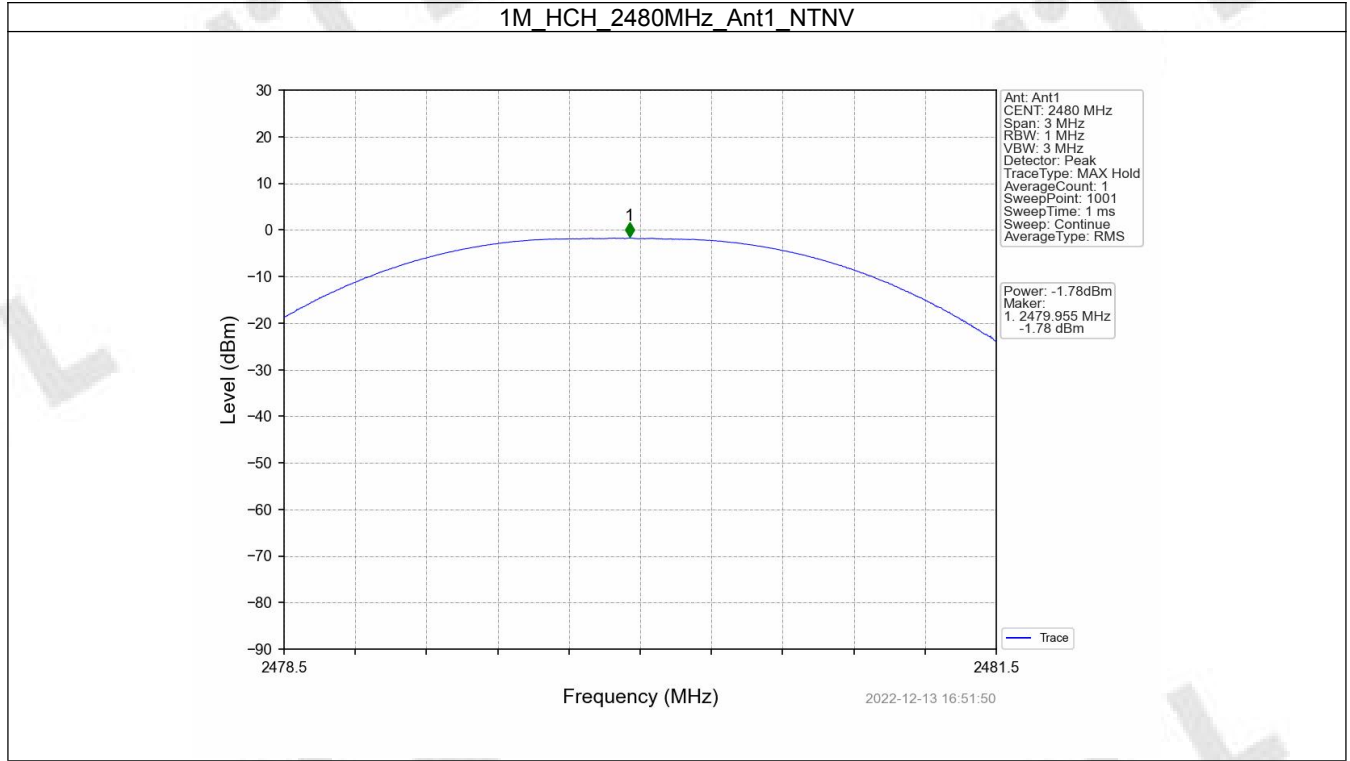

3. Maximum Power Spectral Density



3.1 PSD


3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-17.73	<=8	Pass
		2440	-16.78	<=8	Pass
		2480	-17.09	<=8	Pass

Note1: Antenna Gain: Ant1: 1.76dBi;

3.1.2 Test Graph

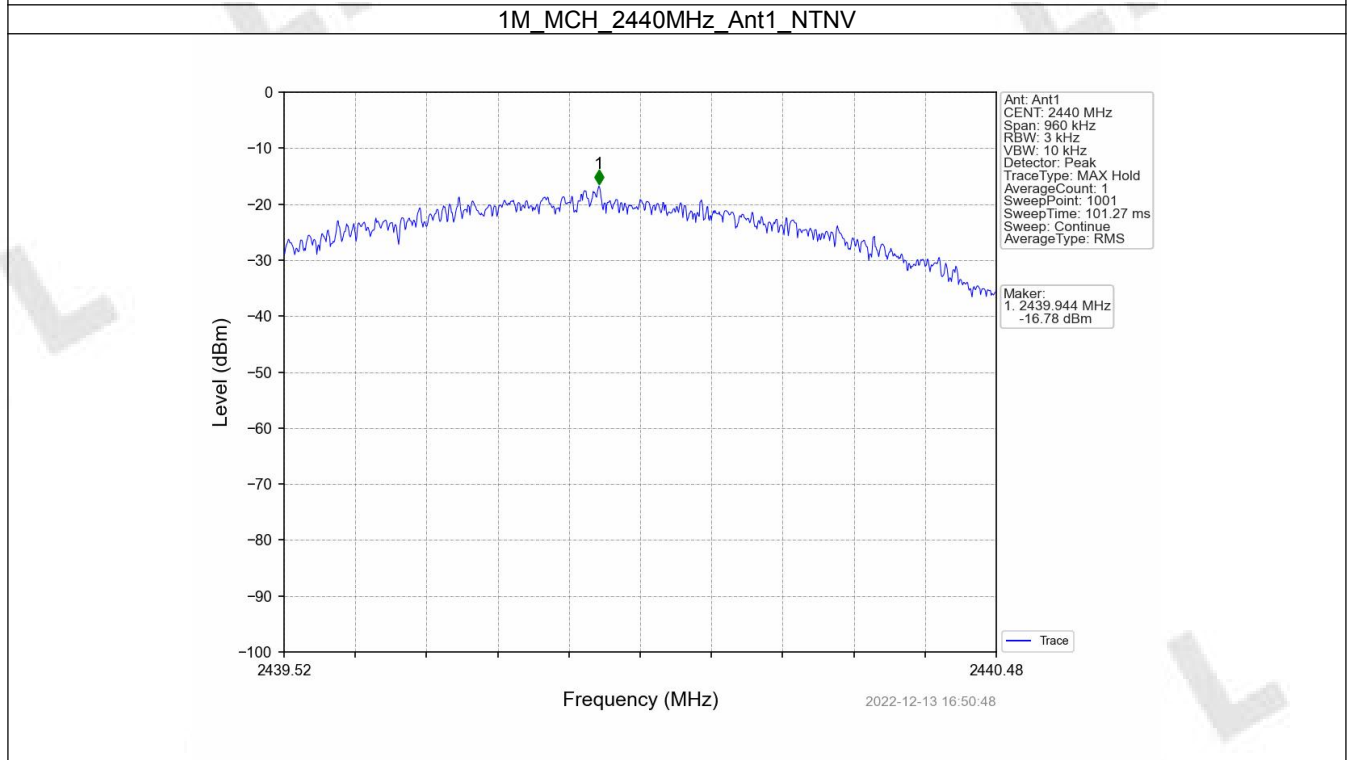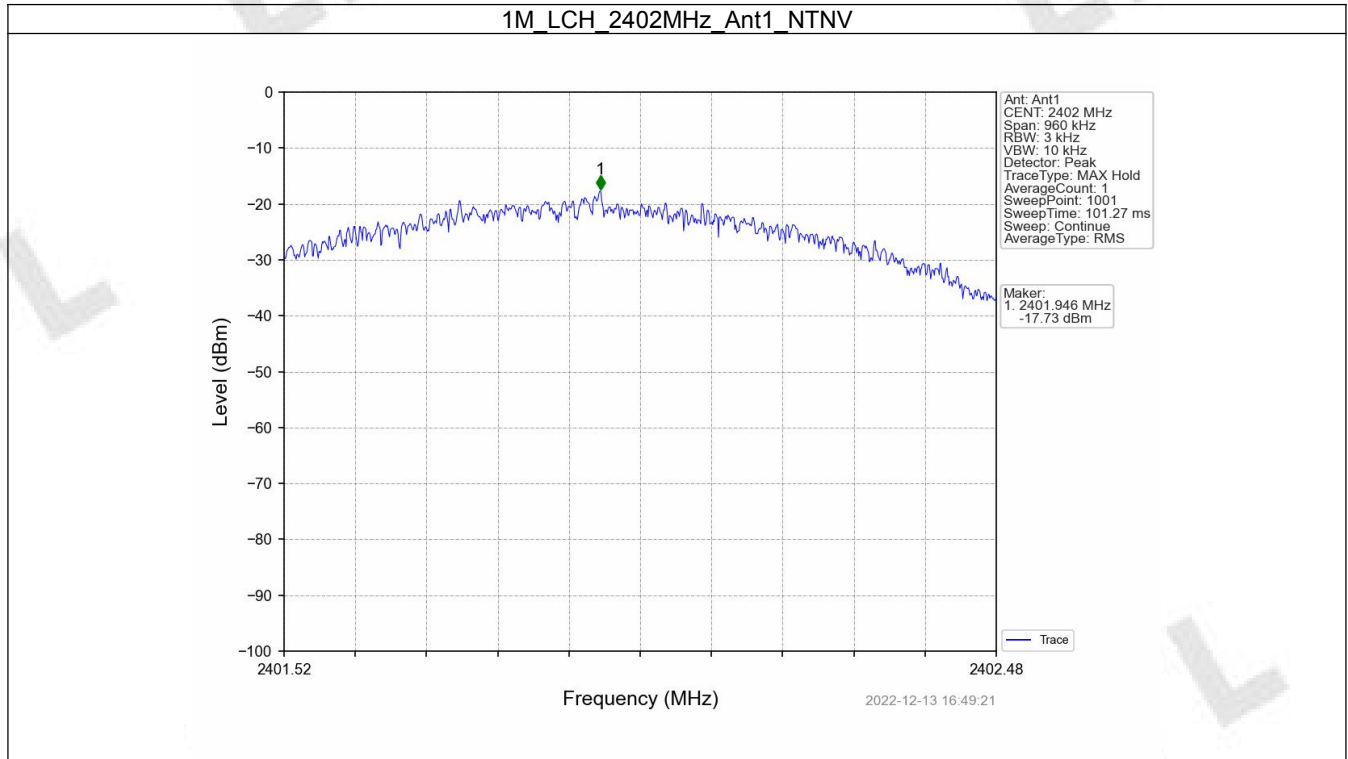

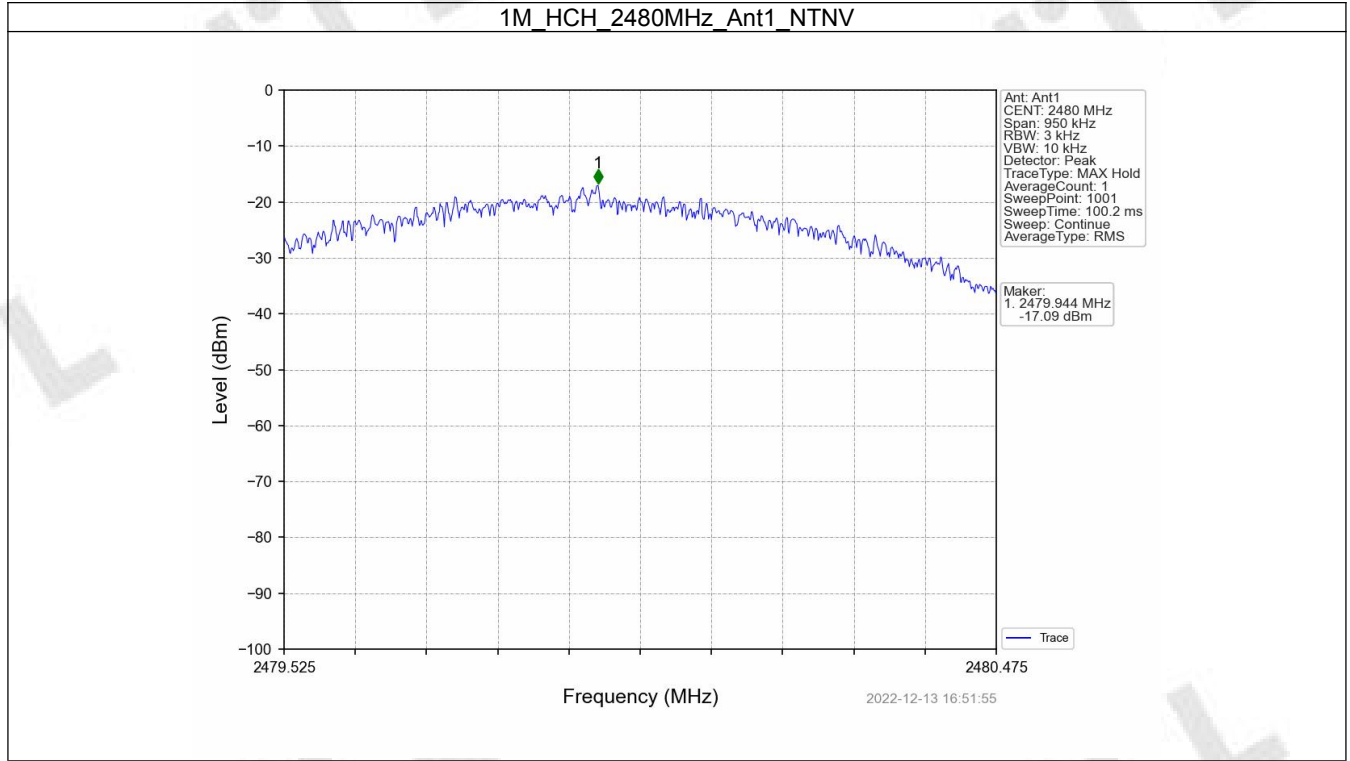

4. Unwanted Emissions In Non-restricted Frequency Bands



4.1 Ref


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-2.78
		2440	1	-1.88
		2480	1	-1.99

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

4.1.2 Test Graph

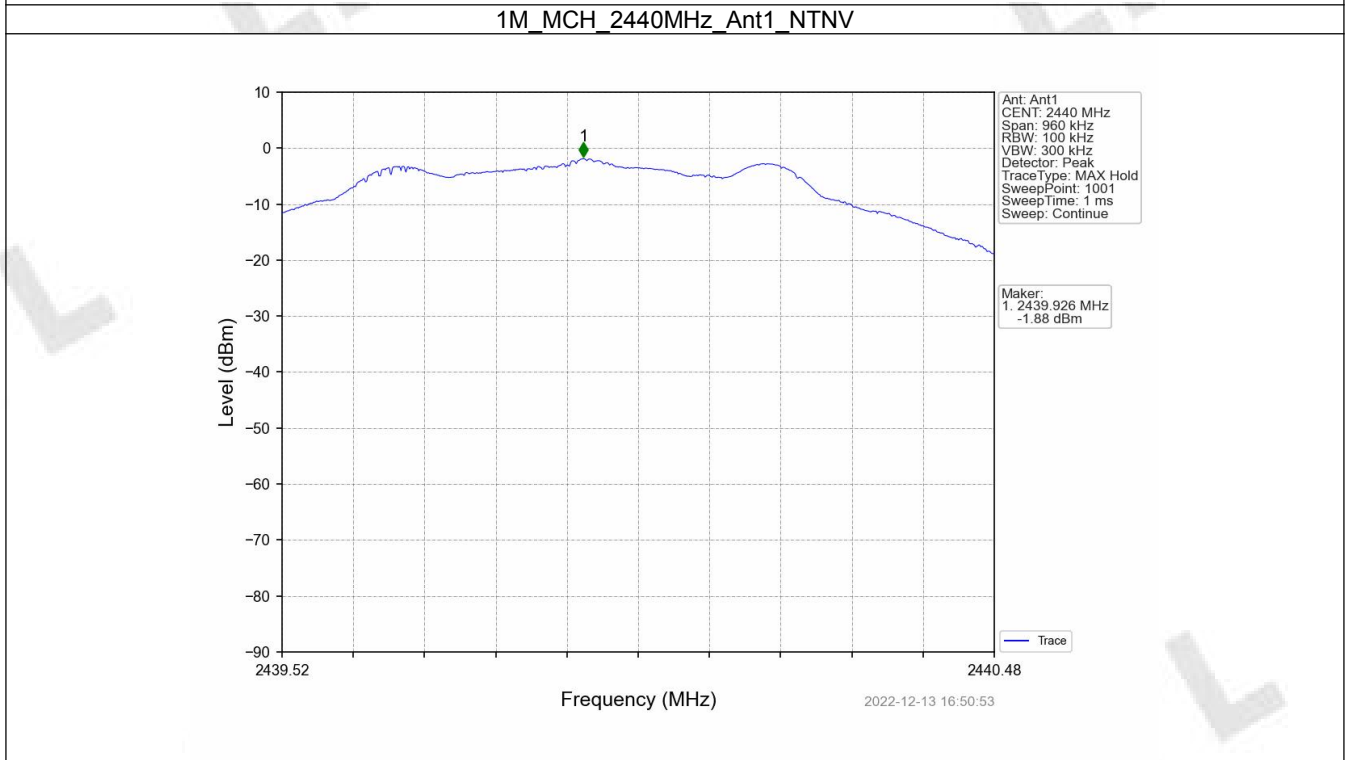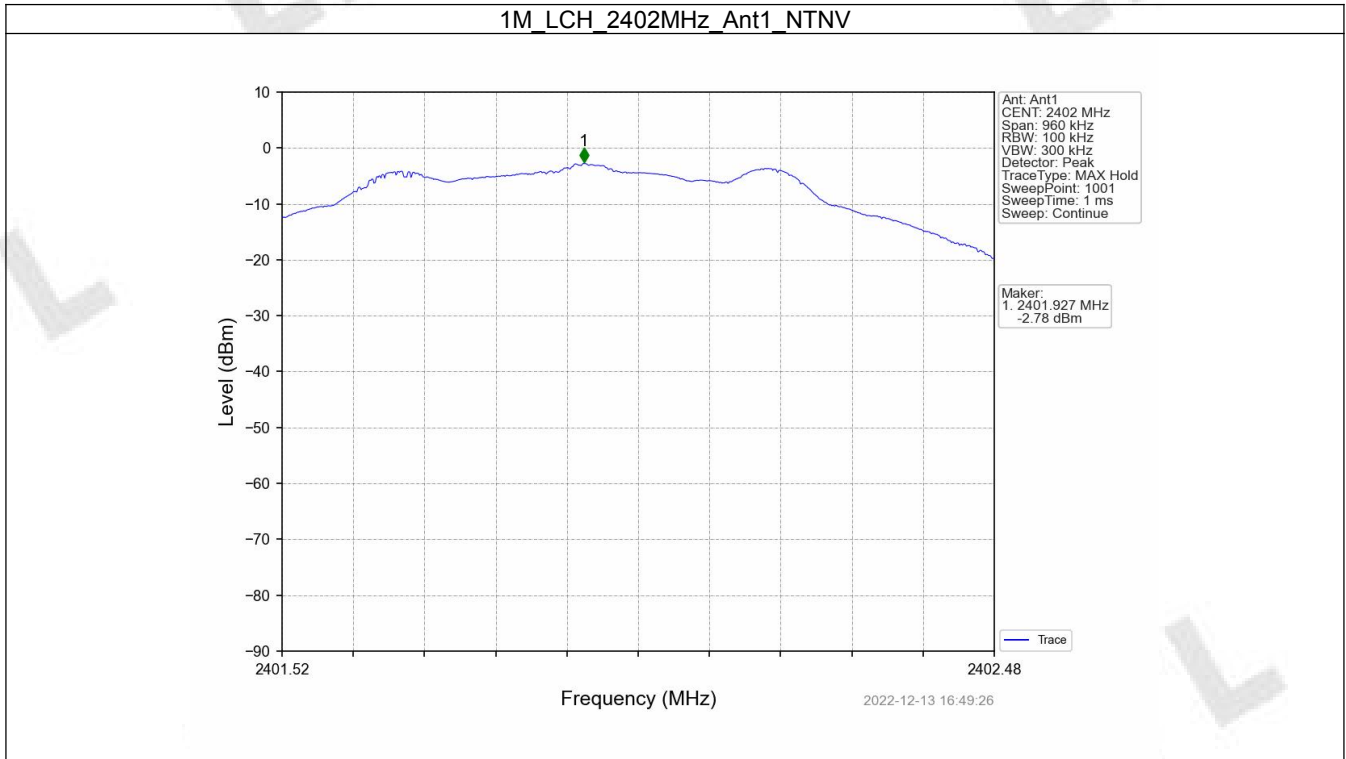

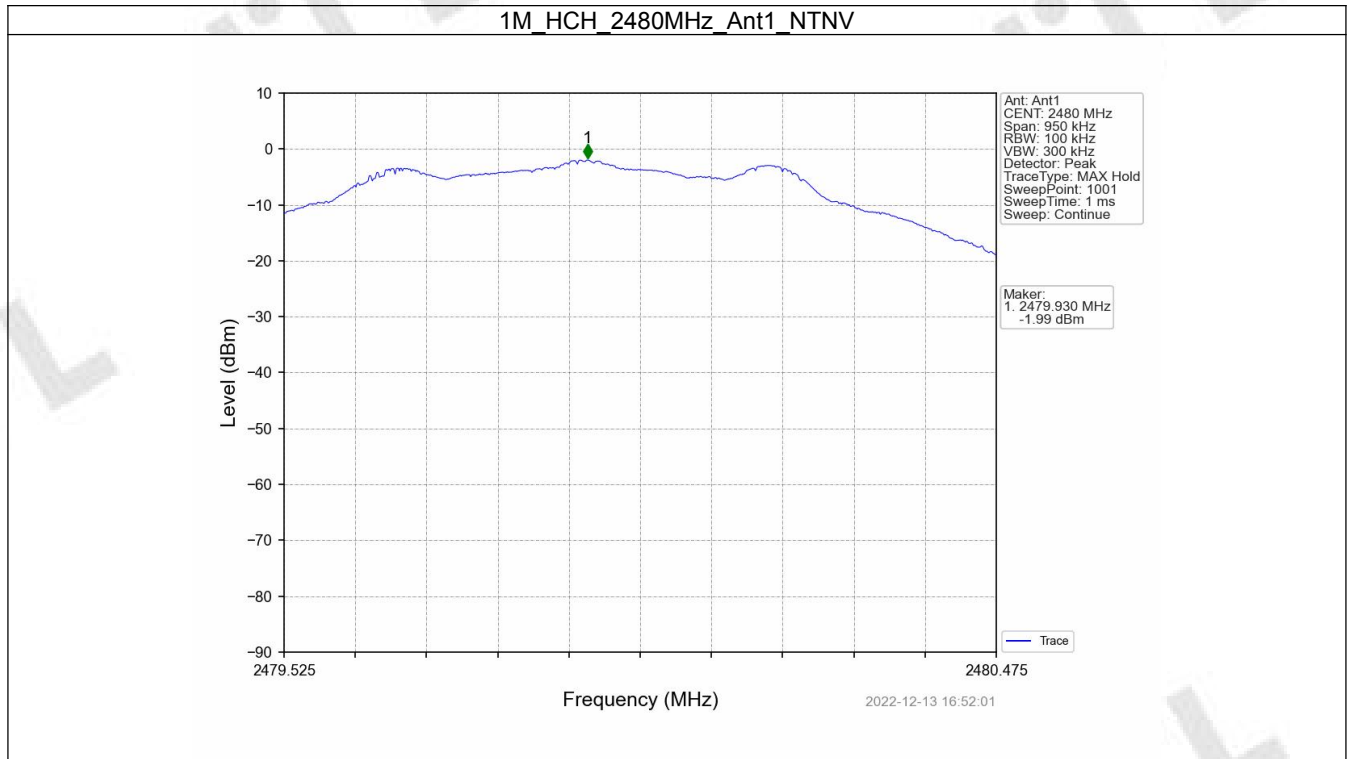



4.2 CSE

4.2.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.88	-21.88	Pass
		2440	1	-1.88	-21.88	Pass
		2480	1	-1.88	-21.88	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


4.2.2 Test Graph

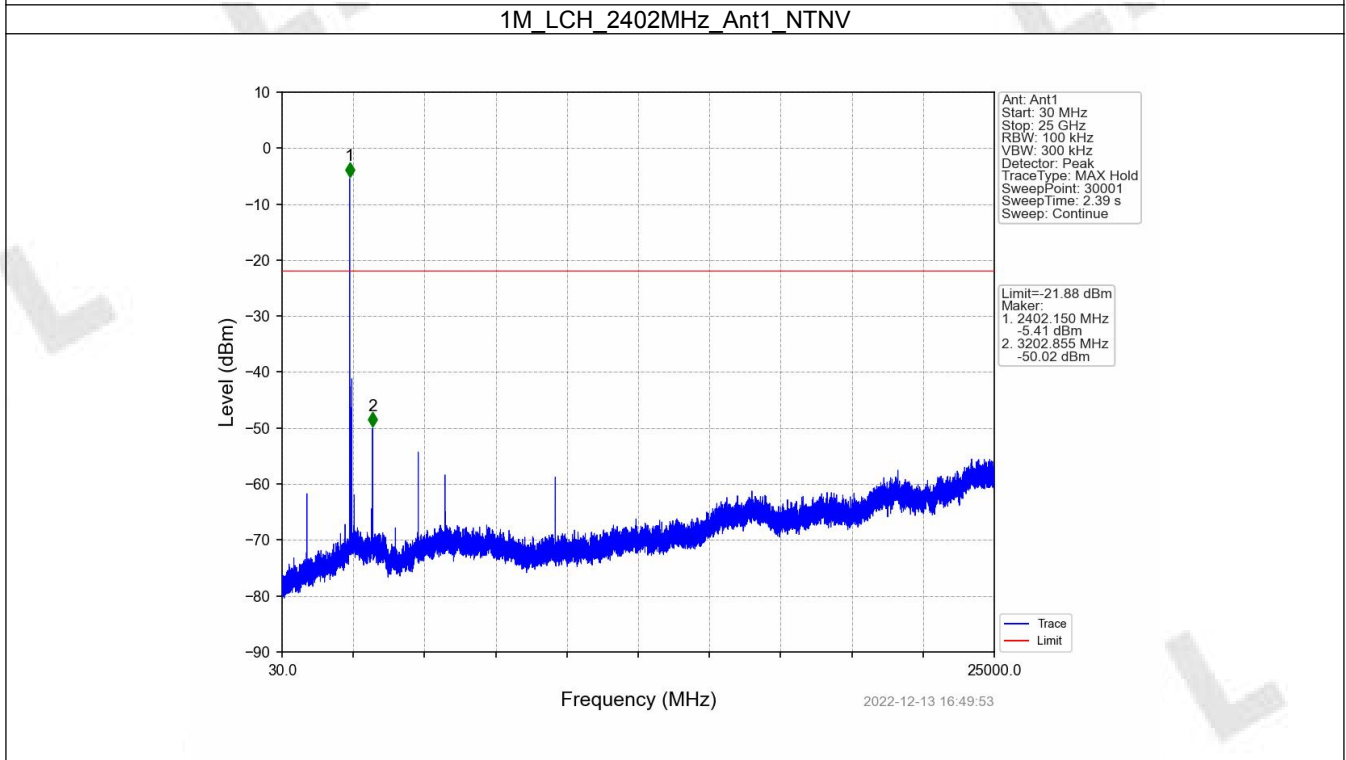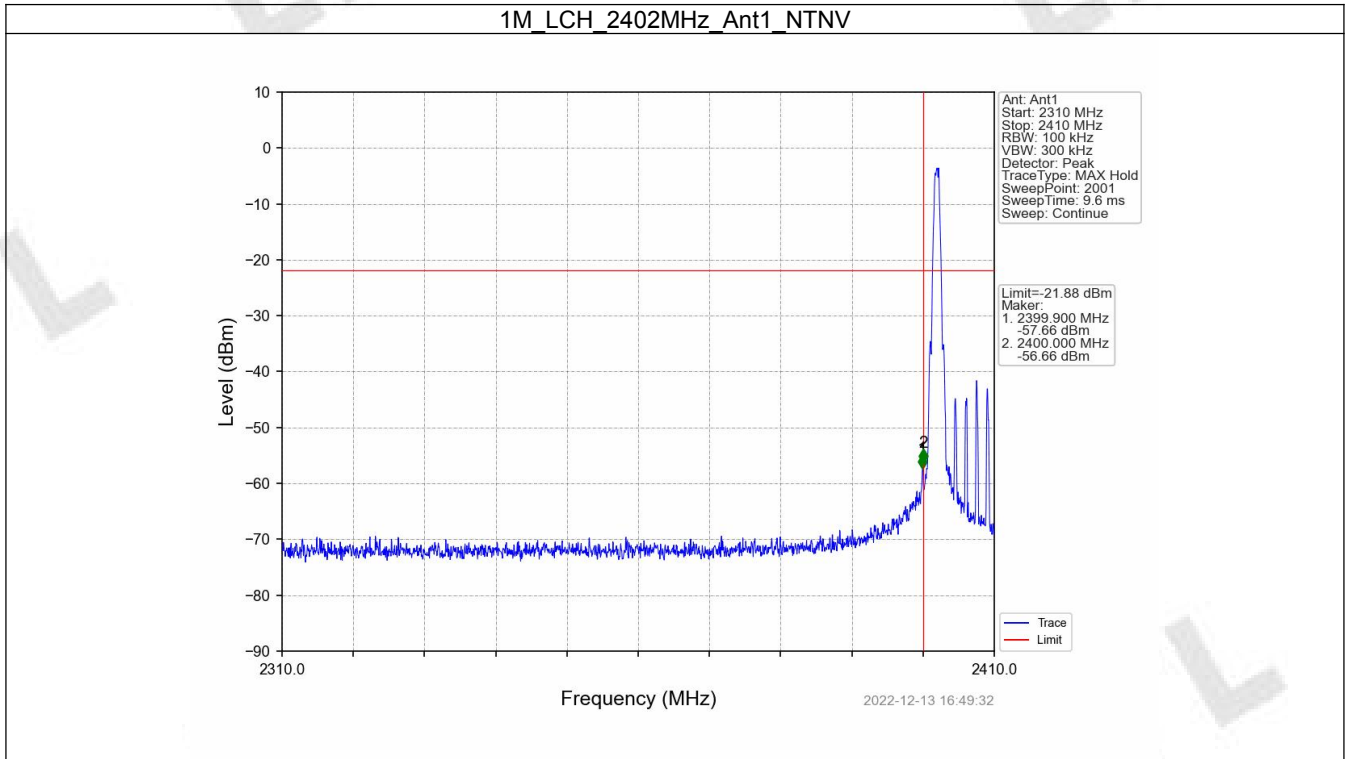


1M_MCH_2440MHz_Ant1_NTNV

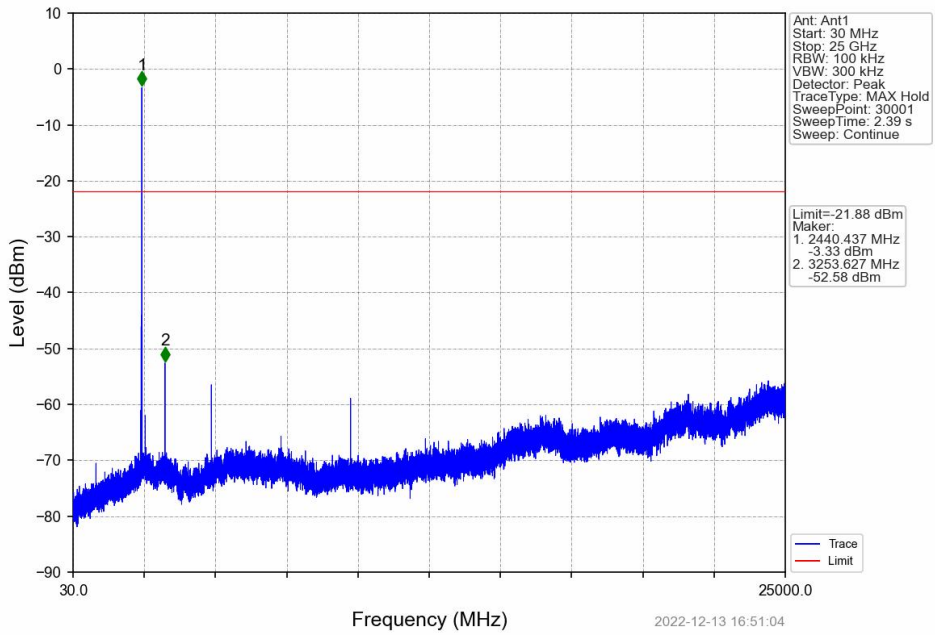

1M_HCH_2480MHz_Ant1_NTNV

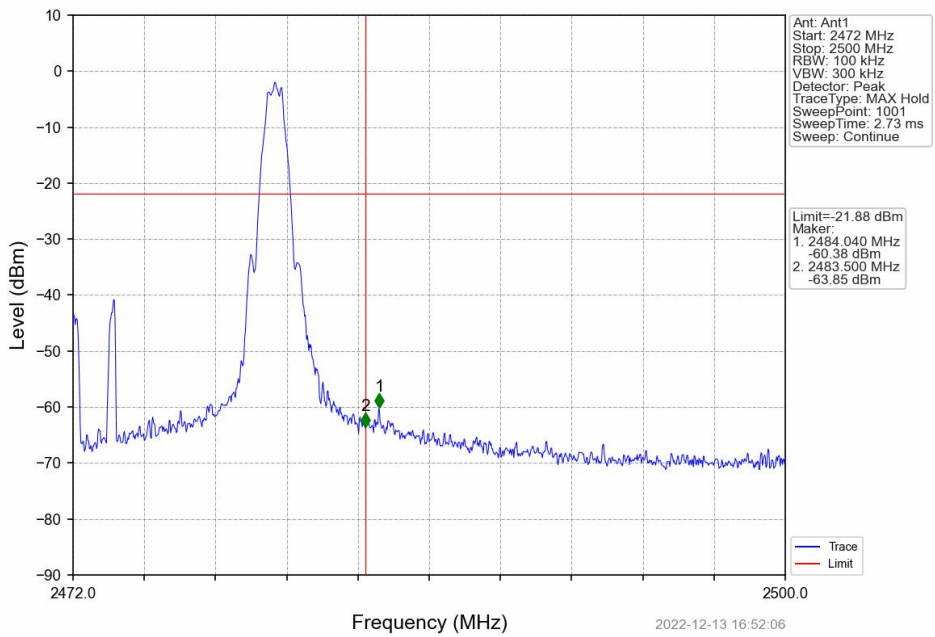

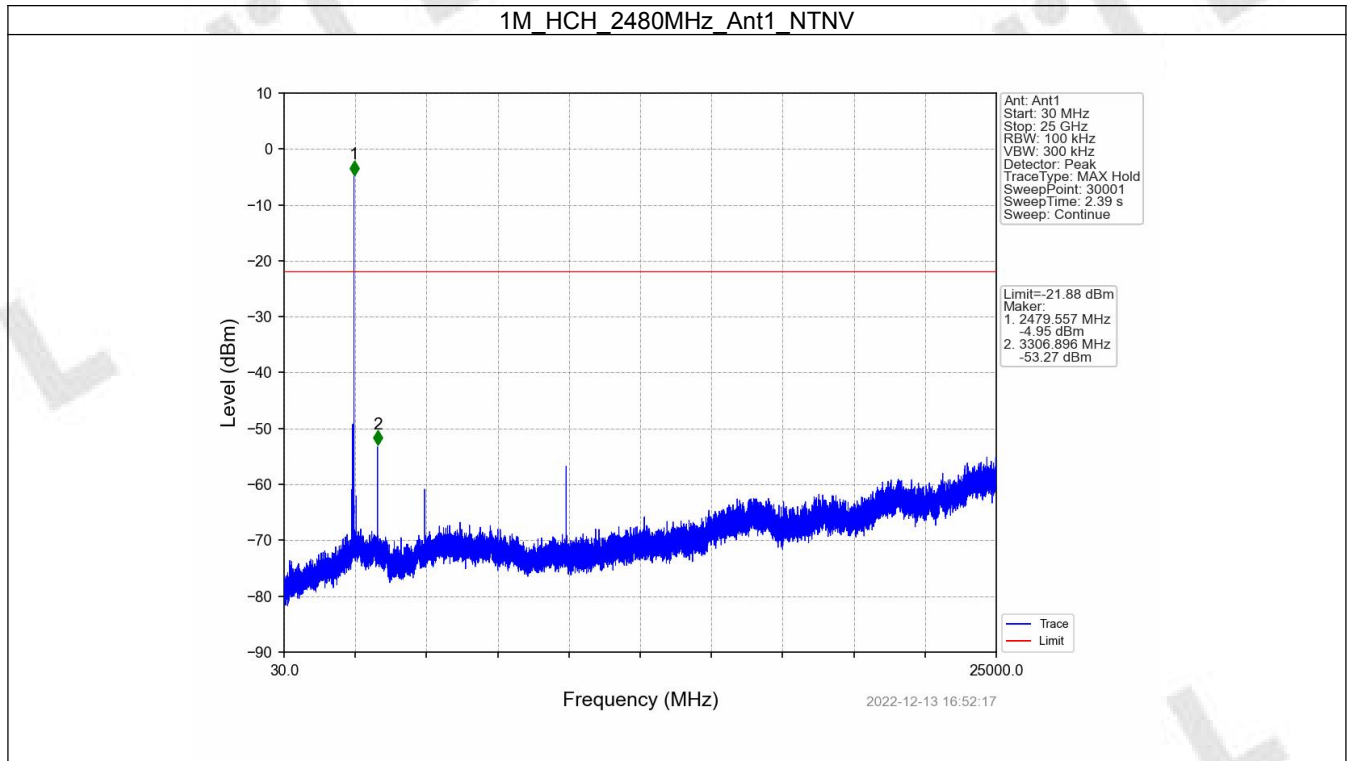

5. Form731

5.1 Form731

5.1.1 Test Result

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0007	-1.63