



## **K14 Bluetooth Mechanical Keyboard**

### **IN THE BOX:**

Keychron K14 Bluetooth Mechanical Keyboard x 1

Type-C Cable \* 1


Manual \* 1

Quick Start Guide \* 1

Extra Keycaps Set \* 1


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

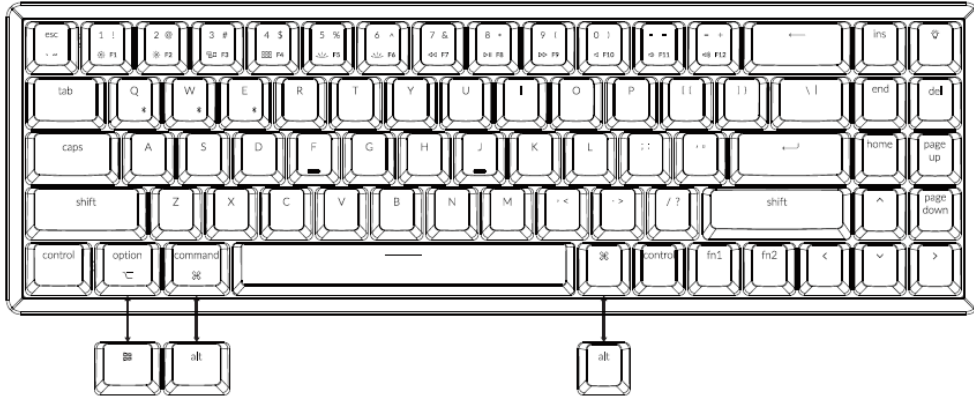

3


**1** Connect Bluetooth



Press fn1 + Q (for 4 seconds) and pair with device named Keychron K14




**2** Connect Cable



4

### 3 Change Light Effect

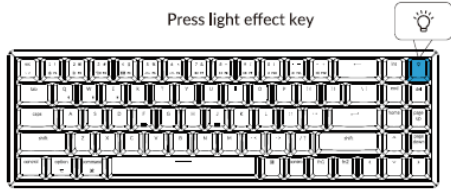


For RGB version - Press fn1 + right arrow / left arrow to change color




### 4 Multimedia Key and Function Key


Multimedia keys



Function keys



In order to get Multimedia Key, you need to press fn1 and  Key.

In order to get Function Key, you need to press fn2 and  Key.

5

### 5 Disable Auto Sleep Mode

The keyboard goes to Auto Sleep Mode in 10 minutes of sitting idle to save battery



Press fn1 + S + O (for 4 seconds) to disable the Auto Sleep Mode.



### 6 Set Auto Sleep Time

Press fn1 + S + L + R to set Auto Sleep Time to 10 minutes



Press fn1 + S + L + T to set Auto Sleep Time to 20 minutes





Press fn1 + S + L + Y to set Auto Sleep Time to 30 minutes



6

## 7 Turn Off the Backlight

In order to turn up the brightness of the backlight, you need to press **fn1 +** 

In order to turn down the brightness of the backlight, you need to press **fn1 +** 



Press the **fn1 + light effect** key to quick turn on and off of the backlight.



## 8 Remap keys

We don't have an official software to remap the keys yet. But you can use these two software to get the job done. (Except the light effect key)

For Mac - Karabiner

**Karabiner**

For Windows - SharpKeys

**SharpKeys**

## 8.5 Linux's Setting

We have a Linux user group on facebook. Please search "Keychron Linux Group" on facebook. So you can have better experience with our keyboard.



7


## 9 Lock the light effect

Press **fn1+L+Light effect key** (for 4 seconds) to **lock** the light effect. Press this key combination again to **unlock** it.



## 10 Factory Reset

Trouble shooting? Don't know what's going on with the keyboard?  
Try factory reset by pressing **fn1 + J + Z** (for 4 seconds)

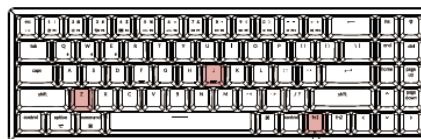

8

## K14 Bluetooth Mechanical Keyboard Specifications

Number of keys: 72

Switch type: Mechanical / Optical Switch

Battery: 4000mAh

Working time: 3 - 5 weeks - depending on usage / 20 - 80 hours RGB lighting - varies with brightness and usage

Charging time: Around 3 hours

Charging port: USB Type-C

Mode: Bluetooth/Wired

Bluetooth operating distance: Within 10 meters (open space)


Name of Bluetooth device: Keychron K14

Operating Environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.

9

## K14 Bluetooth Mechanical Keyboard Overview

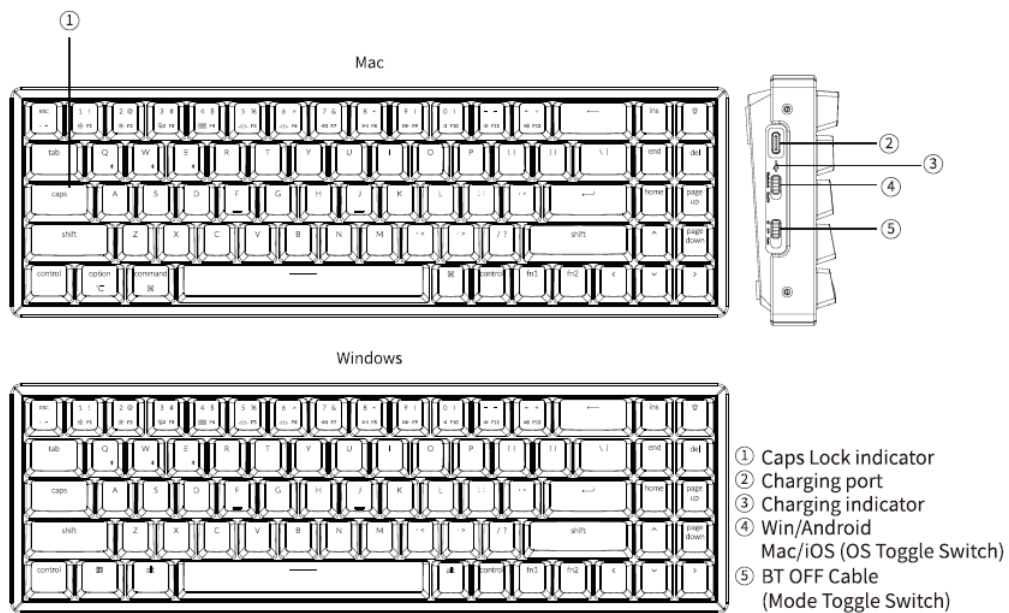

10

## LED STATUS OVERVIEW

LED Location	Function	Status
Battery indicator	Charging	Low battery - Blinking Red Charging - Static Red Fully charged - Static Green
Bluetooth indicator	Bluetooth	Pairing - Slow Blinking Paired - Light Off Switching - Fast Blinking

## FUNCTION DESCRIPTION:

### CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. Charging Indicator: When battery is below 15%, a red battery blinking indicator will be triggered. A red light will stay on while charging; Fully charged in around 3 hours, a green battery indicator will appear.

\*The Keychron keyboard is compatible with all USB ports. Please use a 5V 2A adapter or USB 3.0 for the best performance. The Keychron K14 can be charged in Bluetooth/on/off mode.

\*\* This product supports up to 5V charging voltage and 2A charging current. We are not responsible for any problems caused by improper charging.

11

## BLUETOOTH/WIRED MODE (TOGGLE SWITCH)

### WIRED MODE

1. Switch the toggle switch to Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.
3. Backlit will be turned on.

\*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

### BLUETOOTH MODE

1. Switch the keyboard to Bluetooth option.
2. Backlit will be turned on.
3. Hold "Fn1+Q" key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
4. Search for the Bluetooth device "Keychron K14" on your device and connect it (the Bluetooth indicator goes off after successful pairing).

*Note: This keyboard supports pairing up to 3 devices simultaneously via combination key "fn1" + "Q" / "fn1" + "W" / "fn1" + "E". Simply short press combination keys "fn1" + "W" / "fn1" + "E" to switch. Follow the above procedures to connect with other devices.*

*\*The Bluetooth indicator will continue to flash for 3 minutes.*

*\*\*Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.*

### SWITCH BLUETOOTH DEVICES

Short press combination key "fn1" + "Q" / "fn1" + "W" / "fn1" + "E" to switch to other device.

12

**Reconnect:**

1. Switch the keyboard to the Bluetooth option to activate the keyboard (the keyboard will connect to the last connected device by default).
  2. The Bluetooth indicator flashes for 3 seconds and automatically pairs with the last paired device.
  3. If the Bluetooth indicator is off, press any button to enter the connection again.
- \* The keyboard must have been paired with the device to perform this function.



**Turn off the Keyboard**

Switch to "Off"

**BATTERY SAVER**

Under Bluetooth mode, the keyboard backlight turns off when it is inactive for 10 minutes. Tap any button to wake the keyboard. If want to disable this auto battery save mode, press fn1+S+O for 4 seconds. Then if want to enter this power save mode again, press fn1+S+O for 4 seconds.

**BACKLIT SETTING**

- Short press  to switch between different types of lighting effects.
- When backlit is on, press  button to switch among them. Short press fn1 and "left arrow" or fn1 and "right arrow" to adjust light colors. (For RGB version only)

13

**OS SWITCH****1- MAC/iOS**

Turn the switch to Mac/iOS when you are connected to a Mac or iOS operating system.

**2-WINDOWS/ANDROID**

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system.

\*When using the Windows/Android mode,  keys are used for "Windows" and "Alt" functions.

**3-INPUT METHOD SWITCH**

For iOS:

Input method switch: Ctrl + Space

Caps Lock: Caps (Enable General>Keyboards>Hardware Keyboard>Caps Lock Language Switch)

For Android:

Input method switch: Shift + Space

*NOTE: Functions of certain multimedia key may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS. We also recommend not to switch OS frequently as it may impact keyboard operations.*

## **TROUBLESHOOTING**

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer  
Allow Bluetooth devices to connect to this computer  
Alert me when a Bluetooth device wants to connect

### **My keyboard isn't working.**

For the keyboard: Turn the keyboard off and back on.  
Turn Bluetooth off and restart the computer. (Windows)

For the device:

Go to Bluetooth settings and turn off Bluetooth and "forget" the keyboard.  
Restart the device and turn on Bluetooth to reconnect.

15

### **Bluetooth connection is interrupted even within 10 meter.**

Check if the keyboard is resting on a metal surface that can interfere with the Bluetooth signal.

### **Third party input tools are not compatible with the keyboard.**

Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

### **Certain fn keys or multimedia keys does not work under Windows/Android mode.**

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS.

Safety Precaution:

Keep the product, accessories and packaging parts out of reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C (5°F) or above 50°C (131°F) to preserve the lifespan of the keyboard and battery.



**Keychron, Inc.**  
**Dover, DE 19901, United States**  
Find us at:  
<https://www.keychron.com>  
[Support@keychron.com](mailto:Support@keychron.com)  
 @keychron  
 @keychron  
 @keychronMK  
Designed by Keychron  
Made in China

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

#### Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. in portable exposure condition without restriction.