

Installation and configuration manual
Advanced People Sensor, Firmware 1.12
APS-90, APS-180E and APS-90-Outdoor



Draft

HELLA Aglaia Mobile Vision GmbH
Ullsteinstrasse 140
12109 Berlin
Germany

Telephone: +49 30 2000429-0
Fax: +49 30 2000429-109
E-mail: people.counter.support@hella.com
Internet: www.people-sensing.com

© 2018 HELLA Aglaia Mobile Vision GmbH, Berlin (hereinafter 'HELLA Aglaia')

Copyright information

© 2018 HELLA Aglaia Mobile Vision GmbH. All rights reserved. This manual is protected by copyright. It may not be reproduced, either in whole or in part, or stored in a database or a data backup system without the prior written consent of HELLA Aglaia Mobile Vision GmbH, nor transmitted in any form, either electronically or mechanically, including photocopying and recording. Violations are subject to the criminal provisions of the Copyright Act.

HELLA Aglaia Mobile Vision GmbH reserves the right to revise or replace this manual at any time and without prior notice. Make sure that you have the most current version of this manual. Please don't hesitate to contact HELLA Aglaia Mobile Vision GmbH with any questions.

HELLA Aglaia Mobile Vision GmbH does not guarantee the completeness, accuracy, or timeliness of the laws, guidelines, or regulations referred to or quoted, whether directly or indirectly, in this manual. It is the responsibility of the user to become familiar with the current laws, guidelines, and regulations that apply to their work.

HELLA Aglaia Mobile Vision GmbH reserves the right to modify the described devices (including the respective software) without prior notice, irrespective of the content of this manual. Unless expressly agreed upon in writing, HELLA Aglaia Mobile Vision GmbH is not obligated to notify the owner or user of the devices described in this manual (including the respective software) of any revisions, updates, or modifications without further request.

With regard to the people counter, HELLA Aglaia Mobile Vision GmbH's liability is limited to the terms of the warranty described in this manual. The information provided in this manual is not a warranty or guarantee of any kind. Stipulations concerning the devices described in this manual are only deemed warranties if they are expressly referred to as such in writing and contain a description of the warranty's scope and the product covered by the warranty.

The product and company names mentioned in this manual may be protected trademarks of other manufacturers. HELLA Aglaia Mobile Vision GmbH will be happy to provide you with circuit diagrams, parts lists of the components used in the respective devices, descriptions, or other information to enable authorized personnel of the user to repair those device components that are deemed repairable by HELLA Aglaia Mobile Vision GmbH.

The information contained in this manual has been prepared by HELLA Aglaia Mobile Vision GmbH with great care using sources available to HELLA Aglaia Mobile Vision GmbH. However, HELLA Aglaia Mobile Vision GmbH shall not be responsible for any errors, incorrect or incorrectly compiled data, and any consequences resulting therefrom, irrespective of the legal basis, provided that HELLA Aglaia Mobile Vision GmbH's conduct amounts to no more than ordinary negligence.

The aforementioned exclusion of liability does not apply to damages resulting from injury to life, body, or health or to damages that are caused intentionally, by gross negligence on the part of HELLA Aglaia Mobile Vision GmbH, or by the violation of due diligence requirements in connection with the development, manufacture, and distribution of the products described in this manual.

This does not affect the liability regardless of negligence or fault pursuant to legal regulations such as the Product Liability Act.

Table of contents

1	Overview	5
2	General information	6
2.1	About this document.....	6
2.2	About the manufacturer.....	6
2.3	Limitation of liability.....	7
2.4	Scope of delivery.....	7
2.5	Use of the Advanced People Sensor.....	7
2.6	Requirements for initial operation.....	8
2.7	Privacy of data statement.....	8
3	Technical data	9
3.1	Electrical data.....	9
3.2	Optical data.....	9
3.3	Environmental conditions.....	10
4	Cleaning, maintenance and troubleshooting	11
4.1	Cleaning.....	11
4.2	Maintenance.....	11
5	Disposal	12
6	Appendix	13
6.1	CE Declaration of Conformity.....	13
6.2	Federal Communications Commission (FCC) Statement.....	14
7	Glossary and abbreviations	15
8	Index	18

1 Overview

The Advanced People Sensor (APS) counts persons within the configured area/monitored area based on stereoscopic imaging and image processing. The counting data is stored internally and can be transferred via different interfaces for external processing.

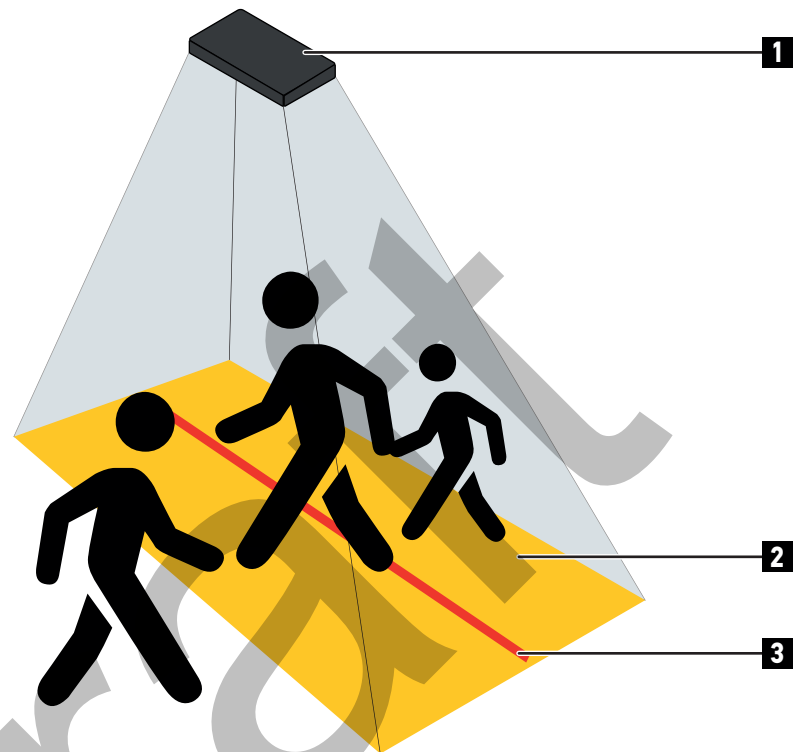


Fig. 1: People sensing

- 1 Advanced People Sensor (APS)
- 2 Configured area/monitored area
- 3 Counting line

The results can be verified using video recording (optional). This enables a precise proof of the counting accuracy.

2 General information

2.1 About this document

This manual provides information for optimal configuration and efficient operation of the device.

Personnel must carefully read and fully understand this manual before performing any installation or configuration tasks.

The figures in this manual are for information only. Actual design may differ from illustrations.

Target group

This document is addressed to system integrators.

Software and hardware version

All information in this manual refers to firmware version 1.12 and hardware APS.

Modifications to the functionality which will be implemented through future software updates will be described in separate release notes or in an updated version of the manual.

Notes

Notes and safety instructions are marked by symbols in this manual.

For safety instructions the relevant symbol and words indicate the severity of the danger.

**NOTICE!**

This combination of symbol and signal word indicates a potentially dangerous situation, which can lead to property damage, data loss or misuse of the device if not avoided.



This symbol highlights useful tips and recommendations as well as information for efficient and trouble-free operation.

2.2 About the manufacturer

Service requests

Service requests regarding the device can be sent to the following e-mail address:

people.counter.support@hella.com

The general contact information is shown on page 2.

Warranty information

The warranty information is included in the general terms and conditions of Hella Aglaia.

2.3 Limitation of liability

All the data and notes in this manual were compiled considering the applicable standards and regulations as well as the state of the art.

In the following cases HELLA Aglaia assumes no liability for damages:

- Non-compliance with this manual.
- Deviation from the intended use.
- Assignment of untrained personnel.
- Unauthorized technical changes.
- Use of unauthorized accessories.

For special models, use of additional order options, or current technical changes, the actual scope of delivery can deviate from the explanations and illustrations in this manual.

The obligations agreed upon in the delivery contract, General terms and conditions and delivery conditions of HELLA Aglaia as well as any legal regulations applicable at the time of the contract conclusion apply.

2.4 Scope of delivery

The standard scope of delivery for the Advanced People Sensor includes:

- The Advanced People Sensor.
- This operating manual as a digital version by download.

2.5 Use of the Advanced People Sensor

Intended use

The Advanced People Sensor is a sensor assembly, which must be integrated into other systems.

The Advanced People Sensor is intended for automatically counting persons in the configured monitored area.

The Advanced People Sensor is intended for detecting and monitoring persons in the configured monitored zone or detecting wireless devices in combination with a wireless USB adapter.

Proper and safe operation of the product requires appropriate transport, storage and installation as well as attentive operation and care.

The information in this manual must also fully comply with use to be deemed 'intended'.

Any use which deviates or exceeds the intended use is considered as 'misuse'.

Non intended use

The following list contains, but is not limited to, the following examples of non intended use:

- Use with unauthorized modified firmware.
- Use in unsuitable environments (e.g. use outdoors if the Advanced People Sensor is not specified for outdoor operations).

2.6 Requirements for initial operation

Accessories

The following accessories are required for the initial operation of the device, but they are not included in the scope of delivery:

APS-90 and APS-180E

- RJ-45 Ethernet cable
- Ethernet switch with PoE or PoE injector, alternatively 24 V power supply for APS-IO models
- PC or tablet for configuration

APS-90-Outdoor and APS-90-Outdoor-PoE

- M12 Ethernet cable
- Ethernet switch with PoE or PoE injector for APS-90-Outdoor-PoE
- 12 to 24 V power supply for APS-90-Outdoor
- PC or tablet for configuration.

PC or tablet minimum requirements

- Latest web browser supporting HTML5 and WebSockets (e.g. Mozilla Firefox 44.0, Google Chrome 48.0, Apple Safari 9.0, Microsoft Edge).
- Optional OpenDHCP, to connect to a single device without any other DHCP server in the network e.g. inside a router.

2.7 Privacy of data statement

It should be noted that the APS can be used as a camera, and that it is possible to record and store video data. Under certain conditions it may also be possible to identify a person.

The standard scope of delivery is privacy by default.

The user must establish in advance whether there are legal requirements or privacy regulations applicable when using the people sensor. Appropriate measures should be taken to prevent unauthorized access to the unit.

To prevent unauthorized access to the unit change the password for full access. Also change the password for service access via linux ssh.

3 Technical data

3.1 Electrical data

Supply voltage

Input voltage U_{PoE} (PD class 0) via Ethernet	36 .. 57 V DC
Power consumption P_{IN} (without USB load)	6 W (125 mA at 48 V DC)

Ethernet

	APS-90 APS-180 APS-180E	APS-90-Out-door
Transfer rate	100 / 1000 MBit/s	10 / 100 MBit/s
Cable length, maximum	100 m (328 ft)	
Connector type (APS/PC)	RJ-45	M12 D-coded, 4-pin, female

USB

	APS-90 APS-180 APS-180E	APS-90-Out-door
USB type	USB 2.0 type host	-
Connector type (APS/PC)	Type-A	-

3.2 Optical data

Category	Description
Image resolution	640 x 480 px, color
Aperture	1.8
Focal length	2.6 mm (0.10 in)
Angle of view	110° diagonal 100° horizontal
Light sensitivity, minimum	3 lx, HDR

3.3 Environmental conditions

Category	APS-180E	APS-90 APS-180	APS-90- Outdoor
Operating temperature (ambient temperature housing)	-25 to 70 °C (-13 to 158 °F)	0 to 55 °C (32 to 131 °F)	-25 to 70 °C (-13 to 158 °F)
Storage temperature (when device is switched off)	-40 to 85 °C (-40 to 185 °F)		
Relative humidity (non-condensing)	0 .. 90%		95% .. 100% short-time maximum (relative)
Ingress protection (DIN IEC 60529)	IP40		IP65 in conjunc- tion with appropriate mating connectors
Illuminance, minimum	3 lx		

Draft

4 Cleaning, maintenance and troubleshooting

4.1 Cleaning

- Materials:
- Lint-free cloth
 - Commonly available neutral cleaners diluted with water

Optimal counting accuracy can be achieved only if the view of the cameras is not obstructed.

1. → Check the lens cover plate or outside housing for dirt, scratches and stickers at regular intervals.



NOTICE!

Reduced transparency by cleaning with solvents

Solvents can reduce the transparency of the lens cover plate.

- Do not use cleaning agents containing solvents (such as gasoline, acetone, petroleum and turpentine)

2. → Clean the lens cover plate or the housing if necessary.

4.2 Maintenance

The device does not require any preventive maintenance.

5 Disposal

After decommissioning, the product shall be recycled as waste electronic in an environmentally safe way. In the European Union, the WEEE Directive 2012/19/EU applies. HELLA Aglaia will collect its own electronic products free of charge and take care of the further processing.

Decommissioned devices can be sent to the address:

HELLA Aglaia Mobile Vision GmbH
Ullsteinstrasse 140
12109 Berlin
Germany

Please clearly mark the goods as **waste**.

Draft

6 Appendix

6.1 CE Declaration of Conformity

EU Konformitätserklärung / EU Declaration of Conformity (DoC)

Wir / We,

Hella Aglaia Mobile Vision GmbH

(Name des Herstellers / seines Vertreters | *manufacturer / authorised representative*)

Ullsteinstraße 140, 12109 Berlin, Deutschland

(Adresse | *address*)

erklären auf eigene Verantwortung, dass das Produkt /
declare under our own responsibility that the product

Automatic People Sensor; APS-180E, APS-180E-IO

(Produktbeschreibung; Modellnamen | *product description; model names*)

auf das sich diese Erklärung bezieht, die Anforderungen nach den folgenden Normen einhält:
to which this declaration refers complies with the following standards:

EMC ; EN 55024:2010,
 EN 55032:2012+AC:2013
 RoHS ; EN 50581:2012

(Richtlinie; Nummern ; Ausgabedatum der referenzierten Dokumente | *directive; number; date of issue of the referenced documents*)

Gemäß den Bestimmungen von:
According to the requirements of:

2014/30/EU : Elektromagnetische Verträglichkeit – EMV Richtlinie | *Electromagnetic Compatibility (EMC) Directive*
 2011/65/EU : RoHS Richtlinie | *Restriction of the use of certain Hazardous Substances (RoHS) Directive*

(falls zutreffend | *if applicable*)

Geschehen am: <i>Done on:</i>	verantwortliche Personen: <i>responsible persons:</i>
Berlin, 2017-11-22	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> Matthias Nerling Head of Business Unit </div> <div style="text-align: center;"> Stefan Gilm Head of Hardware development </div> </div>

Fig. 2: APS-180E CE declaration

6.2 Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

7 Glossary and abbreviations

APC	Automatic People Counter First generation people counter.
APS	Advanced People Sensor Second generation people sensor, successor of the APC
APS-M	APS for Mobile applications such as busses and trains.
APS-RS	APS for Retail & Security and other stationary applications.
CSV	Comma separated values File format where values are separated by commas. Those files can be imported into Microsoft Excel.
DHCP	Dynamic Host Configuration Protocol Protocol and service dynamically distributing network configuration parameters, such as IP address and servers.
DNS	Domain Name System Resolves queries for FQDN host names into IP addresses
FQDN	Fully Qualified Domain Name Address of a device or server using DNS instead of an IP address
FTP	File Transfer Protocol Protocol for data transfer; used for transferring the counting data registered by the APS
H.264	Video compression standard. This is used by APS video storing and streaming.
HAGL	HELLA Aglaia
HDR	High-Dynamic-Range imaging Technique used in imaging to reproduce a greater dynamic range of luminosity.
HTML5	Hypertext Markup Language , fifth revision Markup language used for structuring and presenting content on the World Wide Web since 2014. This is used by the user interface of the APS.
HTTP	Hypertext Transfer Protocol Application protocol for data transmissions in networks. HTTP is the basis for data communications in the World Wide Web.
HTTPS	Hypertext Transfer Protocol Secure Application protocol for secure communication in networks
IP address	Internet Protocol address Manually or dynamically assigned in the network
JSON	JavaScript Object Notation Used by the APS REST interface.
Lux	Unit of illuminance.
MAC address	Media Access Control address

	Unique hardware address of a network device.
MQTT	Message Queuing Telemetry Transport ISO standard 20922 publish-subscribe-based messaging protocol
NTLM	NT LAN Manager Security protocol for authentication at http proxy
NTP	Network Time Protocol Protocol for the synchronization of time and date settings
OSD	Optical Self Diagnosis Software function for checking the visual range
PoE	Power over Ethernet Procedures for powering network devices over the eight-wire Ethernet cable
Push service	Sending data from the APS to a data server (the connection is established by the APS)
RAS	Remote Access Service Web service to remote access sensors
RTSP	Real Time Streaming Protocol Typically used for Video Streaming
SOAP	Simple Object Access Protocol Network protocol for exchanging data between systems and implementing remote procedure calls
TCP	Transmission Control Protocol One of the core data transfer protocols of the Internet Protocol suite and with ordered data transfer
UDP	User Datagram Protocol One of the core data transfer protocols of the Internet Protocol suite
UTC	Universal Time Coordinated Coordinated Universal Time is the main time standard by which the world regulates clocks and time.
VPN	Virtual Private Network Technology using the Internet to connect computers to isolated remote computer networks that would otherwise be inaccessible
WebSocket	Protocol providing full-duplex communication between web browsers and web servers. This is used by the web browser user interface of the device.
WiFi or Wi-Fi	Wireless-Fidelity Commercial name for wireless local area network.
WLAN	Wireless Local Area Network Wireless network typical at 2.4 or 5 gigahertz radio bands.
XML	Extensible Markup Language

Defines a set of rules for encoding documents in a format that is both human-readable and machine-readable. XML has been employed as the base language for communication protocols.

Draft

8 Index

A

Angle of view 9

C

Cleaning 11

D

Disposal 12

H

Humidity 10

I

Ingress Protection 10

Intended use 7

L

Limitation of liability 7

M

Maintenance 11

Manufacturer 6

N

Non intended use 7

Notes 6

P

People counting 5

People sensing 5

R

Resolution 9

S

Safety information 6

Scope of delivery 7

Service 6

Support 6

System integrator 6

T

Target group 6

Temperature 10

V

Version

 Hardware 6

 Software 6

W

Warranty information 6

Waste 12



Draft

Draft

