

# SoundBar BT-167

## User Manual



### SPECIFICATION

1. Output power :5W\*2
2. Product name: bluetooth speaker
3. Bluetooth version :JL5.0
4. Playing time: about 5H
5. Operating distance: 10m
6. Horn size :52mm\*2
7. Impedance: 4 ohm
8. Battery capacity :2000mAh
9. Charging time: about 5 hours
10. Charging voltage: 0.5A DC5V/USB POWER
11. Frequency response: 160hz-18khz
12. Product size :370(L) \* 65(W) \* 60(H)mm
13. Weight: 0.84 kg
14. Packing list



USER'S MANUAL



AUX Cable





USB Cable

SPEAKER



### COMPONENTS & FUNCTION

PLS KINDLY CHECK THE FUNCTION INDICATOR BEFORE USE THE SPEAKER SYSTEM

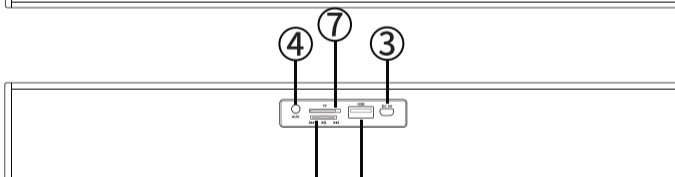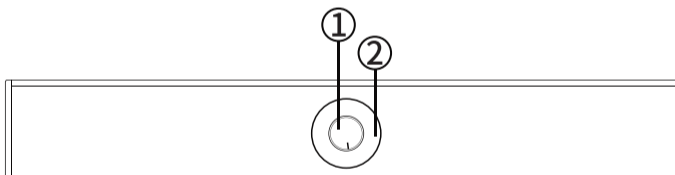

- |   |   |   |   |
|---|---|---|---|
| 1 | <p>POWER ON/OFF VOLUME<br/>VOLUME +/-</p> | 2 | <p>LED INDICATOR</p>  |
| 3 | <p>DC5V POWER</p>                         | 4 | <p>3.5mm AUX INPUT</p>  |
| 5 | <p>USB</p>                                | 6 | <p>▶▶ Turn left. Next turn<br/>▶▶ Short press pause/play<br/>◀◀ Turn right. Last turn</p> |
| 7 | <p>TF</p>                                 |   |   |

### ( SoundBar BT-167 ) USER'S MANUAL

#### I. Bluetooth Mode

1. Bluetooth Version: Bluetooth JL5.0, support HSP, A2DP, AVRCP profiles, with voice prompts. Bluetooth pairing name: BT167.
2. Rotate the volume knob to turn on the speaker, then the blue color indicator light is on with voice prompts.
3. The blue color light will flash by 100ms, and the speaker is on pairing status, use the device to search "BT167," then it will connect and pair automatically. If there is a password needed, it is "0000". After connected successfully, there will be voice prompts. The blue color light will flash by 1000ms when the speaker is in use. Once the device is connected successfully, it will be automatically paired when re-used next time.

#### II. AUX Mode

1. Connect the device with the 3.5mm aux cable and the speaker will enter into the AUX mode with voice prompts.
2. The blue color indicator light is on in Aux mode.

#### III. RCA Mode

1. Plug the red and white color cable into the TV/Projector or any other devices' corresponding position (The white cable plugs into the white hole position, and the red cable plugs into the red hole position), the other 3.5mm cable plug into the speaker, and then the speaker will enter into the RCA mode with voice prompts.
2. The blue color indicator light is on in RCA mode.

#### IV. Charging Mode

1. Charge the speaker with the charging cable. (Wall charger is also available as long as it is 5V adapter).
2. The red color indicator light is on when it is on charging mode, and the light is off when fully charged.

#### V. Low battery protection

1. When the battery is lower than 3.3v and lasts for 15s, the speaker will issue the warning, and when the battery is lower than 3.1v and lasts for 15s, the speaker will issue the warning and turn off itself.

**Warning:**

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**NOTE:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and

on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**RF exposure compliance statement:**

This device has been evaluated to meet the general RF exposure requirement it can be used in portable exposure condition without restriction.