

FCC Radio Test Report

FCC ID: 2ATEYWS7200

This report concerns: Original Grant

Project No. : 2006C031C
Equipment : 3000Mbps Wi-Fi 6 Router
Brand Name : HUAWEI
Test Model : WS7200
Series Model : N/A
Applicant : Huawei Device Co., Ltd.
Address : No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong
523808, People's Republic of China
Manufacturer : Huawei Device Co., Ltd.
Address : No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong
523808, People's Republic of China
Date of Receipt : Jun. 08, 2020
Sep. 02, 2020
May 17, 2021
Date of Test : Jun. 15, 2020 ~ Jul. 08, 2020
Sep. 08, 2020 ~ Sep. 10, 2020
May 17, 2021 ~ May 20, 2021
Jun. 24, 2021 ~ Jul. 01, 2021
Issued Date : Jul. 02, 2021
Report Version : R01
Test Sample : Engineering Sample No.: DG2020061653, DG202105173 for
conducted, DG2020070261, DG202105171 for radiated.
Standard(s) : FCC Part15, Subpart C (15.247)
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Chella Zheng



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	15
2.4 DUTY CYCLE	16
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
2.6 SUPPORT UNITS	18
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	19
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 EUT OPERATION CONDITIONS	20
3.6 TEST RESULTS	20
4 . RADIATED EMISSIONS TEST	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	22
4.4 TEST SETUP	23
4.5 EUT OPERATION CONDITIONS	25
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	25
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	25
4.8 TEST RESULTS - ABOVE 1000 MHZ	25
5 . BANDWIDTH TEST	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	26
5.3 DEVIATION FROM STANDARD	26
5.4 TEST SETUP	26

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	26
5.6 TEST RESULTS	26
6 . MAXIMUM OUTPUT POWER TEST	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27
6.6 TEST RESULTS	27
7 . CONDUCTED SPURIOUS EMISSIONS	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . POWER SPECTRAL DENSITY TEST	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . MEASUREMENT INSTRUMENTS LIST	30
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	32
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	35
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	40
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	43
APPENDIX E - BANDWIDTH	330
APPENDIX F - MAXIMUM OUTPUT POWER	337
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	352
APPENDIX H - POWER SPECTRAL DENSITY	359

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	May 21, 2021
R01	Updated the radiated emissions above 1GHz.	Jul. 02, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) According to client's specification, the added data are following detailed table:

Test Item	Radiated Emissions_Band edge	Maximum Output Power
Test Mode & Test Channel	G Mode (CH04)_CDD	G Mode (CH04)
	N20 Mode (CH04)_MIMO	N20 Mode (CH04)
	N40 Mode (CH04, CH05)_MIMO	N40 Mode (CH04, CH05)
	AX20 Mode (CH04)_MIMO	AX20 Mode (CH04)
	AX40 Mode (CH04, CH05)_MIMO	AX40 Mode (CH04, CH05)

Except above, other test data are kept the same with report No.: BTL-FCCP-1-2006C031A.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	±3.8 %
Maximum Output Power	±0.95 dB
Conducted Spurious Emission	±2.71 dB
Power Spectral Density	±0.86 dB
Temperature	±0.08 °C
Time	±0.58 %
Supply voltages	±0.3 %


Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	25°C	60%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	22°C	54%	AC 120V/60Hz	Kwok Guo
Bandwidth	27°C	52%	DC 12V	Hayden Chen
Maximum output power	27°C	52%	DC 12V	Laughing Zhang
Conducted Spurious Emissions	27°C	52%	DC 12V	Hayden Chen
Power Spectral Density	27°C	52%	DC 12V	Hayden Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	3000Mbps Wi-Fi 6 Router
Brand Name	HUAWEI
Test Model	WS7200
Series Model	N/A
Model Difference(s)	N/A
Hardware Version	AM1WS7200M
Software Version	10.0.5.28
Power Source	DC voltage supplied from AC adapter. Brand: FUHUA, HONOR Model: HW-120200E01, HW-120200B01, HW-120200U01
Power Rating	I/P: 100-240V ~50/60Hz, 0.8A O/P: 12V  2A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps
Maximum Output Power _Non Beamforming	IEEE 802.11b: 25.39 dBm (0.3459 W) IEEE 802.11g: 25.19 dBm (0.3303 W) IEEE 802.11n (HT20): 25.24 dBm (0.3342 W) IEEE 802.11n (HT40): 22.41 dBm (0.1742 W) IEEE 802.11ax (HEW20)_26 Tone: 21.40 dBm (0.1380 W) IEEE 802.11ax (HEW20)_52 Tone: 23.15 dBm (0.2065 W) IEEE 802.11ax (HEW20)_106 Tone: 23.98 dBm (0.2500 W) IEEE 802.11ax (HEW20)_242 Tone: 25.27 dBm (0.3365 W) IEEE 802.11ax (HEW40)_52 Tone: 19.16 dBm (0.0824 W) IEEE 802.11ax (HEW40)_106 Tone: 20.33 dBm (0.1079 W) IEEE 802.11ax (HEW40)_242 Tone: 20.47 dBm (0.1114 W) IEEE 802.11ax (HEW40)_484 Tone: 21.15 dBm (0.1303 W)
Maximum Output Power _Beamforming	IEEE 802.11ax (HEW20)_242 Tone: 24.99 dBm (0.3155 W) IEEE 802.11ax (HEW40)_484 Tone: 22.19 dBm (0.1656 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20), IEEE 802.11ax(HEW20) CH03 - CH09 for IEEE 802.11n (HT40), IEEE 802.11ax(HEW40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. RU Configuration:

Operating Mode	Resource Unit	26 Tone(2M)		
IEEE 802.11ax(HEW20)	Specific Resource Unit	0		
		1		
		2		
		3		
		4		
		5		
		6		
		7		
	8			
		Resource Unit	52 Tone(4M)	
	Specific Resource Unit		37	
			38	
			39	
			40	
	Resource Unit	106 Tone(8M)		
Specific Resource Unit		53		
		54		
	Resource Unit	242 Tone(20M)		
Specific Resource Unit		61		
IEEE 802.11ax(HEW40)		Resource Unit	52 Tone(4M)	
	Specific Resource Unit		37	41
			38	42
			39	43
			40	44
		Resource Unit	106 Tone(8M)	
	Specific Resource Unit		53	55
			54	56
		Resource Unit	242 Tone(20M)	
	Specific Resource Unit		61	62
		Resource Unit	484 Tone(40M)	
Specific Resource Unit		65		

Note:

In an HE MU PDU, at least $N \times 4 \times 26$ subcarriers (contiguous or non-contiguous) shall be occupied throughout the signaled BW, where N is the number of 20 MHz subchannels occupied by non-HE portions of the HE PDU preamble.

4. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	External	N/A	5
2	N/A	N/A	External	N/A	5

Note:

- 1) This EUT supports CDD and MIMO, any transmit signals are uncorrelated with each other. So the Directional gain = Antenna Gain = 5 dBi.
- 2) Beamforming Gain: 0.1 dB. So the Directional gain = $0.1+5=5.1$ dB.

5. Table for Antenna Configuration:
 Non Beamforming:

Operating Mode \ TX Mode	1TX	2TX
IEEE 802.11b	V (SISO 1)	-
IEEE 802.11g	V (SISO 1 / SISO 2)	V (CDD)
IEEE 802.11n(HT20)	V (SISO 1 / SISO 2)	V (MIMO)
IEEE 802.11n(HT40)	V (SISO 1 / SISO 2)	V (MIMO)
IEEE 802.11ax(HEW20)	V (SISO 1 / SISO 2)	V (MIMO)
IEEE 802.11ax(HEW40)	V (SISO 1 / SISO 2)	V (MIMO)

Beamforming:

Operating Mode \ TX Mode	2TX
IEEE 802.11ax(HEW20)	V (MIMO)
IEEE 802.11ax(HEW40)	V (MIMO)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX AX-20 MHz Mode Channel 01/06/11
Mode 6	TX AX-40 MHz Mode Channel 03/06/09
Mode 7	TX AX-20 Mode Channel 09
Mode 9	TX G Mode Channel 01/02/03/06/09/10/11
Mode 10	TX N-20 MHz Mode Channel 01/02/03/06/09/10/11
Mode 11	TX N-40 MHz Mode Channel 03/06/08/09
Mode 12	TX AX-20 MHz Mode Channel 01/02/03/06/09/10/11
Mode 13	TX AX-40 MHz Mode Channel 03/06/08/09
Mode 14	TX G Mode Channel 01/02/03/04/06/09/10/11
Mode 15	TX N-20 MHz Mode Channel 01/02/03/04/06/09/10/11
Mode 16	TX N-40 MHz Mode Channel 03/04/05/06/08/09
Mode 17	TX AX-20 MHz Mode Channel 01/02/03/04/06/09/10/11
Mode 18	TX AX-40 MHz Mode Channel 03/04/05/06/08/09

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 7	TX AX-20 Mode Channel 09

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 7	TX AX-20 Mode Channel 09

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 14	TX G Mode Channel 01/02/03/04/06/09/10/11
Mode 15	TX N-20 MHz Mode Channel 01/02/03/04/06/09/10/11
Mode 16	TX N-40 MHz Mode Channel 03/04/05/06/08/09
Mode 17	TX AX-20 MHz Mode Channel 01/02/03/04/06/09/10/11
Mode 18	TX AX-40 MHz Mode Channel 03/04/05/06/08/09

Maximum Output Power test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 14	TX G Mode Channel 01/02/03/04/06/09/10/11
Mode 15	TX N-20 MHz Mode Channel 01/02/03/04/06/09/10/11
Mode 16	TX N-40 MHz Mode Channel 03/04/05/06/08/09
Mode 17	TX AX-20 MHz Mode Channel 01/02/03/04/06/09/10/11
Mode 18	TX AX-40 MHz Mode Channel 03/04/05/06/08/09

Maximum Output Power test_Beamforming	
Final Test Mode	Description
Mode 12	TX AX-20 MHz Mode Channel 01/02/03/06/09/10/11
Mode 13	TX AX-40 MHz Mode Channel 03/06/08/09

Other Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX AX-20 MHz Mode Channel 01/06/11
Mode 6	TX AX-40 MHz Mode Channel 03/06/09

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (3) For radiated emission below 1 GHz test, the IEEE 802.11ax (HEW20) Channel 09 is found to be the worst case and recorded.
- (4) For conducted emissions and radiated spurious emissions below 1 GHz test, all adapters had been pre-tested and in this report only recorded the worst case.
- (5) The measurements for Output Power were tested, the Non Beamforming and Beamforming are recorded in the report. The worst case was Non Beamforming and only worst case were documented for other test items.

2.3 PARAMETERS OF TEST SOFTWARE
Non Beamforming

Test Software	IPOP							
Frequency (MHz)	2412		2437			2462		
IEEE 802.11b_SISO 1	Default		Default			Default		
Frequency (MHz)	2412	2417	2422	2427	2437	2452	2457	2462
IEEE 802.11g_CDD	22	Default	Default	Default	Default	Default	Default	Default
IEEE 802.11n (HT20)_MIMO	23	Default	Default	Default	Default	Default	Default	Default
IEEE 802.11ax (HEW20)_26 Tone_MIMO	32	Default	Default	-	Default	Default	Default	Default
IEEE 802.11ax (HEW20)_52 Tone_MIMO	27	Default	Default	-	Default	Default	Default	Default
IEEE 802.11ax (HEW20)_106 Tone_MIMO	25	Default	Default	-	Default	Default	Default	Default
IEEE 802.11ax (HEW20)_242 Tone_MIMO	23	Default	Default	Default	Default	Default	Default	Default
Frequency (MHz)	2422	2427	2732	2437	2447		2452	
IEEE 802.11n (HT40)_MIMO	23	Default	Default	Default	Default		Default	
IEEE 802.11ax (HEW40)_52 Tone_MIMO	29	-	-	Default	Default		Default	
IEEE 802.11ax (HEW40)_106 Tone_MIMO	25	-	-	Default	Default		Default	
IEEE 802.11ax (HEW40)_242 Tone_MIMO	23	-	-	Default	Default		Default	
IEEE 802.11ax (HEW40)_484 Tone_MIMO	23	Default	Default	Default	Default		Default	


Beamforming

Test Software	IPOP							
Frequency (MHz)	2412		2417	2422	2437	2452	2457	2462
IEEE 802.11ax (HEW20)_242 Tone_MIMO	23	Default	Default	Default	Default	Default	Default	Default
Frequency (MHz)	2422			2437	2447		2452	
IEEE 802.11ax (HEW40)_484 Tone_MIMO	23			Default	Default		Default	

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

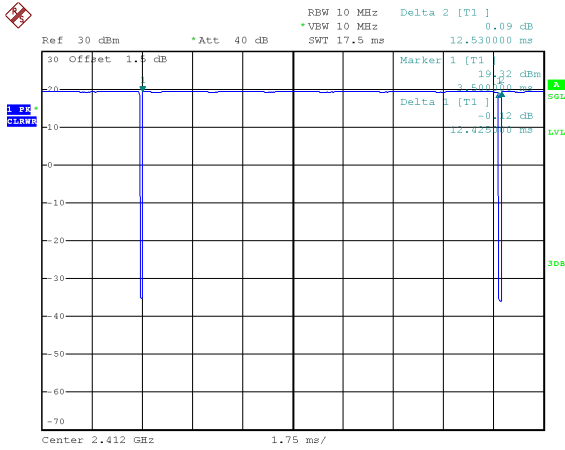

Date: 23.JUN.2020 21:00:03

Duty cycle = $12.425 \text{ ms} / 12.530 \text{ ms} = 99.16\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11g

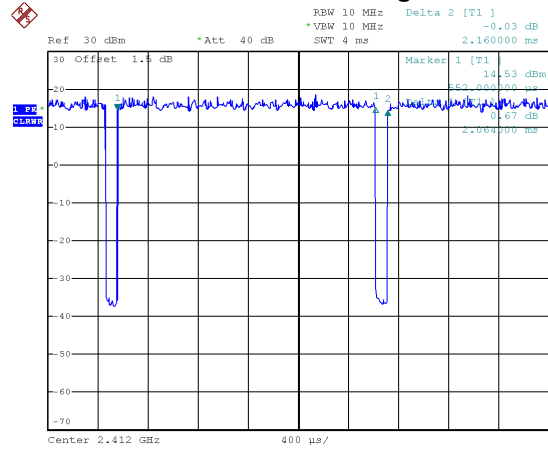

Date: 23.JUN.2020 21:49:37

Duty cycle = $2.064 \text{ ms} / 2.160 \text{ ms} = 95.56\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.20$


IEEE 802.11n (HT20)

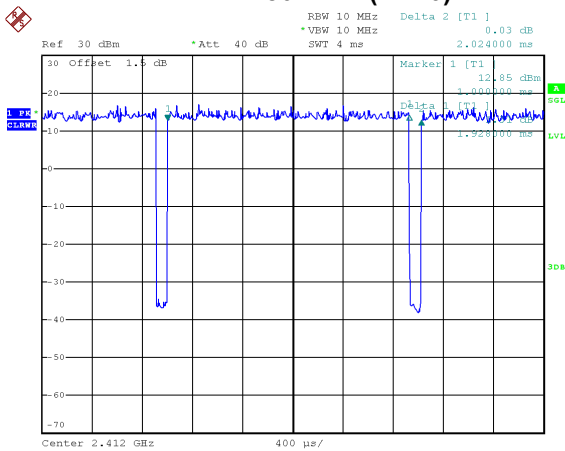

Date: 23.JUN.2020 21:50:00

Duty cycle = $1.928 \text{ ms} / 2.024 \text{ ms} = 95.26\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.21$


IEEE 802.11n (HT40)

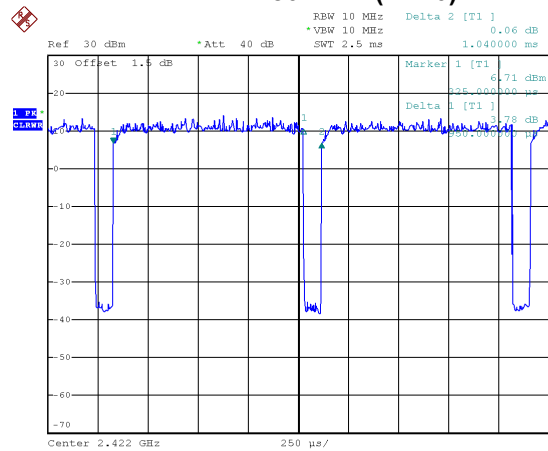

Date: 23.JUN.2020 21:50:51

Duty cycle = $0.950 \text{ ms} / 1.040 \text{ ms} = 91.35\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.39$


IEEE 802.11ax (HEW20)

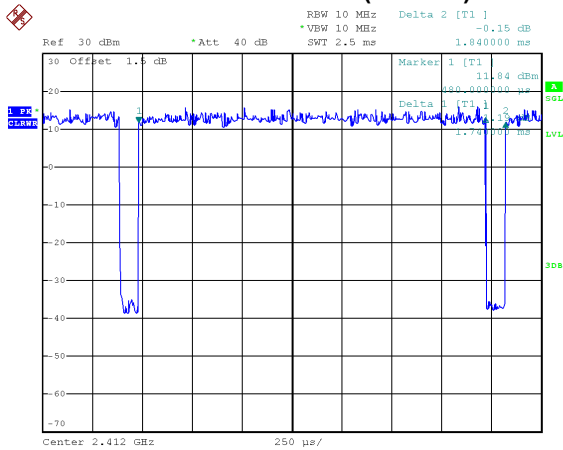

Date: 23.JUN.2020 21:51:28

Duty cycle = 1.740 ms / 1.840 ms = 94.57%
 Duty Factor = 10 log(1/Duty cycle) = 0.24

IEEE 802.11ax (HEW40)

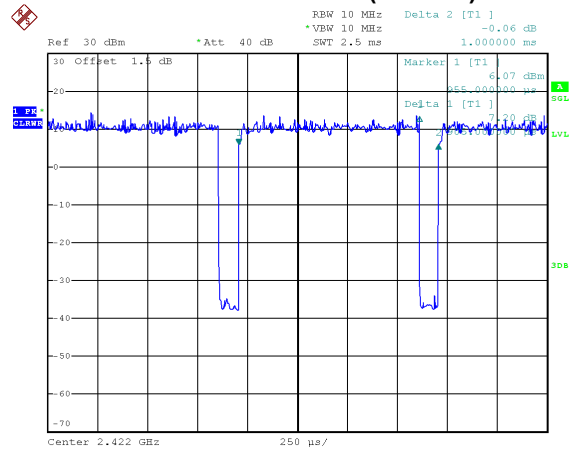

Date: 23.JUN.2020 21:52:08

Duty cycle = 0.905 ms / 1.000 ms = 90.50%
 Duty Factor = 10 log(1/Duty cycle) = 0.43

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 484 Hz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 762 Hz.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1527 Hz.


For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 575 Hz.

For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1105 Hz.

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

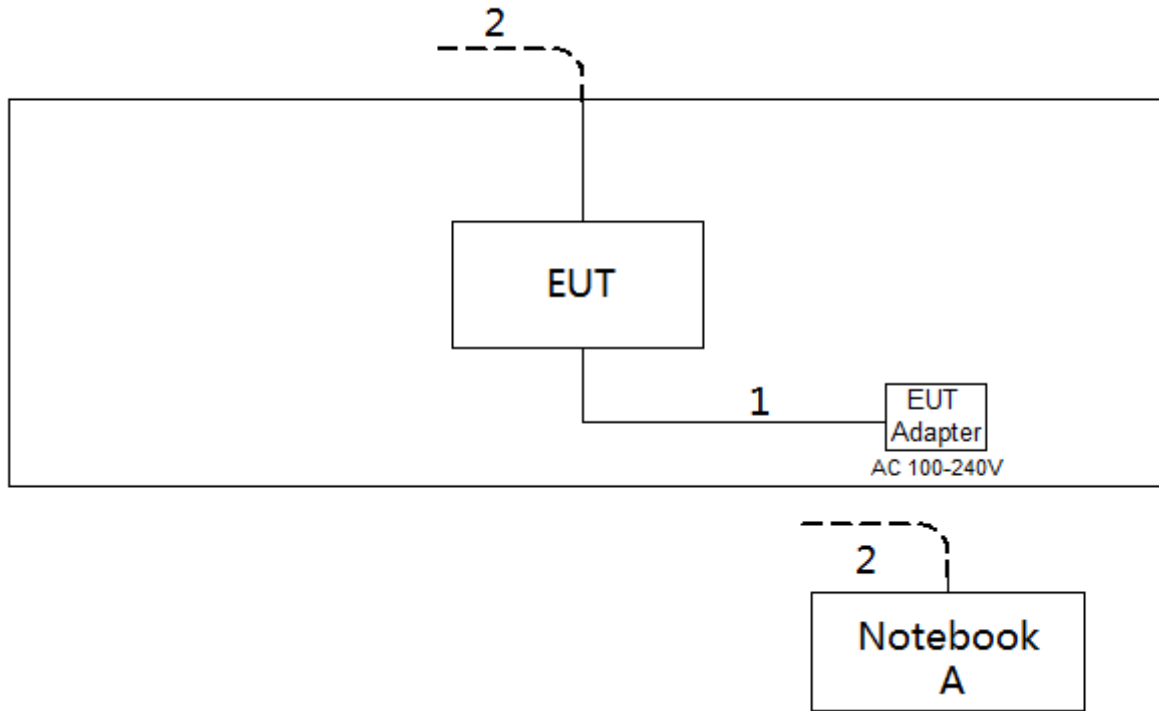

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of "*" marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

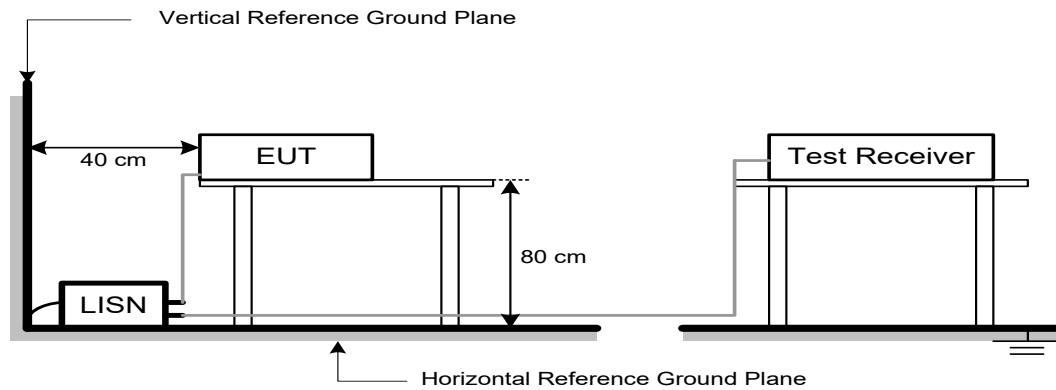

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB μ V/m)		Harmonic at 1.5m (dB μ V/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	80 (Note 5)	60(Note 5)

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) + Attenuator(15.5dBm,if use)
 Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{ dB.}$$

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz, VBW 1 kHz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz, VBW 30 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz, VBW 300 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value



Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation

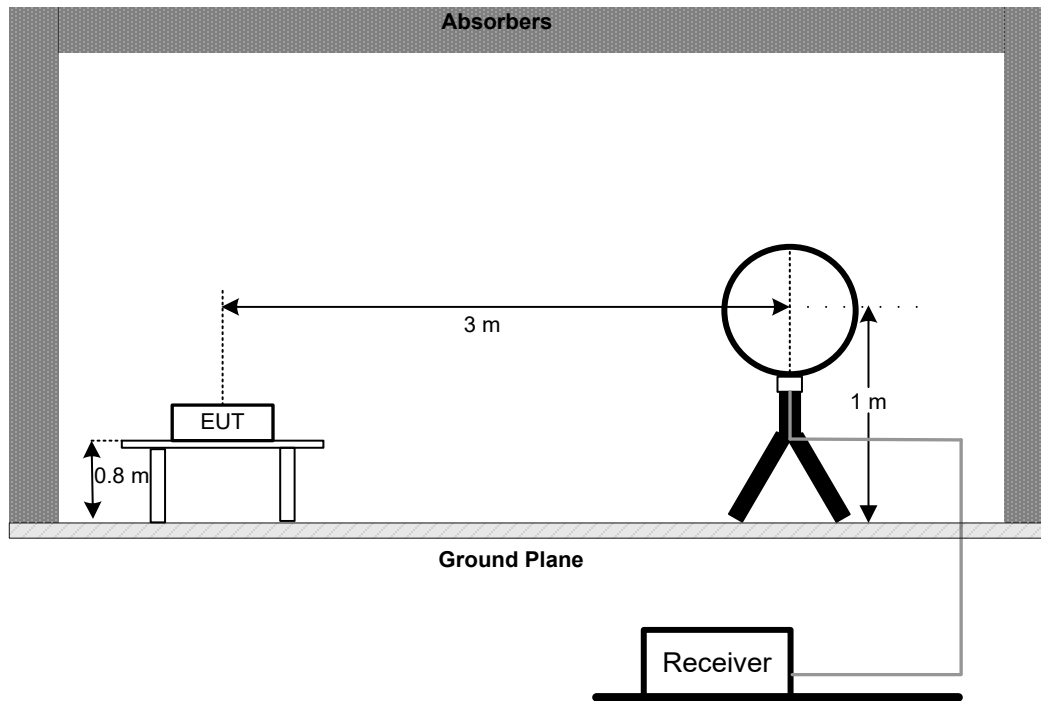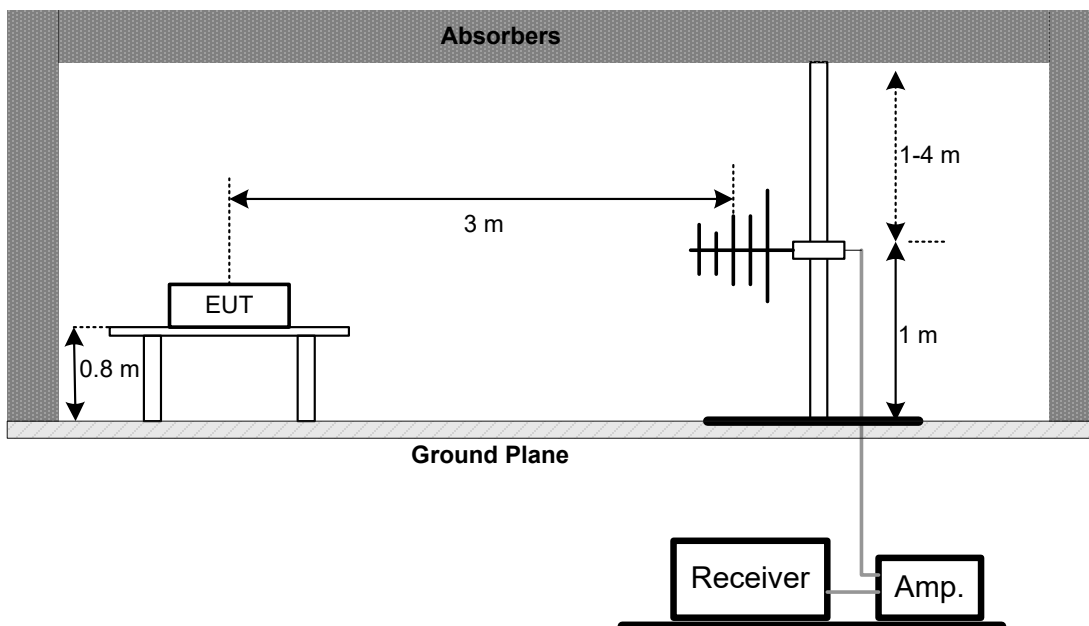4.4 TEST SETUP**9 kHz-30 MHz****30 MHz to 1 GHz**


Above 1 GHz Band edge

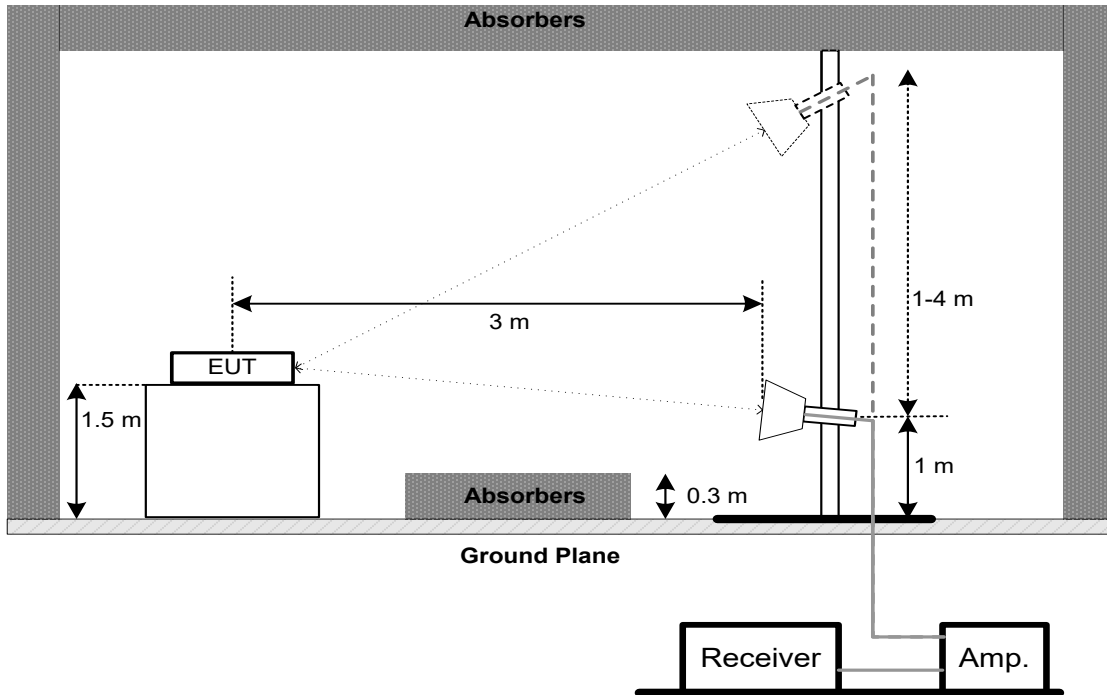

Harmonic (1 GHz to 18 GHz)

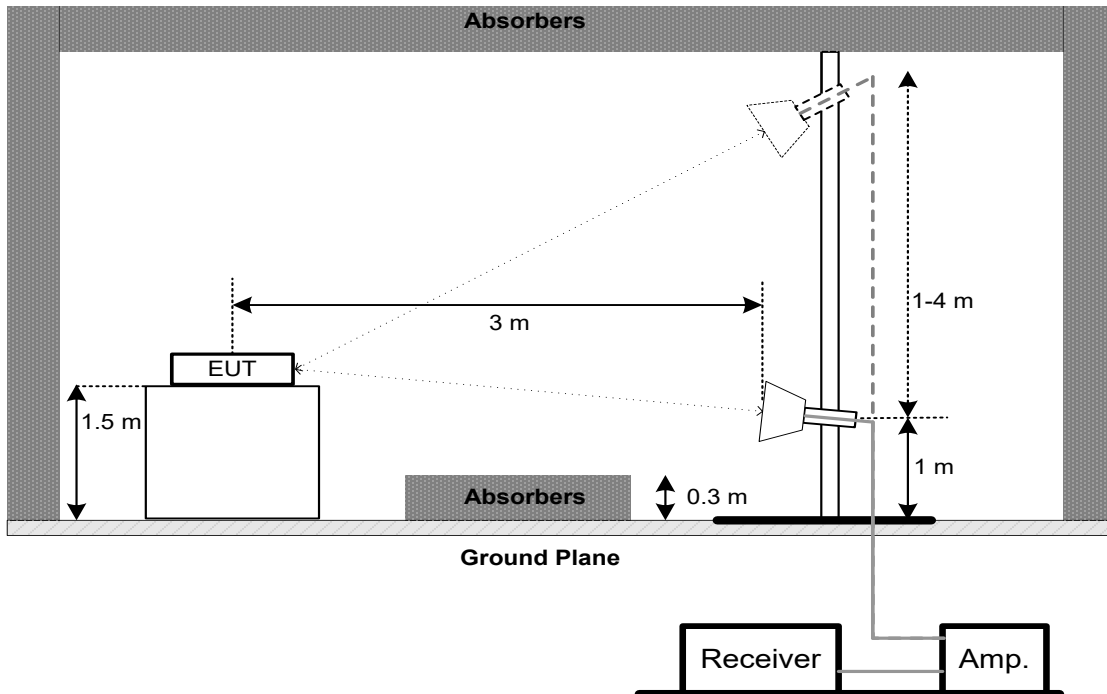

Harmonic (Above 18 GHz)

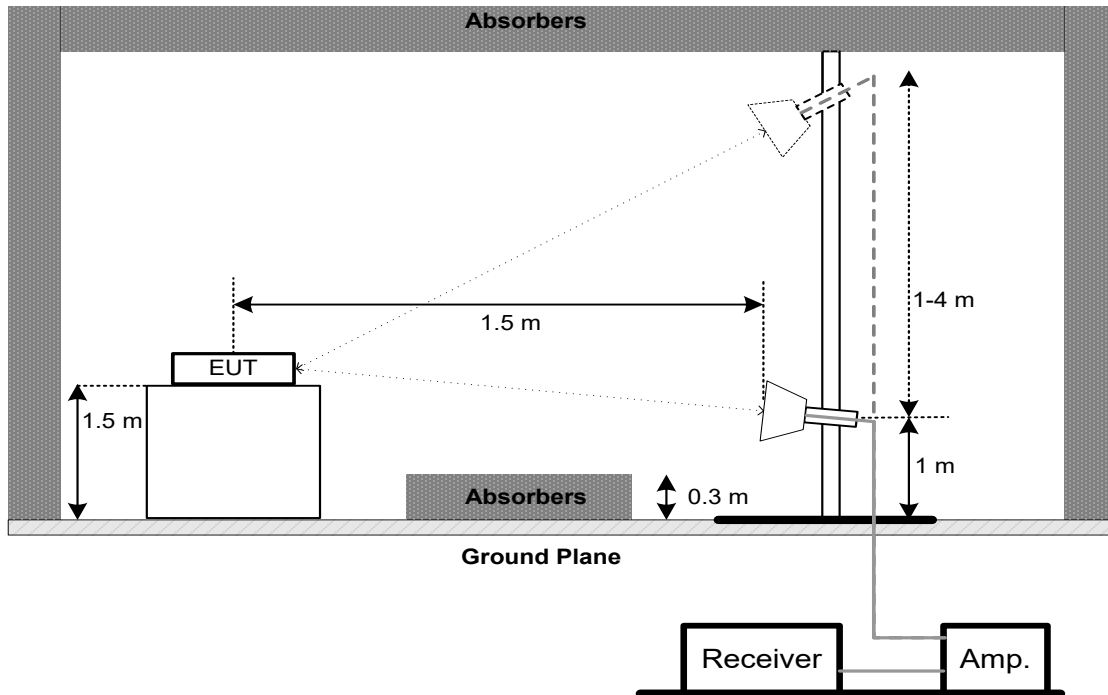

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-


5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
 - For 6 dB Bandwidth: RBW= 100 kHz, VBW=300 kHz, Sweep time = auto.
 - For 99% Emission Bandwidth B/G/N-20/AX-20 Mode: RBW= 300 KHz, VBW=1 MHz, Sweep time = 2.5 ms.
 - For 99% Emission Bandwidth N-40/AX-40 Mode: RBW= 1 MHz, VBW=3 MHz, Sweep time = 2.5 ms.
- c. The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

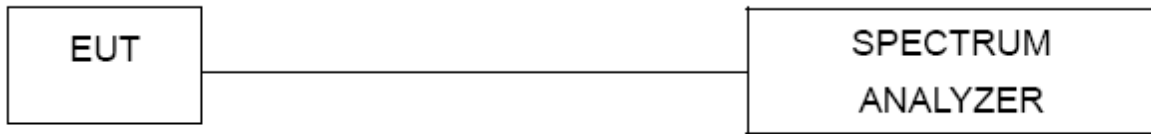

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2013.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY TEST**8.1 LIMIT**


FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2021
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EM	EM-6876-1	230	Apr. 16, 2021
2	Cable	N/A	RG 213/U	N/A	May 29, 2021
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2*	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 10, 2022
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02584	Jul. 25, 2021
4	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Jul. 25, 2021
11	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
12	Attenuator	Teseq	100-SA-FFN-06	0163357	Feb. 07, 2022
13	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Bandwidth & Antenna Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 07, 2021
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 25, 2021

Remark: "N/A" denotes no model name, serial no. or calibration specified.


"**" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX AX-20 Mode Channel 09

Line

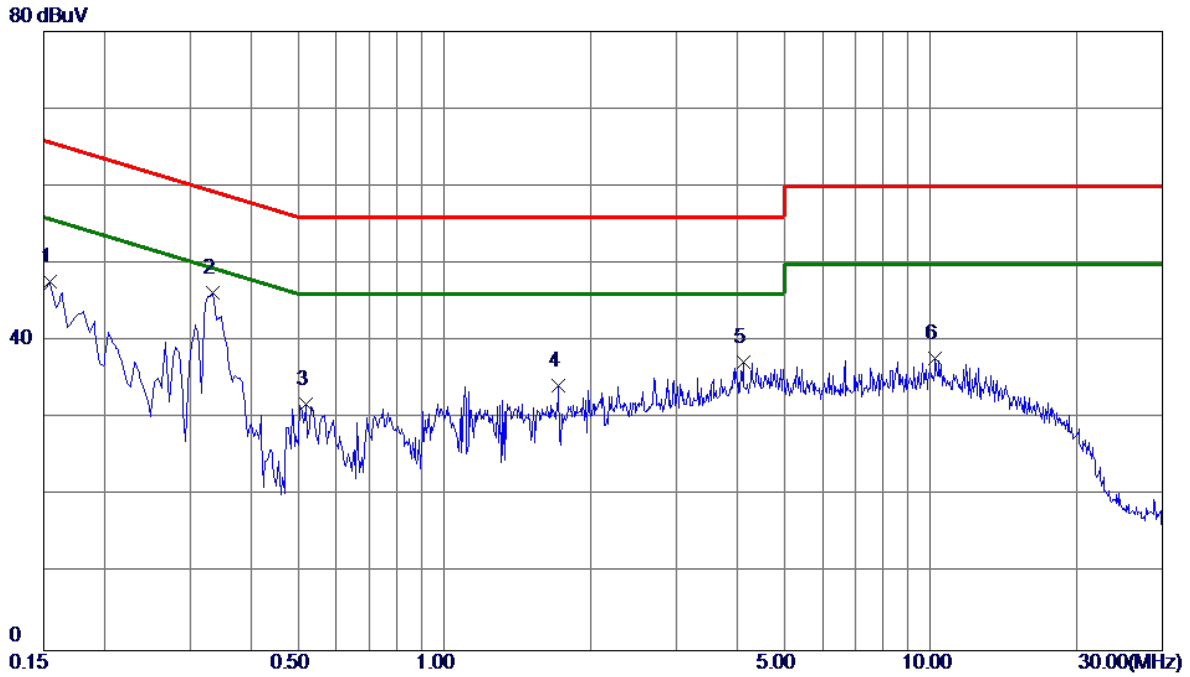


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	37.99	9.70	47.69	65.75	-18.06	Peak	
2 *	0.3345	36.29	9.90	46.19	59.34	-13.15	Peak	
3	0.5190	21.85	9.95	31.80	56.00	-24.20	Peak	
4	1.7205	24.14	10.06	34.20	56.00	-21.80	Peak	
5	4.1325	27.00	10.26	37.26	56.00	-18.74	Peak	
6	10.2345	27.06	10.71	37.77	60.00	-22.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 09

Neutral

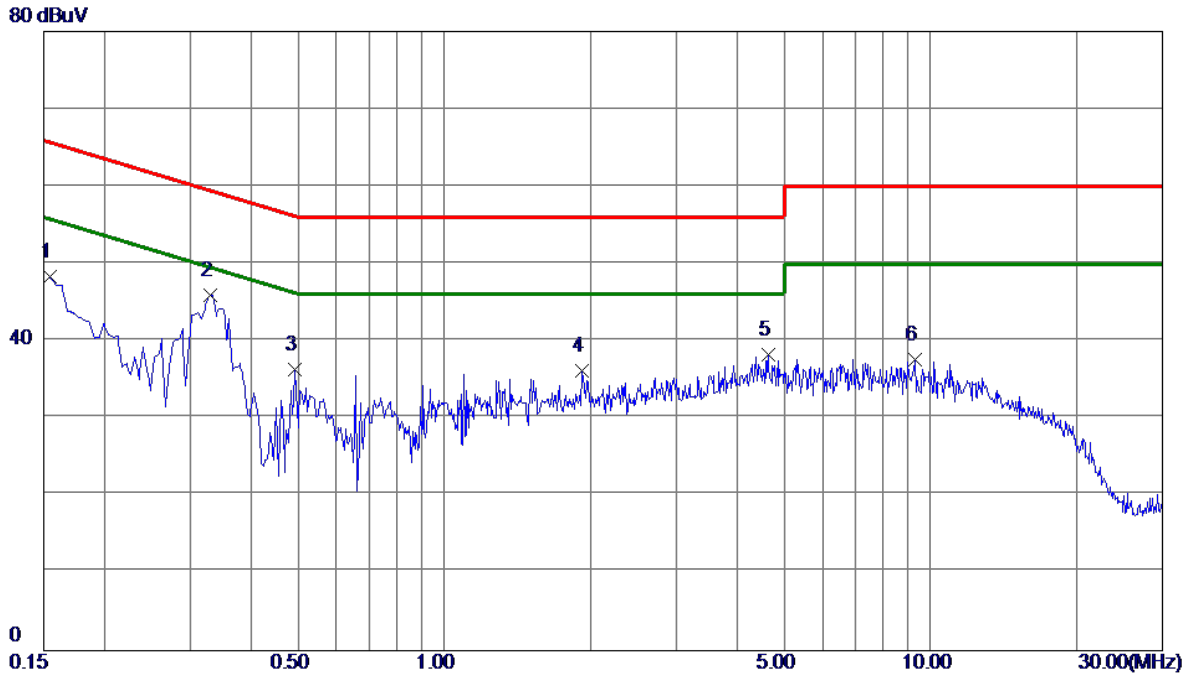


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	38.61	9.78	48.39	65.75	-17.36	Peak	
2 *	0.3300	35.87	10.04	45.91	59.45	-13.54	Peak	
3	0.4920	26.23	10.14	36.37	56.13	-19.76	Peak	
4	1.9230	25.81	10.41	36.22	56.00	-19.78	Peak	
5	4.6320	27.67	10.64	38.31	56.00	-17.69	Peak	
6	9.2715	26.65	11.01	37.66	60.00	-22.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX AX-20 Mode Channel 09

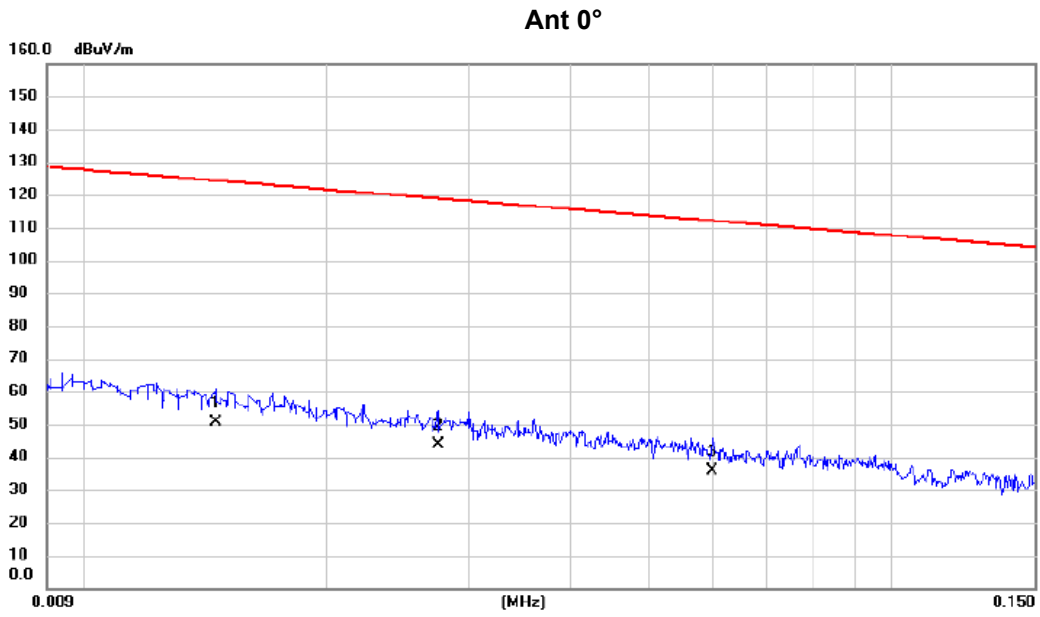


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.015	35.85	14.80	50.65	124.32	-73.67	AVG	
2		0.028	30.97	12.93	43.90	118.82	-74.92	AVG	
3		0.060	23.36	12.40	35.76	112.04	-76.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 09

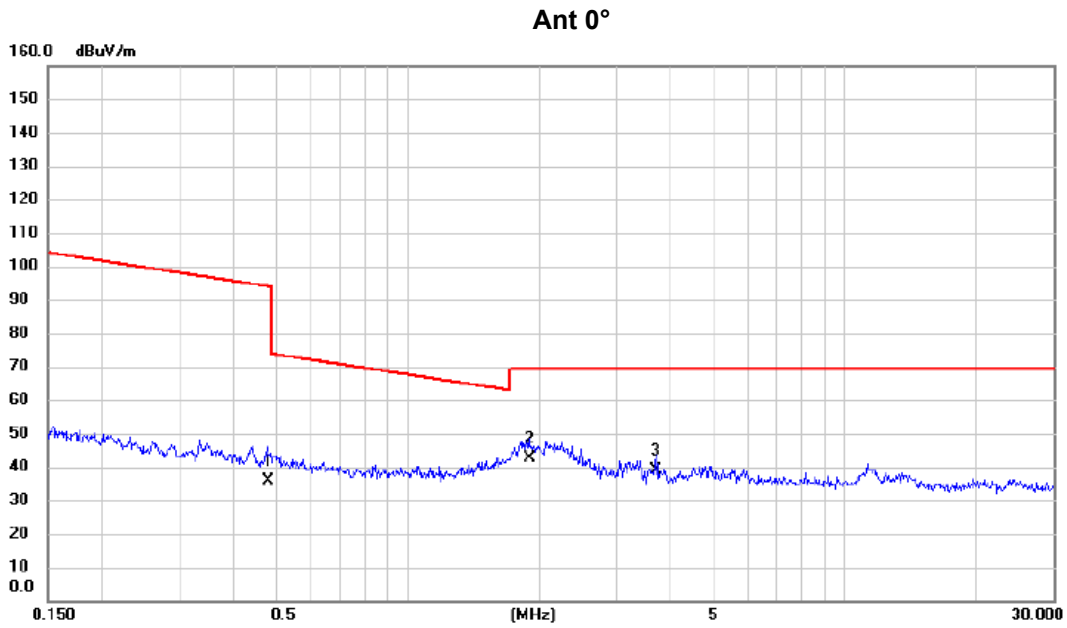


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.479	23.78	11.85	35.63	94.00	-58.37	AVG	
2	*	1.898	31.43	11.14	42.57	69.54	-26.97	QP	
3		3.700	28.26	10.58	38.84	69.54	-30.70	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 09

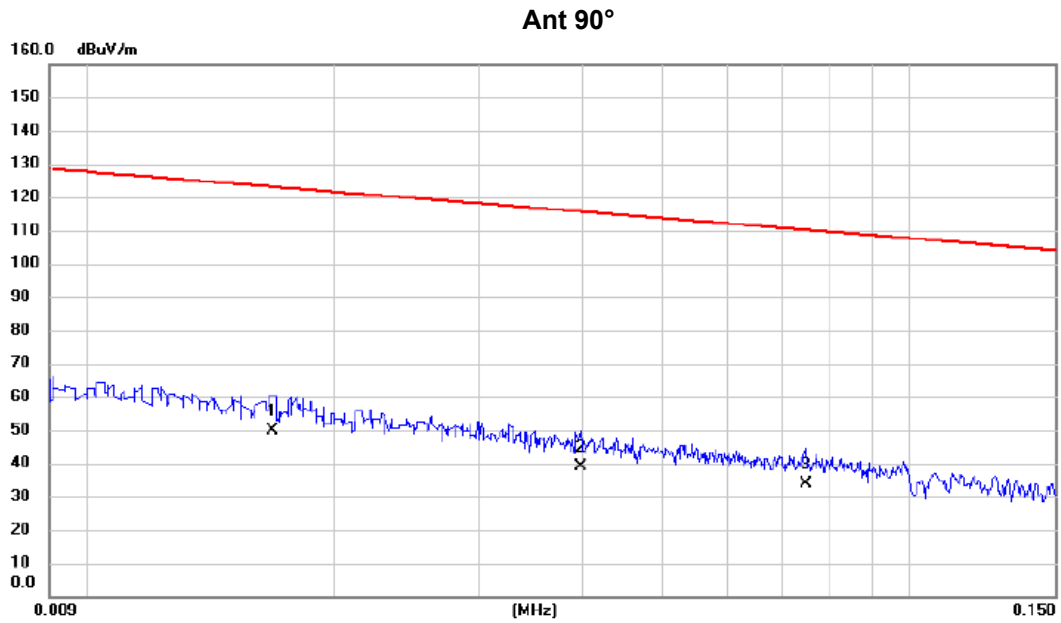


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.017	35.68	14.12	49.80	123.10	-73.30	AVG	
2		0.040	26.51	12.61	39.12	115.61	-76.49	AVG	
3		0.075	21.14	12.49	33.63	110.13	-76.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 09

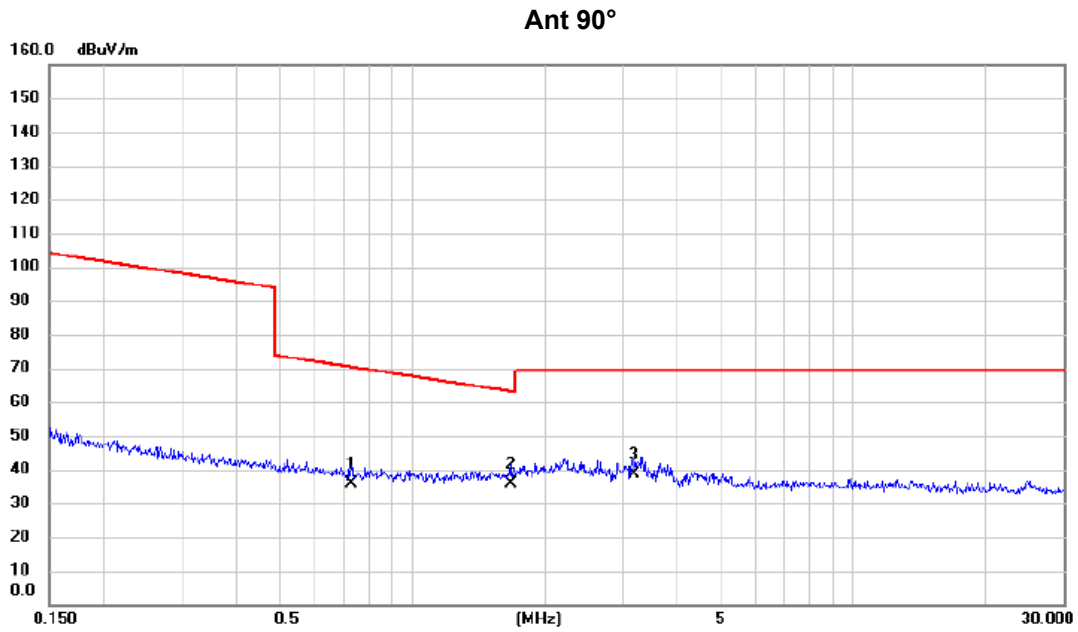

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.727	24.21	11.72	35.93	70.37	-34.44	QP	
2	*	1.671	24.73	11.27	36.00	63.14	-27.14	QP	
3		3.190	28.24	10.54	38.78	69.54	-30.76	QP	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX AX-20 Mode Channel 09

Vertical

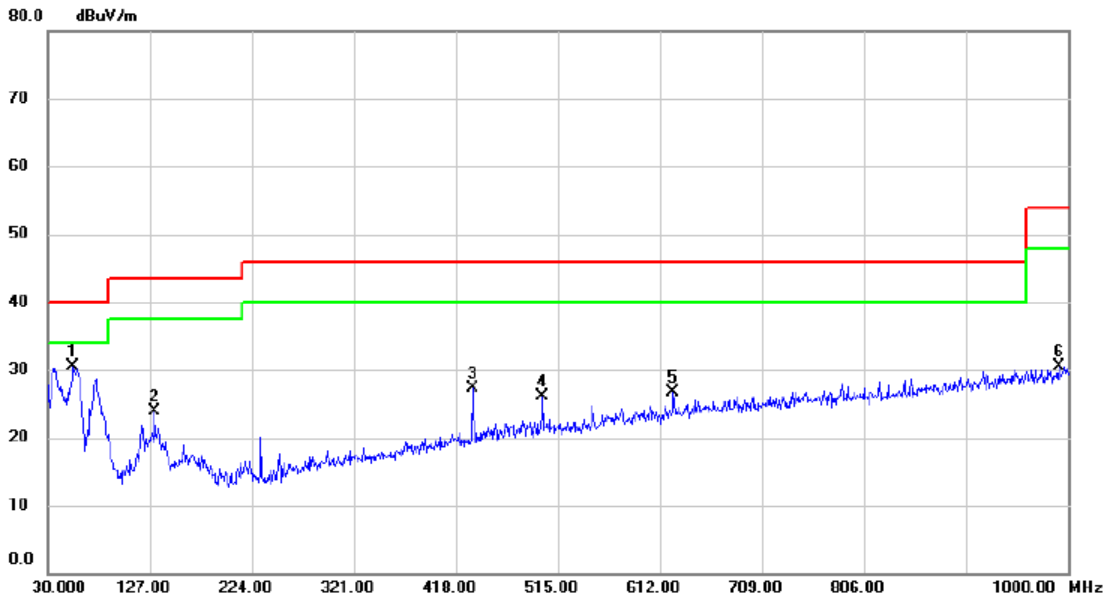


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	54.250	44.05	-13.61	30.44	40.00	-9.56	peak	
2		131.850	36.61	-12.71	23.90	43.50	-19.60	peak	
3		433.520	35.43	-8.09	27.34	46.00	-18.66	peak	
4		500.450	33.36	-7.27	26.09	46.00	-19.91	peak	
5		624.610	31.52	-4.82	26.70	46.00	-19.30	peak	
6		991.270	29.52	0.95	30.47	54.00	-23.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 09

Horizontal

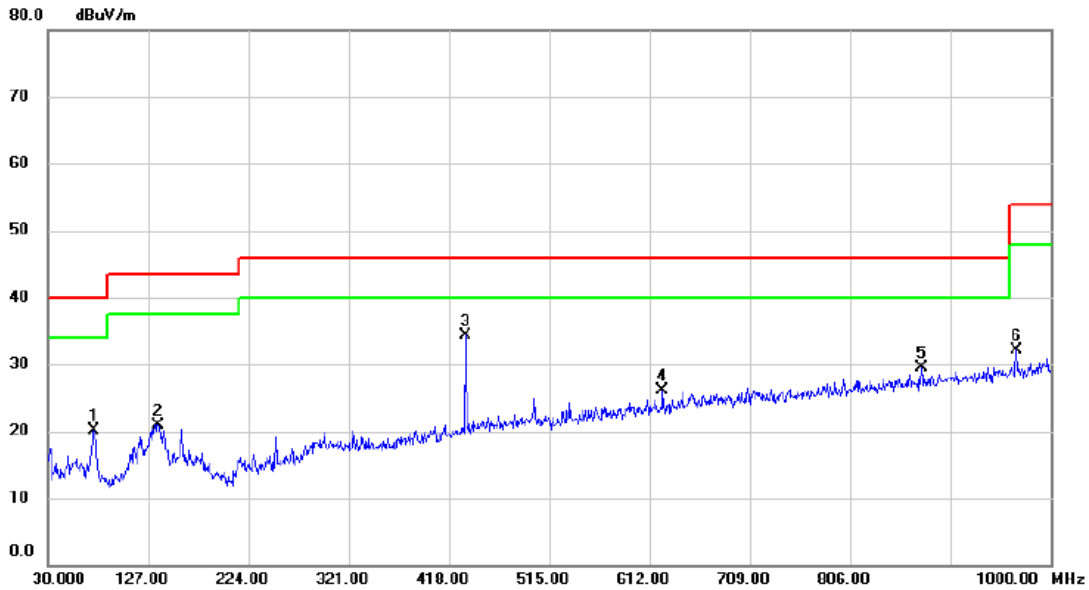

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		74.620	36.90	-16.77	20.13	40.00	-19.87	peak	
2		136.700	33.60	-12.62	20.98	43.50	-22.52	peak	
3	*	433.520	42.41	-8.09	34.32	46.00	-11.68	peak	
4		624.610	30.84	-4.82	26.02	46.00	-19.98	peak	
5		874.870	31.04	-1.45	29.59	46.00	-16.41	peak	
6		967.020	31.67	0.47	32.14	54.00	-21.86	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

SISO 1

Test Mode: TX B Mode 2412 MHz

Vertical

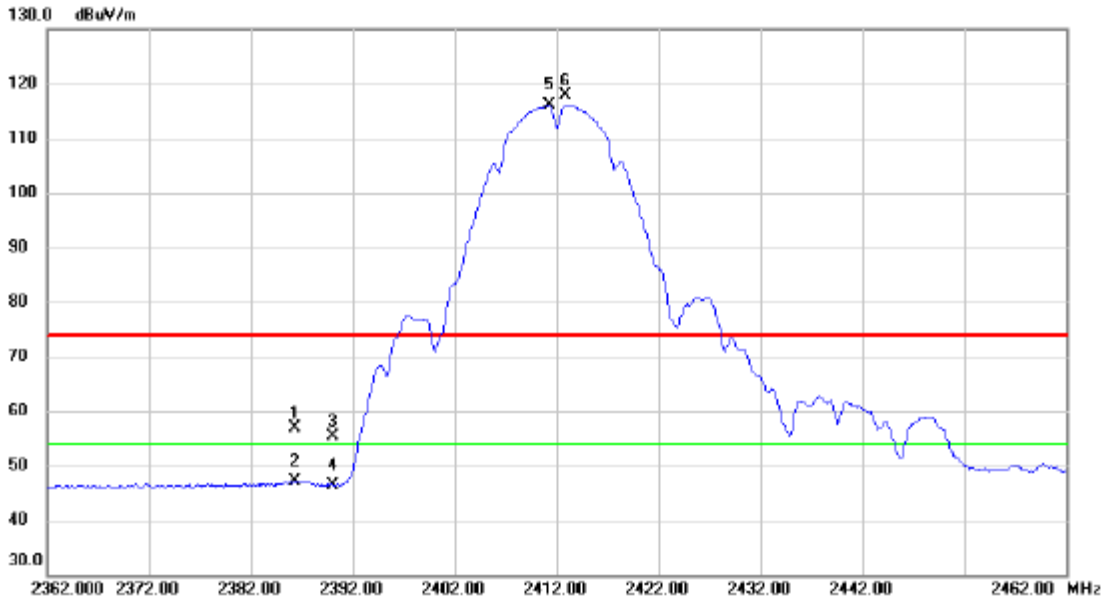


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.300	43.08	13.79	56.87	74.00	-17.13	peak	
2	2386.300	33.31	13.79	47.10	54.00	-6.90	AVG	
3	2390.000	41.53	13.81	55.34	74.00	-18.66	peak	
4	2390.000	32.68	13.81	46.49	54.00	-7.51	AVG	
5 *	2411.300	102.24	13.83	116.07	54.00	62.07	AVG	No Limit
6 X	2412.900	104.07	13.84	117.91	74.00	43.91	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

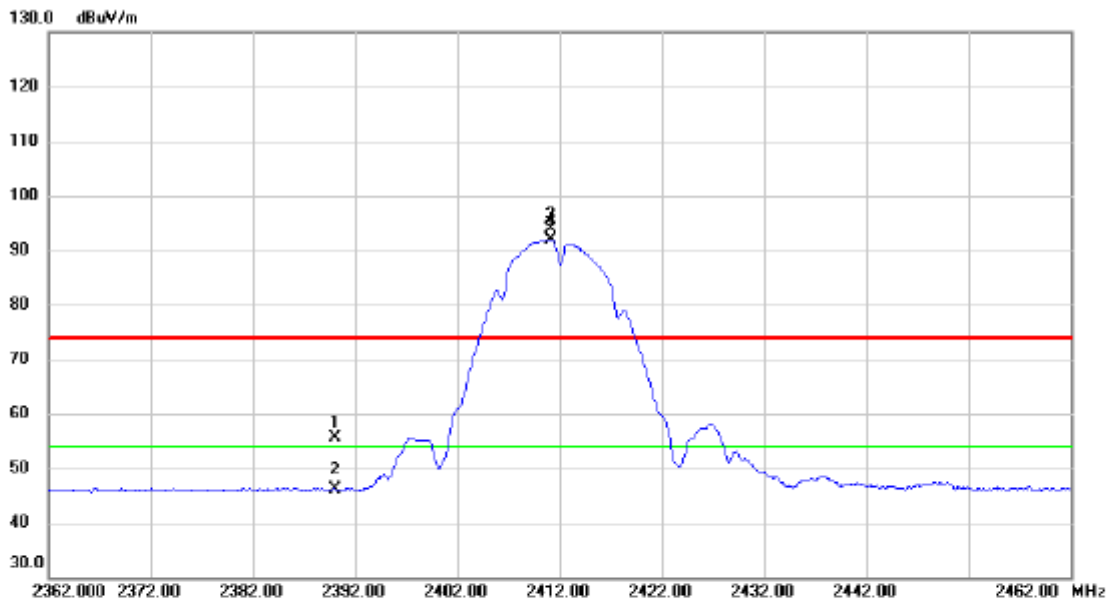

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.77	13.81	55.58	74.00	-18.42	peak	
2		2390.000	32.37	13.81	46.18	54.00	-7.82	AVG	
3	X	2411.200	80.01	13.83	93.84	74.00	19.84	peak	No Limit
4	*	2411.200	78.02	13.83	91.85	54.00	37.85	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

130 dBuV/m

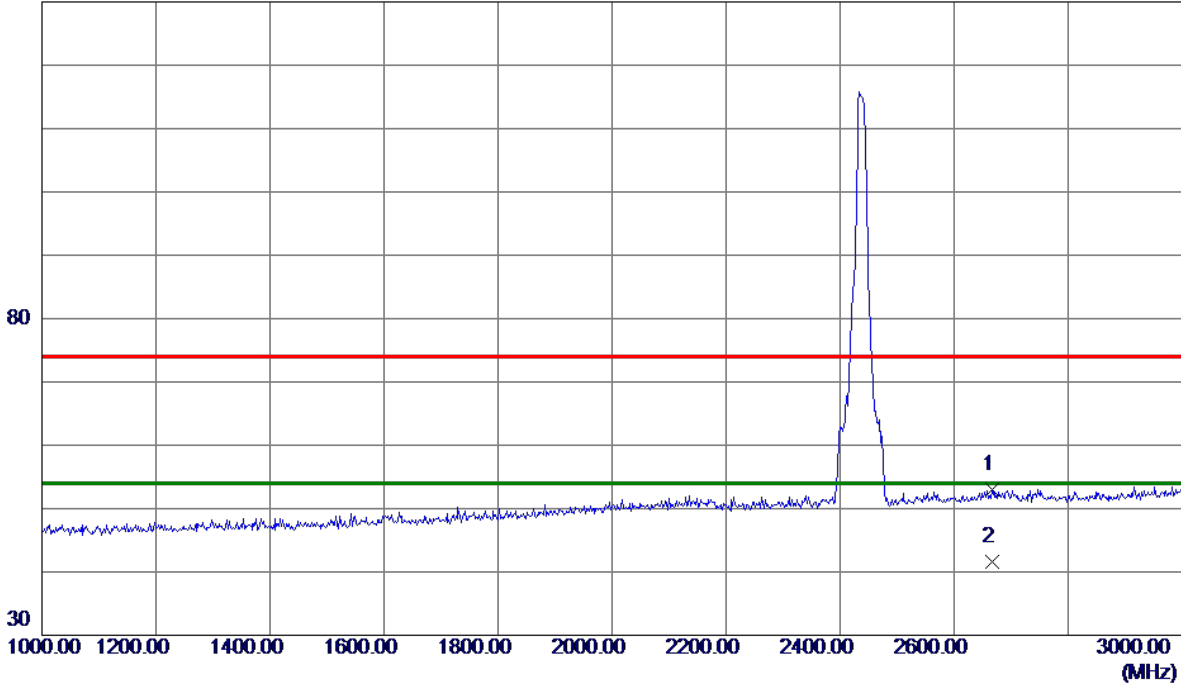

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2666.0000	43.93	9.10	53.03	74.00	-20.97	Peak	
2 *	2666.0000	32.47	9.10	41.57	54.00	-12.43	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

130 dBuV/m

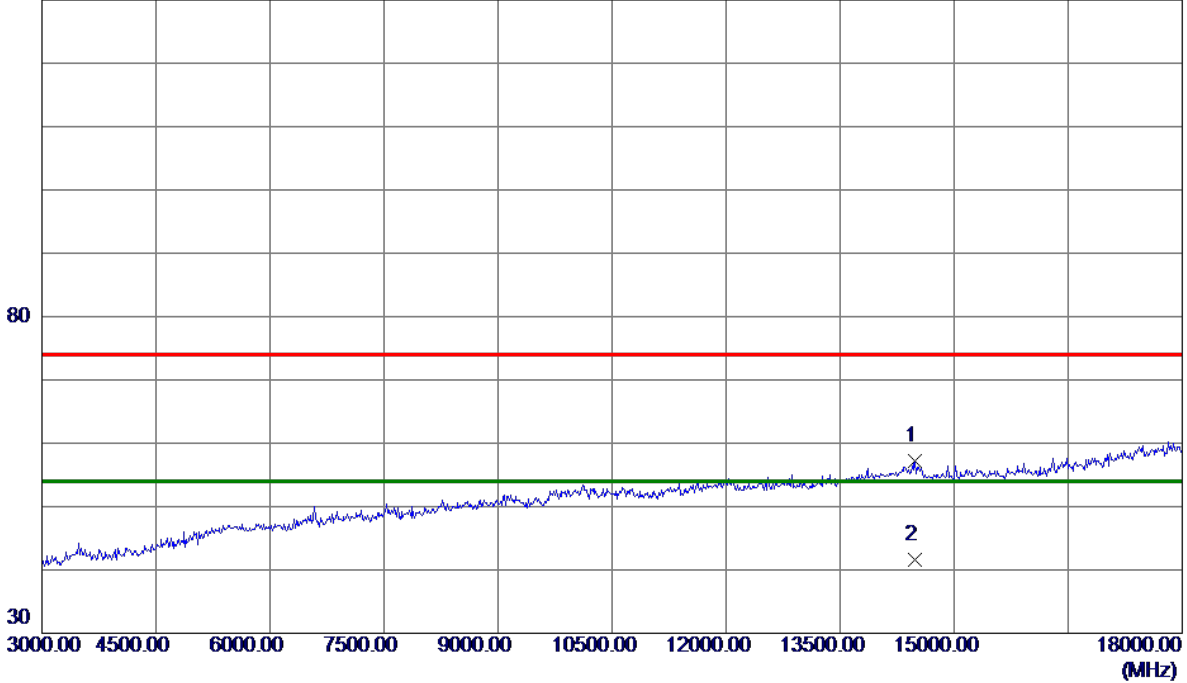

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14490.0000	38.02	19.10	57.12	74.00	-16.88	Peak	
2 *	14490.0000	22.57	19.10	41.67	54.00	-12.33	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

130 dBuV/m

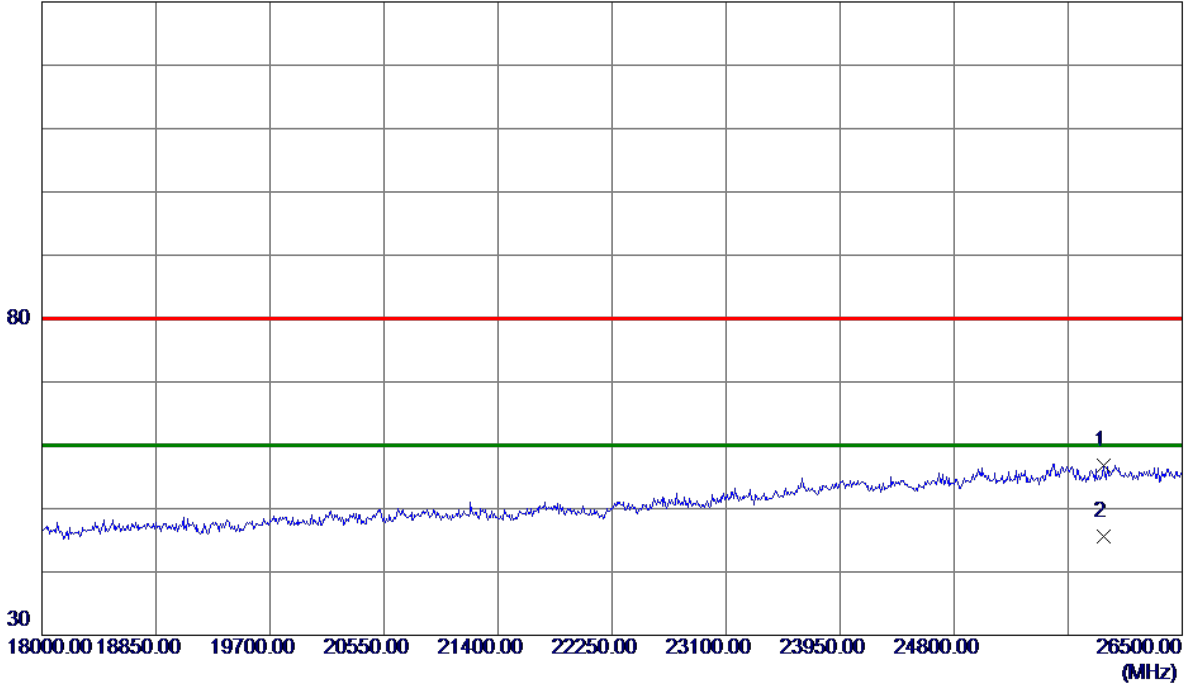


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25913.5000	26.47	30.35	56.82	80.00	-23.18	Peak	
2 *	25913.5000	15.33	30.35	45.68	60.00	-14.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

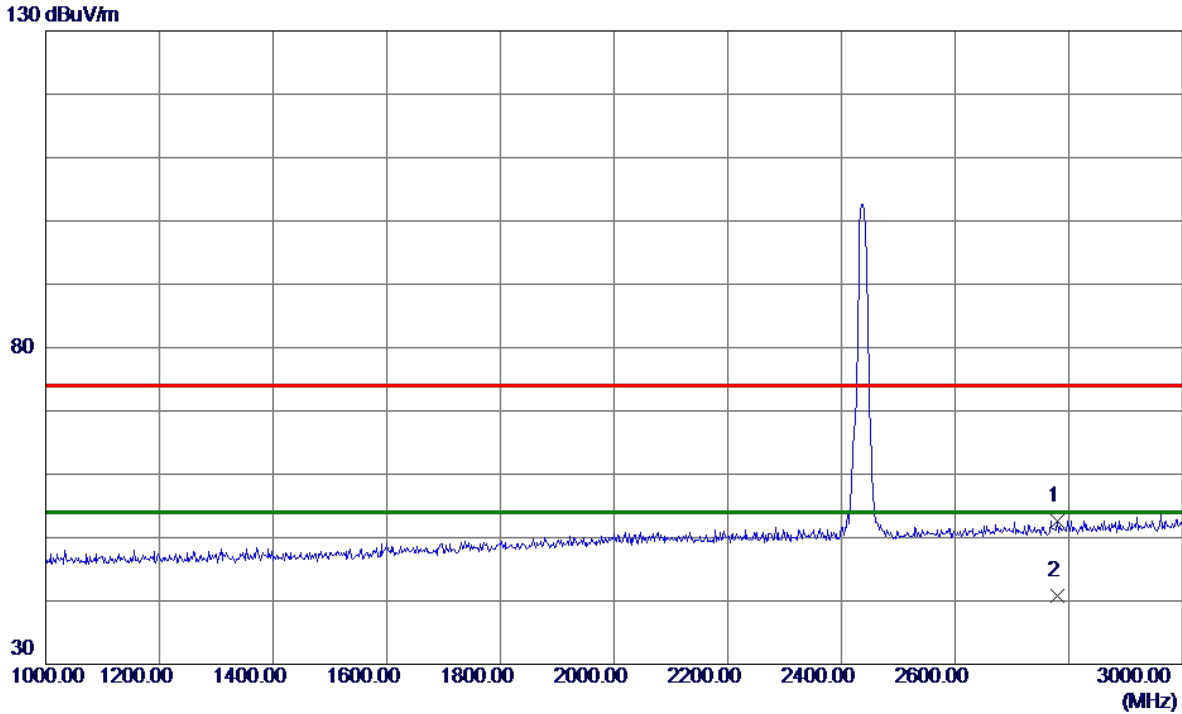

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2780.0000	43.04	9.58	52.62	74.00	-21.38	Peak	
2 *	2780.0000	31.24	9.58	40.82	54.00	-13.18	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

130 dBuV/m

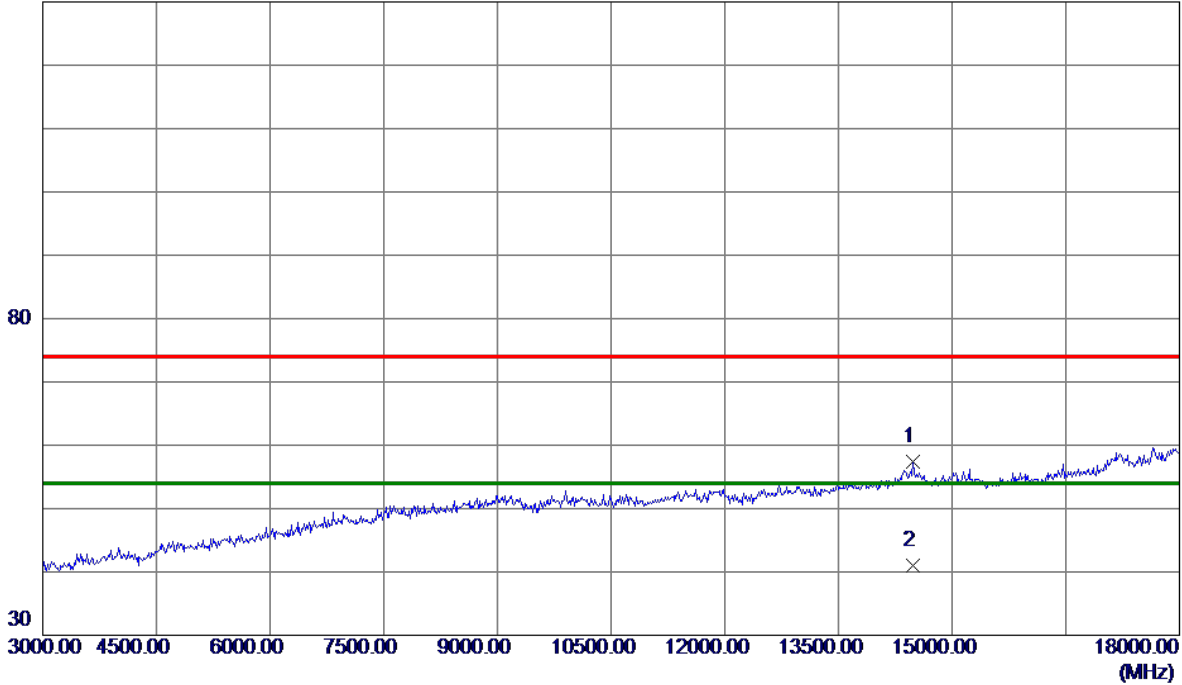

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14490.0000	38.25	19.10	57.35	74.00	-16.65	Peak	
2 *	14490.0000	21.87	19.10	40.97	54.00	-13.03	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

130 dBuV/m

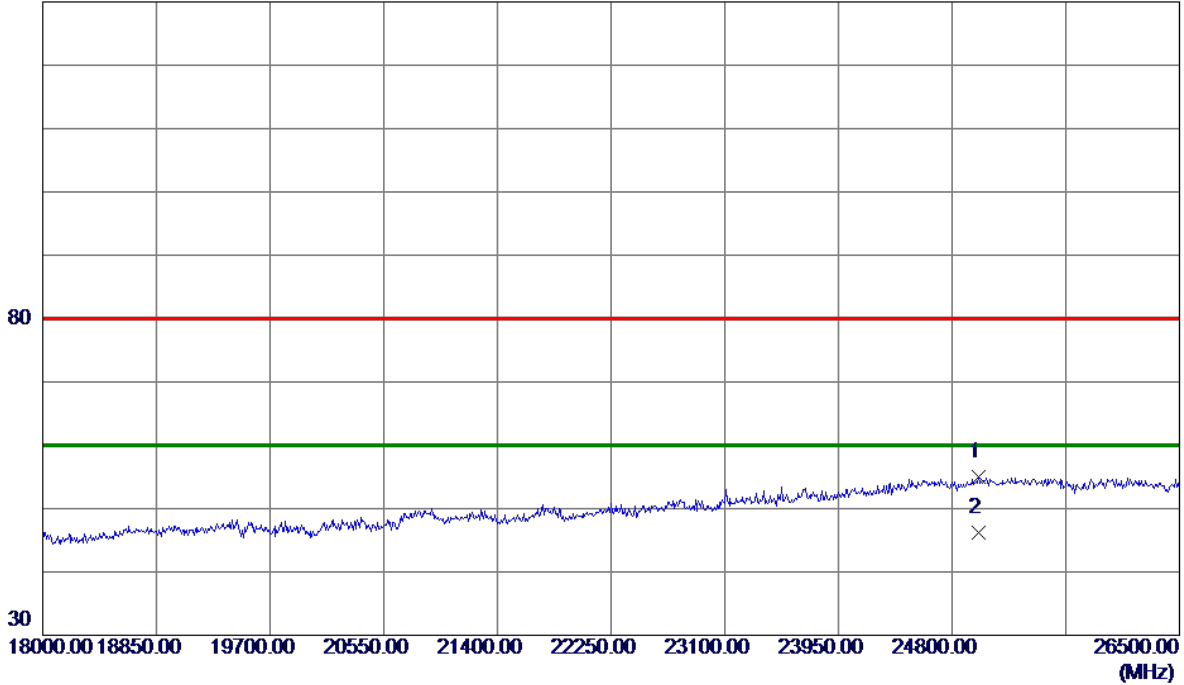


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	24995.5000	24.50	30.52	55.02	80.00	-24.98	Peak	
2 *	24995.5000	15.65	30.52	46.17	60.00	-13.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical

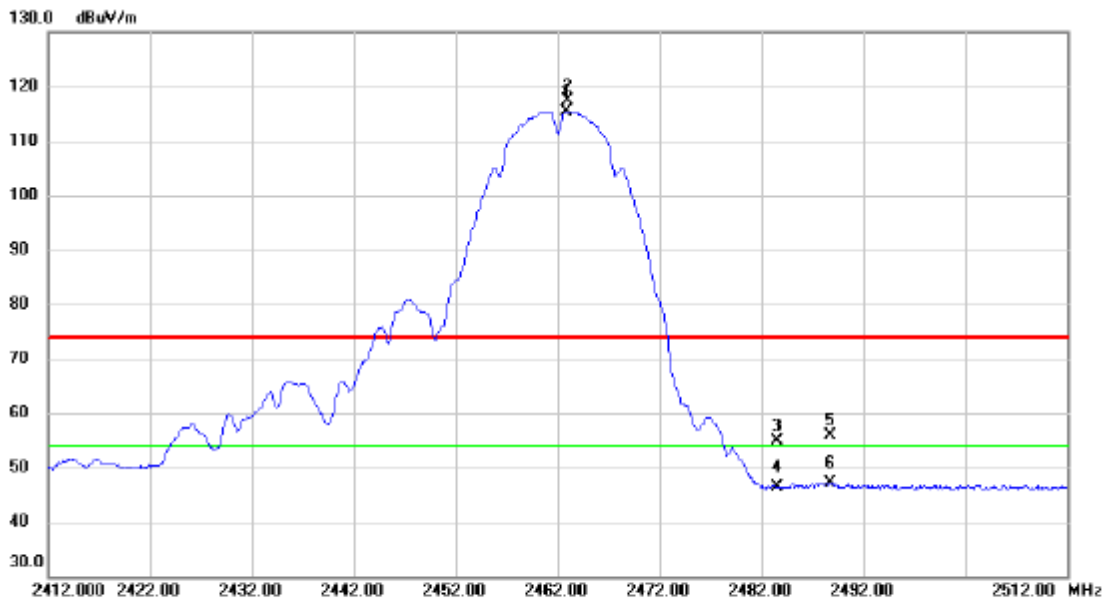


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2462.900	101.57	13.90	115.47	54.00	61.47	AVG	No Limit
2	X	2463.000	103.45	13.90	117.35	74.00	43.35	peak	No Limit
3		2483.500	41.07	13.93	55.00	74.00	-19.00	peak	
4		2483.500	32.41	13.93	46.34	54.00	-7.66	AVG	
5		2488.700	41.95	13.93	55.88	74.00	-18.12	peak	
6		2488.700	33.31	13.93	47.24	54.00	-6.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal

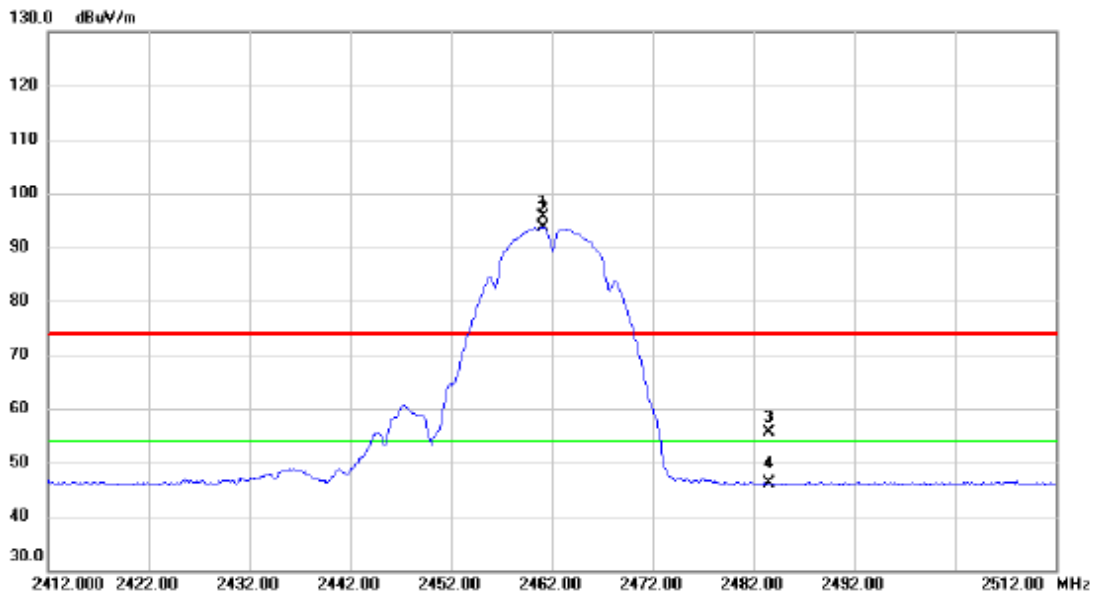


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2461.200	81.74	13.89	95.63	74.00	21.63	peak	No Limit
2	*	2461.200	79.78	13.89	93.67	54.00	39.67	AVG	No Limit
3		2483.500	41.68	13.93	55.61	74.00	-18.39	peak	
4		2483.500	32.14	13.93	46.07	54.00	-7.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

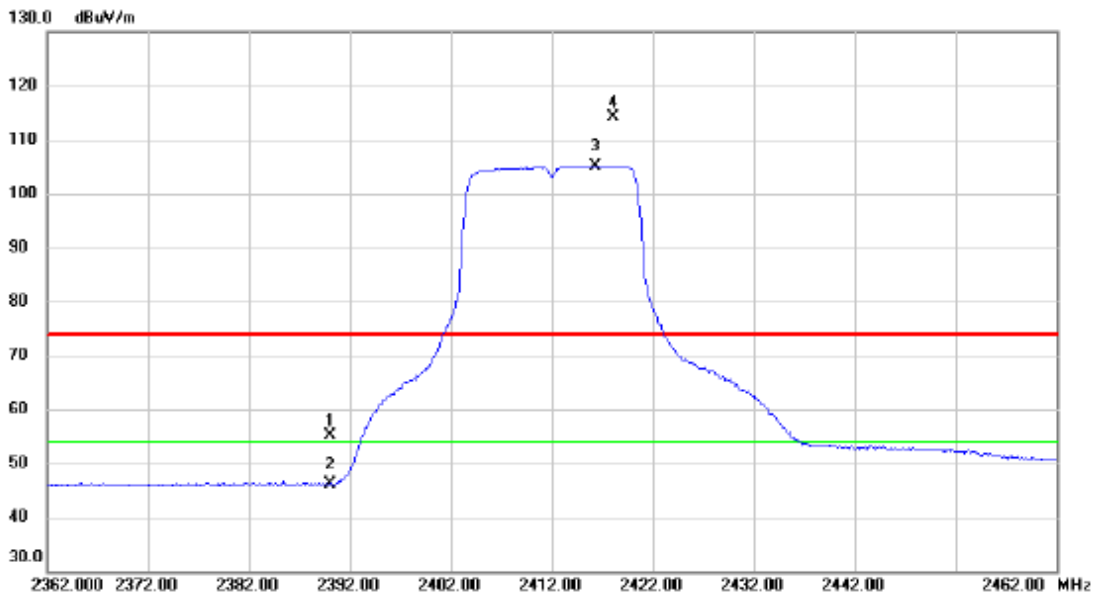


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.24	13.81	55.05	74.00	-18.95	peak	
2		2390.000	32.31	13.81	46.12	54.00	-7.88	AVG	
3	*	2416.300	91.18	13.84	105.02	54.00	51.02	AVG	No Limit
4	X	2418.000	100.18	13.84	114.02	74.00	40.02	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

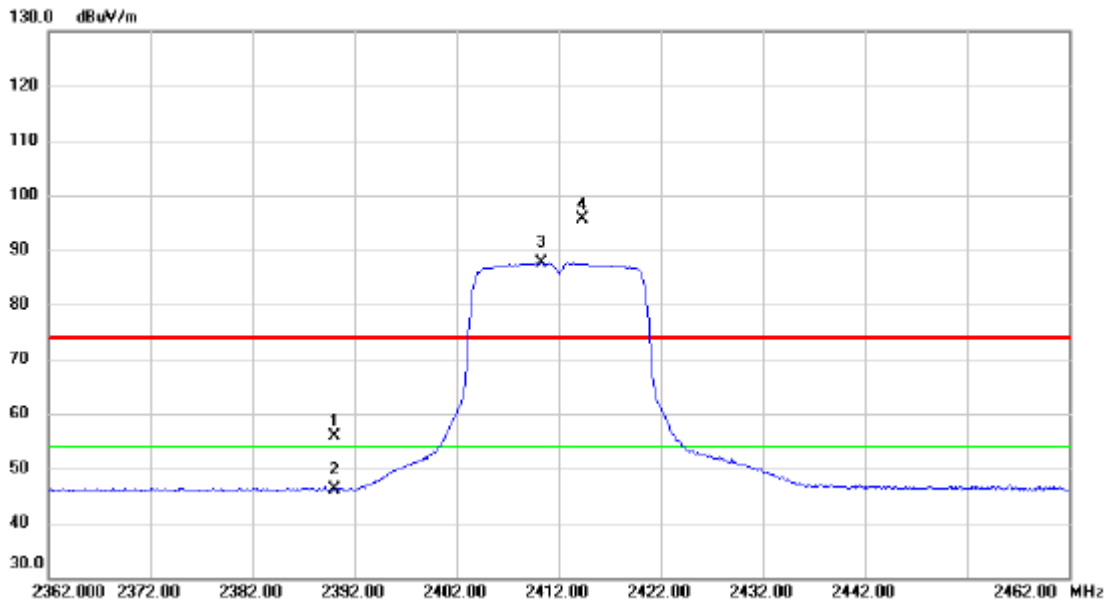


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.08	13.81	55.89	74.00	-18.11	peak	
2		2390.000	32.32	13.81	46.13	54.00	-7.87	AVG	
3	*	2410.300	73.74	13.82	87.56	54.00	33.56	AVG	No Limit
4	X	2414.300	81.91	13.84	95.75	74.00	21.75	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2417 MHz

Vertical

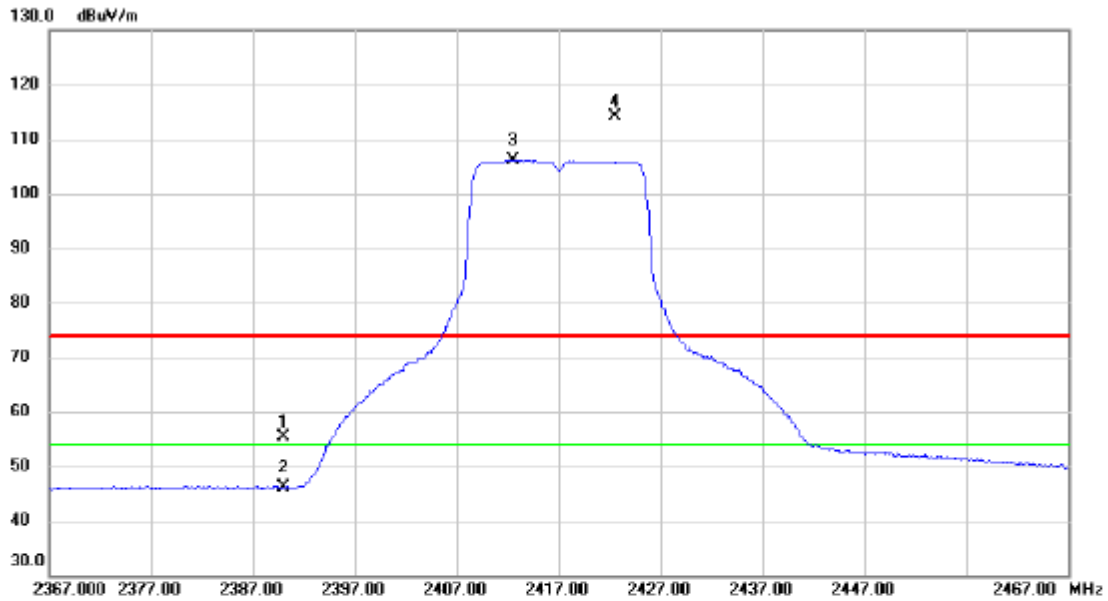


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.62	13.81	55.43	74.00	-18.57	peak	
2		2390.000	32.21	13.81	46.02	54.00	-7.98	AVG	
3	*	2412.500	92.35	13.84	106.19	54.00	52.19	AVG	No Limit
4	X	2422.500	100.32	13.85	114.17	74.00	40.17	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2417 MHz

Horizontal

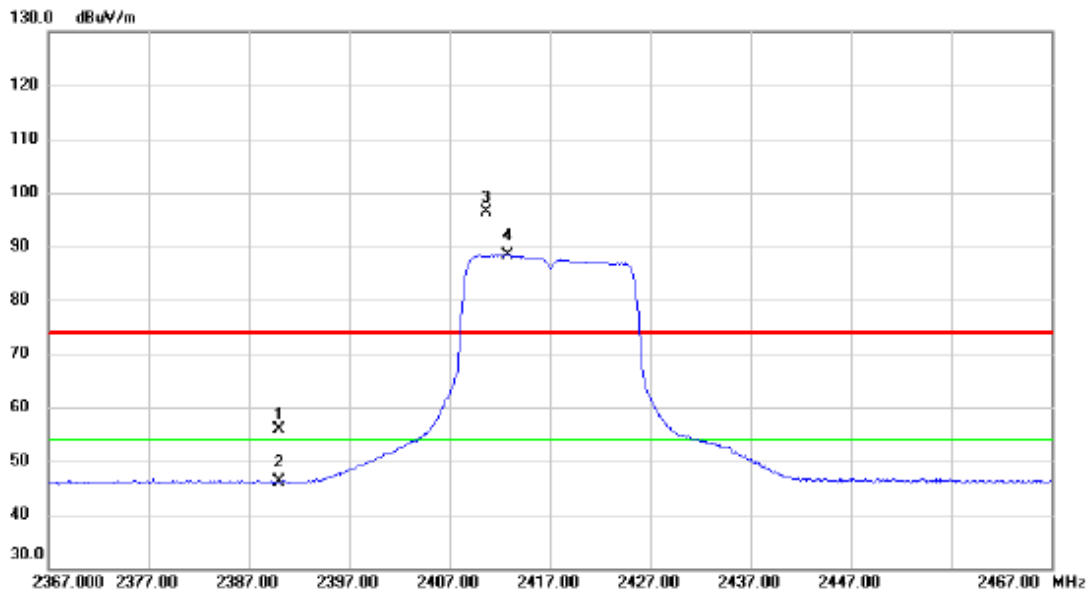


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.18	13.81	55.99	74.00	-18.01	peak	
2		2390.000	32.43	13.81	46.24	54.00	-7.76	AVG	
3	X	2410.700	82.46	13.82	96.28	74.00	22.28	peak	No Limit
4	*	2412.800	74.66	13.84	88.50	54.00	34.50	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2422 MHz

Vertical

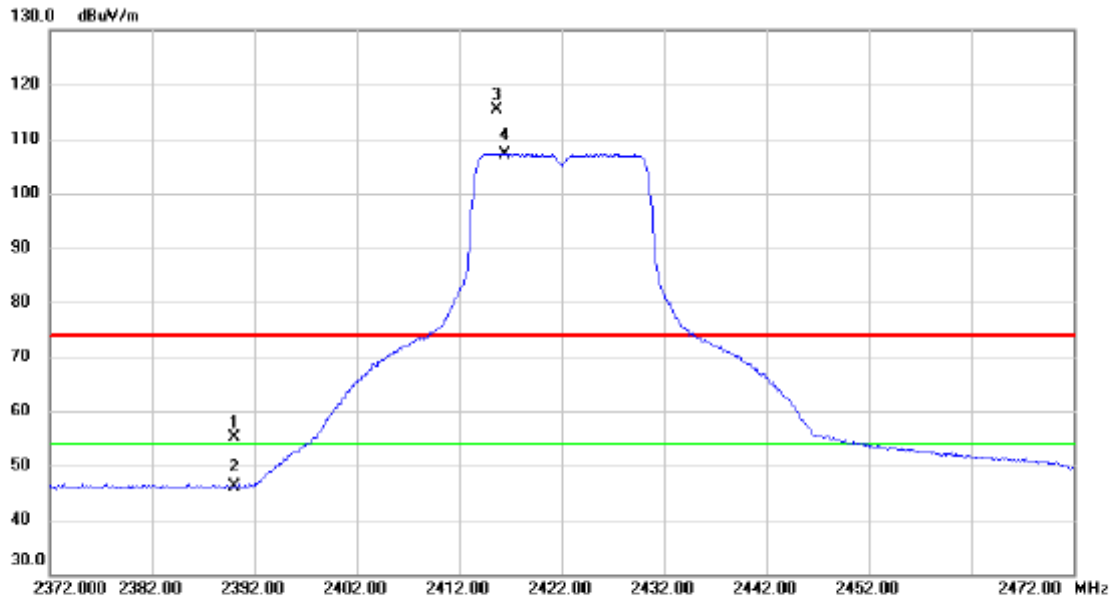


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.31	13.81	55.12	74.00	-18.88	peak	
2		2390.000	32.25	13.81	46.06	54.00	-7.94	AVG	
3	X	2415.700	101.60	13.84	115.44	74.00	41.44	peak	No Limit
4	*	2416.400	93.37	13.84	107.21	54.00	53.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2422 MHz

Horizontal

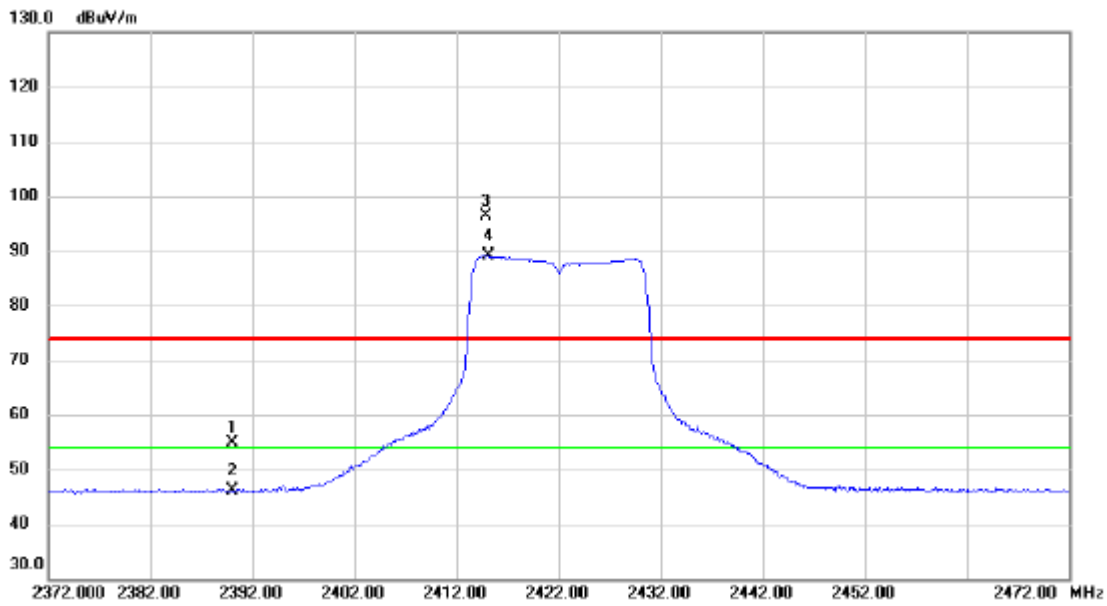


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.14	13.81	54.95	74.00	-19.05	peak	
2		2390.000	32.25	13.81	46.06	54.00	-7.94	AVG	
3	X	2414.800	82.48	13.84	96.32	74.00	22.32	peak	No Limit
4	*	2415.100	75.25	13.84	89.09	54.00	35.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2427 MHz

Vertical

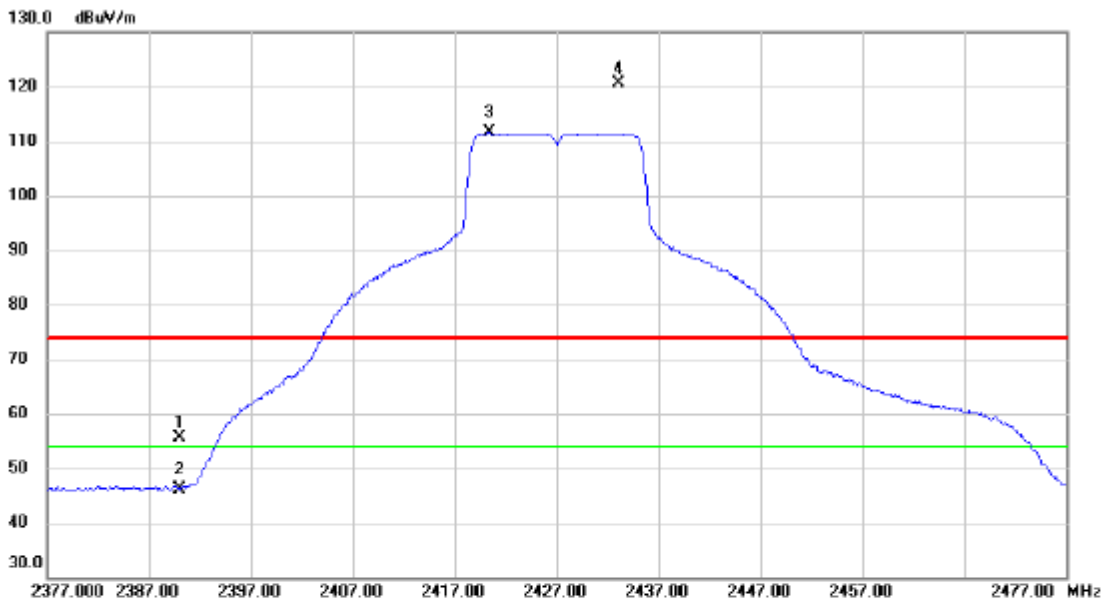


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.90	13.81	55.71	74.00	-18.29	peak	
2		2390.000	32.43	13.81	46.24	54.00	-7.76	AVG	
3	*	2420.400	97.72	13.84	111.56	54.00	57.56	AVG	No Limit
4	X	2433.100	106.68	13.86	120.54	74.00	46.54	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2427 MHz

Horizontal

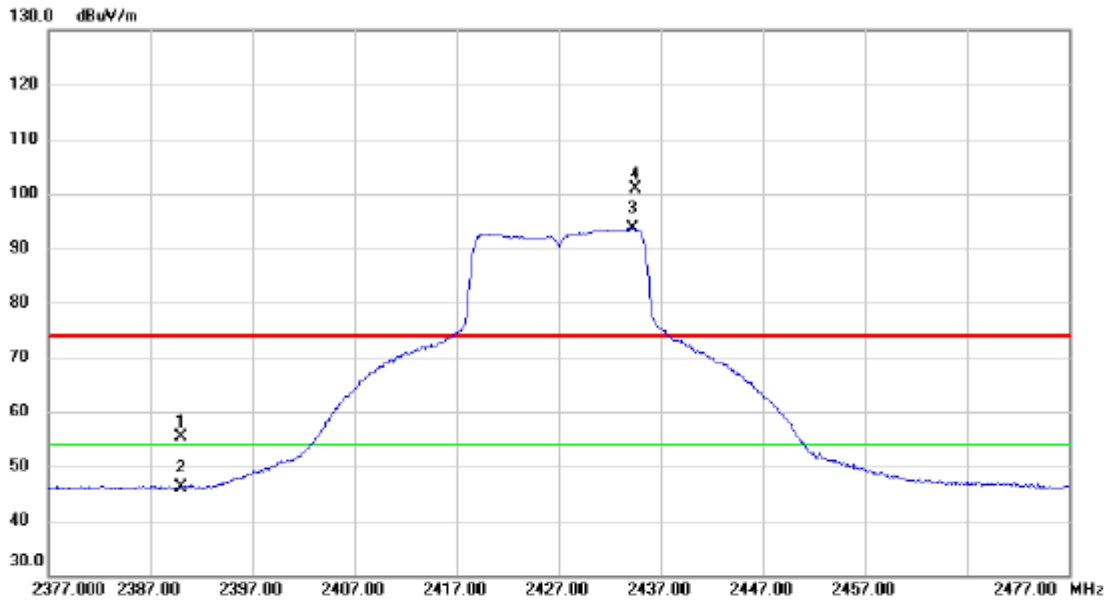


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.63	13.81	55.44	74.00	-18.56	peak	
2		2390.000	32.25	13.81	46.06	54.00	-7.94	AVG	
3	*	2434.300	79.73	13.86	93.59	54.00	39.59	AVG	No Limit
4	X	2434.600	87.00	13.86	100.86	74.00	26.86	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

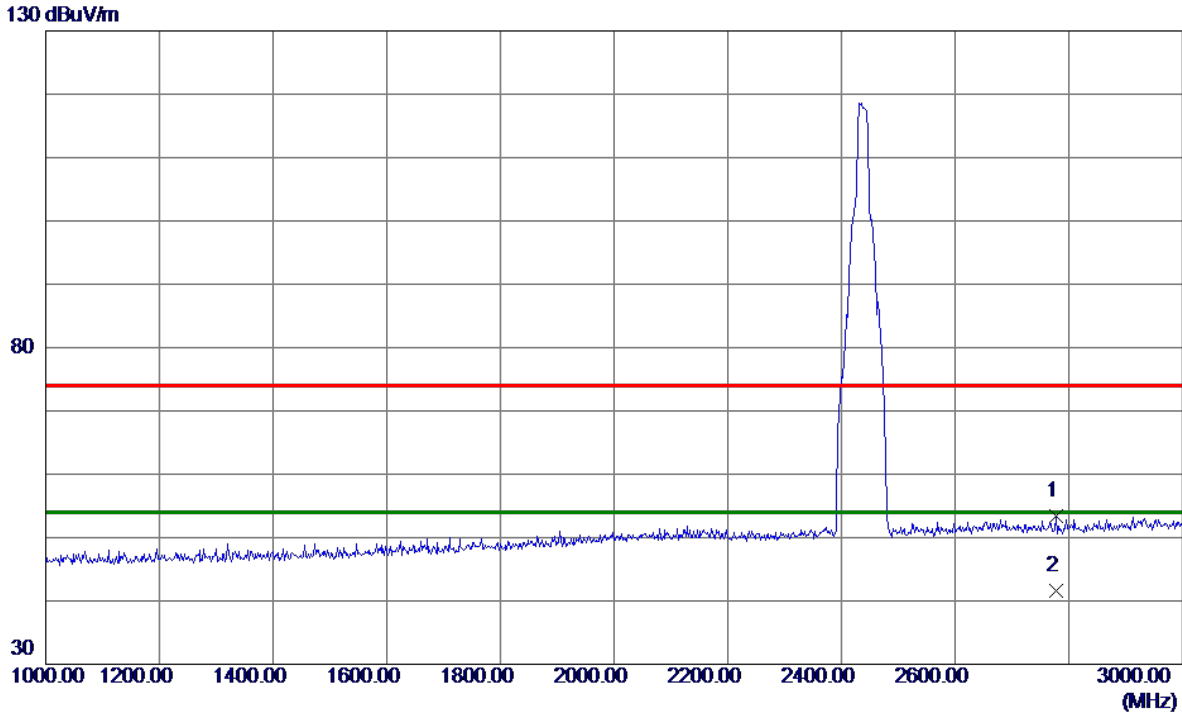

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2778.0000	43.88	9.58	53.46	74.00	-20.54	Peak	
2 *	2778.0000	31.96	9.58	41.54	54.00	-12.46	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

130 dBuV/m

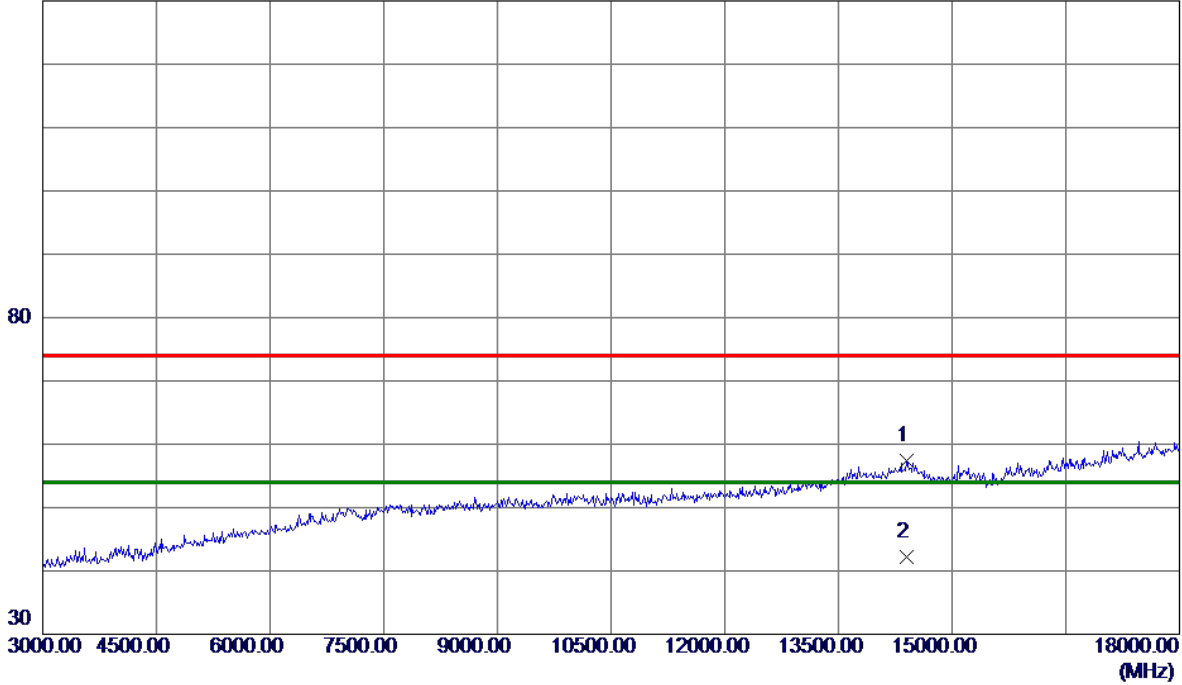

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14400.0000	38.31	19.13	57.44	74.00	-16.56	Peak	
2 *	14400.0000	23.16	19.13	42.29	54.00	-11.71	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

130 dBuV/m

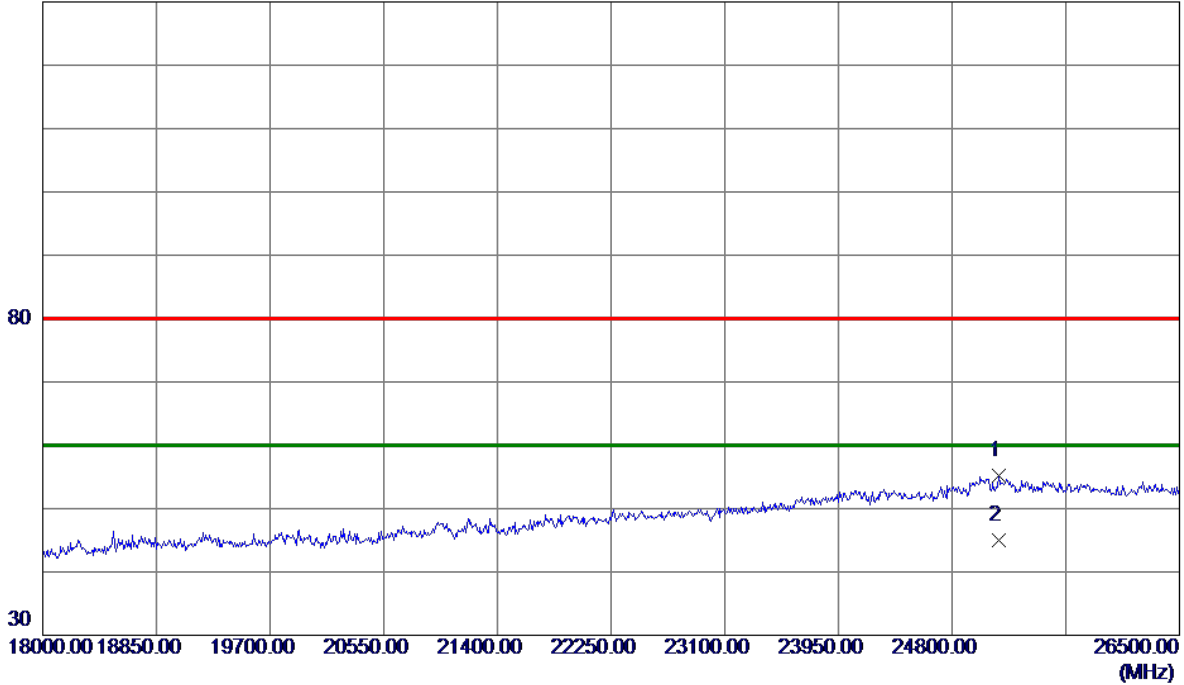

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25148.5000	24.76	30.39	55.15	80.00	-24.85	Peak	
2 *	25148.5000	14.67	30.39	45.06	60.00	-14.94	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

130 dBuV/m

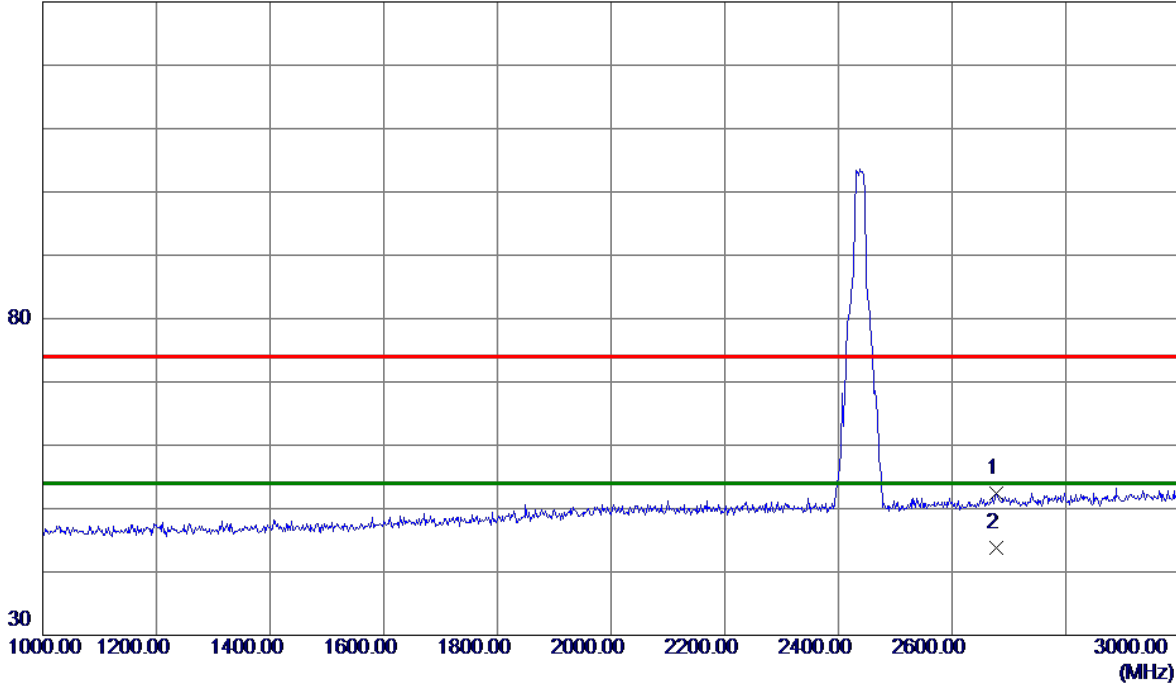

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2678.0000	43.23	9.15	52.38	74.00	-21.62	Peak	
2 *	2678.0000	34.58	9.15	43.73	54.00	-10.27	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

130 dBuV/m

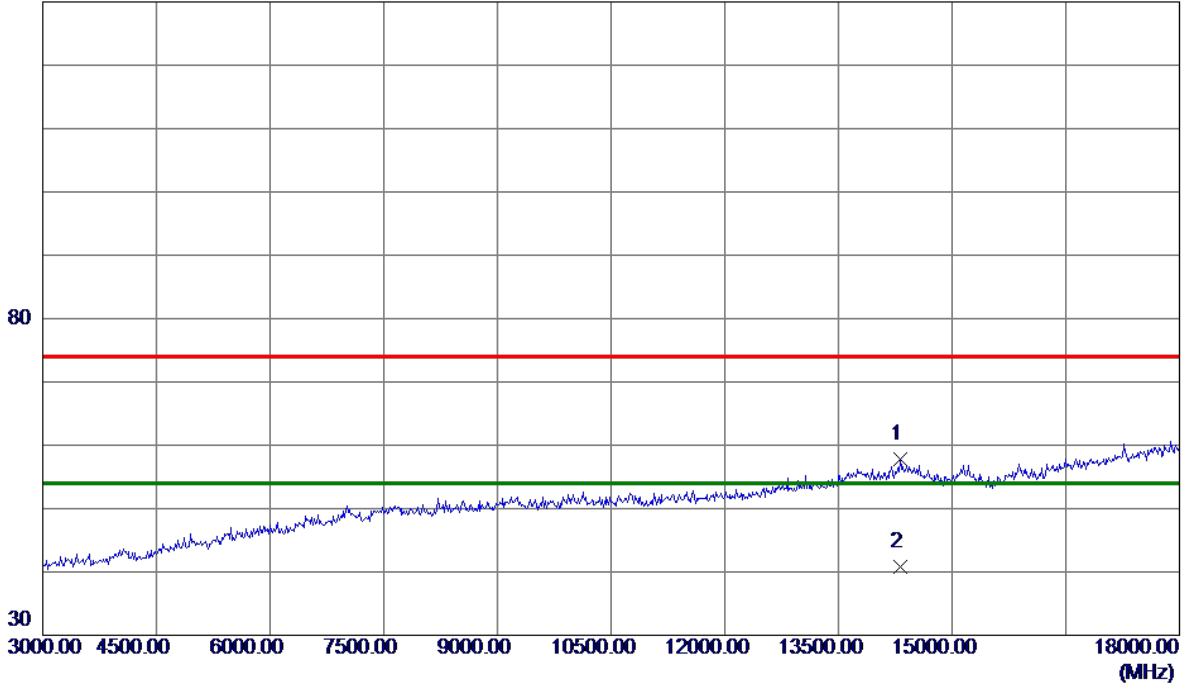

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14310.0000	38.63	19.16	57.79	74.00	-16.21	Peak	
2 *	14310.0000	21.67	19.16	40.83	54.00	-13.17	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

130 dBuV/m

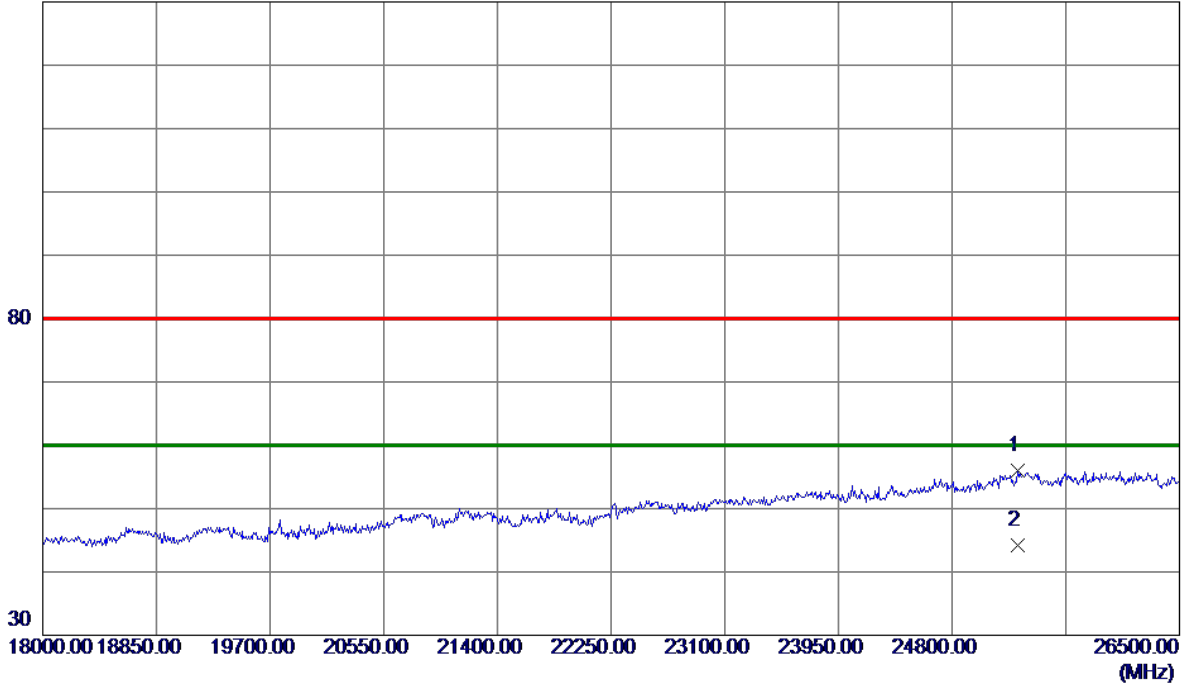


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25293.0000	25.67	30.26	55.93	80.00	-24.07	Peak	
2 *	25293.0000	14.03	30.26	44.29	60.00	-15.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2452 MHz

Vertical

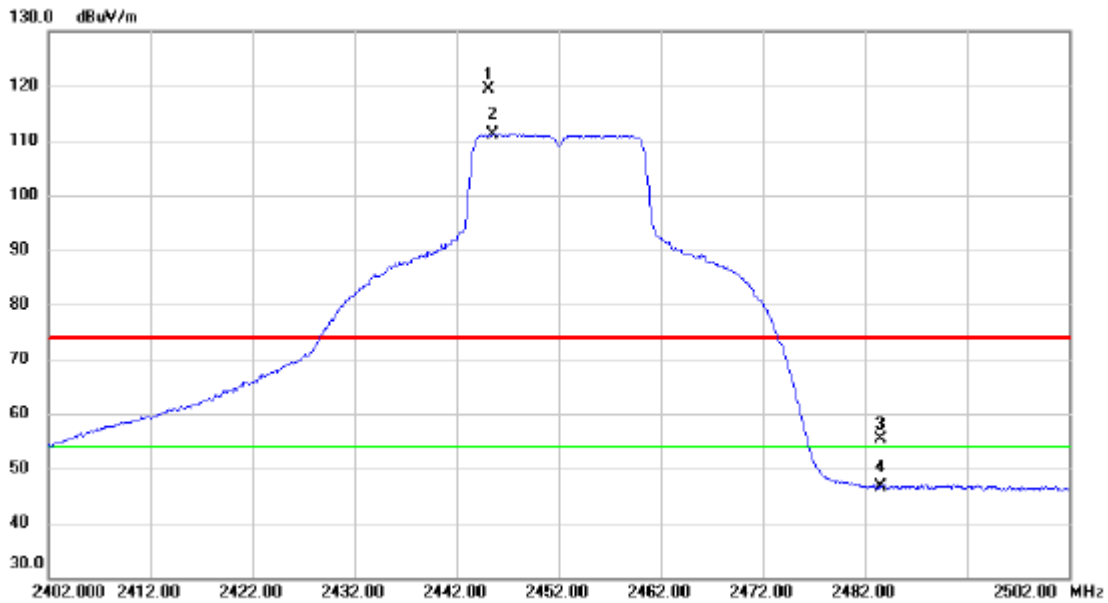


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2445.100	105.52	13.87	119.39	74.00	45.39	peak	No Limit
2	*	2445.600	97.32	13.87	111.19	54.00	57.19	AVG	No Limit
3		2483.500	41.42	13.93	55.35	74.00	-18.65	peak	
4		2483.500	32.62	13.93	46.55	54.00	-7.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2452 MHz

Horizontal

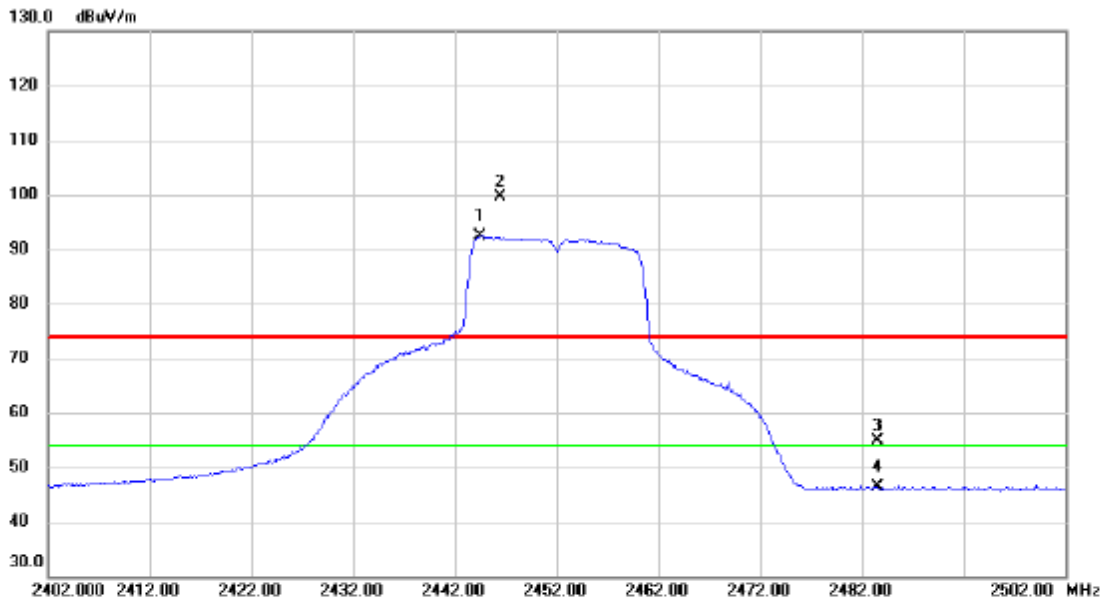


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.500	78.52	13.87	92.39	54.00	38.39	AVG	No Limit
2	X	2446.500	85.86	13.88	99.74	74.00	25.74	peak	No Limit
3		2483.500	41.03	13.93	54.96	74.00	-19.04	peak	
4		2483.500	32.36	13.93	46.29	54.00	-7.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2457 MHz

Vertical

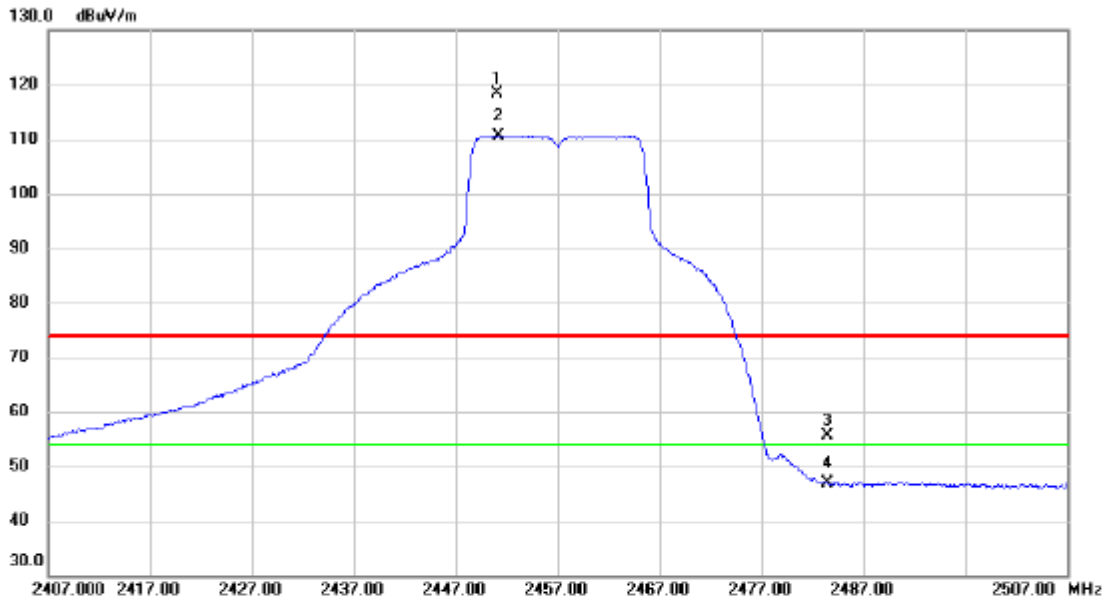


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2451.100	104.57	13.88	118.45	74.00	44.45	peak	No Limit
2	*	2451.200	96.79	13.88	110.67	54.00	56.67	AVG	No Limit
3		2483.500	41.82	13.93	55.75	74.00	-18.25	peak	
4		2483.500	32.90	13.93	46.83	54.00	-7.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2457 MHz

Horizontal

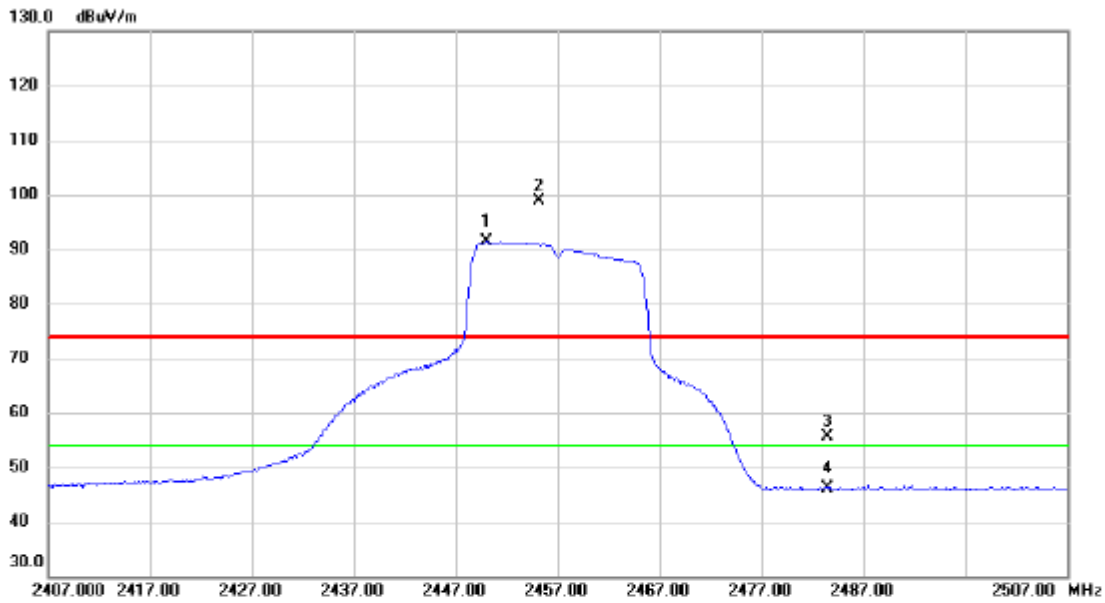

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2450.000	77.48	13.88	91.36	54.00	37.36	AVG	No Limit
2	X	2455.200	84.88	13.89	98.77	74.00	24.77	peak	No Limit
3		2483.500	41.70	13.93	55.63	74.00	-18.37	peak	
4		2483.500	32.08	13.93	46.01	54.00	-7.99	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

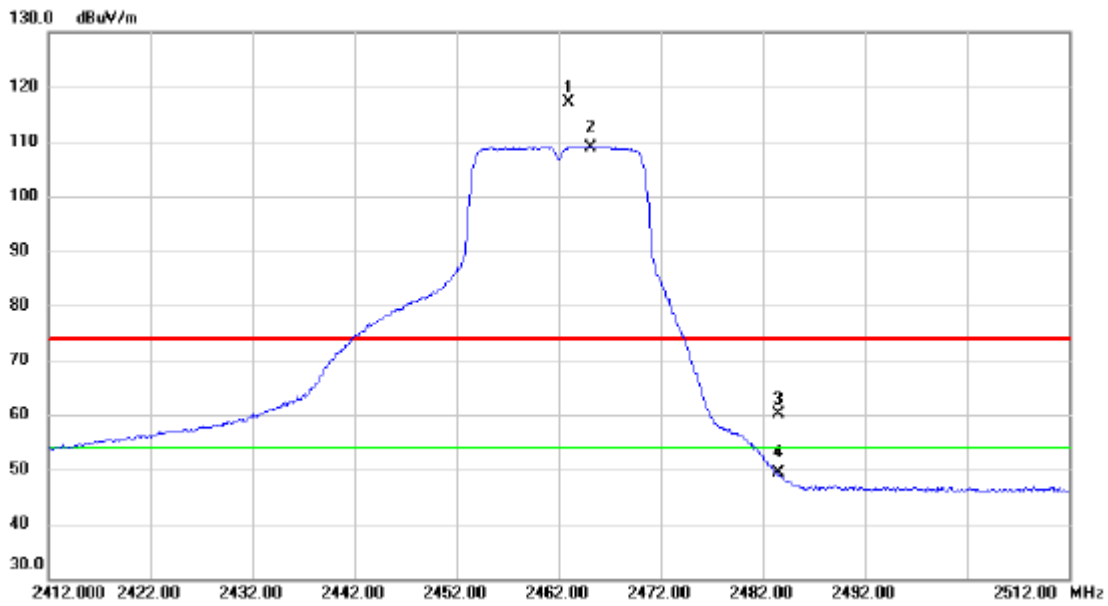


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.000	103.22	13.90	117.12	74.00	43.12	peak	No Limit
2	*	2465.100	95.10	13.90	109.00	54.00	55.00	AVG	No Limit
3		2483.500	46.10	13.93	60.03	74.00	-13.97	peak	
4		2483.500	35.54	13.93	49.47	54.00	-4.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

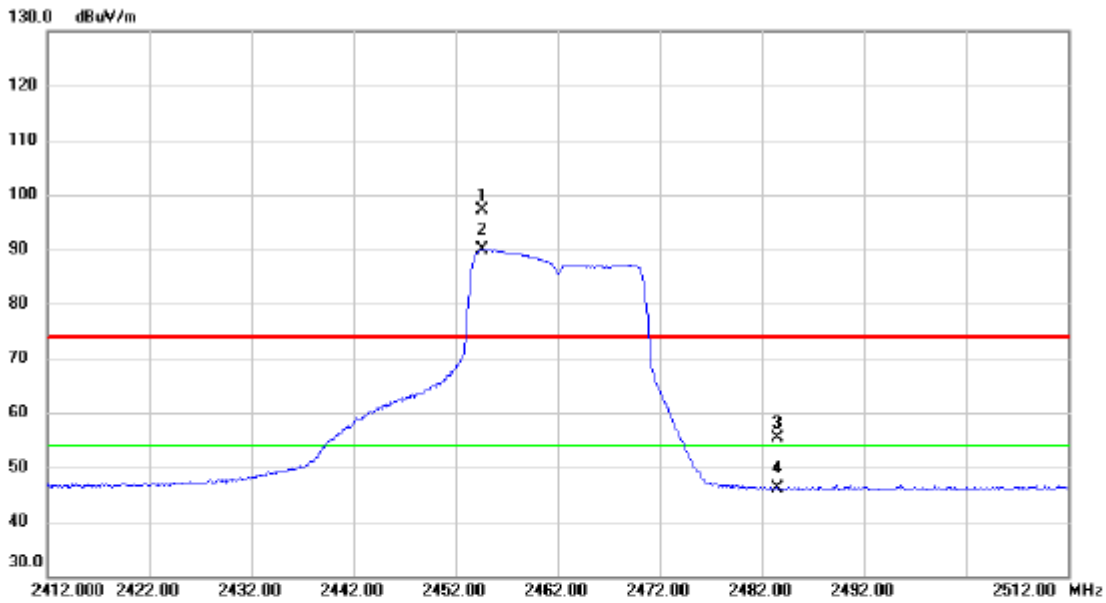


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.600	83.27	13.89	97.16	74.00	23.16	peak	No Limit
2	*	2454.600	76.10	13.89	89.99	54.00	35.99	AVG	No Limit
3		2483.500	41.43	13.93	55.36	74.00	-18.64	peak	
4		2483.500	32.20	13.93	46.13	54.00	-7.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

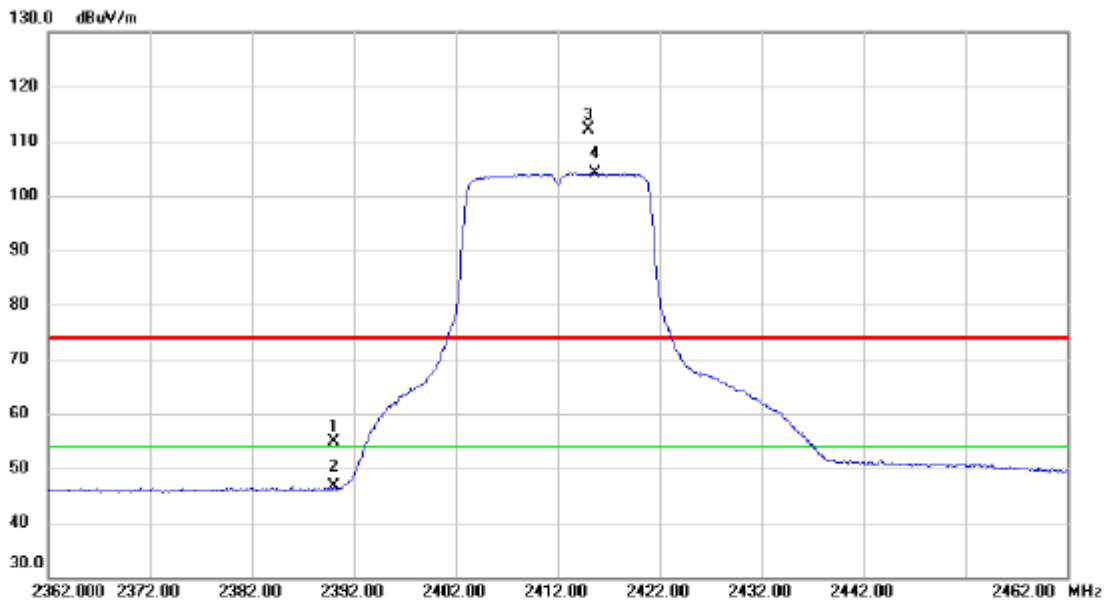

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.98	13.81	54.79	74.00	-19.21	peak	
2		2390.000	32.71	13.81	46.52	54.00	-7.48	AVG	
3	X	2415.000	98.19	13.84	112.03	74.00	38.03	peak	No Limit
4	*	2415.700	90.24	13.84	104.08	54.00	50.08	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

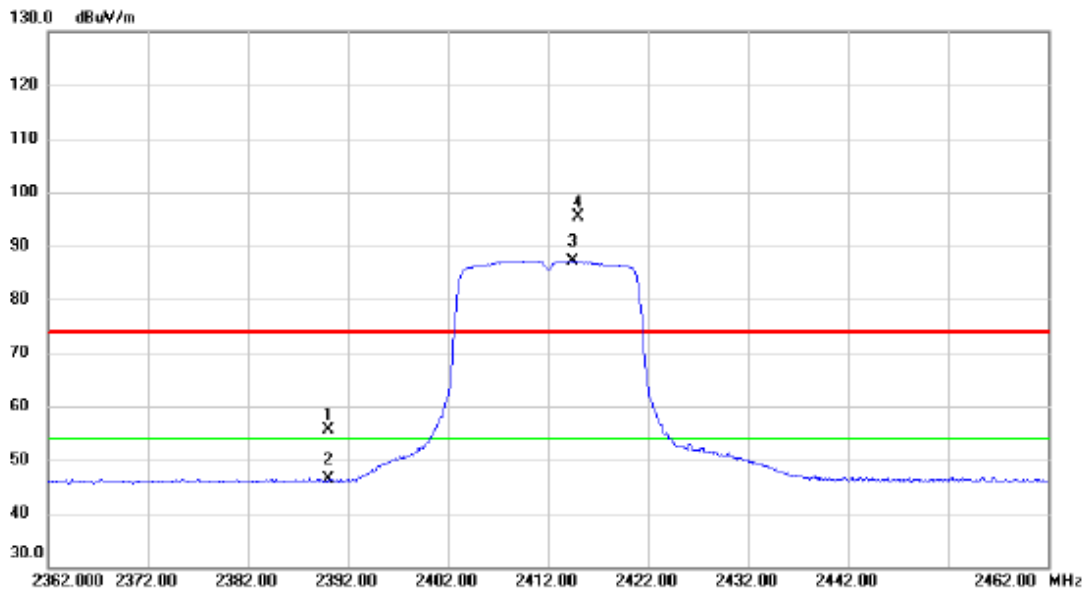


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.79	13.81	55.60	74.00	-18.40	peak	
2		2390.000	32.45	13.81	46.26	54.00	-7.74	AVG	
3	*	2414.400	73.34	13.84	87.18	54.00	33.18	AVG	No Limit
4	X	2415.000	81.50	13.84	95.34	74.00	21.34	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2417 MHz

Vertical

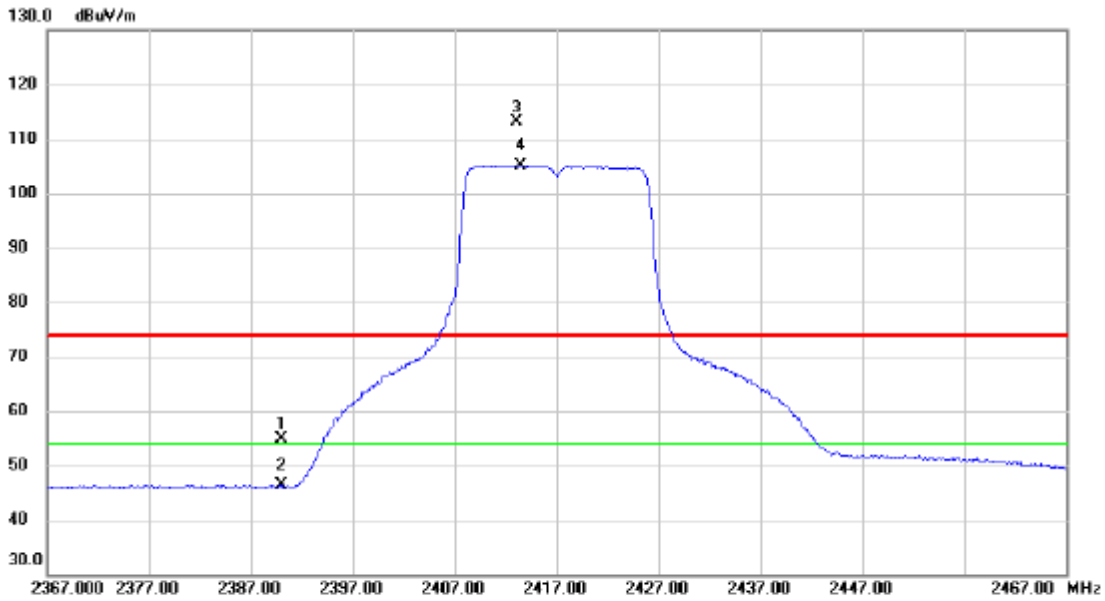


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.03	13.81	54.84	74.00	-19.16	peak	
2		2390.000	32.48	13.81	46.29	54.00	-7.71	AVG	
3	X	2413.100	99.38	13.84	113.22	74.00	39.22	peak	No Limit
4	*	2413.500	91.35	13.84	105.19	54.00	51.19	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2417 MHz

Horizontal

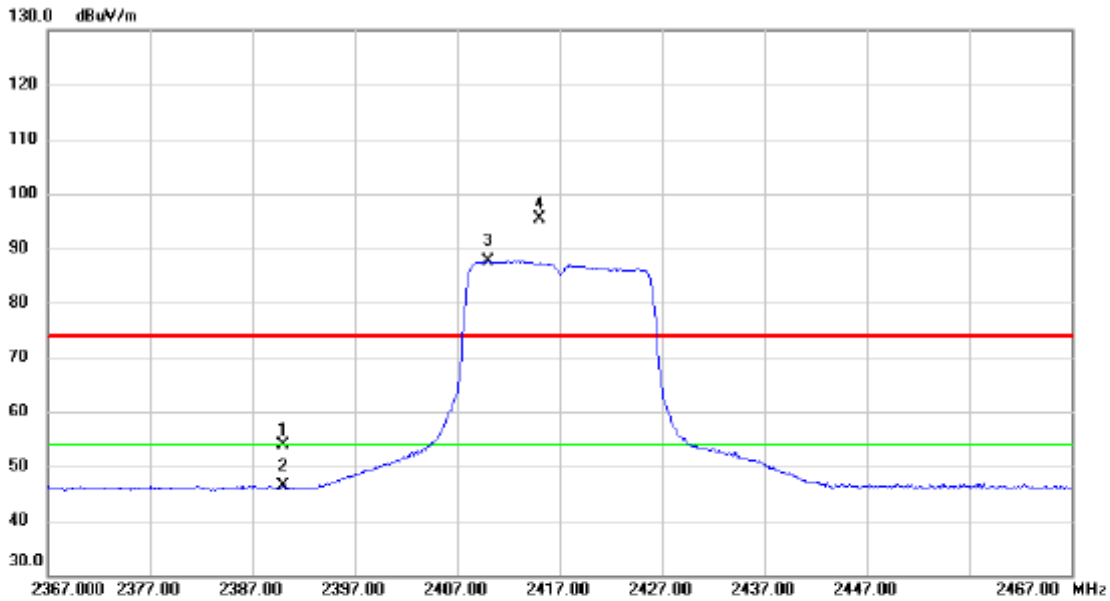


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.16	13.81	53.97	74.00	-20.03	peak	
2		2390.000	32.55	13.81	46.36	54.00	-7.64	AVG	
3	*	2410.000	73.77	13.82	87.59	54.00	33.59	AVG	No Limit
4	X	2415.000	81.63	13.84	95.47	74.00	21.47	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2422 MHz

Vertical

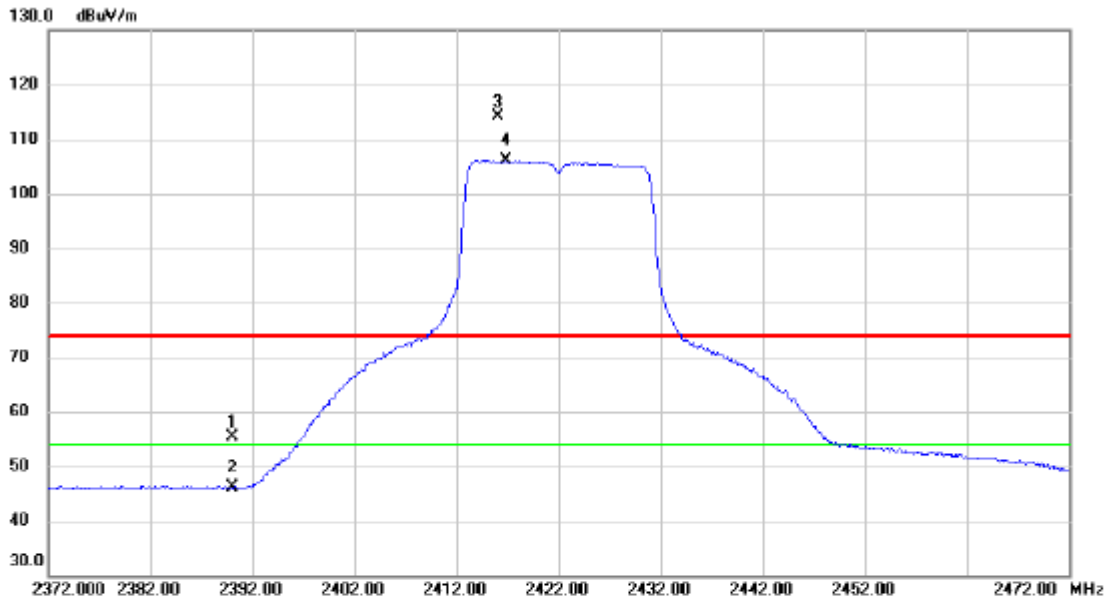


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.54	13.81	55.35	74.00	-18.65	peak	
2		2390.000	32.40	13.81	46.21	54.00	-7.79	AVG	
3	X	2416.000	100.21	13.84	114.05	74.00	40.05	peak	No Limit
4	*	2416.900	92.25	13.84	106.09	54.00	52.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2422 MHz

Horizontal

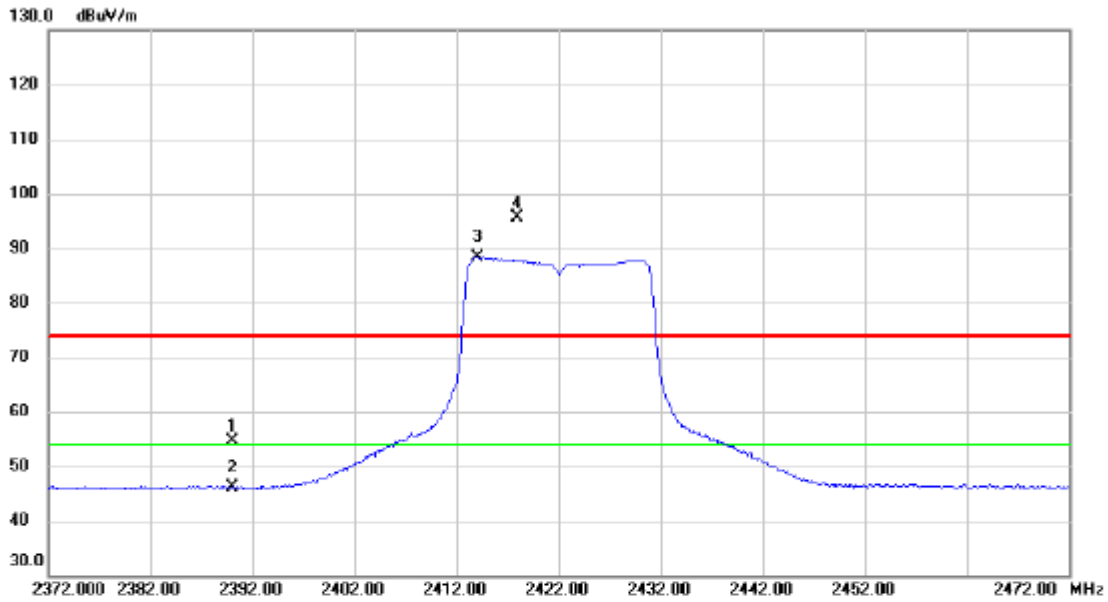


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.90	13.81	54.71	74.00	-19.29	peak	
2		2390.000	32.42	13.81	46.23	54.00	-7.77	AVG	
3	*	2414.100	74.54	13.84	88.38	54.00	34.38	AVG	No Limit
4	X	2417.900	81.82	13.84	95.66	74.00	21.66	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2427 MHz

Vertical

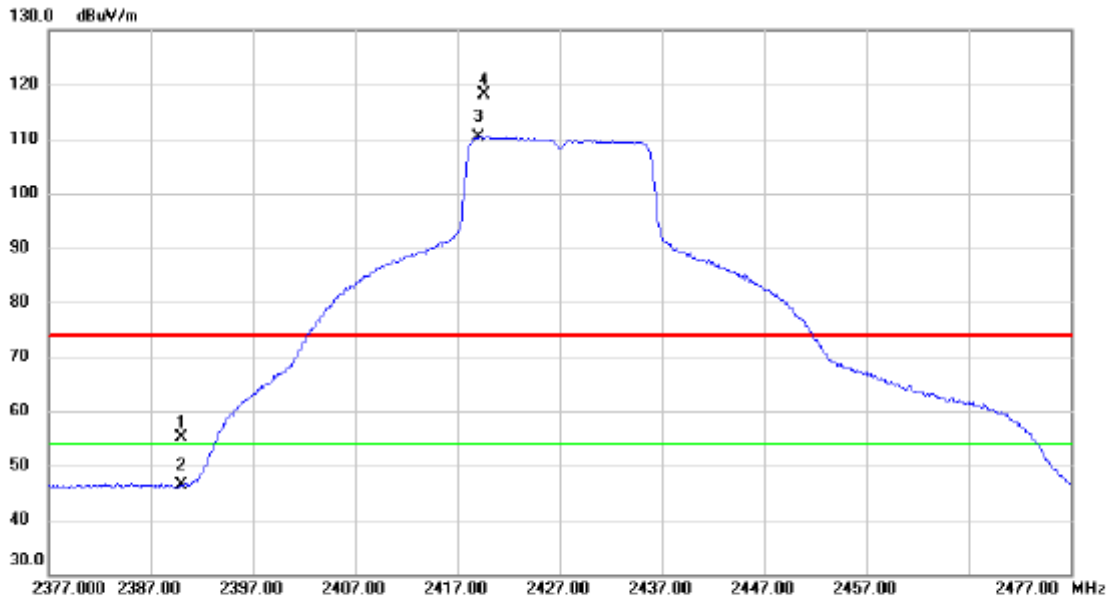


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	41.23	13.81	55.04	74.00	-18.96	peak	
2		2390.000	32.47	13.81	46.28	54.00	-7.72	AVG	
3	*	2419.000	96.55	13.84	110.39	54.00	56.39	AVG	No Limit
4	X	2419.600	104.27	13.84	118.11	74.00	44.11	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2427 MHz

Horizontal

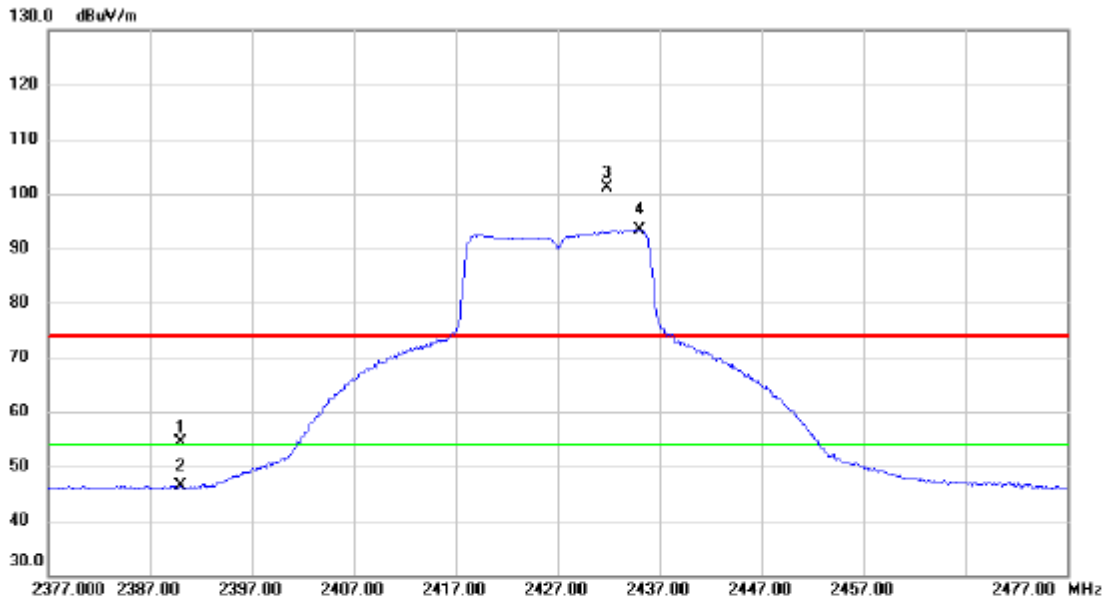

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.67	13.81	54.48	74.00	-19.52	peak	
2		2390.000	32.49	13.81	46.30	54.00	-7.70	AVG	
3	X	2431.900	87.33	13.86	101.19	74.00	27.19	peak	No Limit
4	*	2435.100	79.50	13.86	93.36	54.00	39.36	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

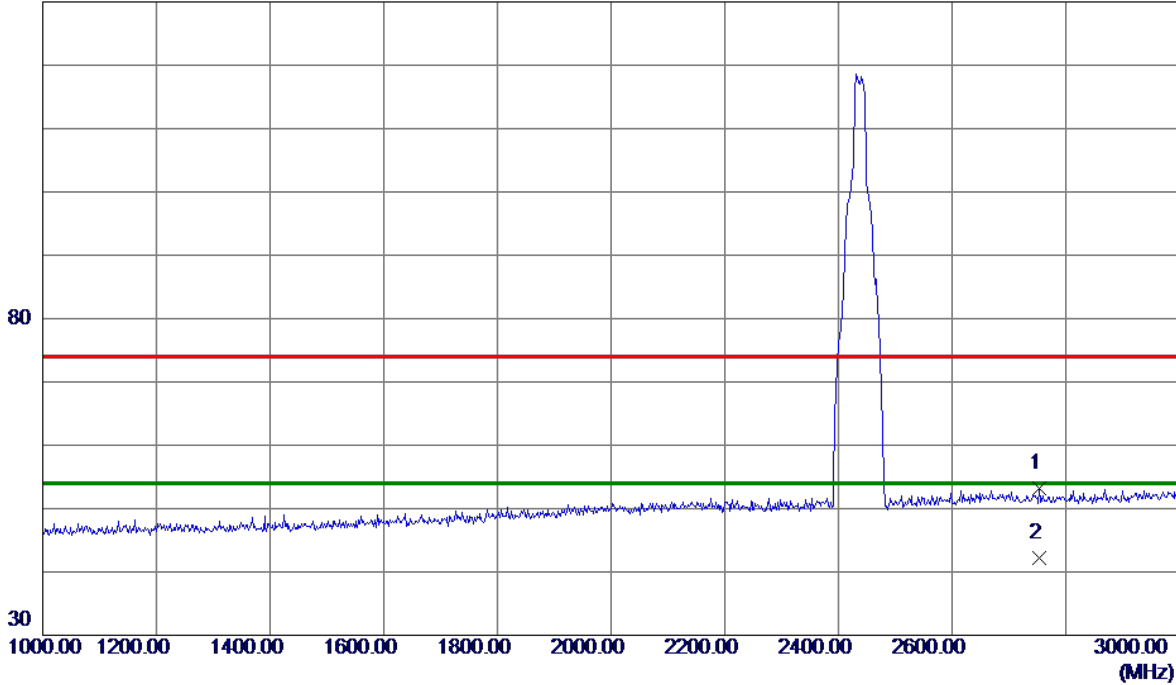

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2754.0000	43.72	9.47	53.19	74.00	-20.81	Peak	
2 *	2754.0000	32.75	9.47	42.22	54.00	-11.78	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

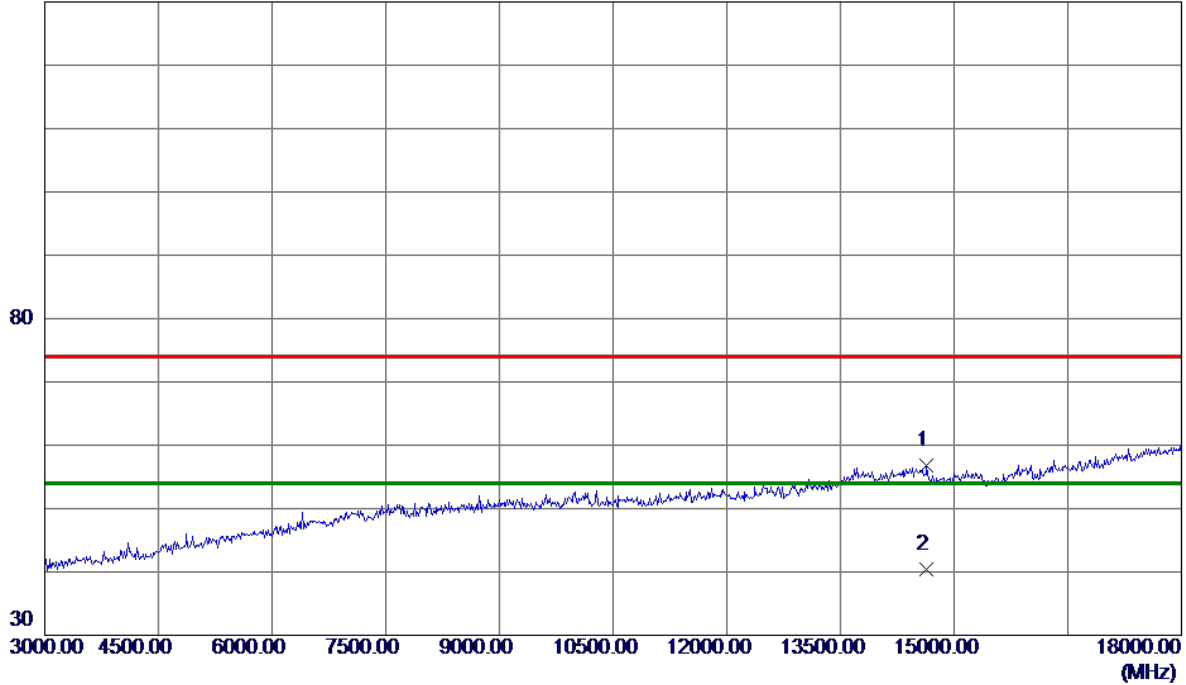

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14640.0000	38.04	18.69	56.73	74.00	-17.27	Peak	
2 *	14640.0000	21.78	18.69	40.47	54.00	-13.53	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

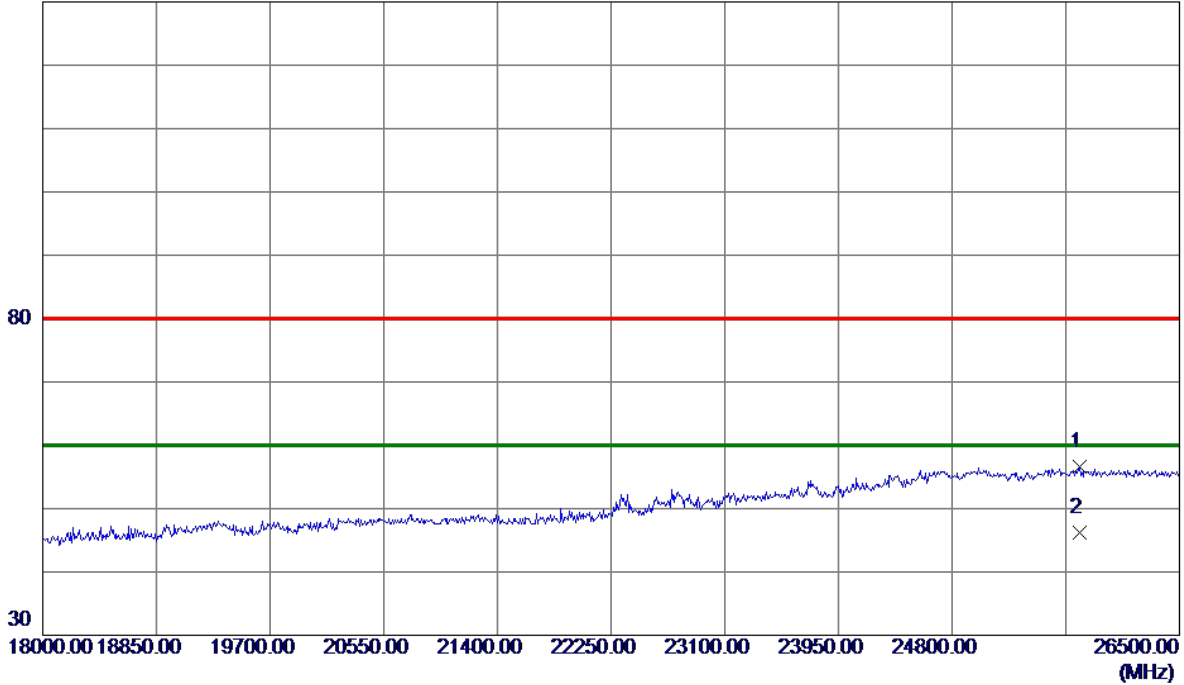


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25752.0000	26.39	30.24	56.63	80.00	-23.37	Peak	
2 *	25752.0000	15.91	30.24	46.15	60.00	-13.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

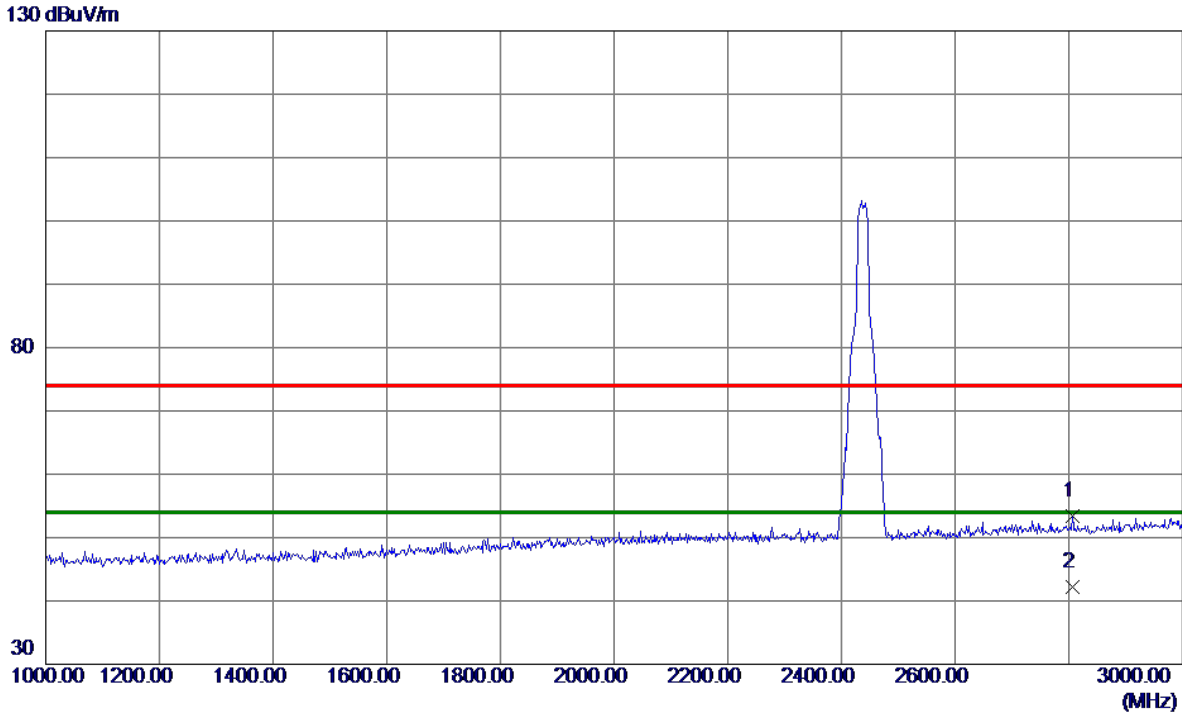

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2806.0000	43.62	9.69	53.31	74.00	-20.69	Peak	
2 *	2806.0000	32.48	9.69	42.17	54.00	-11.83	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

130 dBuV/m

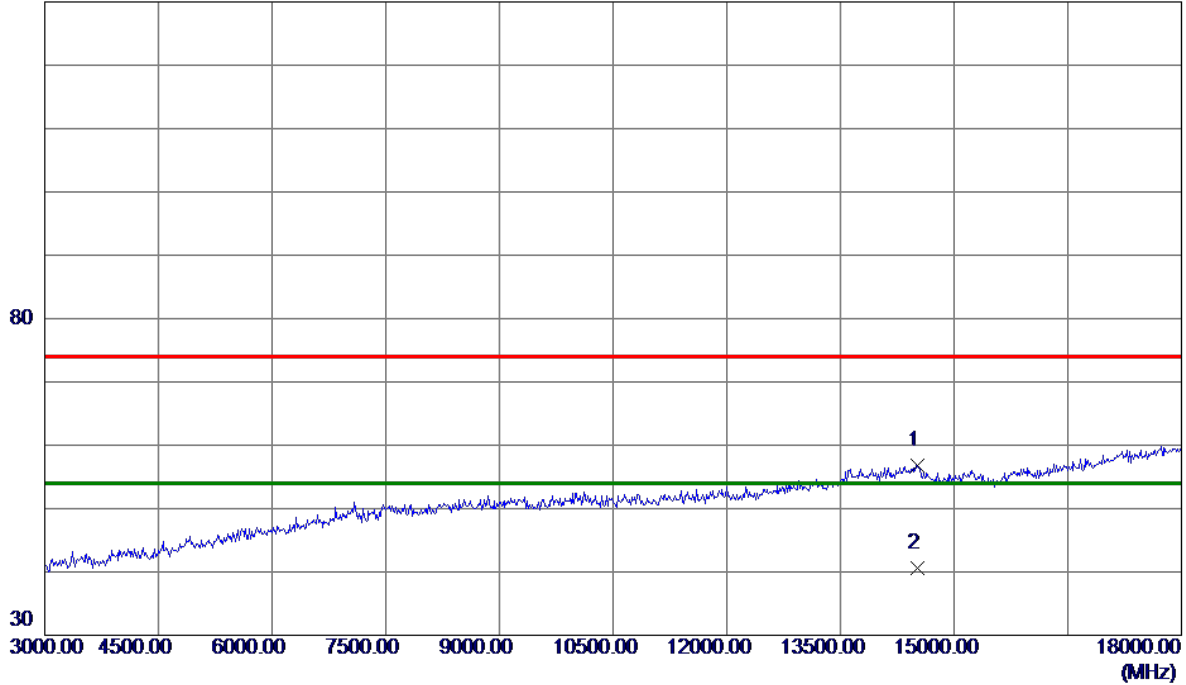

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14520.0000	37.75	19.04	56.79	74.00	-17.21	Peak	
2 *	14520.0000	21.51	19.04	40.55	54.00	-13.45	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

130 dBuV/m

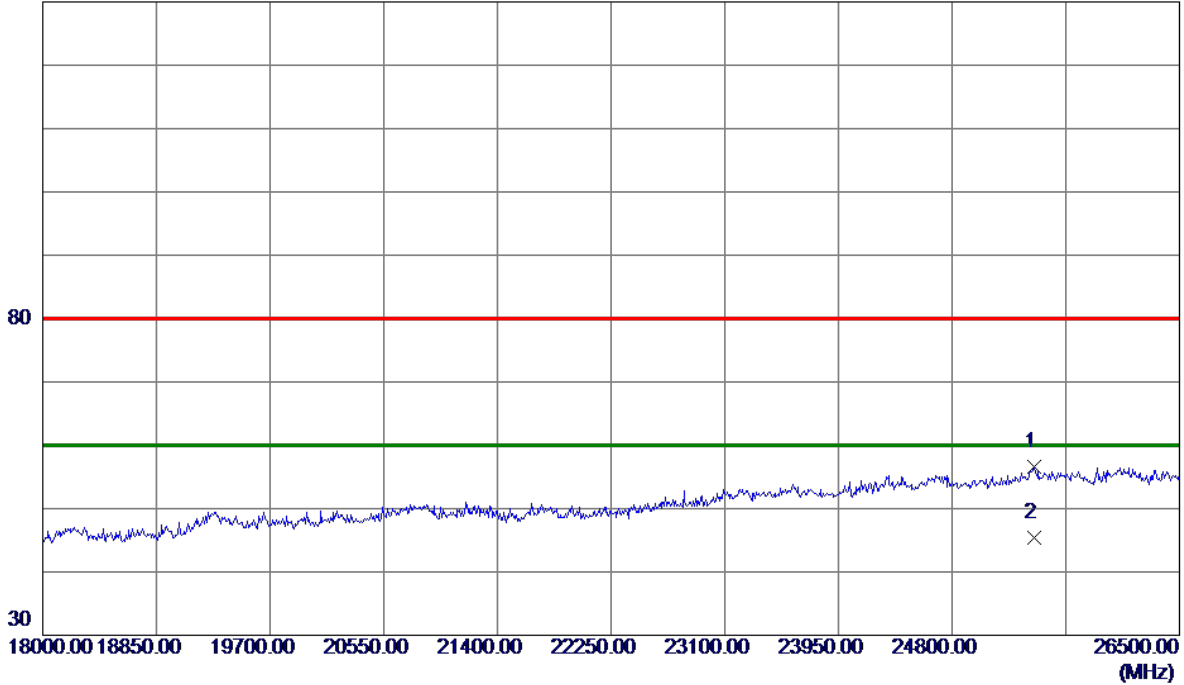


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25412.0000	26.37	30.16	56.53	80.00	-23.47	Peak	
2 *	25412.0000	15.16	30.16	45.32	60.00	-14.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2452 MHz

Vertical

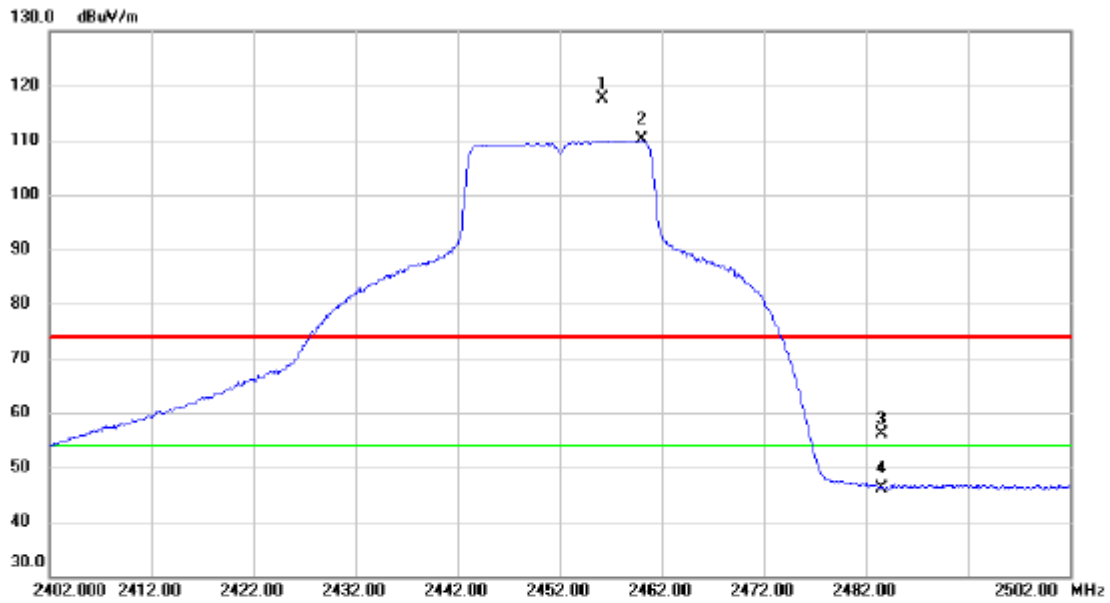

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.200	103.70	13.90	117.60	74.00	43.60	peak	No Limit
2	*	2460.000	96.11	13.90	110.01	54.00	56.01	AVG	No Limit
3		2483.500	42.13	13.93	56.06	74.00	-17.94	peak	
4		2483.500	32.28	13.93	46.21	54.00	-7.79	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2452 MHz

Horizontal

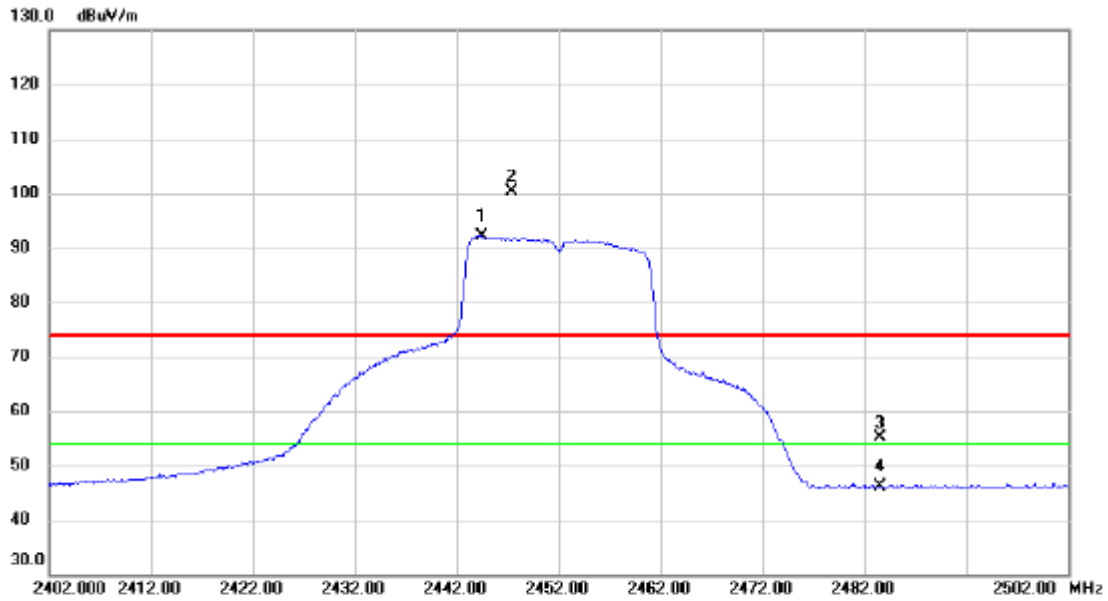


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.400	78.27	13.87	92.14	54.00	38.14	AVG	No Limit
2	X	2447.400	86.53	13.88	100.41	74.00	26.41	peak	No Limit
3		2483.500	41.09	13.93	55.02	74.00	-18.98	peak	
4		2483.500	32.13	13.93	46.06	54.00	-7.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Vertical

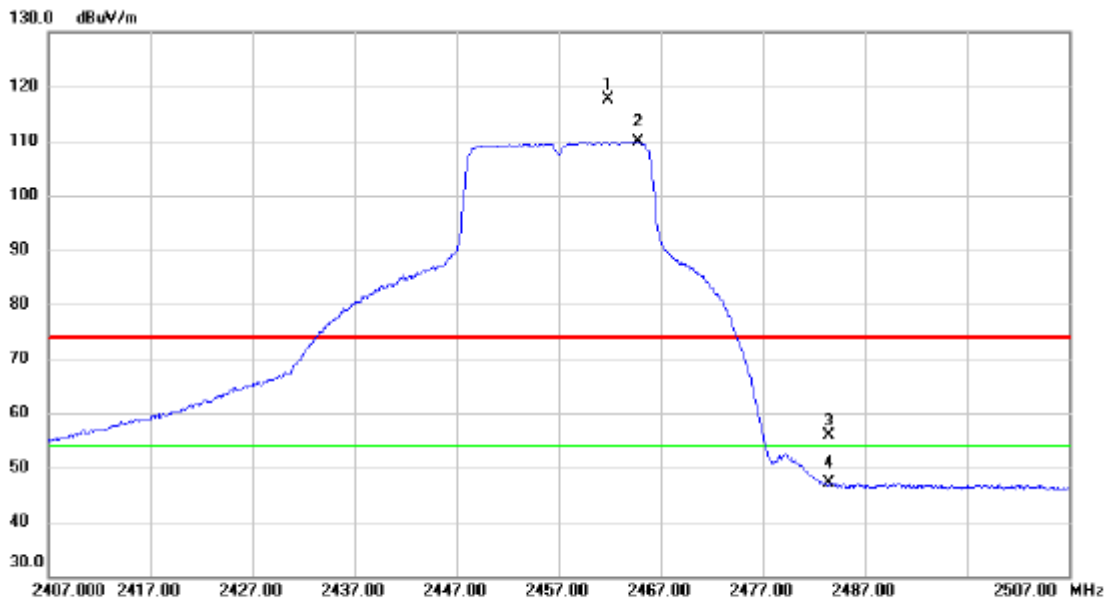


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2461.900	103.78	13.89	117.67	74.00	43.67	peak	No Limit
2	*	2464.800	95.86	13.90	109.76	54.00	55.76	AVG	No Limit
3		2483.500	41.88	13.93	55.81	74.00	-18.19	peak	
4		2483.500	33.10	13.93	47.03	54.00	-6.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Horizontal

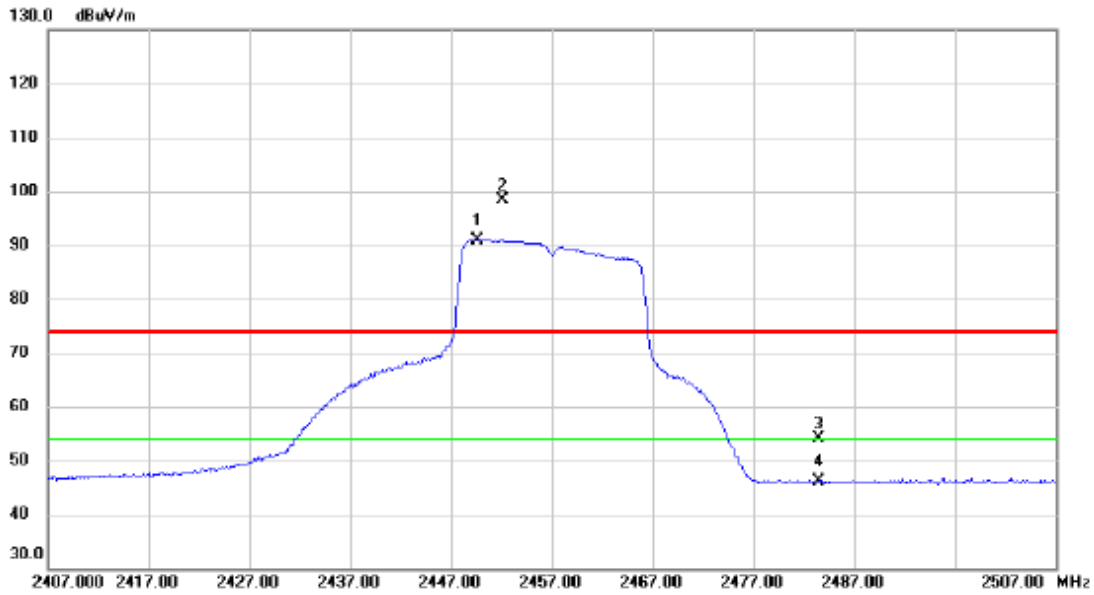

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.600	77.06	13.88	90.94	54.00	36.94	AVG	No Limit
2	X	2452.200	84.46	13.88	98.34	74.00	24.34	peak	No Limit
3		2483.500	40.10	13.93	54.03	74.00	-19.97	peak	
4		2483.500	32.26	13.93	46.19	54.00	-7.81	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

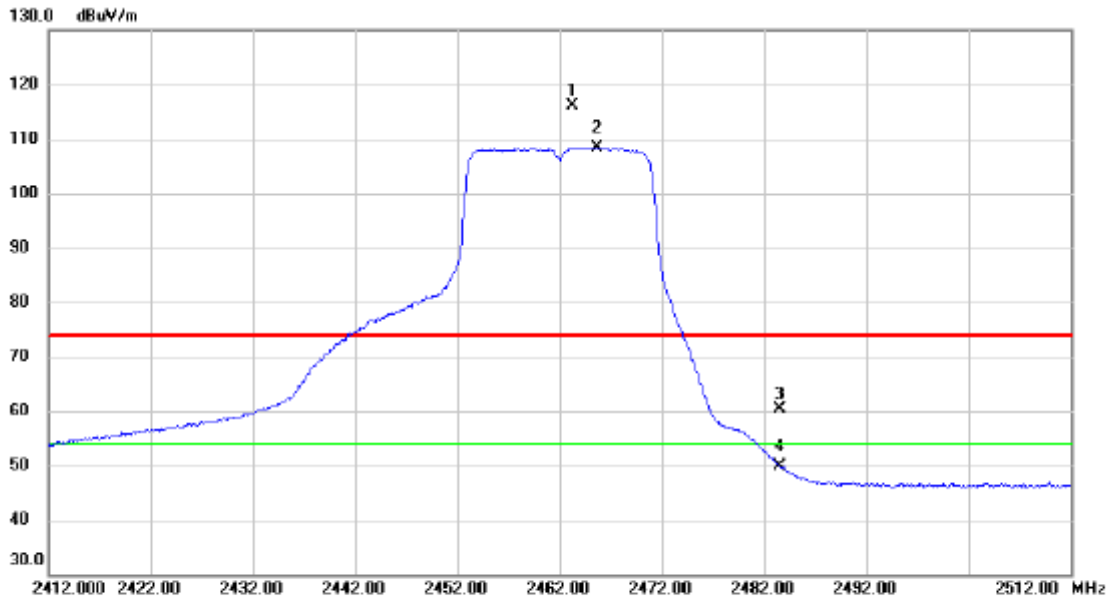


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.300	102.19	13.90	116.09	74.00	42.09	peak	No Limit
2	*	2465.700	94.42	13.90	108.32	54.00	54.32	AVG	No Limit
3		2483.500	46.55	13.93	60.48	74.00	-13.52	peak	
4		2483.500	35.93	13.93	49.86	54.00	-4.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

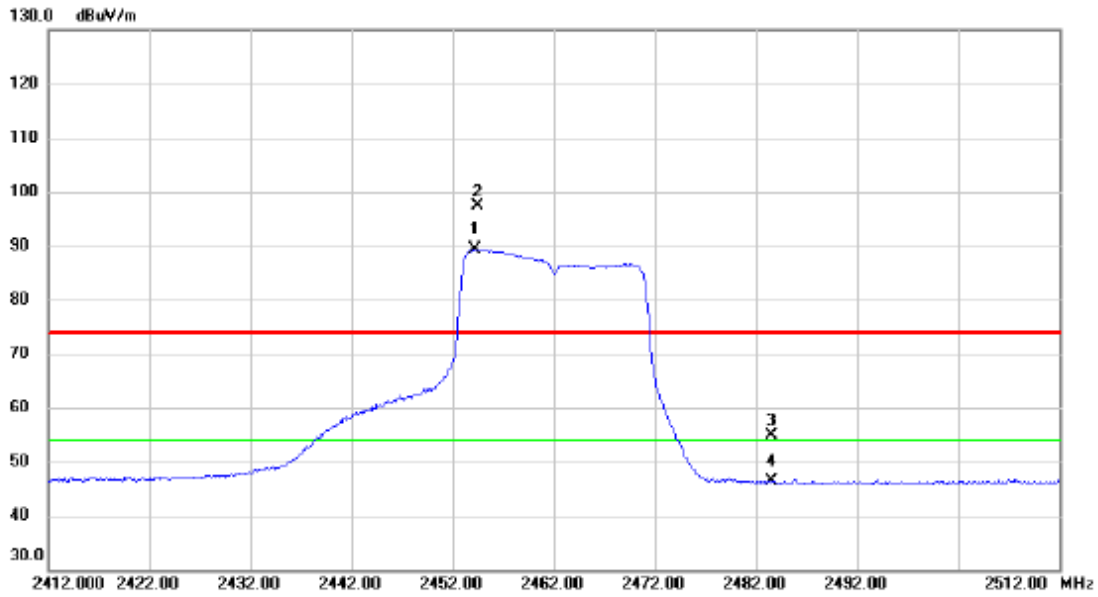


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.200	75.41	13.89	89.30	54.00	35.30	AVG	No Limit
2	X	2454.500	83.46	13.89	97.35	74.00	23.35	peak	No Limit
3		2483.500	41.02	13.93	54.95	74.00	-19.05	peak	
4		2483.500	32.52	13.93	46.45	54.00	-7.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

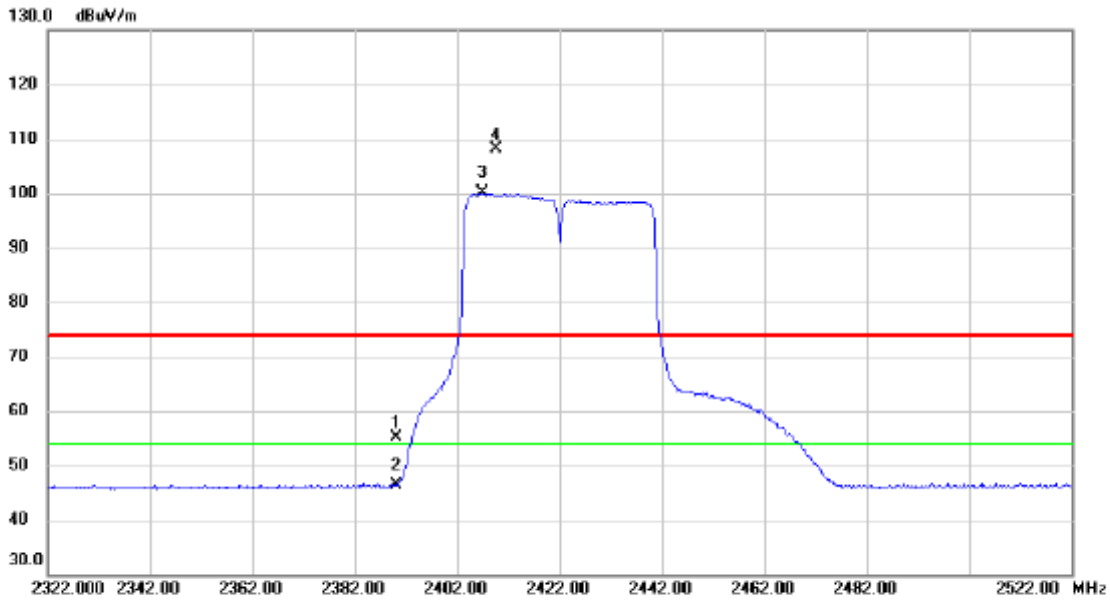


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.41	13.81	55.22	74.00	-18.78	peak	
2		2390.000	32.65	13.81	46.46	54.00	-7.54	AVG	
3	*	2407.000	86.36	13.83	100.19	54.00	46.19	AVG	No Limit
4	X	2409.600	94.24	13.82	108.06	74.00	34.06	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

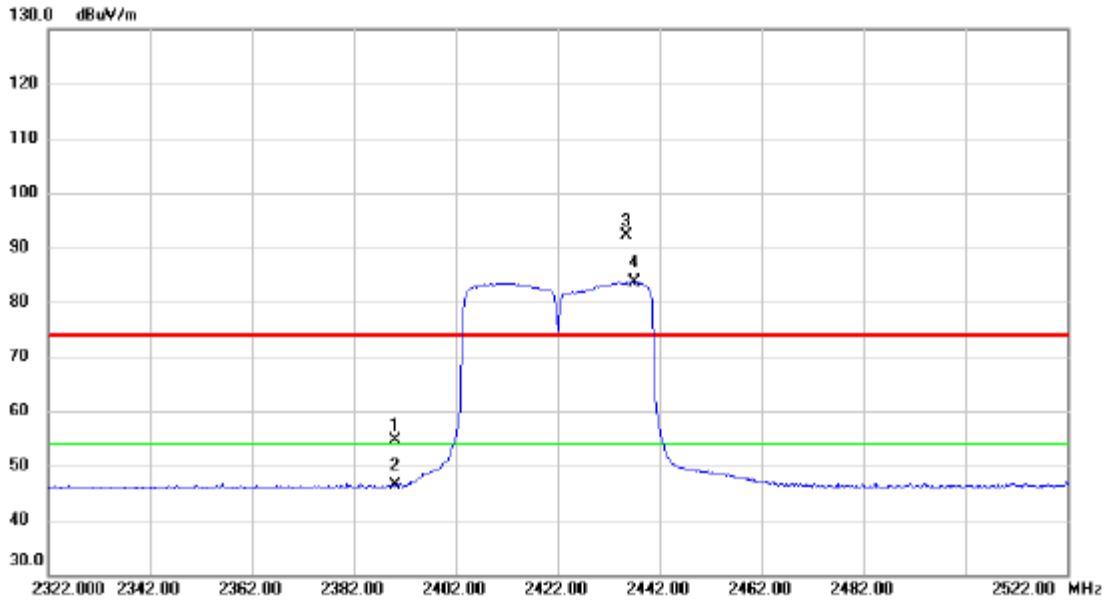


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.94	13.81	54.75	74.00	-19.25	peak	
2		2390.000	32.53	13.81	46.34	54.00	-7.66	AVG	
3	X	2435.600	78.25	13.86	92.11	74.00	18.11	peak	No Limit
4	*	2437.000	69.80	13.86	83.66	54.00	29.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427MHz

Vertical

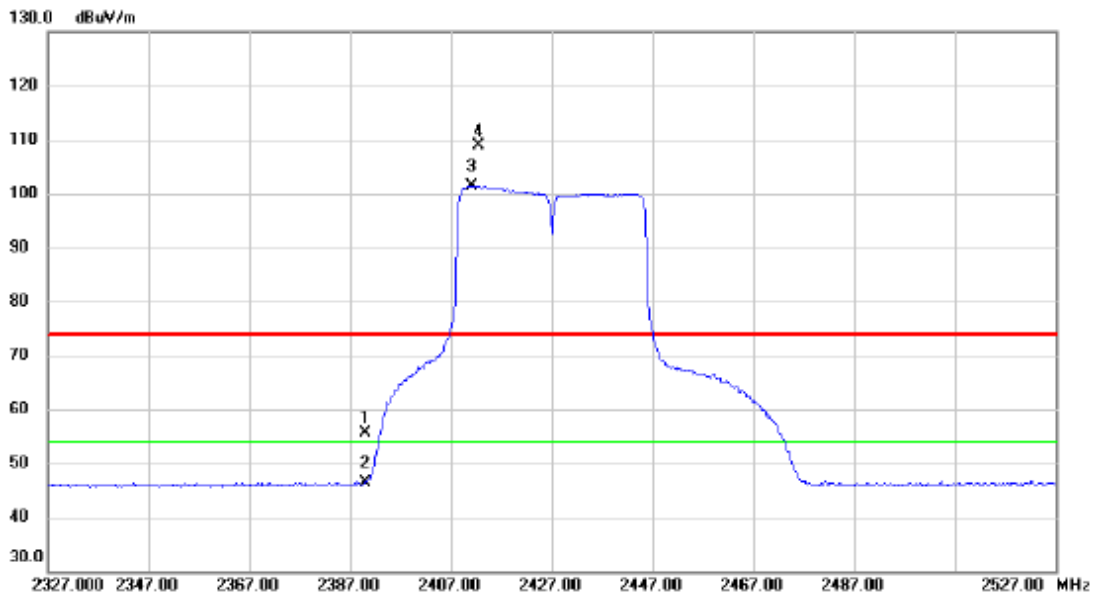


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.83	13.81	55.64	74.00	-18.36	peak	
2		2390.000	32.58	13.81	46.39	54.00	-7.61	AVG	
3	*	2411.200	87.60	13.83	101.43	54.00	47.43	AVG	No Limit
4	X	2412.400	95.08	13.83	108.91	74.00	34.91	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427MHz

Horizontal

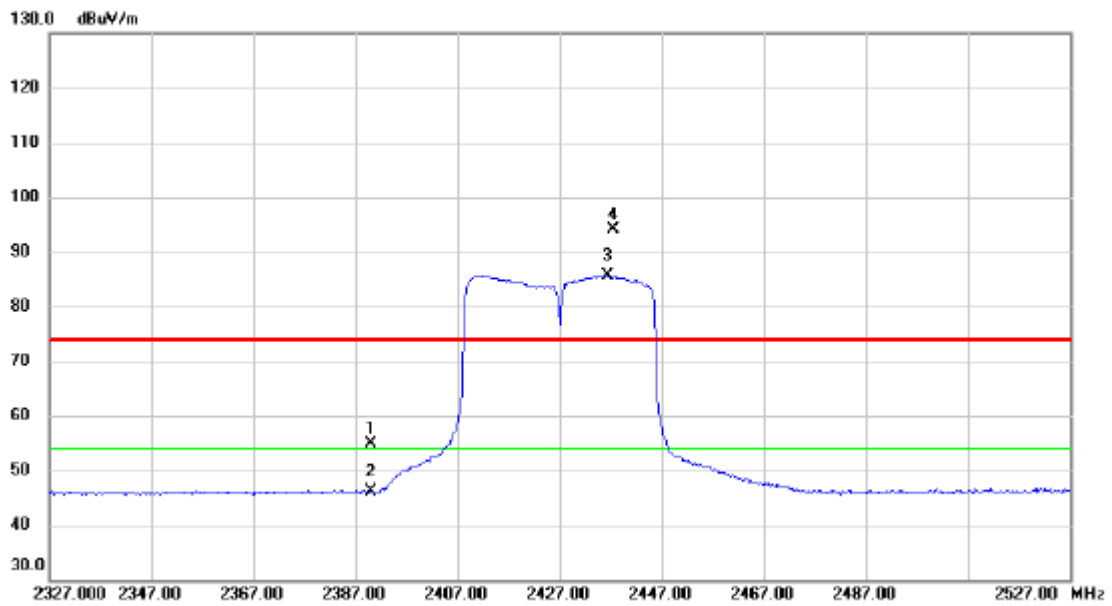

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.13	13.81	54.94	74.00	-19.06	peak	
2		2390.000	32.24	13.81	46.05	54.00	-7.95	AVG	
3	*	2436.600	71.77	13.86	85.63	54.00	31.63	AVG	No Limit
4	X	2437.400	80.22	13.86	94.08	74.00	20.08	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2432MHz

Vertical

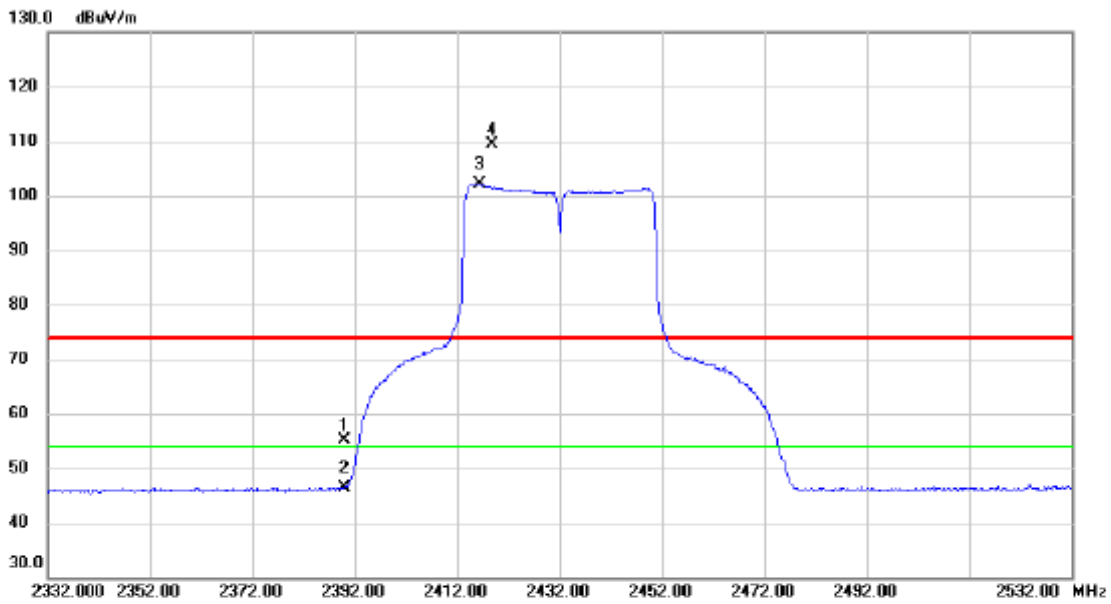


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.34	13.81	55.15	74.00	-18.85	peak	
2		2390.000	32.62	13.81	46.43	54.00	-7.57	AVG	
3	*	2416.400	88.22	13.84	102.06	54.00	48.06	AVG	No Limit
4	X	2418.800	95.59	13.84	109.43	74.00	35.43	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2432MHz

Horizontal

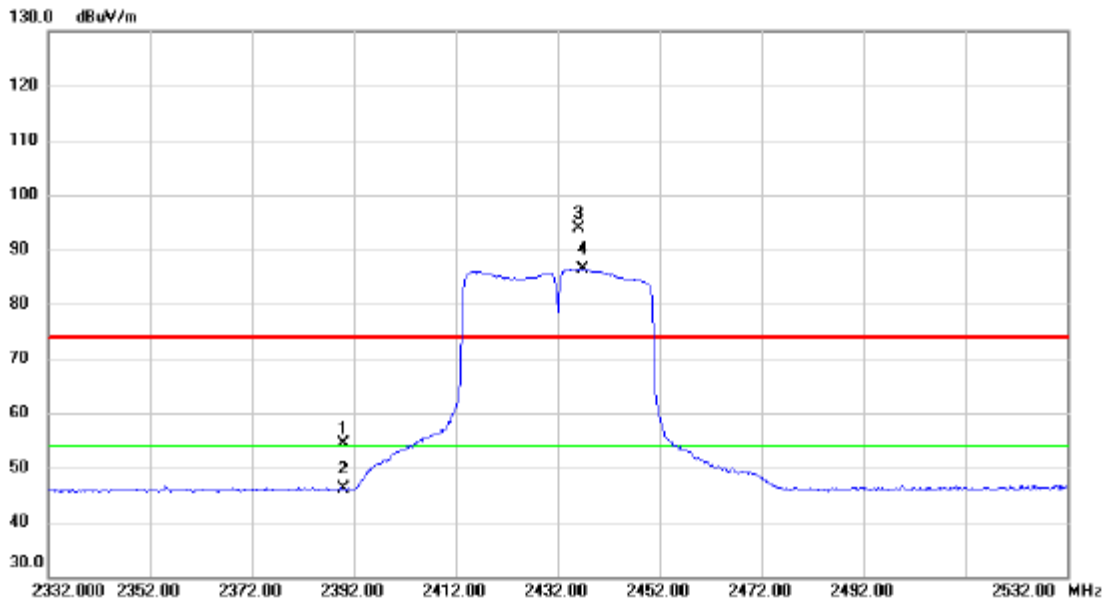

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.69	13.81	54.50	74.00	-19.50	peak	
2		2390.000	32.35	13.81	46.16	54.00	-7.84	AVG	
3	X	2436.200	79.94	13.86	93.80	74.00	19.80	peak	No Limit
4	*	2436.800	72.53	13.86	86.39	54.00	32.39	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

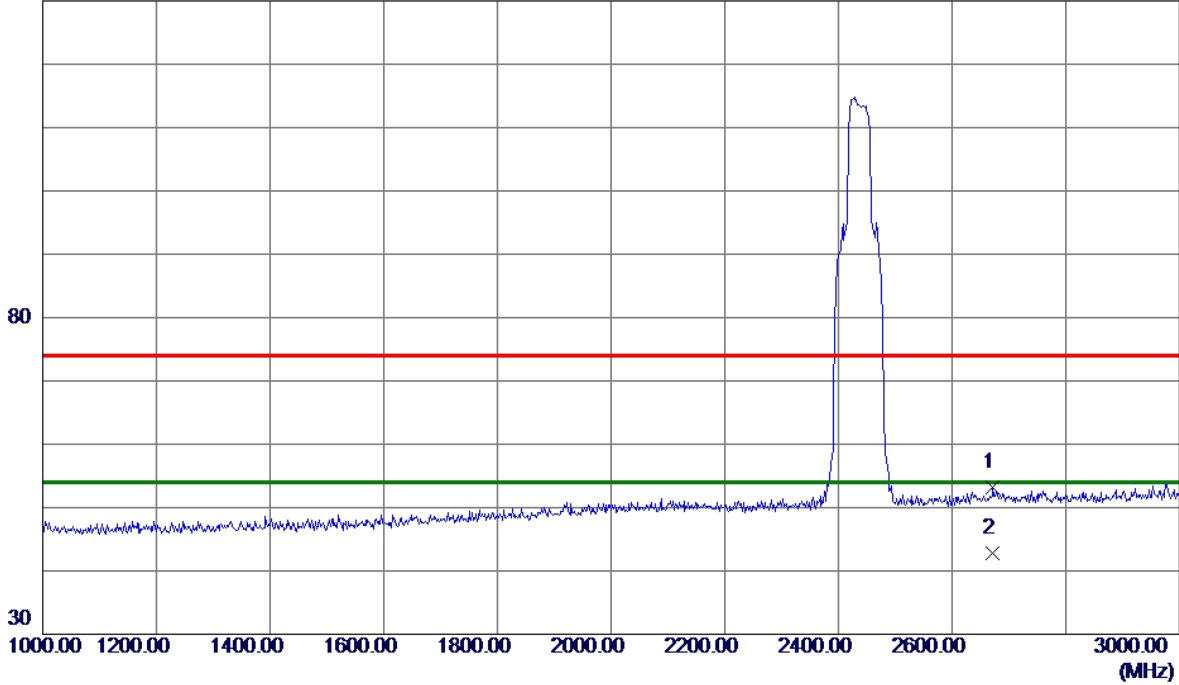

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2672.0000	44.16	9.13	53.29	74.00	-20.71	Peak	
2 *	2672.0000	33.67	9.13	42.80	54.00	-11.20	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

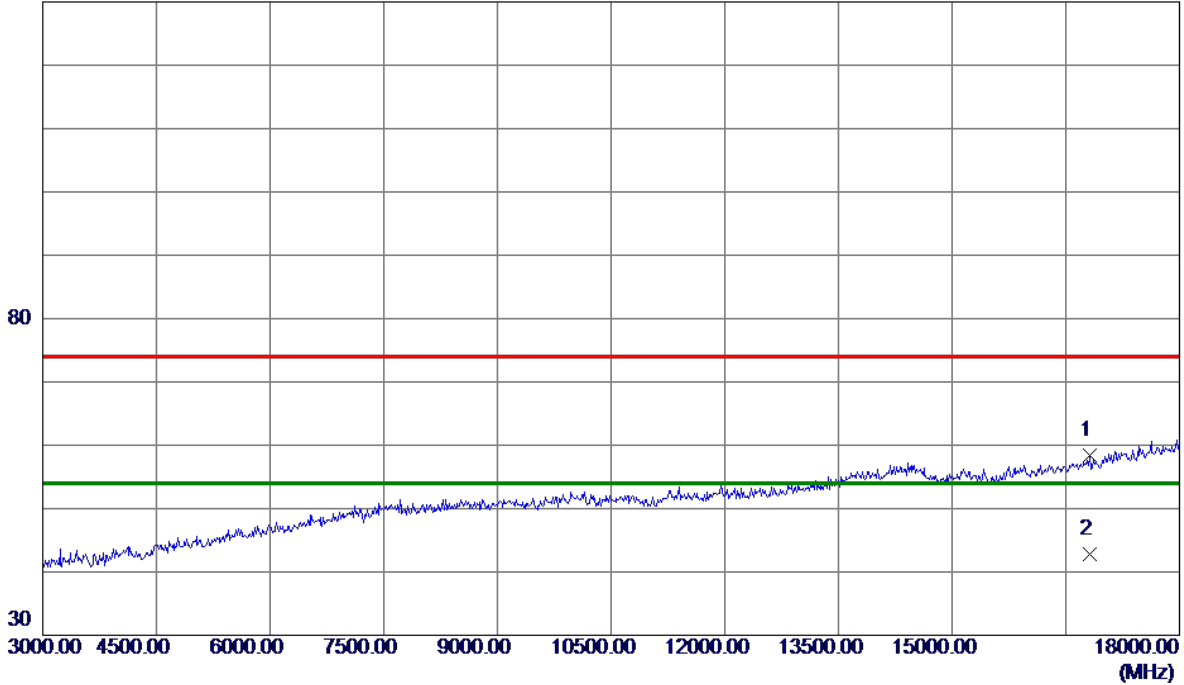

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	16815.0000	38.68	19.69	58.37	74.00	-15.63	Peak	
2 *	16815.0000	23.14	19.69	42.83	54.00	-11.17	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

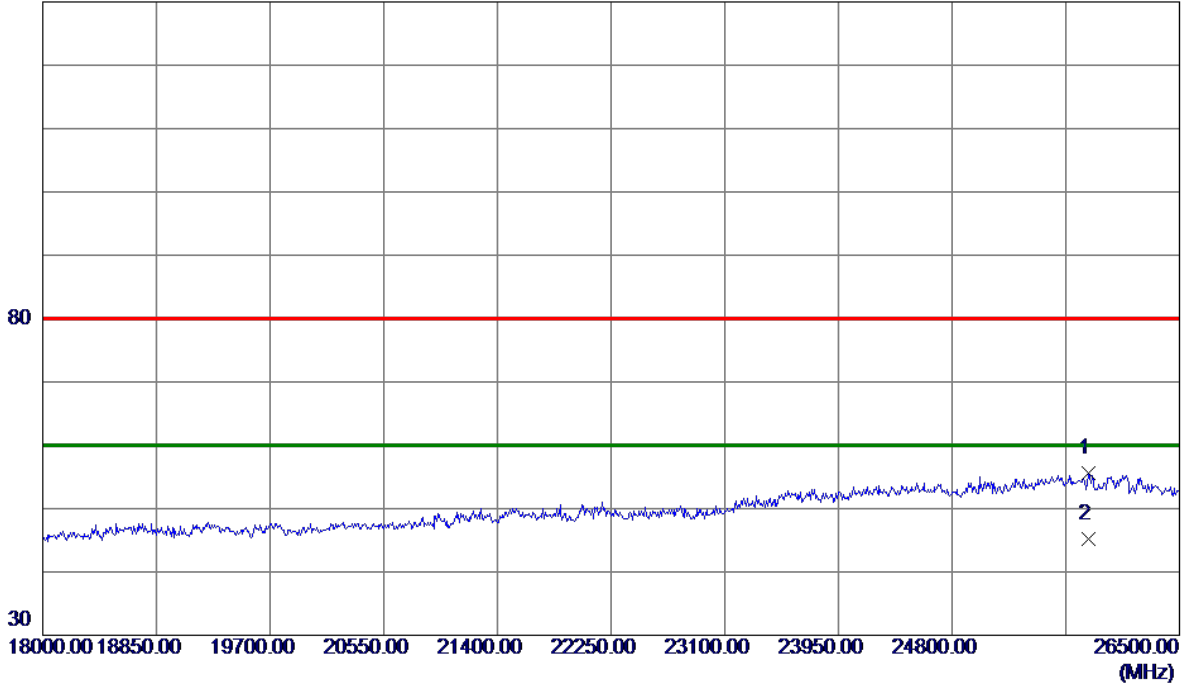


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25820.0000	25.26	30.29	55.55	80.00	-24.45	Peak	
2 *	25820.0000	14.86	30.29	45.15	60.00	-14.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

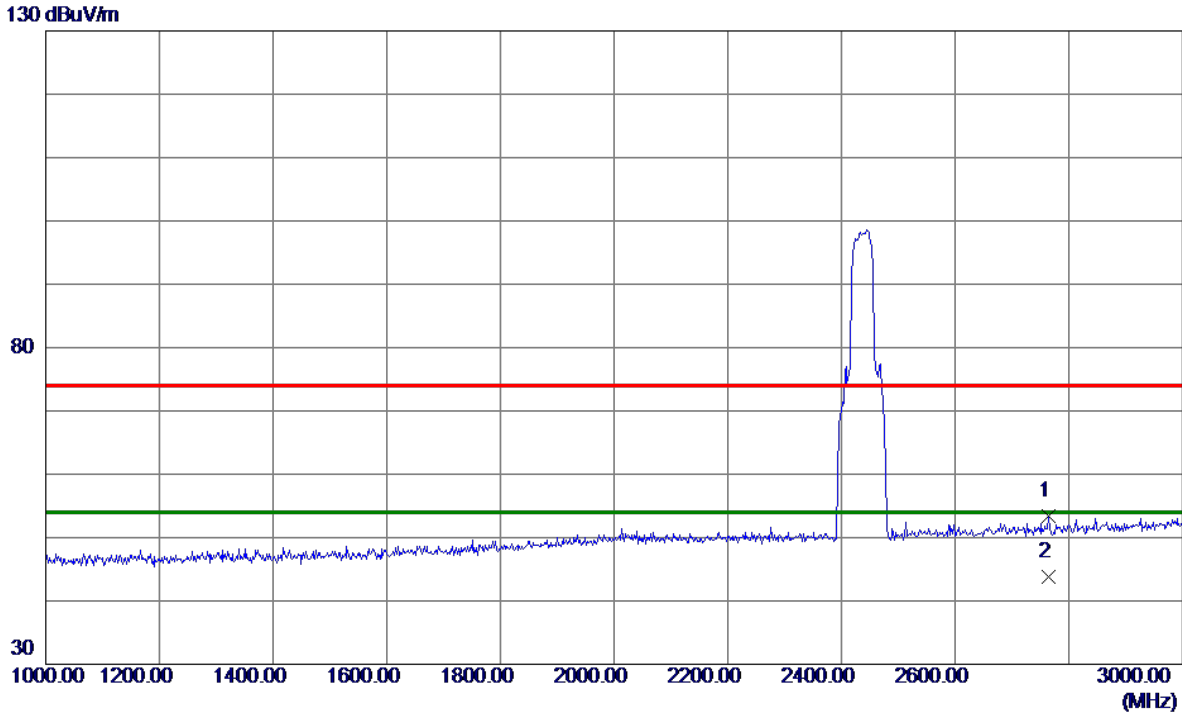

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2764.0000	43.83	9.52	53.35	74.00	-20.65	Peak	
2 *	2764.0000	34.29	9.52	43.81	54.00	-10.19	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

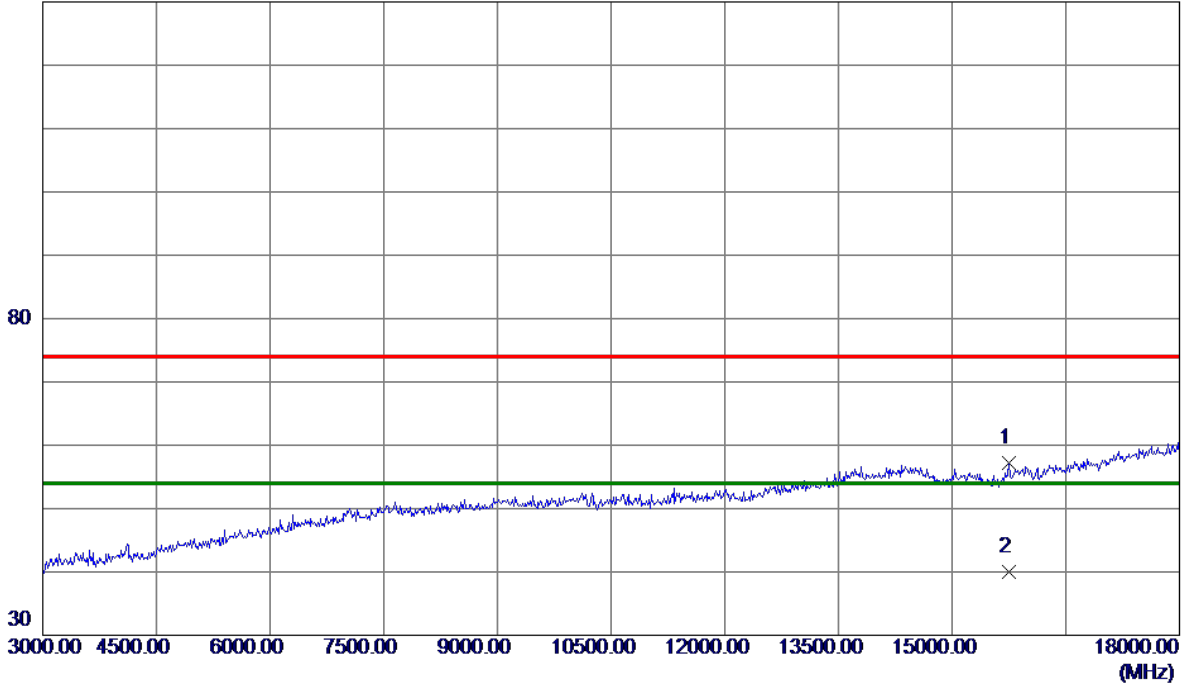

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15750.0000	39.81	17.36	57.17	74.00	-16.83	Peak	
2 *	15750.0000	22.67	17.36	40.03	54.00	-13.97	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

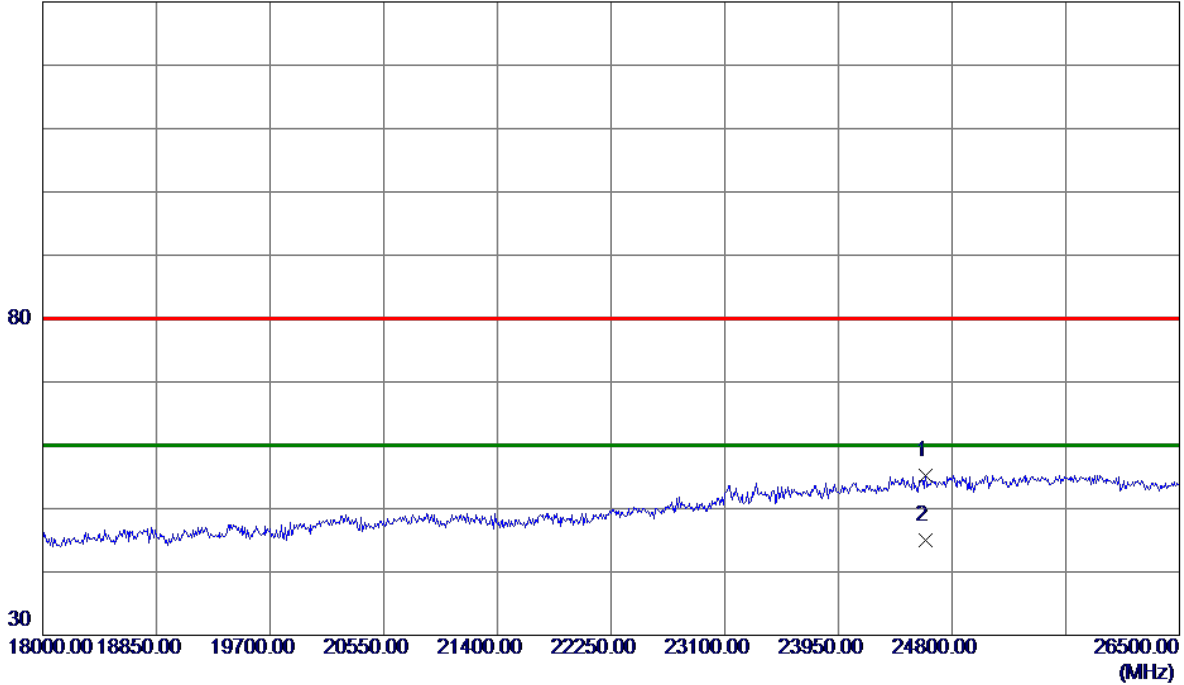


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	24604.5000	25.26	29.99	55.25	80.00	-24.75	Peak	
2 *	24604.5000	15.03	29.99	45.02	60.00	-14.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Vertical

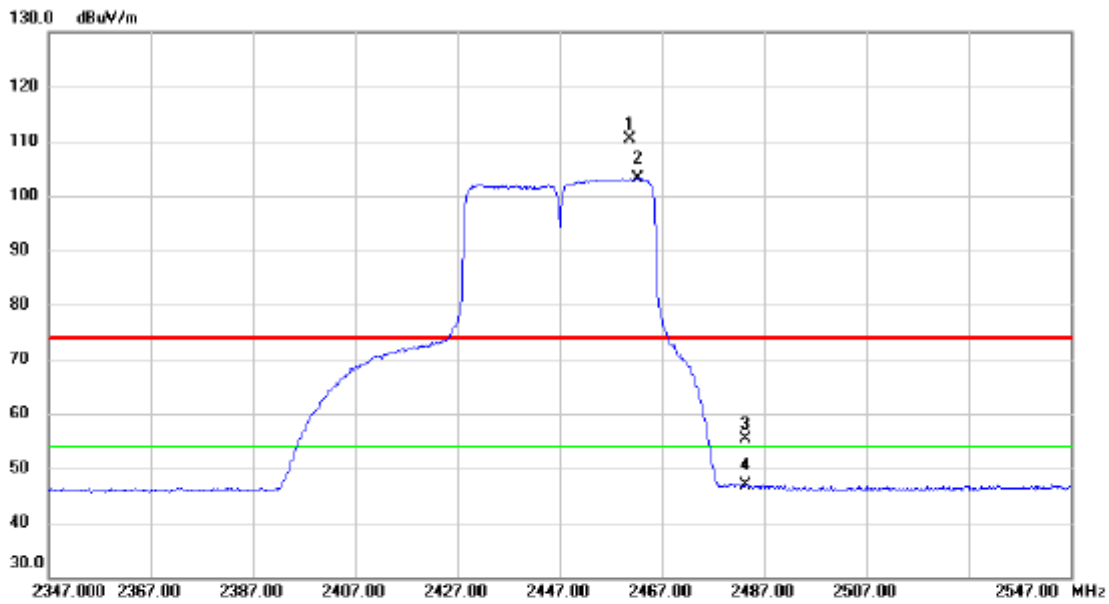


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.800	96.46	13.89	110.35	74.00	36.35	peak	No Limit
2	*	2462.400	89.21	13.89	103.10	54.00	49.10	AVG	No Limit
3		2483.500	41.34	13.93	55.27	74.00	-18.73	peak	
4		2483.500	33.02	13.93	46.95	54.00	-7.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Horizontal

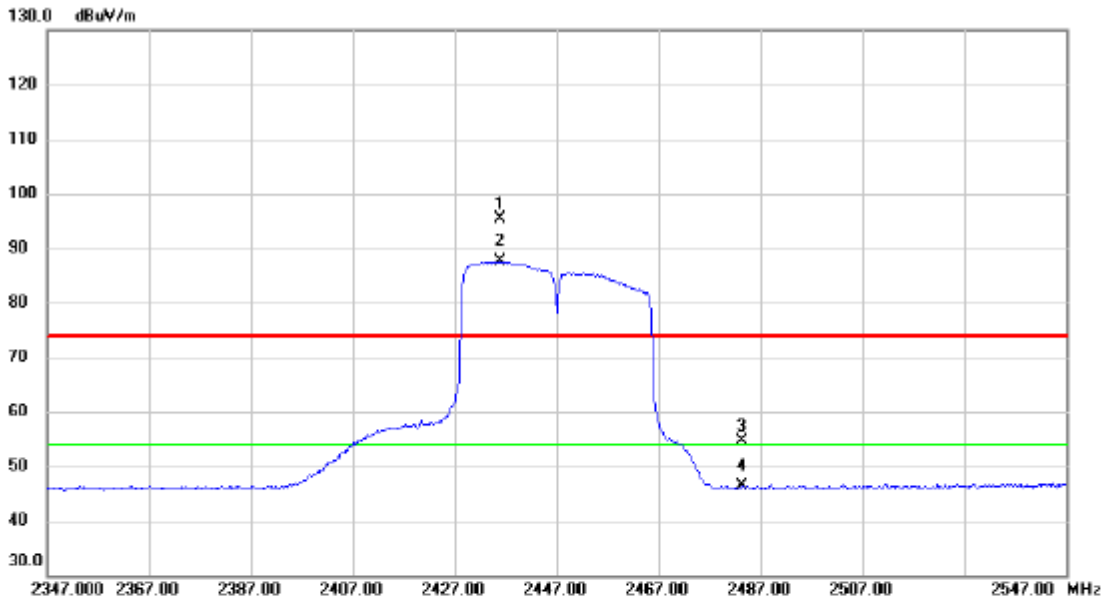


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2435.800	81.41	13.86	95.27	74.00	21.27	peak	No Limit
2	*	2436.000	73.69	13.86	87.55	54.00	33.55	AVG	No Limit
3		2483.500	40.66	13.93	54.59	74.00	-19.41	peak	
4		2483.500	32.52	13.93	46.45	54.00	-7.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Value + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

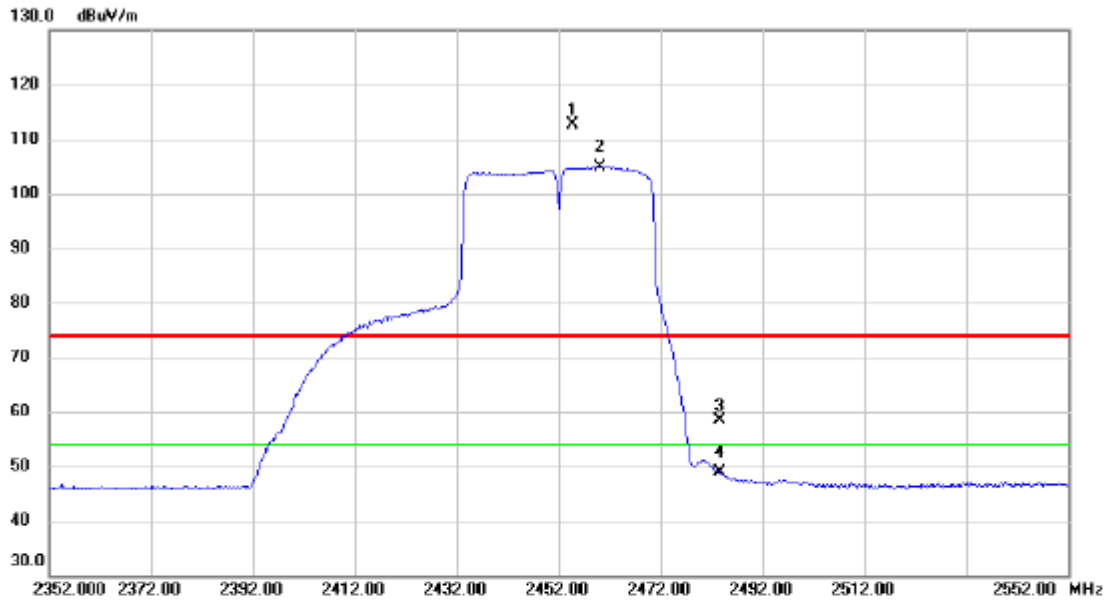


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.800	98.67	13.89	112.56	74.00	38.56	peak	No Limit
2	*	2460.200	91.02	13.90	104.92	54.00	50.92	AVG	No Limit
3		2483.500	44.40	13.93	58.33	74.00	-15.67	peak	
4		2483.500	34.84	13.93	48.77	54.00	-5.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

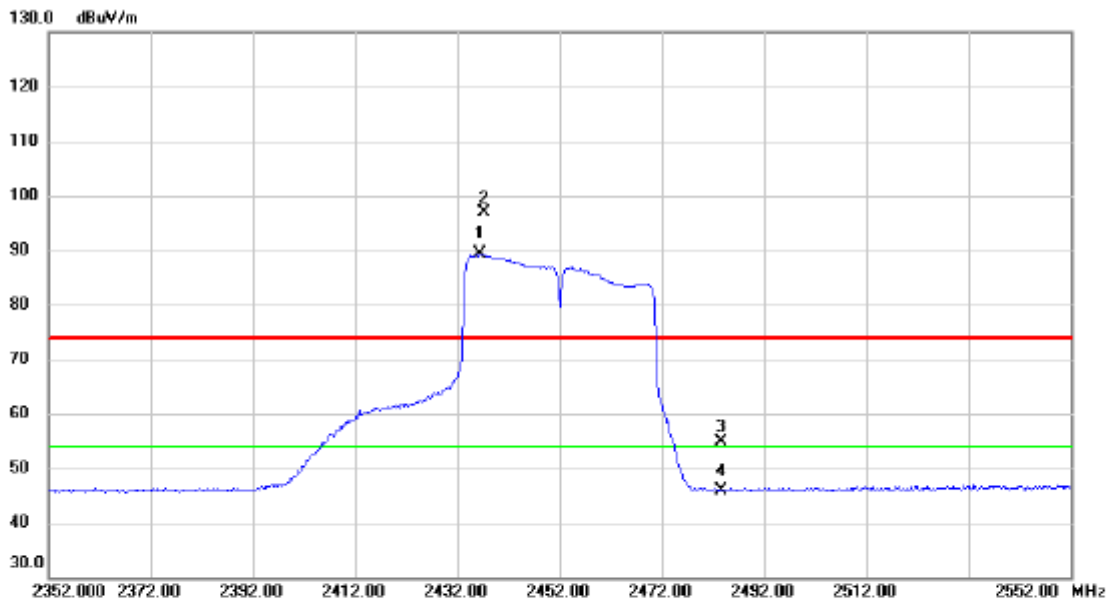


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2436.400	75.50	13.86	89.36	54.00	35.36	AVG	No Limit
2	X	2437.200	83.12	13.86	96.98	74.00	22.98	peak	No Limit
3		2483.500	40.84	13.93	54.77	74.00	-19.23	peak	
4		2483.500	32.03	13.93	45.96	54.00	-8.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz_242 Tone

Vertical

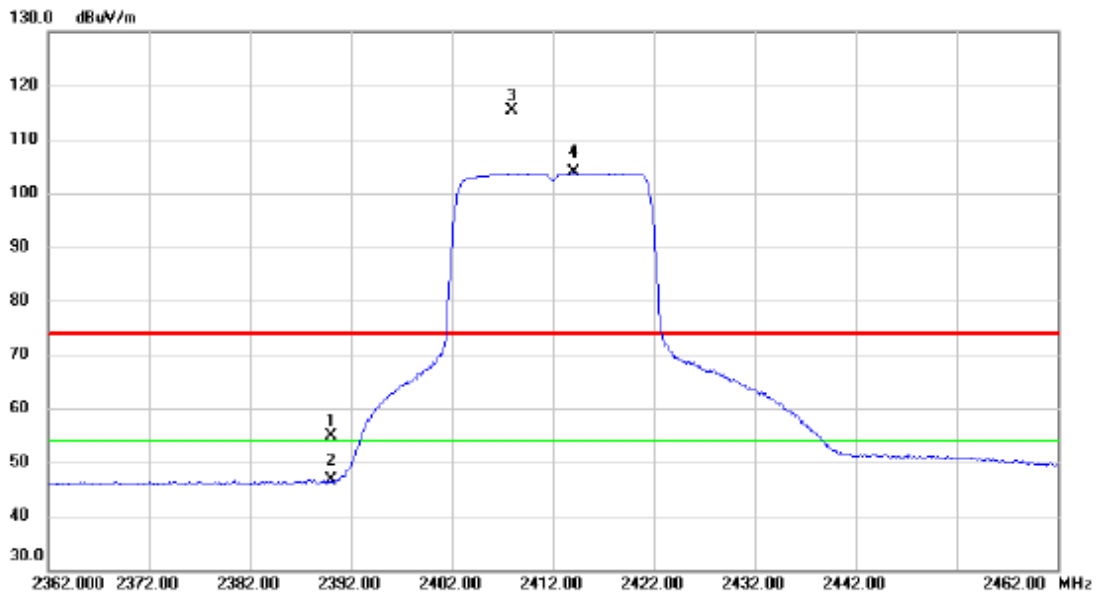


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	41.10	13.81	54.91	74.00	-19.09	peak	
2		2390.000	32.77	13.81	46.58	54.00	-7.42	AVG	
3	X	2407.900	101.55	13.82	115.37	74.00	41.37	peak	No Limit
4	*	2414.100	89.92	13.84	103.76	54.00	49.76	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz_242 Tone

Horizontal

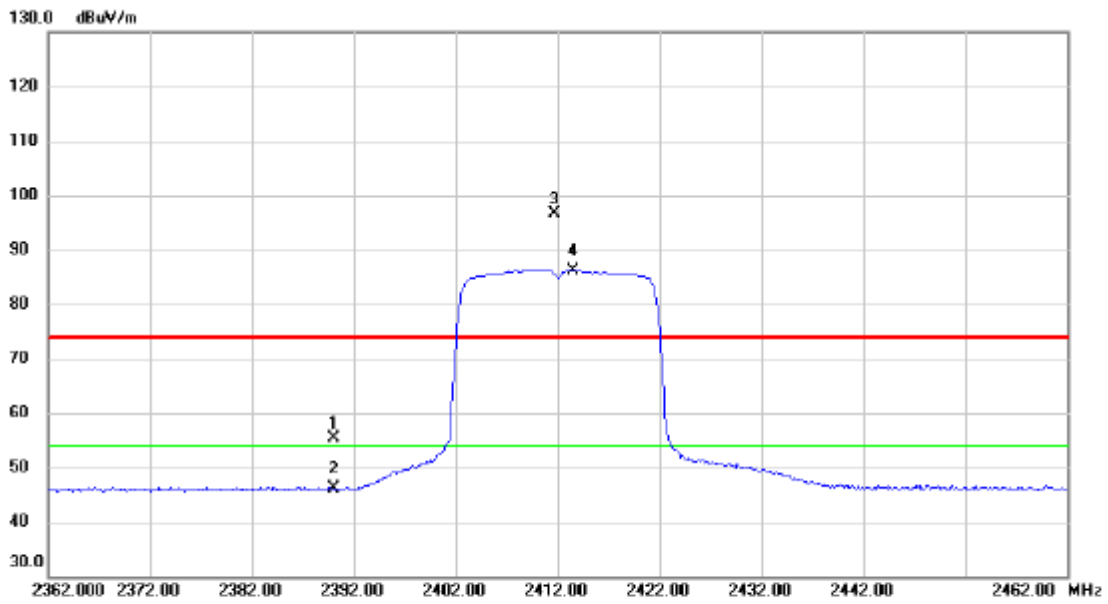


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.68	13.81	55.49	74.00	-18.51	peak	
2		2390.000	32.34	13.81	46.15	54.00	-7.85	AVG	
3	X	2411.700	82.73	13.83	96.56	74.00	22.56	peak	No Limit
4	*	2413.500	72.40	13.84	86.24	54.00	32.24	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz_242 Tone

Vertical

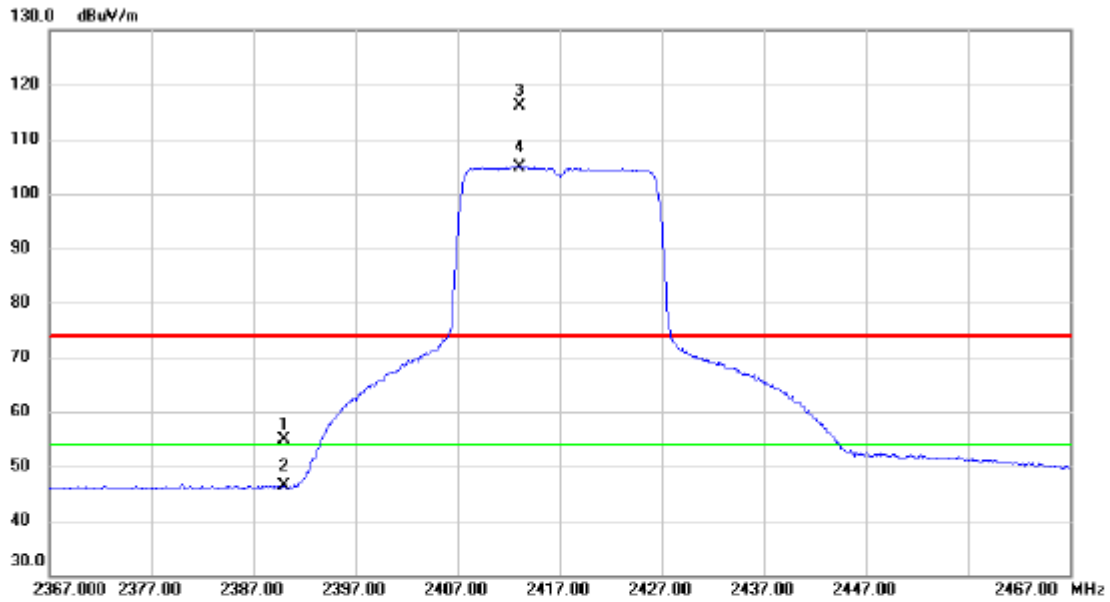


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.01	13.81	54.82	74.00	-19.18	peak	
2		2390.000	32.52	13.81	46.33	54.00	-7.67	AVG	
3	X	2413.000	102.27	13.84	116.11	74.00	42.11	peak	No Limit
4	*	2413.100	91.08	13.84	104.92	54.00	50.92	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz_242 Tone

Horizontal

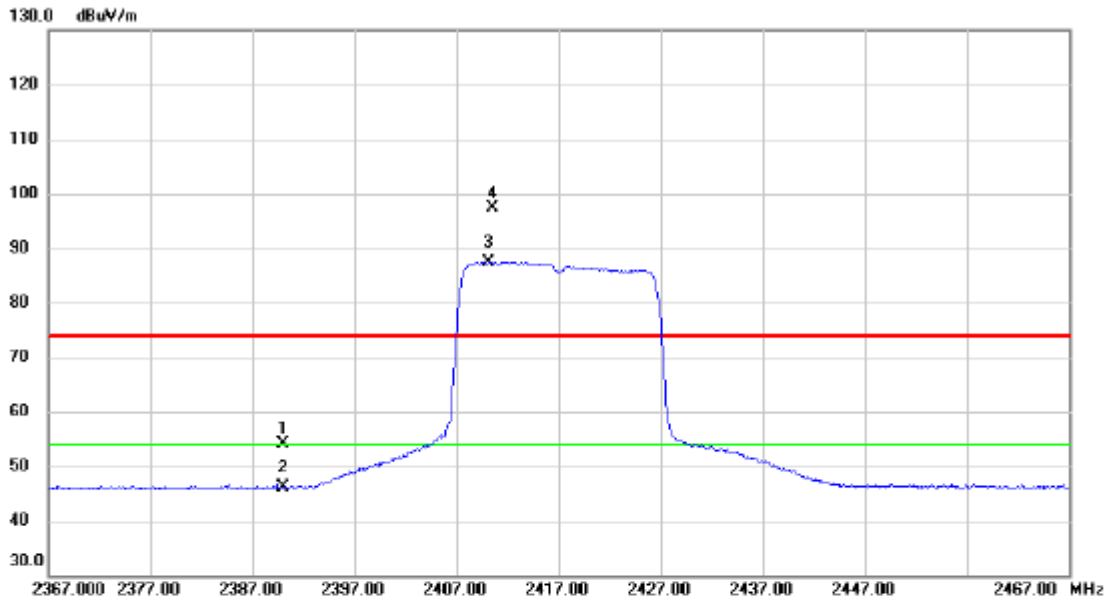


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.28	13.81	54.09	74.00	-19.91	peak	
2		2390.000	32.40	13.81	46.21	54.00	-7.79	AVG	
3	*	2410.200	73.55	13.82	87.37	54.00	33.37	AVG	No Limit
4	X	2410.600	83.58	13.82	97.40	74.00	23.40	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2422 MHz_242 Tone

Vertical

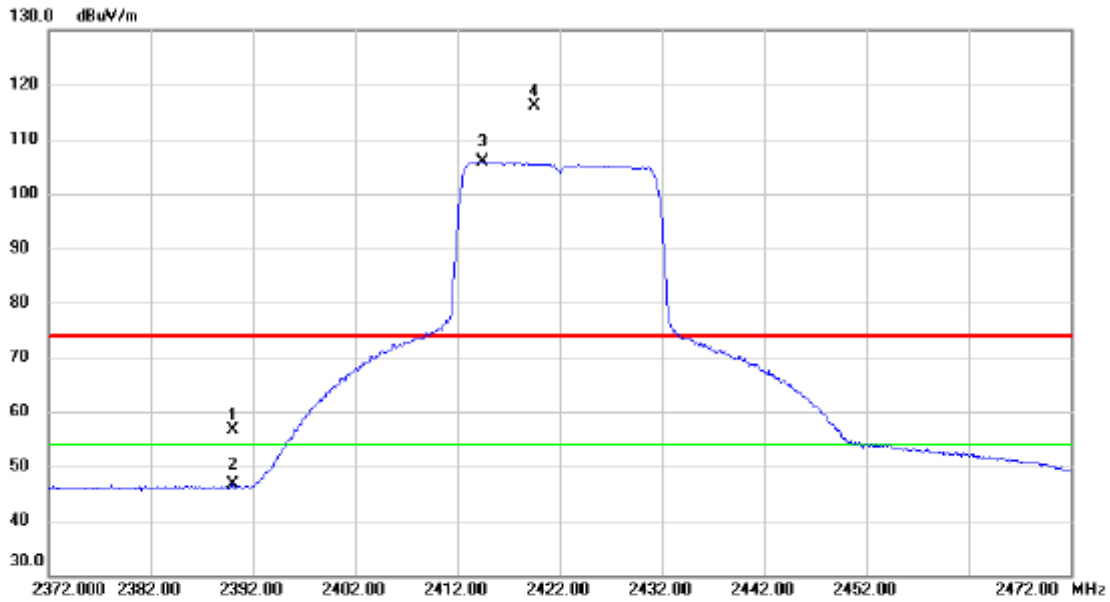


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.79	13.81	56.60	74.00	-17.40	peak	
2		2390.000	32.74	13.81	46.55	54.00	-7.45	AVG	
3	*	2414.400	92.02	13.84	105.86	54.00	51.86	AVG	No Limit
4	X	2419.600	102.39	13.84	116.23	74.00	42.23	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2422 MHz_242 Tone

Horizontal

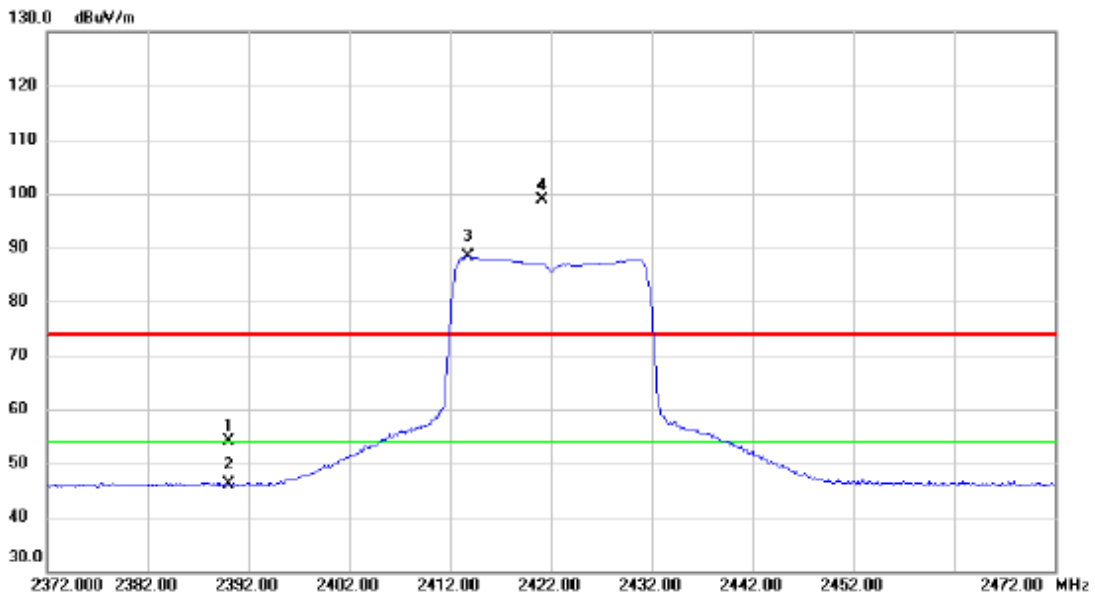


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.36	13.81	54.17	74.00	-19.83	peak	
2		2390.000	32.26	13.81	46.07	54.00	-7.93	AVG	
3	*	2413.800	74.45	13.84	88.29	54.00	34.29	AVG	No Limit
4	X	2421.100	85.03	13.85	98.88	74.00	24.88	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2427 MHz_242 Tone

Vertical

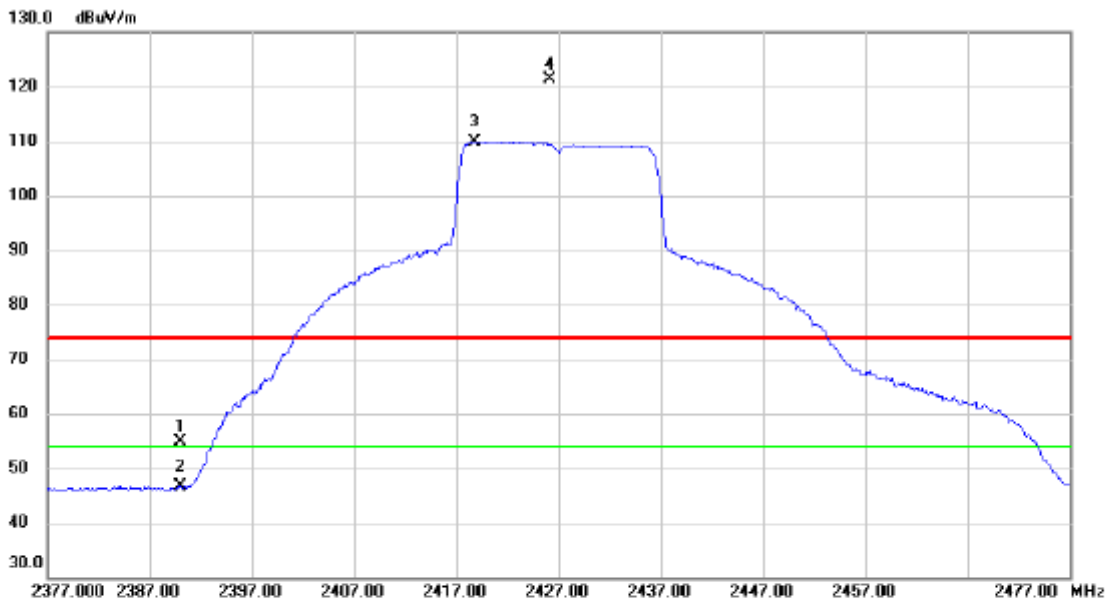


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.96	13.81	54.77	74.00	-19.23	peak	
2		2390.000	32.72	13.81	46.53	54.00	-7.47	AVG	
3	*	2418.800	96.14	13.84	109.98	54.00	55.98	AVG	No Limit
4	X	2426.100	107.53	13.85	121.38	74.00	47.38	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2427 MHz_242 Tone

Horizontal

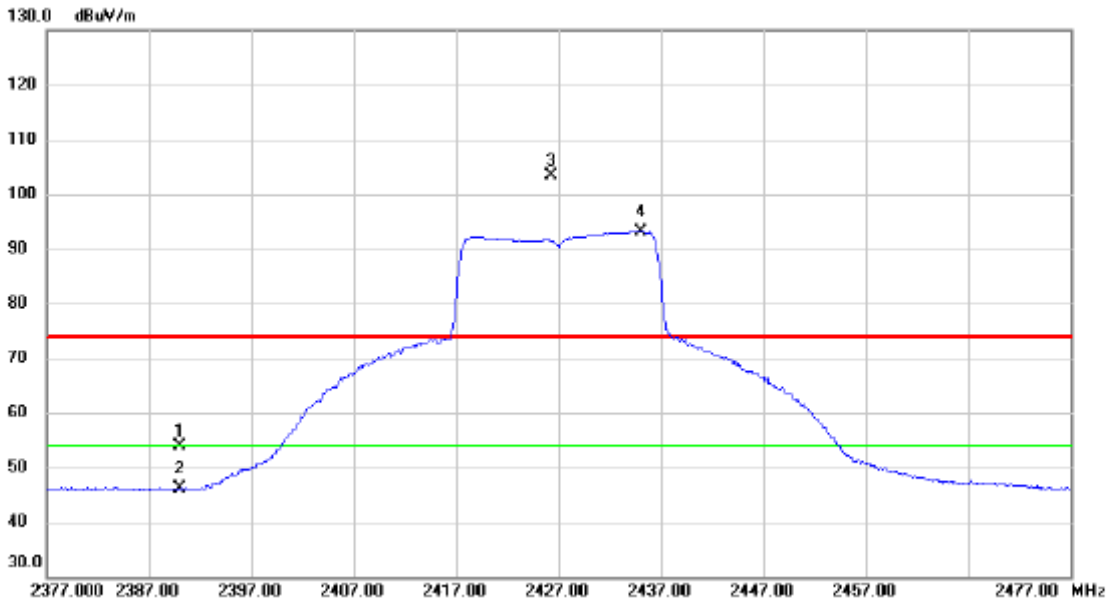


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.01	13.81	53.82	74.00	-20.18	peak	
2		2390.000	32.38	13.81	46.19	54.00	-7.81	AVG	
3	X	2426.300	89.45	13.85	103.30	74.00	29.30	peak	No Limit
4	*	2435.100	79.34	13.86	93.20	54.00	39.20	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Vertical

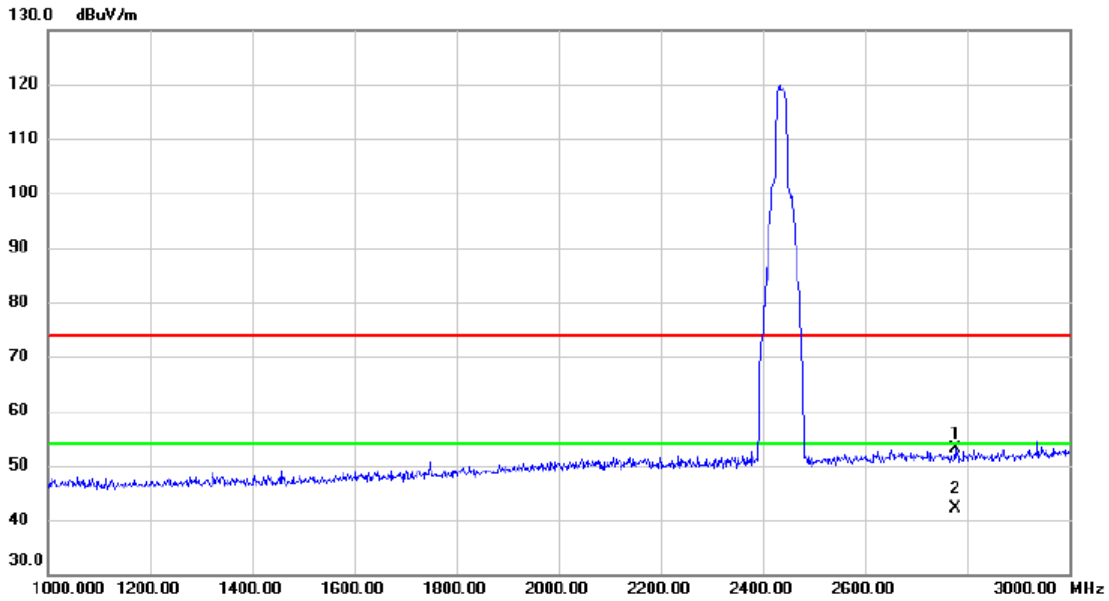

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2776.000	43.54	9.57	53.11	74.00	-20.89	peak	
2 *	2776.000	32.68	9.57	42.25	54.00	-11.75	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Vertical

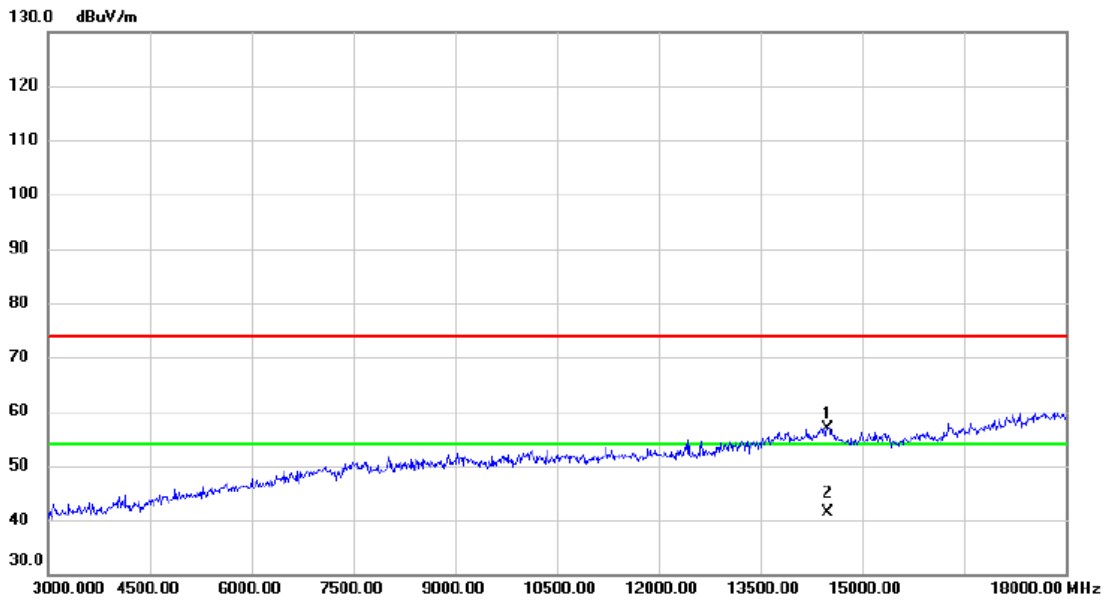


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14490.000	37.83	19.10	56.93	74.00	-17.07	peak	
2	*	14490.000	22.37	19.10	41.47	54.00	-12.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Vertical

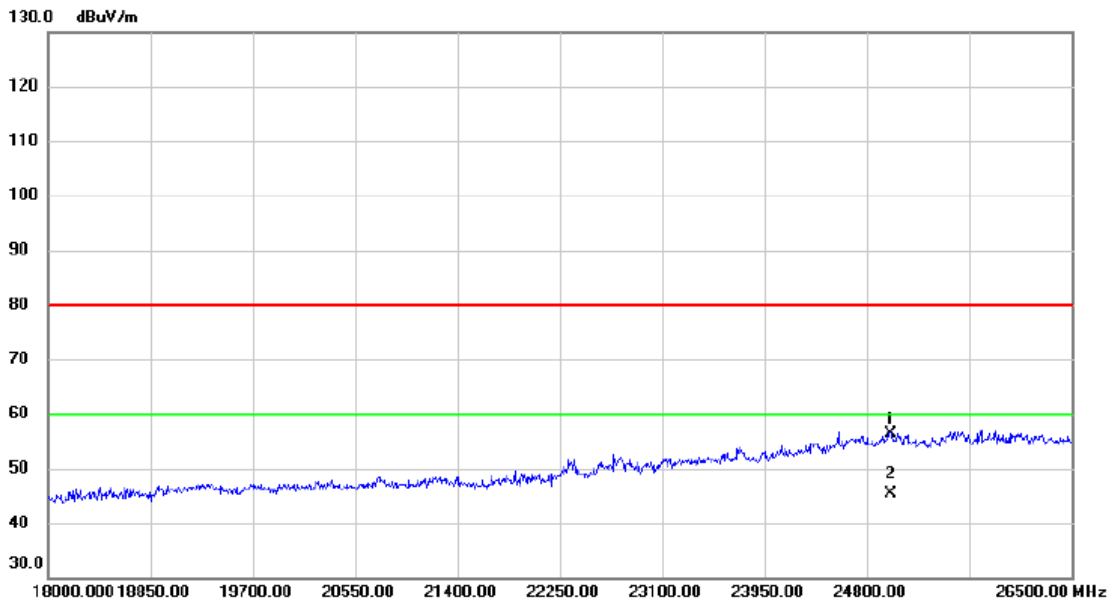


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		24995.500	25.89	30.53	56.42	80.00	-23.58	peak	
2	*	24995.500	14.90	30.53	45.43	60.00	-14.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Horizontal

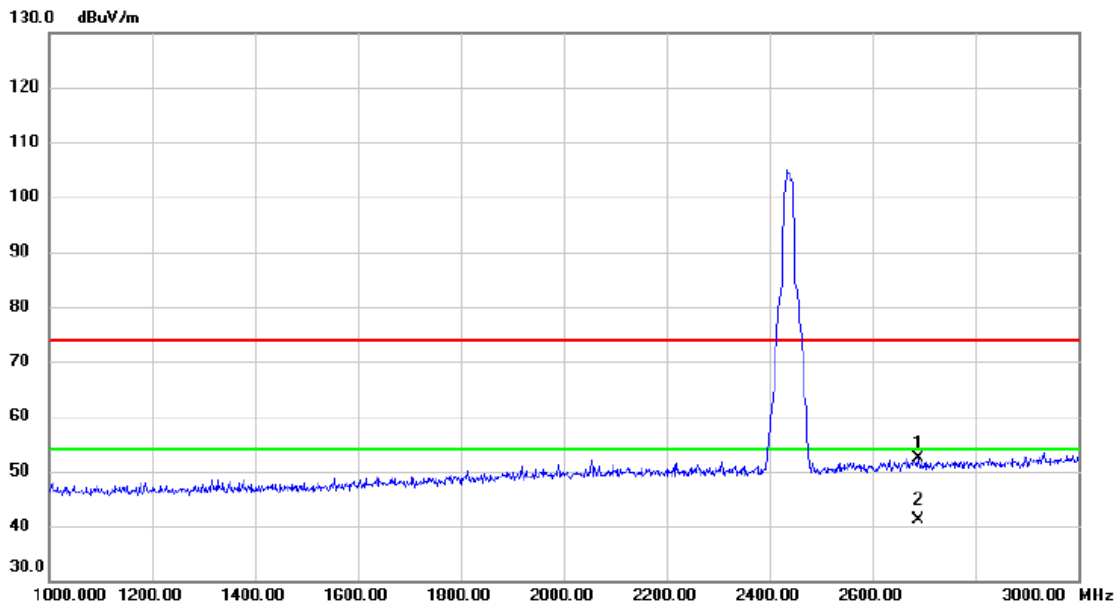

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2688.000	43.17	9.20	52.37	74.00	-21.63	peak	
2 *	2688.000	31.97	9.20	41.17	54.00	-12.83	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Horizontal

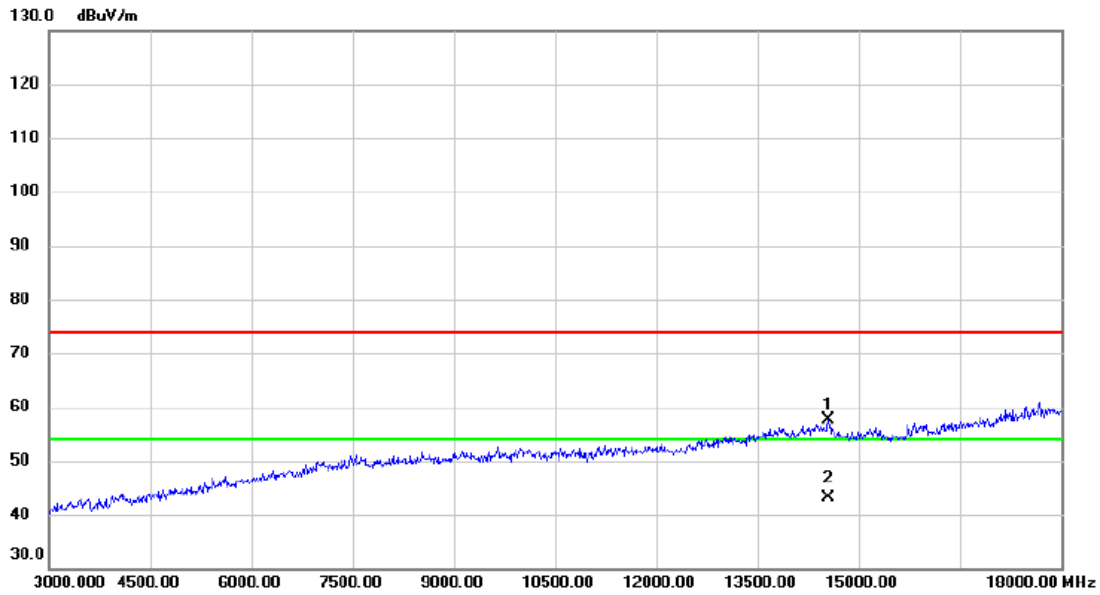


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14550.000	38.74	18.96	57.70	74.00	-16.30	peak	
2 *	14550.000	24.19	18.96	43.15	54.00	-10.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Horizontal

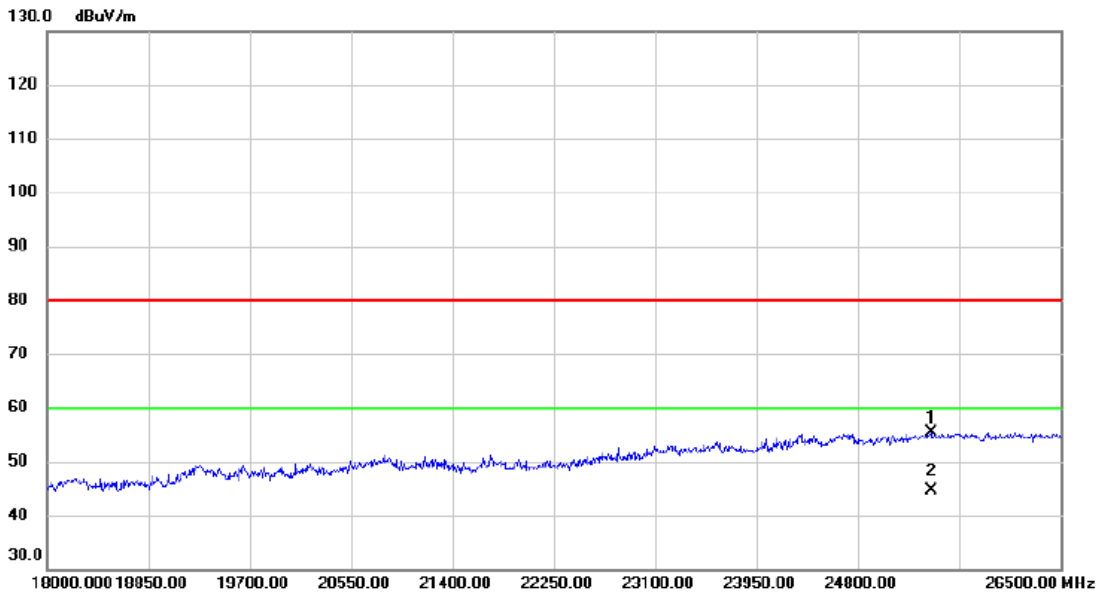


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25412.000	25.30	30.16	55.46	80.00	-24.54	peak	
2	*	25412.000	14.36	30.16	44.52	60.00	-15.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2452 MHz_242 Tone

Vertical

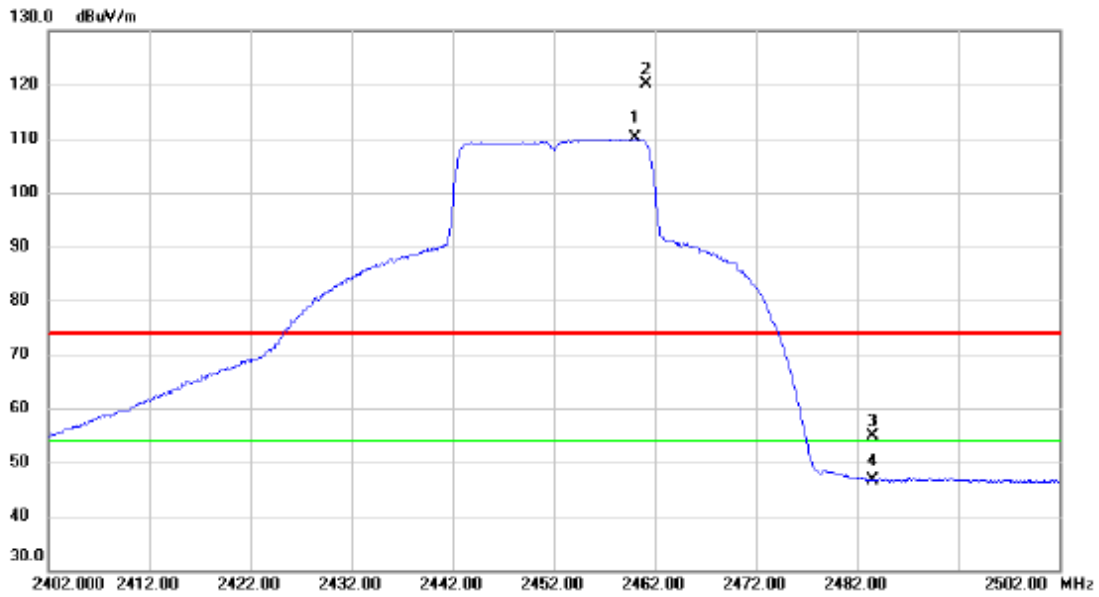


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2460.000	96.11	13.90	110.01	54.00	56.01	AVG	No Limit
2	X	2461.100	106.26	13.89	120.15	74.00	46.15	peak	No Limit
3		2483.500	40.97	13.93	54.90	74.00	-19.10	peak	
4		2483.500	32.74	13.93	46.67	54.00	-7.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2452 MHz_242 Tone

Horizontal

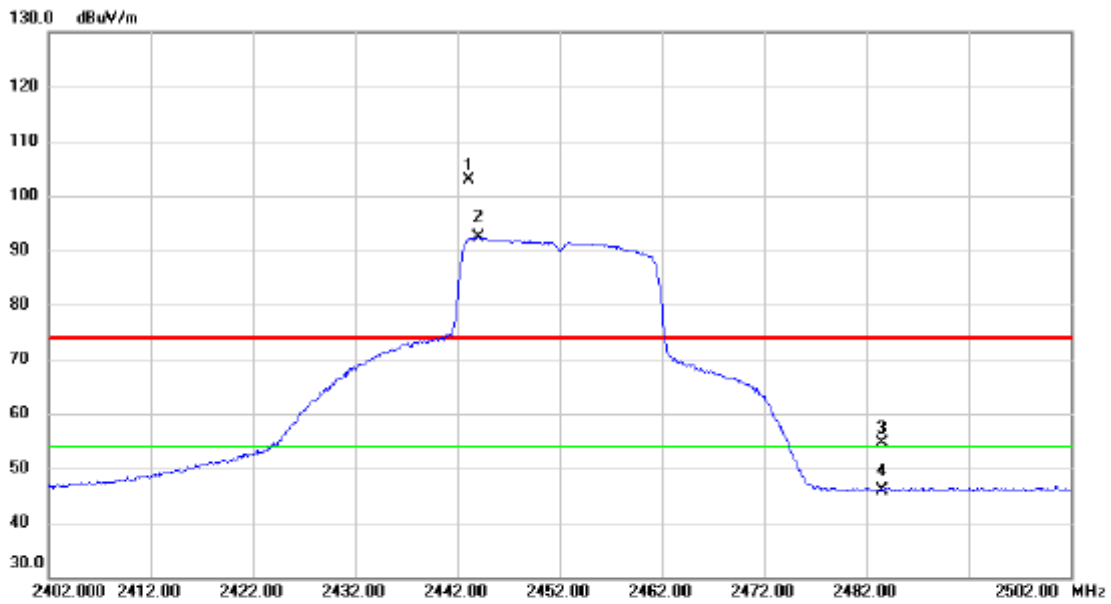


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2443.200	89.02	13.87	102.89	74.00	28.89	peak	No Limit
2	*	2444.100	78.49	13.87	92.36	54.00	38.36	AVG	No Limit
3		2483.500	40.69	13.93	54.62	74.00	-19.38	peak	
4		2483.500	32.05	13.93	45.98	54.00	-8.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz_242 Tone

Vertical

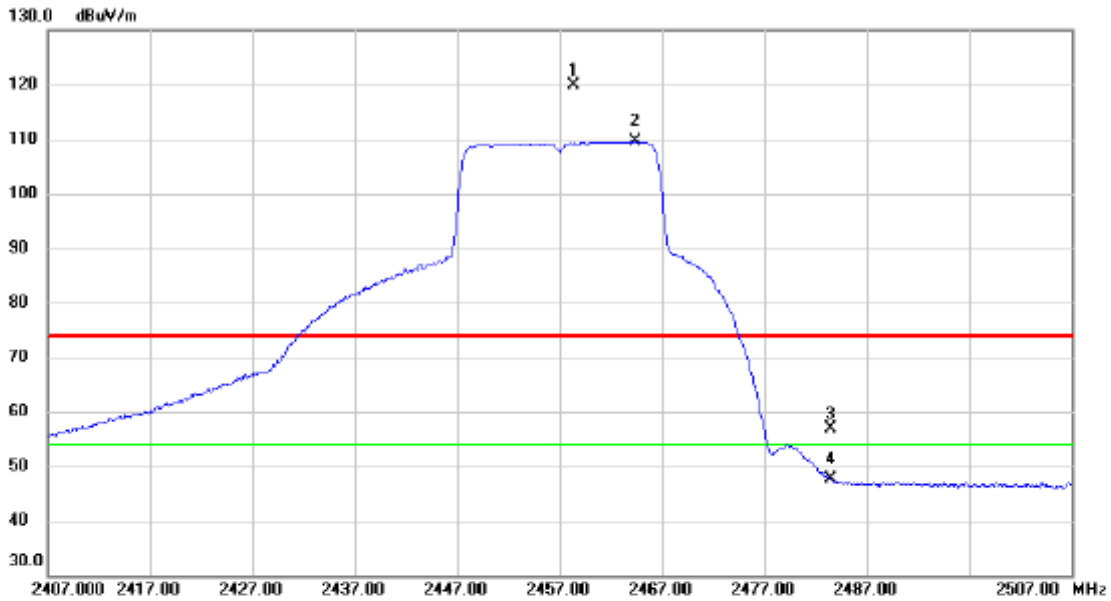


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.400	106.07	13.90	119.97	74.00	45.97	peak	No Limit
2	*	2464.400	95.66	13.90	109.56	54.00	55.56	AVG	No Limit
3		2483.500	42.86	13.93	56.79	74.00	-17.21	peak	
4		2483.500	33.67	13.93	47.60	54.00	-6.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz_242 Tone

Horizontal

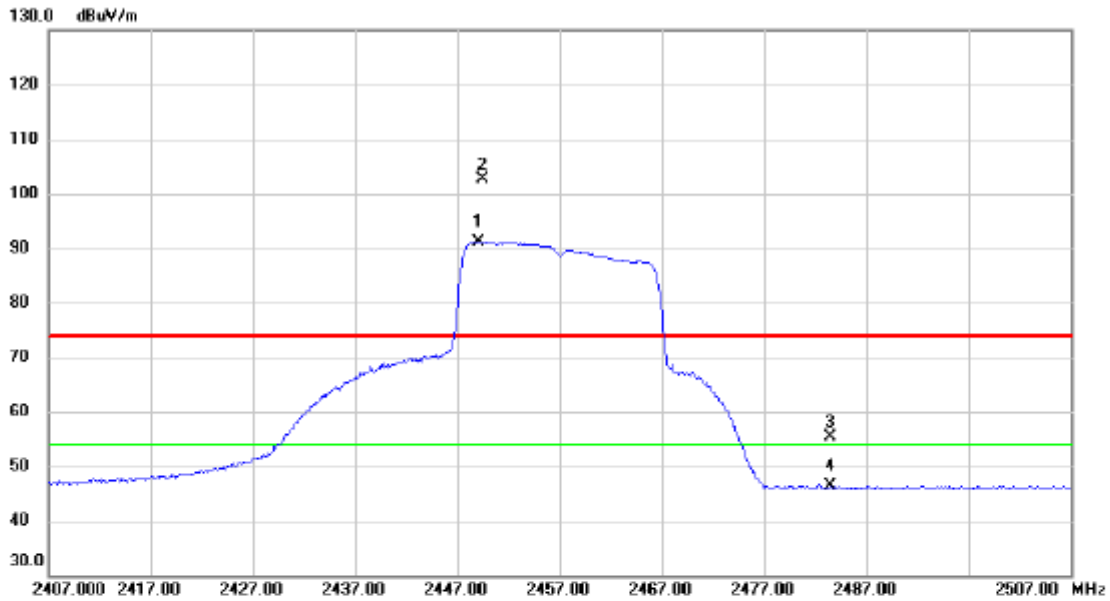


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2449.000	77.19	13.88	91.07	54.00	37.07	AVG	No Limit
2	X	2449.500	88.76	13.88	102.64	74.00	28.64	peak	No Limit
3		2483.500	41.35	13.93	55.28	74.00	-18.72	peak	
4		2483.500	32.39	13.93	46.32	54.00	-7.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz_242 Tone

Vertical

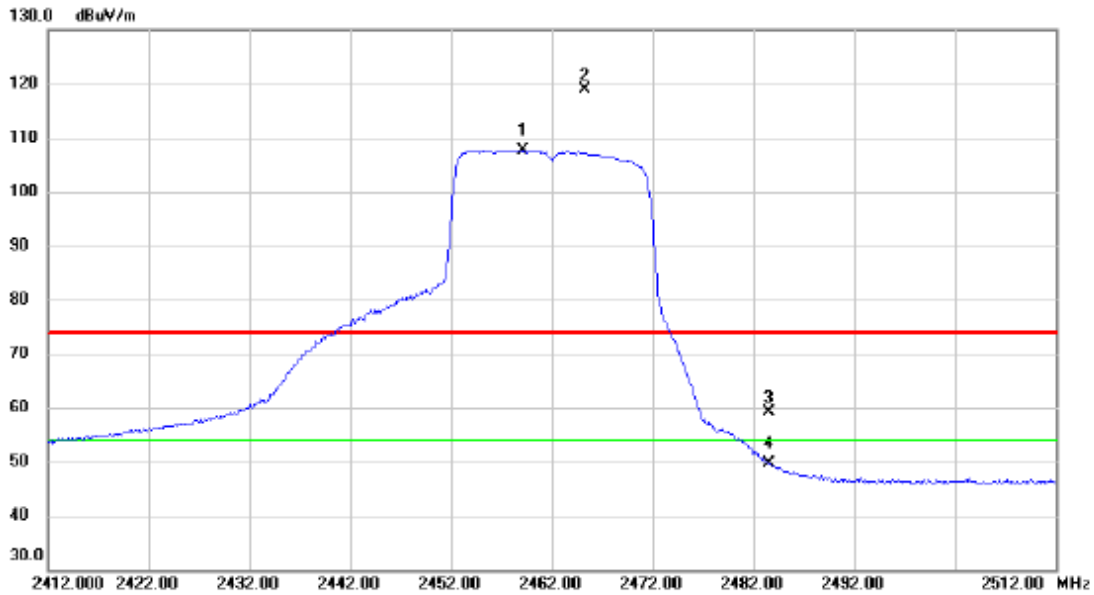


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.100	93.71	13.90	107.61	54.00	53.61	AVG	No Limit
2	X	2465.300	105.10	13.90	119.00	74.00	45.00	peak	No Limit
3		2483.500	45.21	13.93	59.14	74.00	-14.86	peak	
4		2483.500	35.68	13.93	49.61	54.00	-4.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz_242 Tone

Horizontal

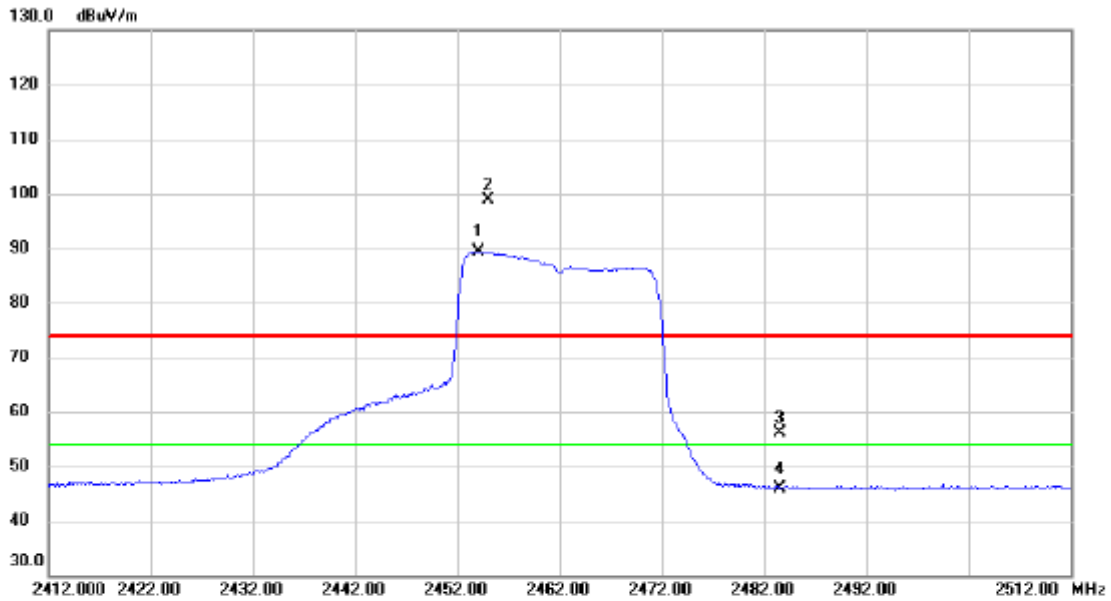


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.100	75.53	13.88	89.41	54.00	35.41	AVG	No Limit
2	X	2455.000	85.08	13.89	98.97	74.00	24.97	peak	No Limit
3		2483.500	42.28	13.93	56.21	74.00	-17.79	peak	
4		2483.500	32.02	13.93	45.95	54.00	-8.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz_484 Tone

Vertical

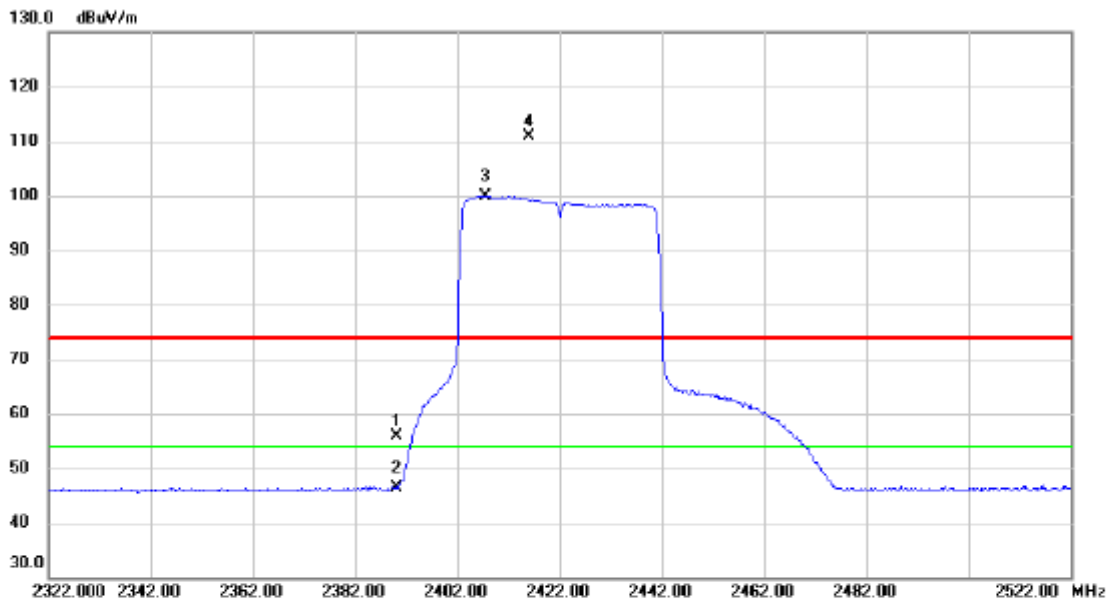


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.10	13.81	55.91	74.00	-18.09	peak	
2		2390.000	32.54	13.81	46.35	54.00	-7.65	AVG	
3	*	2407.400	86.10	13.83	99.93	54.00	45.93	AVG	No Limit
4	X	2416.000	97.03	13.84	110.87	74.00	36.87	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz_484 Tone

Horizontal

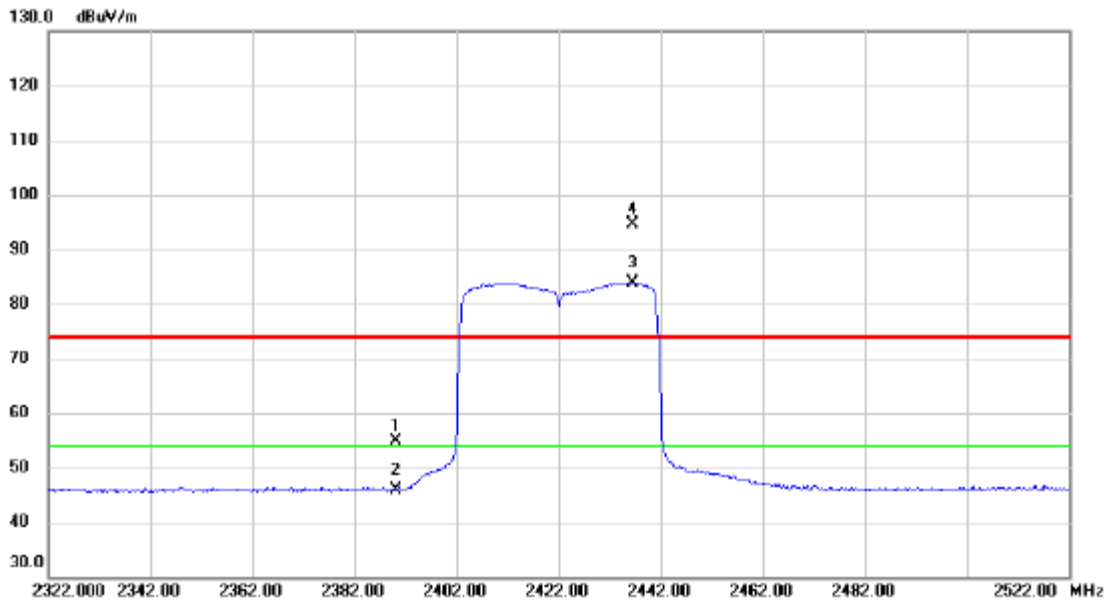


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.05	13.81	54.86	74.00	-19.14	peak	
2		2390.000	32.14	13.81	45.95	54.00	-8.05	AVG	
3	*	2436.400	70.11	13.86	83.97	54.00	29.97	AVG	No Limit
4	X	2436.600	80.77	13.86	94.63	74.00	20.63	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427MHz_484 Tone

Vertical

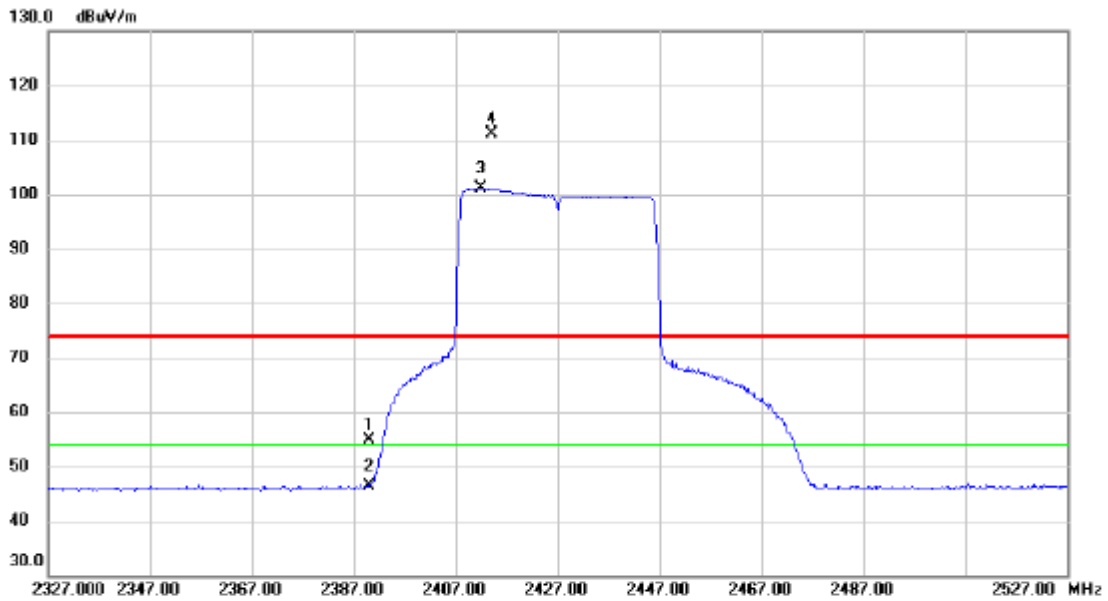


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.04	13.81	54.85	74.00	-19.15	peak	
2		2390.000	32.57	13.81	46.38	54.00	-7.62	AVG	
3	*	2412.000	87.37	13.83	101.20	54.00	47.20	AVG	No Limit
4	X	2414.200	97.35	13.84	111.19	74.00	37.19	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427MHz_484 Tone

Horizontal

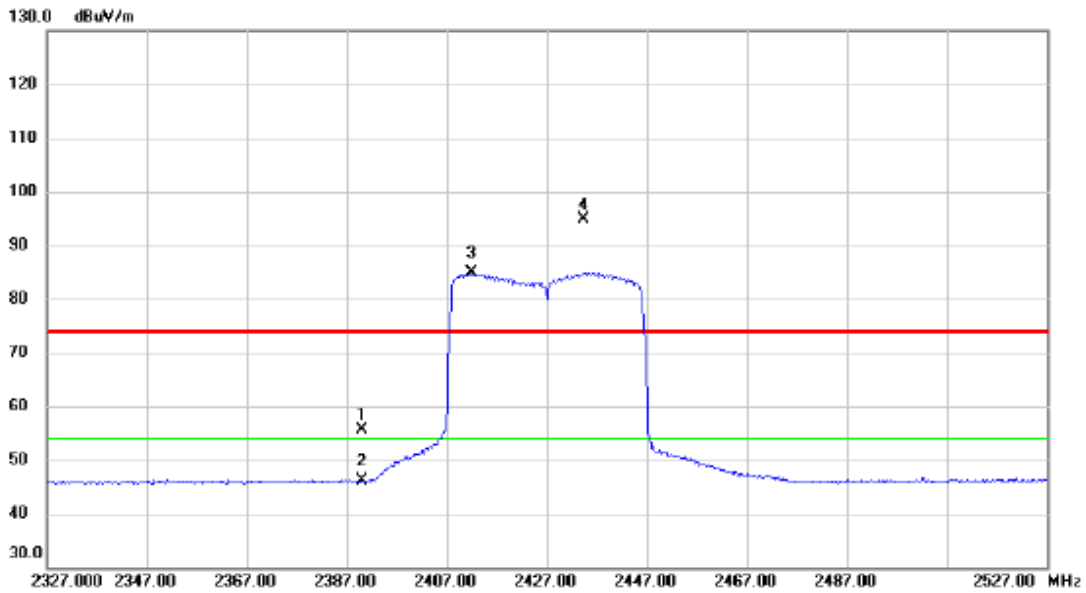


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.87	13.81	55.68	74.00	-18.32	peak	
2		2390.000	32.30	13.81	46.11	54.00	-7.89	AVG	
3	*	2412.000	71.03	13.83	84.86	54.00	30.86	AVG	No Limit
4	X	2434.400	81.14	13.86	95.00	74.00	21.00	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2432MHz_484 Tone

Vertical

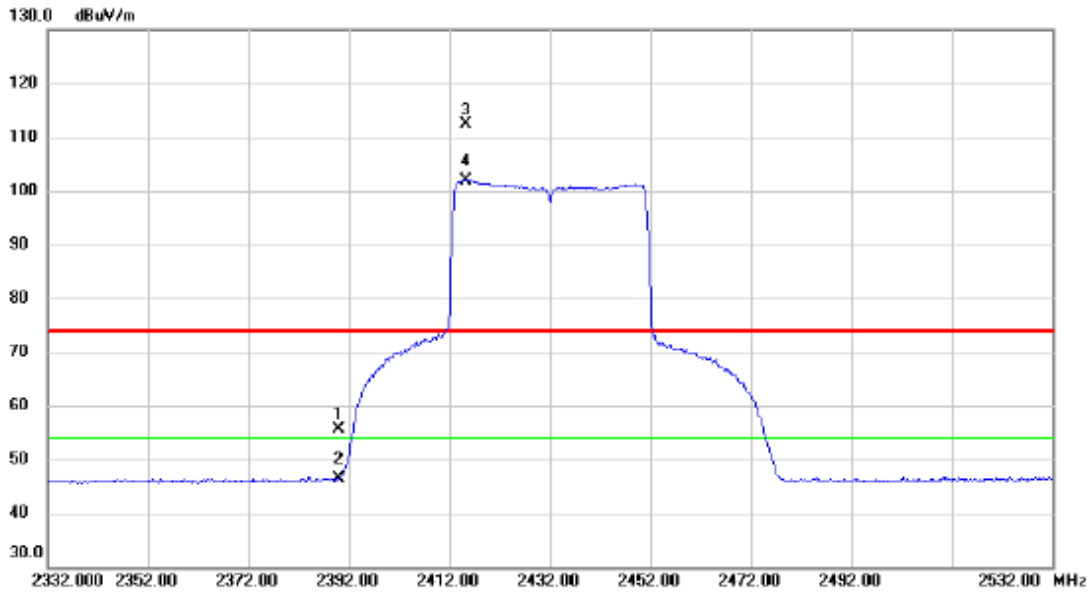


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.94	13.81	55.75	74.00	-18.25	peak	
2		2390.000	32.49	13.81	46.30	54.00	-7.70	AVG	
3	X	2415.400	98.61	13.84	112.45	74.00	38.45	peak	No Limit
4	*	2415.400	88.16	13.84	102.00	54.00	48.00	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2432MHz_484 Tone

Horizontal

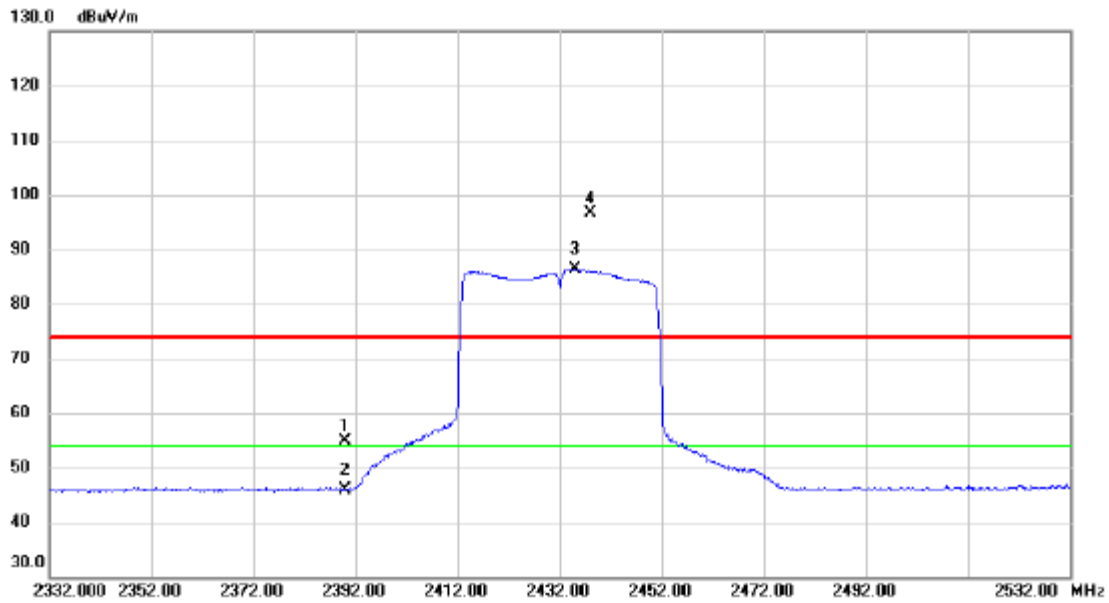


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	41.17	13.81	54.98	74.00	-19.02	peak	
2		2390.000	32.19	13.81	46.00	54.00	-8.00	AVG	
3	*	2435.000	72.43	13.86	86.29	54.00	32.29	AVG	No Limit
4	X	2438.000	82.71	13.87	96.58	74.00	22.58	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Vertical

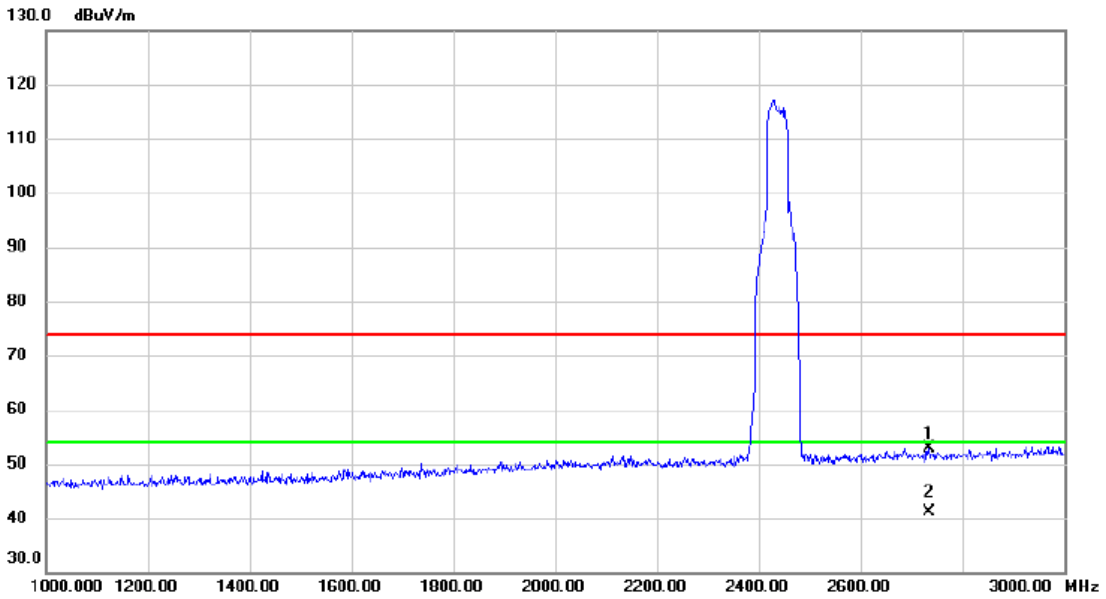


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2734.000	43.60	9.39	52.99	74.00	-21.01	peak	
2 *	2734.000	31.76	9.39	41.15	54.00	-12.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Vertical

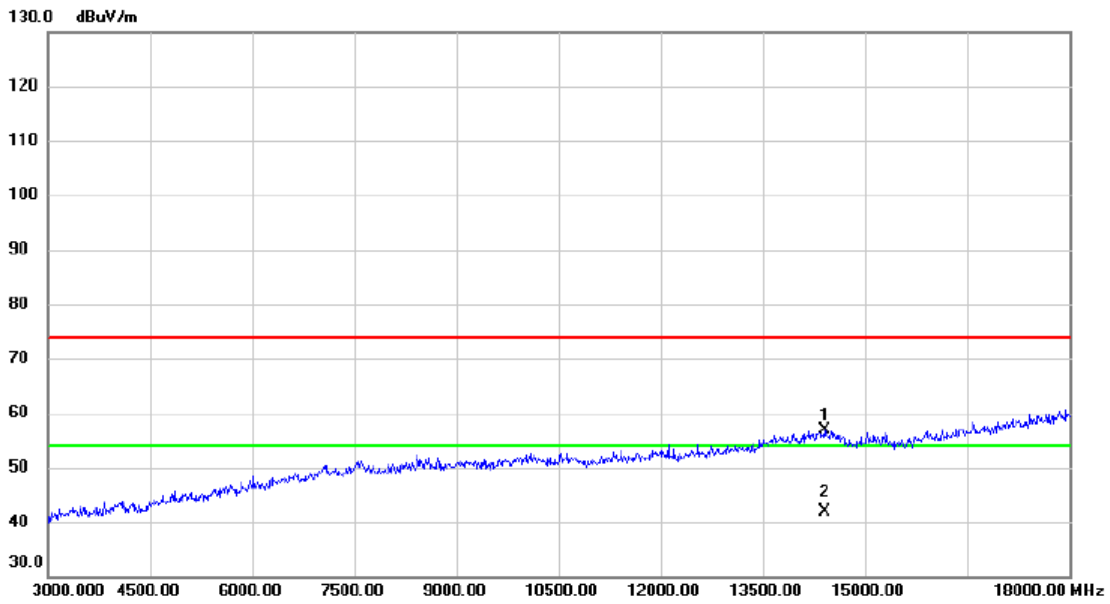

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14400.000	37.85	19.13	56.98	74.00	-17.02	peak	
2	*	14400.000	22.72	19.13	41.85	54.00	-12.15	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Vertical

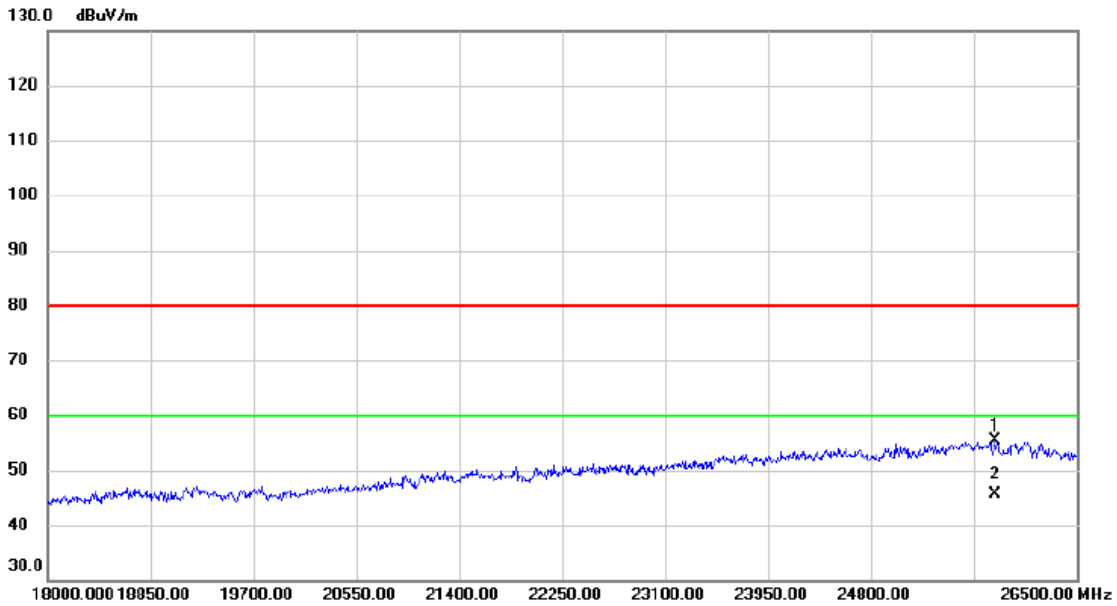

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25820.000	25.19	30.29	55.48	80.00	-24.52	peak	
2 *	25820.000	15.32	30.29	45.61	60.00	-14.39	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Horizontal

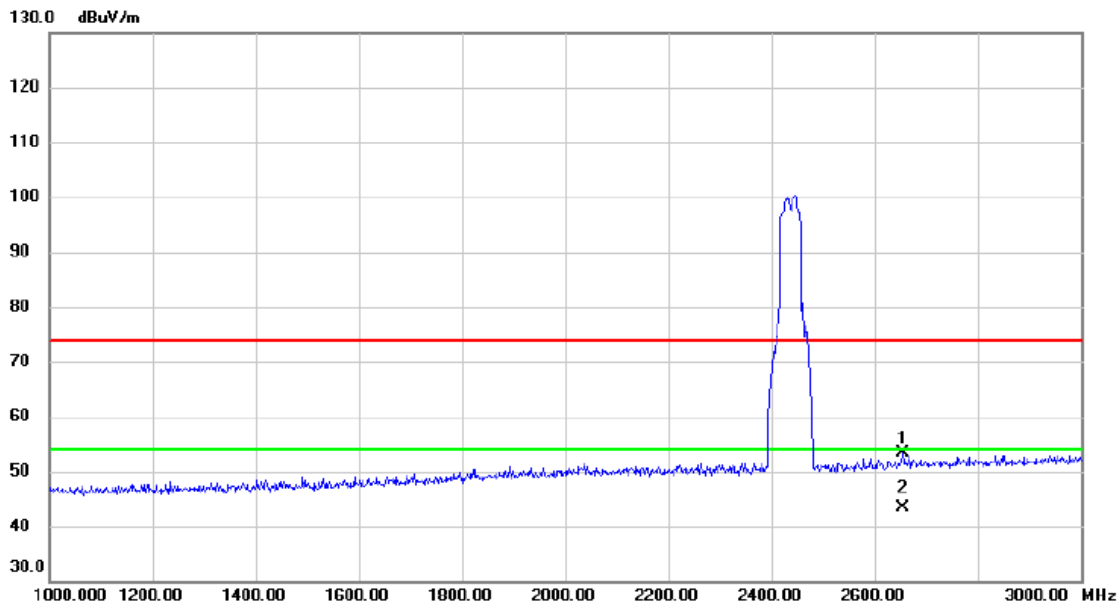

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2654.000	44.40	9.05	53.45	74.00	-20.55	peak	
2	*	2654.000	34.24	9.05	43.29	54.00	-10.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14400.000	38.08	19.13	57.21	74.00	-16.79	peak	
2	*	14400.000	23.72	19.13	42.85	54.00	-11.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Horizontal

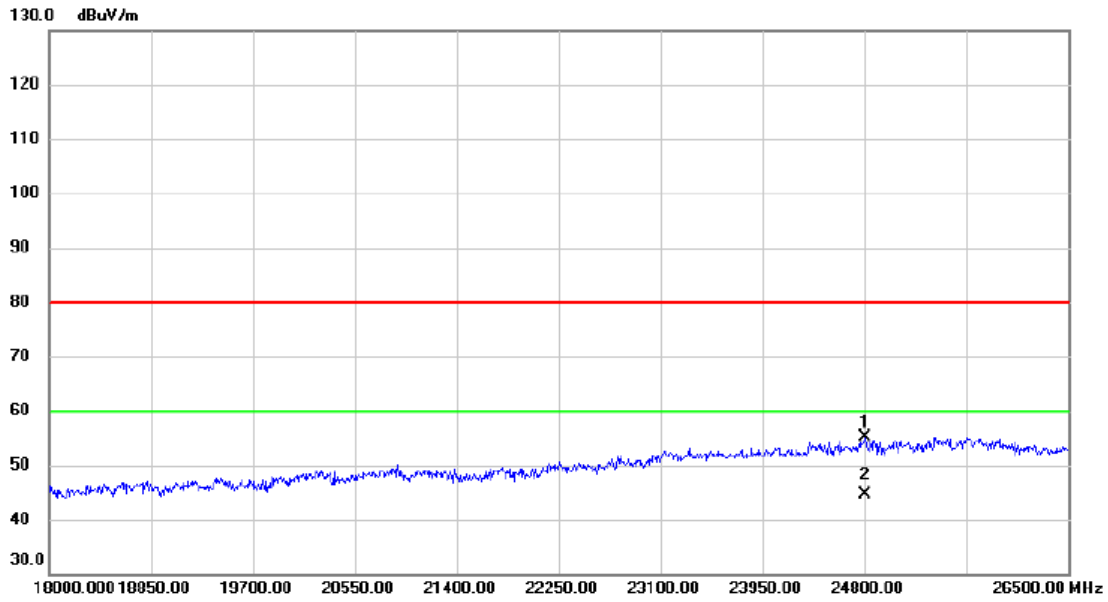


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		24808.500	24.97	30.27	55.24	80.00	-24.76	peak	
2	*	24808.500	14.27	30.27	44.54	60.00	-15.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz_484 Tone

Vertical

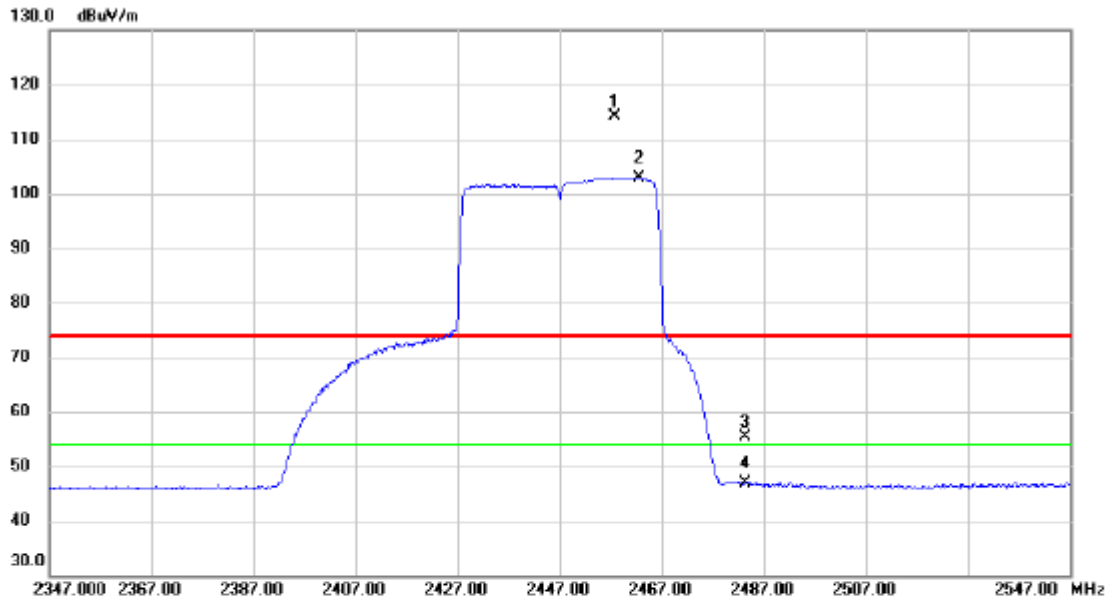


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2457.800	100.21	13.90	114.11	74.00	40.11	peak	No Limit
2	*	2462.600	89.03	13.90	102.93	54.00	48.93	AVG	No Limit
3		2483.500	41.50	13.93	55.43	74.00	-18.57	peak	
4		2483.500	32.99	13.93	46.92	54.00	-7.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz_484 Tone

Horizontal

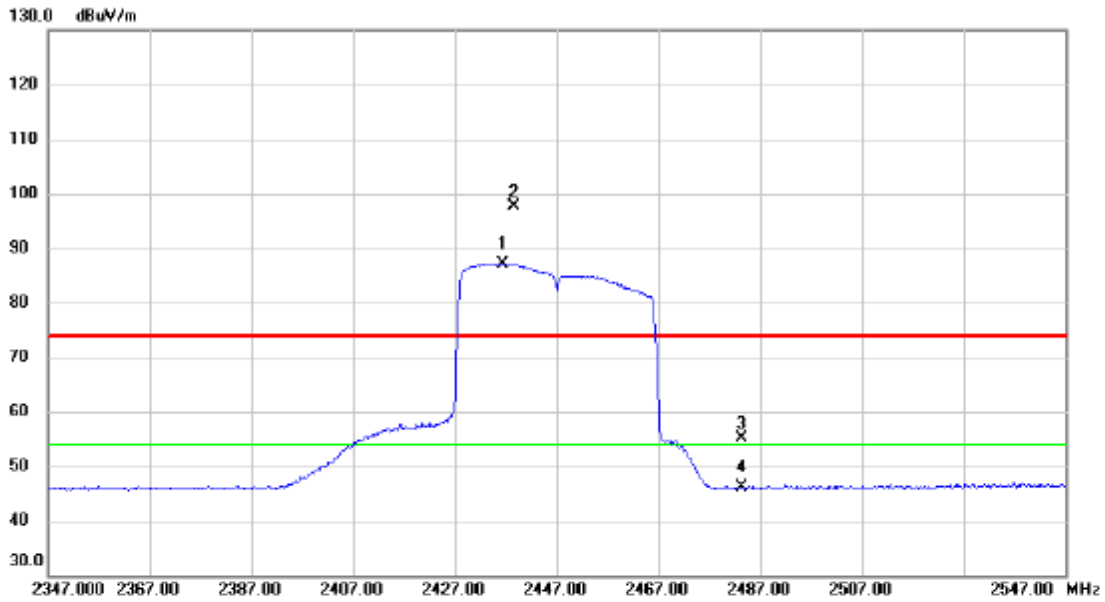


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2436.600	73.36	13.86	87.22	54.00	33.22	AVG	No Limit
2	X	2438.600	83.69	13.87	97.56	74.00	23.56	peak	No Limit
3		2483.500	41.09	13.93	55.02	74.00	-18.98	peak	
4		2483.500	32.14	13.93	46.07	54.00	-7.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz_484 Tone

Vertical

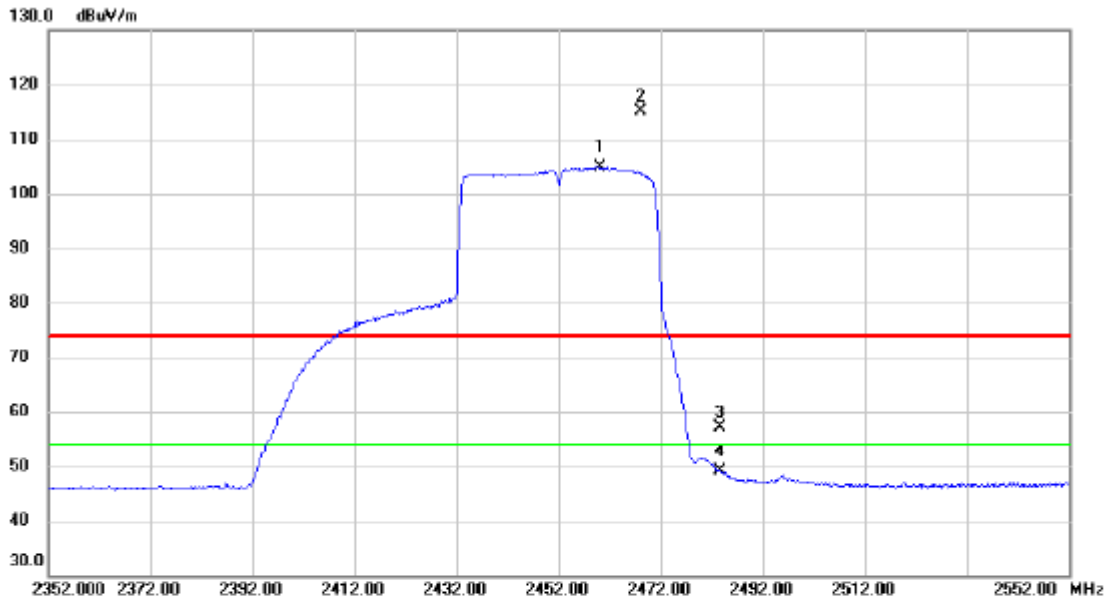


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2460.000	90.93	13.90	104.83	54.00	50.83	AVG	No Limit
2	X	2468.200	101.12	13.90	115.02	74.00	41.02	peak	No Limit
3		2483.500	43.28	13.93	57.21	74.00	-16.79	peak	
4		2483.500	35.32	13.93	49.25	54.00	-4.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz_484 Tone

Horizontal

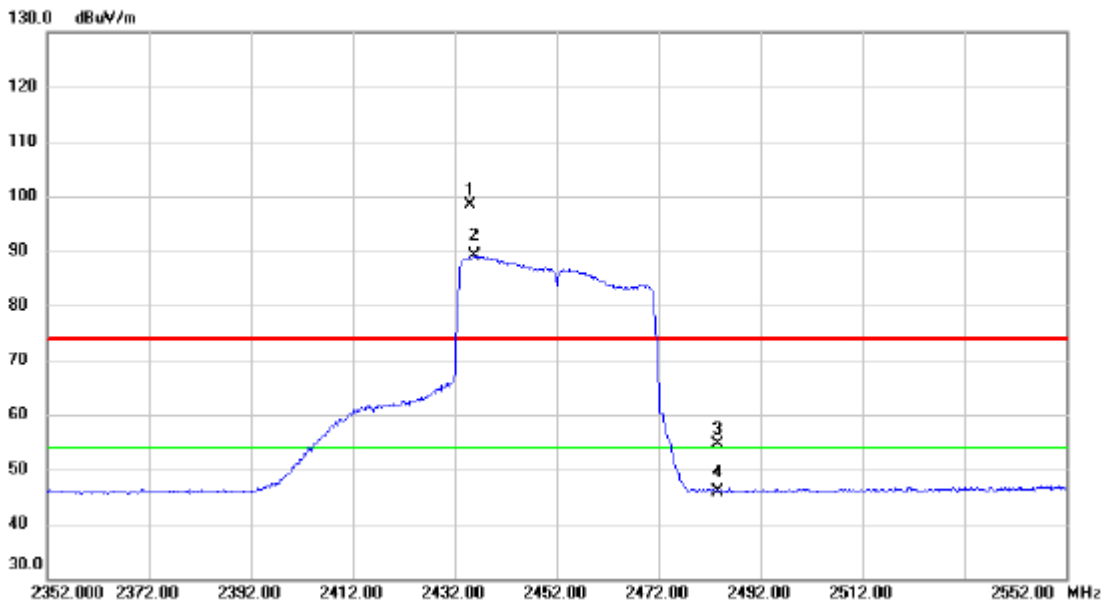

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2435.000	84.60	13.86	98.46	74.00	24.46	peak	No Limit
2	*	2435.800	75.21	13.86	89.07	54.00	35.07	AVG	No Limit
3		2483.500	40.78	13.93	54.71	74.00	-19.29	peak	
4		2483.500	32.00	13.93	45.93	54.00	-8.07	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

SISO 2

Test Mode: TX G Mode 2412 MHz

Vertical

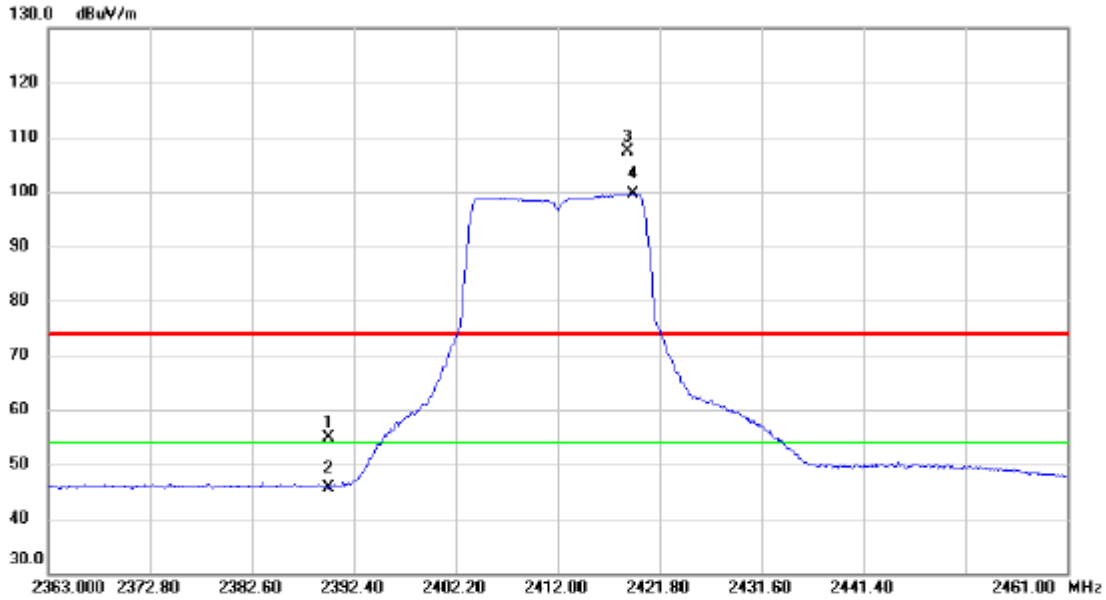

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.11	13.81	54.92	74.00	-19.08	peak	
2		2390.000	31.93	13.81	45.74	54.00	-8.26	AVG	
3	X	2418.762	93.64	13.84	107.48	74.00	33.48	peak	No Limit
4	*	2419.252	85.89	13.84	99.73	54.00	45.73	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

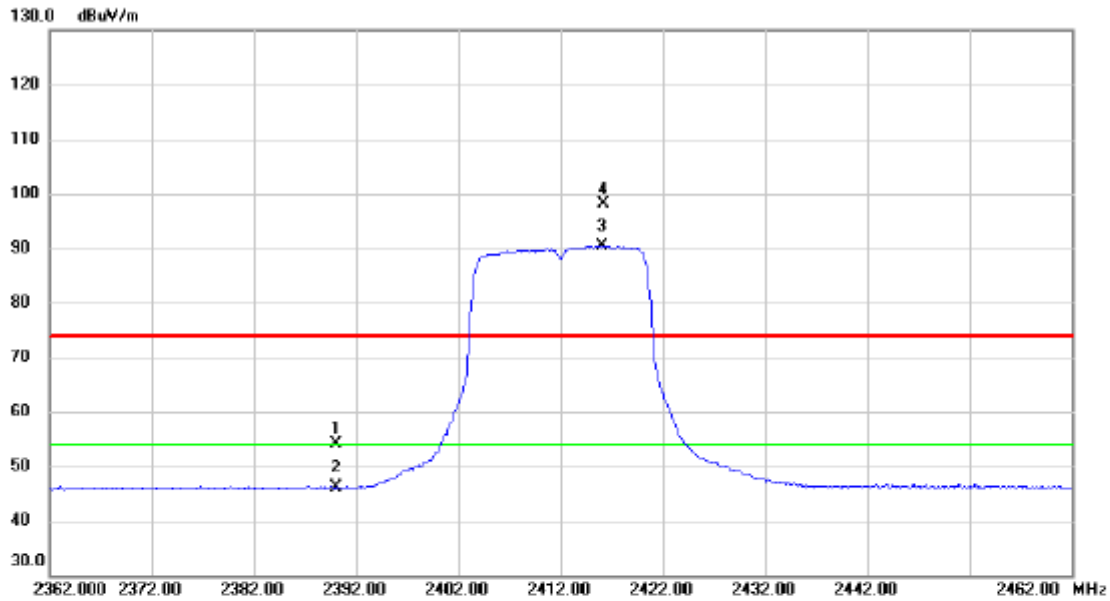


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.21	13.81	54.02	74.00	-19.98	peak	
2		2390.000	32.44	13.81	46.25	54.00	-7.75	AVG	
3	*	2416.100	76.58	13.84	90.42	54.00	36.42	AVG	No Limit
4	X	2416.200	84.21	13.84	98.05	74.00	24.05	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2417 MHz

Vertical

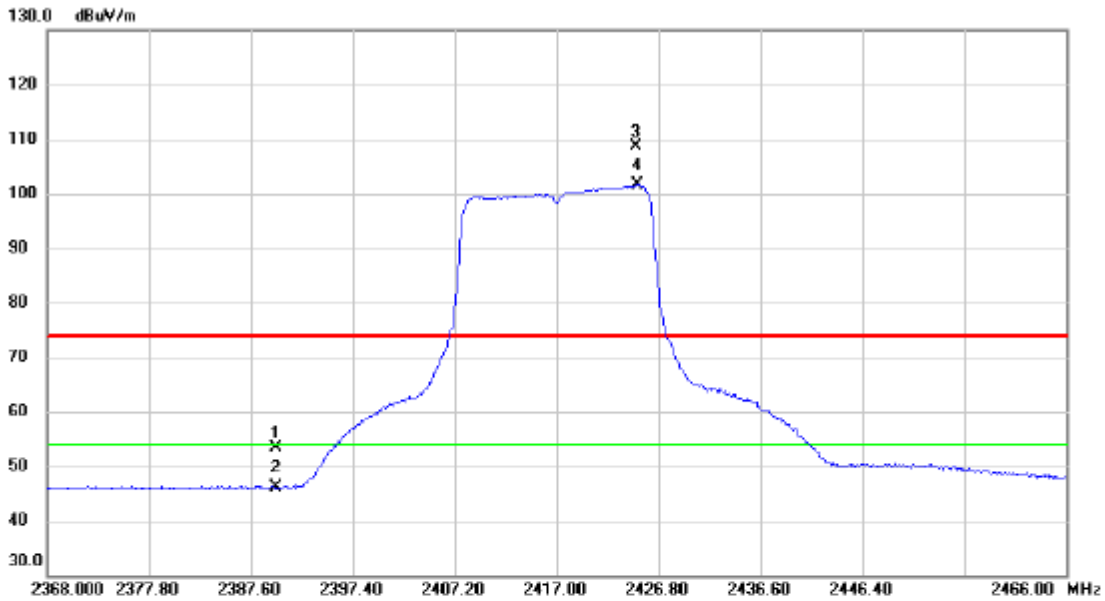


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.63	13.81	53.44	74.00	-20.56	peak	
2		2390.000	32.23	13.81	46.04	54.00	-7.96	AVG	
3	X	2424.644	94.66	13.85	108.51	74.00	34.51	peak	No Limit
4	*	2424.742	87.76	13.85	101.61	54.00	47.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2417 MHz

Horizontal

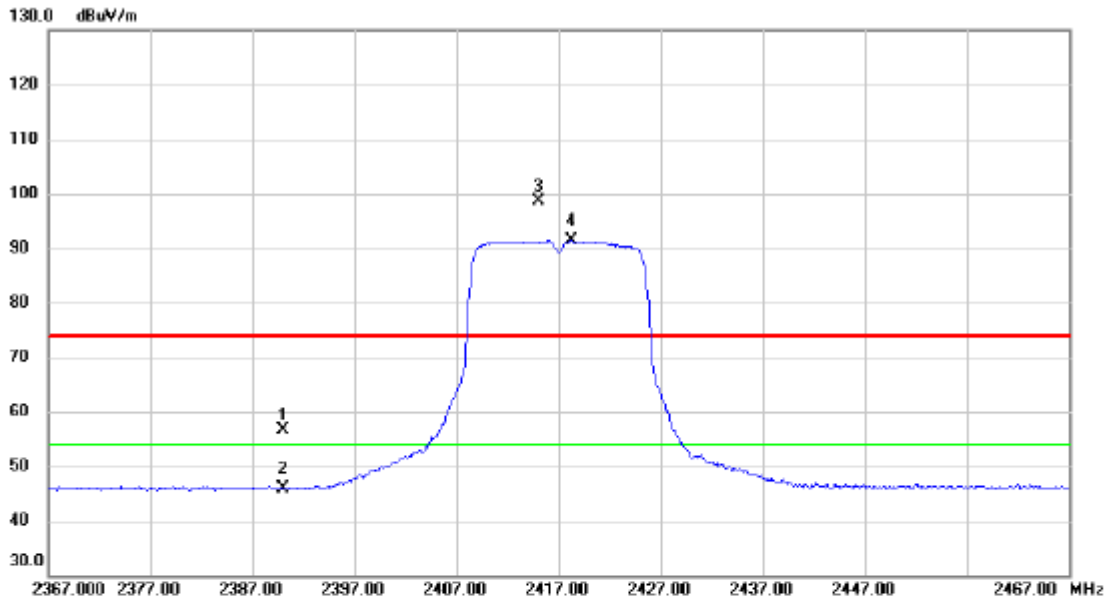


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.85	13.81	56.66	74.00	-17.34	peak	
2		2390.000	32.09	13.81	45.90	54.00	-8.10	AVG	
3	X	2415.100	84.80	13.84	98.64	74.00	24.64	peak	No Limit
4	*	2418.300	77.48	13.84	91.32	54.00	37.32	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2422 MHz

Vertical

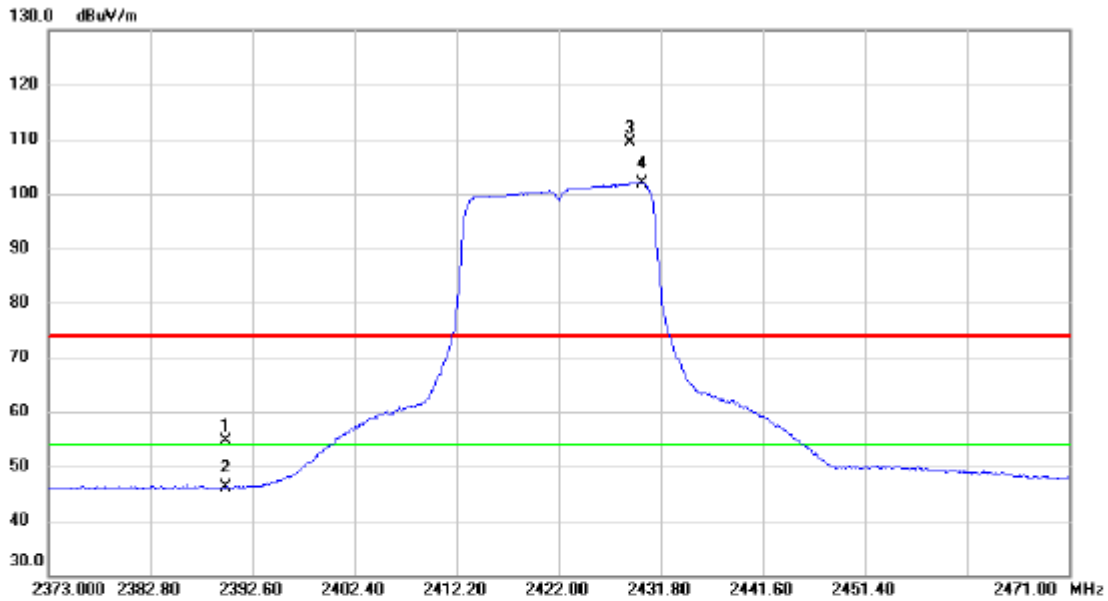


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.79	13.81	54.60	74.00	-19.40	peak	
2		2390.000	32.42	13.81	46.23	54.00	-7.77	AVG	
3	X	2428.860	95.61	13.85	109.46	74.00	35.46	peak	No Limit
4	*	2430.036	88.13	13.86	101.99	54.00	47.99	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2422 MHz

Horizontal

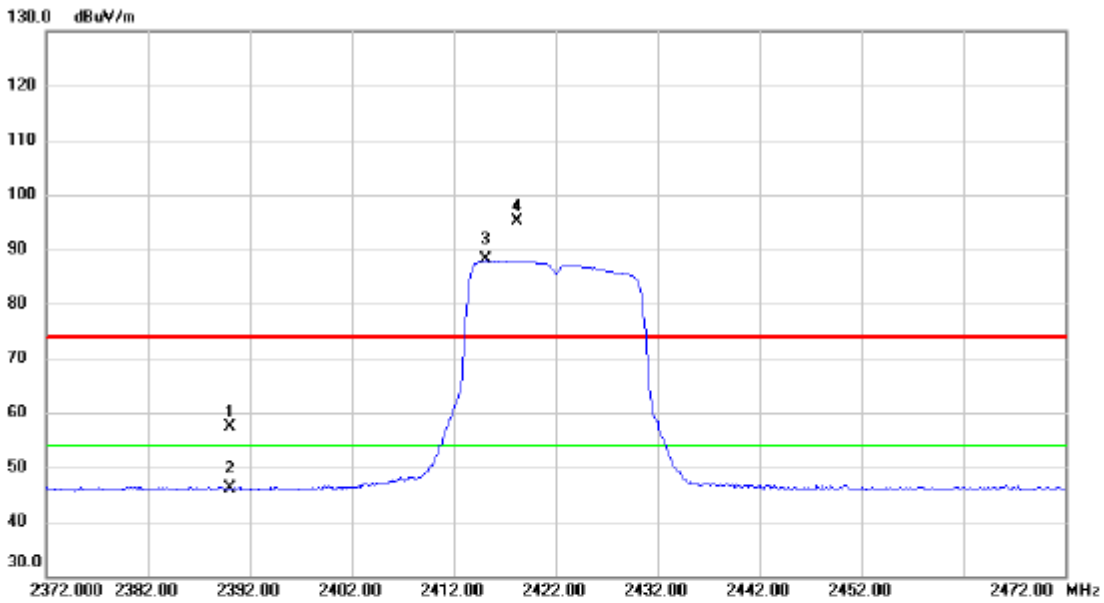

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	43.55	13.81	57.36	74.00	-16.64	peak	
2		2390.000	32.20	13.81	46.01	54.00	-7.99	AVG	
3	*	2415.200	74.19	13.84	88.03	54.00	34.03	AVG	No Limit
4	X	2418.200	81.40	13.84	95.24	74.00	21.24	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2427 MHz

Vertical

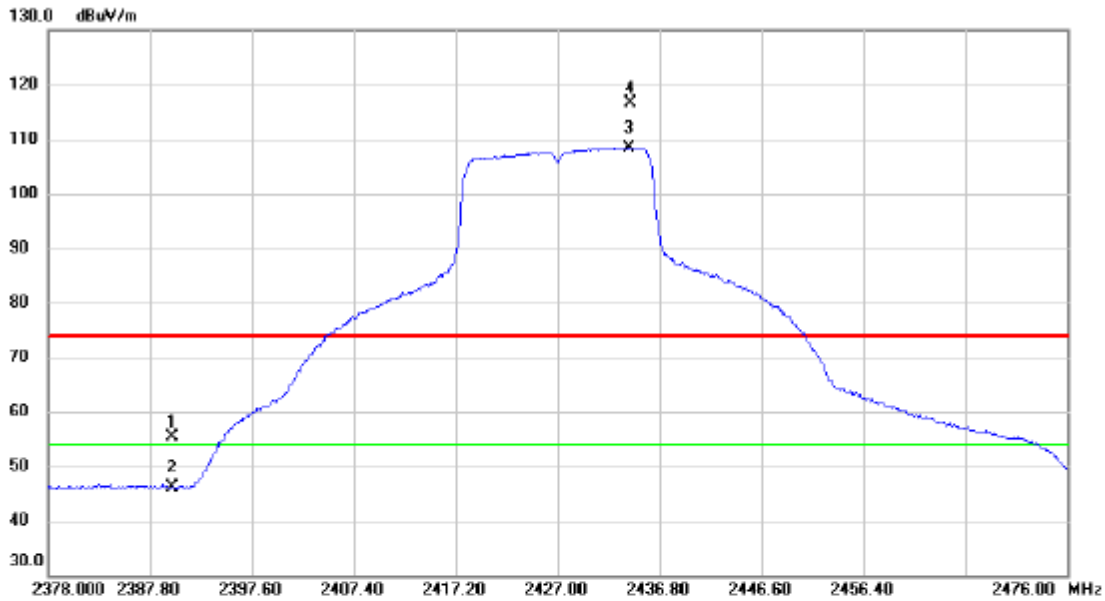


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.52	13.81	55.33	74.00	-18.67	peak	
2		2390.000	32.42	13.81	46.23	54.00	-7.77	AVG	
3	*	2433.860	94.55	13.87	108.42	54.00	54.42	AVG	No Limit
4	X	2433.958	102.82	13.87	116.69	74.00	42.69	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2427 MHz

Horizontal

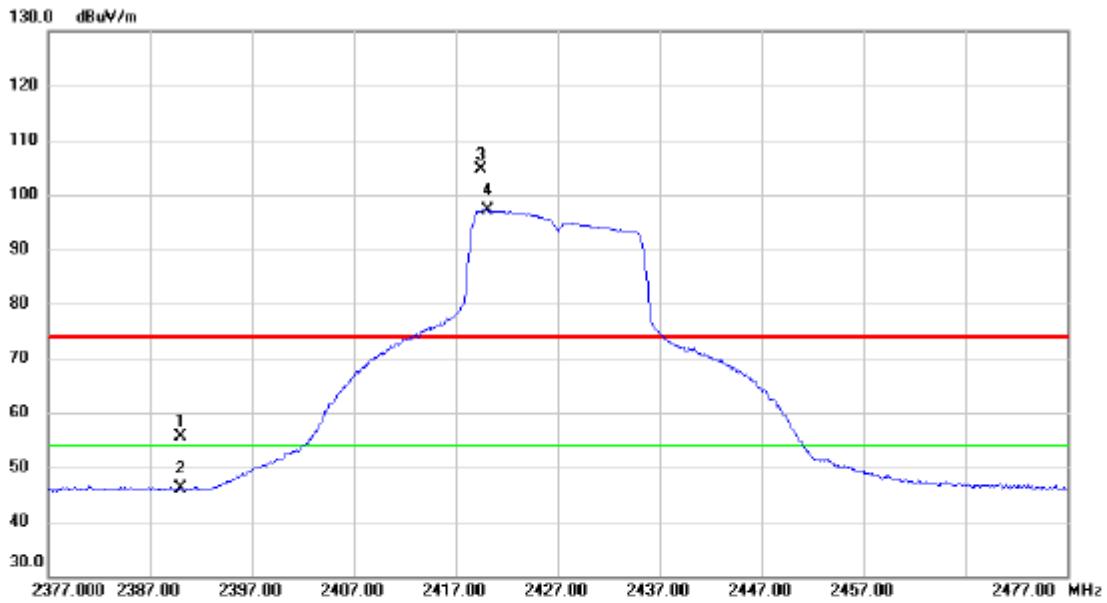


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.73	13.81	55.54	74.00	-18.46	peak	
2		2390.000	32.35	13.81	46.16	54.00	-7.84	AVG	
3	X	2419.400	90.82	13.84	104.66	74.00	30.66	peak	No Limit
4	*	2420.100	83.31	13.84	97.15	54.00	43.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

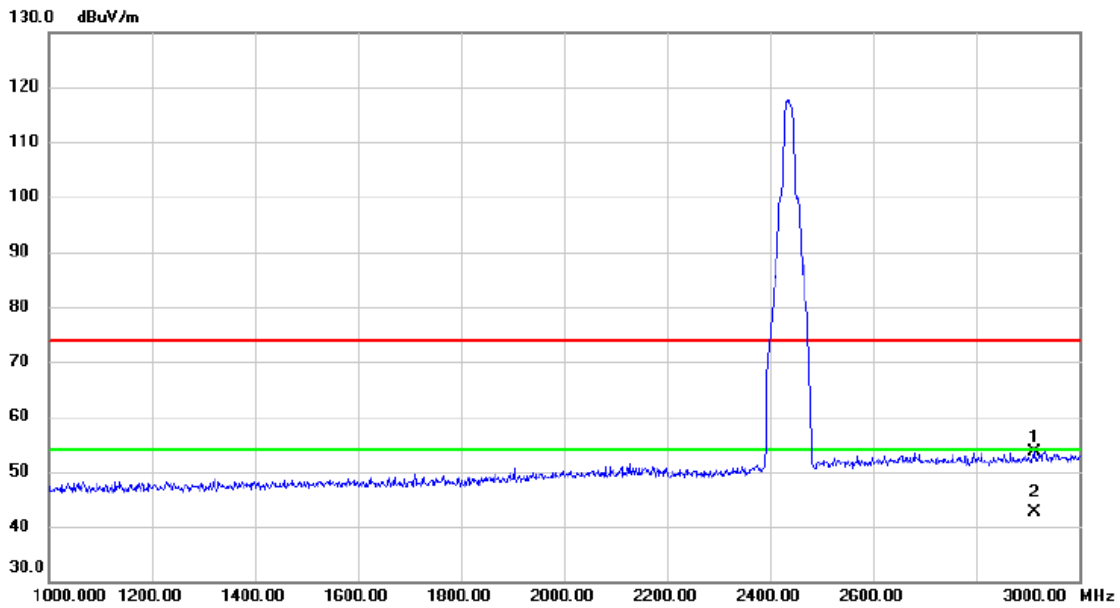

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2914.000	43.59	10.15	53.74	74.00	-20.26	peak	
2	*	2914.000	32.60	10.15	42.75	54.00	-11.25	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

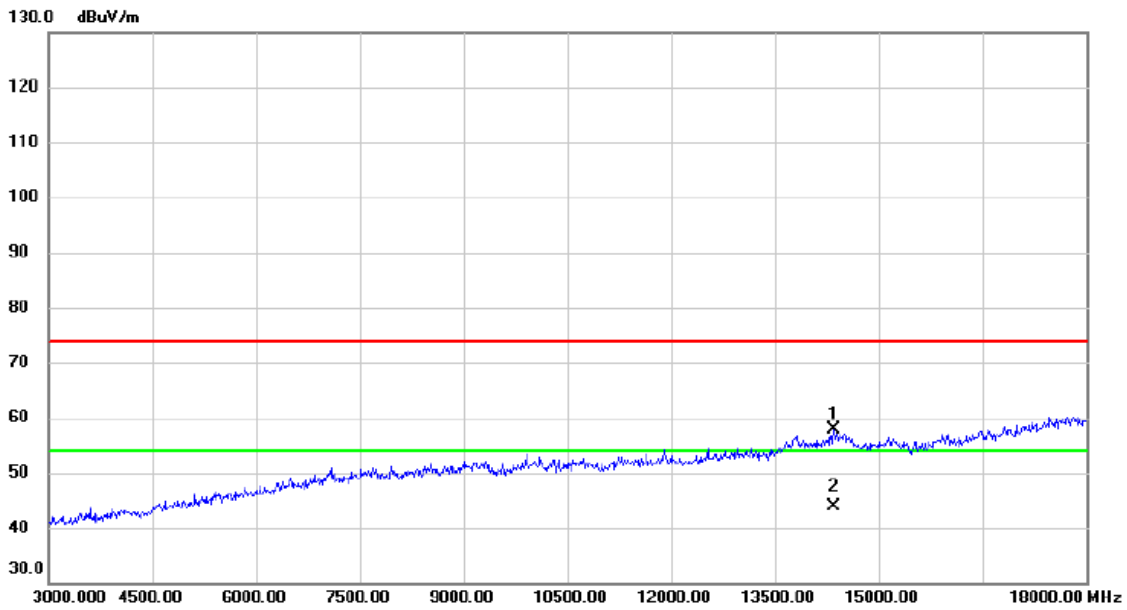

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14340.000	38.76	19.15	57.91	74.00	-16.09	peak	
2 *	14340.000	24.62	19.15	43.77	54.00	-10.23	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

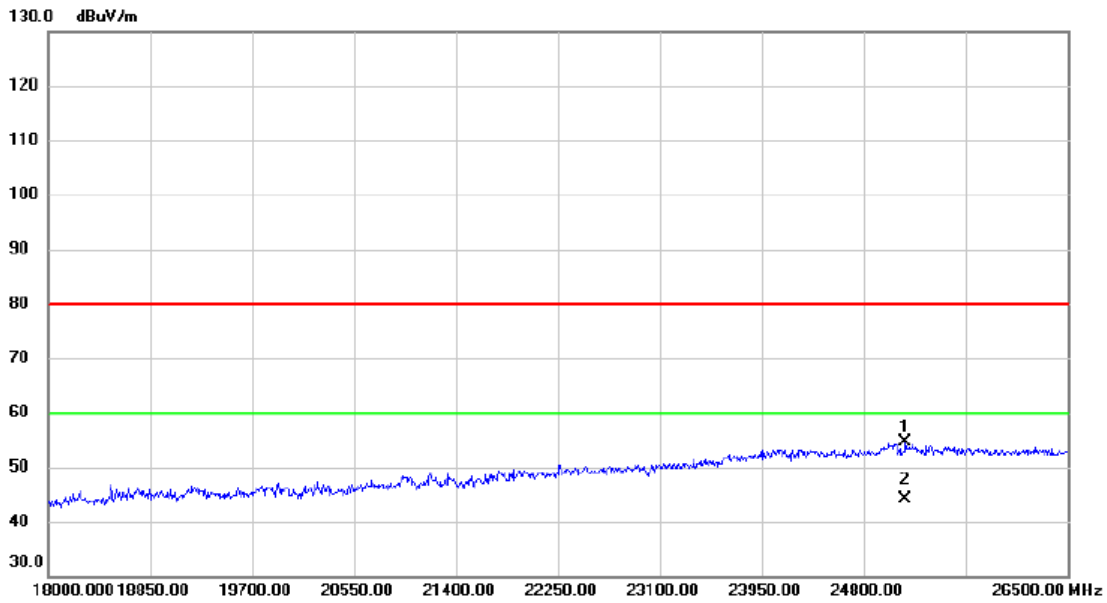


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25148.500	24.25	30.40	54.65	80.00	-25.35	peak	
2 *	25148.500	13.68	30.40	44.08	60.00	-15.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

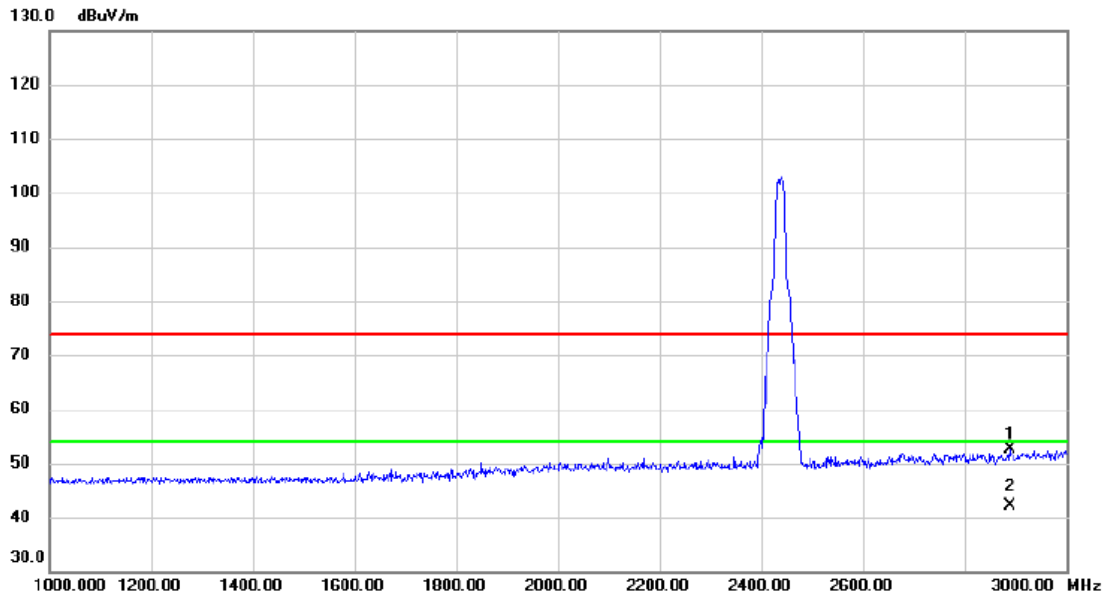

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2888.000	42.64	10.04	52.68	74.00	-21.32	peak	
2 *	2888.000	32.07	10.04	42.11	54.00	-11.89	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

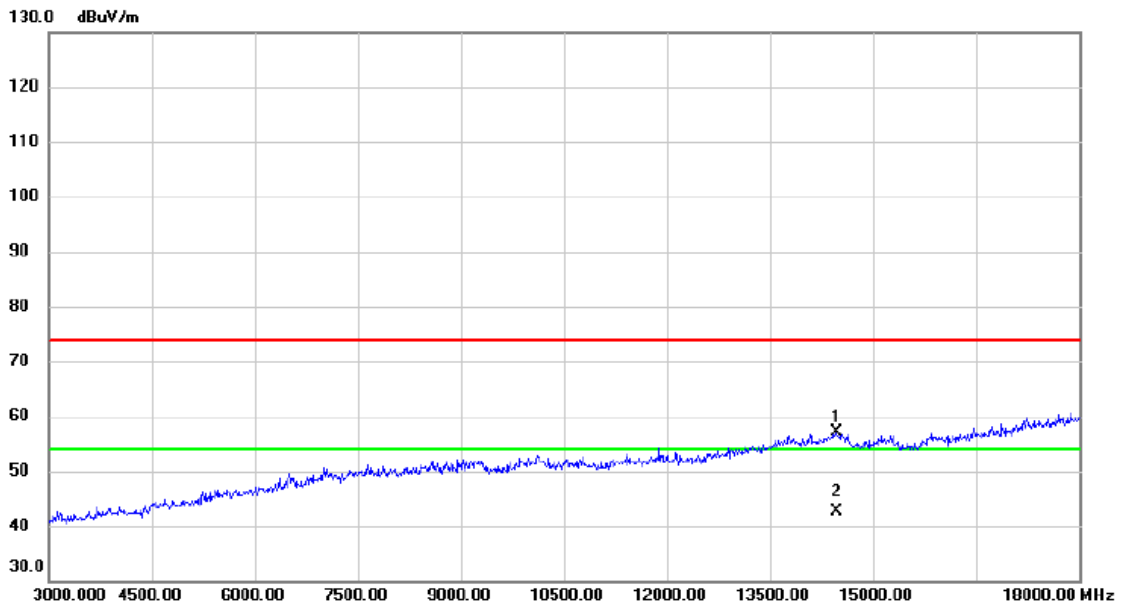


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14460.000	37.94	19.11	57.05	74.00	-16.95	peak	
2 *	14460.000	23.57	19.11	42.68	54.00	-11.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

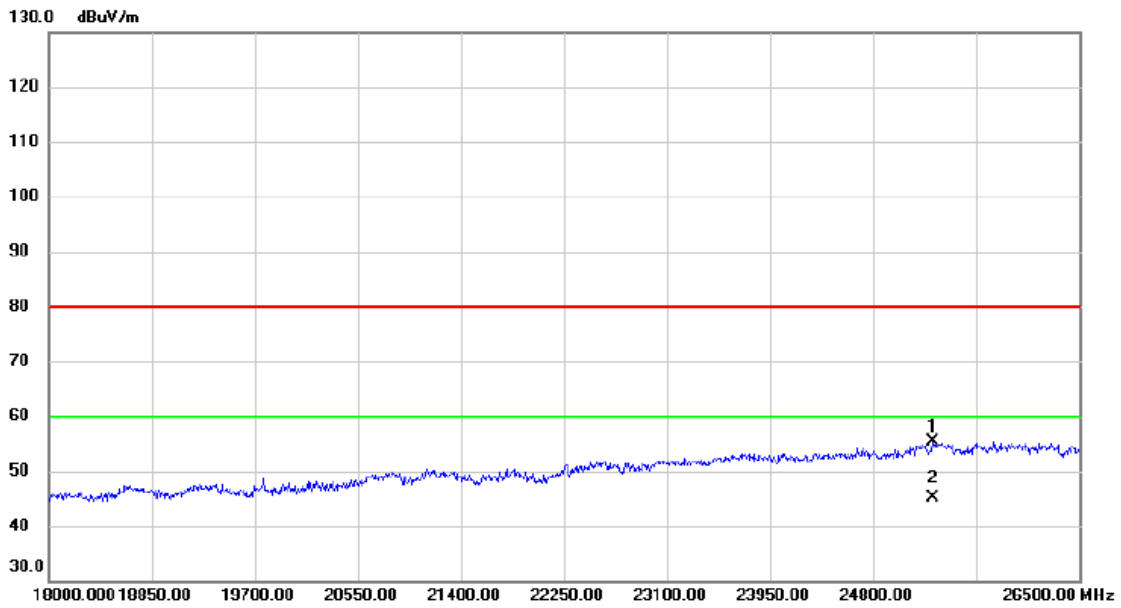


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25293.000	25.17	30.26	55.43	80.00	-24.57	peak	
2 *	25293.000	14.82	30.26	45.08	60.00	-14.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2452 MHz

Vertical

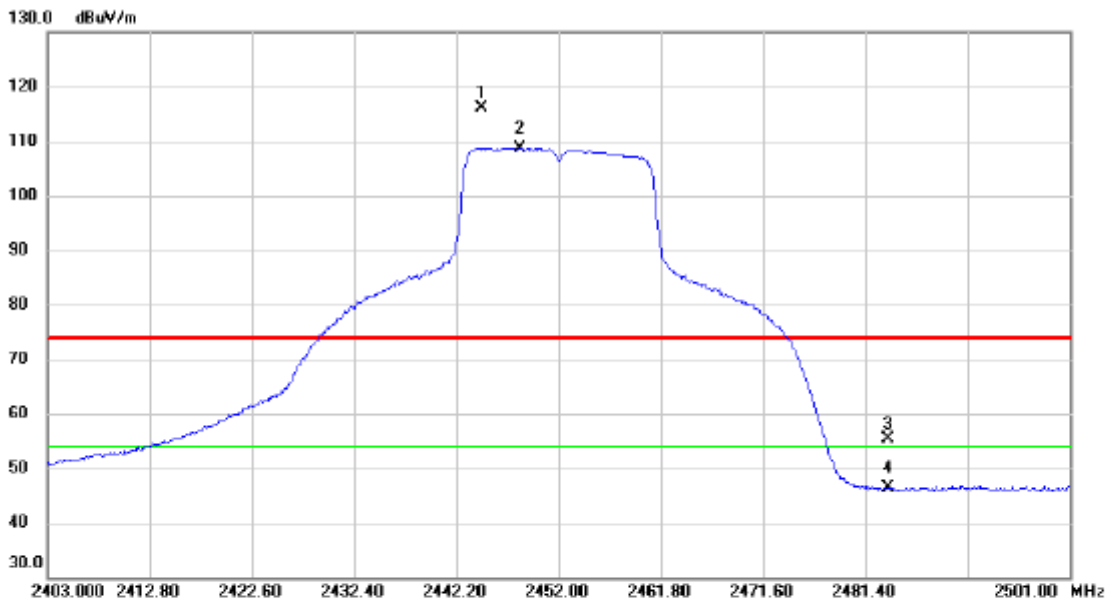


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2444.552	102.16	13.87	116.03	74.00	42.03	peak	No Limit
2	*	2448.276	94.84	13.88	108.72	54.00	54.72	AVG	No Limit
3		2483.500	41.54	13.93	55.47	74.00	-18.53	peak	
4		2483.500	32.51	13.93	46.44	54.00	-7.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2452 MHz

Horizontal

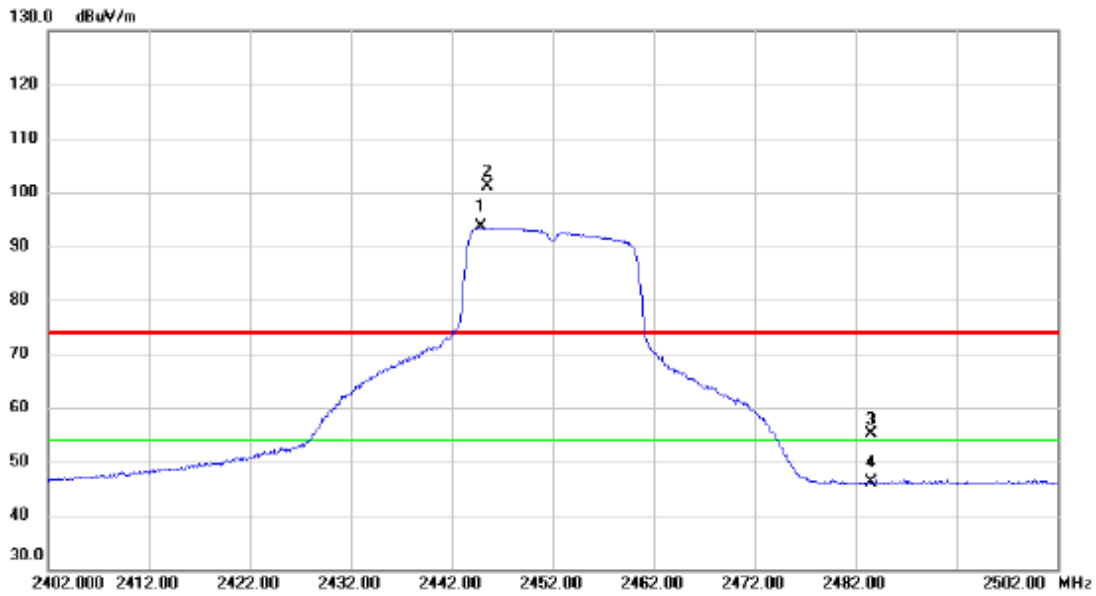


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.900	79.66	13.87	93.53	54.00	39.53	AVG	No Limit
2	X	2445.600	87.20	13.87	101.07	74.00	27.07	peak	No Limit
3		2483.500	41.10	13.93	55.03	74.00	-18.97	peak	
4		2483.500	32.11	13.93	46.04	54.00	-7.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2457 MHz

Vertical

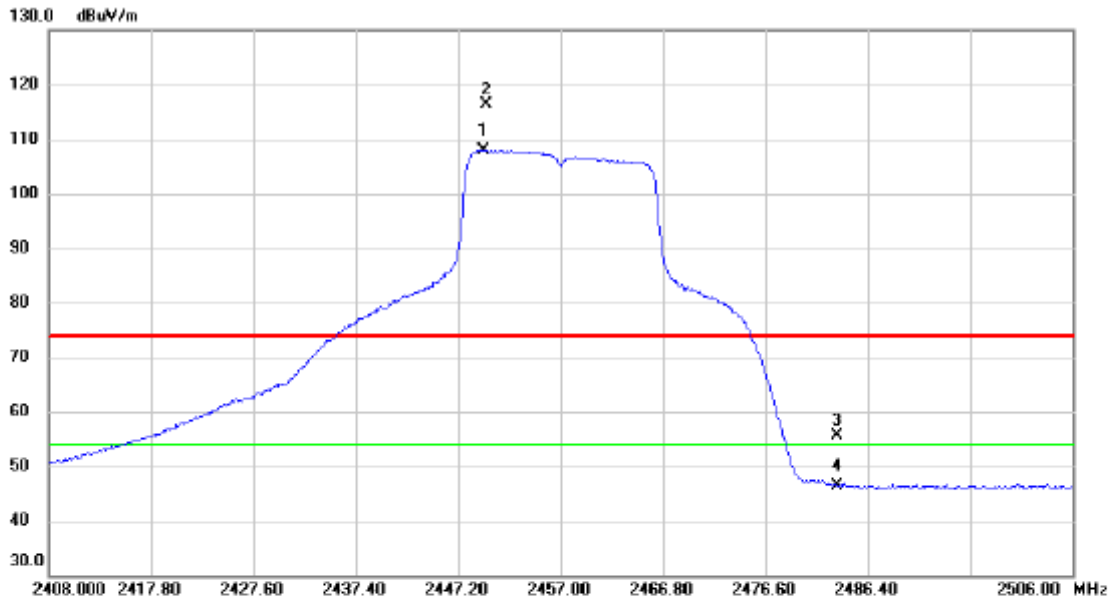


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.552	94.11	13.88	107.99	54.00	53.99	AVG	No Limit
2	X	2449.944	102.48	13.88	116.36	74.00	42.36	peak	No Limit
3		2483.500	41.61	13.93	55.54	74.00	-18.46	peak	
4		2483.500	32.51	13.93	46.44	54.00	-7.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2457 MHz

Horizontal

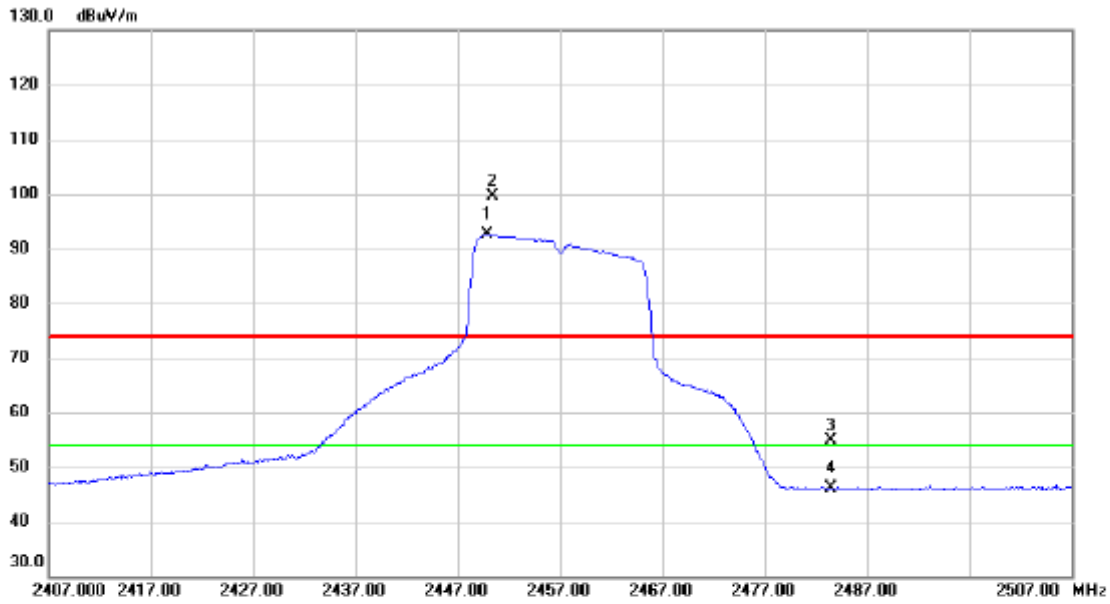


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.800	78.72	13.88	92.60	54.00	38.60	AVG	No Limit
2	X	2450.400	85.83	13.88	99.71	74.00	25.71	peak	No Limit
3		2483.500	40.84	13.93	54.77	74.00	-19.23	peak	
4		2483.500	32.09	13.93	46.02	54.00	-7.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

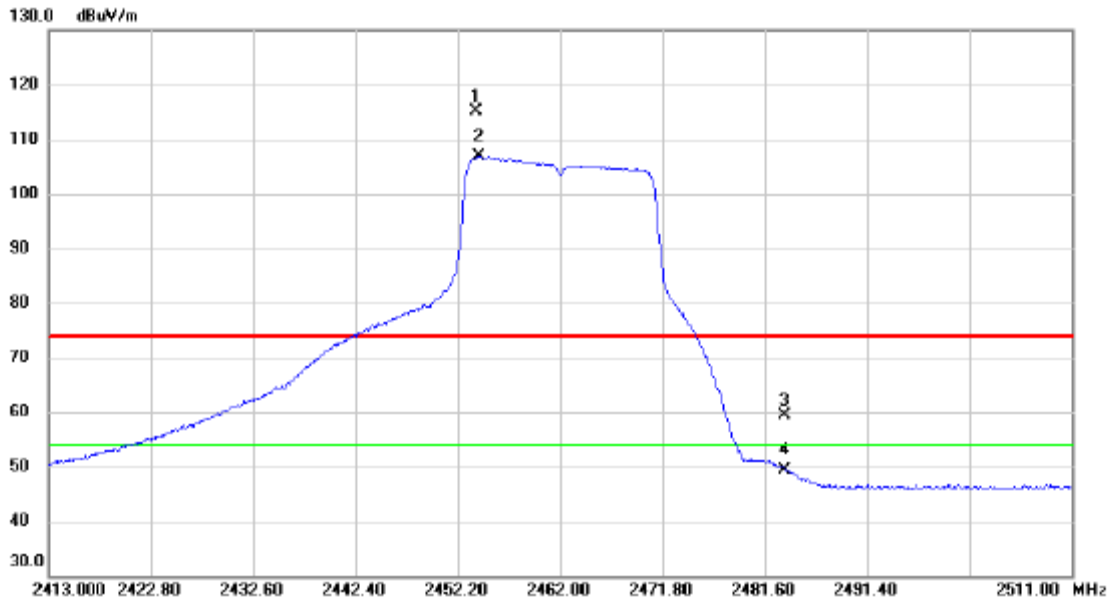


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2453.964	101.16	13.88	115.04	74.00	41.04	peak	No Limit
2	*	2454.258	92.99	13.89	106.88	54.00	52.88	AVG	No Limit
3		2483.500	45.56	13.93	59.49	74.00	-14.51	peak	
4		2483.500	35.33	13.93	49.26	54.00	-4.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

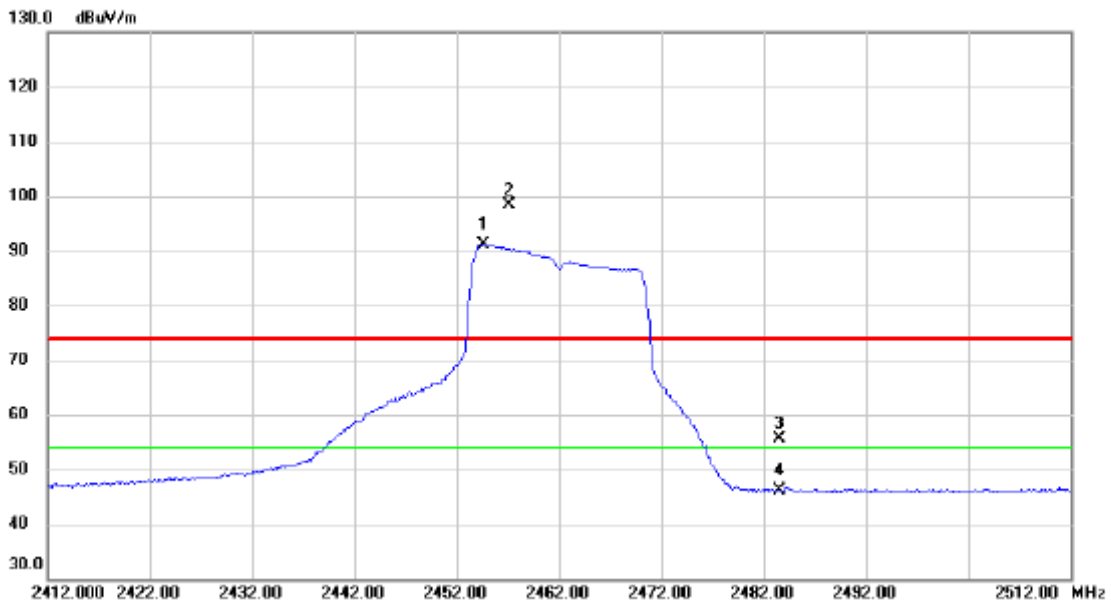


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.600	77.19	13.89	91.08	54.00	37.08	AVG	No Limit
2	X	2457.200	84.50	13.90	98.40	74.00	24.40	peak	No Limit
3		2483.500	41.73	13.93	55.66	74.00	-18.34	peak	
4		2483.500	32.23	13.93	46.16	54.00	-7.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

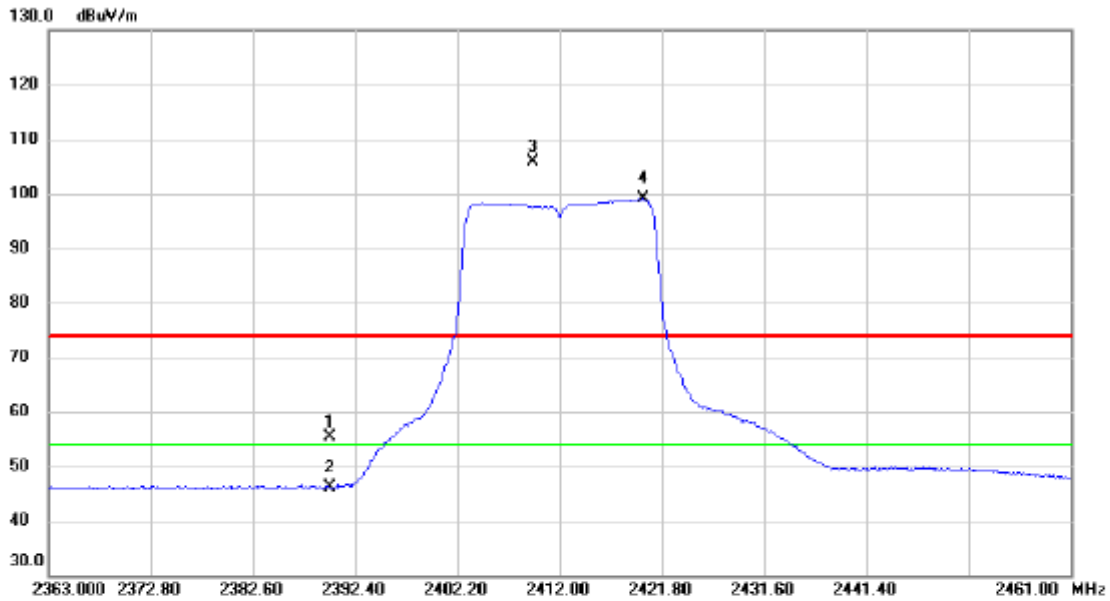


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.45	13.81	55.26	74.00	-18.74	peak	
2		2390.000	32.42	13.81	46.23	54.00	-7.77	AVG	
3	X	2409.452	92.18	13.82	106.00	74.00	32.00	peak	No Limit
4	*	2420.036	85.20	13.84	99.04	54.00	45.04	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

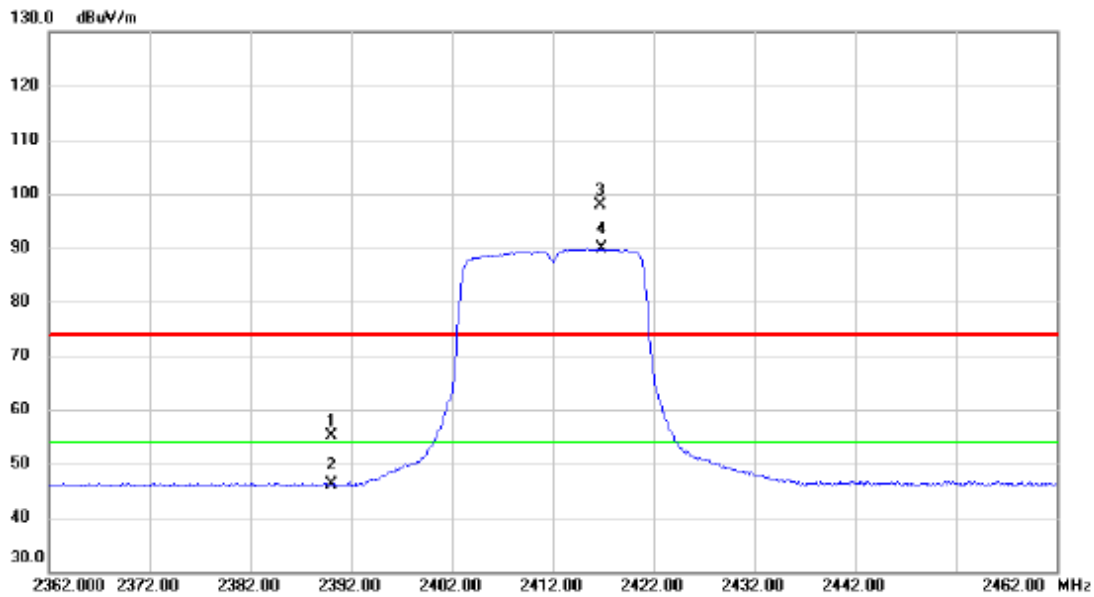


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.26	13.81	55.07	74.00	-18.93	peak	
2		2390.000	32.37	13.81	46.18	54.00	-7.82	AVG	
3	X	2416.700	84.02	13.84	97.86	74.00	23.86	peak	No Limit
4	*	2416.800	75.98	13.84	89.82	54.00	35.82	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2417 MHz

Vertical

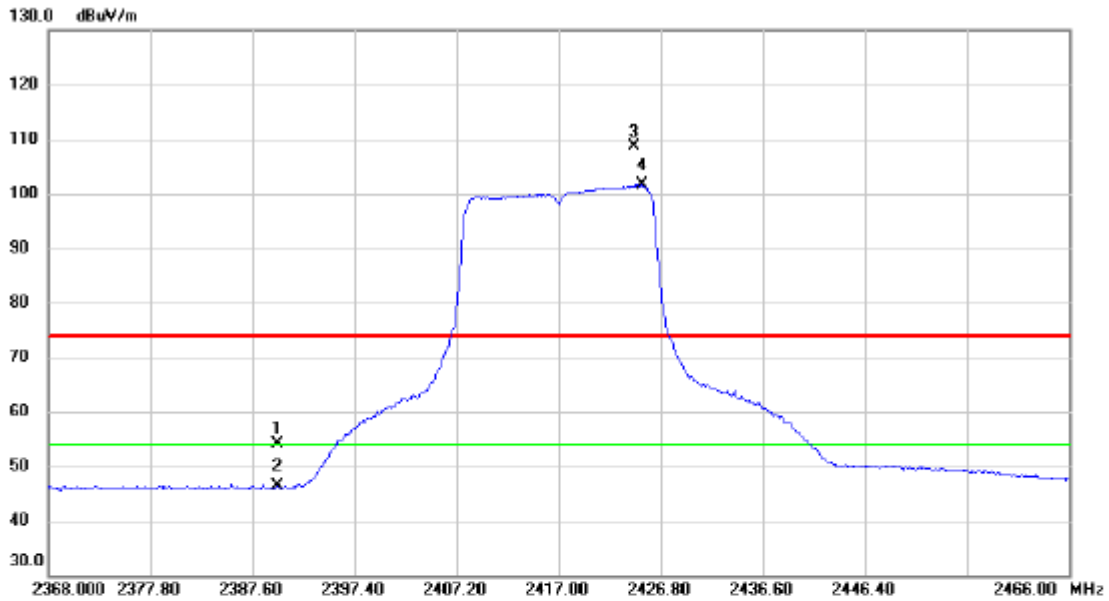


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.25	13.81	54.06	74.00	-19.94	peak	
2		2390.000	32.64	13.81	46.45	54.00	-7.55	AVG	
3	X	2424.252	94.73	13.85	108.58	74.00	34.58	peak	No Limit
4	*	2425.036	87.79	13.85	101.64	54.00	47.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2417 MHz

Horizontal

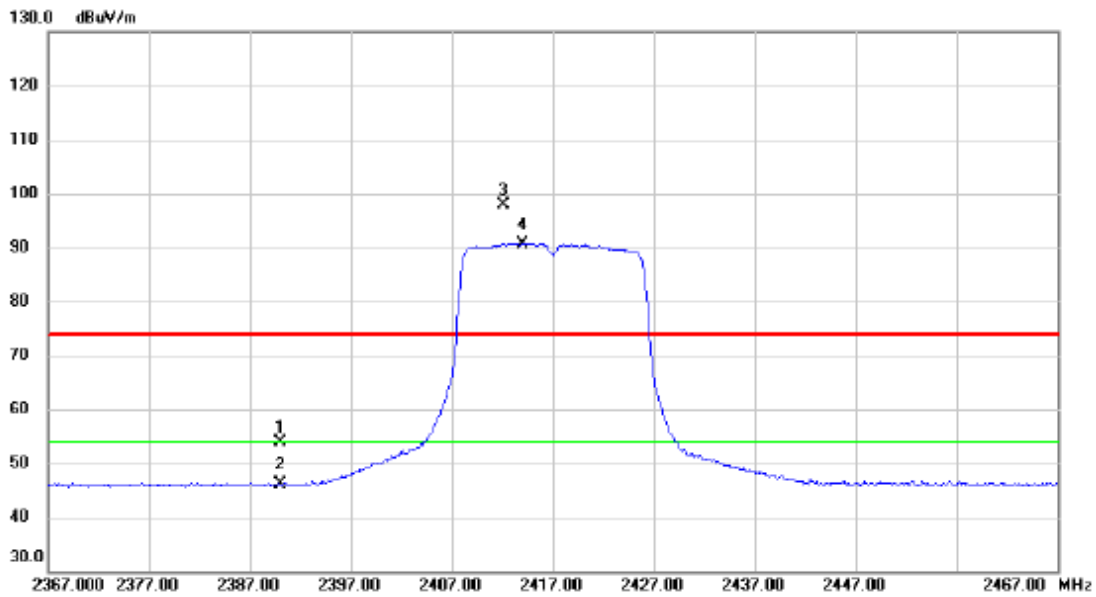


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.03	13.81	53.84	74.00	-20.16	peak	
2		2390.000	32.39	13.81	46.20	54.00	-7.80	AVG	
3	X	2412.100	83.94	13.83	97.77	74.00	23.77	peak	No Limit
4	*	2414.000	76.89	13.84	90.73	54.00	36.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2422 MHz

Vertical

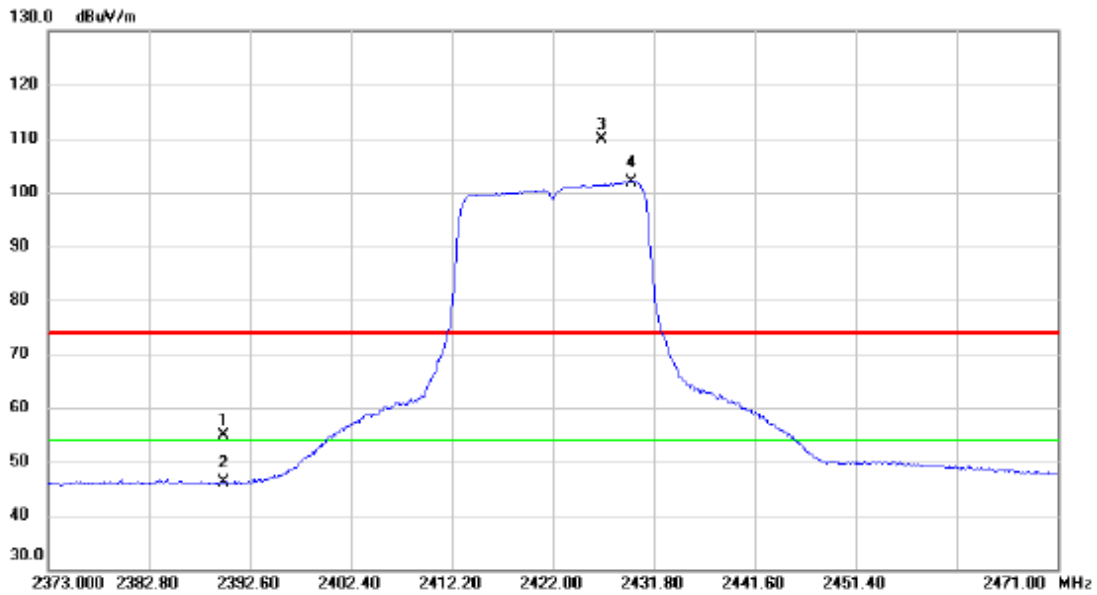


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.05	13.81	54.86	74.00	-19.14	peak	
2		2390.000	32.27	13.81	46.08	54.00	-7.92	AVG	
3	X	2426.802	96.12	13.85	109.97	74.00	35.97	peak	No Limit
4	*	2429.644	88.08	13.86	101.94	54.00	47.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2422 MHz

Horizontal

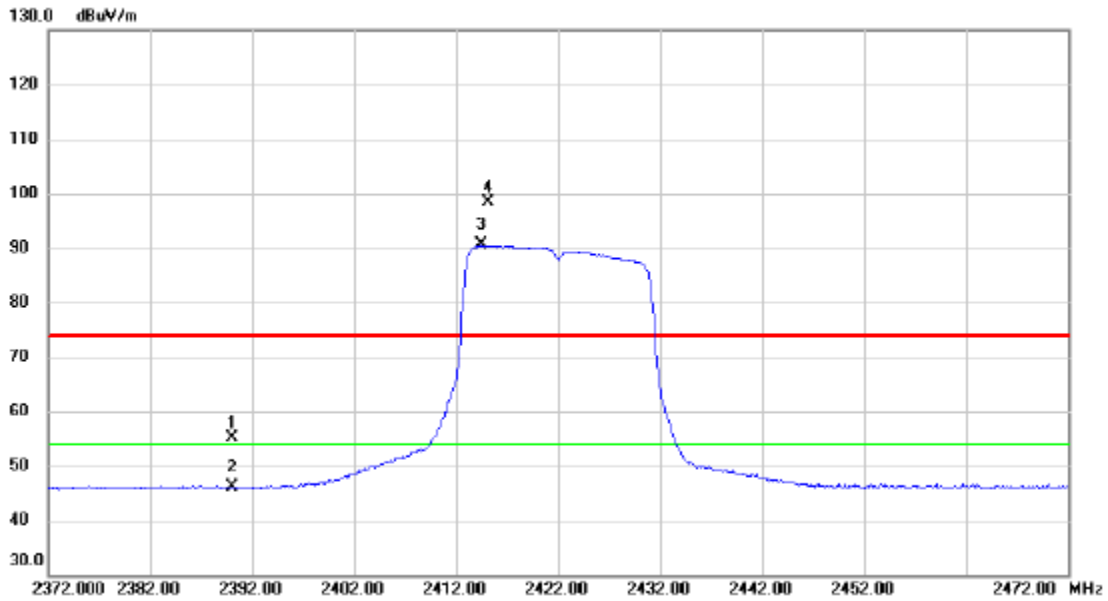


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.43	13.81	55.24	74.00	-18.76	peak	
2		2390.000	32.39	13.81	46.20	54.00	-7.80	AVG	
3	*	2414.400	76.74	13.84	90.58	54.00	36.58	AVG	No Limit
4	X	2415.100	84.64	13.84	98.48	74.00	24.48	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2427 MHz

Vertical

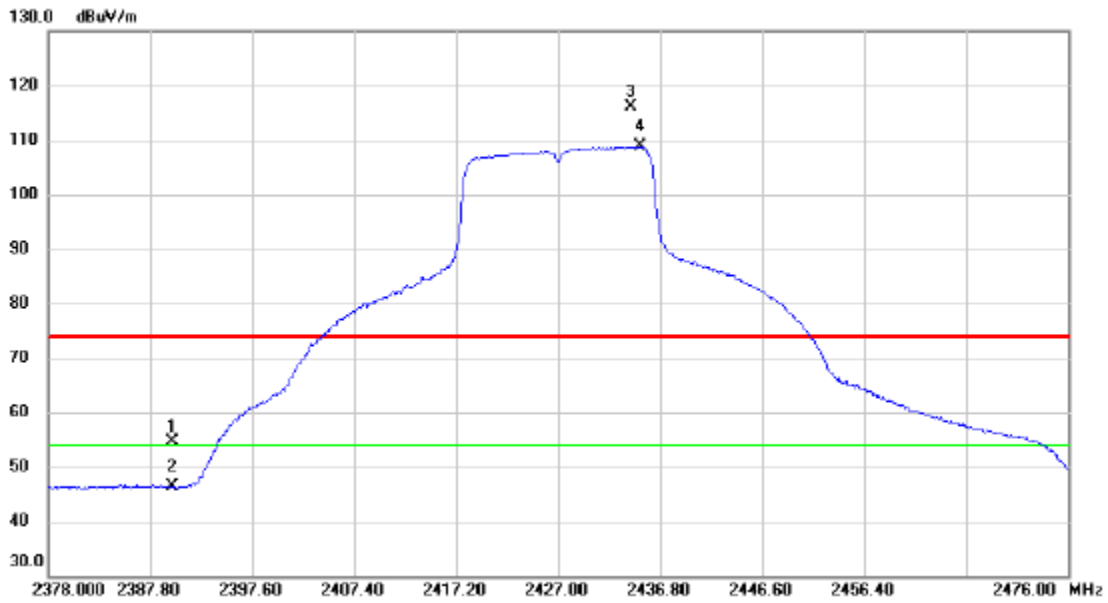


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.80	13.81	54.61	74.00	-19.39	peak	
2		2390.000	32.49	13.81	46.30	54.00	-7.70	AVG	
3	X	2433.958	102.25	13.87	116.12	74.00	42.12	peak	No Limit
4	*	2434.938	94.90	13.86	108.76	54.00	54.76	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2427 MHz

Horizontal

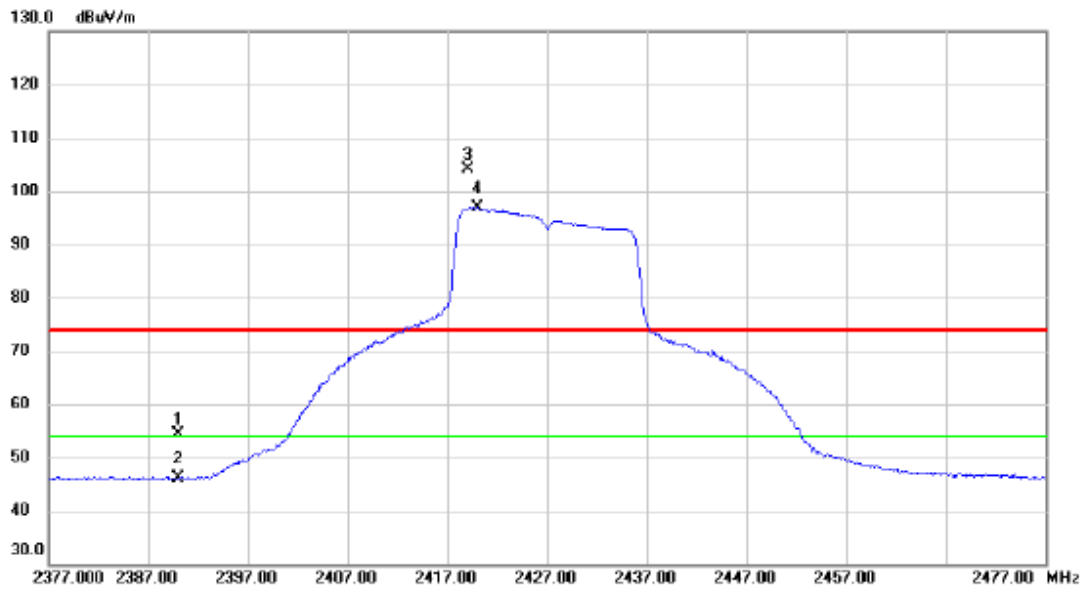


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.62	13.81	54.43	74.00	-19.57	peak	
2		2390.000	32.31	13.81	46.12	54.00	-7.88	AVG	
3	X	2419.000	90.21	13.84	104.05	74.00	30.05	peak	No Limit
4	*	2420.000	82.99	13.84	96.83	54.00	42.83	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

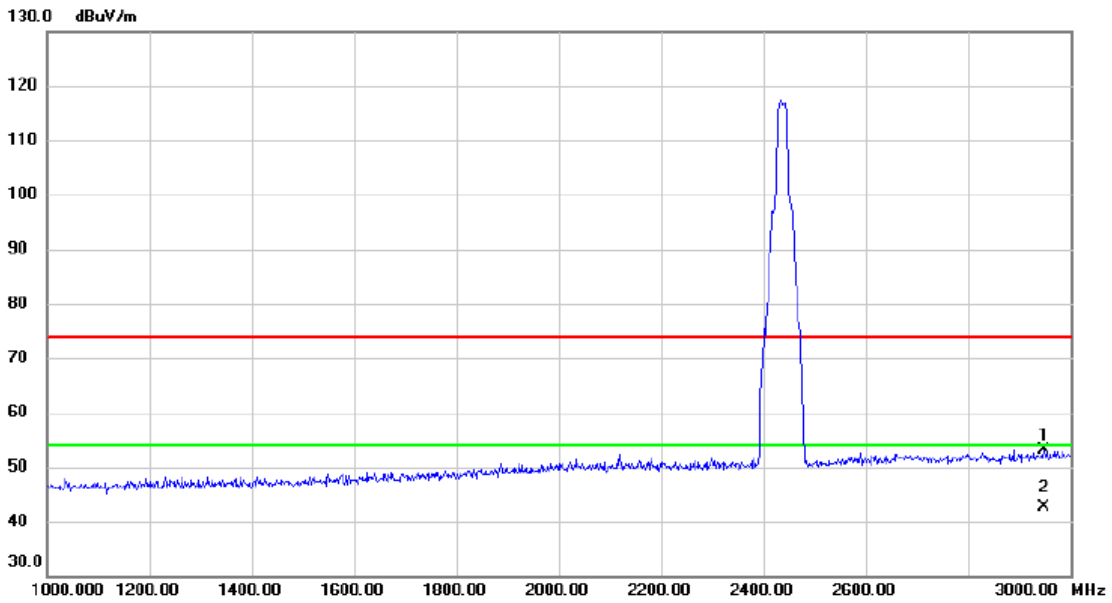


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2948.000	42.89	10.29	53.18	74.00	-20.82	peak	
2	*	2948.000	32.31	10.29	42.60	54.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

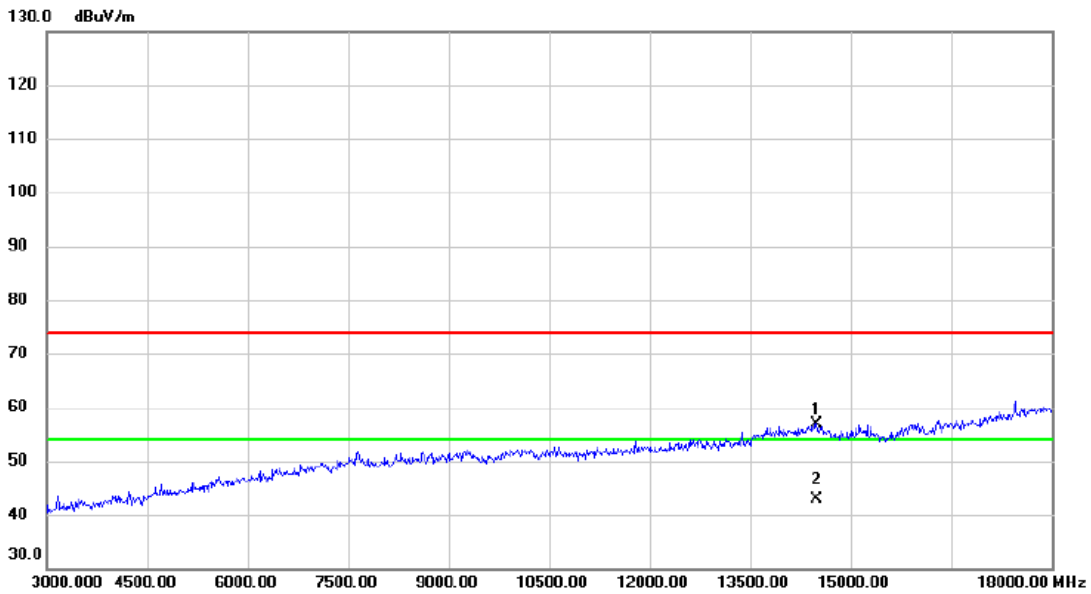


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14490.000	37.90	19.10	57.00	74.00	-17.00	peak	
2	*	14490.000	23.88	19.10	42.98	54.00	-11.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

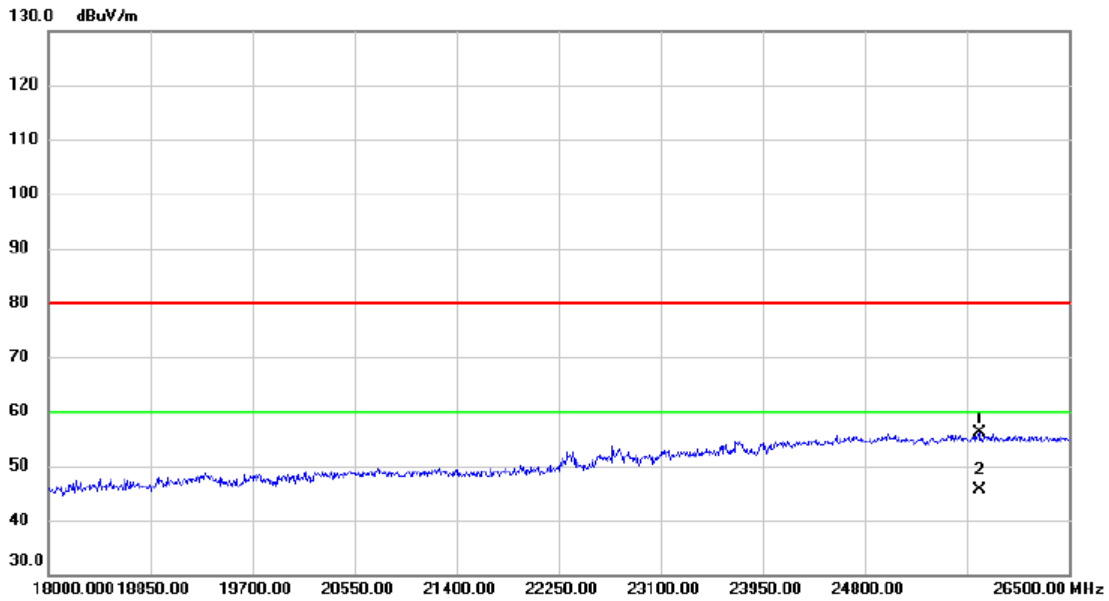


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25752.000	25.89	30.24	56.13	80.00	-23.87	peak	
2	*	25752.000	15.31	30.24	45.55	60.00	-14.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

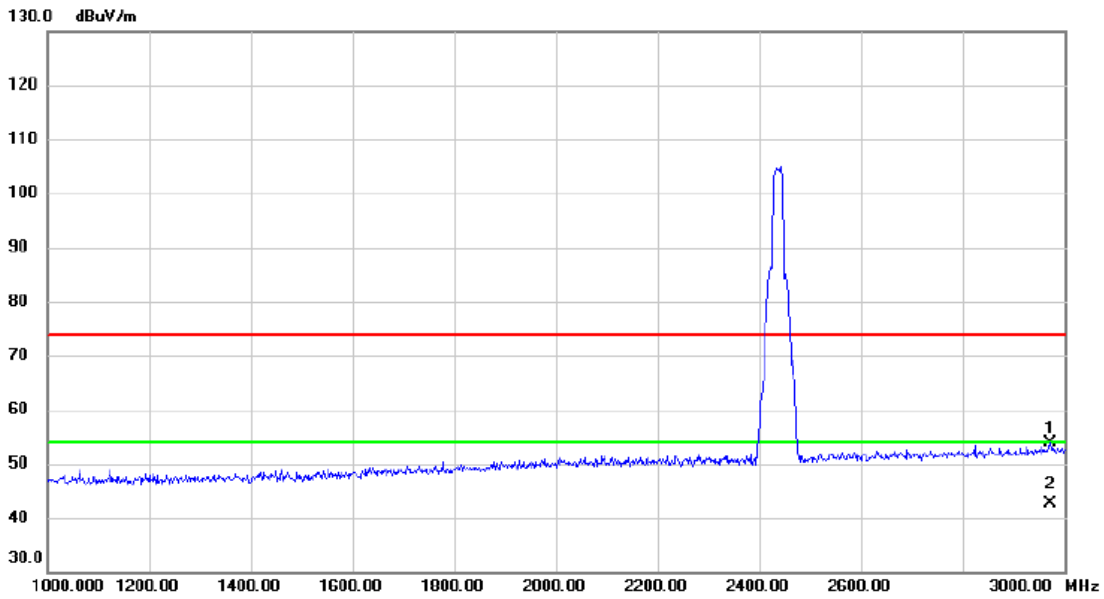


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2972.000	43.42	10.40	53.82	74.00	-20.18	peak	
2	*	2972.000	32.22	10.40	42.62	54.00	-11.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

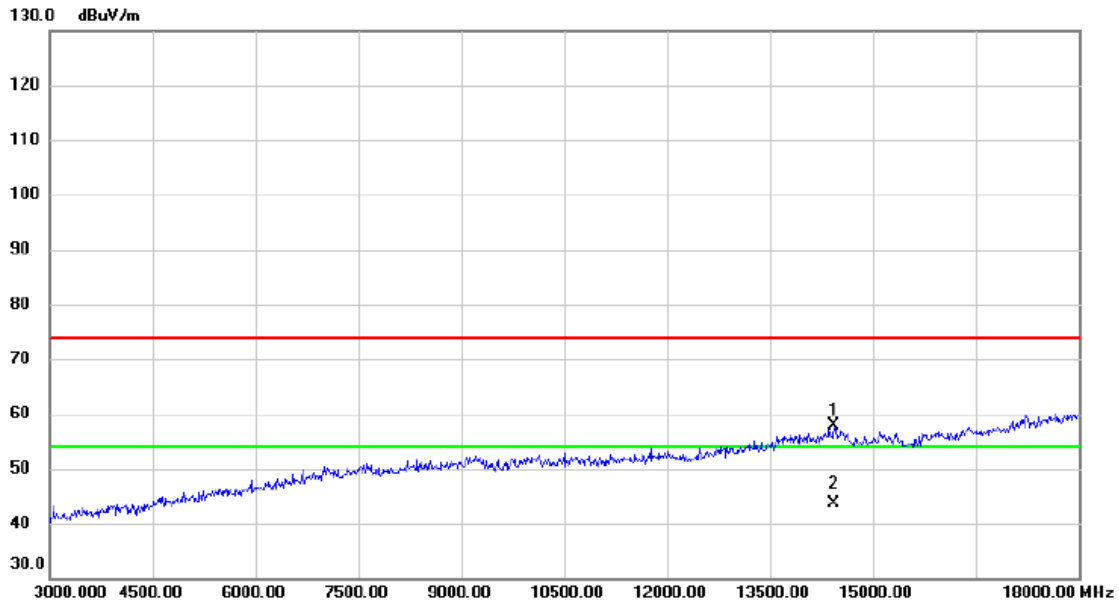


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14430.000	38.68	19.12	57.80	74.00	-16.20	peak	
2 *	14430.000	24.40	19.12	43.52	54.00	-10.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

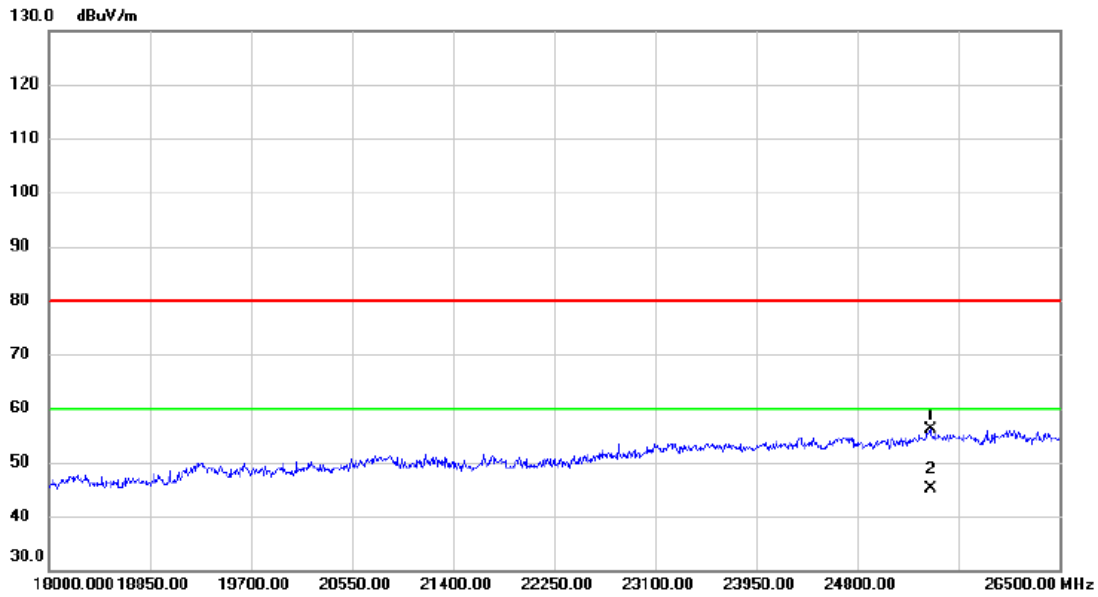


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25412.000	25.87	30.16	56.03	80.00	-23.97	peak	
2	*	25412.000	15.03	30.16	45.19	60.00	-14.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2452 MHz

Vertical

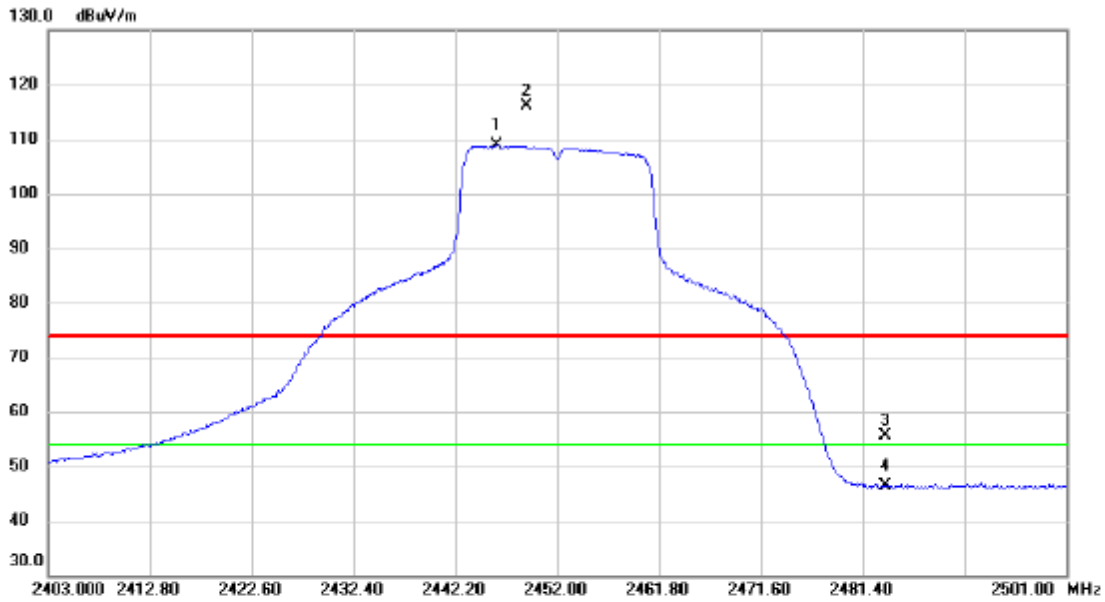


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2446.218	94.97	13.88	108.85	54.00	54.85	AVG	No Limit
2	X	2449.060	102.28	13.88	116.16	74.00	42.16	peak	No Limit
3		2483.500	41.80	13.93	55.73	74.00	-18.27	peak	
4		2483.500	32.36	13.93	46.29	54.00	-7.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2452 MHz

Horizontal

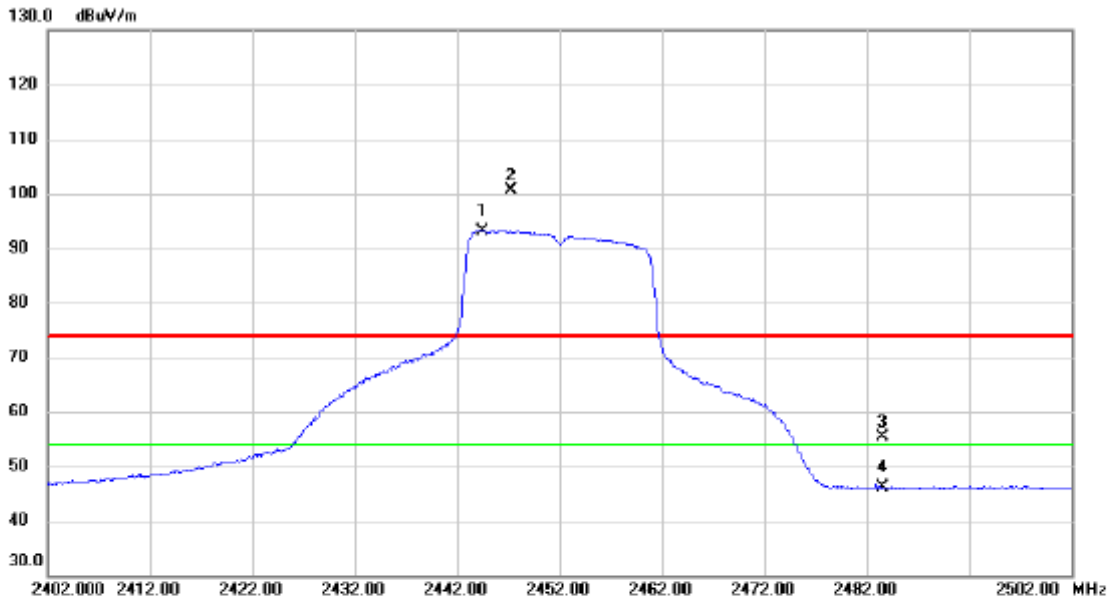


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.400	79.30	13.87	93.17	54.00	39.17	AVG	No Limit
2	X	2447.300	86.86	13.88	100.74	74.00	26.74	peak	No Limit
3		2483.500	41.38	13.93	55.31	74.00	-18.69	peak	
4		2483.500	32.08	13.93	46.01	54.00	-7.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Vertical

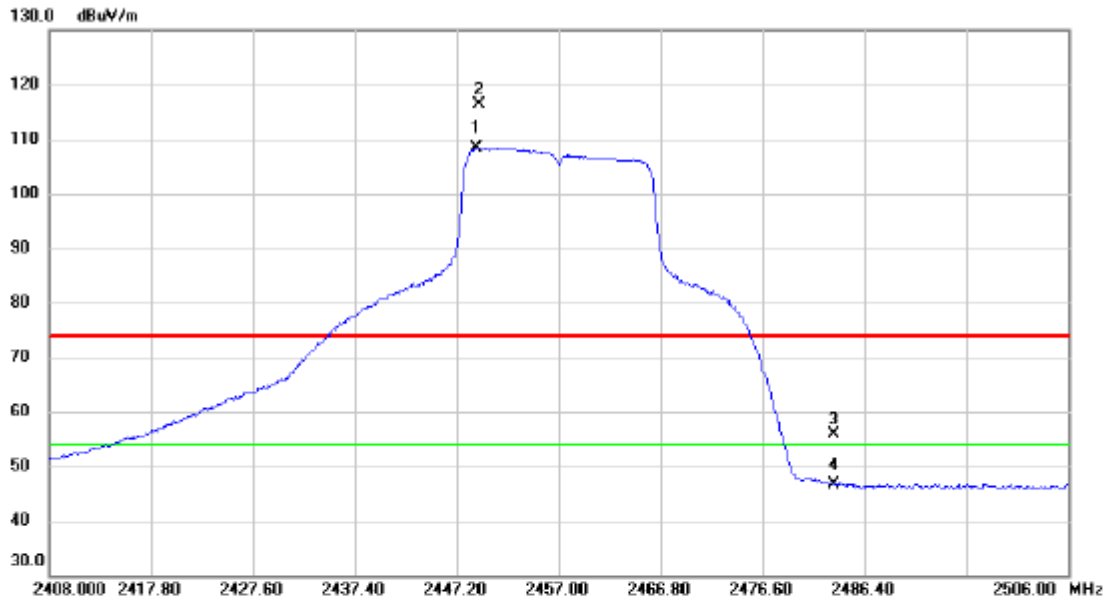


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.160	94.47	13.88	108.35	54.00	54.35	AVG	No Limit
2	X	2449.356	102.46	13.88	116.34	74.00	42.34	peak	No Limit
3		2483.500	42.04	13.93	55.97	74.00	-18.03	peak	
4		2483.500	32.63	13.93	46.56	54.00	-7.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Horizontal

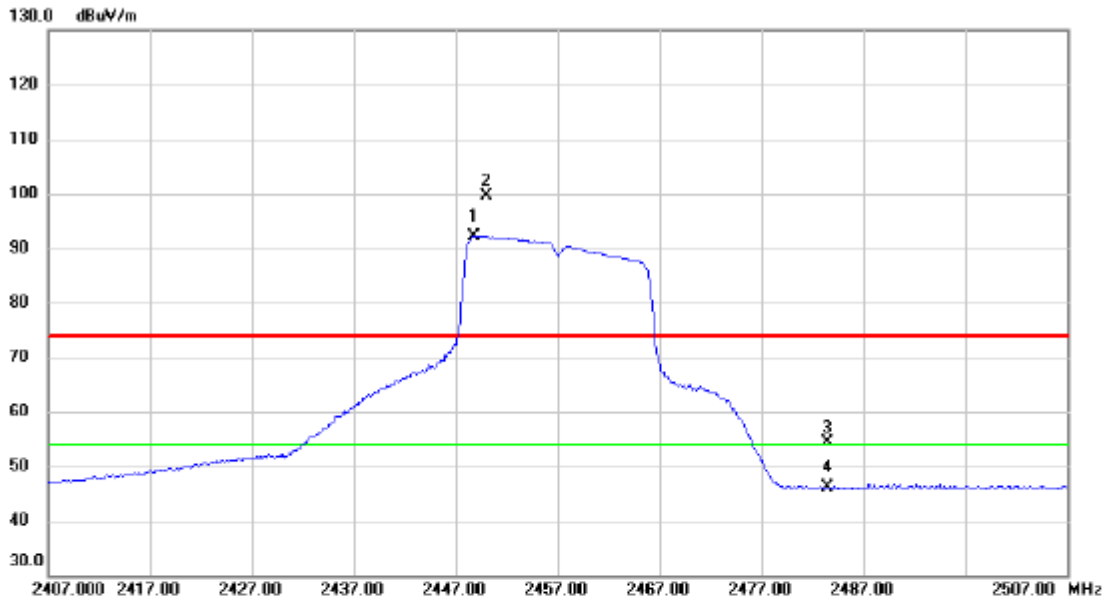


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2448.800	78.33	13.88	92.21	54.00	38.21	AVG	No Limit
2	X	2450.000	85.72	13.88	99.60	74.00	25.60	peak	No Limit
3		2483.500	40.40	13.93	54.33	74.00	-19.67	peak	
4		2483.500	32.17	13.93	46.10	54.00	-7.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

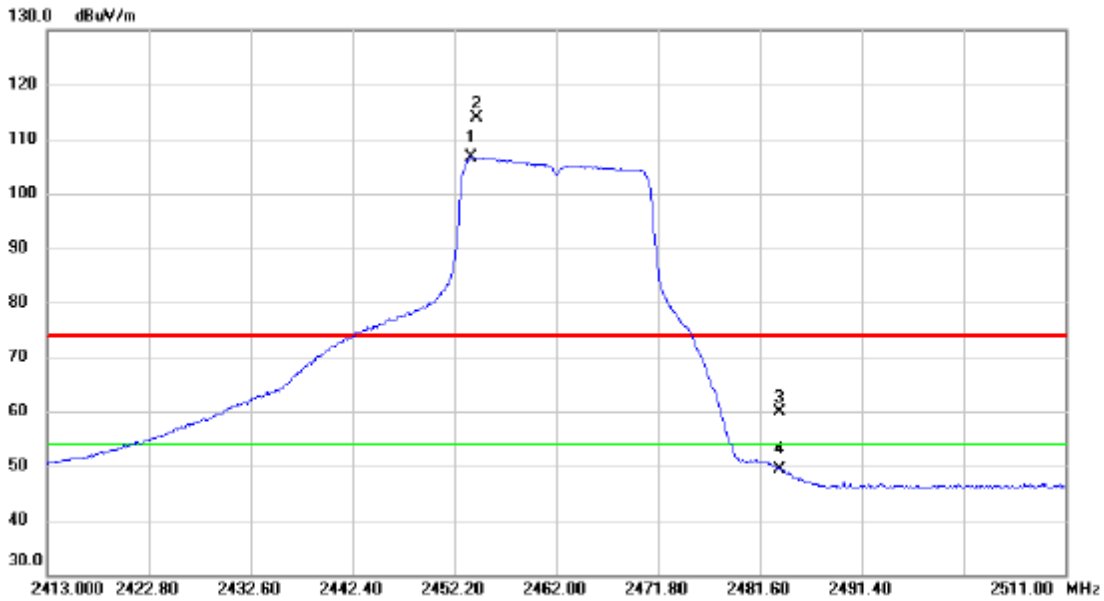


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.866	92.87	13.88	106.75	54.00	52.75	AVG	No Limit
2	X	2454.356	99.90	13.89	113.79	74.00	39.79	peak	No Limit
3		2483.500	46.07	13.93	60.00	74.00	-14.00	peak	
4		2483.500	35.51	13.93	49.44	54.00	-4.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

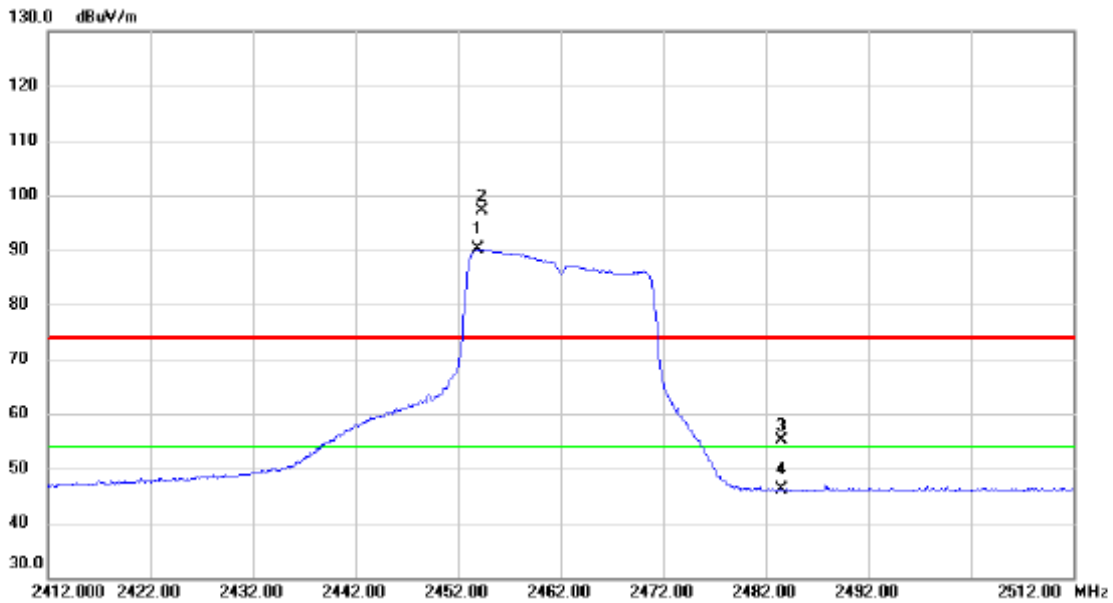


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.900	76.21	13.88	90.09	54.00	36.09	AVG	No Limit
2	X	2454.300	83.12	13.89	97.01	74.00	23.01	peak	No Limit
3		2483.500	41.13	13.93	55.06	74.00	-18.94	peak	
4		2483.500	32.09	13.93	46.02	54.00	-7.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

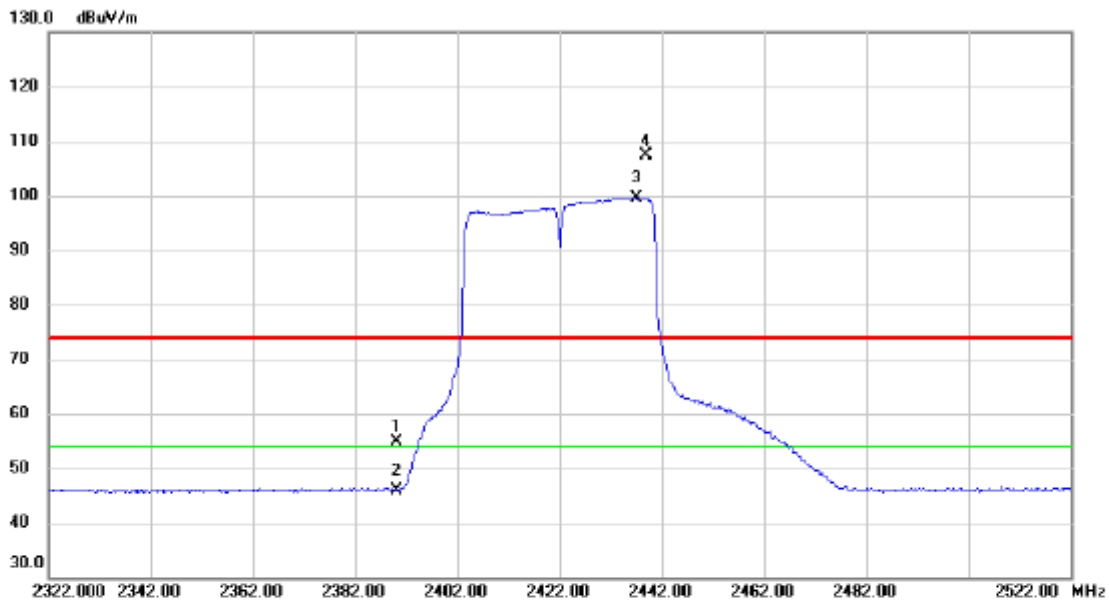


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.09	13.81	54.90	74.00	-19.10	peak	
2		2390.000	32.04	13.81	45.85	54.00	-8.15	AVG	
3	*	2437.000	85.82	13.86	99.68	54.00	45.68	AVG	No Limit
4	X	2438.800	93.43	13.87	107.30	74.00	33.30	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

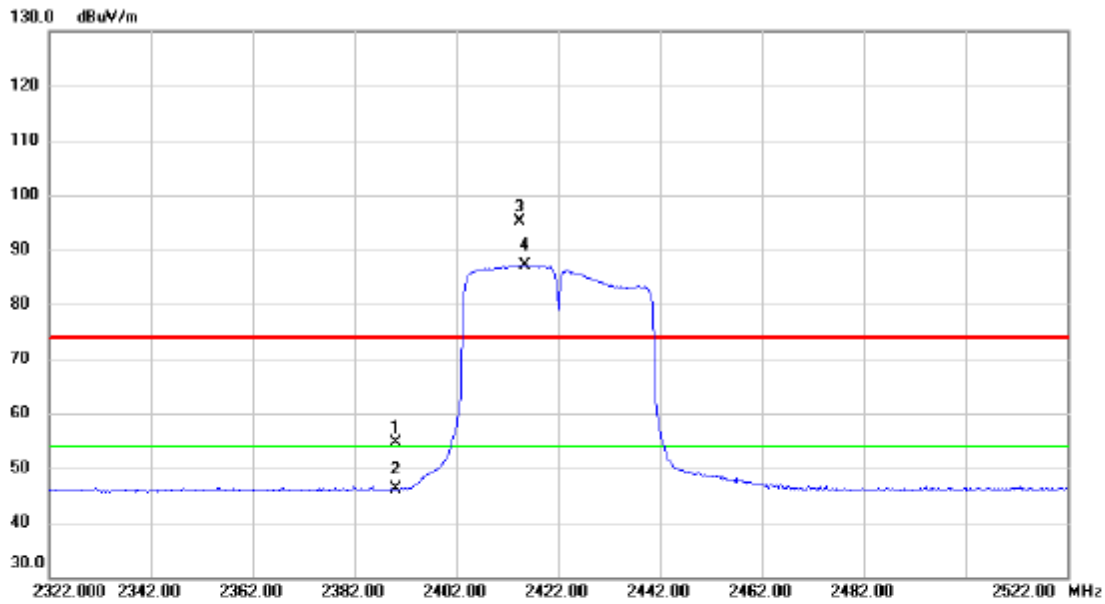


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.91	13.81	54.72	74.00	-19.28	peak	
2		2390.000	32.28	13.81	46.09	54.00	-7.91	AVG	
3	X	2414.400	81.39	13.84	95.23	74.00	21.23	peak	No Limit
4	*	2415.400	73.27	13.84	87.11	54.00	33.11	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427MHz

Vertical

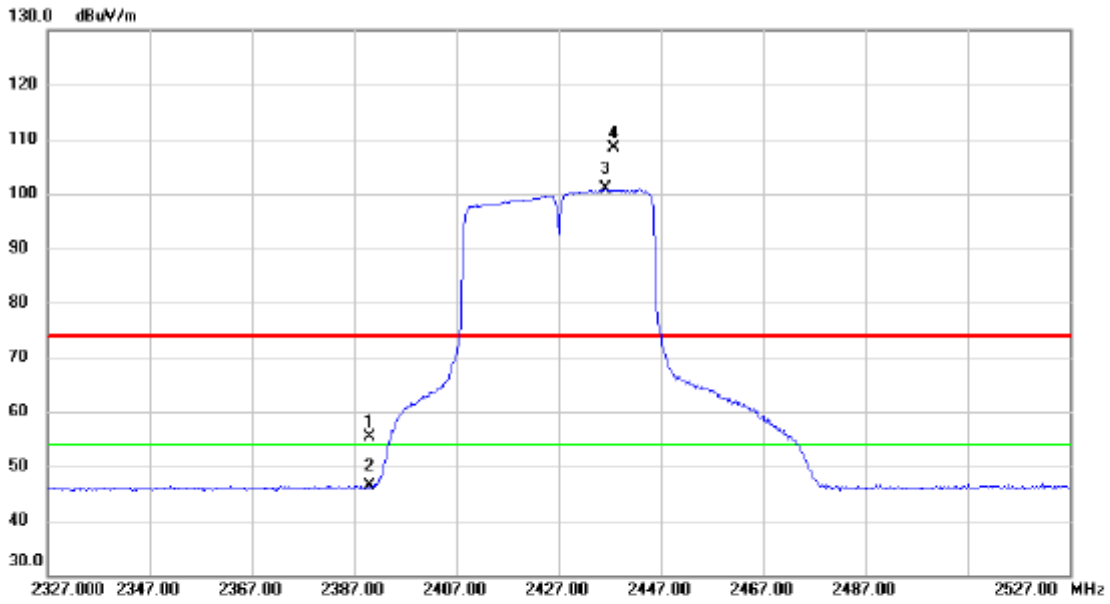


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.58	13.81	55.39	74.00	-18.61	peak	
2		2390.000	32.50	13.81	46.31	54.00	-7.69	AVG	
3	*	2436.200	86.96	13.86	100.82	54.00	46.82	AVG	No Limit
4	X	2437.800	94.61	13.87	108.48	74.00	34.48	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427MHz

Horizontal

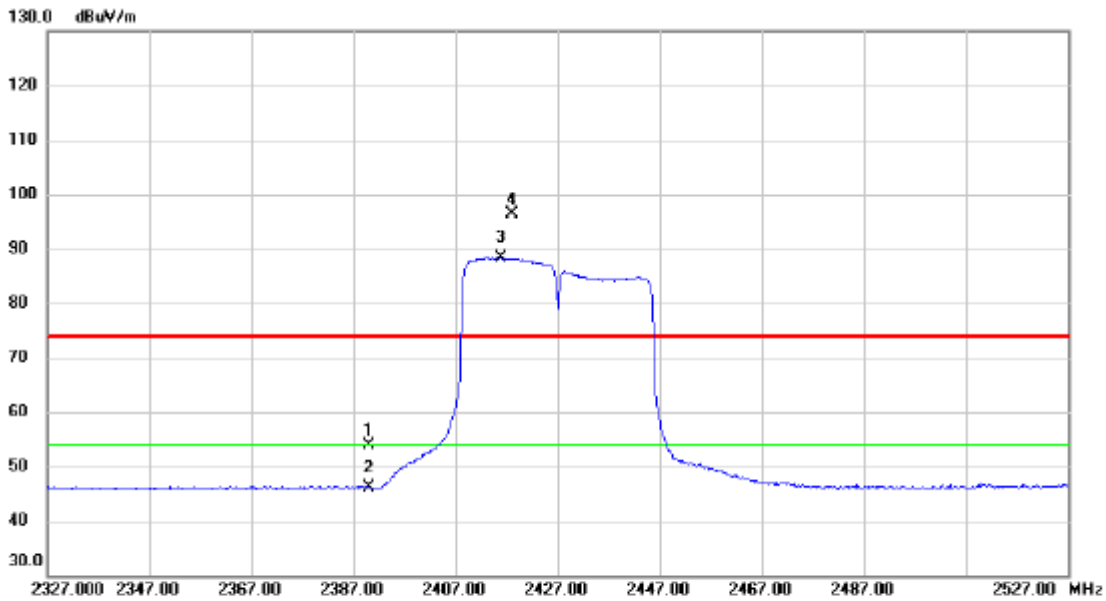


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.07	13.81	53.88	74.00	-20.12	peak	
2		2390.000	32.31	13.81	46.12	54.00	-7.88	AVG	
3	*	2415.800	74.57	13.84	88.41	54.00	34.41	AVG	No Limit
4	X	2418.200	82.46	13.84	96.30	74.00	22.30	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2432MHz

Vertical

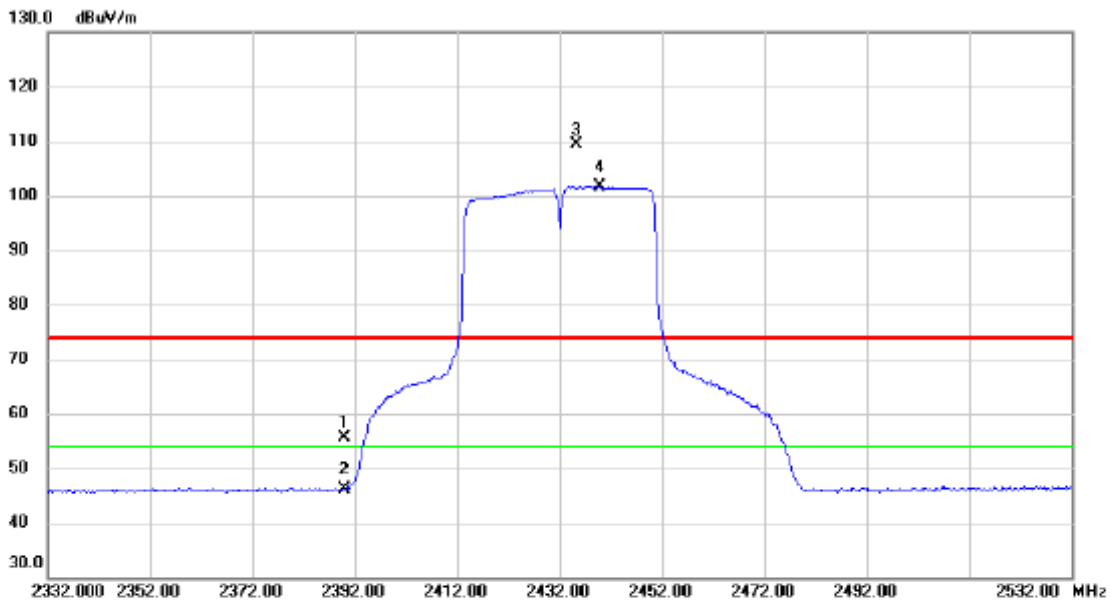

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.90	13.81	55.71	74.00	-18.29	peak	
2		2390.000	32.44	13.81	46.25	54.00	-7.75	AVG	
3	X	2435.400	95.43	13.86	109.29	74.00	35.29	peak	No Limit
4	*	2439.800	87.83	13.87	101.70	54.00	47.70	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2432MHz

Horizontal

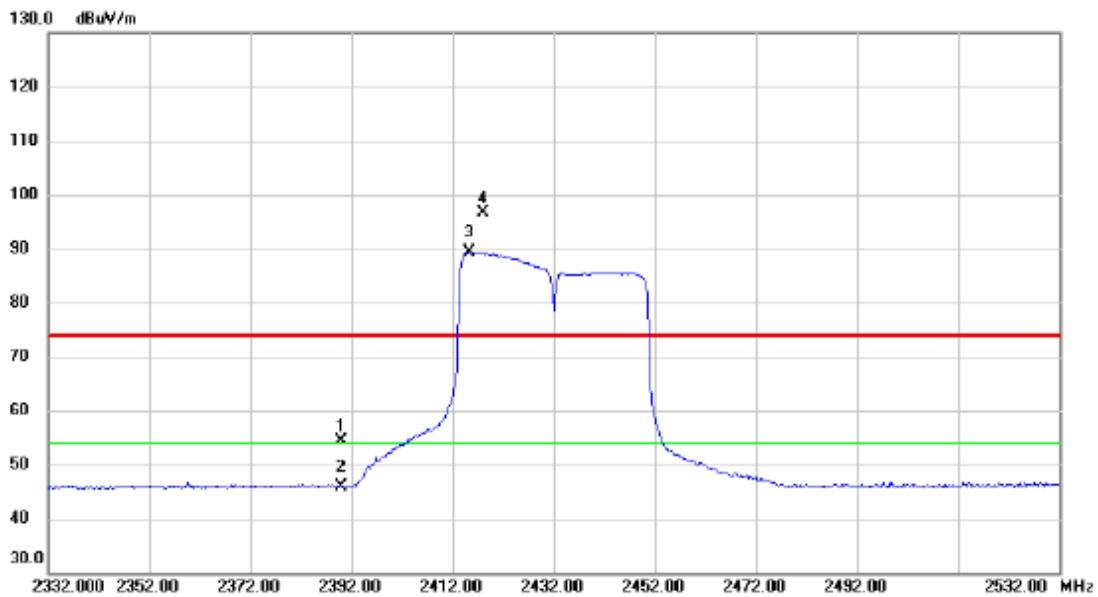


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.67	13.81	54.48	74.00	-19.52	peak	
2		2390.000	32.19	13.81	46.00	54.00	-8.00	AVG	
3	*	2415.400	75.53	13.84	89.37	54.00	35.37	AVG	No Limit
4	X	2418.000	82.81	13.84	96.65	74.00	22.65	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

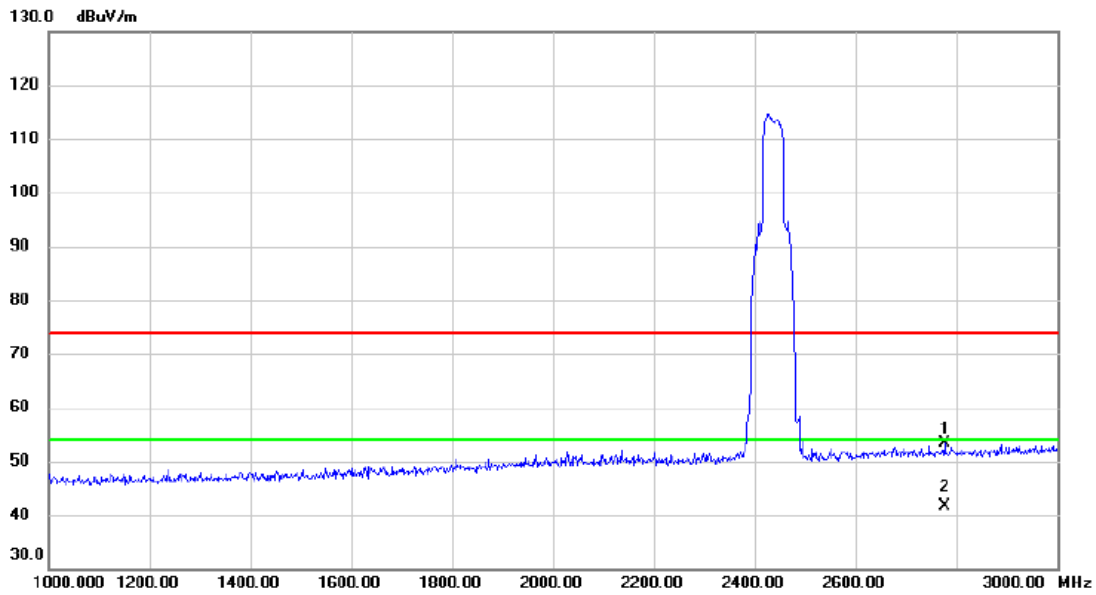


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2776.000	43.73	9.57	53.30	74.00	-20.70	peak	
2	*	2776.000	31.97	9.57	41.54	54.00	-12.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

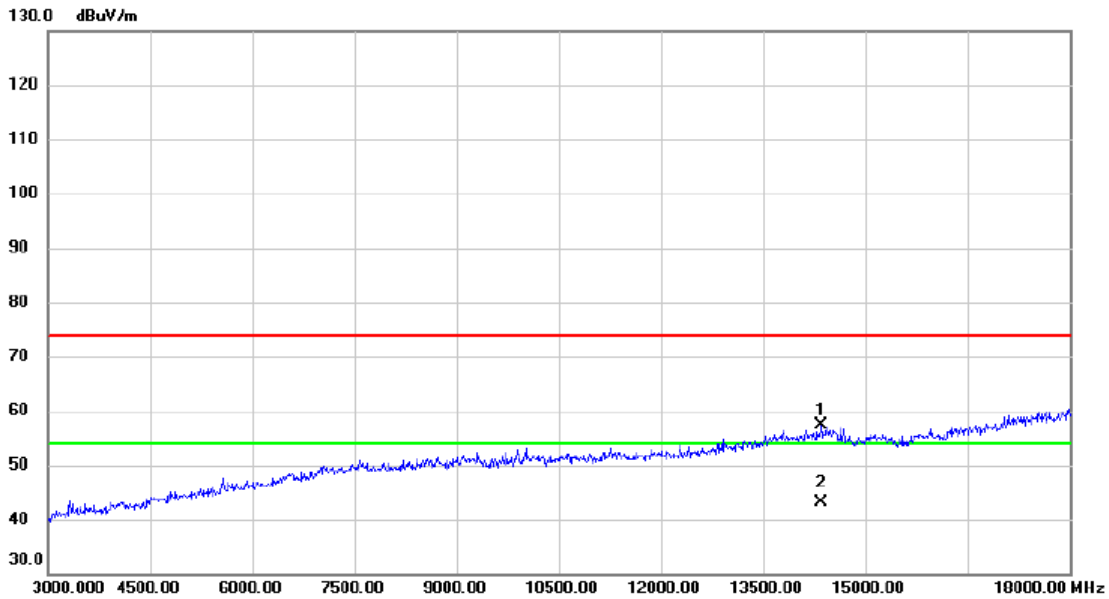


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14355.000	38.31	19.14	57.45	74.00	-16.55	peak	
2 *	14355.000	24.03	19.14	43.17	54.00	-10.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

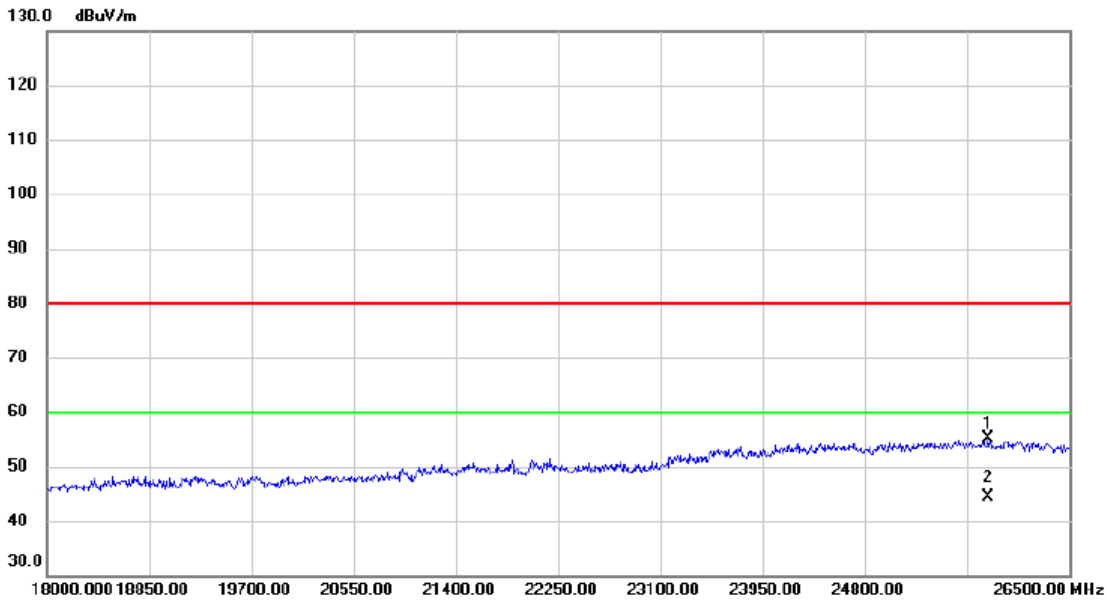


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25820.000	24.76	30.29	55.05	80.00	-24.95	peak	
2	*	25820.000	14.16	30.29	44.45	60.00	-15.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

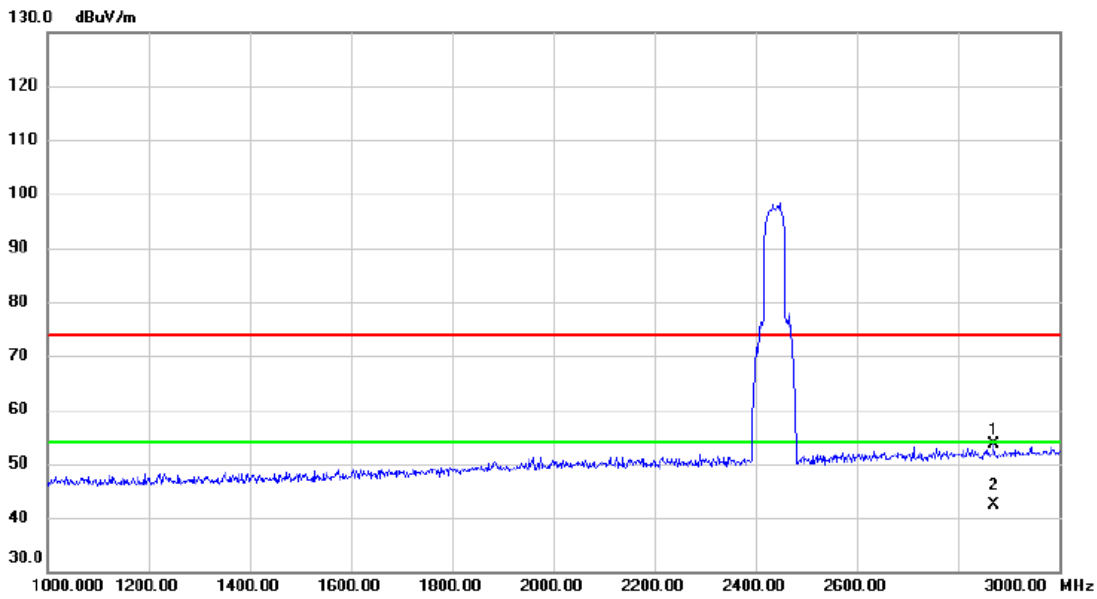


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2870.000	43.74	9.96	53.70	74.00	-20.30	peak	
2 *	2870.000	32.35	9.96	42.31	54.00	-11.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

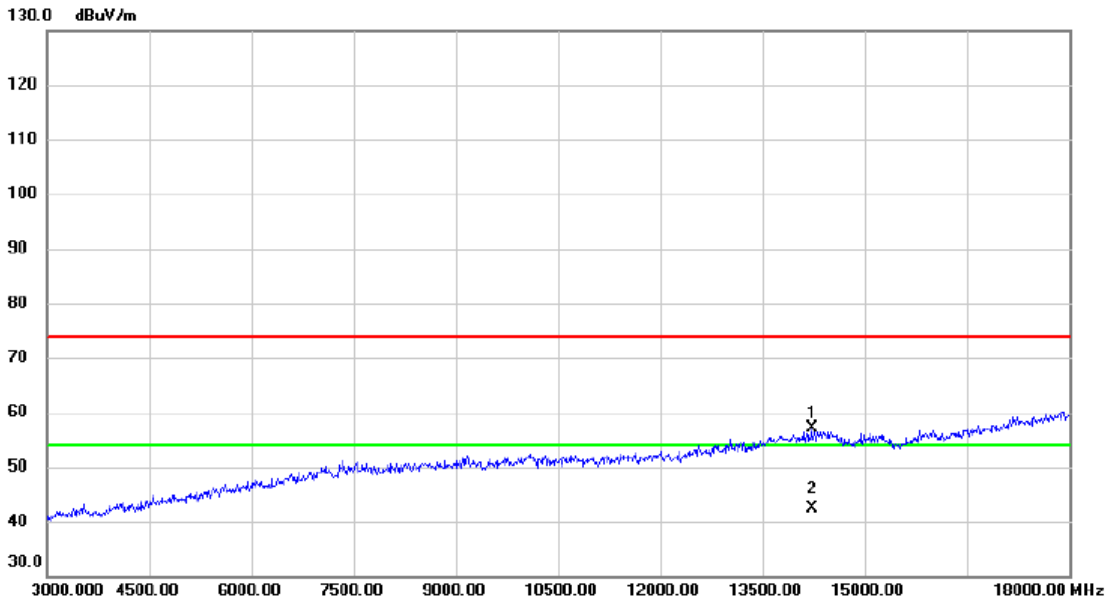


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14220.000	37.84	19.18	57.02	74.00	-16.98	peak	
2 *	14220.000	23.08	19.18	42.26	54.00	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

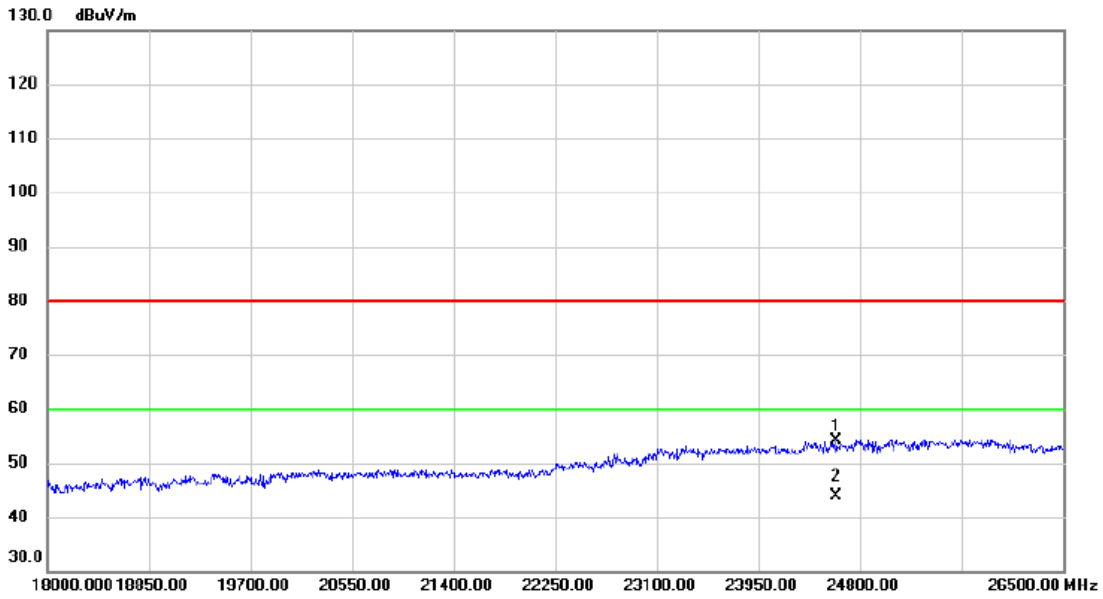


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		24604.500	24.26	29.99	54.25	80.00	-25.75	peak	
2	*	24604.500	13.88	29.99	43.87	60.00	-16.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Vertical

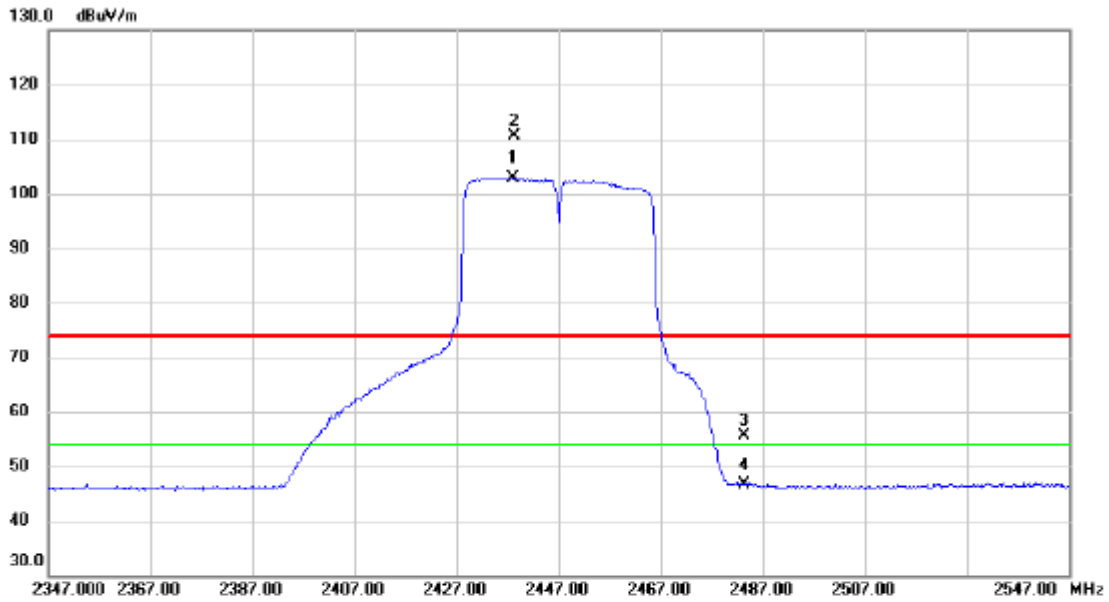


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2438.000	88.96	13.87	102.83	54.00	48.83	AVG	No Limit
2	X	2438.400	96.80	13.87	110.67	74.00	36.67	peak	No Limit
3		2483.500	41.63	13.93	55.56	74.00	-18.44	peak	
4		2483.500	32.78	13.93	46.71	54.00	-7.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Horizontal

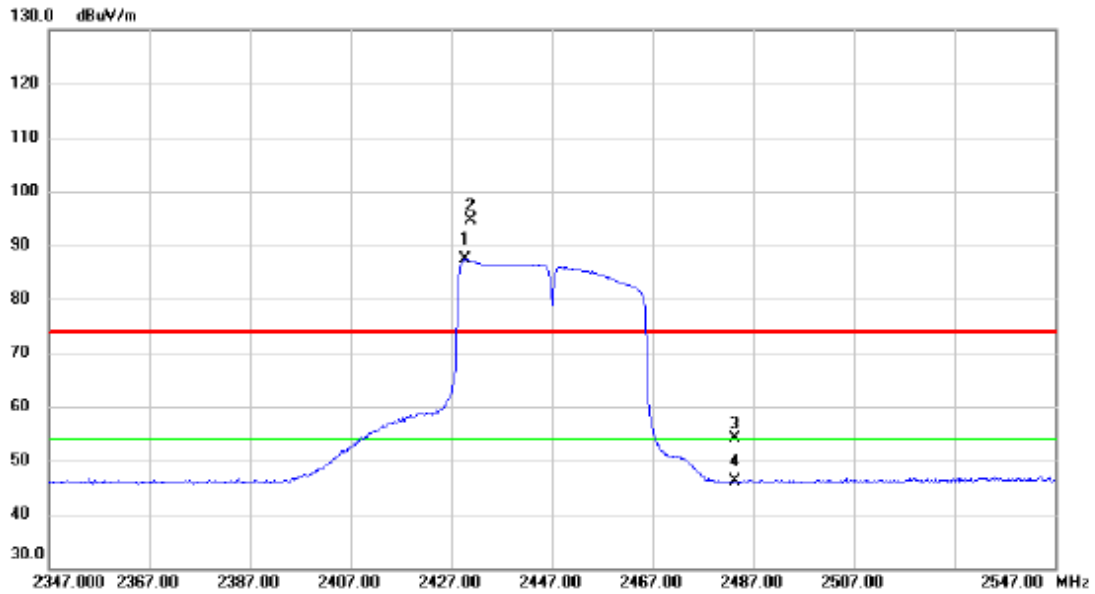


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2429.800	73.42	13.86	87.28	54.00	33.28	AVG	No Limit
2	X	2430.800	80.67	13.86	94.53	74.00	20.53	peak	No Limit
3		2483.500	40.13	13.93	54.06	74.00	-19.94	peak	
4		2483.500	32.20	13.93	46.13	54.00	-7.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

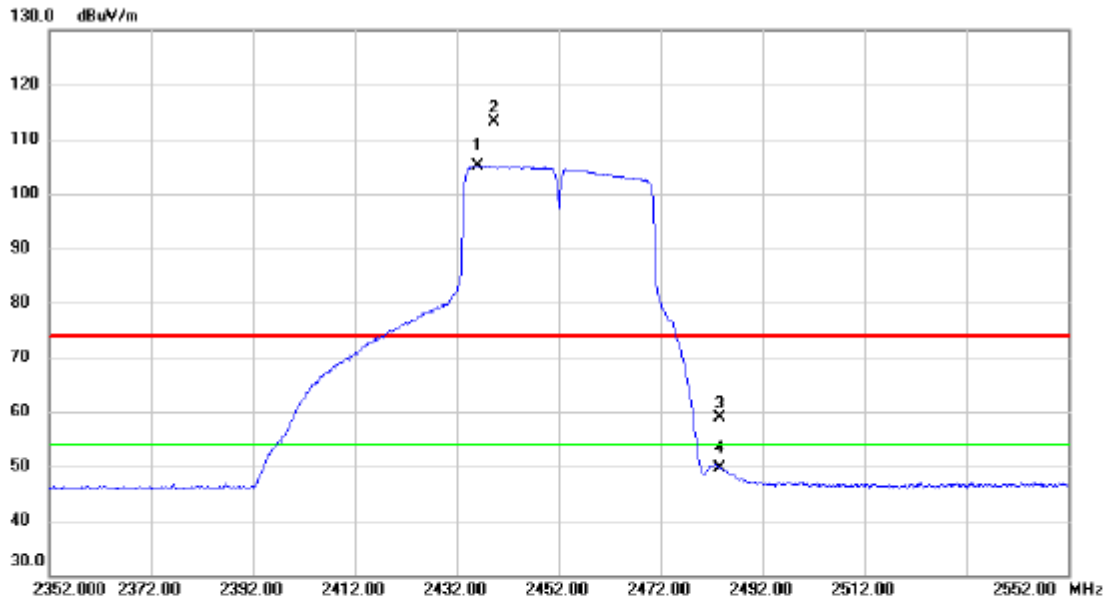


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2436.000	91.34	13.86	105.20	54.00	51.20	AVG	No Limit
2	X	2439.400	99.35	13.87	113.22	74.00	39.22	peak	No Limit
3		2483.500	45.03	13.93	58.96	74.00	-15.04	peak	
4		2483.500	35.68	13.93	49.61	54.00	-4.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

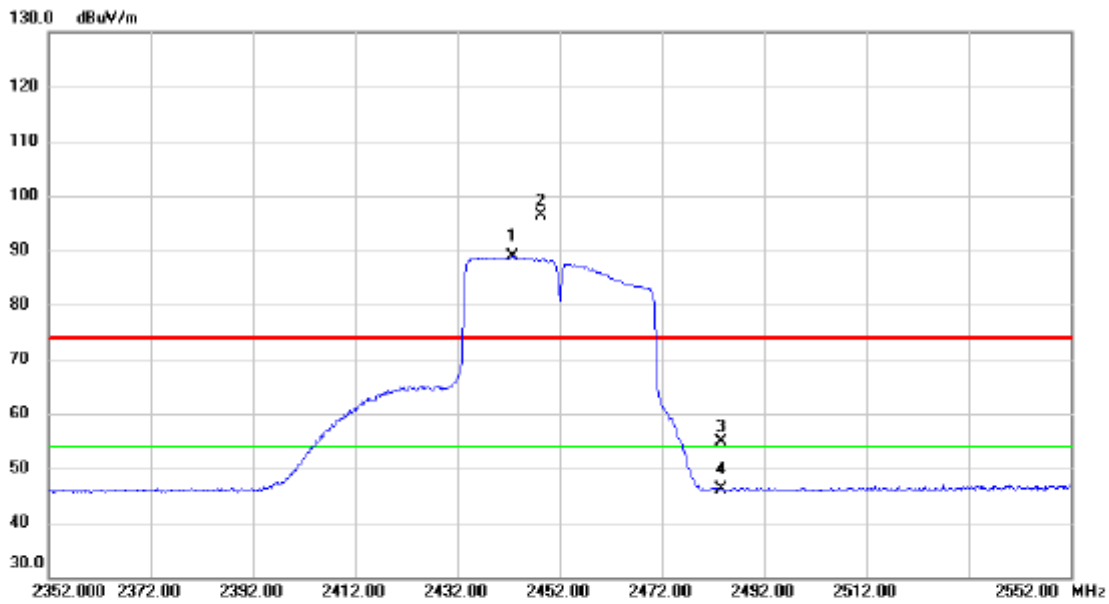

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2442.800	74.95	13.87	88.82	54.00	34.82	AVG	No Limit
2	X	2448.400	82.54	13.88	96.42	74.00	22.42	peak	No Limit
3		2483.500	40.89	13.93	54.82	74.00	-19.18	peak	
4		2483.500	32.17	13.93	46.10	54.00	-7.90	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz_242 Tone

Vertical

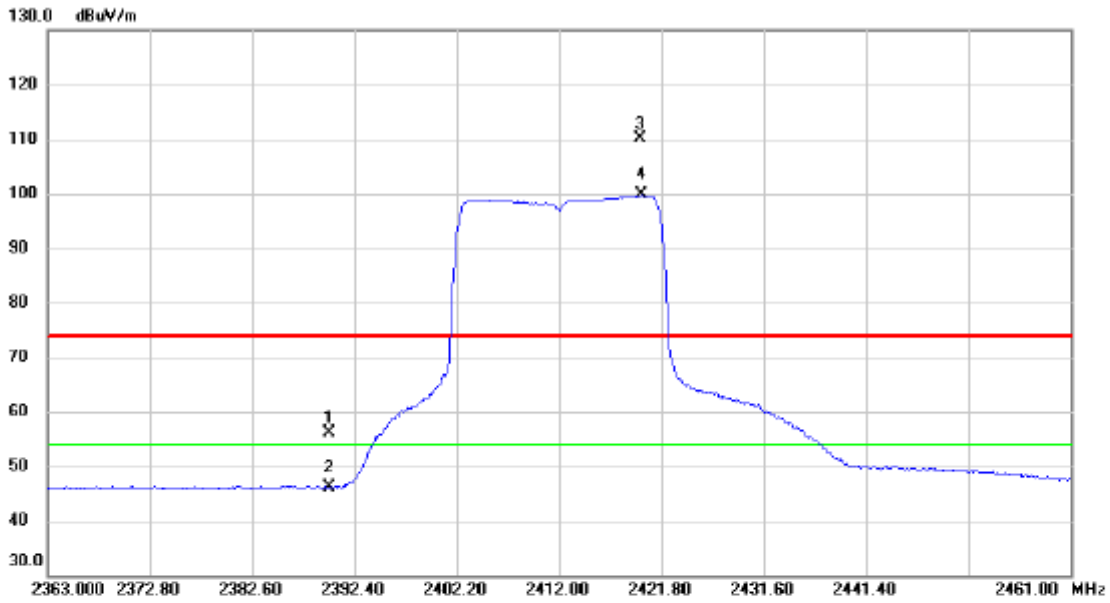

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	42.32	13.81	56.13	74.00	-17.87	peak	
2		2390.000	32.40	13.81	46.21	54.00	-7.79	AVG	
3	X	2419.742	96.37	13.84	110.21	74.00	36.21	peak	No Limit
4	*	2419.938	85.95	13.84	99.79	54.00	45.79	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz_242 Tone

Horizontal

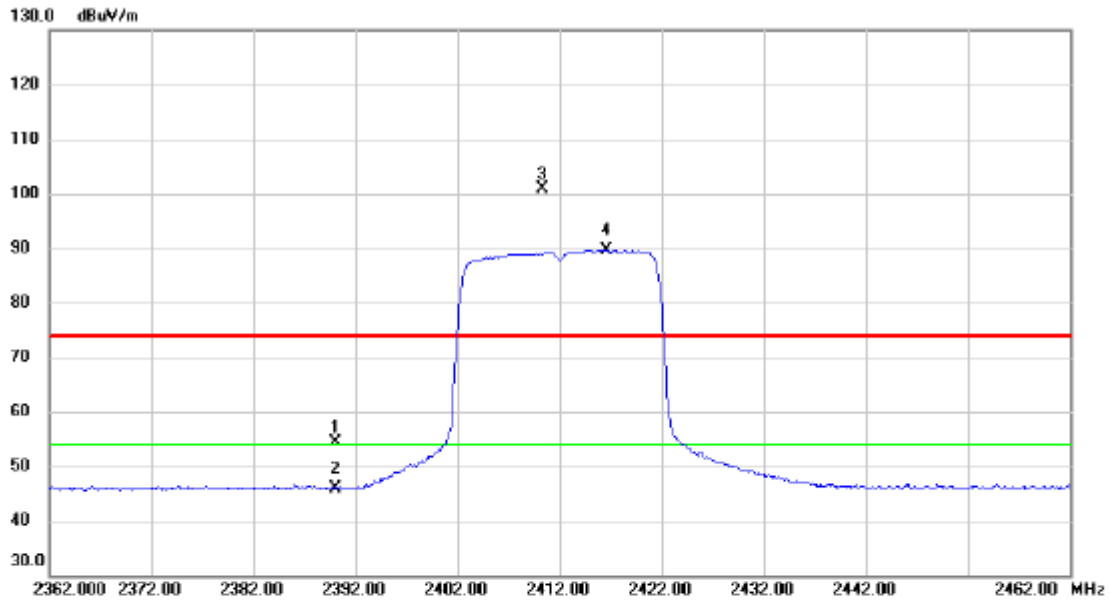


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.64	13.81	54.45	74.00	-19.55	peak	
2		2390.000	32.09	13.81	45.90	54.00	-8.10	AVG	
3	X	2410.300	87.12	13.82	100.94	74.00	26.94	peak	No Limit
4	*	2416.600	75.88	13.84	89.72	54.00	35.72	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz_242 Tone

Vertical

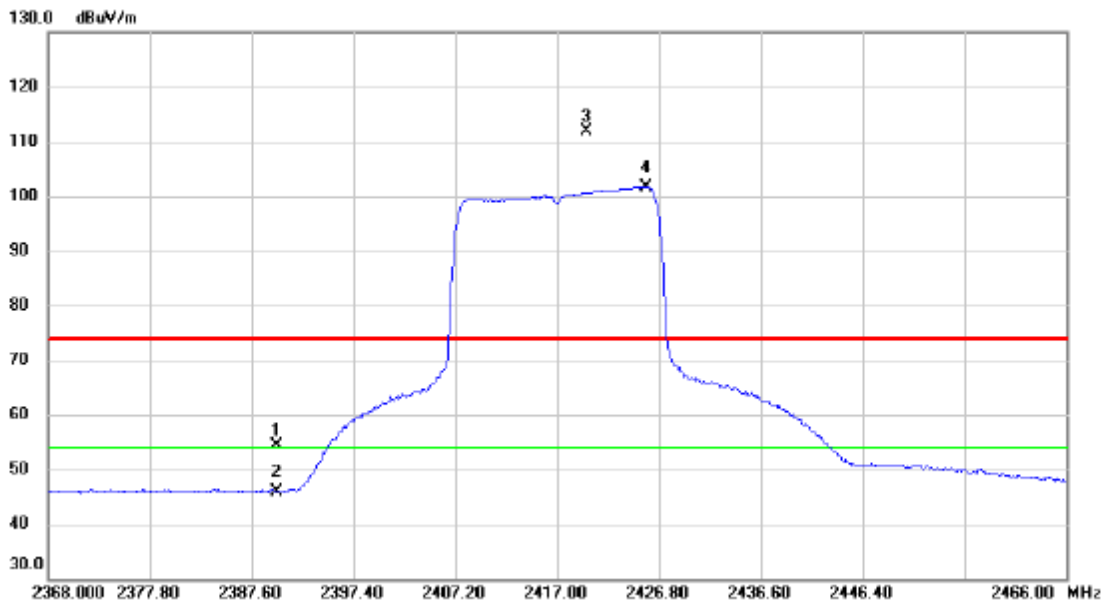


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.47	13.81	54.28	74.00	-19.72	peak	
2		2390.000	32.13	13.81	45.94	54.00	-8.06	AVG	
3	X	2419.842	98.11	13.84	111.95	74.00	37.95	peak	No Limit
4	*	2425.526	87.88	13.85	101.73	54.00	47.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz_242 Tone

Horizontal

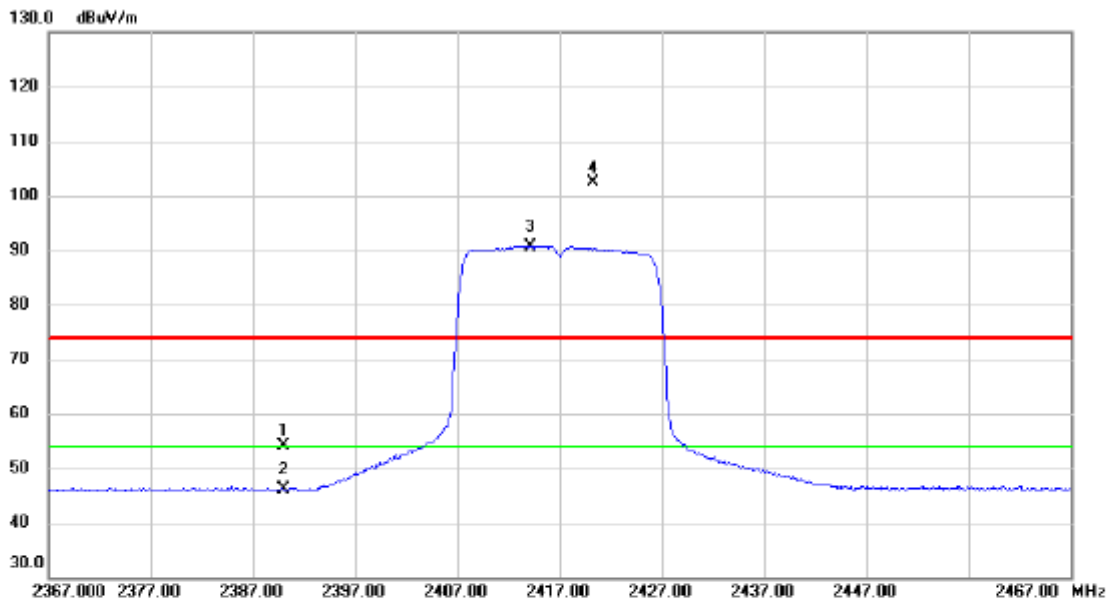


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	40.32	13.81	54.13	74.00	-19.87	peak	
2		2390.000	32.30	13.81	46.11	54.00	-7.89	AVG	
3	*	2414.200	76.86	13.84	90.70	54.00	36.70	AVG	No Limit
4	X	2420.300	88.53	13.84	102.37	74.00	28.37	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2422 MHz_242 Tone

Vertical

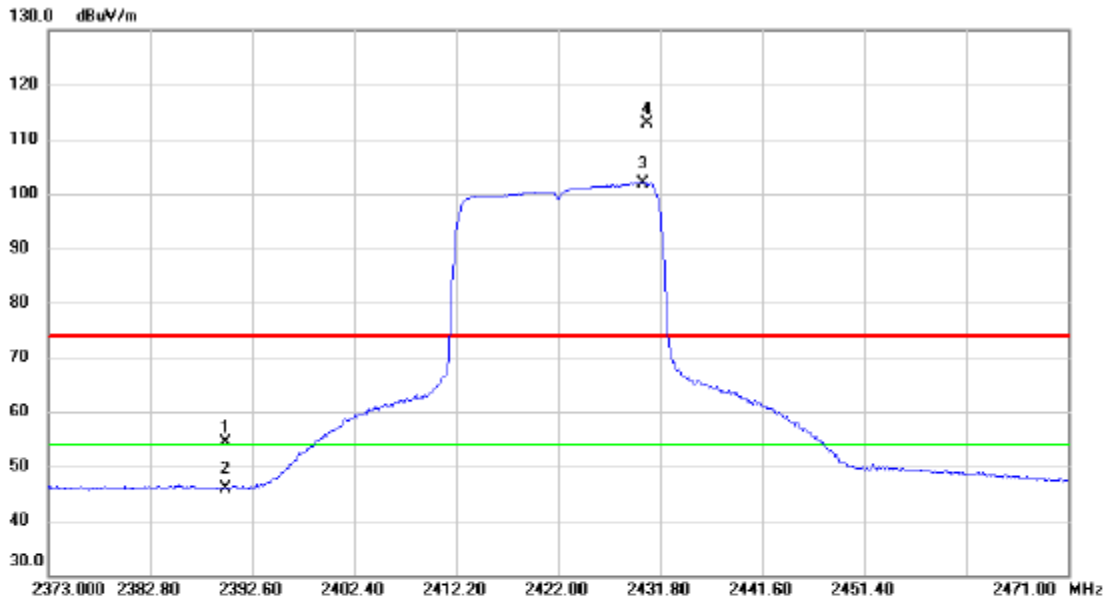


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.61	13.81	54.42	74.00	-19.58	peak	
2		2390.000	32.19	13.81	46.00	54.00	-8.00	AVG	
3	*	2430.134	88.12	13.86	101.98	54.00	47.98	AVG	No Limit
4	X	2430.526	99.00	13.86	112.86	74.00	38.86	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2422 MHz_242 Tone

Horizontal

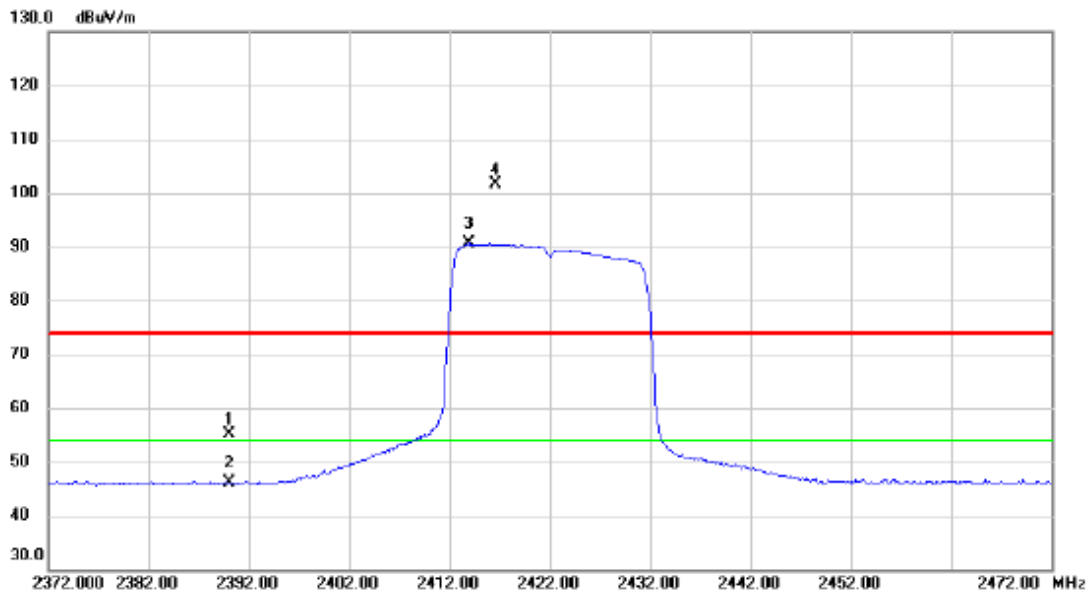


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.29	13.81	55.10	74.00	-18.90	peak	
2		2390.000	32.22	13.81	46.03	54.00	-7.97	AVG	
3	*	2413.900	76.75	13.84	90.59	54.00	36.59	AVG	No Limit
4	X	2416.600	87.72	13.84	101.56	74.00	27.56	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2427 MHz_242 Tone

Vertical

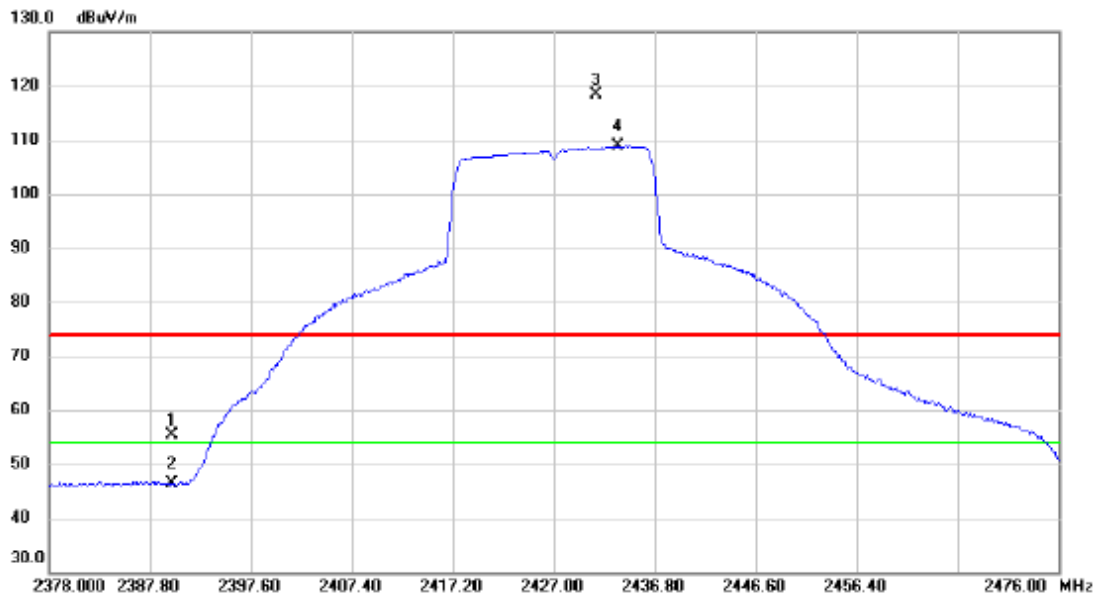


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.61	13.81	55.42	74.00	-18.58	peak	
2		2390.000	32.46	13.81	46.27	54.00	-7.73	AVG	
3	X	2431.116	104.52	13.86	118.38	74.00	44.38	peak	No Limit
4	*	2433.174	94.94	13.86	108.80	54.00	54.80	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2427 MHz_242 Tone

Horizontal

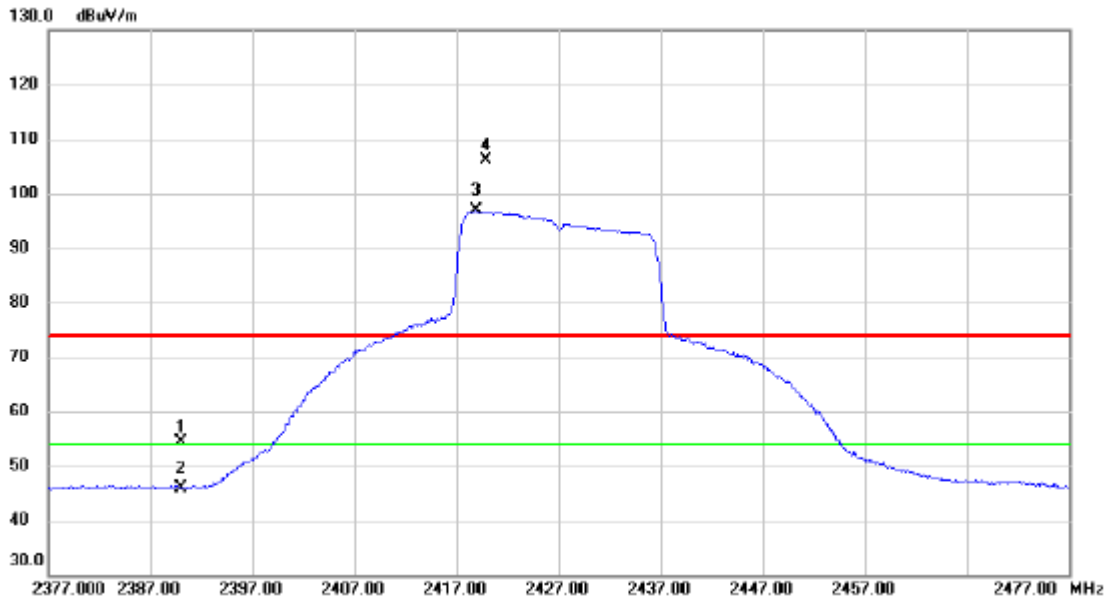


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.58	13.81	54.39	74.00	-19.61	peak	
2		2390.000	32.18	13.81	45.99	54.00	-8.01	AVG	
3	*	2418.900	82.95	13.84	96.79	54.00	42.79	AVG	No Limit
4	X	2419.800	92.37	13.84	106.21	74.00	32.21	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Vertical

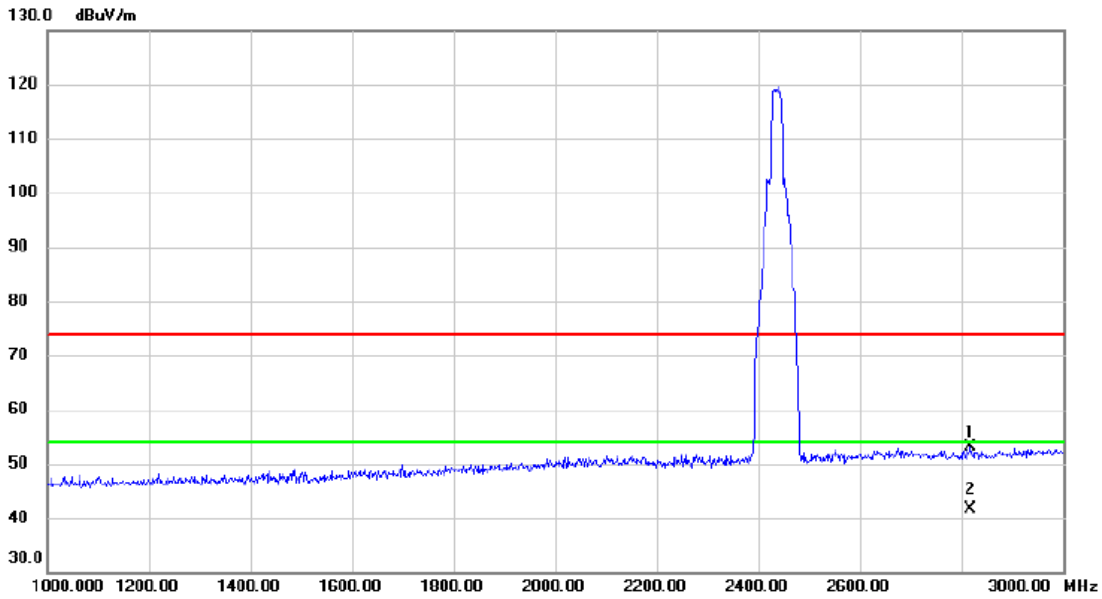


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2818.000	43.34	9.75	53.09	74.00	-20.91	peak	
2	*	2818.000	31.88	9.75	41.63	54.00	-12.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Vertical

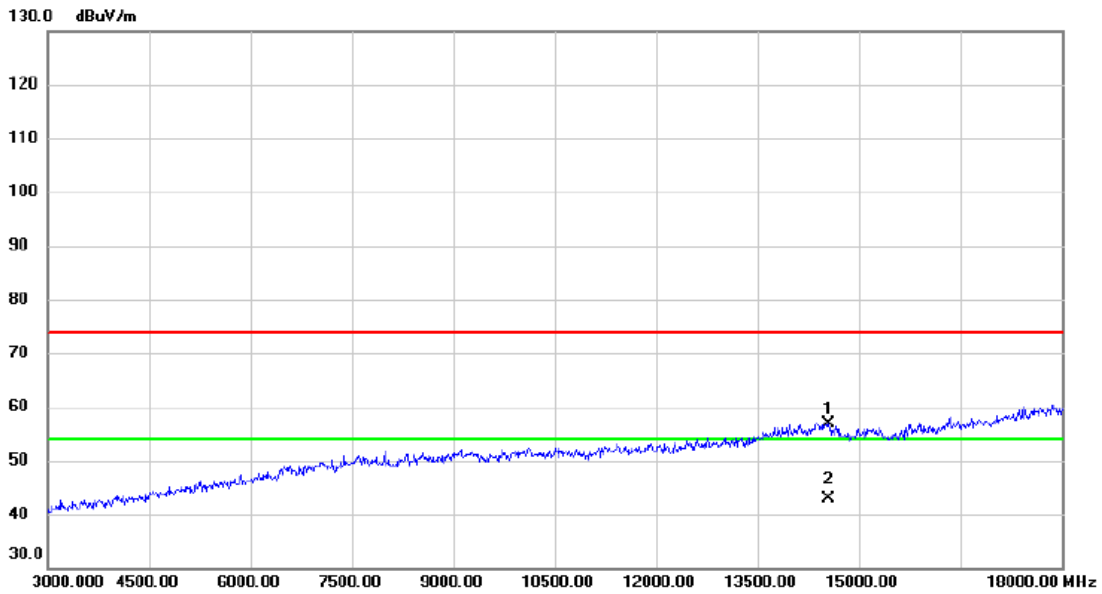


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14550.000	37.99	18.96	56.95	74.00	-17.05	peak	
2	*	14550.000	23.83	18.96	42.79	54.00	-11.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Vertical

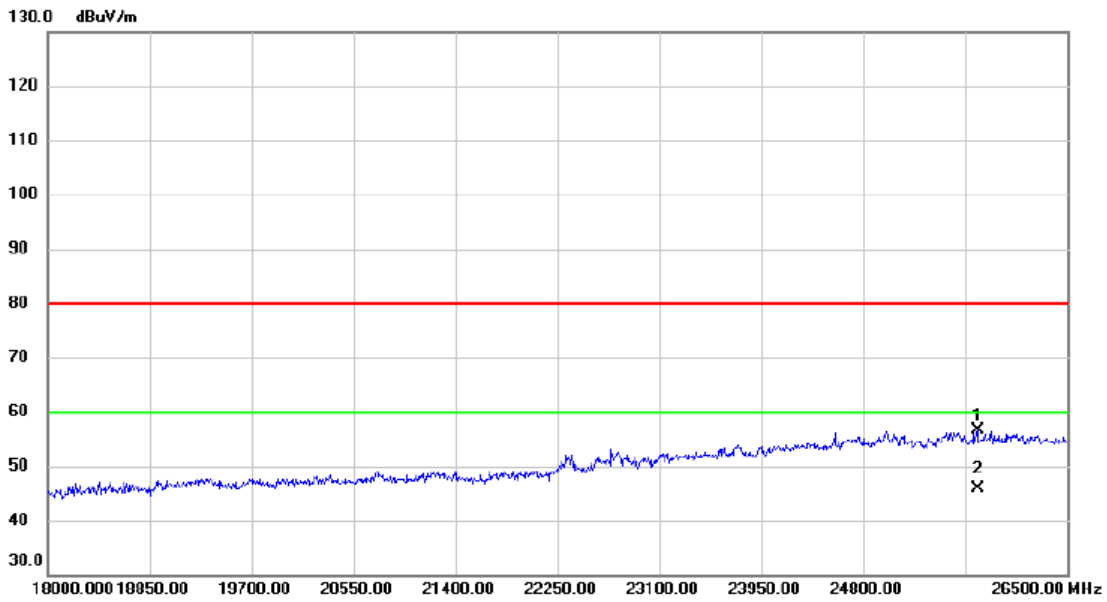


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25752.000	26.36	30.24	56.60	80.00	-23.40	peak	
2 *	25752.000	15.76	30.24	46.00	60.00	-14.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Horizontal

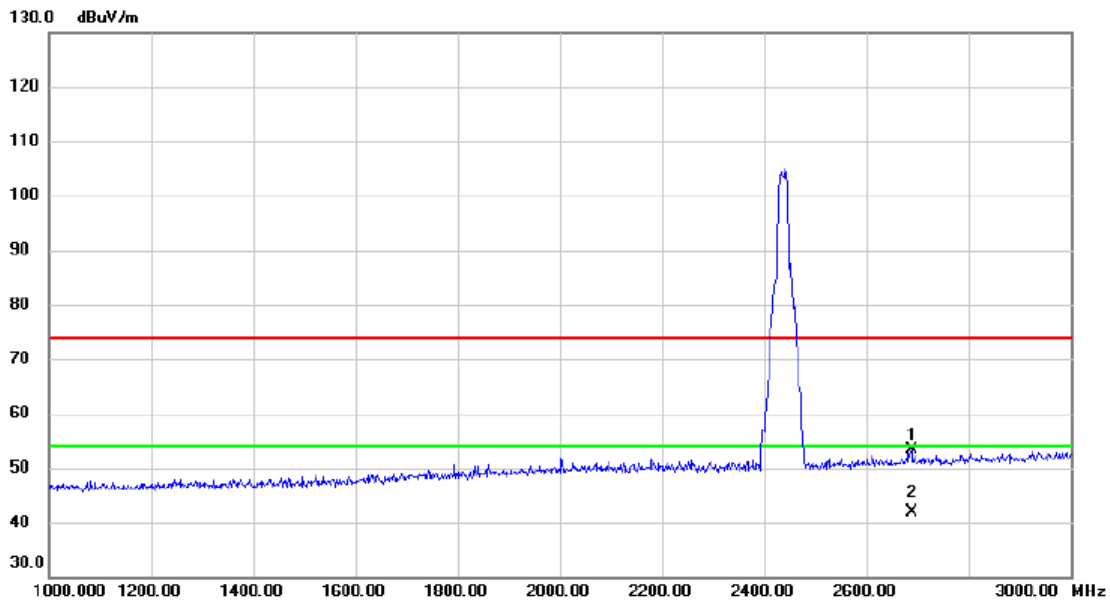


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2688.000	44.20	9.20	53.40	74.00	-20.60	peak	
2	*	2688.000	32.74	9.20	41.94	54.00	-12.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Horizontal

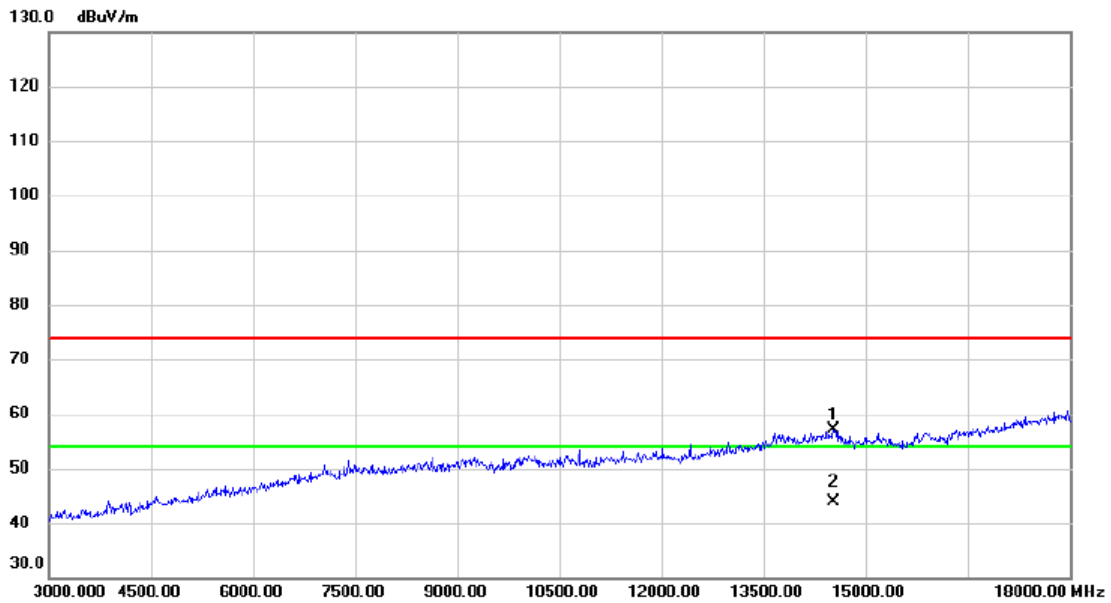

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14520.000	38.20	19.04	57.24	74.00	-16.76	peak	
2 *	14520.000	24.78	19.04	43.82	54.00	-10.18	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz_242 Tone

Horizontal

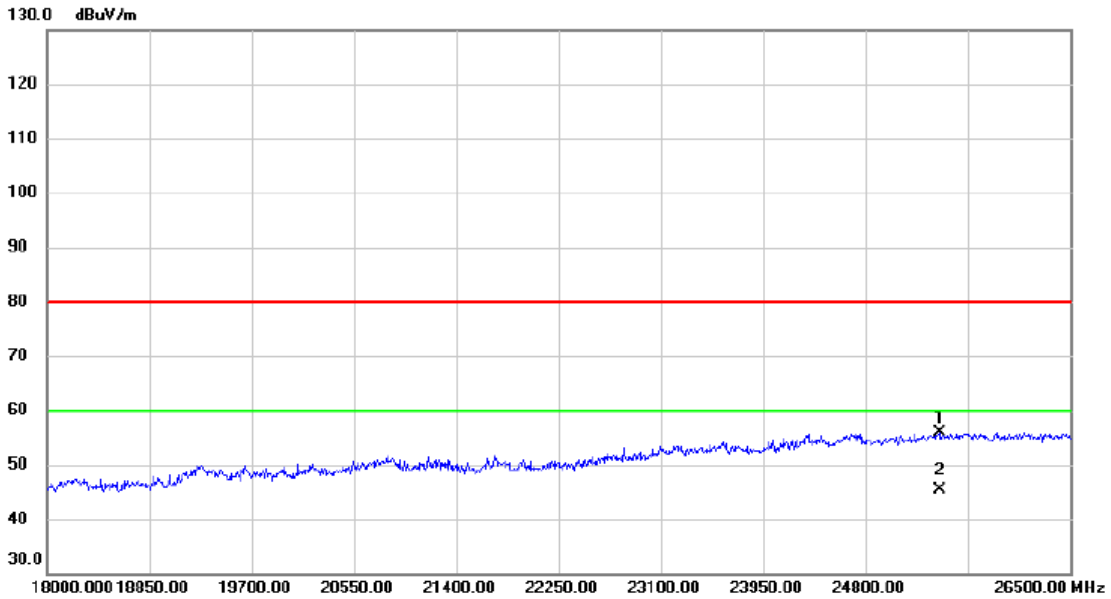


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25412.000	25.80	30.16	55.96	80.00	-24.04	peak	
2 *	25412.000	15.23	30.16	45.39	60.00	-14.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2452 MHz_242 Tone

Vertical

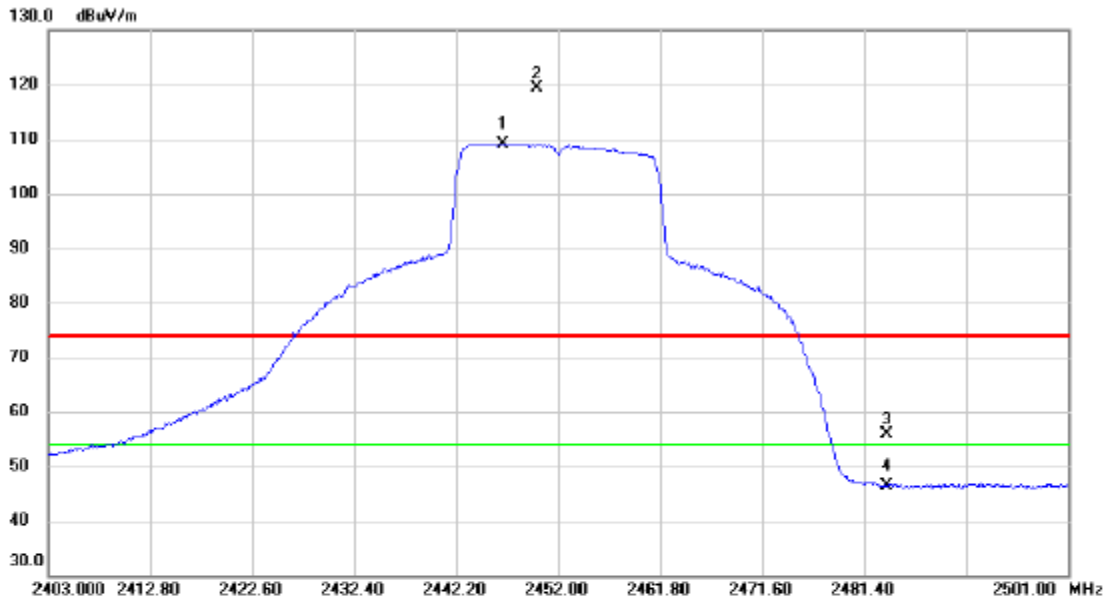

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2446.708	95.19	13.88	109.07	54.00	55.07	AVG	No Limit
2	X	2450.040	105.48	13.88	119.36	74.00	45.36	peak	No Limit
3		2483.500	41.94	13.93	55.87	74.00	-18.13	peak	
4		2483.500	32.46	13.93	46.39	54.00	-7.61	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2452 MHz_242 Tone

Horizontal

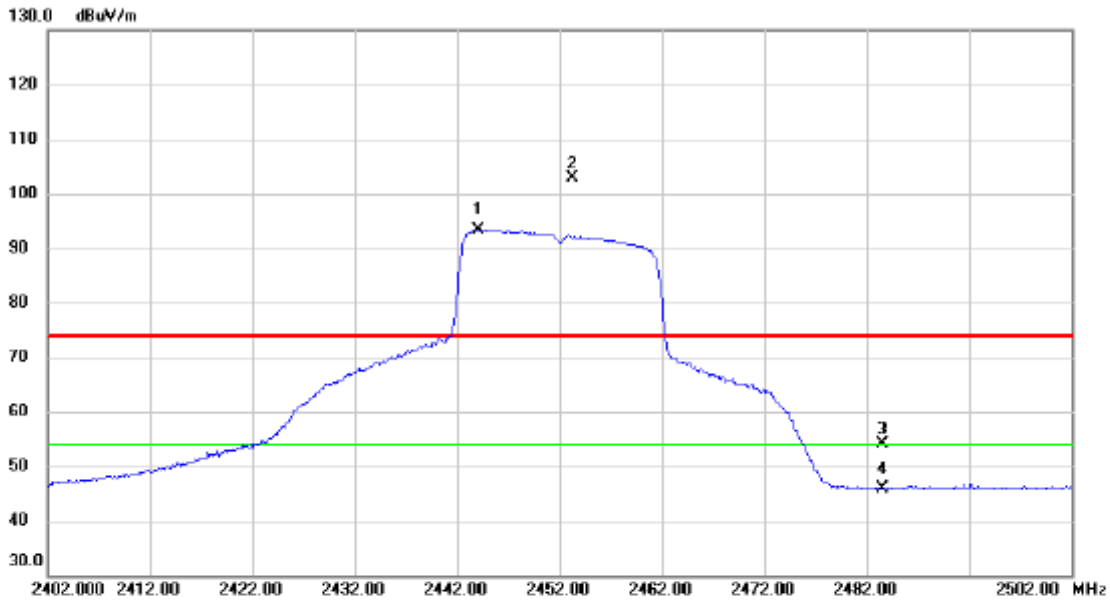


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.000	79.44	13.87	93.31	54.00	39.31	AVG	No Limit
2	X	2453.300	88.97	13.88	102.85	74.00	28.85	peak	No Limit
3		2483.500	40.12	13.93	54.05	74.00	-19.95	peak	
4		2483.500	31.95	13.93	45.88	54.00	-8.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz_242 Tone

Vertical

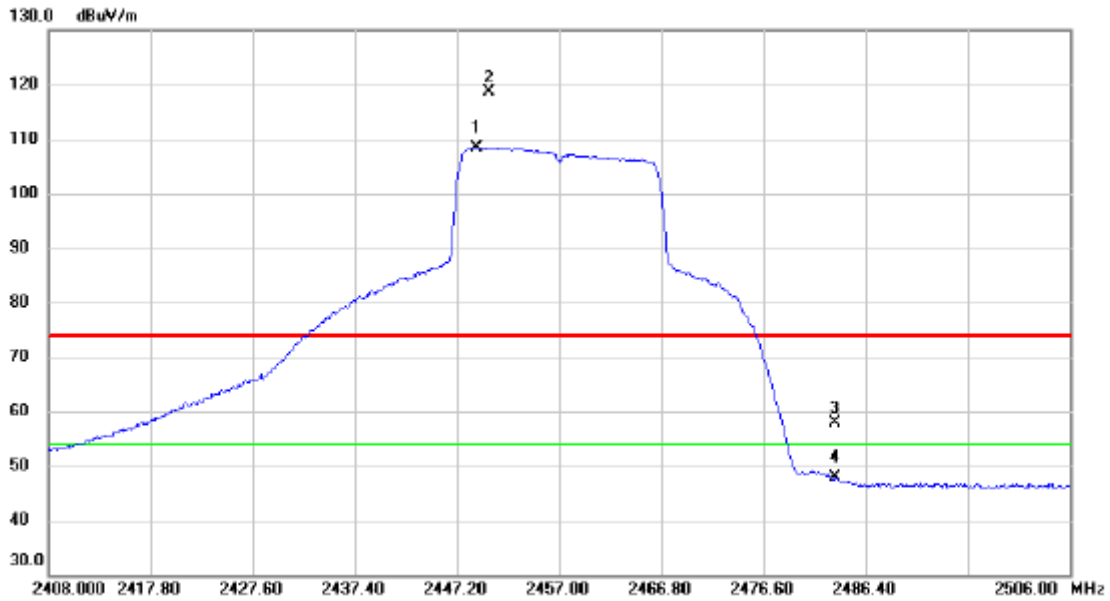


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.160	94.54	13.88	108.42	54.00	54.42	AVG	No Limit
2	X	2450.238	104.79	13.88	118.67	74.00	44.67	peak	No Limit
3		2483.500	43.96	13.93	57.89	74.00	-16.11	peak	
4		2483.500	33.95	13.93	47.88	54.00	-6.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz_242 Tone

Horizontal

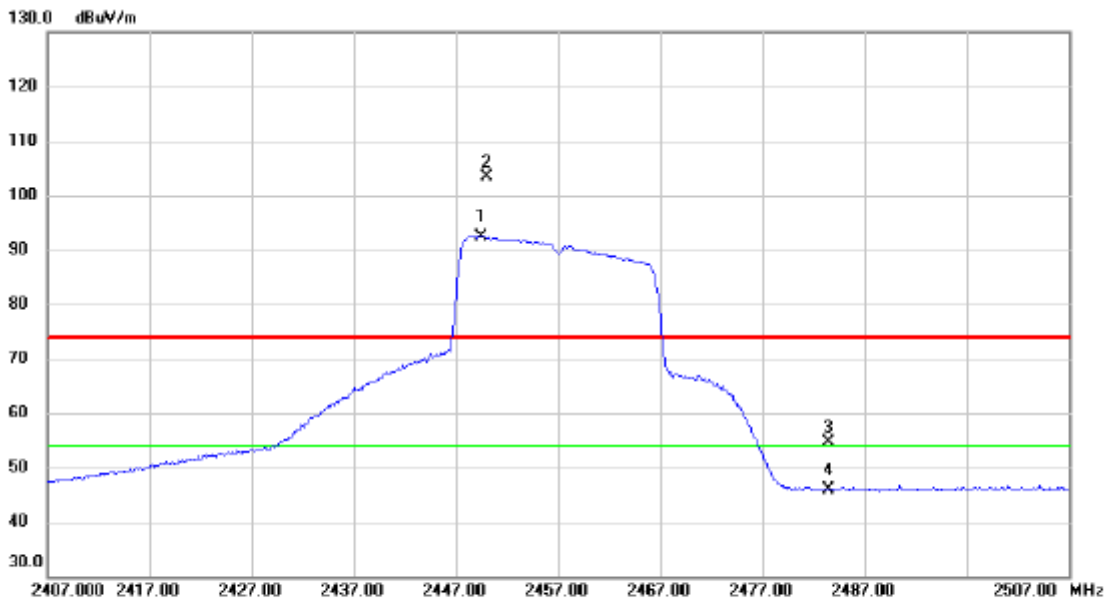


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.400	78.60	13.88	92.48	54.00	38.48	AVG	No Limit
2	X	2450.000	89.38	13.88	103.26	74.00	29.26	peak	No Limit
3		2483.500	40.62	13.93	54.55	74.00	-19.45	peak	
4		2483.500	32.03	13.93	45.96	54.00	-8.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz_242 Tone

Vertical

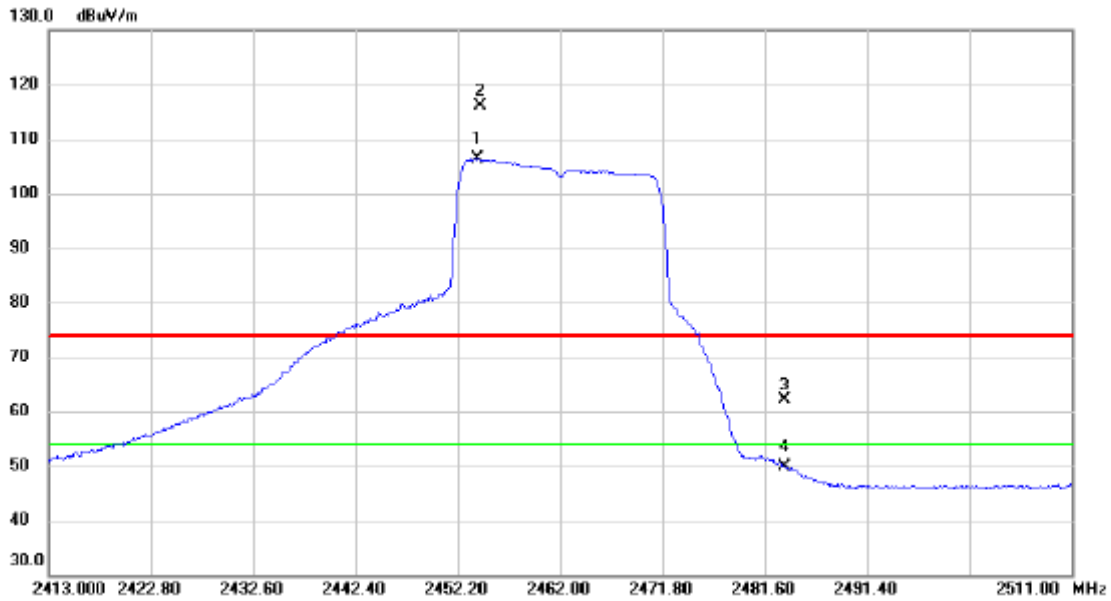


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.160	92.48	13.88	106.36	54.00	52.36	AVG	No Limit
2	X	2454.356	102.35	13.89	116.24	74.00	42.24	peak	No Limit
3		2483.500	48.13	13.93	62.06	74.00	-11.94	peak	
4		2483.500	35.86	13.93	49.79	54.00	-4.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz_242 Tone

Horizontal

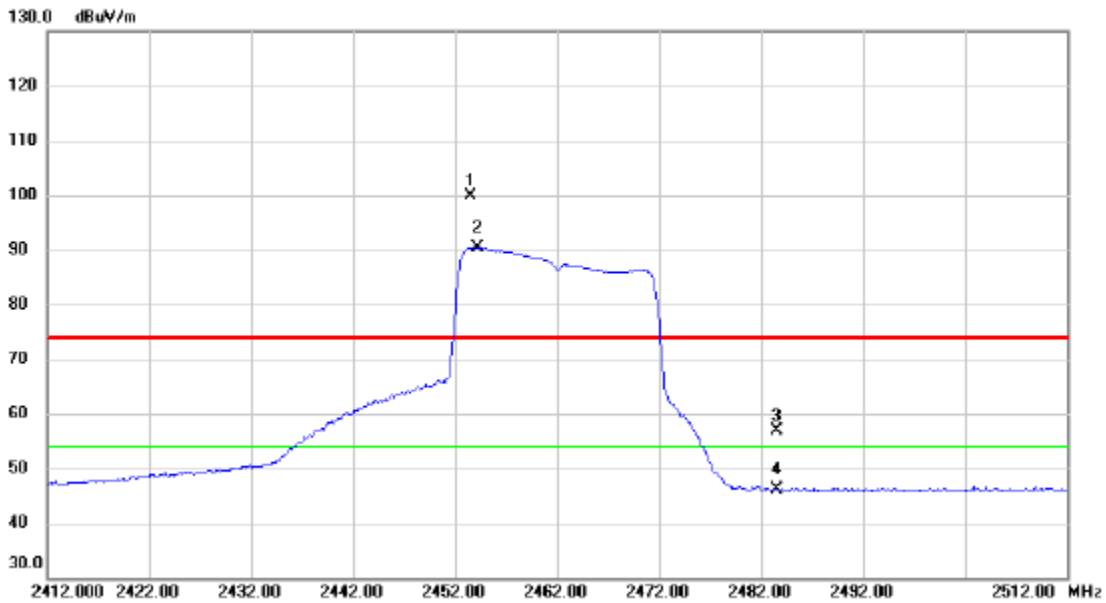


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2453.500	86.09	13.88	99.97	74.00	25.97	peak	No Limit
2	*	2454.200	76.56	13.89	90.45	54.00	36.45	AVG	No Limit
3		2483.500	42.97	13.93	56.90	74.00	-17.10	peak	
4		2483.500	32.31	13.93	46.24	54.00	-7.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz_484 Tone

Vertical

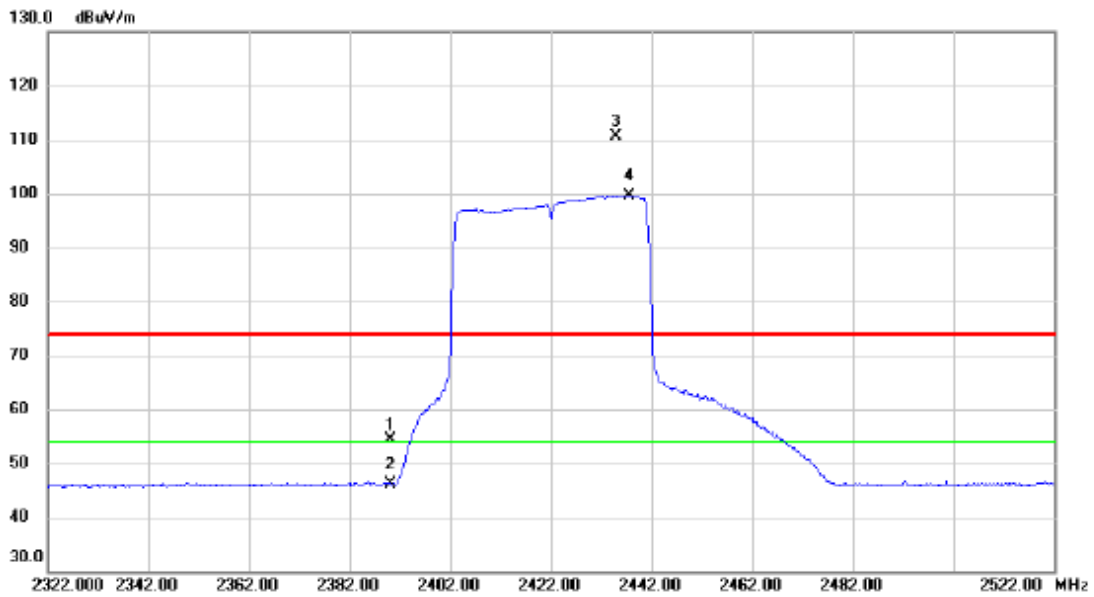


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.58	13.81	54.39	74.00	-19.61	peak	
2		2390.000	32.27	13.81	46.08	54.00	-7.92	AVG	
3	X	2435.000	96.88	13.86	110.74	74.00	36.74	peak	No Limit
4	*	2437.600	85.72	13.87	99.59	54.00	45.59	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz_484 Tone

Horizontal

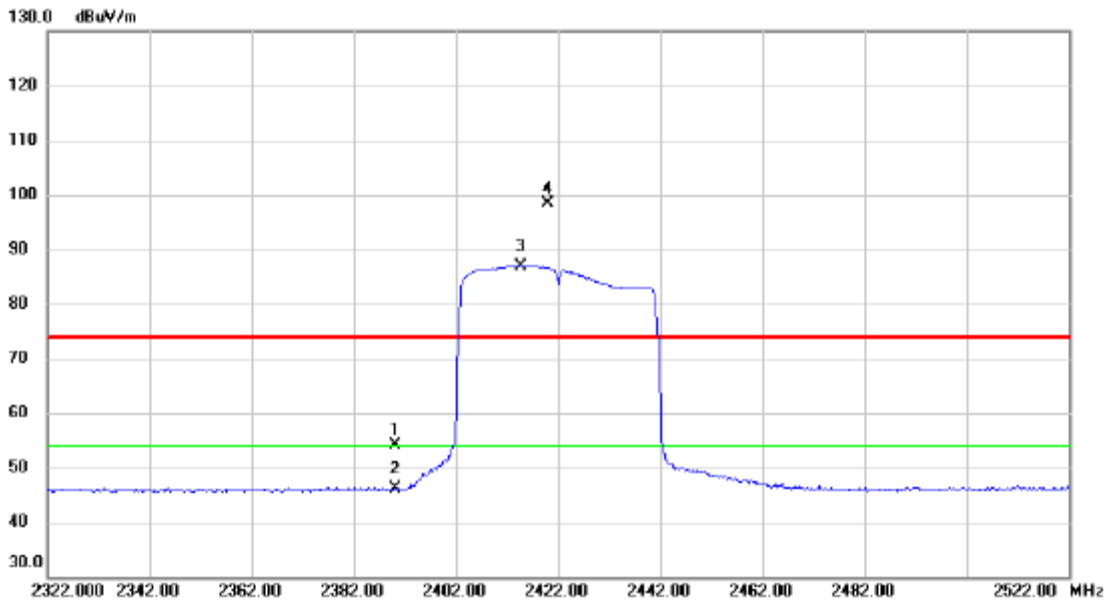


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.31	13.81	54.12	74.00	-19.88	peak	
2		2390.000	32.33	13.81	46.14	54.00	-7.86	AVG	
3	*	2414.600	73.16	13.84	87.00	54.00	33.00	AVG	No Limit
4	X	2420.000	84.54	13.84	98.38	74.00	24.38	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427MHz_484 Tone

Vertical

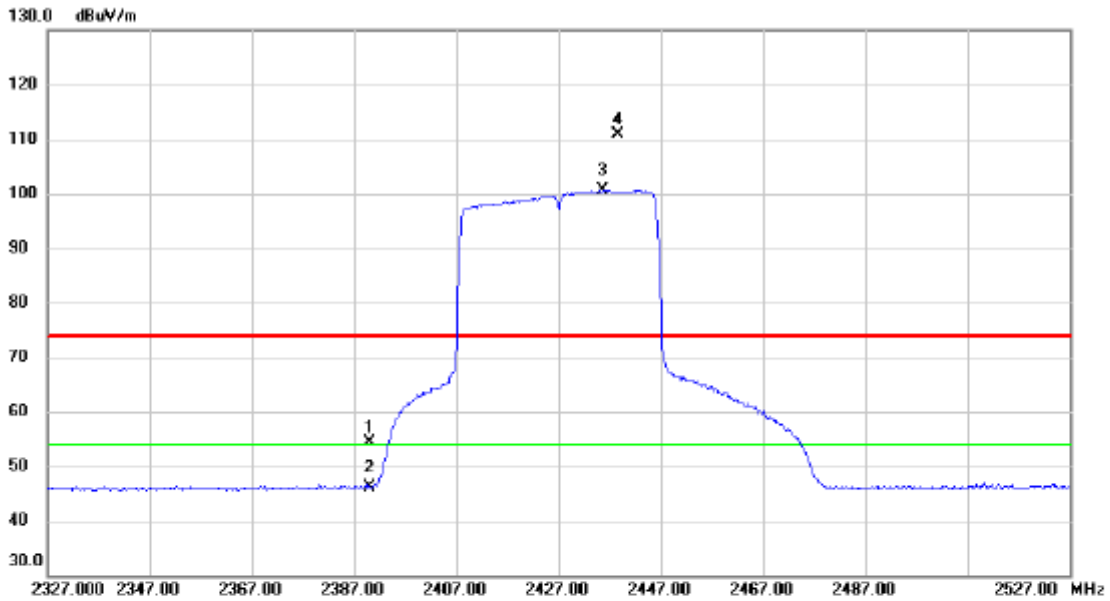


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.67	13.81	54.48	74.00	-19.52	peak	
2		2390.000	32.42	13.81	46.23	54.00	-7.77	AVG	
3	*	2435.600	86.84	13.86	100.70	54.00	46.70	AVG	No Limit
4	X	2438.600	97.00	13.87	110.87	74.00	36.87	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427MHz_484 Tone

Horizontal

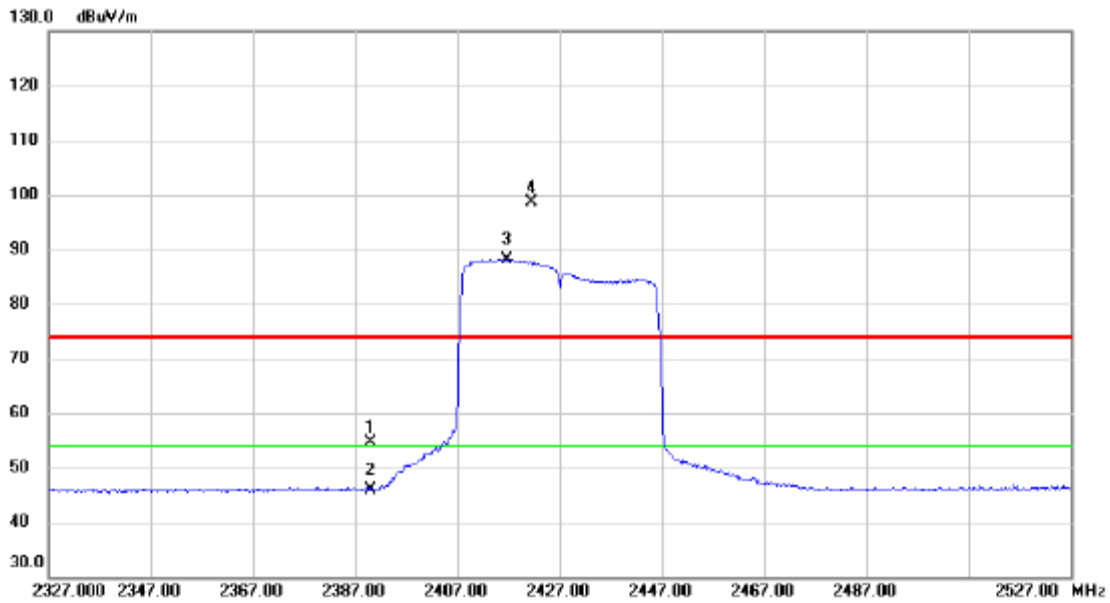


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.89	13.81	54.70	74.00	-19.30	peak	
2		2390.000	32.19	13.81	46.00	54.00	-8.00	AVG	
3	*	2416.800	74.23	13.84	88.07	54.00	34.07	AVG	No Limit
4	X	2421.600	84.85	13.85	98.70	74.00	24.70	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2432MHz_484 Tone

Vertical

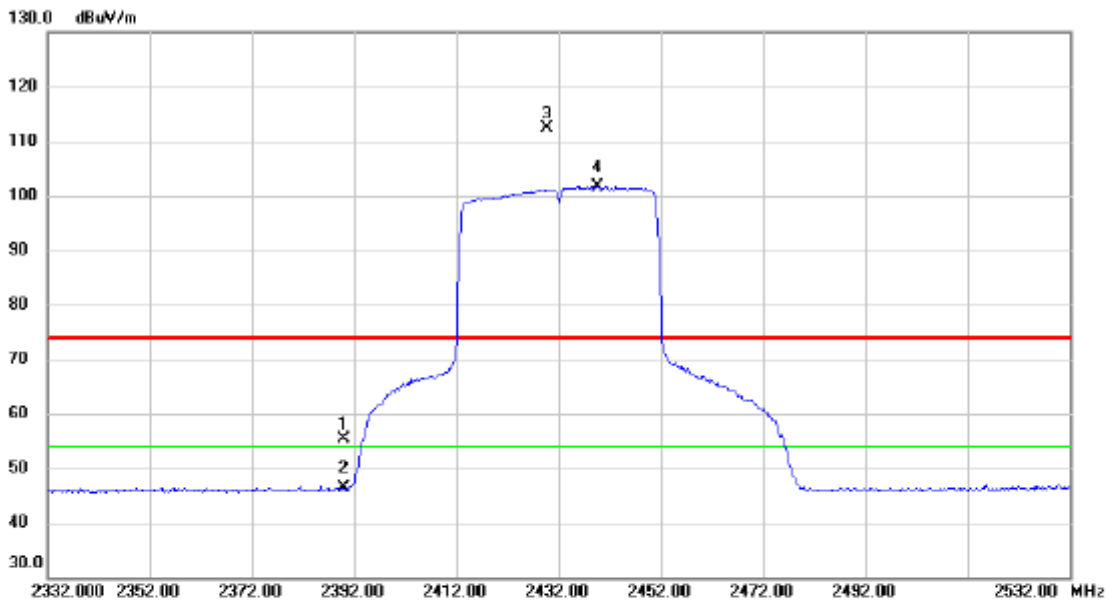


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.45	13.81	55.26	74.00	-18.74	peak	
2		2390.000	32.60	13.81	46.41	54.00	-7.59	AVG	
3	X	2429.800	98.53	13.86	112.39	74.00	38.39	peak	No Limit
4	*	2439.600	87.73	13.87	101.60	54.00	47.60	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2432MHz_484 Tone

Horizontal

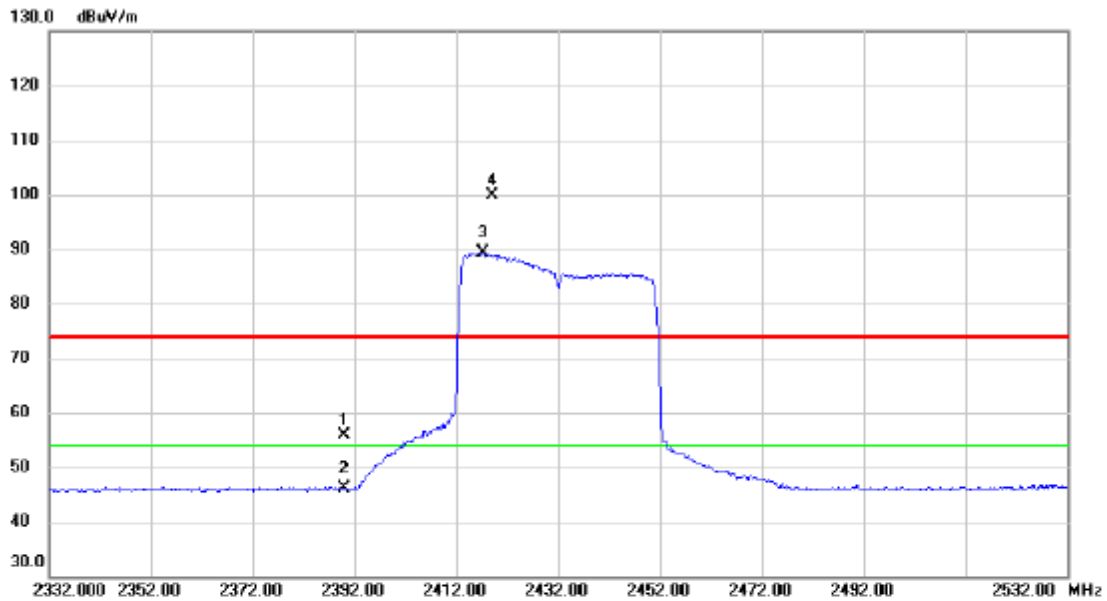


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.02	13.81	55.83	74.00	-18.17	peak	
2		2390.000	32.26	13.81	46.07	54.00	-7.93	AVG	
3	*	2417.200	75.42	13.84	89.26	54.00	35.26	AVG	No Limit
4	X	2419.000	86.13	13.84	99.97	74.00	25.97	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Vertical

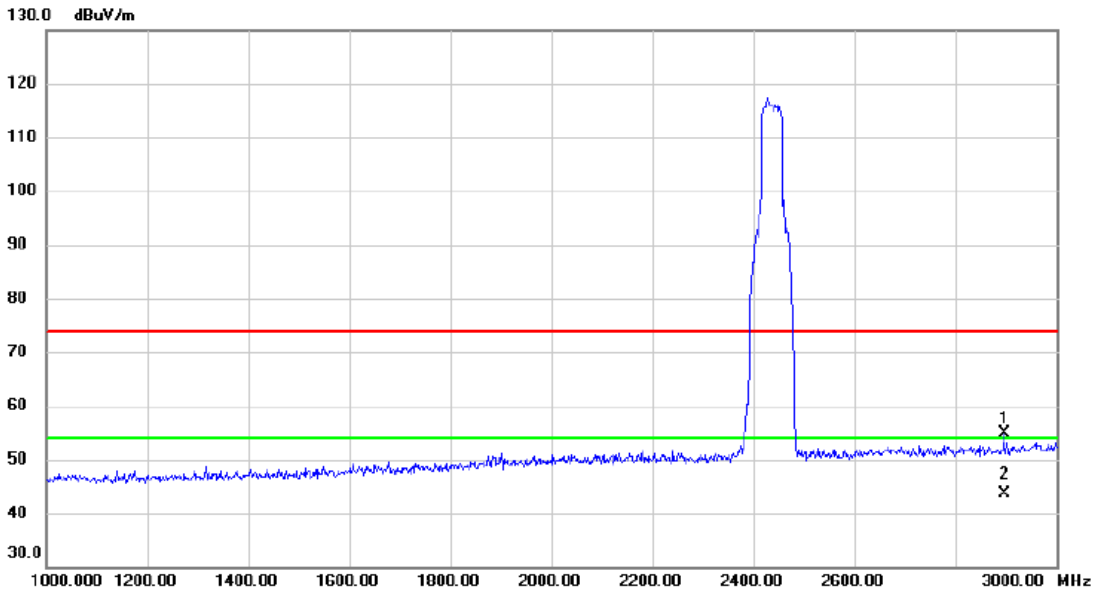


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2896.000	44.86	10.07	54.93	74.00	-19.07	peak	
2 *	2896.000	33.57	10.07	43.64	54.00	-10.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Vertical

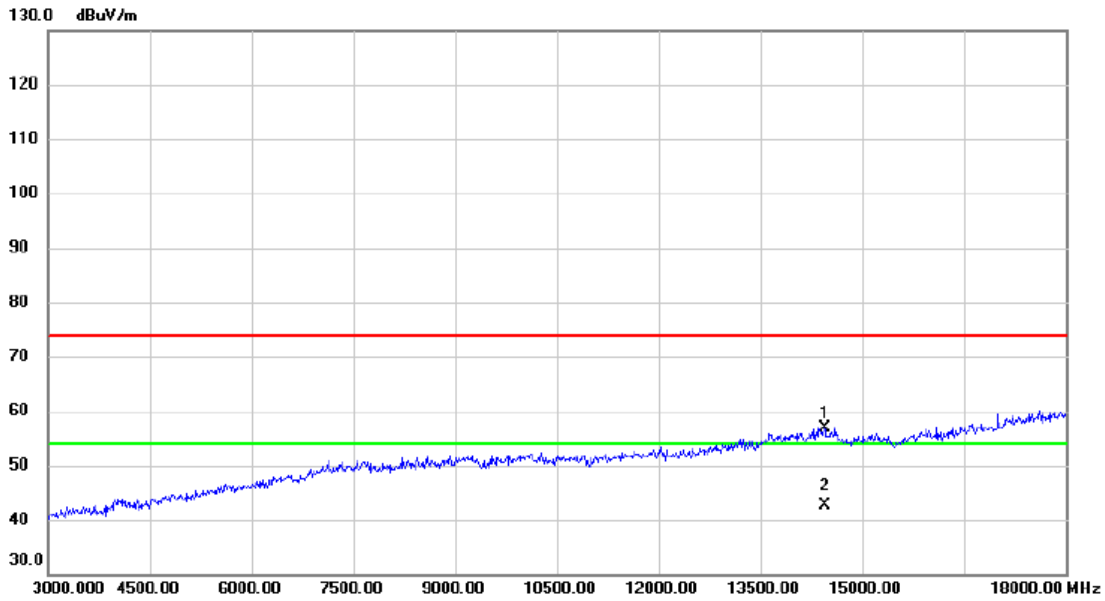


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14445.000	37.76	19.12	56.88	74.00	-17.12	peak	
2	*	14445.000	23.54	19.12	42.66	54.00	-11.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Vertical

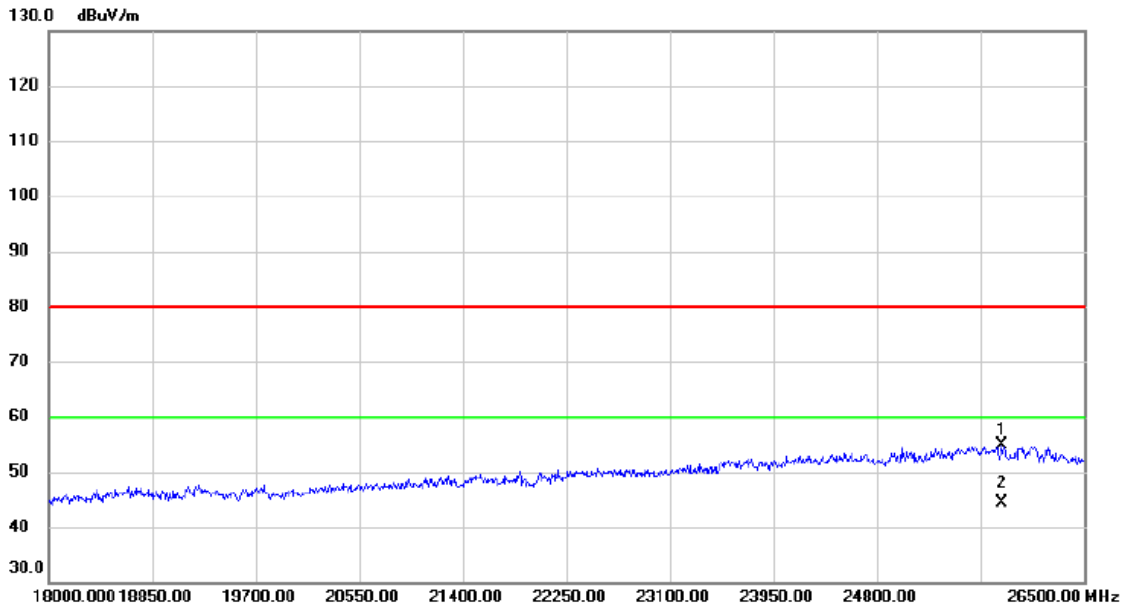


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25820.000	24.69	30.29	54.98	80.00	-25.02	peak	
2 *	25820.000	14.18	30.29	44.47	60.00	-15.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Horizontal

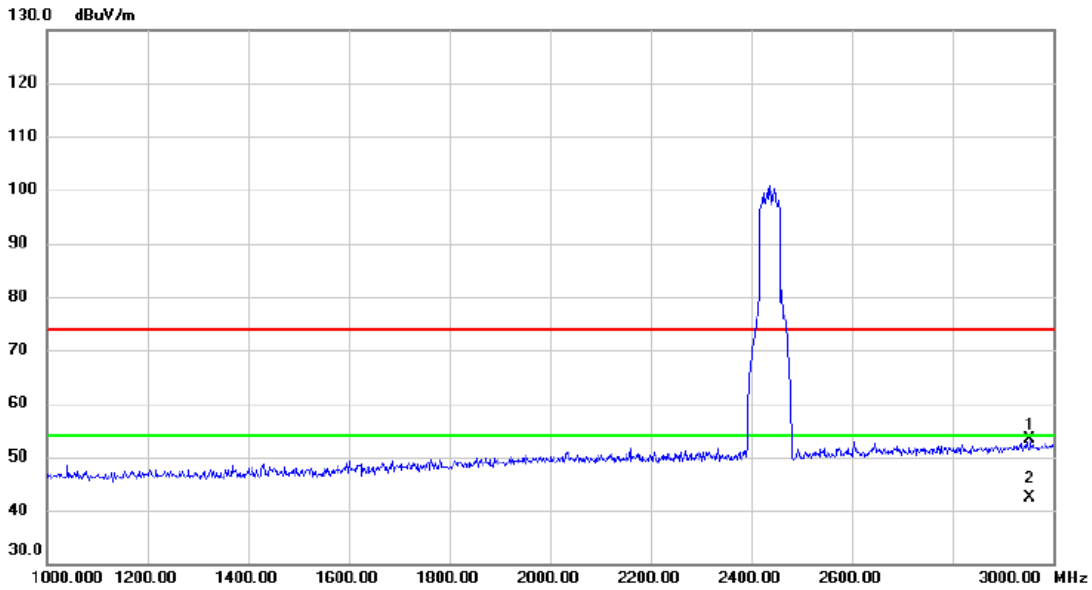


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2954.000	43.03	10.32	53.35	74.00	-20.65	peak	
2	*	2954.000	32.10	10.32	42.42	54.00	-11.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Horizontal

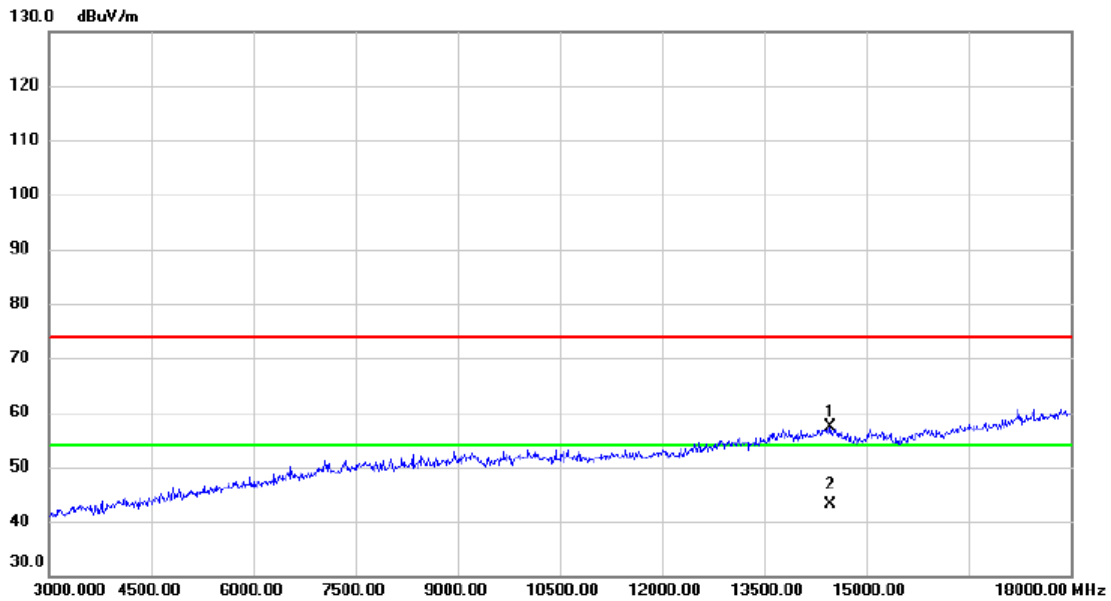


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14475.000	38.23	19.11	57.34	74.00	-16.66	peak	
2 *	14475.000	24.14	19.11	43.25	54.00	-10.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz_484 Tone

Horizontal

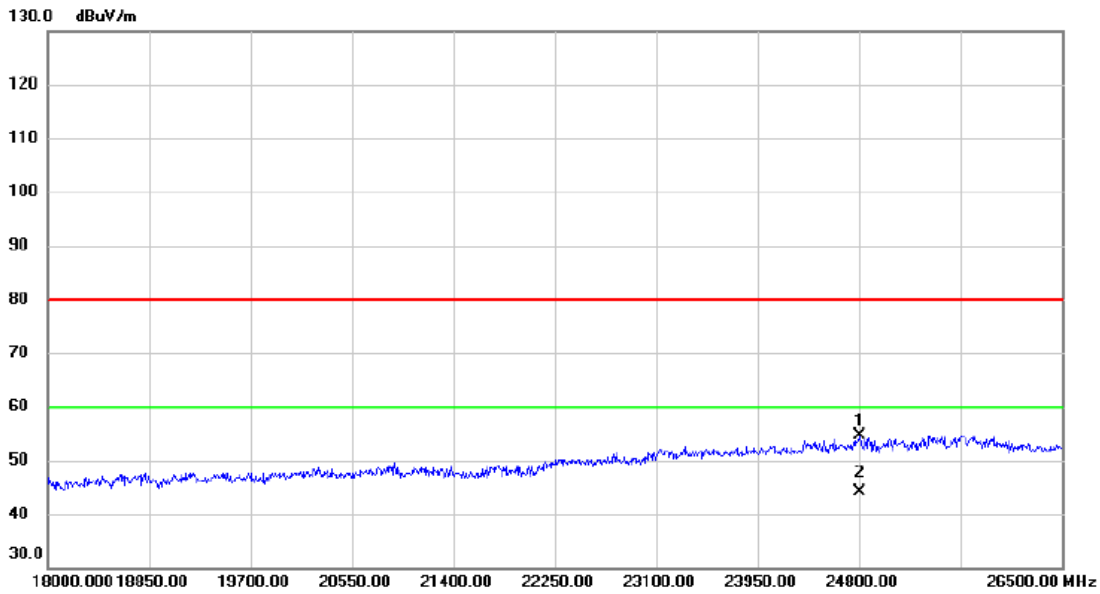


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		24808.500	24.47	30.27	54.74	80.00	-25.26	peak	
2	*	24808.500	13.89	30.27	44.16	60.00	-15.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz_484 Tone

Vertical

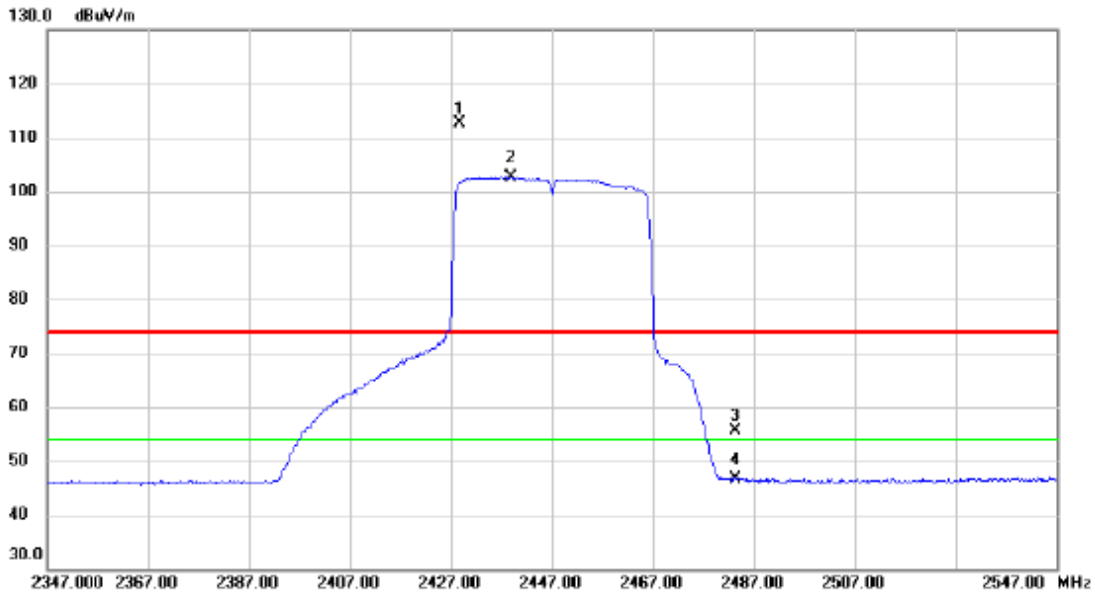


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2428.800	98.81	13.85	112.66	74.00	38.66	peak	No Limit
2	*	2438.800	88.71	13.87	102.58	54.00	48.58	AVG	No Limit
3		2483.500	41.61	13.93	55.54	74.00	-18.46	peak	
4		2483.500	32.73	13.93	46.66	54.00	-7.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz_484 Tone

Horizontal

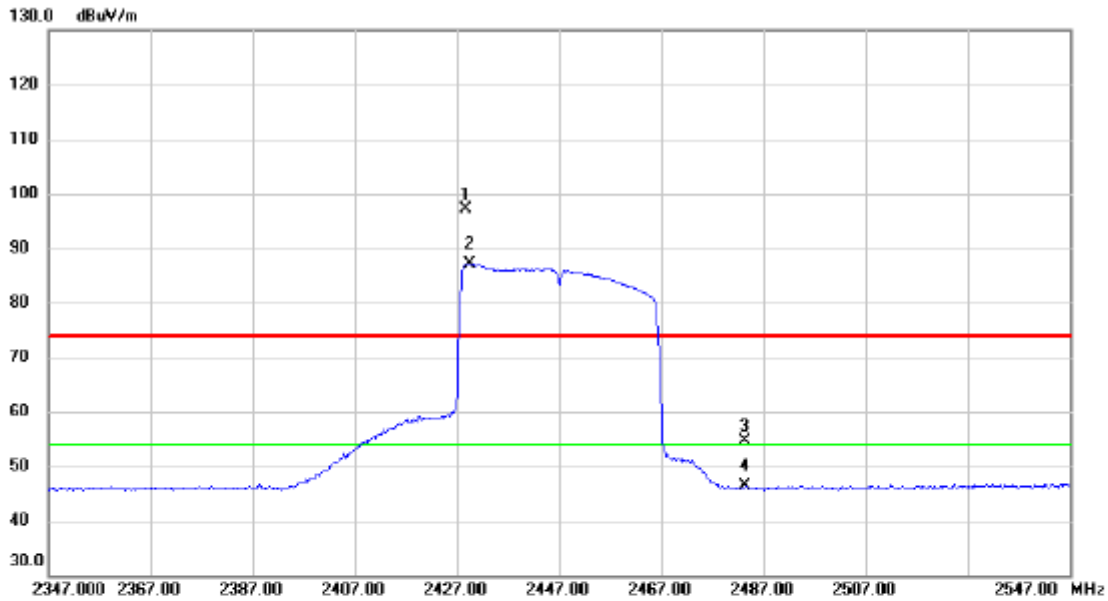


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2428.800	83.17	13.85	97.02	74.00	23.02	peak	No Limit
2	*	2429.600	73.24	13.86	87.10	54.00	33.10	AVG	No Limit
3		2483.500	40.70	13.93	54.63	74.00	-19.37	peak	
4		2483.500	32.34	13.93	46.27	54.00	-7.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz_484 Tone

Vertical

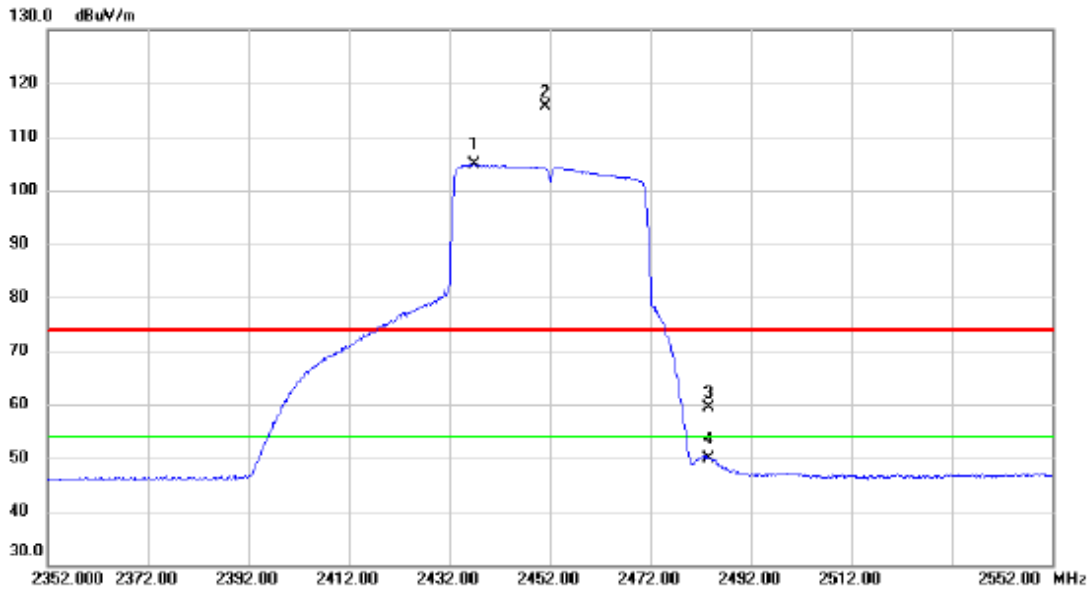


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2436.800	90.97	13.86	104.83	54.00	50.83	AVG	No Limit
2	X	2451.000	101.81	13.88	115.69	74.00	41.69	peak	No Limit
3		2483.500	45.57	13.93	59.50	74.00	-14.50	peak	
4		2483.500	36.02	13.93	49.95	54.00	-4.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz_484 Tone

Horizontal

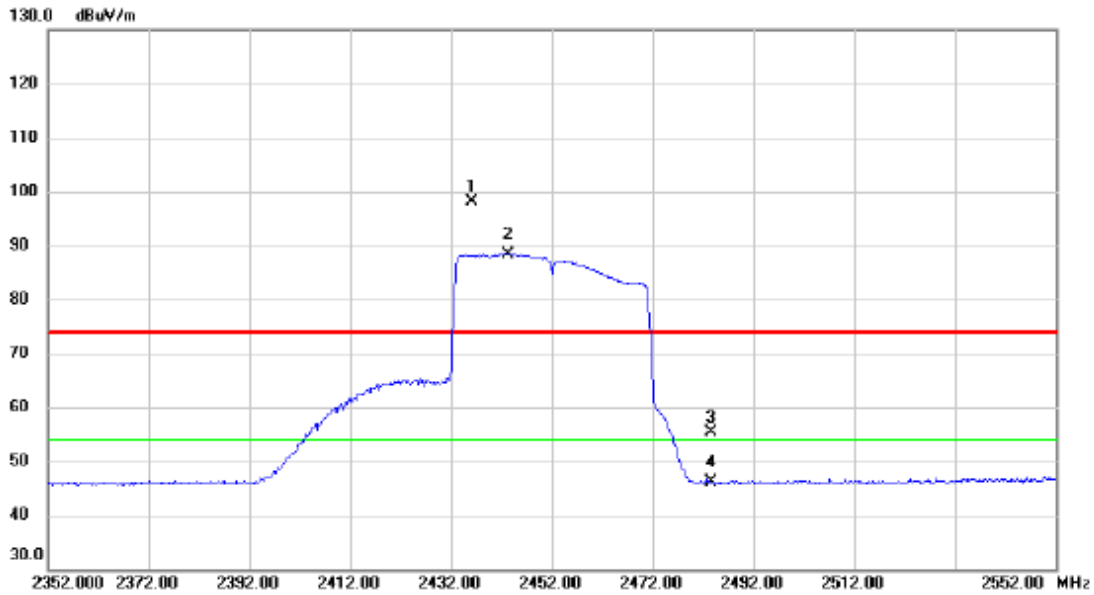

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2436.000	84.36	13.86	98.22	74.00	24.22	peak	No Limit
2	*	2443.400	74.62	13.87	88.49	54.00	34.49	AVG	No Limit
3		2483.500	41.56	13.93	55.49	74.00	-18.51	peak	
4		2483.500	32.25	13.93	46.18	54.00	-7.82	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

CDD / MIMO

Test Mode: TX G Mode 2412 MHz

Vertical

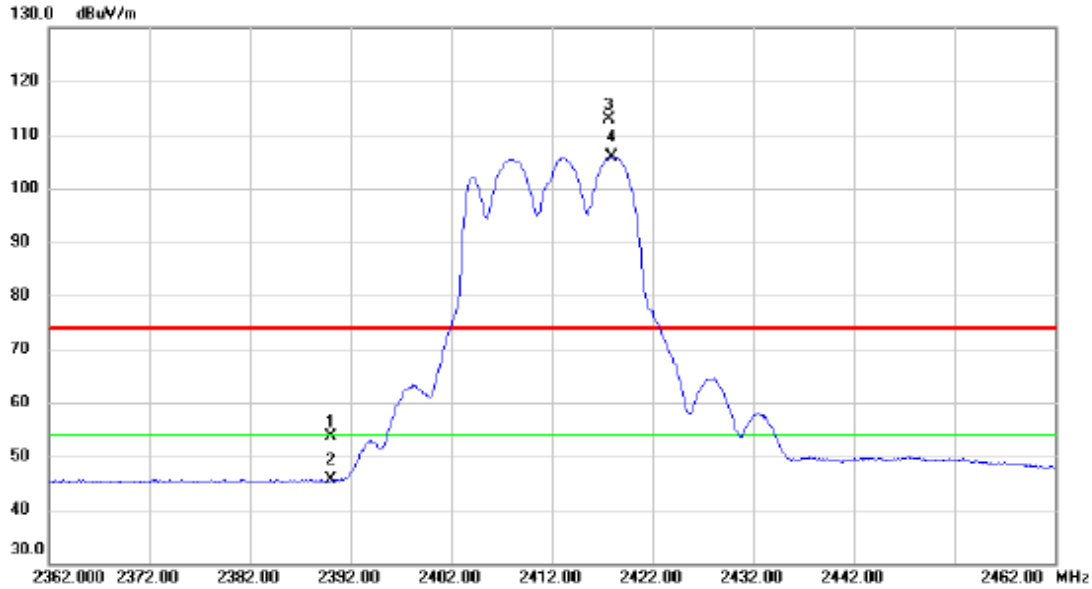

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.82	13.81	53.63	74.00	-20.37	peak	
2		2390.000	31.80	13.81	45.61	54.00	-8.39	AVG	
3	X	2417.700	99.06	13.84	112.90	74.00	38.90	peak	No Limit
4	*	2417.900	92.13	13.84	105.97	54.00	51.97	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

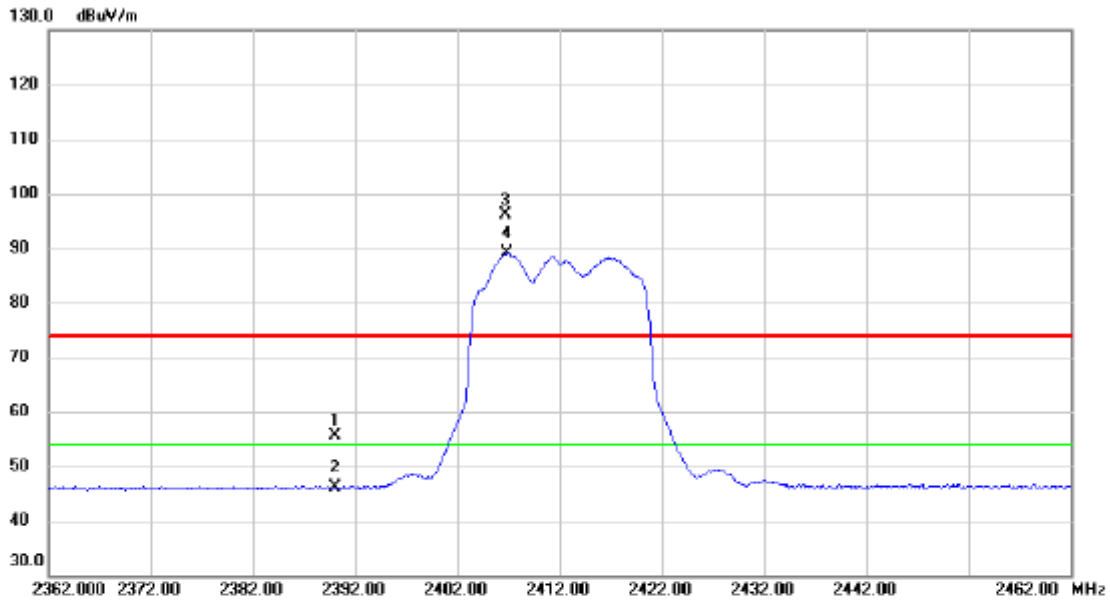


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.92	13.81	55.73	74.00	-18.27	peak	
2		2390.000	32.33	13.81	46.14	54.00	-7.86	AVG	
3	X	2406.700	82.29	13.83	96.12	74.00	22.12	peak	No Limit
4	*	2406.900	75.31	13.83	89.14	54.00	35.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2417 MHz

Vertical

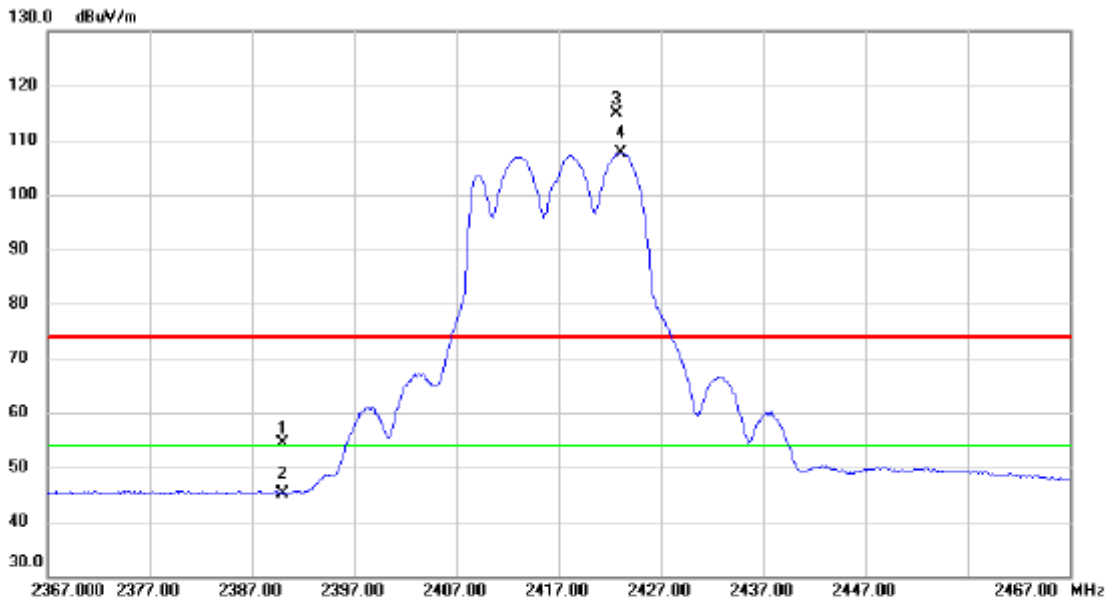

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.47	13.81	54.28	74.00	-19.72	peak	
2		2390.000	31.34	13.81	45.15	54.00	-8.85	AVG	
3	X	2422.700	101.09	13.85	114.94	74.00	40.94	peak	No Limit
4	*	2423.000	93.72	13.85	107.57	54.00	53.57	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2417 MHz

Horizontal

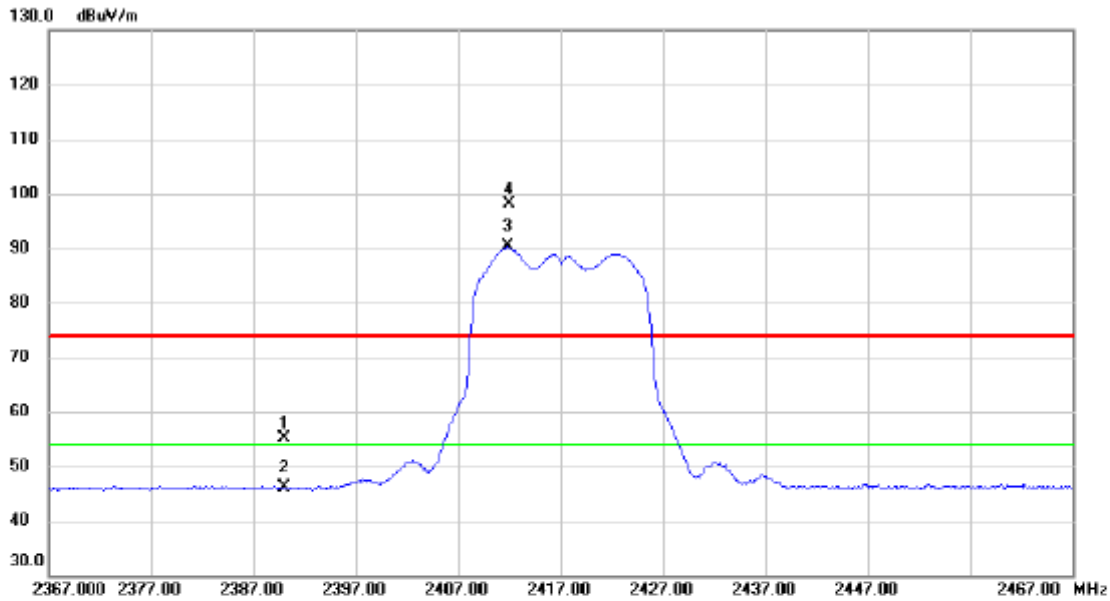


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.44	13.81	55.25	74.00	-18.75	peak	
2		2390.000	32.24	13.81	46.05	54.00	-7.95	AVG	
3	*	2411.800	76.47	13.83	90.30	54.00	36.30	AVG	No Limit
4	X	2412.000	84.25	13.83	98.08	74.00	24.08	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2422 MHz

Vertical

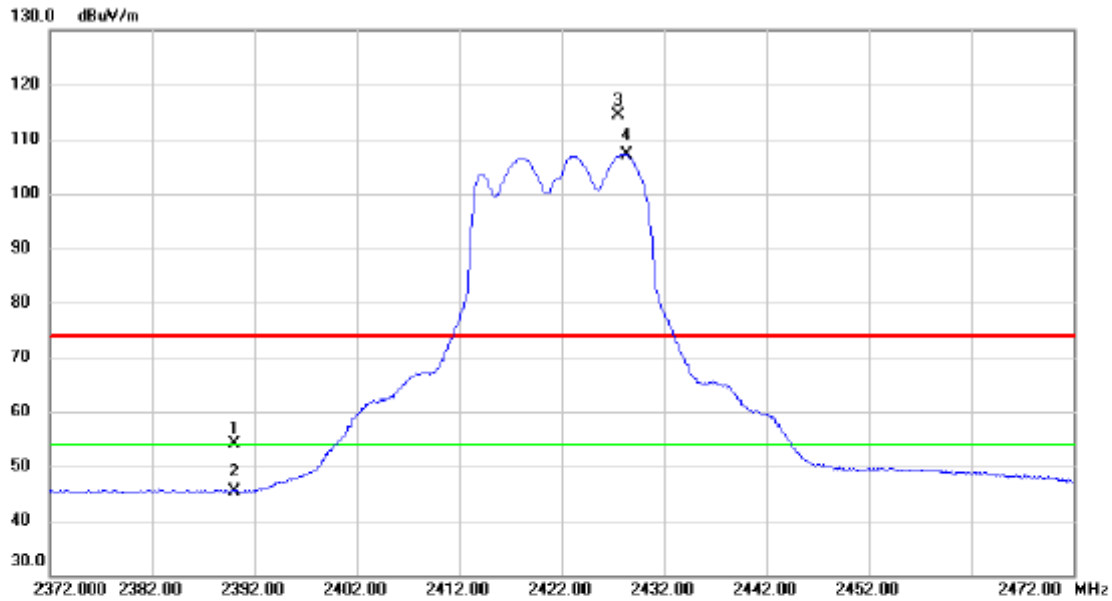


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.44	13.81	54.25	74.00	-19.75	peak	
2		2390.000	31.53	13.81	45.34	54.00	-8.66	AVG	
3	X	2427.600	100.51	13.85	114.36	74.00	40.36	peak	No Limit
4	*	2428.300	93.34	13.85	107.19	54.00	53.19	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2422 MHz

Horizontal

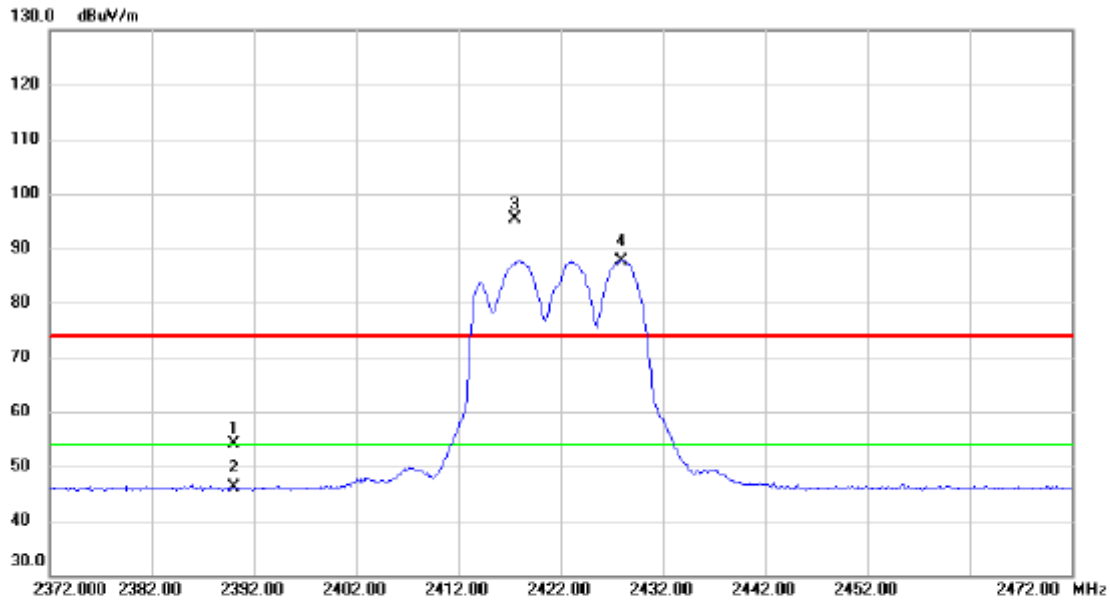


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.23	13.81	54.04	74.00	-19.96	peak	
2		2390.000	32.38	13.81	46.19	54.00	-7.81	AVG	
3	X	2417.500	81.46	13.84	95.30	74.00	21.30	peak	No Limit
4	*	2427.900	73.90	13.85	87.75	54.00	33.75	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2427 MHz

Vertical

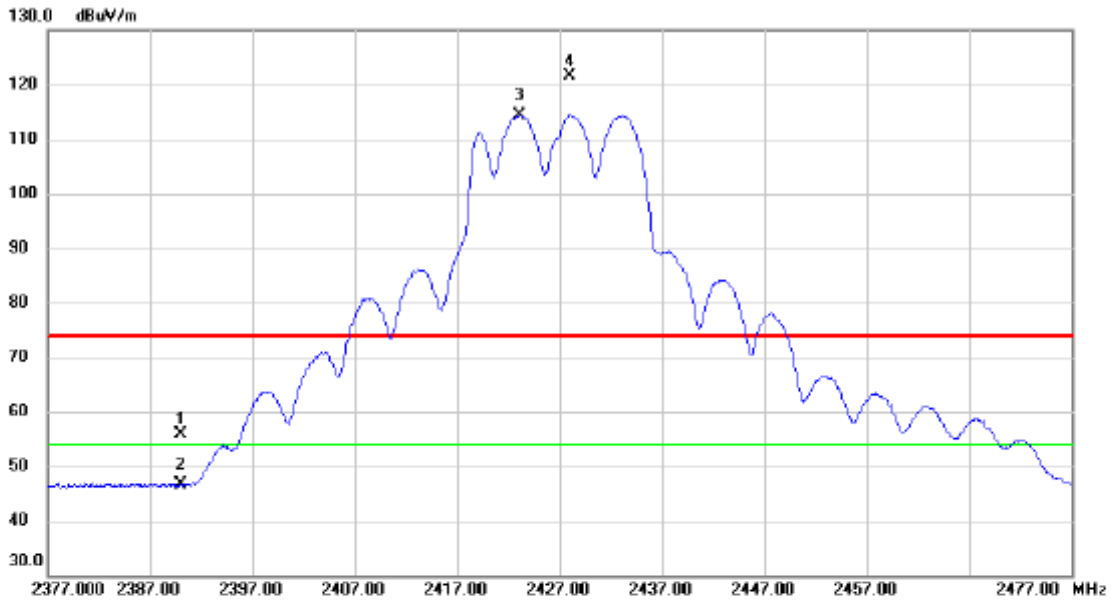


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.95	13.81	55.76	74.00	-18.24	peak	
2		2390.000	32.76	13.81	46.57	54.00	-7.43	AVG	
3	*	2423.100	100.61	13.85	114.46	54.00	60.46	AVG	No Limit
4	X	2428.000	107.80	13.85	121.65	74.00	47.65	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2427 MHz

Horizontal

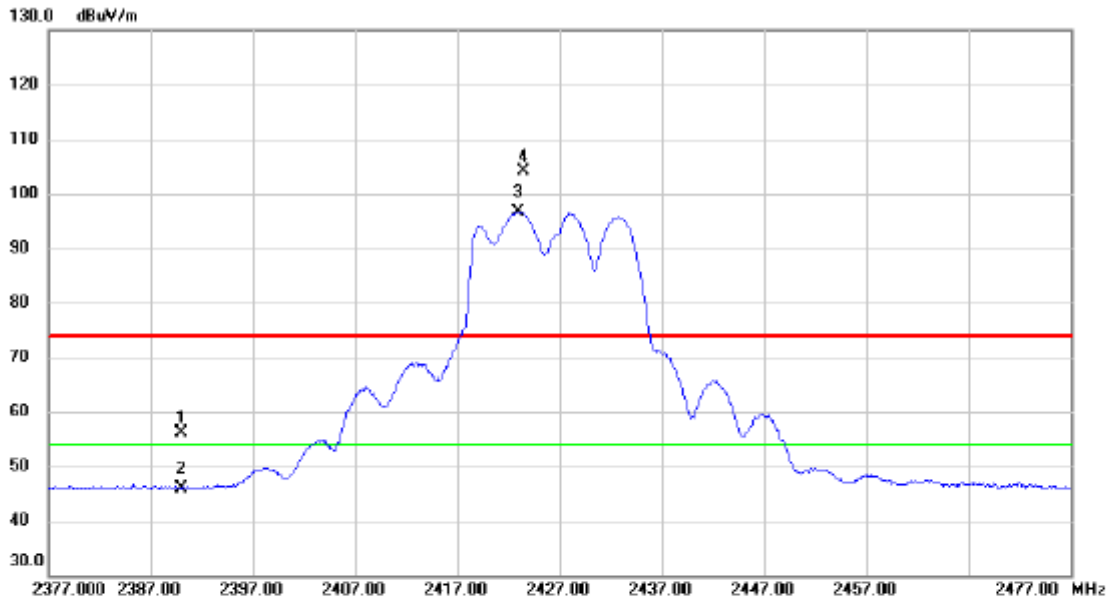

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.28	13.81	56.09	74.00	-17.91	peak	
2		2390.000	32.15	13.81	45.96	54.00	-8.04	AVG	
3	*	2422.900	82.77	13.85	96.62	54.00	42.62	AVG	No Limit
4	X	2423.500	90.18	13.85	104.03	74.00	30.03	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

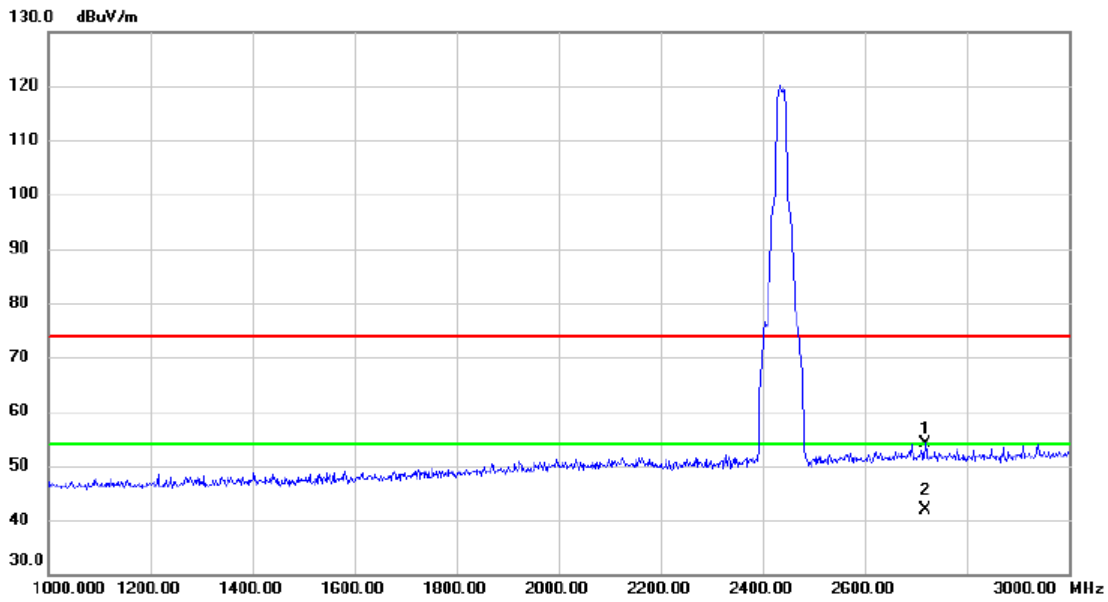


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2718.000	44.70	9.32	54.02	74.00	-19.98	peak	
2 *	2718.000	32.64	9.32	41.96	54.00	-12.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

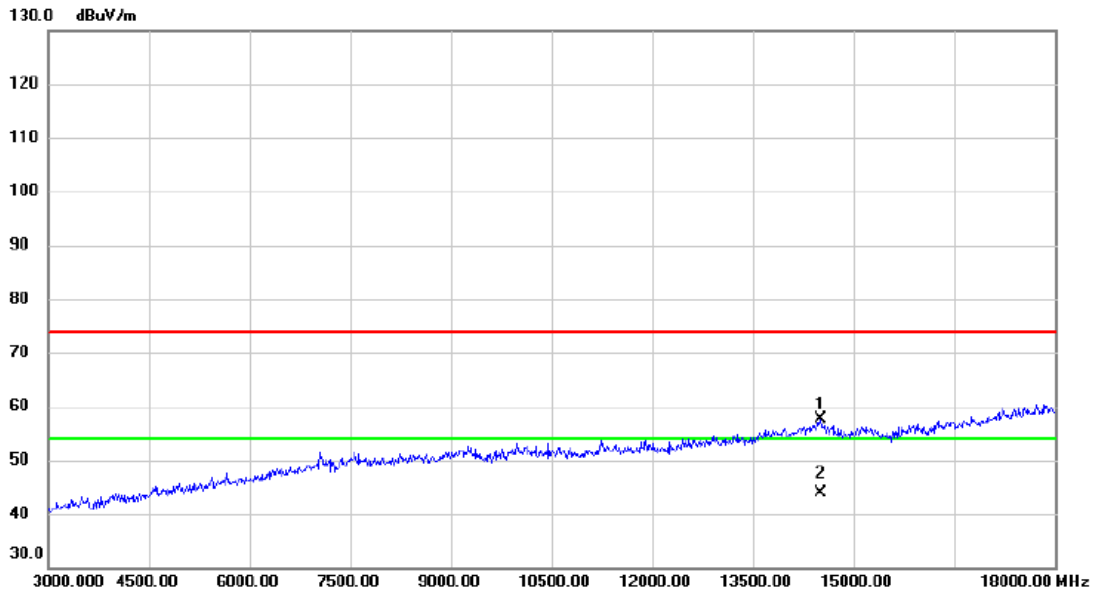


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14505.000	38.50	19.08	57.58	74.00	-16.42	peak	
2	*	14505.000	24.68	19.08	43.76	54.00	-10.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

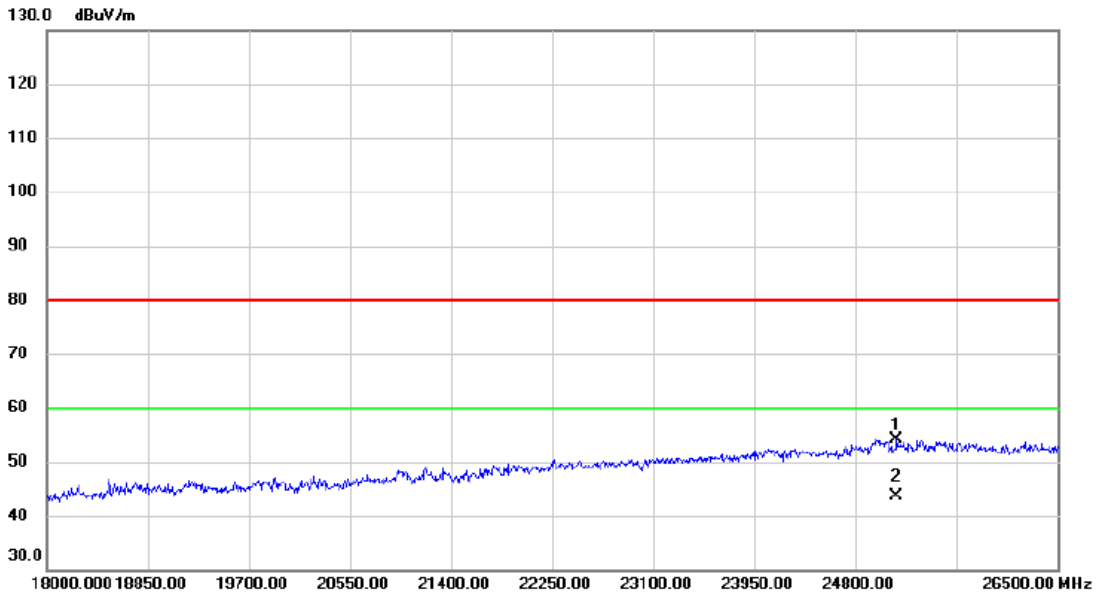


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25148.500	23.75	30.40	54.15	80.00	-25.85	peak	
2	*	25148.500	13.23	30.40	43.63	60.00	-16.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

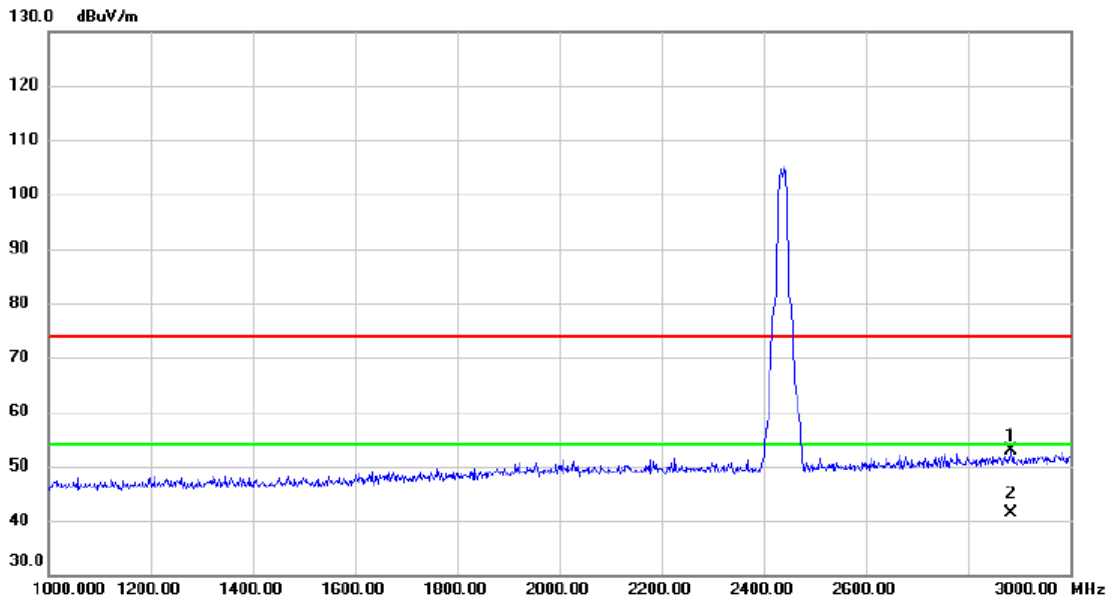

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2884.000	42.73	10.03	52.76	74.00	-21.24	peak	
2	*	2884.000	31.26	10.03	41.29	54.00	-12.71	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

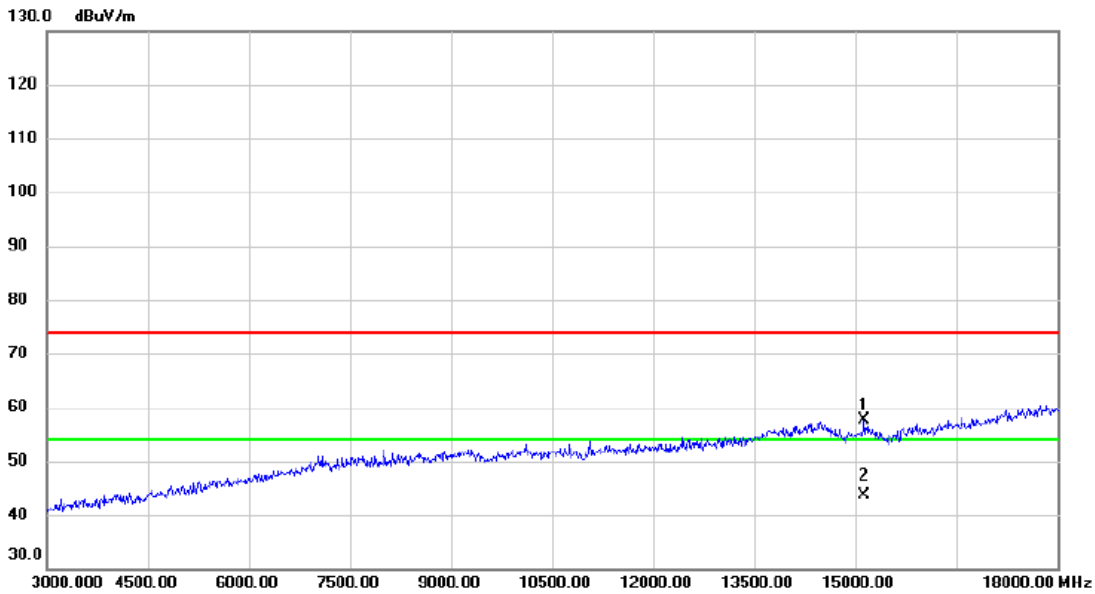

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15135.000	40.08	17.46	57.54	74.00	-16.46	peak	
2 *	15135.000	26.15	17.46	43.61	54.00	-10.39	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

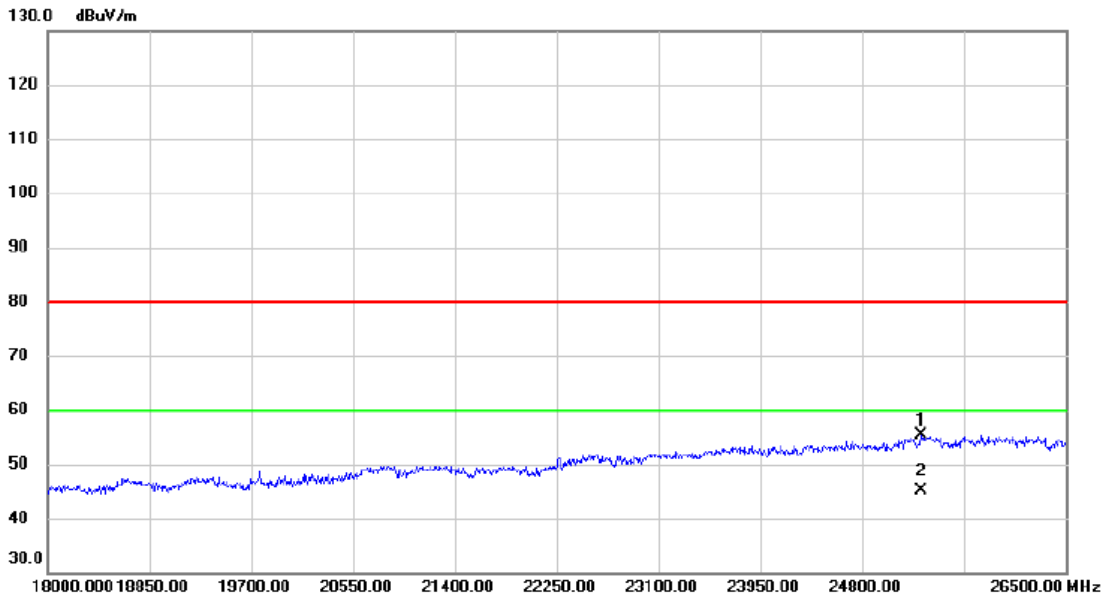

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25293.000	25.17	30.26	55.43	80.00	-24.57	peak	
2 *	25293.000	14.89	30.26	45.15	60.00	-14.85	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2452 MHz

Vertical

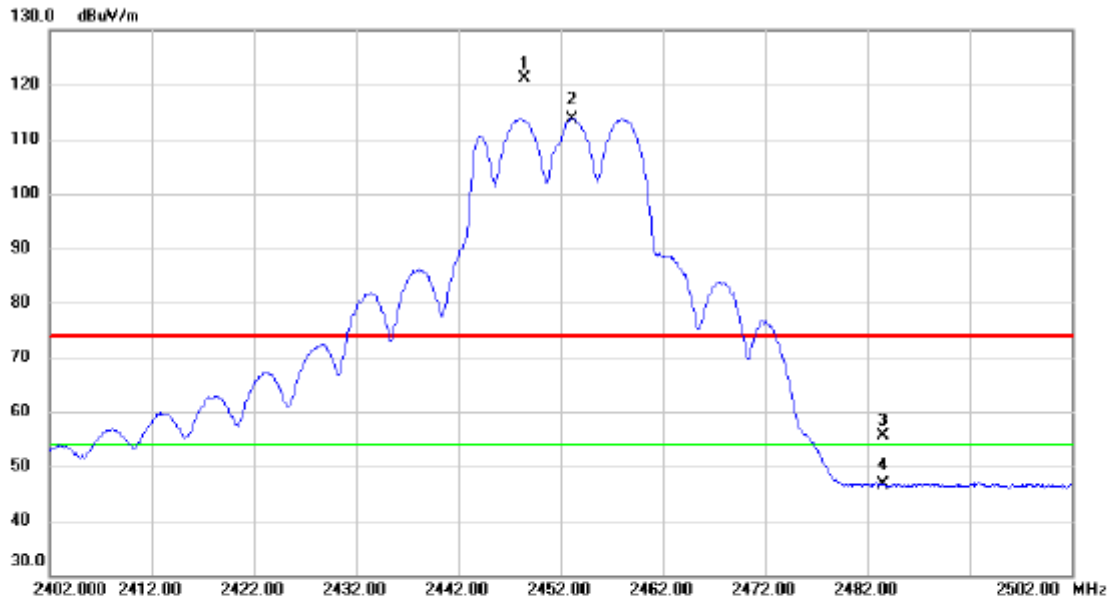


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2448.400	107.29	13.88	121.17	74.00	47.17	peak	No Limit
2	*	2453.200	99.86	13.88	113.74	54.00	59.74	AVG	No Limit
3		2483.500	41.74	13.93	55.67	74.00	-18.33	peak	
4		2483.500	32.60	13.93	46.53	54.00	-7.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2452 MHz

Horizontal

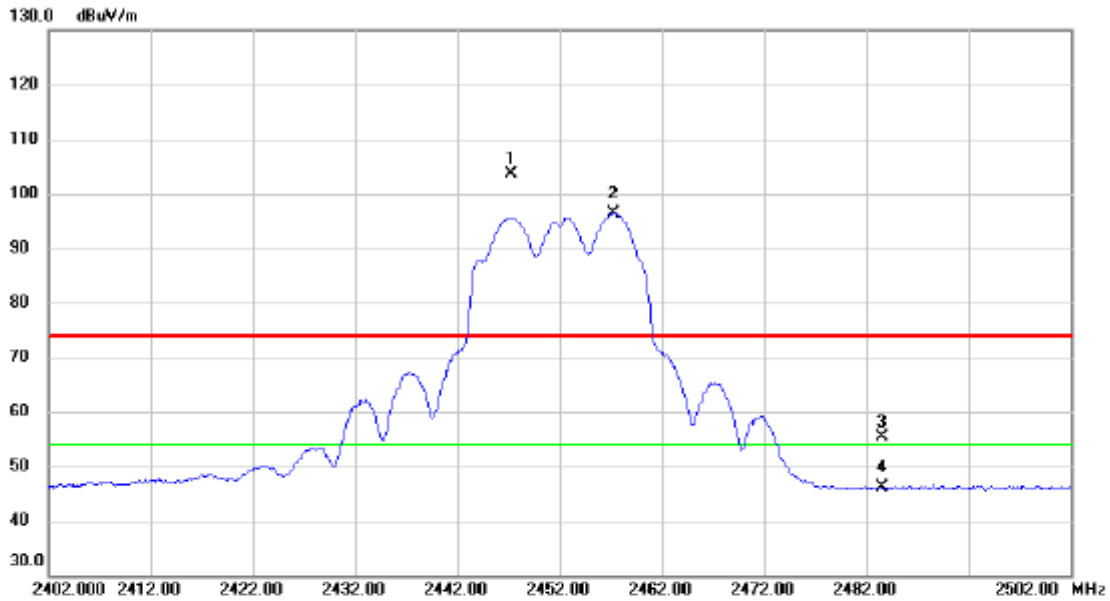


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2447.300	89.74	13.88	103.62	74.00	29.62	peak	No Limit
2	*	2457.300	82.46	13.90	96.36	54.00	42.36	AVG	No Limit
3	X	2483.500	41.51	13.93	55.44	74.00	-18.56	peak	
4	X	2483.500	32.12	13.93	46.05	54.00	-7.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2457 MHz

Vertical

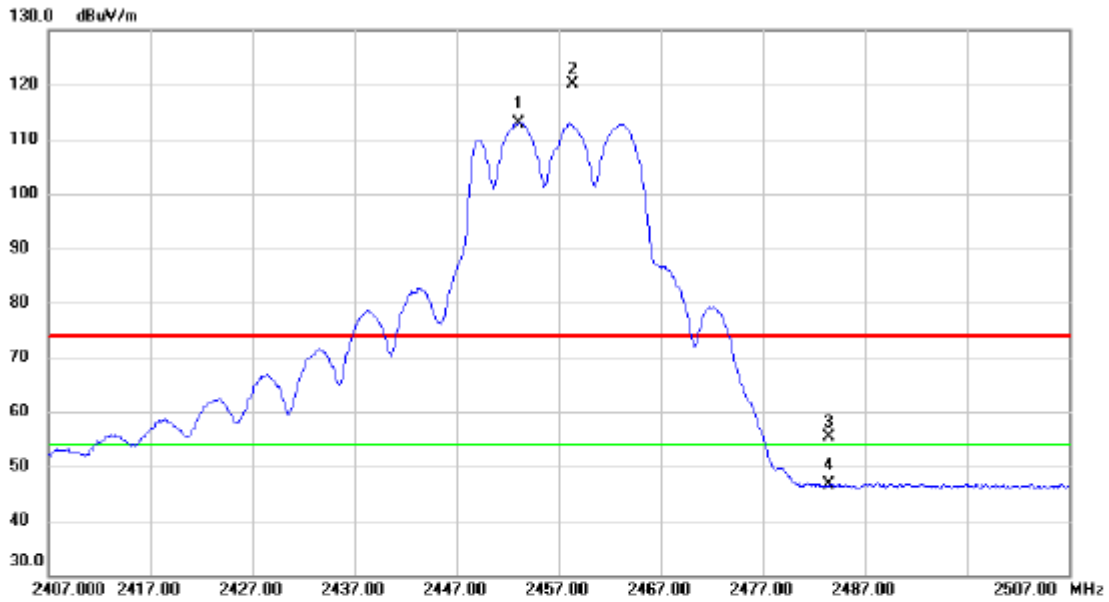


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.100	99.00	13.88	112.88	54.00	58.88	AVG	No Limit
2	X	2458.400	106.11	13.90	120.01	74.00	46.01	peak	No Limit
3		2483.500	41.56	13.93	55.49	74.00	-18.51	peak	
4		2483.500	32.69	13.93	46.62	54.00	-7.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2457 MHz

Horizontal

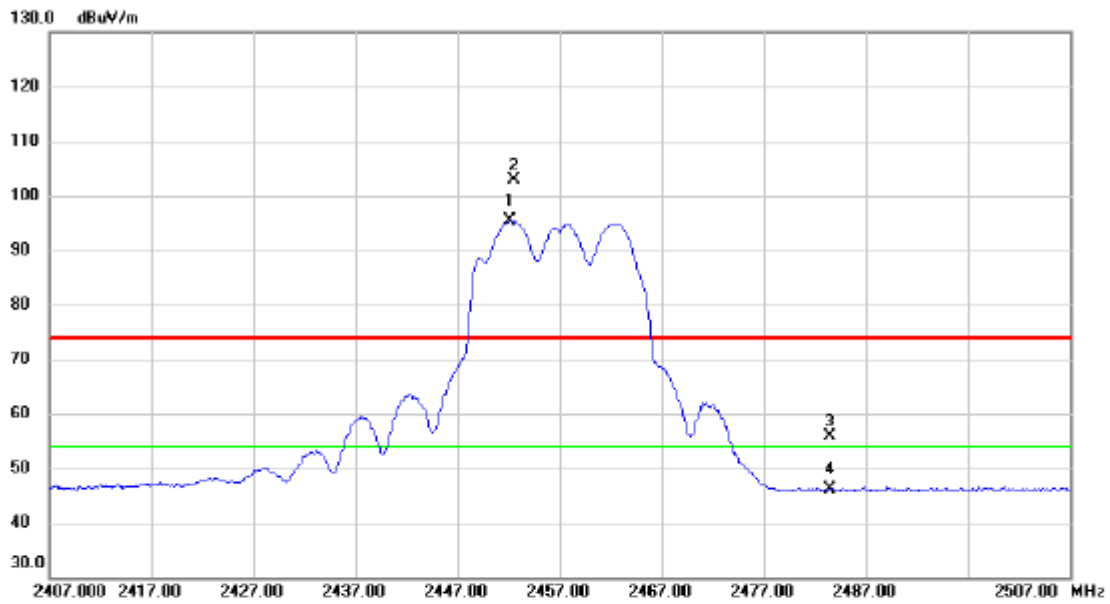


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2452.200	81.52	13.88	95.40	54.00	41.40	AVG	No Limit
2	X	2452.600	89.01	13.88	102.89	74.00	28.89	peak	No Limit
3		2483.500	42.01	13.93	55.94	74.00	-18.06	peak	
4		2483.500	32.29	13.93	46.22	54.00	-7.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

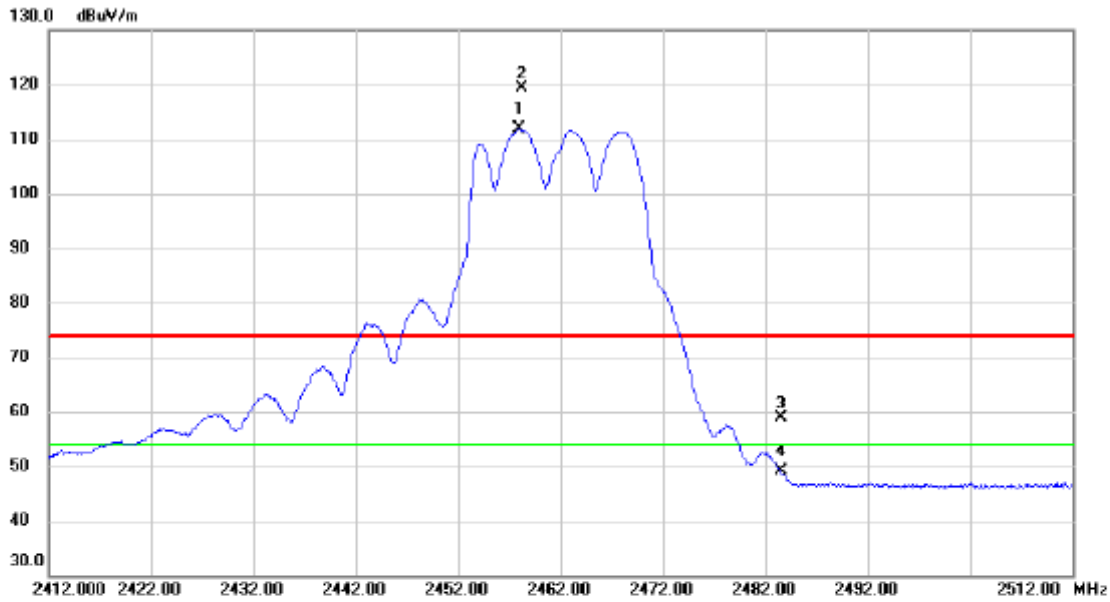


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2457.900	97.90	13.90	111.80	54.00	57.80	AVG	No Limit
2	X	2458.200	105.57	13.90	119.47	74.00	45.47	peak	No Limit
3		2483.500	44.86	13.93	58.79	74.00	-15.21	peak	
4		2483.500	35.15	13.93	49.08	54.00	-4.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

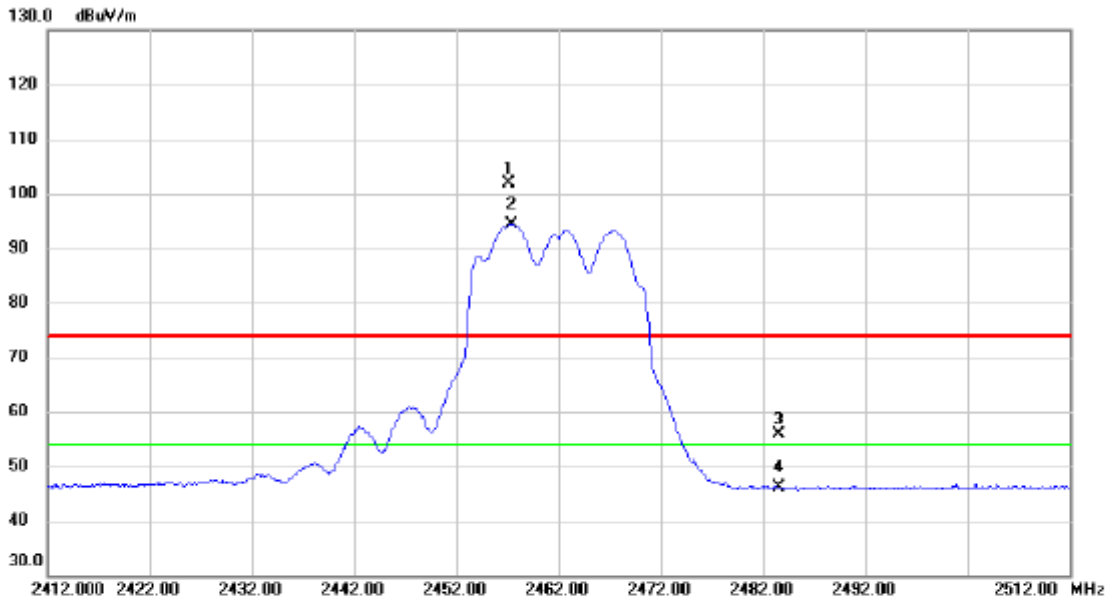


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2457.200	87.93	13.90	101.83	74.00	27.83	peak	No Limit
2	*	2457.400	80.60	13.90	94.50	54.00	40.50	AVG	No Limit
3		2483.500	42.03	13.93	55.96	74.00	-18.04	peak	
4		2483.530	32.12	13.93	46.05	54.00	-7.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

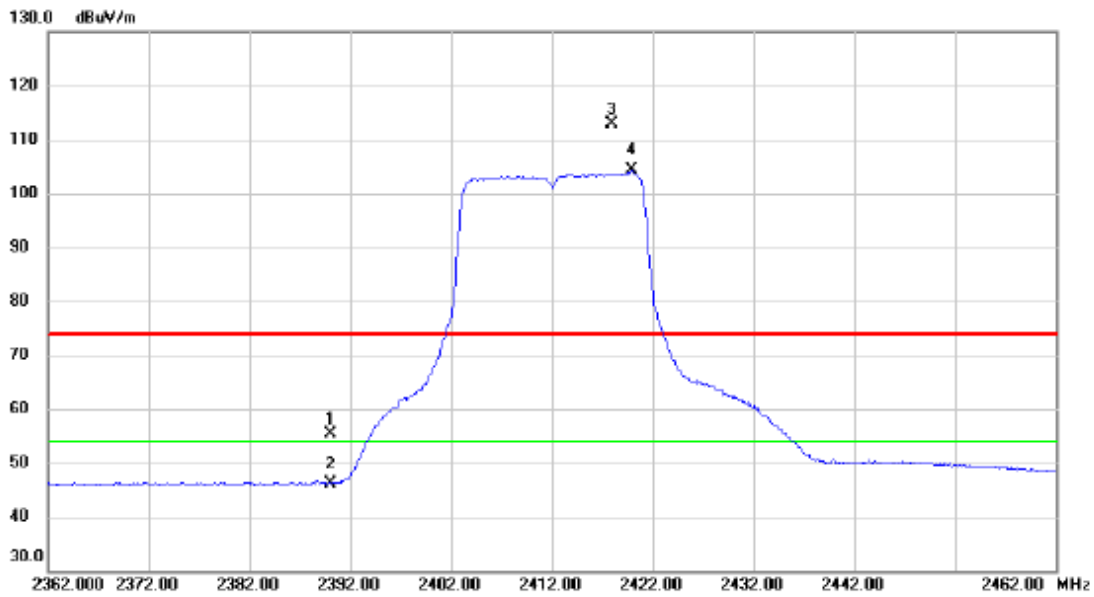


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.66	13.81	55.47	74.00	-18.53	peak	
2		2390.000	32.34	13.81	46.15	54.00	-7.85	AVG	
3	X	2417.900	99.07	13.84	112.91	74.00	38.91	peak	No Limit
4	*	2419.900	90.48	13.84	104.32	54.00	50.32	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

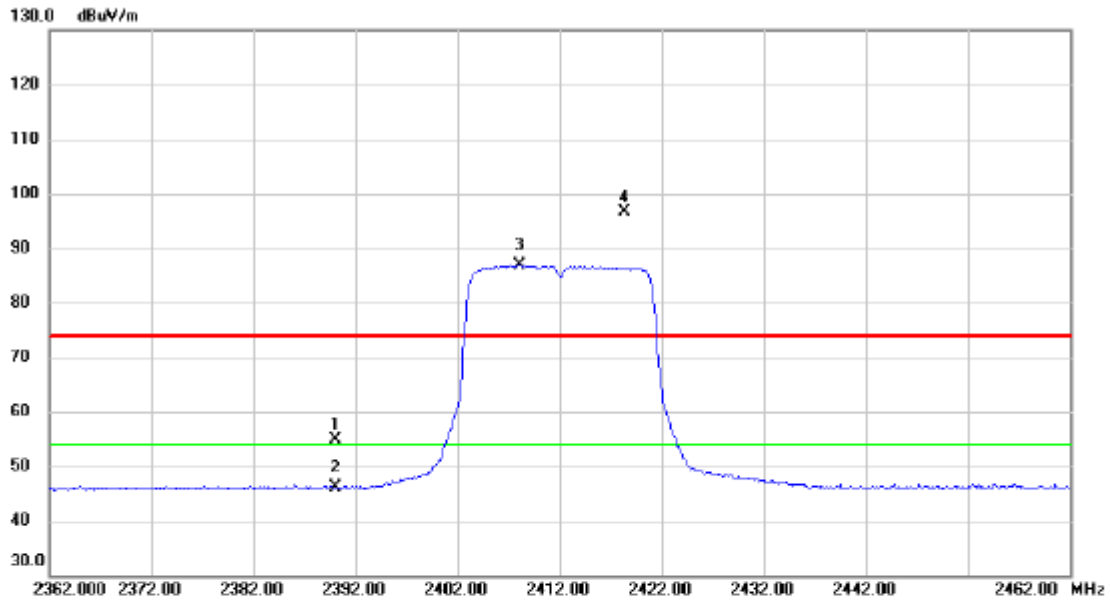


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.00	13.81	54.81	74.00	-19.19	peak	
2		2390.000	32.28	13.81	46.09	54.00	-7.91	AVG	
3	*	2408.000	73.05	13.82	86.87	54.00	32.87	AVG	No Limit
4	X	2418.300	82.73	13.84	96.57	74.00	22.57	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2417 MHz

Vertical

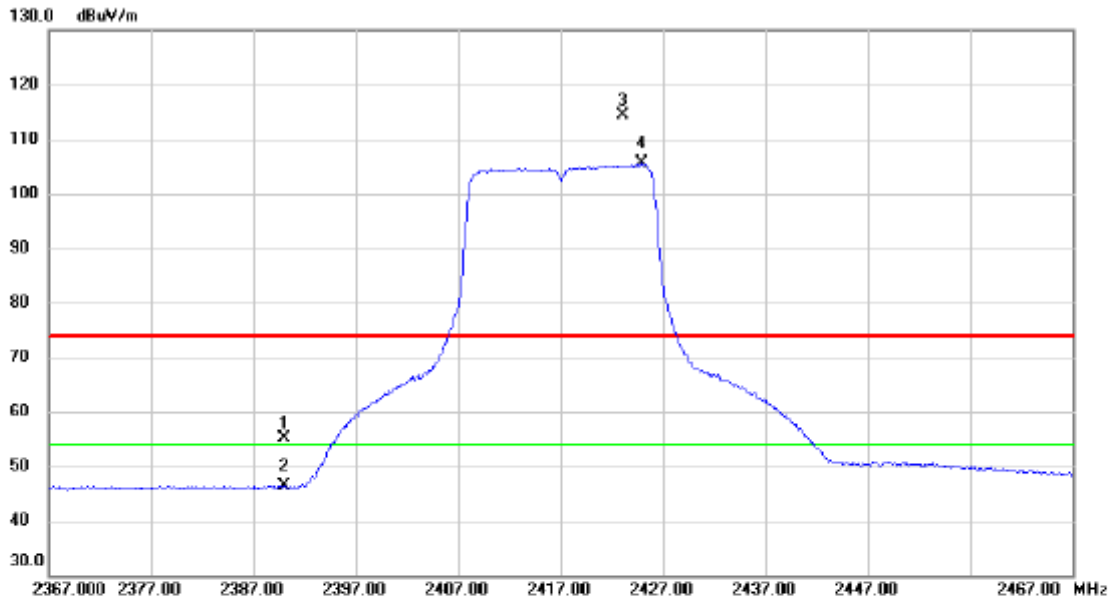


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.27	13.81	55.08	74.00	-18.92	peak	
2		2390.000	32.45	13.81	46.26	54.00	-7.74	AVG	
3	X	2423.100	100.46	13.85	114.31	74.00	40.31	peak	No Limit
4	*	2424.900	91.67	13.85	105.52	54.00	51.52	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2417 MHz

Horizontal

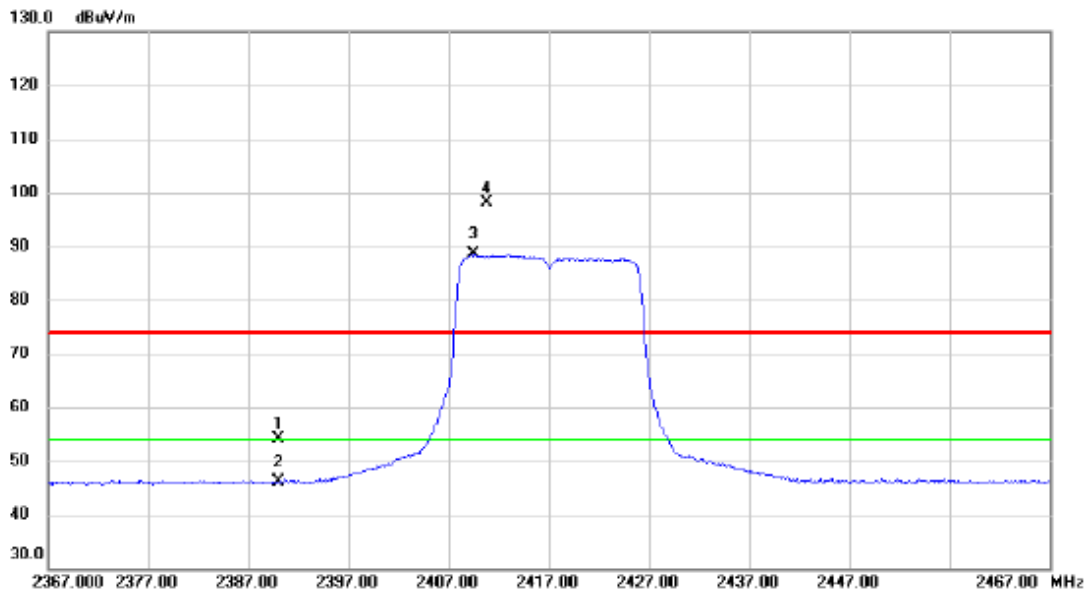


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	40.44	13.81	54.25	74.00	-19.75	peak	
2		2390.000	32.41	13.81	46.22	54.00	-7.78	AVG	
3	*	2409.500	74.73	13.82	88.55	54.00	34.55	AVG	No Limit
4	X	2410.800	84.33	13.82	98.15	74.00	24.15	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2422 MHz

Vertical

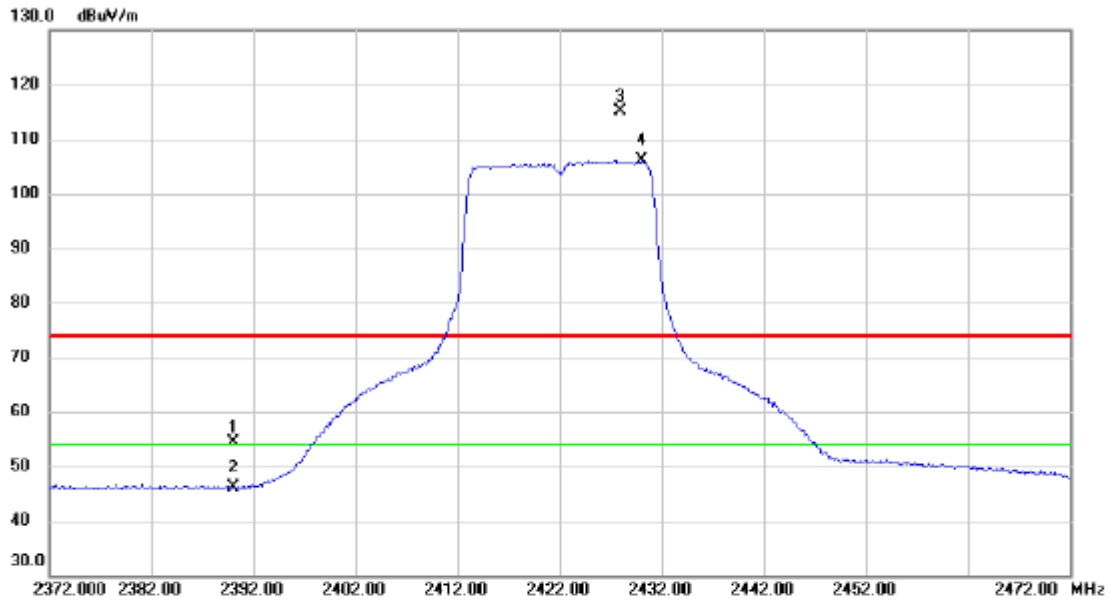


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.68	13.81	54.49	74.00	-19.51	peak	
2		2390.000	32.37	13.81	46.18	54.00	-7.82	AVG	
3	X	2427.900	101.23	13.85	115.08	74.00	41.08	peak	No Limit
4	*	2430.000	92.25	13.86	106.11	54.00	52.11	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2422 MHz

Horizontal

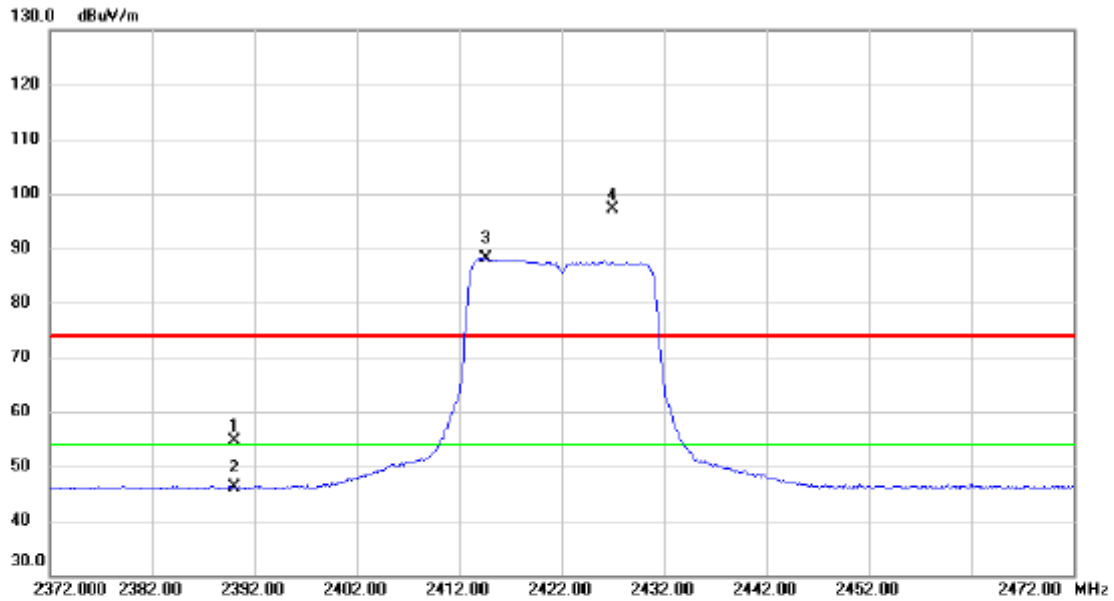


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.77	13.81	54.58	74.00	-19.42	peak	
2		2390.000	32.38	13.81	46.19	54.00	-7.81	AVG	
3	*	2414.600	74.23	13.84	88.07	54.00	34.07	AVG	No Limit
4	X	2427.000	83.30	13.85	97.15	74.00	23.15	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 Mode 2427 MHz

Vertical

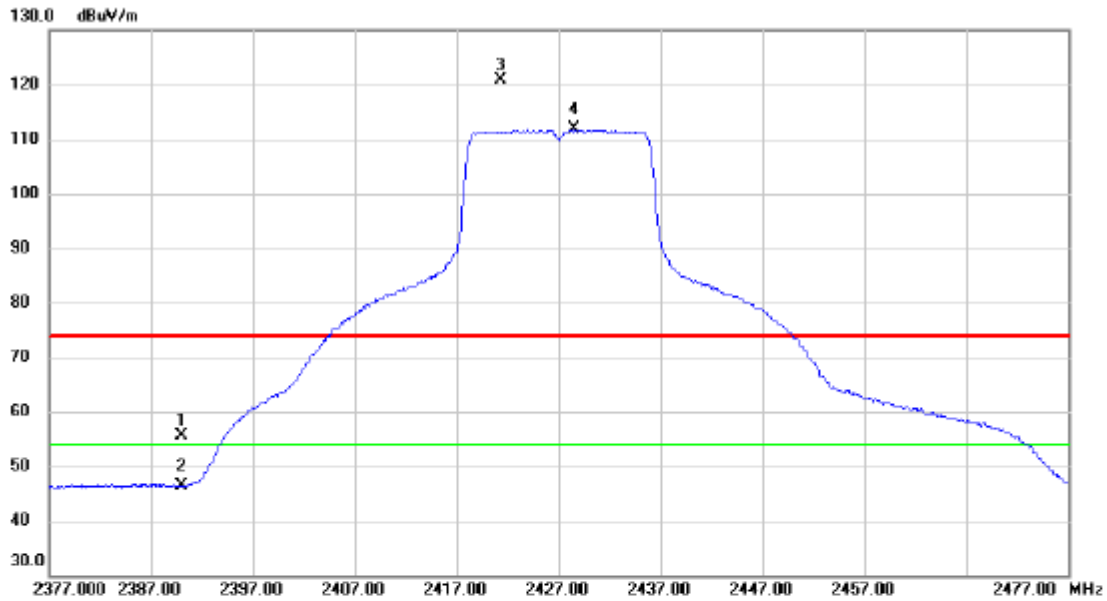


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.73	13.81	55.54	74.00	-18.46	peak	
2		2390.000	32.59	13.81	46.40	54.00	-7.60	AVG	
3	X	2421.300	107.10	13.85	120.95	74.00	46.95	peak	No Limit
4	*	2428.600	97.93	13.85	111.78	54.00	57.78	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 Mode 2427 MHz

Horizontal

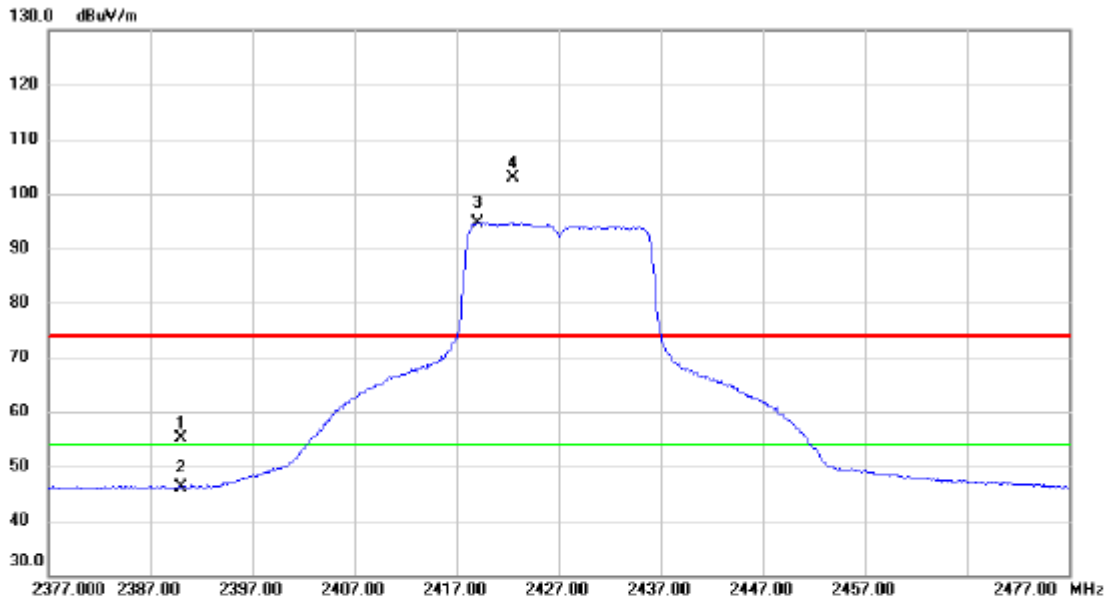


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.40	13.81	55.21	74.00	-18.79	peak	
2		2390.000	32.35	13.81	46.16	54.00	-7.84	AVG	
3	*	2419.100	80.83	13.84	94.67	54.00	40.67	AVG	No Limit
4	X	2422.600	89.05	13.85	102.90	74.00	28.90	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

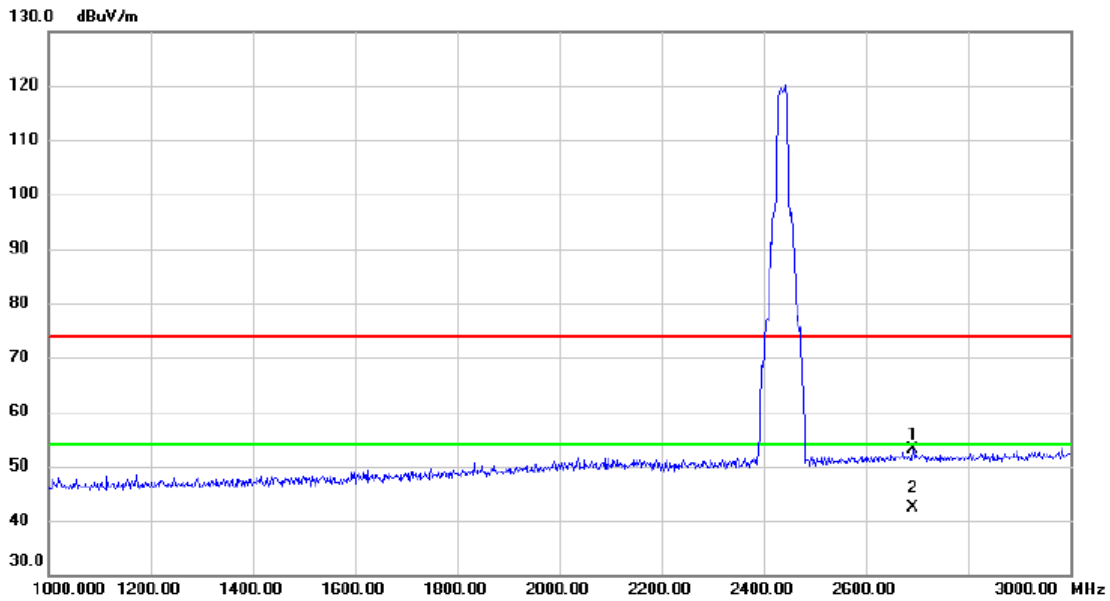


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2692.000	43.99	9.21	53.20	74.00	-20.80	peak	
2	*	2692.000	33.27	9.21	42.48	54.00	-11.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

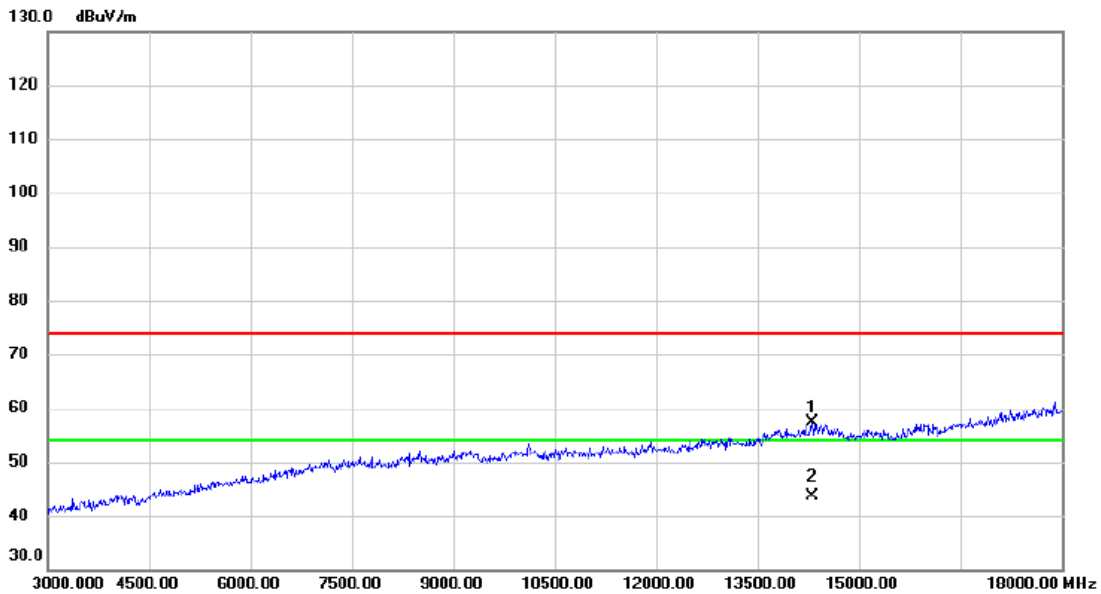


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14310.000	38.14	19.16	57.30	74.00	-16.70	peak	
2	*	14310.000	24.36	19.16	43.52	54.00	-10.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

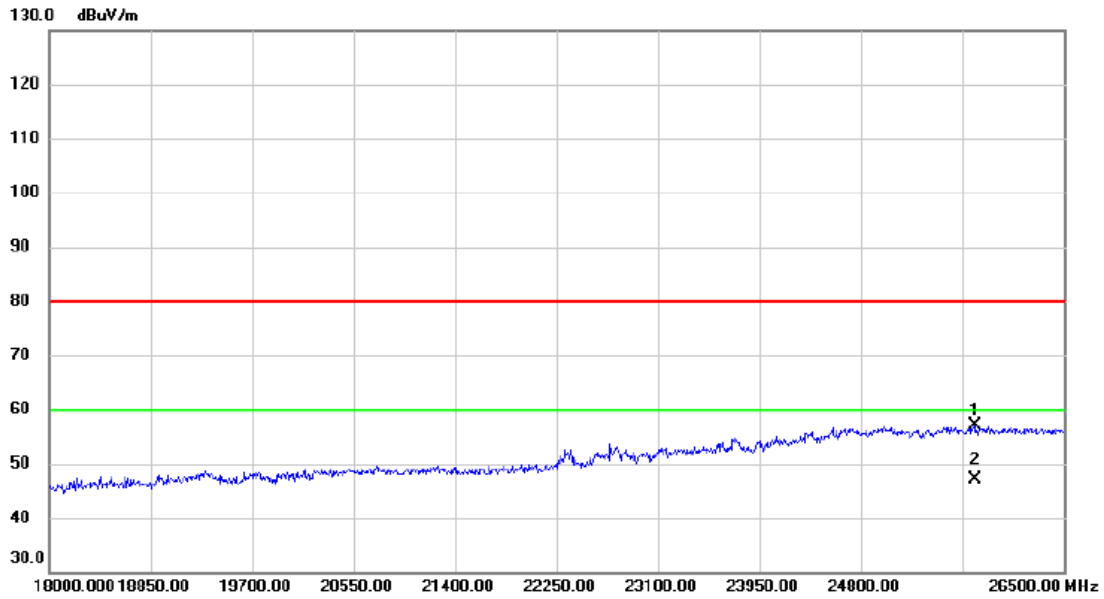


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25752.000	26.89	30.24	57.13	80.00	-22.87	peak	
2 *	25752.000	16.81	30.24	47.05	60.00	-12.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

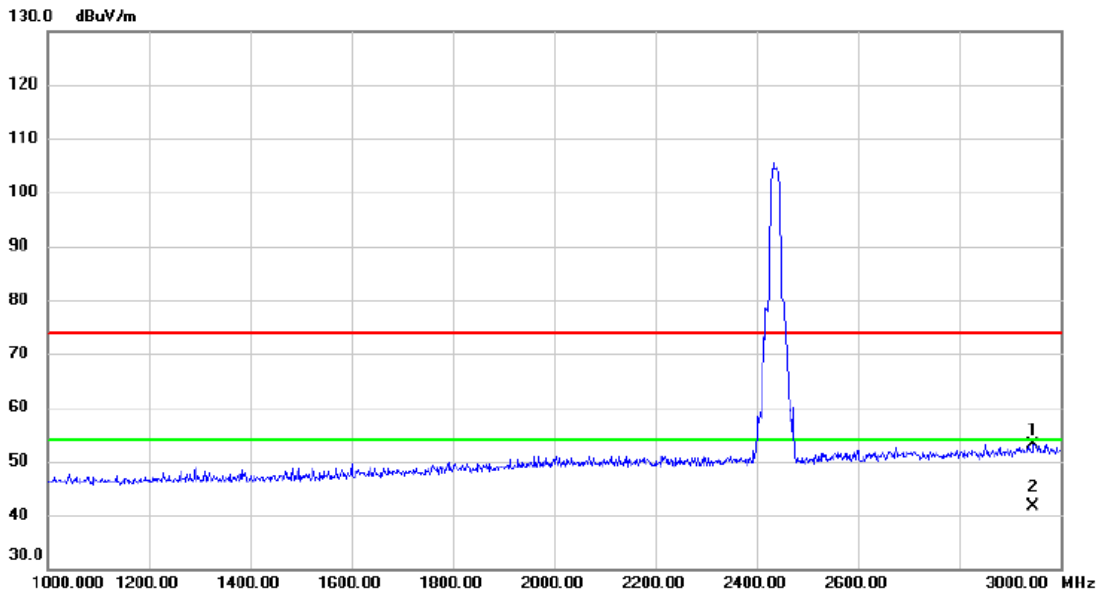


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2946.000	42.83	10.29	53.12	74.00	-20.88	peak	
2	*	2946.000	31.31	10.29	41.60	54.00	-12.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

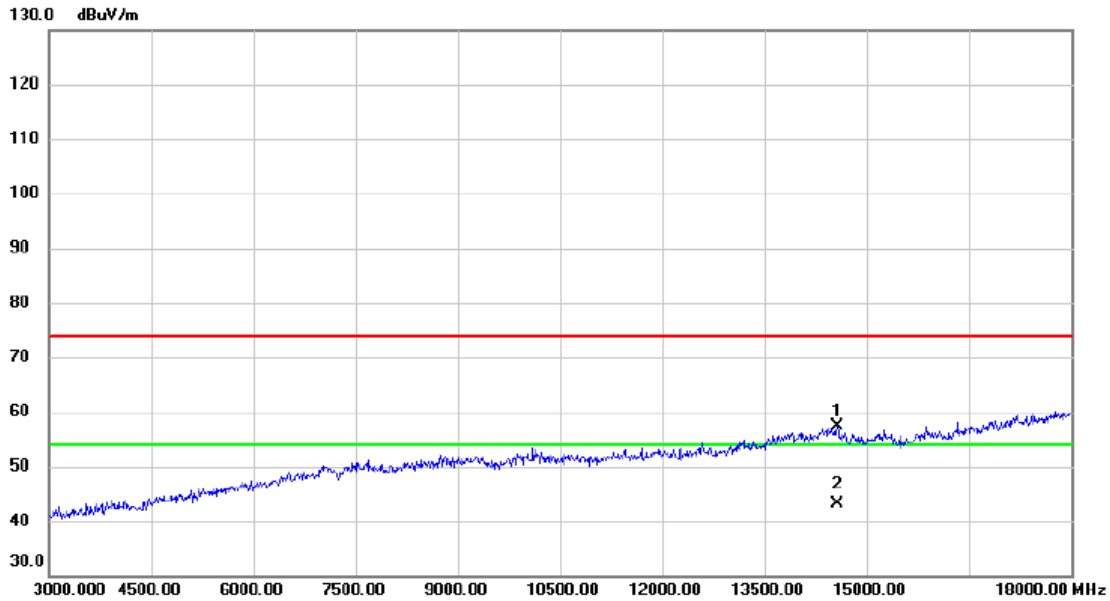


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14565.000	38.43	18.91	57.34	74.00	-16.66	peak	
2 *	14565.000	24.20	18.91	43.11	54.00	-10.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

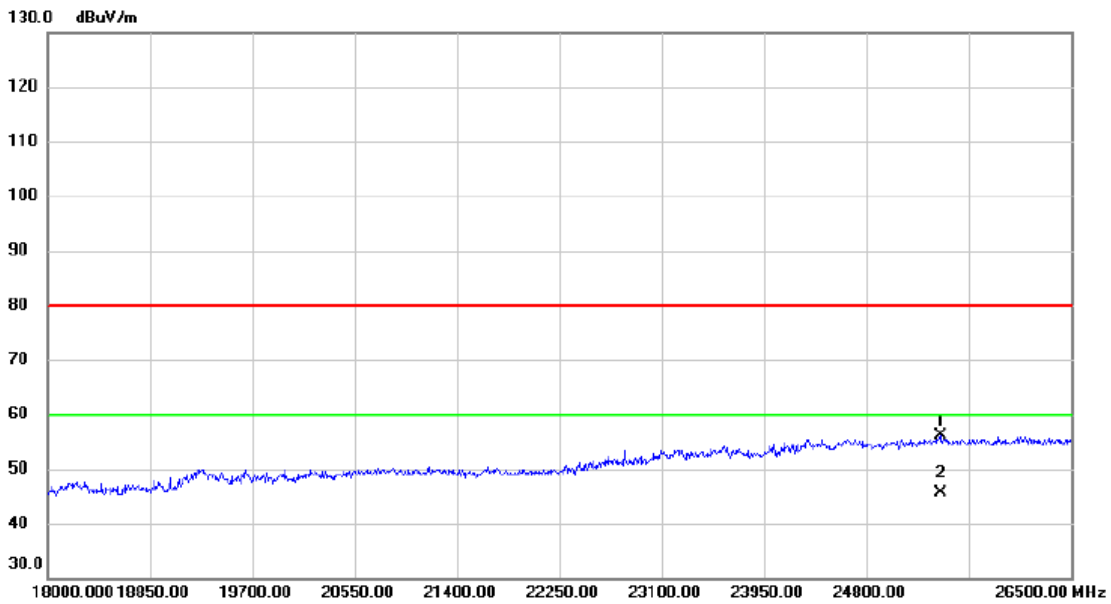

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25412.000	25.87	30.16	56.03	80.00	-23.97	peak	
2 *	25412.000	15.44	30.16	45.60	60.00	-14.40	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2452 MHz

Vertical

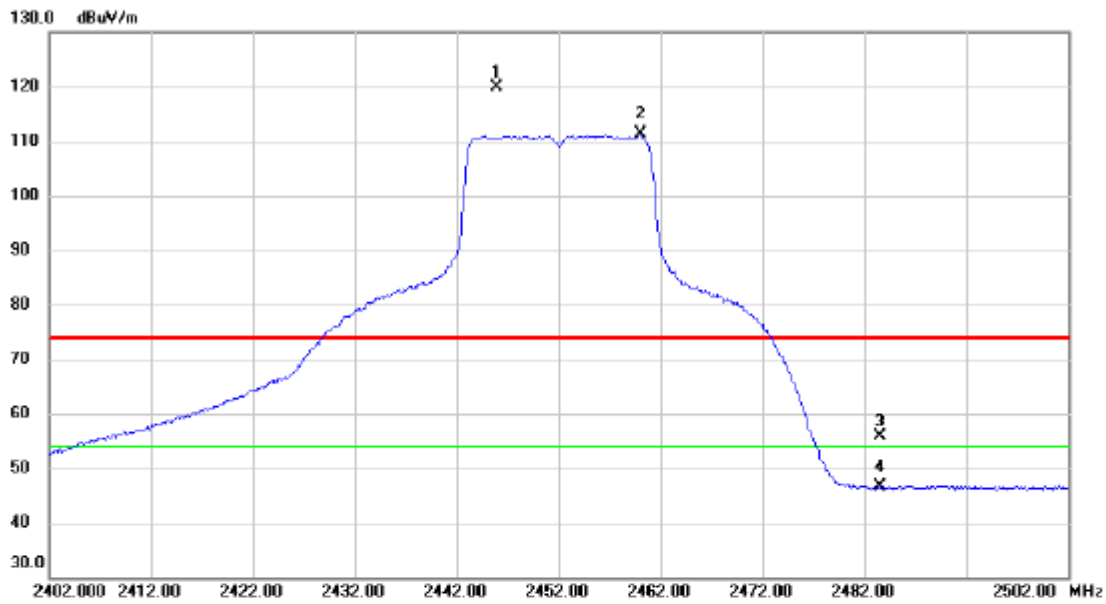


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2445.900	105.98	13.88	119.86	74.00	45.86	peak	No Limit
2	*	2460.000	97.46	13.90	111.36	54.00	57.36	AVG	No Limit
3		2483.500	41.97	13.93	55.90	74.00	-18.10	peak	
4		2483.500	32.64	13.93	46.57	54.00	-7.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2452 MHz

Horizontal

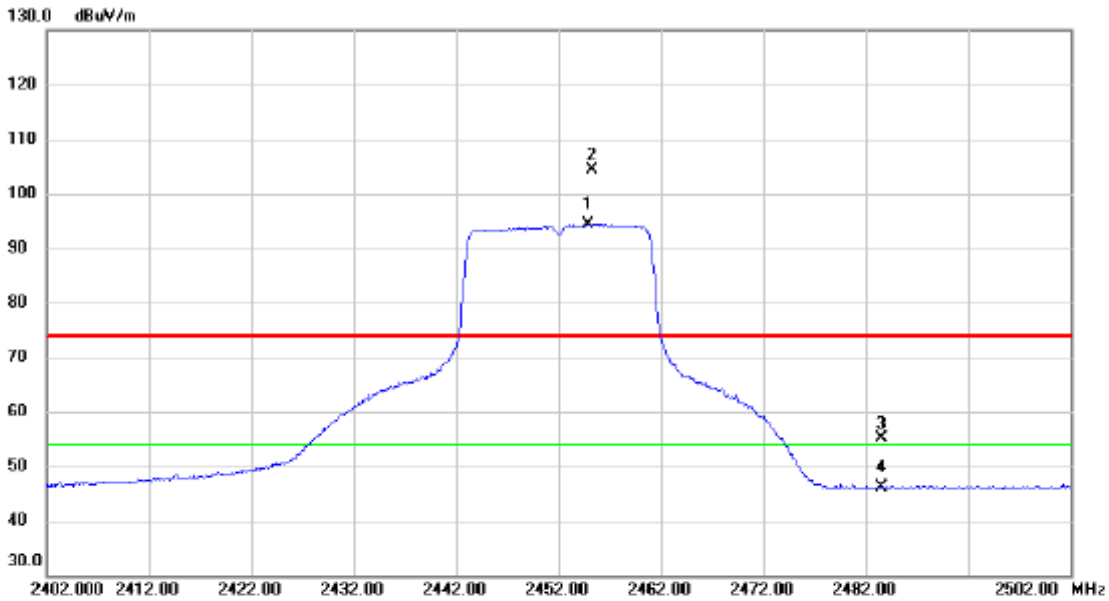

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.900	80.57	13.89	94.46	54.00	40.46	AVG	No Limit
2	X	2455.300	90.45	13.89	104.34	74.00	30.34	peak	No Limit
3		2483.500	41.21	13.93	55.14	74.00	-18.86	peak	
4		2483.500	32.25	13.93	46.18	54.00	-7.82	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Vertical

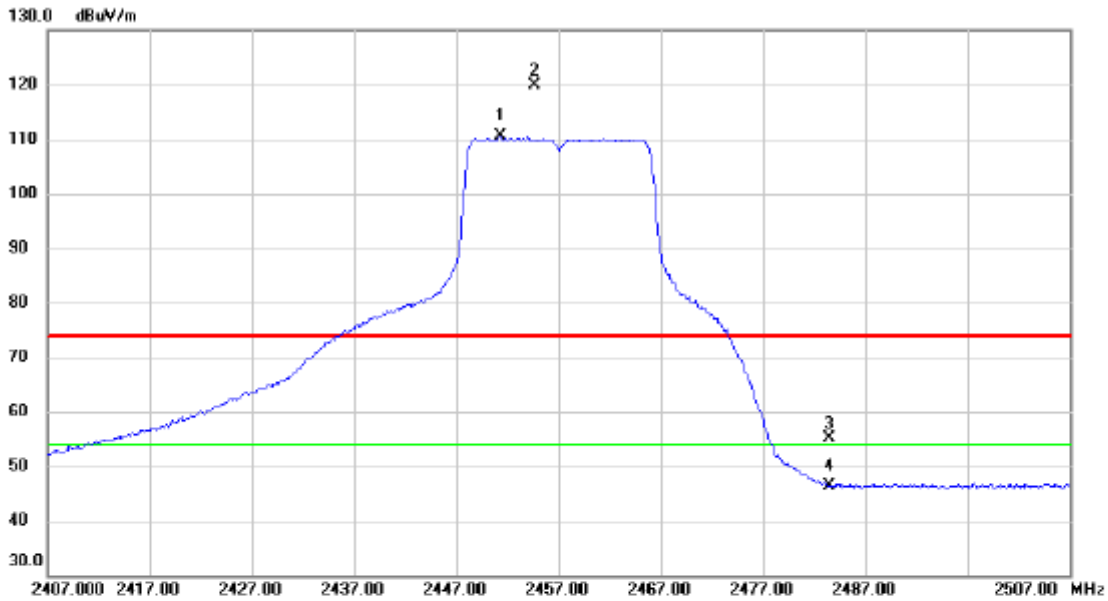


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2451.300	96.64	13.88	110.52	54.00	56.52	AVG	No Limit
2	X	2454.700	105.93	13.89	119.82	74.00	45.82	peak	No Limit
3		2483.500	41.16	13.93	55.09	74.00	-18.91	peak	
4		2483.500	32.44	13.93	46.37	54.00	-7.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Value + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Horizontal

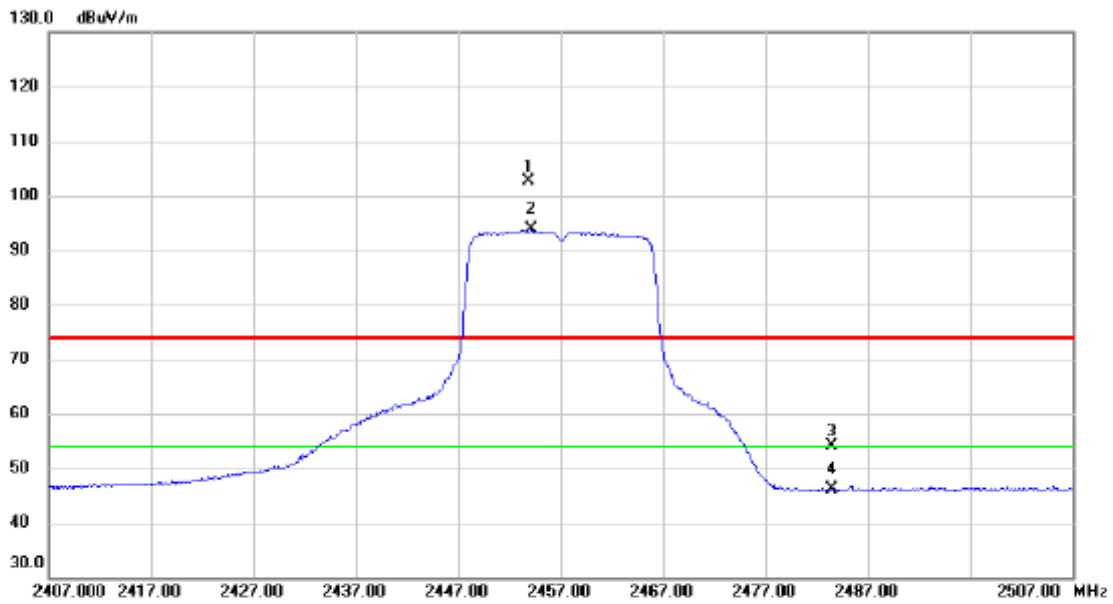


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2453.900	88.82	13.88	102.70	74.00	28.70	peak	No Limit
2	*	2454.200	79.90	13.89	93.79	54.00	39.79	AVG	No Limit
3		2483.500	40.19	13.93	54.12	74.00	-19.88	peak	
4		2483.500	32.24	13.93	46.17	54.00	-7.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

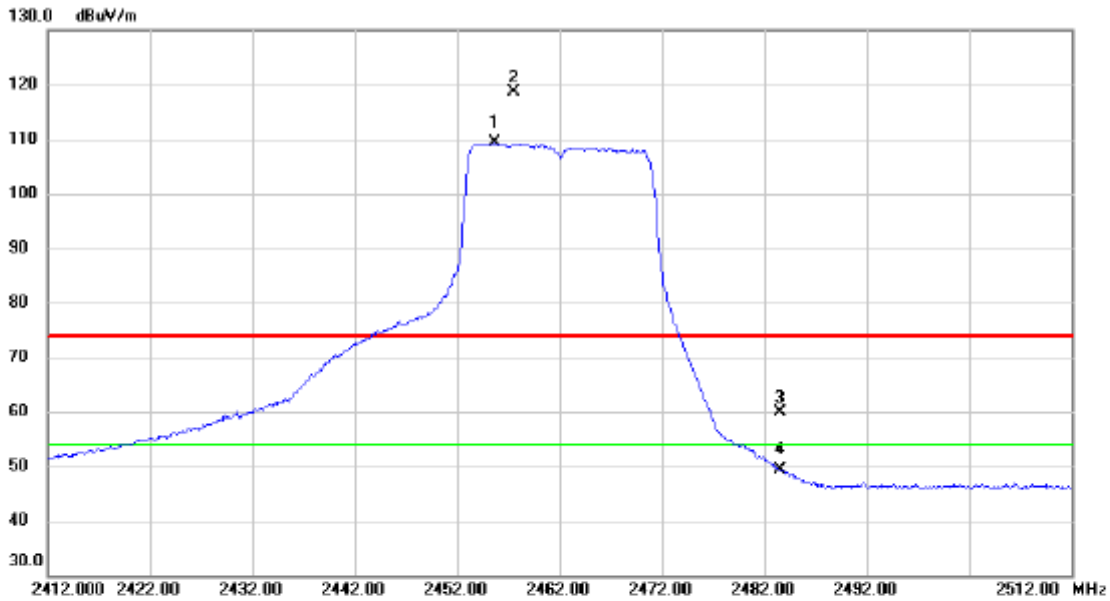


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2455.700	95.41	13.90	109.31	54.00	55.31	AVG	No Limit
2	X	2457.600	104.73	13.90	118.63	74.00	44.63	peak	No Limit
3		2483.500	45.94	13.93	59.87	74.00	-14.13	peak	
4		2483.500	35.40	13.93	49.33	54.00	-4.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

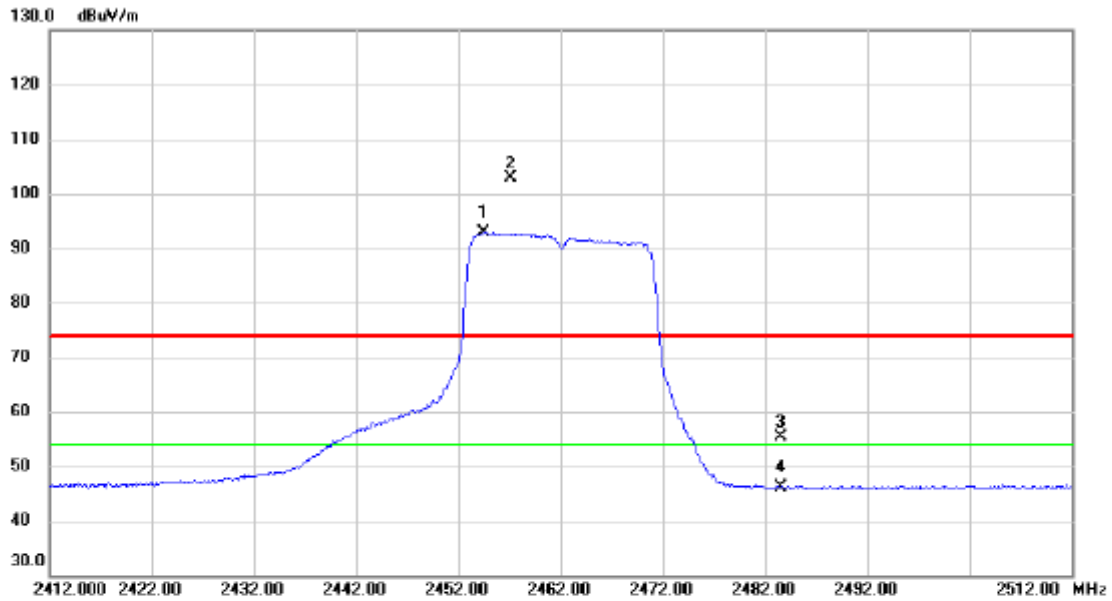


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.400	78.99	13.89	92.88	54.00	38.88	AVG	No Limit
2	X	2457.200	88.93	13.90	102.83	74.00	28.83	peak	No Limit
3		2483.500	41.40	13.93	55.33	74.00	-18.67	peak	
4		2483.500	32.24	13.93	46.17	54.00	-7.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

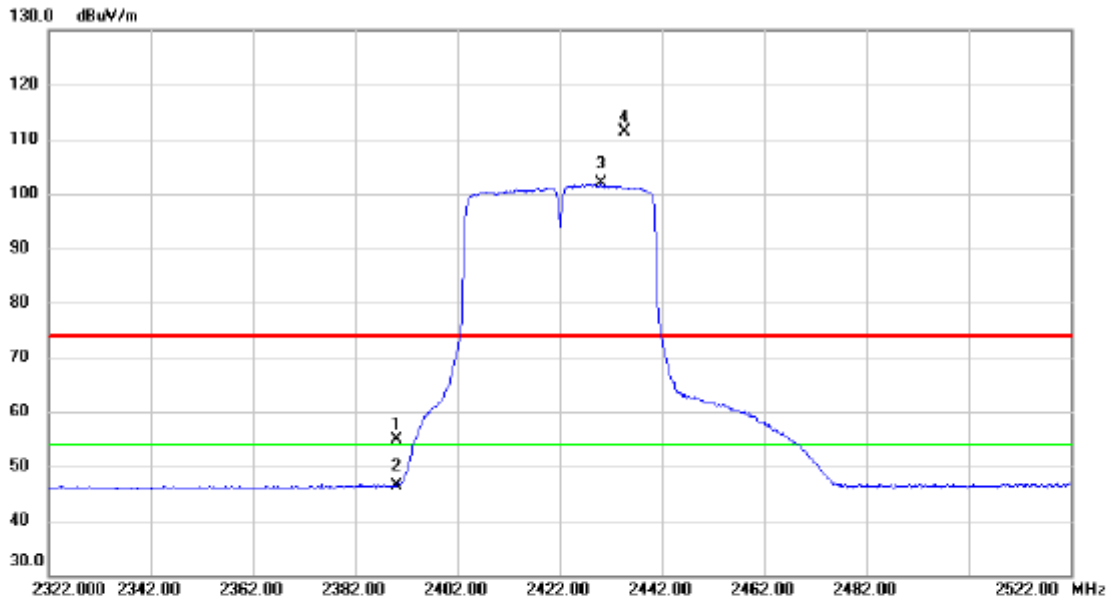


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.08	13.81	54.89	74.00	-19.11	peak	
2		2390.000	32.62	13.81	46.43	54.00	-7.57	AVG	
3	*	2430.000	87.94	13.86	101.80	54.00	47.80	AVG	No Limit
4	X	2434.600	97.52	13.86	111.38	74.00	37.38	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

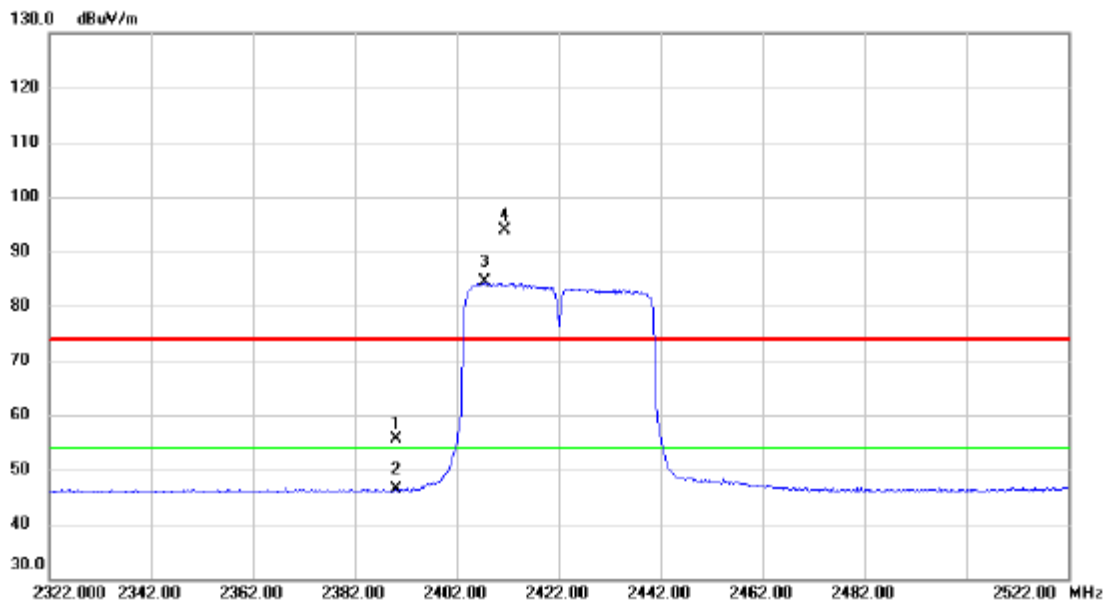


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	41.87	13.81	55.68	74.00	-18.32	peak	
2	2390.000	32.47	13.81	46.28	54.00	-7.72	AVG	
3 *	2407.400	70.57	13.83	84.40	54.00	30.40	AVG	No Limit
4 X	2411.400	80.08	13.83	93.91	74.00	19.91	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40 Mode 2427 MHz

Vertical

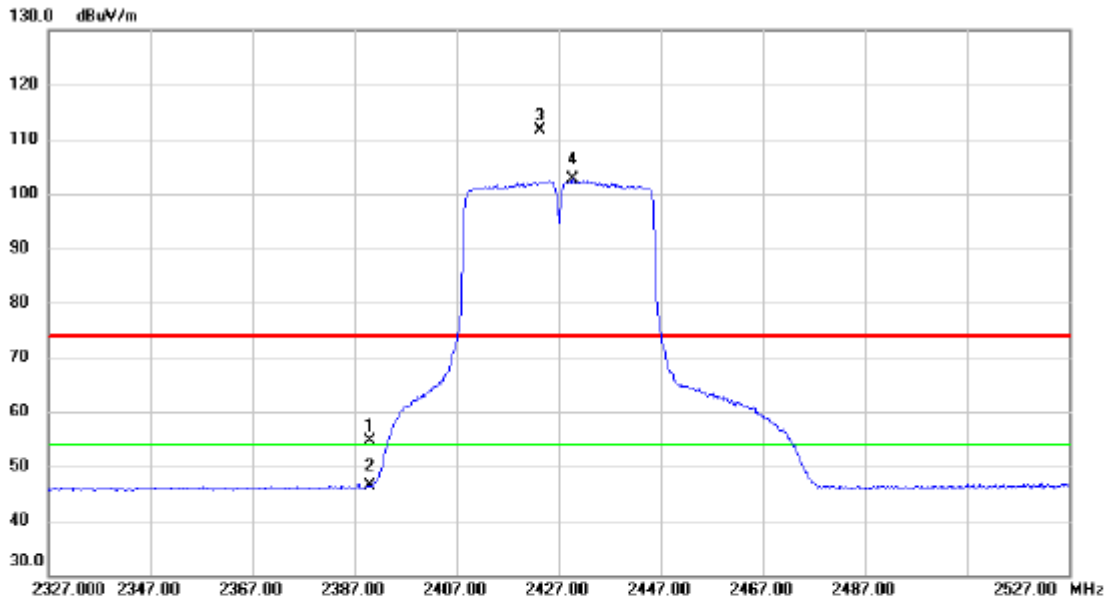


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.93	13.81	54.74	74.00	-19.26	peak	
2		2390.000	32.52	13.81	46.33	54.00	-7.67	AVG	
3	X	2423.400	97.73	13.85	111.58	74.00	37.58	peak	No Limit
4	*	2429.800	88.69	13.86	102.55	54.00	48.55	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40 Mode 2427 MHz

Horizontal

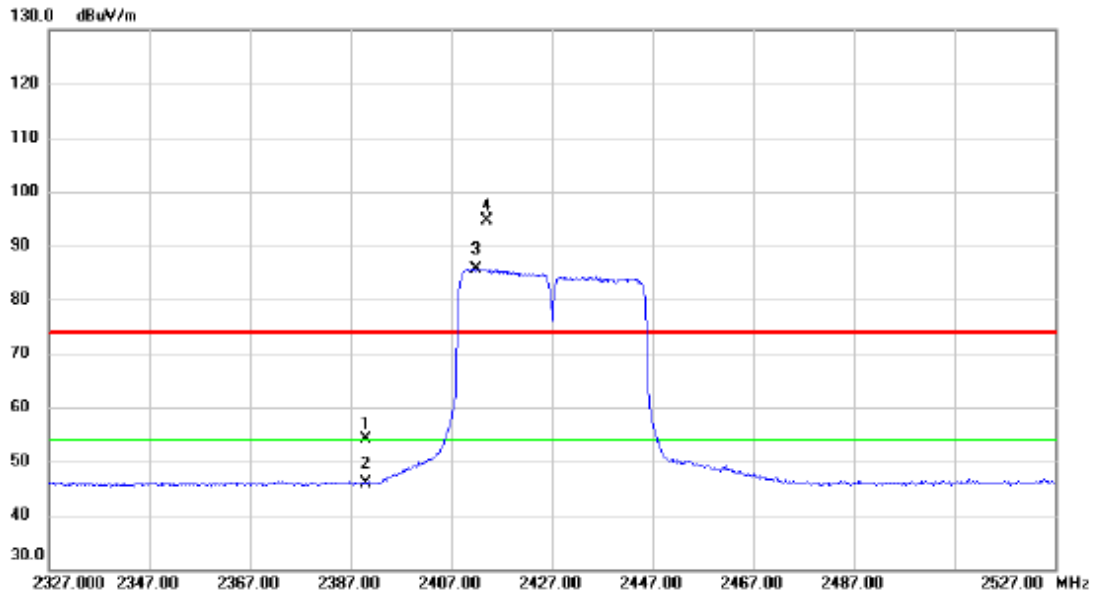


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	40.23	13.81	54.04	74.00	-19.96	peak	
2		2390.000	32.16	13.81	45.97	54.00	-8.03	AVG	
3	*	2412.000	71.79	13.83	85.62	54.00	31.62	AVG	No Limit
4	X	2414.000	80.90	13.84	94.74	74.00	20.74	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40 Mode 2432 MHz

Vertical

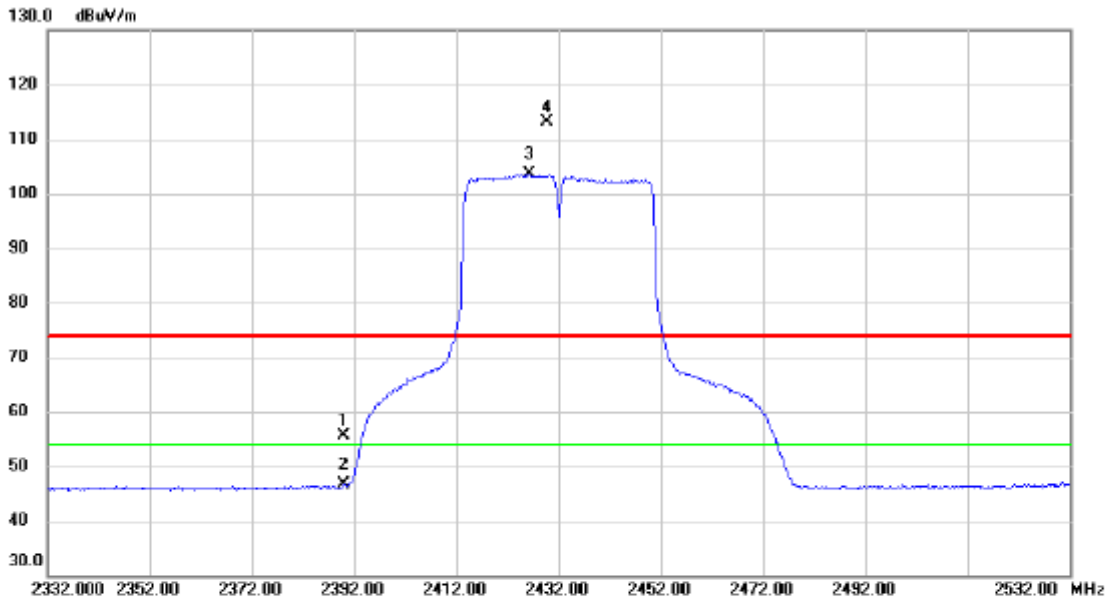


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.70	13.81	55.51	74.00	-18.49	peak	
2		2390.000	32.80	13.81	46.61	54.00	-7.39	AVG	
3	*	2426.200	89.70	13.85	103.55	54.00	49.55	AVG	No Limit
4	X	2429.800	99.28	13.86	113.14	74.00	39.14	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40 Mode 2432 MHz

Horizontal

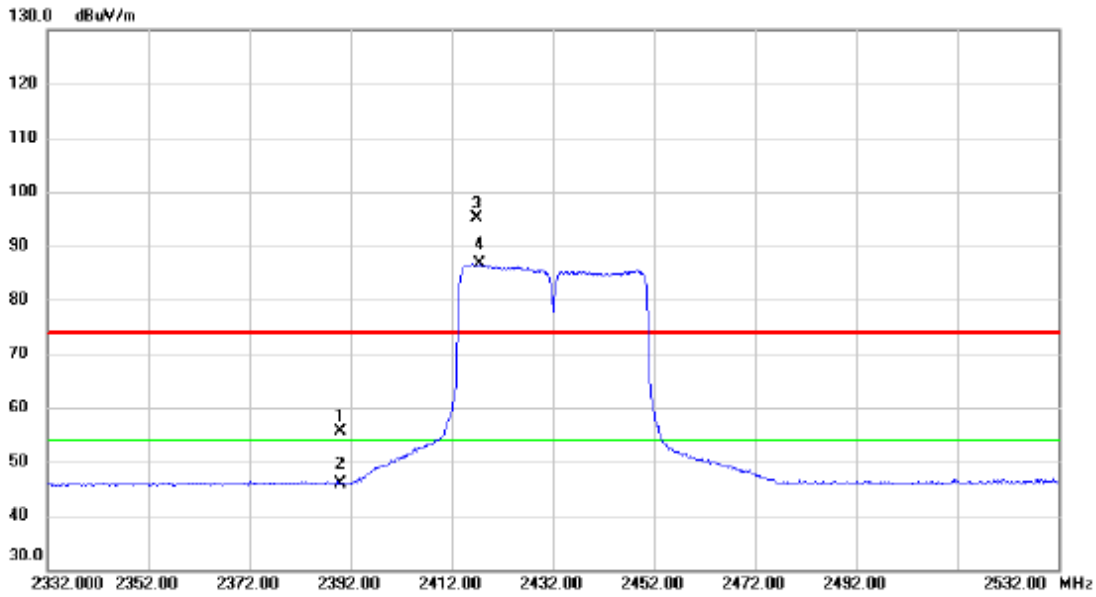


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.93	13.81	55.74	74.00	-18.26	peak	
2		2390.000	32.15	13.81	45.96	54.00	-8.04	AVG	
3	X	2416.800	81.40	13.84	95.24	74.00	21.24	peak	No Limit
4	*	2417.400	72.75	13.84	86.59	54.00	32.59	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

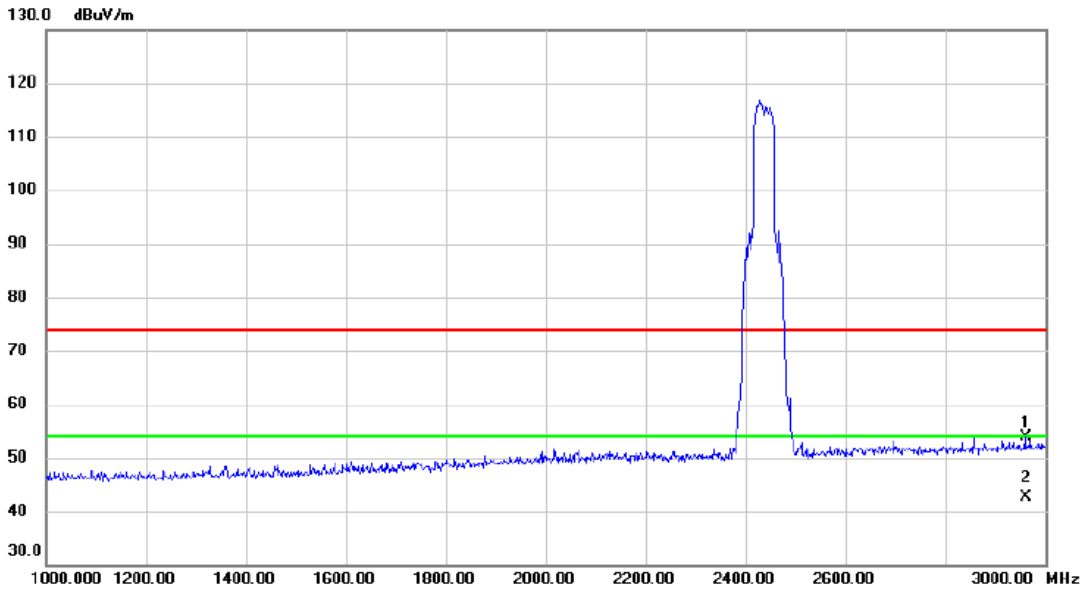


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2960.000	43.56	10.34	53.90	74.00	-20.10	peak	
2 *	2960.000	32.21	10.34	42.55	54.00	-11.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

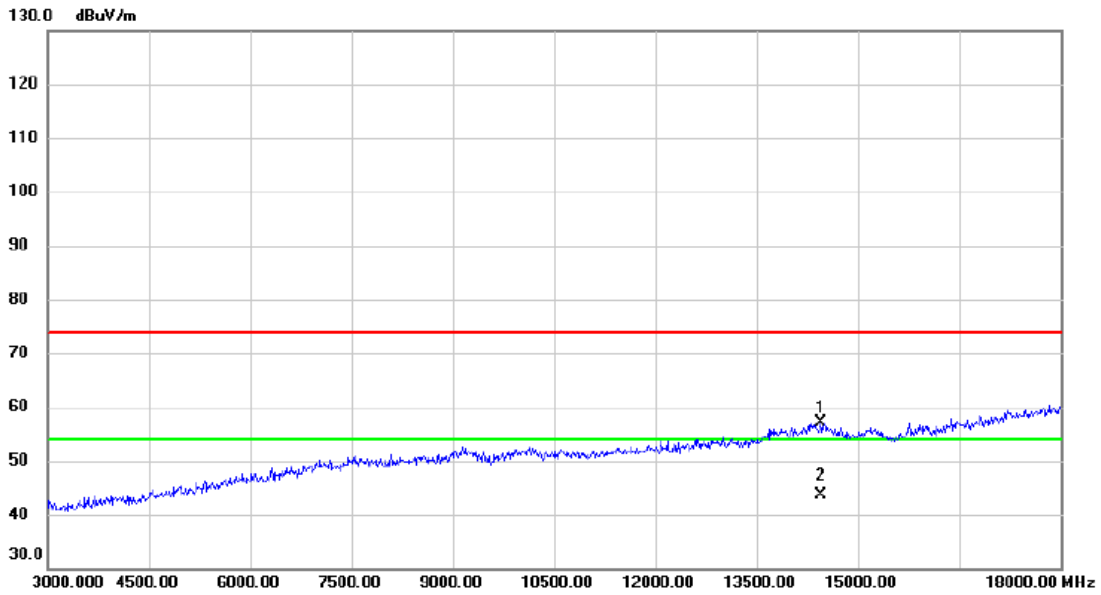


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14445.000	38.10	19.12	57.22	74.00	-16.78	peak	
2	*	14445.000	24.39	19.12	43.51	54.00	-10.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

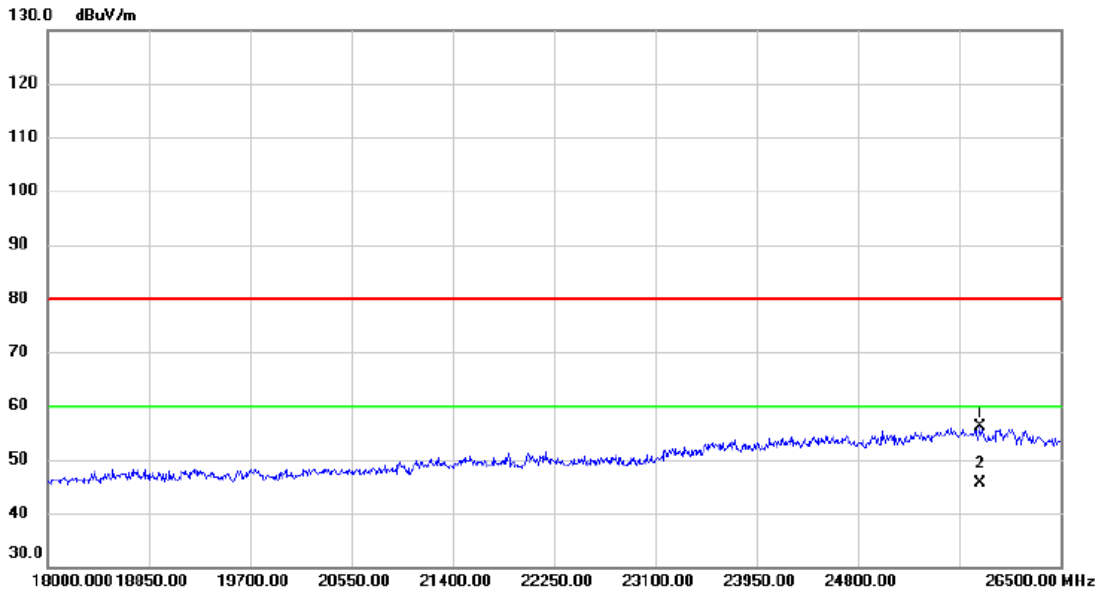


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		25820.000	25.76	30.29	56.05	80.00	-23.95	peak	
2	*	25820.000	15.42	30.29	45.71	60.00	-14.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

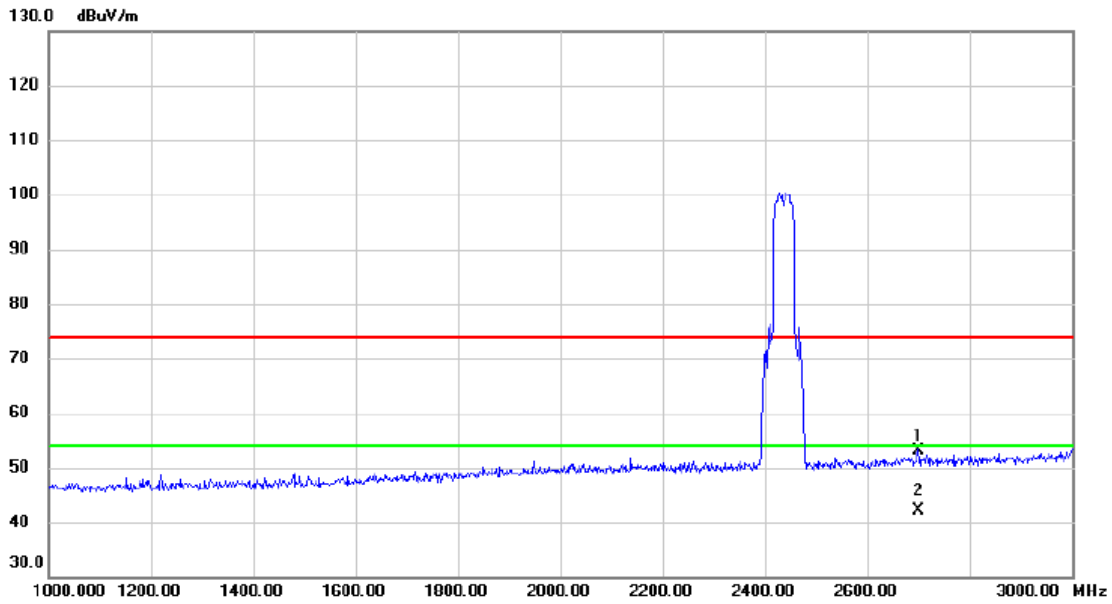

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2700.000	44.00	9.25	53.25	74.00	-20.75	peak	
2	*	2700.000	32.87	9.25	42.12	54.00	-11.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.