

## Appendix B

### RF Test Data for BT V4.2(BDR/EDR) (Conducted Measurement)

Product Name: Wireless Speaker

Trade Mark: **tineco**


Test Model: Tineco Speaker

#### Environmental Conditions

Temperature:	23.6 ° C
Relative Humidity:	53.9%
ATM Pressure:	100.0 kPa
Test Engineer:	David.Luo
Supervised by:	Tom.Liu


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

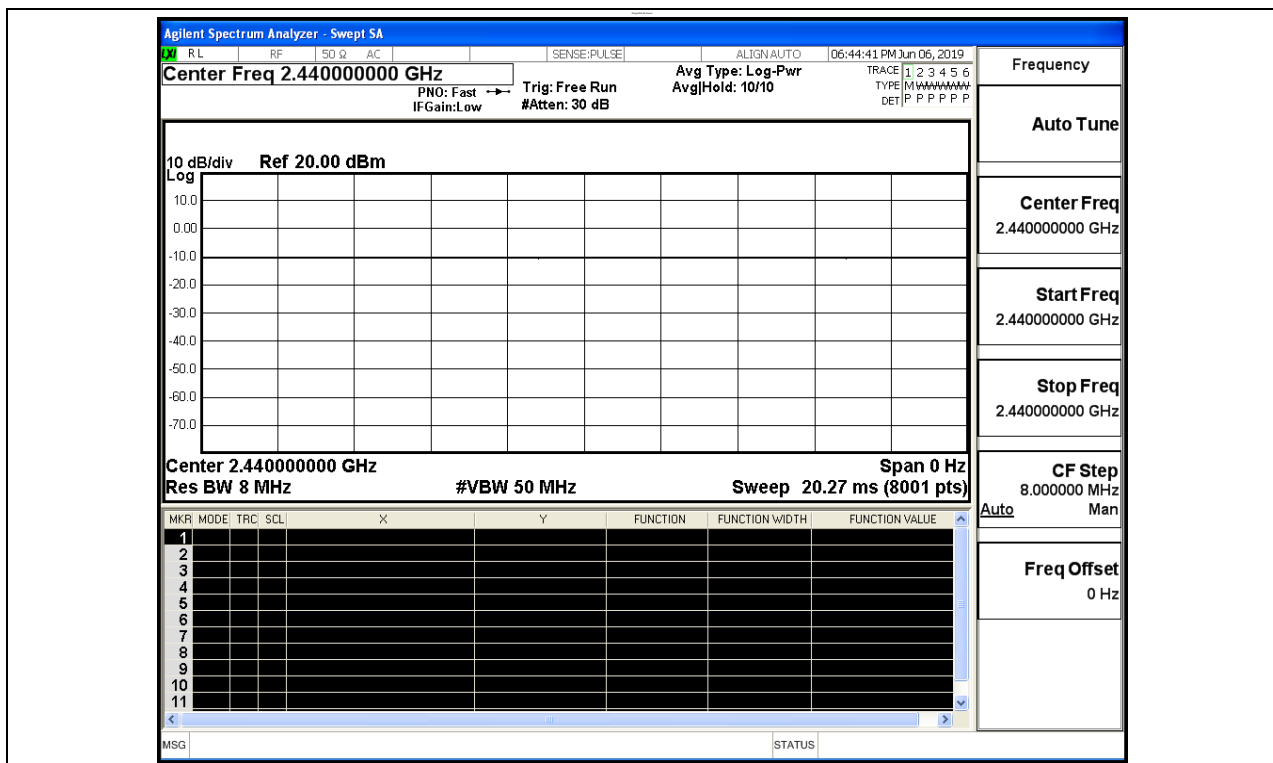


**B.2 Maximum Conducted Peak Output Power**

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-4.089	30	PASS
BT LE	MCH	-2.294	30	PASS
BT LE	HCH	-0.904	30	PASS

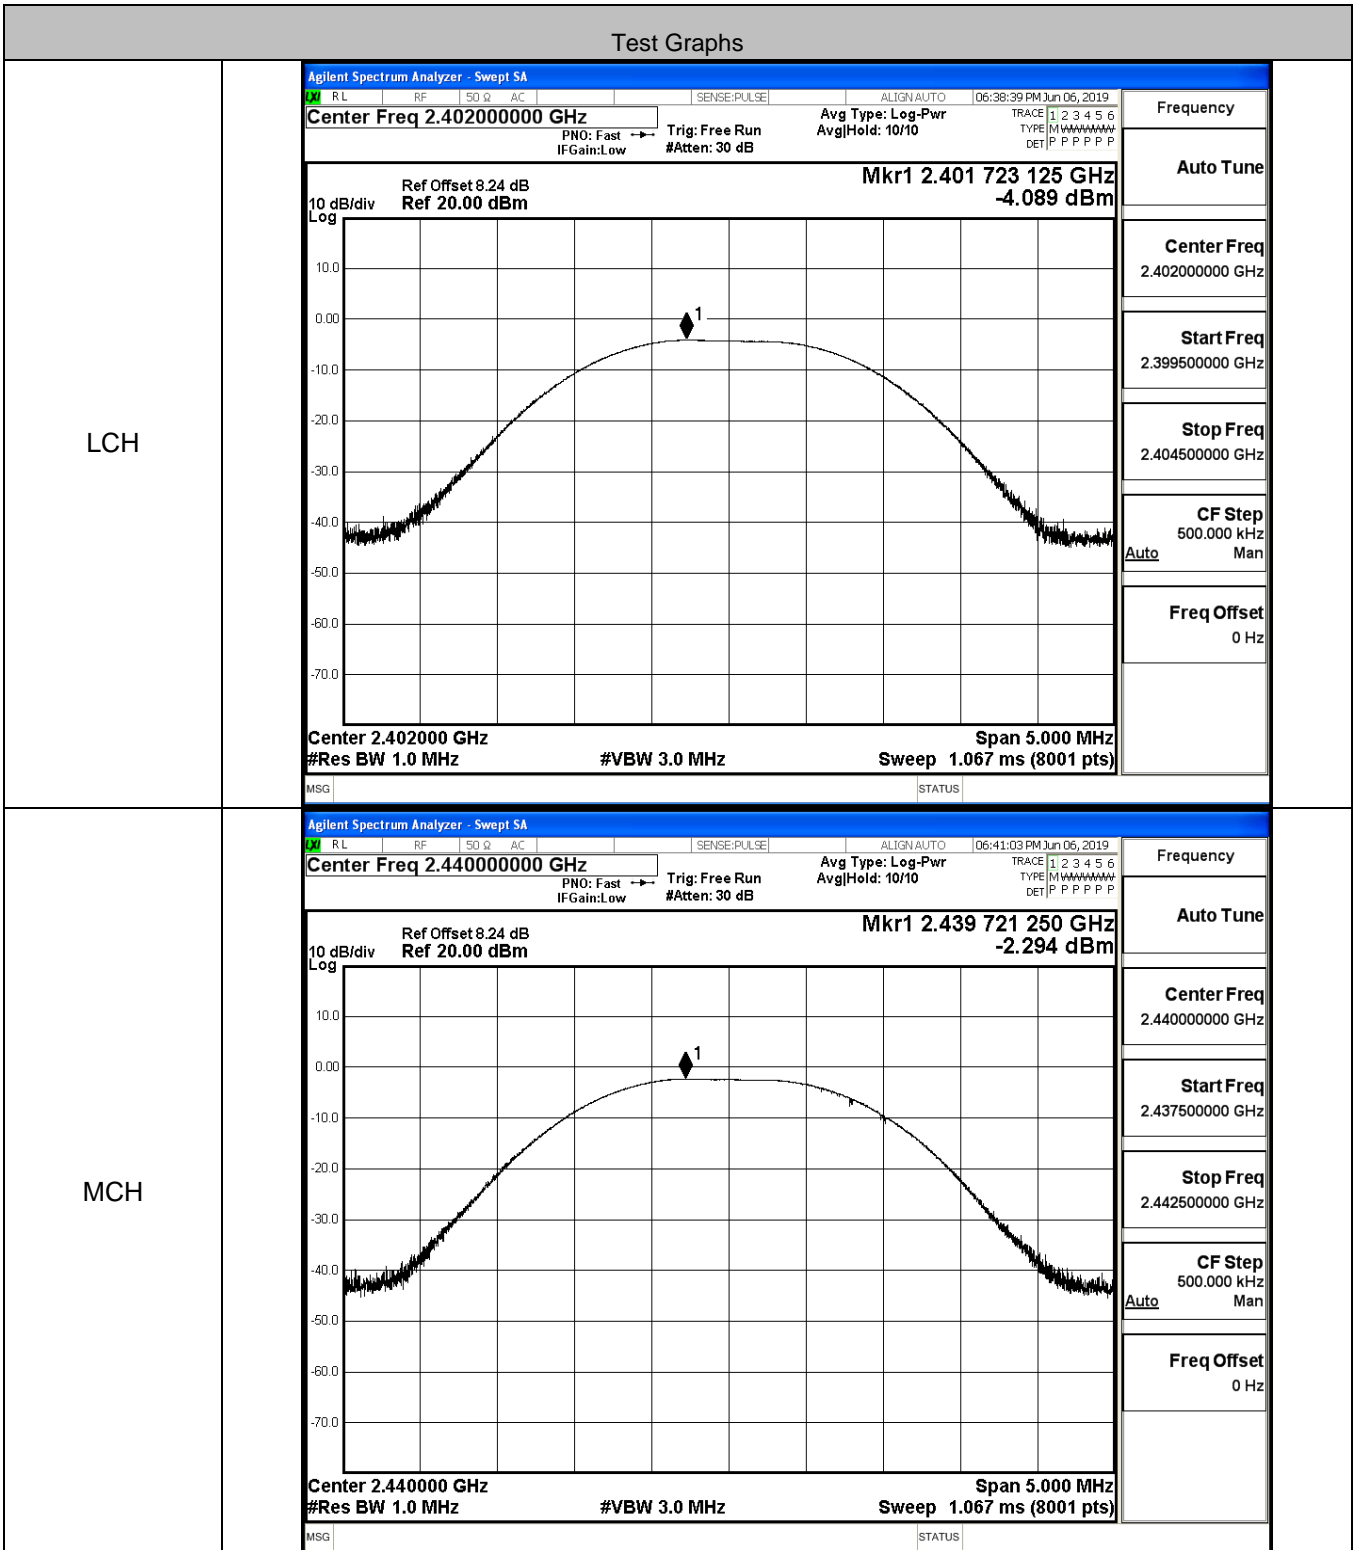



HCH

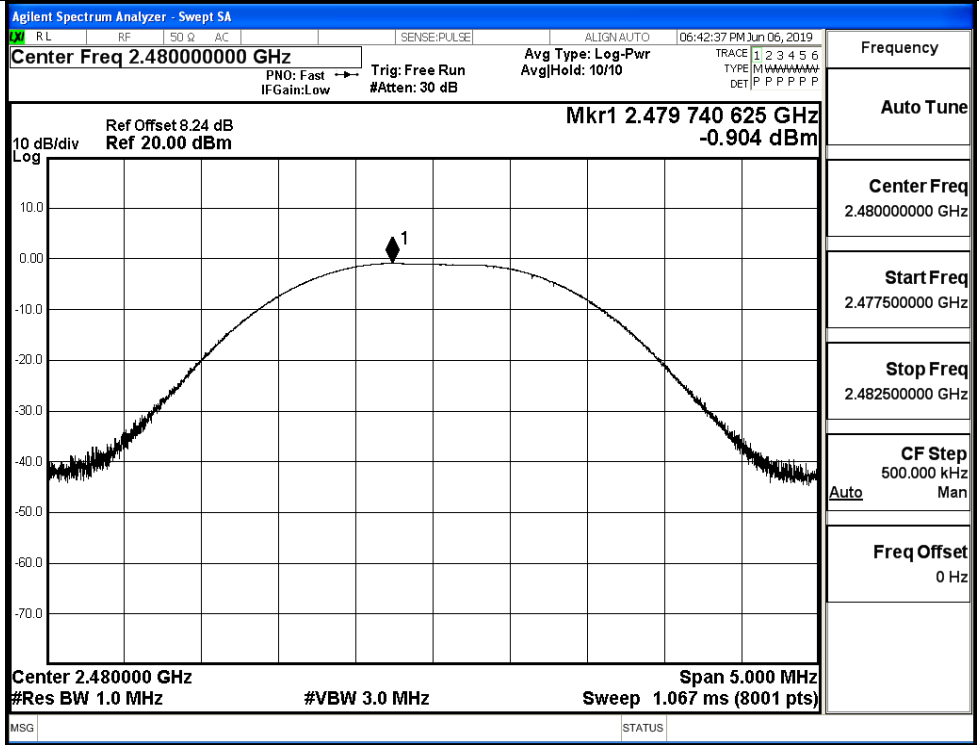


**B.3 Maximum Power Spectral Density**

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-22.523	8	PASS
BT LE	MCH	-20.739	8	PASS
BT LE	HCH	-19.360	8	PASS

**Test Graphs**

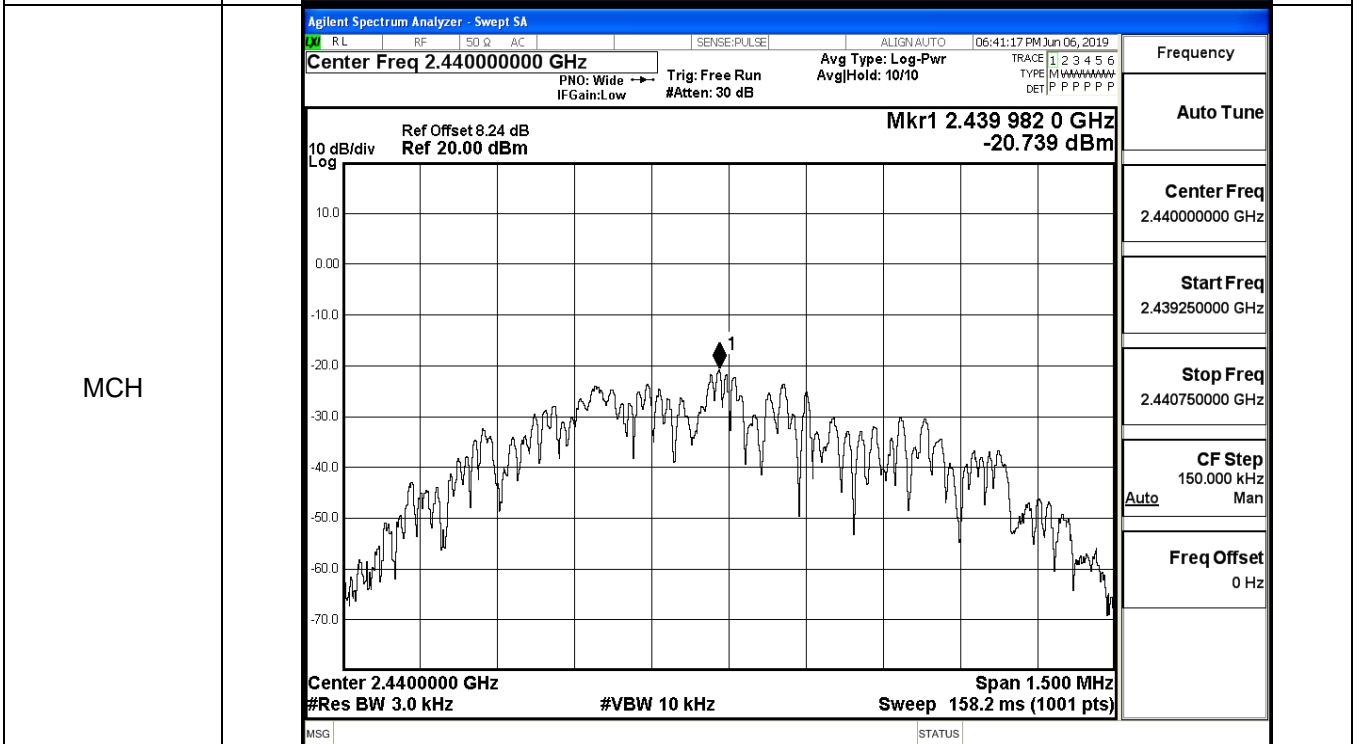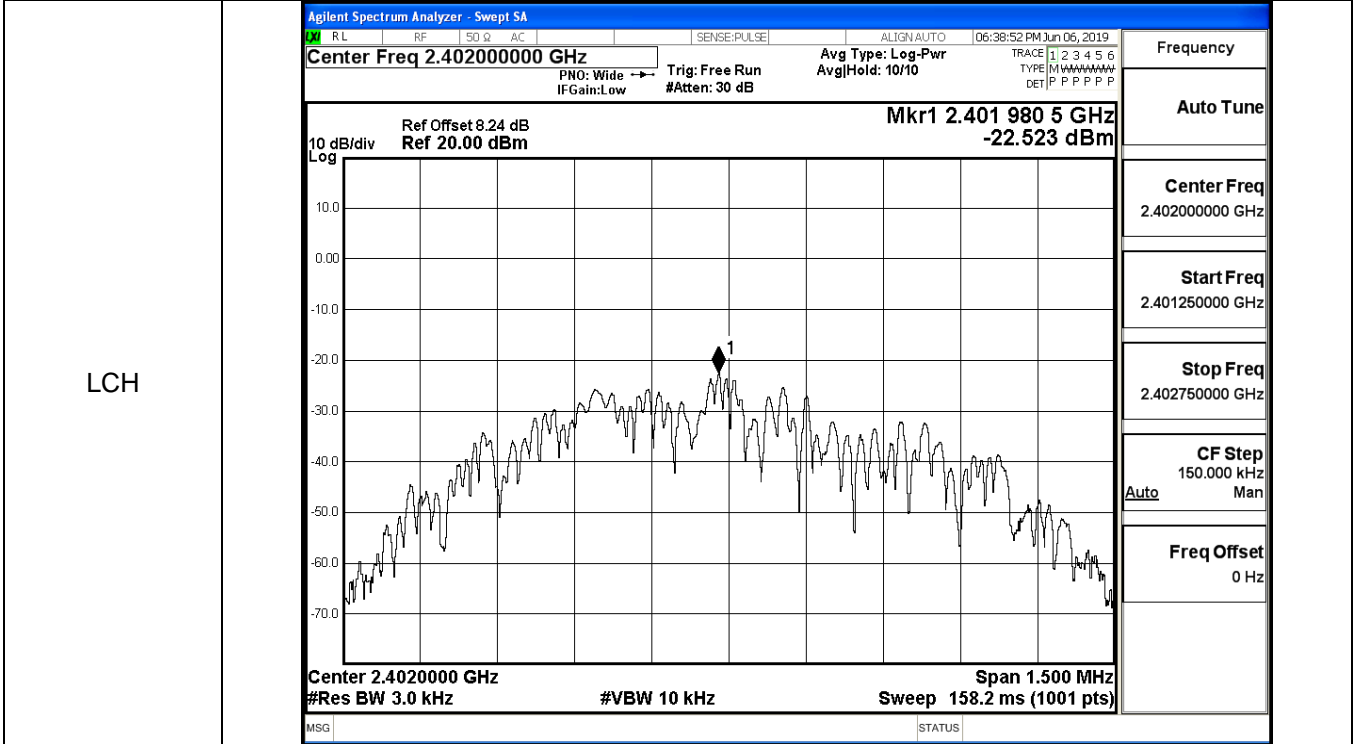

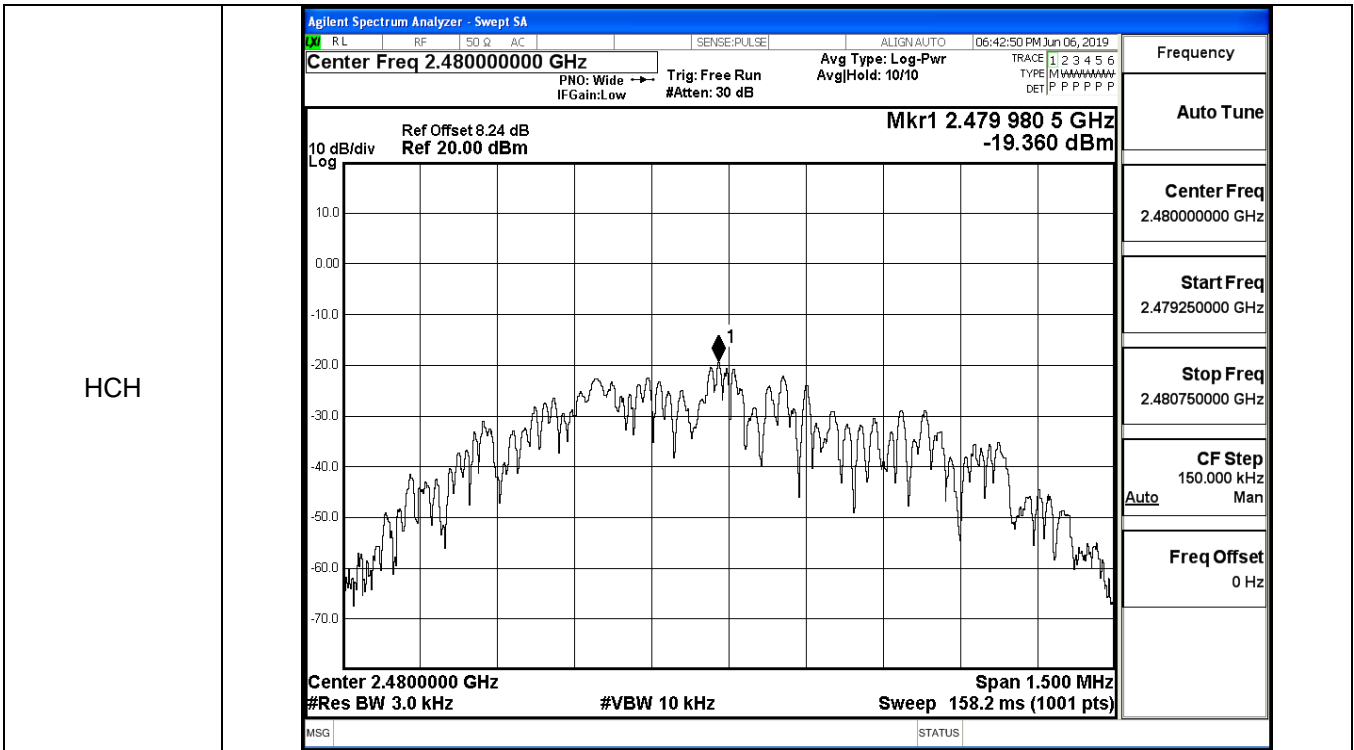

**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.5001	≥0.5	PASS
BT LE	MCH	0.5008	≥0.5	PASS
BT LE	HCH	0.5006	≥0.5	PASS

Test Graphs																			
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 06:38:28 PM Jun 06, 2019</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None                      Trig: Free Run AvgHold: &gt;1/1                      #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div                          Log                          Ref Offset 8.24 dB                          Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4017446 GHz                          -4.1074 dBm                     </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.402 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.27 dBm</td> </tr> <tr> <td style="text-align: center;"><b>1.0498 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-926 Hz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>500.1 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	1.27 dBm	<b>1.0498 MHz</b>			Transmit Freq Error	-926 Hz	OBW Power	x dB Bandwidth	500.1 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	1.27 dBm																	
<b>1.0498 MHz</b>																			
Transmit Freq Error	-926 Hz	OBW Power																	
x dB Bandwidth	500.1 kHz	x dB																	
		99.00 %																	
		-6.00 dB																	
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 06:49:06 PM Jun 06, 2019</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None                      Trig: Free Run AvgHold: 1/1                      #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div                          Log                          Ref Offset 8.24 dB                          Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4397458 GHz                          -2.4144 dBm                     </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.44 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.94 dBm</td> </tr> <tr> <td style="text-align: center;"><b>1.0571 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-3.813 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>500.8 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	2.94 dBm	<b>1.0571 MHz</b>			Transmit Freq Error	-3.813 kHz	OBW Power	x dB Bandwidth	500.8 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	2.94 dBm																	
<b>1.0571 MHz</b>																			
Transmit Freq Error	-3.813 kHz	OBW Power																	
x dB Bandwidth	500.8 kHz	x dB																	
		99.00 %																	
		-6.00 dB																	

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	06:46:36 PM Jun 06, 2019
Center Freq 2.480000000 GHz				Center Freq: 2.480000000 GHz		Radio Std: None
				Trig: Free Run		AvgHold>1/1
#IFGain:Low				#Atten: 30 dB		Radio Device: BTS

10 dB/div  
 Log  
 10.0  
 0.00  
 -10.0  
 -20.0  
 -30.0  
 -40.0  
 -50.0  
 -60.0  
 -70.0

Ref Offset 8.24 dB  
 Ref 20.00 dBm

Mkr1 2.4797465 GHz  
 -0.96760 dBm

Center 2.48 GHz  
 #Res BW 100 kHz

#VBW 300 kHz

Span 3 MHz  
 Sweep 1.067 ms

Occupied Bandwidth		Total Power	4.44 dBm
<b>1.0552 MHz</b>			
Transmit Freq Error	-3.967 kHz	OBW Power	99.00 %
x dB Bandwidth	500.6 kHz	x dB	-6.00 dB

Frequency	2.480000000 GHz
Center Freq	2.480000000 GHz
CF Step	300.000 kHz
Auto	Man
Freq Offset	0 Hz

MSG
STATUS

### B.5 Occupied Bandwidth


Mode	Channel	Occupied Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	1.0157	≥0.5	PASS
BT LE	MCH	1.0159	≥0.5	PASS
BT LE	HCH	1.0159	≥0.5	PASS

#### Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz    Center Freq: 2.402000000 GHz    Radio Std: None</p> <p>Trig: Free Run    AvgHold: &gt;10/10</p> <p>#IFGain: Low    #Atten: 30 dB    Radio Device: BTS</p> <p>Ref Offset 8.24 dB Ref 20.00 dBm</p> <p>Center 2.402 GHz    Span 4 MHz #Res BW 30 kHz    #VBW 100 kHz    Sweep 4.267 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>0.87 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>1.0157 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>8.125 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>434.2 kHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>MSG    STATUS</p>	Occupied Bandwidth	Total Power	0.87 dBm	<b>1.0157 MHz</b>			Transmit Freq Error	8.125 kHz	OBW Power 99.00 %	x dB Bandwidth	434.2 kHz	x dB -6.00 dB	<p>Frequency</p> <p>Center Freq 2.402000000 GHz</p> <p>CF Step 400.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	0.87 dBm											
<b>1.0157 MHz</b>														
Transmit Freq Error	8.125 kHz	OBW Power 99.00 %												
x dB Bandwidth	434.2 kHz	x dB -6.00 dB												
MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz    Center Freq: 2.440000000 GHz    Radio Std: None</p> <p>Trig: Free Run    AvgHold: &gt;10/10</p> <p>#IFGain: Low    #Atten: 30 dB    Radio Device: BTS</p> <p>Ref Offset 8.24 dB Ref 20.00 dBm</p> <p>Center 2.44 GHz    Span 4 MHz #Res BW 30 kHz    #VBW 100 kHz    Sweep 4.267 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.70 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>1.0159 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>7.701 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>434.4 kHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>MSG    STATUS</p>	Occupied Bandwidth	Total Power	2.70 dBm	<b>1.0159 MHz</b>			Transmit Freq Error	7.701 kHz	OBW Power 99.00 %	x dB Bandwidth	434.4 kHz	x dB -6.00 dB	<p>Frequency</p> <p>Center Freq 2.440000000 GHz</p> <p>CF Step 400.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	2.70 dBm											
<b>1.0159 MHz</b>														
Transmit Freq Error	7.701 kHz	OBW Power 99.00 %												
x dB Bandwidth	434.4 kHz	x dB -6.00 dB												



HCH

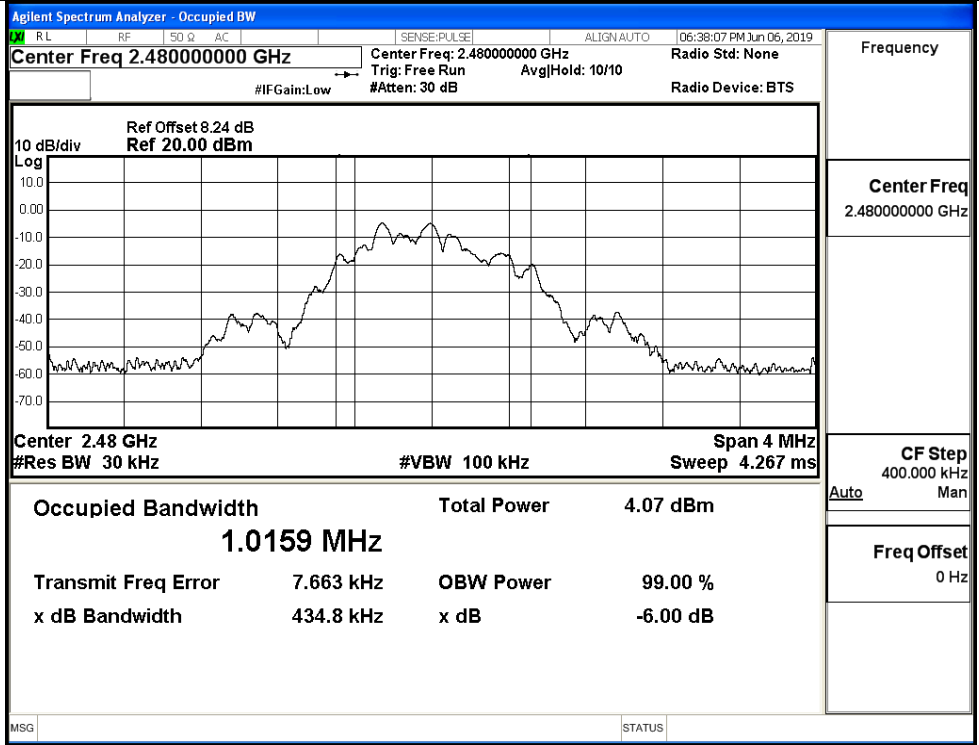

**B.6 RF Conducted Spurious Emissions**

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-4.171	-43.899	-24.171	PASS
BT LE	MCH	-2.326	-43.784	-22.326	PASS
BT LE	HCH	-0.942	-43.801	-20.942	PASS

**BT LE\_LCH\_Graphs**

Pref/BT LE/LCH

Frequency

Auto Tune

Center Freq  
2.402000000 GHz

Start Freq  
2.400000000 GHz

Stop Freq  
2.404000000 GHz

CF Step  
400.000 kHz  
Auto Man

Freq Offset  
0 Hz

---

Puw/BT LE/LCH

Frequency

Auto Tune

Center Freq  
12.515000000 GHz

Start Freq  
30.000000 MHz


Stop Freq  
25.000000000 GHz

CF Step  
2.497000000 GHz  
Auto Man


Freq Offset  
0 Hz

BT LE\_MCH\_Graphs

Pref/BT LE/MCH

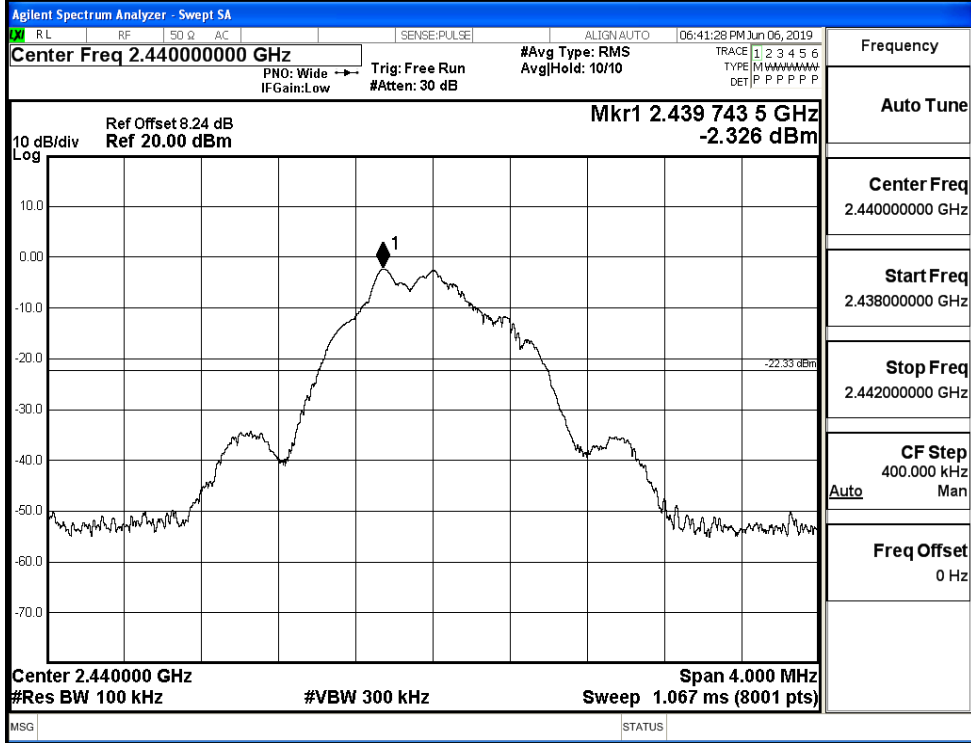


Puw/BT LE/MCH

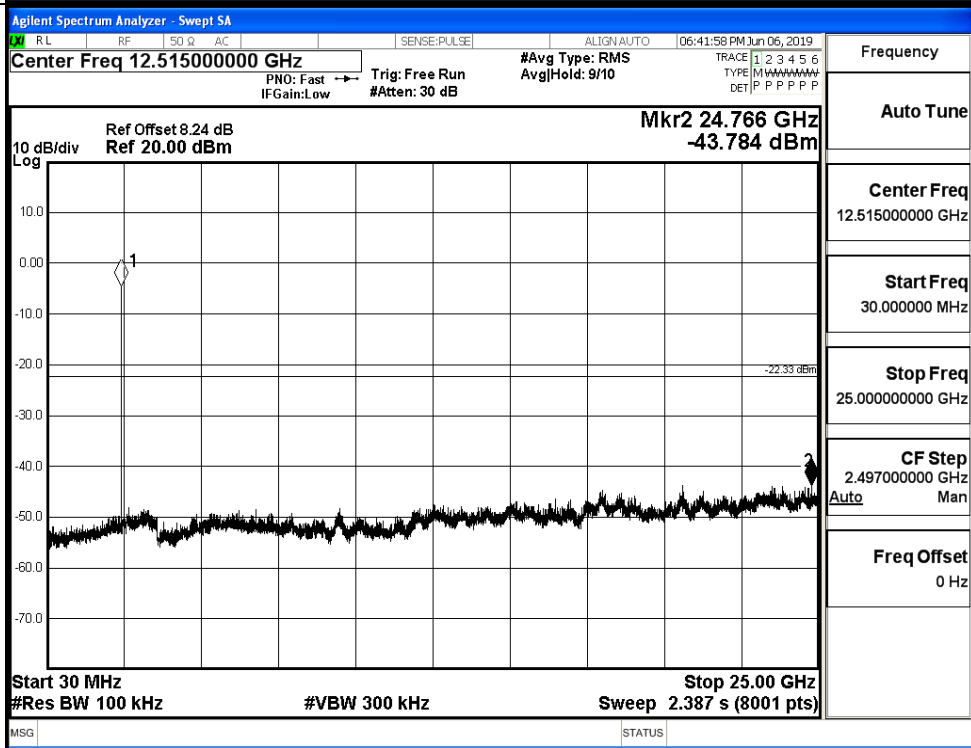


BT LE\_HCH\_Graphs

Pref/BT LE/HCH

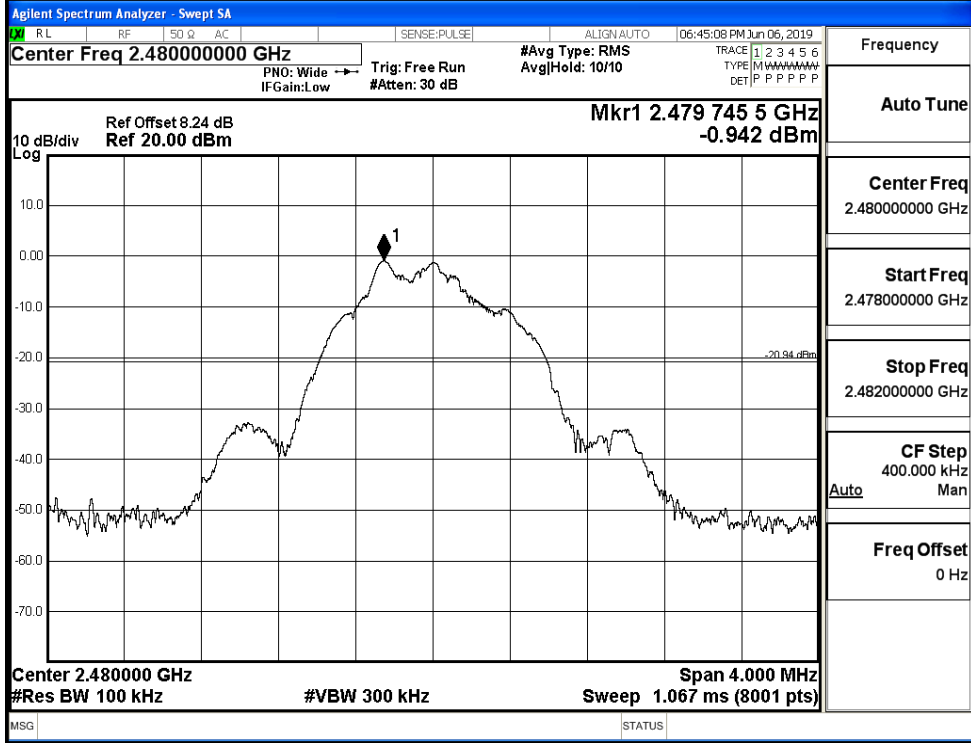

Puw/BT LE/HCH

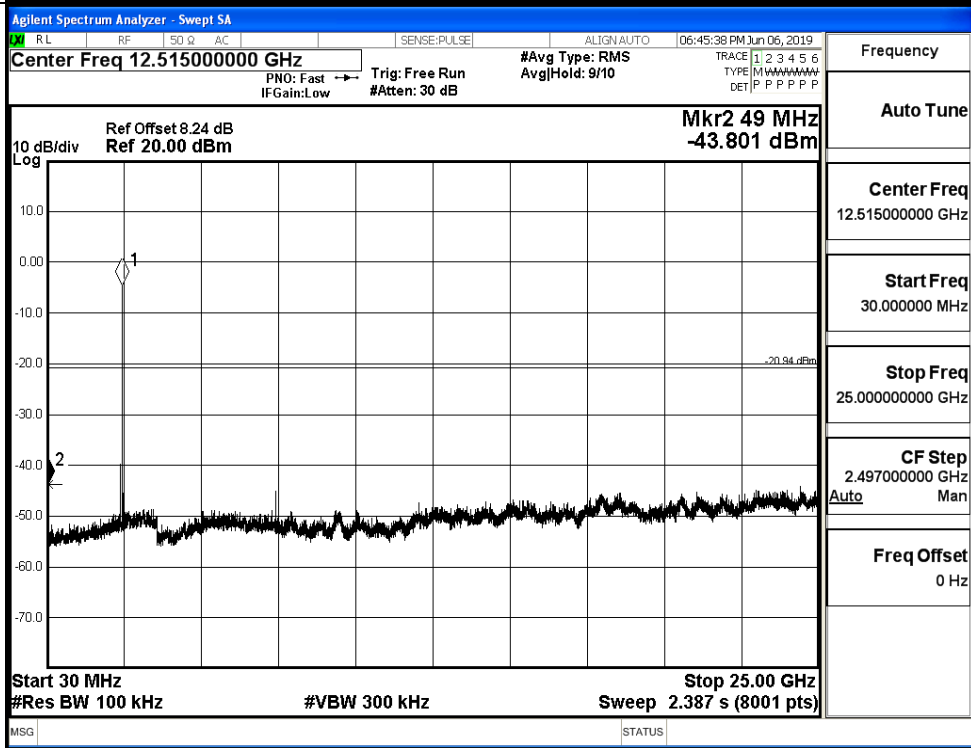

### B.7 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-2.317	-49.640	-22.32	PASS
BT LE	HCH	-1.659	-49.575	-21.66	PASS


Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.35700000 GHz                  #Avg Type: RMS                  AvgHold: 10/10                  Mkr4 2.332 795 GHz                  -49.640 dBm                  Start 2.31000 GHz Stop 2.40400 GHz                  #Res BW 100 kHz #VBW 300 kHz Sweep 9.067 ms (8001 pts)</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 003 GHz</td><td>-2.317 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-52.990 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-54.388 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.332 795 GHz</td><td>-49.640 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 003 GHz	-2.317 dBm				2	N	f		2.400 000 GHz	-52.990 dBm				3	N	f		2.390 000 GHz	-54.388 dBm				4	N	f		2.332 795 GHz	-49.640 dBm				Frequency Auto Tune Center Freq 2.35700000 GHz Start Freq 2.310000000 GHz Stop Freq 2.404000000 GHz CF Step 9.400000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.402 003 GHz	-2.317 dBm																																										
2	N	f		2.400 000 GHz	-52.990 dBm																																										
3	N	f		2.390 000 GHz	-54.388 dBm																																										
4	N	f		2.332 795 GHz	-49.640 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.48900000 GHz                  #Avg Type: RMS                  AvgHold: 10/10                  Mkr4 2.493 400 00 GHz                  -49.575 dBm                  Start 2.47800 GHz Stop 2.50000 GHz                  #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.480 267 75 GHz</td><td>-1.659 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-52.675 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-52.534 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.493 400 00 GHz</td><td>-49.575 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.480 267 75 GHz	-1.659 dBm				2	N	f		2.483 500 00 GHz	-52.675 dBm				3	N	f		2.500 000 00 GHz	-52.534 dBm				4	N	f		2.493 400 00 GHz	-49.575 dBm				Frequency Auto Tune Center Freq 2.48900000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.480 267 75 GHz	-1.659 dBm																																										
2	N	f		2.483 500 00 GHz	-52.675 dBm																																										
3	N	f		2.500 000 00 GHz	-52.534 dBm																																										
4	N	f		2.493 400 00 GHz	-49.575 dBm																																										


**B.8 Restrict-band band-edge measurements**

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.23	2.0	0	54.03	PEAK	74	PASS
		Ant1	2310.0	-53.76	2.0	0	43.50	AV	54	PASS
		Ant1	2390.0	-43.56	2.0	0	53.70	PEAK	74	PASS
		Ant1	2390.0	-53.53	2.0	0	43.72	AV	54	PASS
	2480	Ant1	2483.5	-43.23	2.0	0	54.03	PEAK	74	PASS
		Ant1	2483.5	-53.30	2.0	0	43.96	AV	54	PASS
		Ant1	2500.0	-43.33	2.0	0	53.93	PEAK	74	PASS
		Ant1	2500.0	-53.16	2.0	0	44.09	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

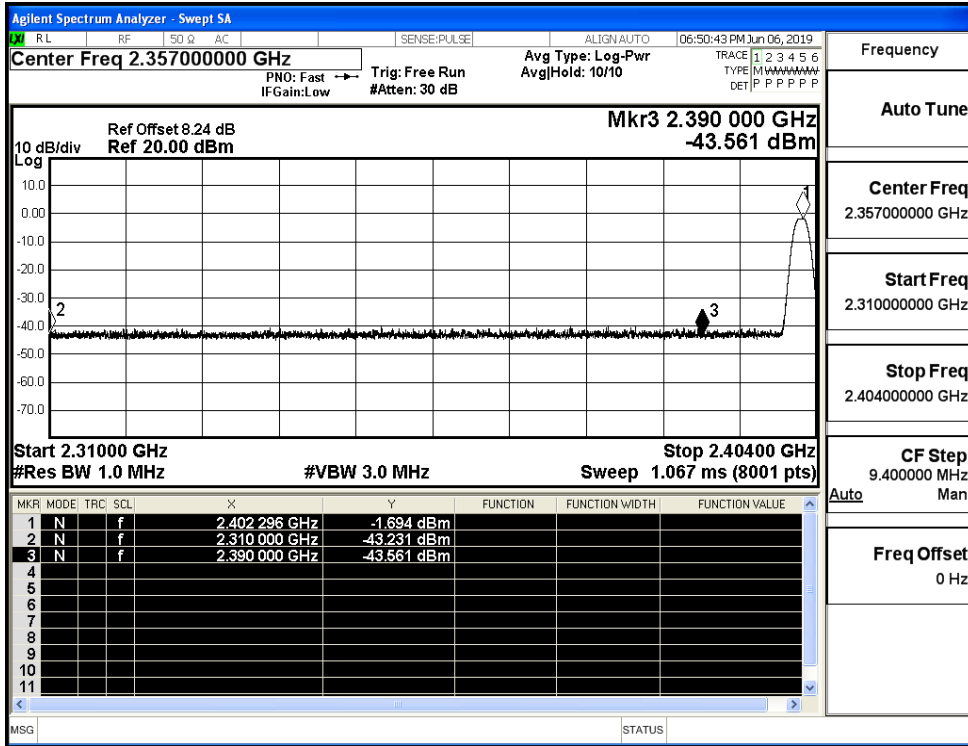

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

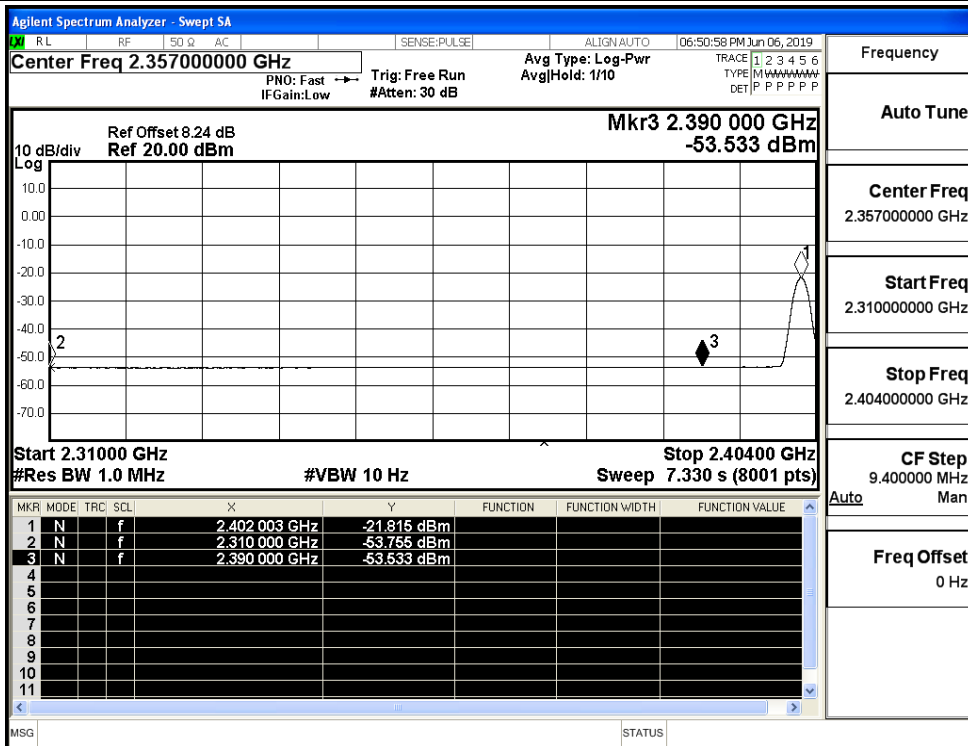

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

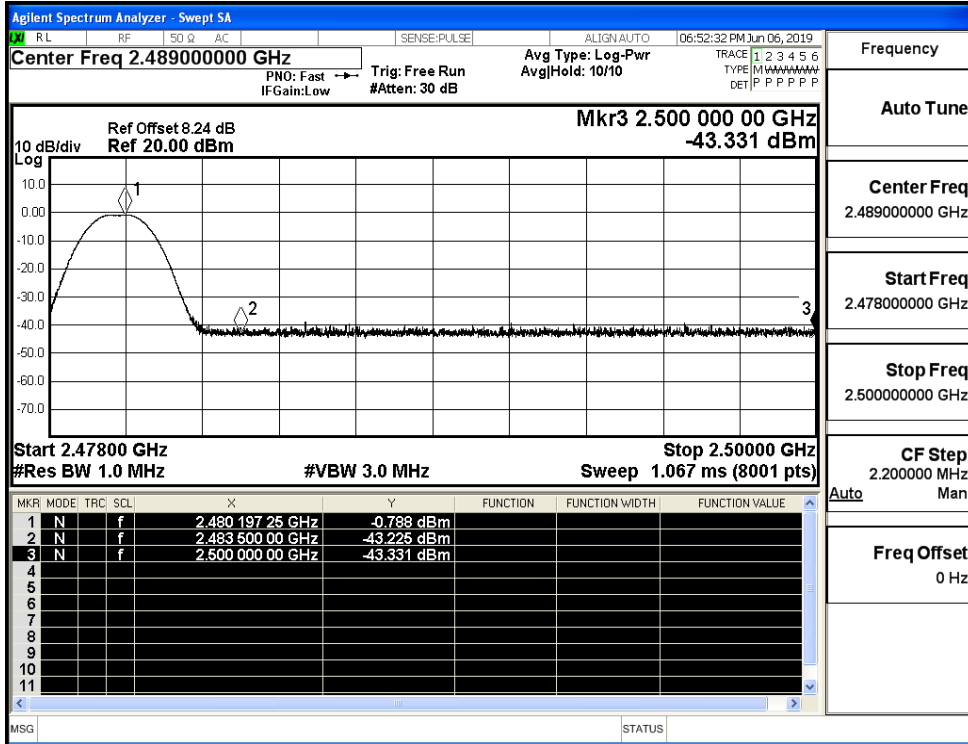

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

