



Appendix B

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Wireless Router

Test Model: TR300

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Ling Zhu





B.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	25.728	>=0.5	Pass
NVNT	a	5200	Ant0	24.962	>=0.5	Pass
NVNT	a	5240	Ant0	19.736	>=0.5	Pass
NVNT	n20	5180	Ant0	27.376	>=0.5	Pass
NVNT	n20	5200	Ant0	25.551	>=0.5	Pass
NVNT	n20	5240	Ant0	20.231	>=0.5	Pass
NVNT	n40	5190	Ant0	45.428	>=0.5	Pass
NVNT	n40	5230	Ant0	40.302	>=0.5	Pass
NVNT	ac20	5180	Ant0	23.928	>=0.5	Pass
NVNT	ac20	5200	Ant0	25.446	>=0.5	Pass
NVNT	ac20	5240	Ant0	20.162	>=0.5	Pass
NVNT	ac40	5190	Ant0	43.148	>=0.5	Pass
NVNT	ac40	5230	Ant0	40.384	>=0.5	Pass
NVNT	ac80	5210	Ant0	96.785	>=0.5	Pass
NVNT	ax20	5180	Ant0	25.857	>=0.5	Pass
NVNT	ax20	5200	Ant0	27.552	>=0.5	Pass
NVNT	ax20	5240	Ant0	19.941	>=0.5	Pass
NVNT	ax40	5190	Ant0	45.603	>=0.5	Pass
NVNT	ax40	5230	Ant0	39.172	>=0.5	Pass
NVNT	ax80	5210	Ant0	79.123	>=0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

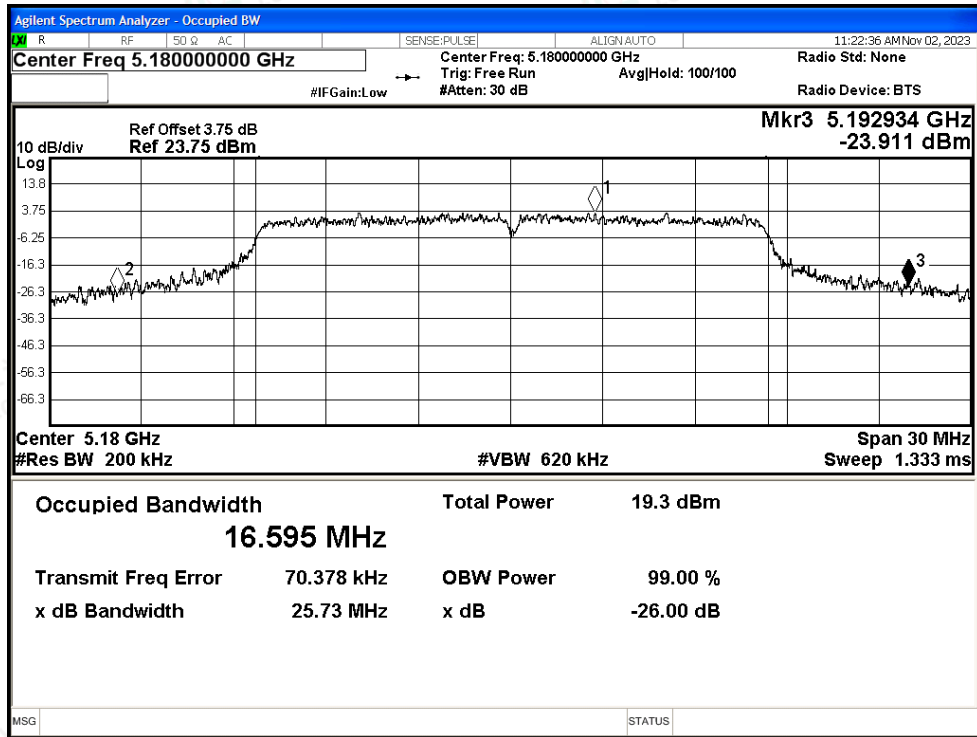


-26dB Bandwidth NVNT a 5200MHz Ant0

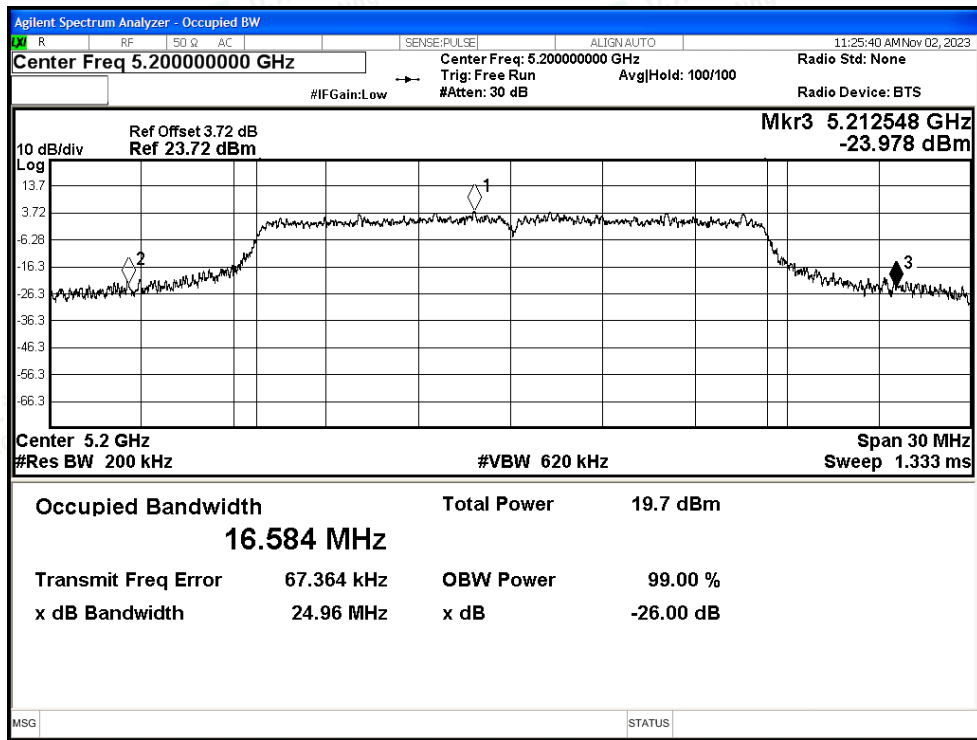




-26dB Bandwidth NVNT a 5240MHz Ant0

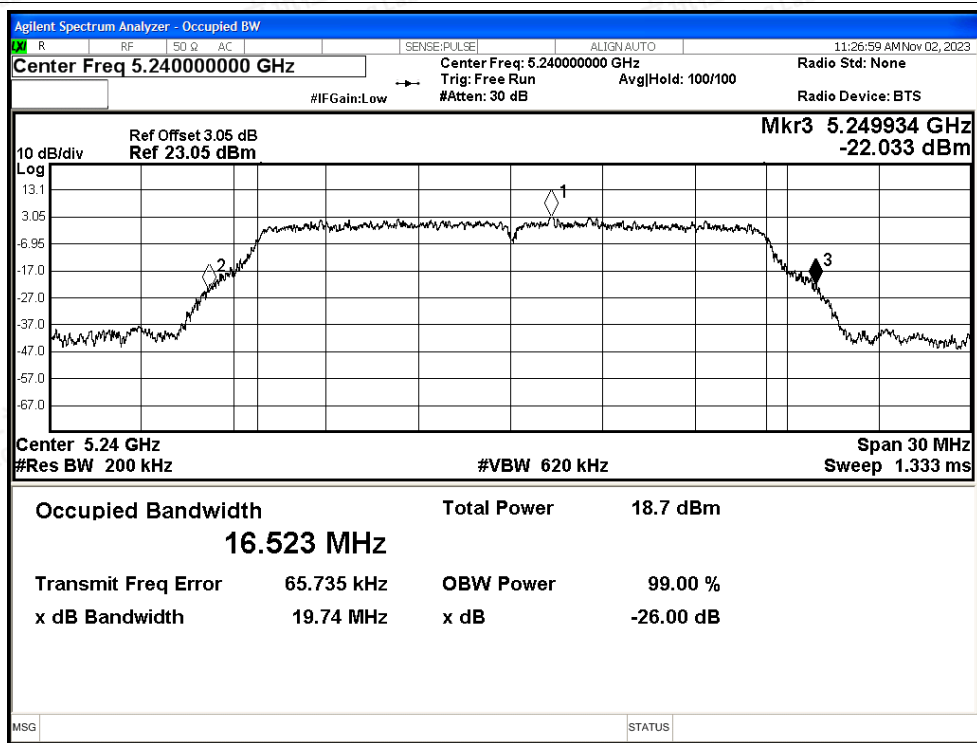


-26dB Bandwidth NVNT n20 5180MHz Ant0

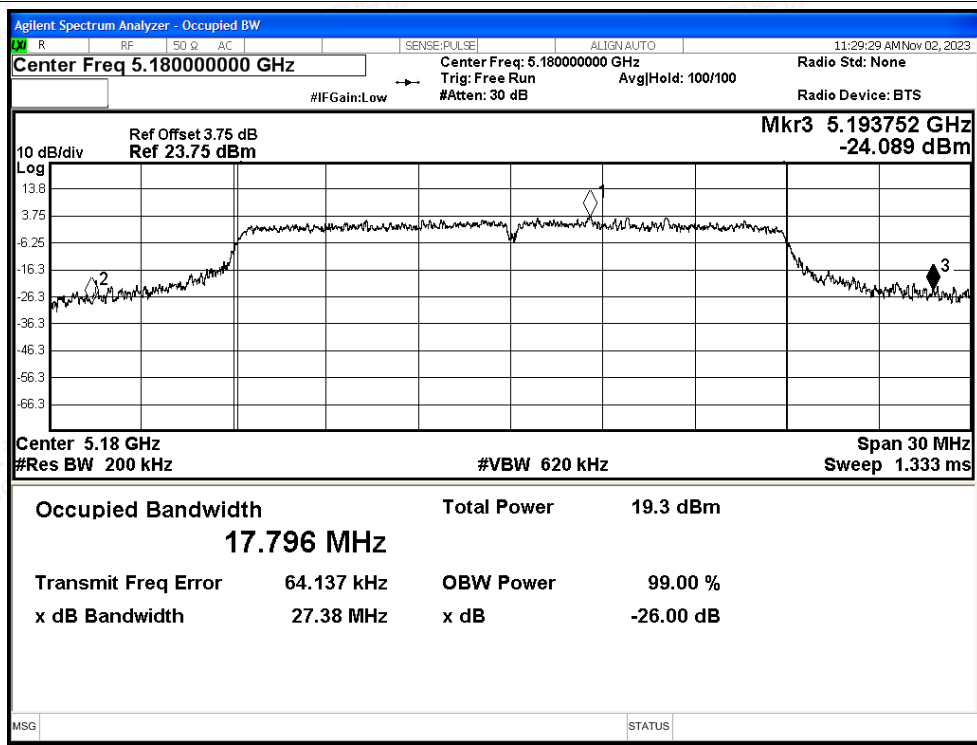




-26dB Bandwidth NVNT n20 5200MHz Ant0

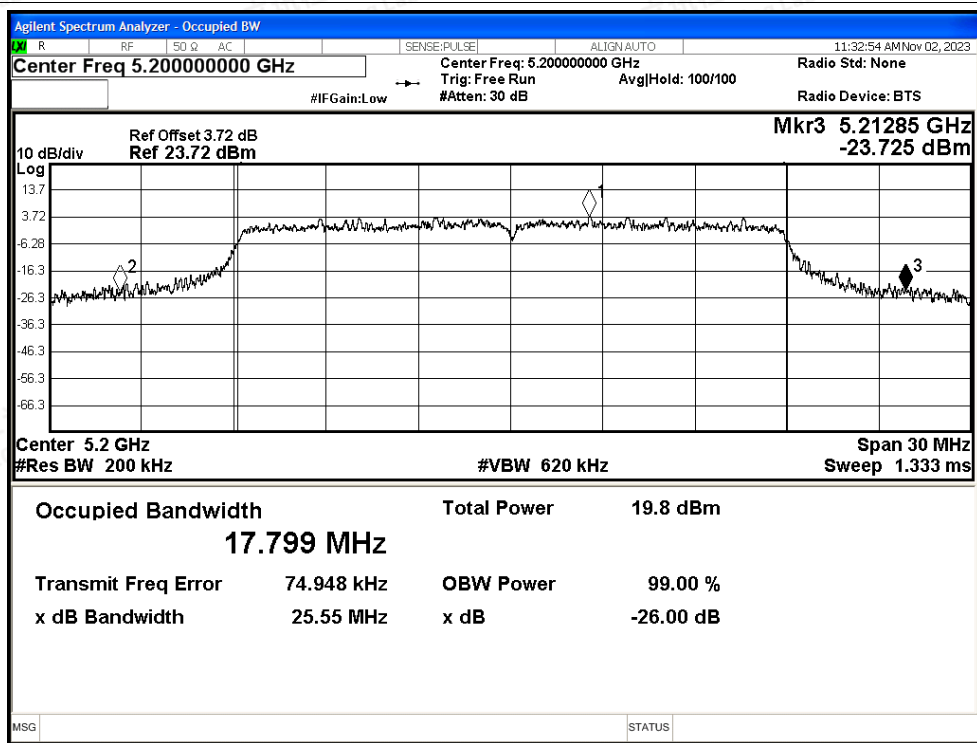


-26dB Bandwidth NVNT n20 5240MHz Ant0

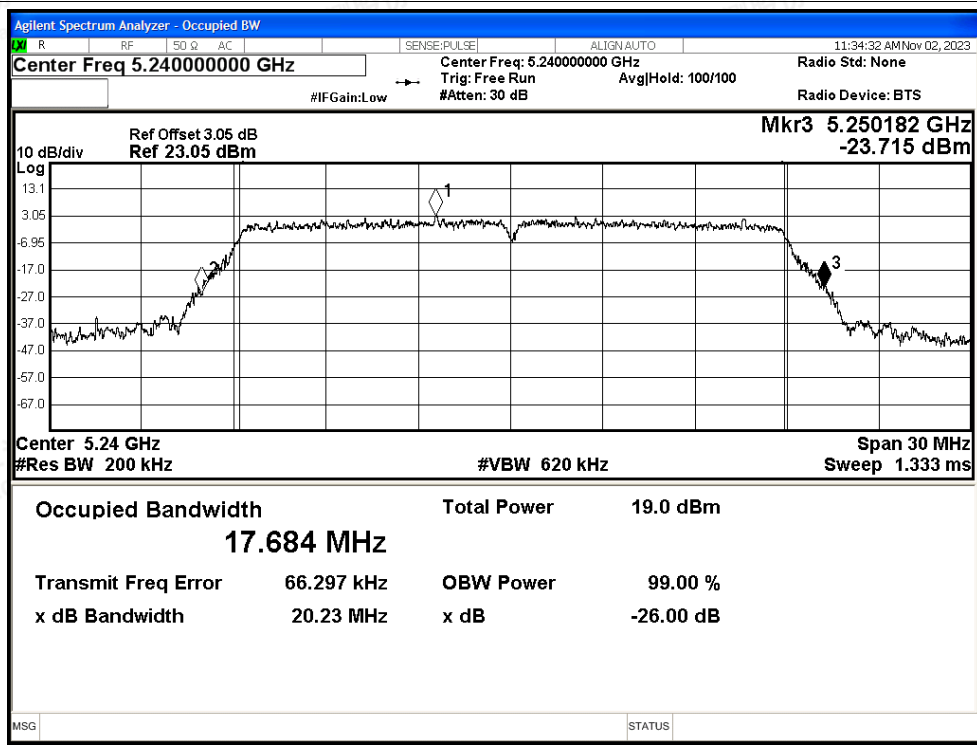




-26dB Bandwidth NVNT n40 5190MHz Ant0

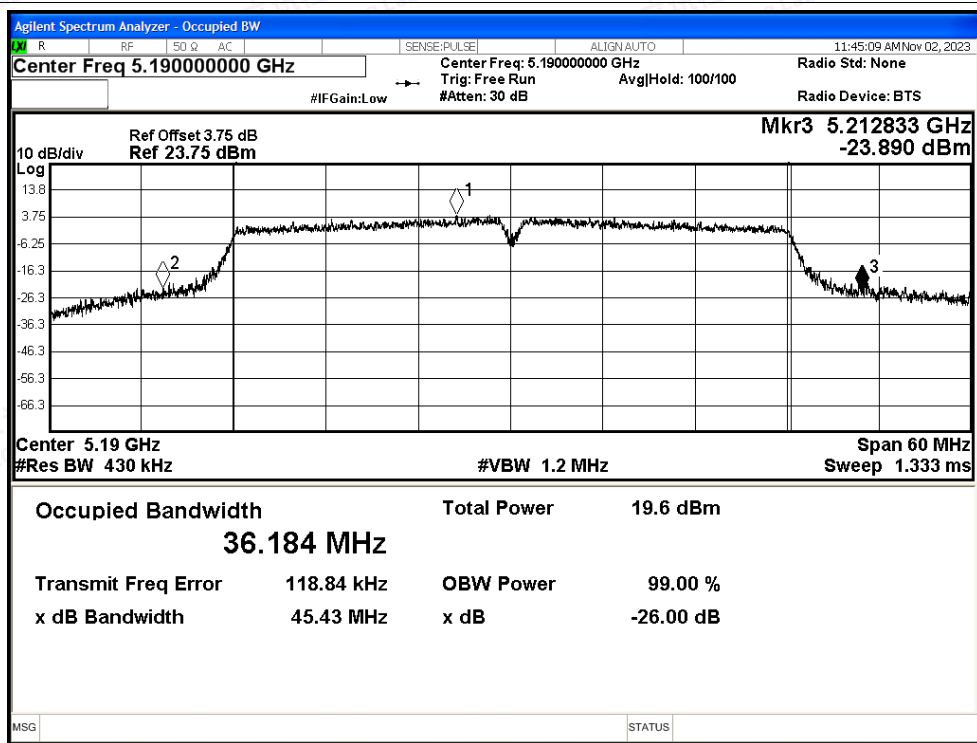


-26dB Bandwidth NVNT n40 5230MHz Ant0

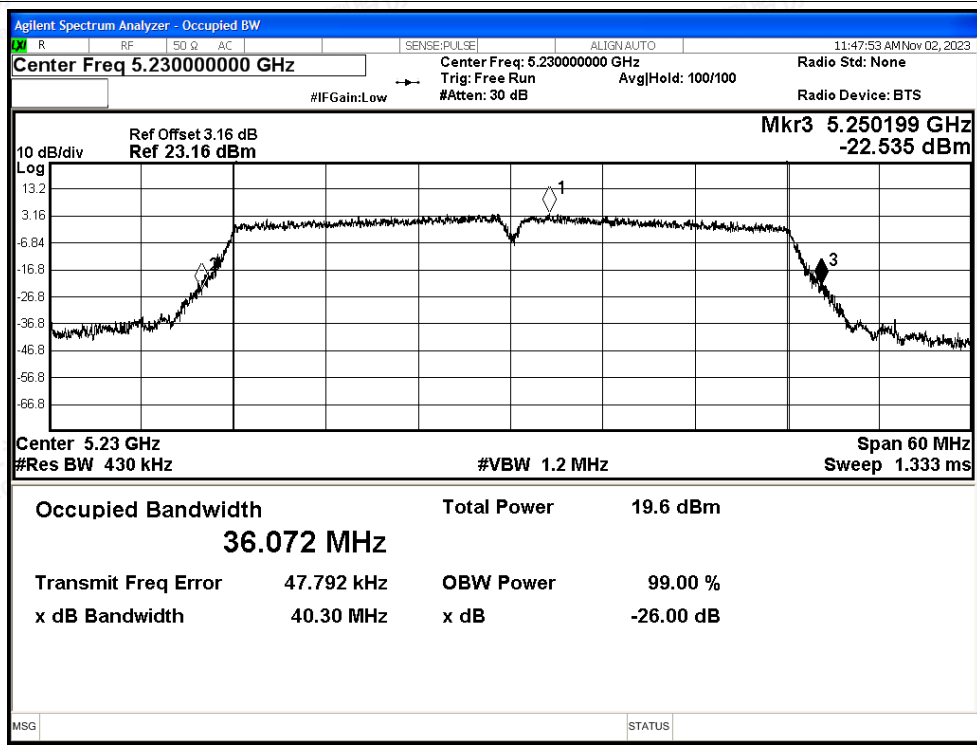




-26dB Bandwidth NVNT ac20 5180MHz Ant0

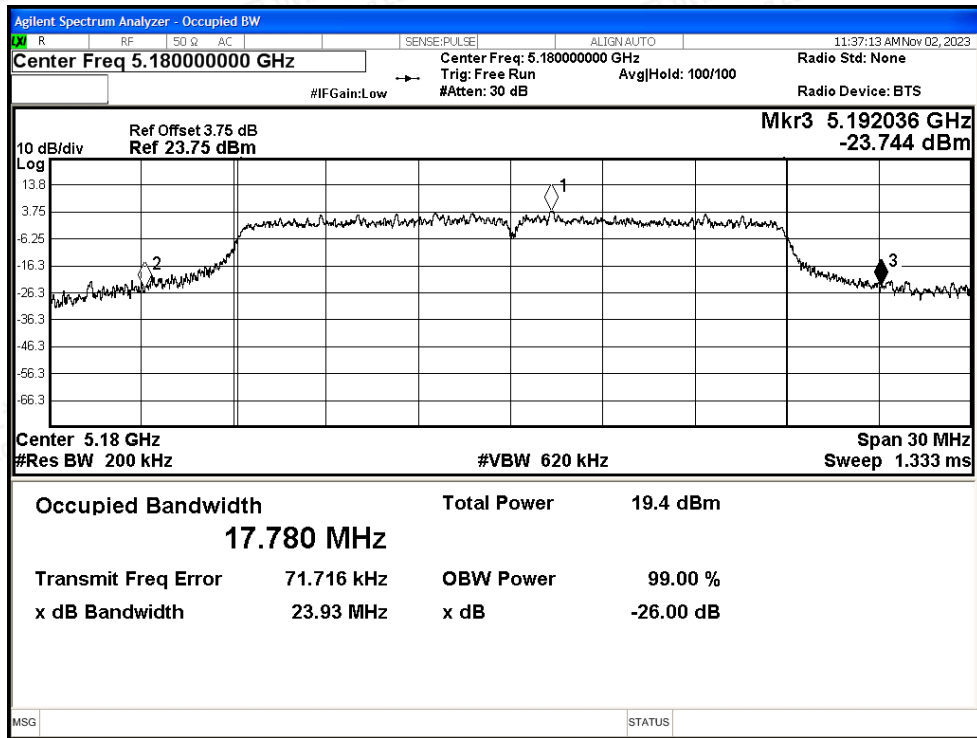


-26dB Bandwidth NVNT ac20 5200MHz Ant0

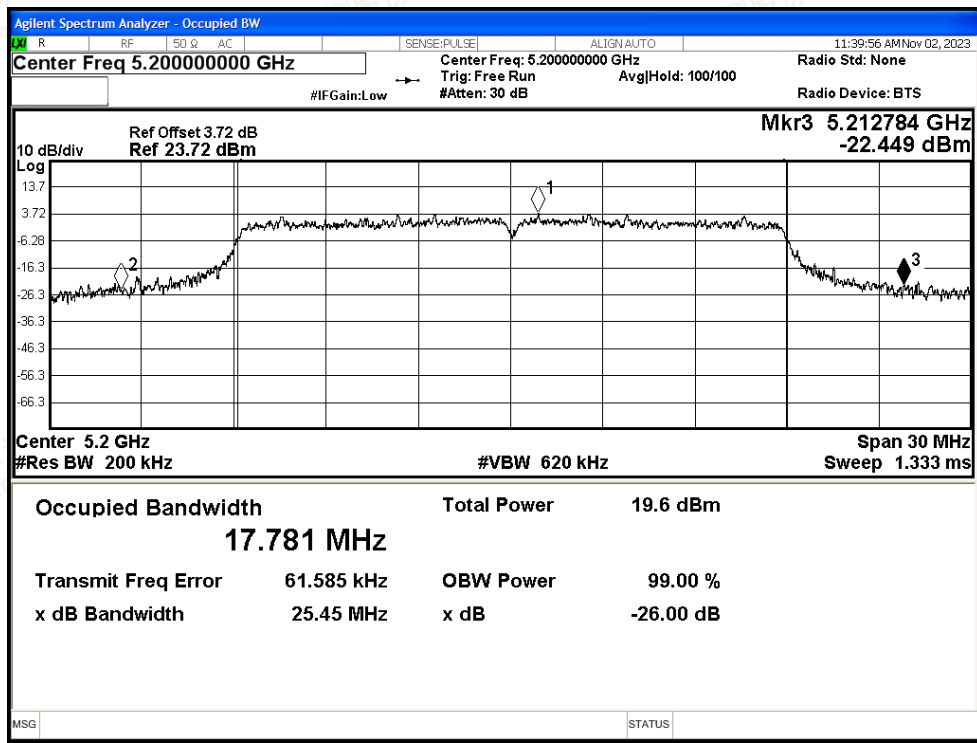




-26dB Bandwidth NVNT ac20 5240MHz Ant0

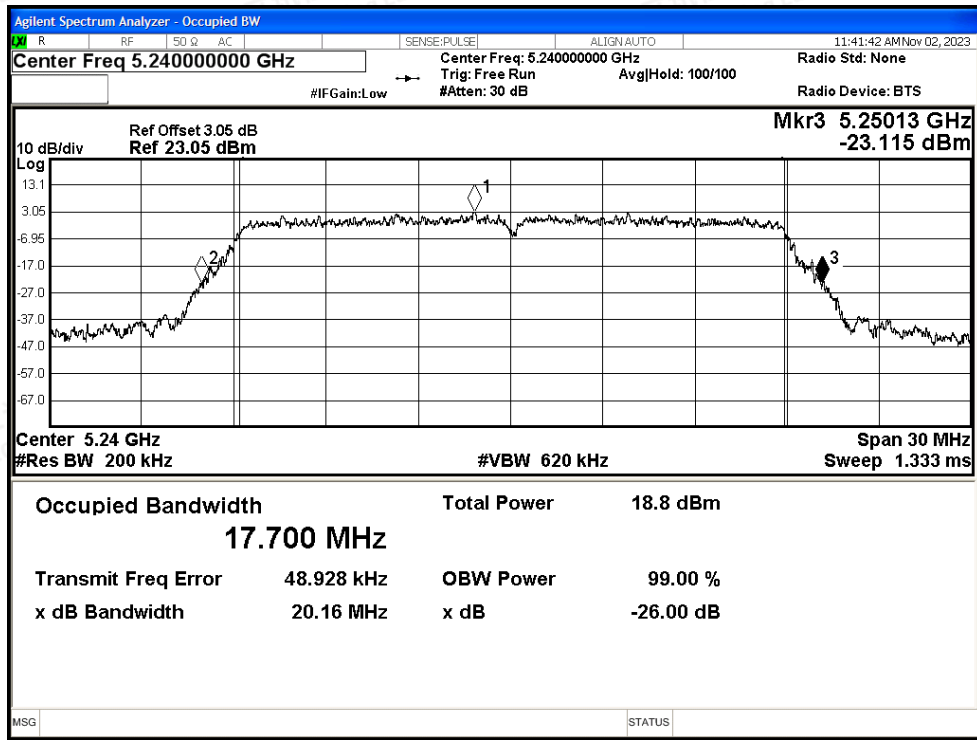


-26dB Bandwidth NVNT ac40 5190MHz Ant0

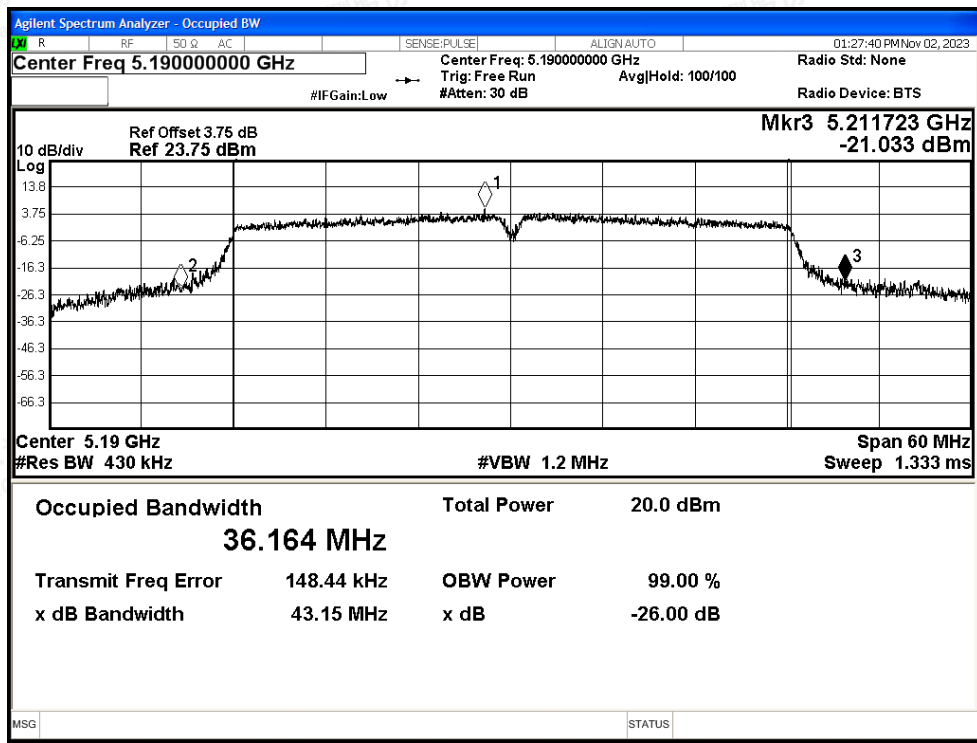




-26dB Bandwidth NVNT ac40 5230MHz Ant0

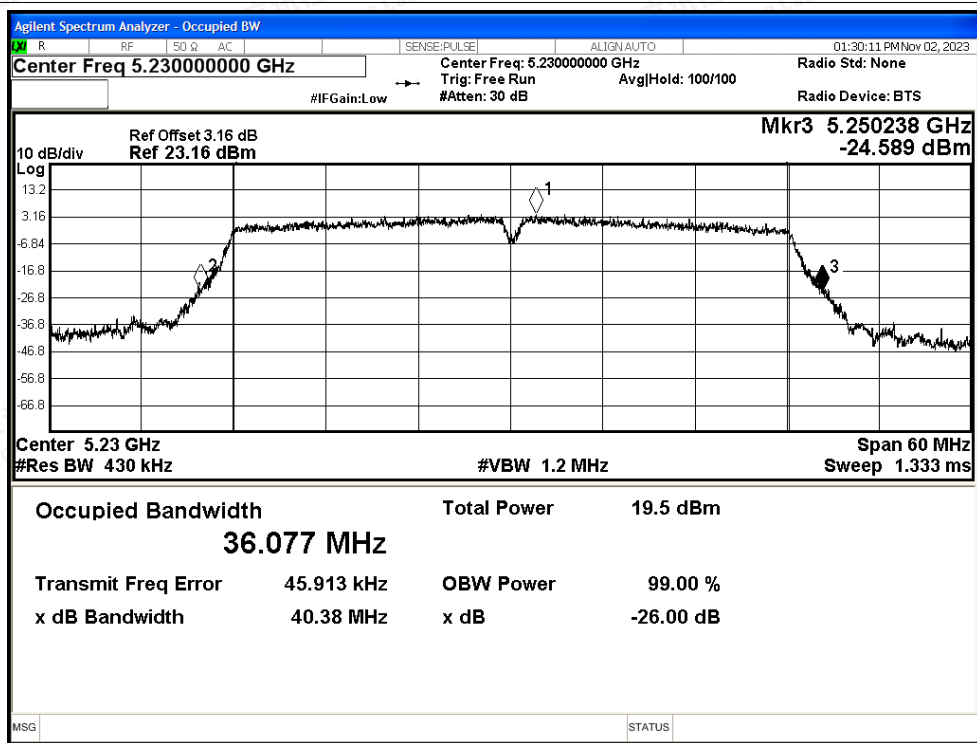


-26dB Bandwidth NVNT ac80 5210MHz Ant0

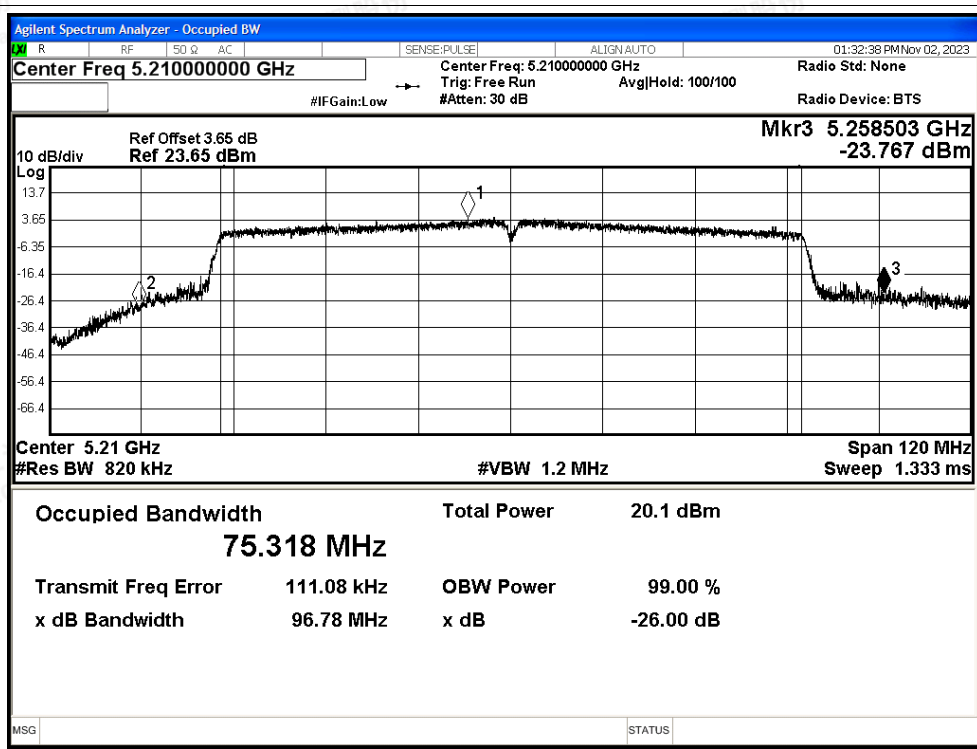




-26dB Bandwidth NVNT ax20 5180MHz Ant0

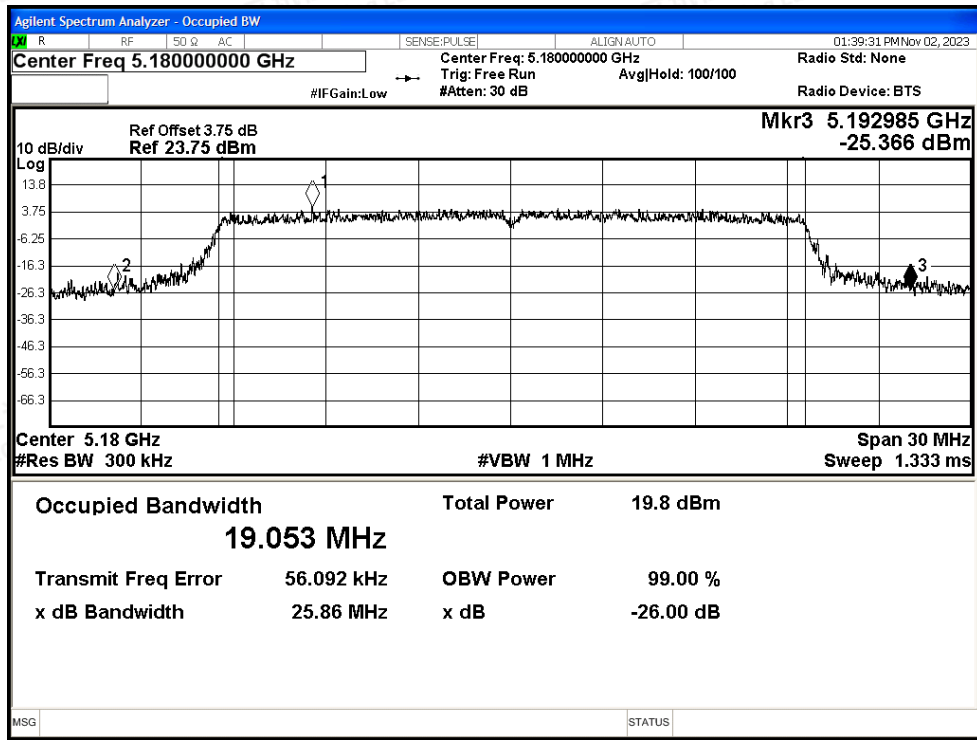


-26dB Bandwidth NVNT ax20 5200MHz Ant0

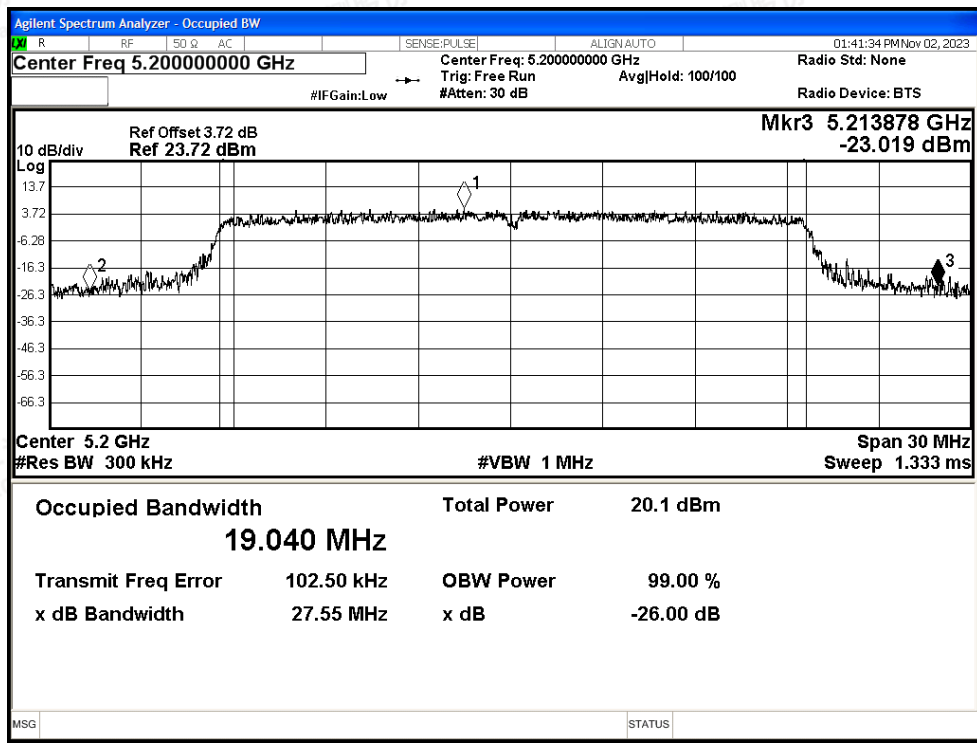




-26dB Bandwidth NVNT ax20 5240MHz Ant0

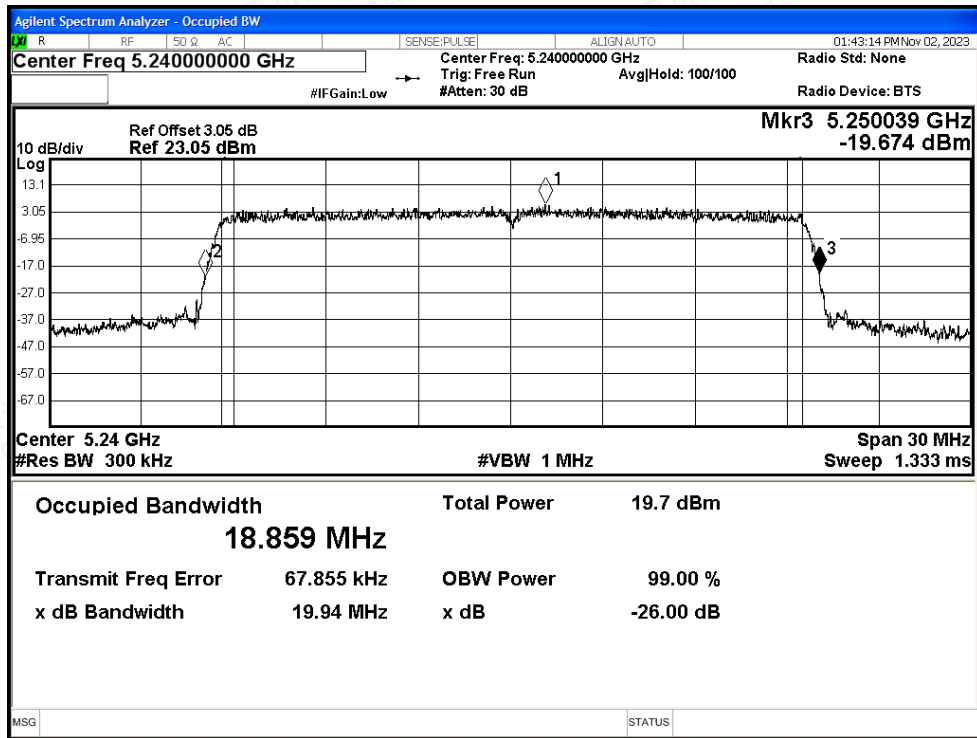


-26dB Bandwidth NVNT ax40 5190MHz Ant0

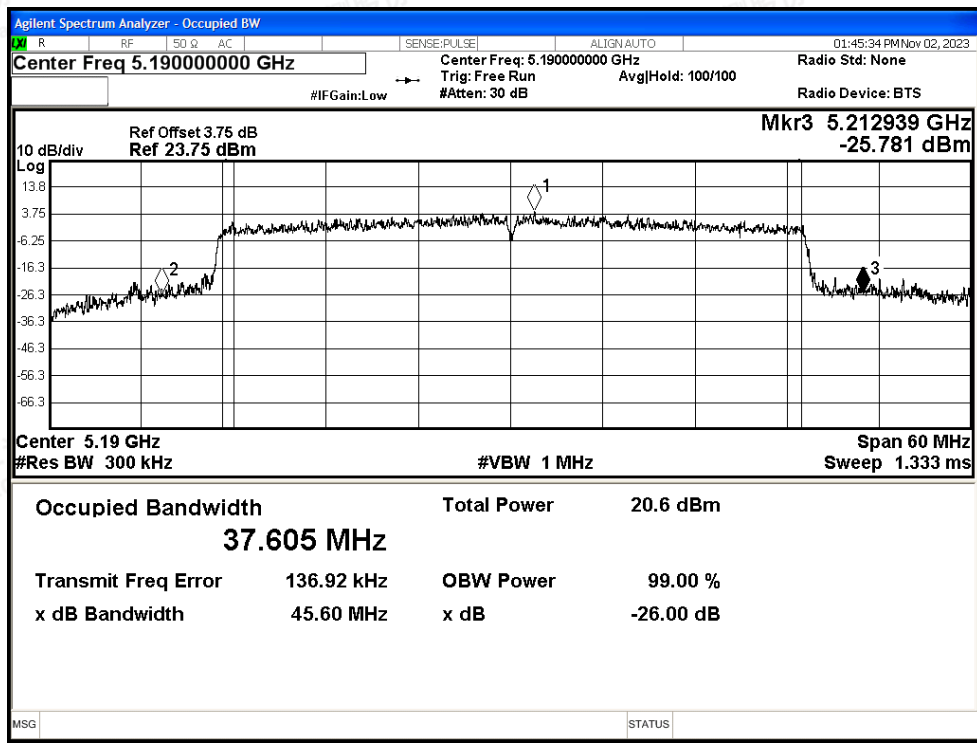




-26dB Bandwidth NVNT ax40 5230MHz Ant0

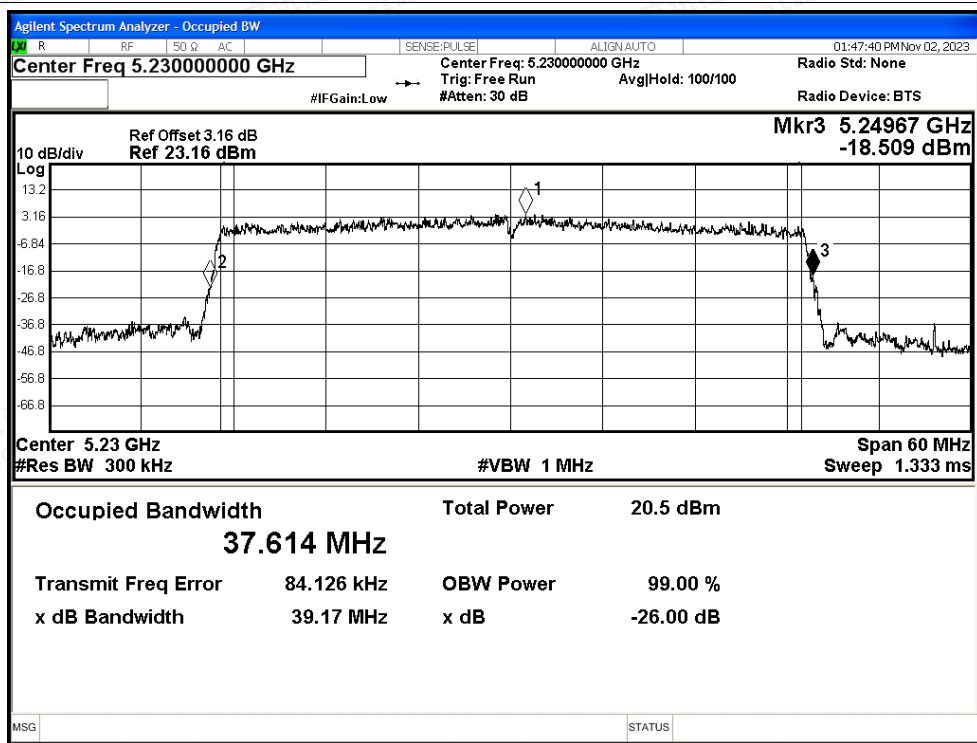

-26dB Bandwidth NVNT ax80 5210MHz Ant0

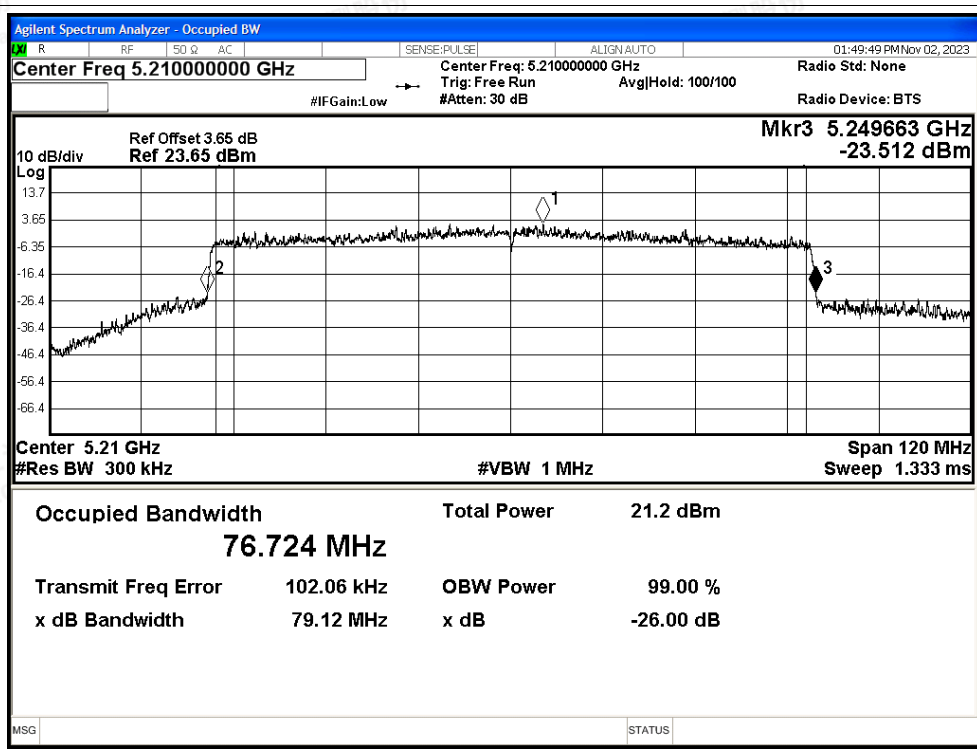



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	26.015	>=0.5	Pass
NVNT	a	5200	Ant1	25.358	>=0.5	Pass
NVNT	a	5240	Ant1	19.757	>=0.5	Pass
NVNT	n20	5180	Ant1	25.796	>=0.5	Pass
NVNT	n20	5200	Ant1	25.788	>=0.5	Pass
NVNT	n20	5240	Ant1	20.173	>=0.5	Pass
NVNT	n40	5190	Ant1	46.176	>=0.5	Pass
NVNT	n40	5230	Ant1	40.364	>=0.5	Pass
NVNT	ac20	5180	Ant1	27.279	>=0.5	Pass
NVNT	ac20	5200	Ant1	25.617	>=0.5	Pass
NVNT	ac20	5240	Ant1	20.484	>=0.5	Pass
NVNT	ac40	5190	Ant1	48.251	>=0.5	Pass
NVNT	ac40	5230	Ant1	40.596	>=0.5	Pass
NVNT	ac80	5210	Ant1	93.472	>=0.5	Pass
NVNT	ax20	5180	Ant1	28.109	>=0.5	Pass
NVNT	ax20	5200	Ant1	27.284	>=0.5	Pass
NVNT	ax20	5240	Ant1	20.042	>=0.5	Pass
NVNT	ax40	5190	Ant1	41.466	>=0.5	Pass
NVNT	ax40	5230	Ant1	39.39	>=0.5	Pass
NVNT	ax80	5210	Ant1	80.875	>=0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

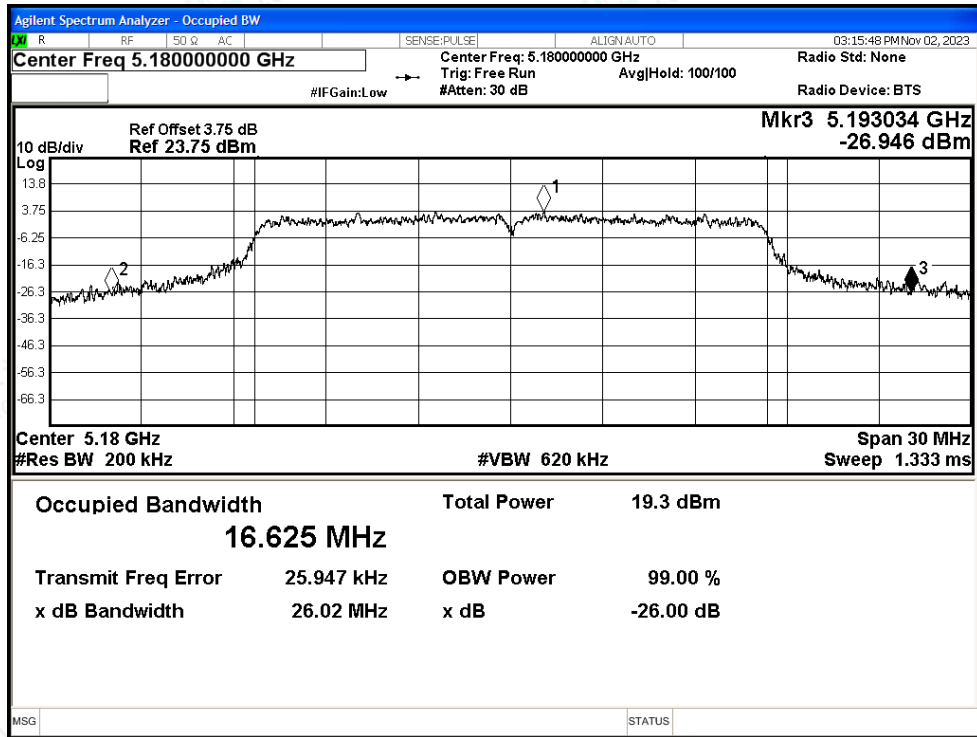


-26dB Bandwidth NVNT a 5200MHz Ant1

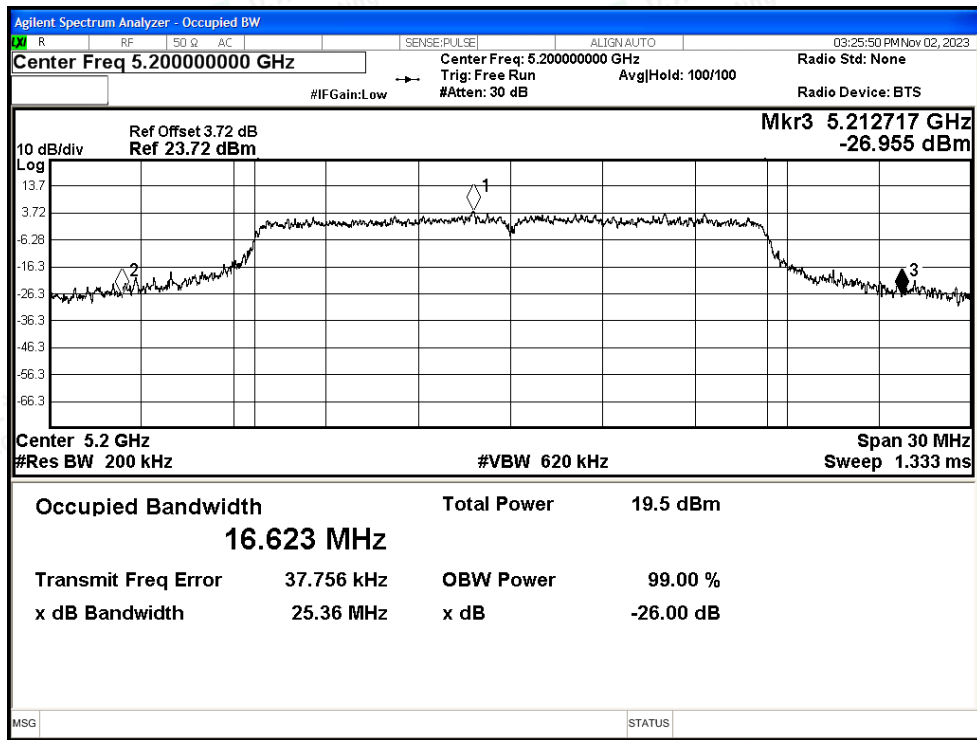




-26dB Bandwidth NVNT a 5240MHz Ant1

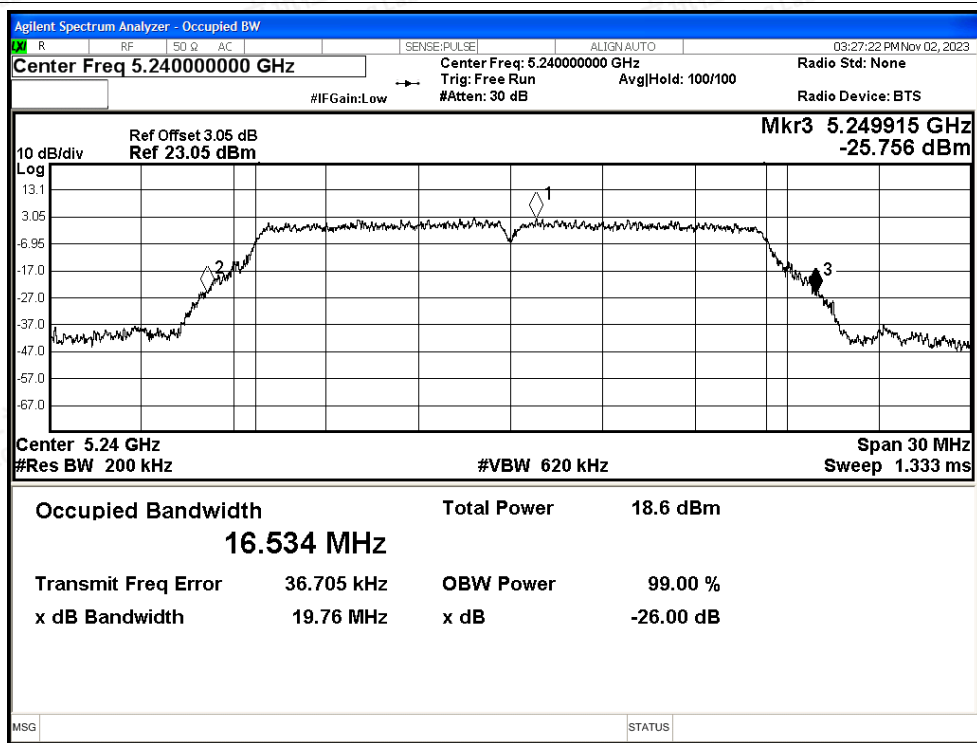


-26dB Bandwidth NVNT n20 5180MHz Ant1

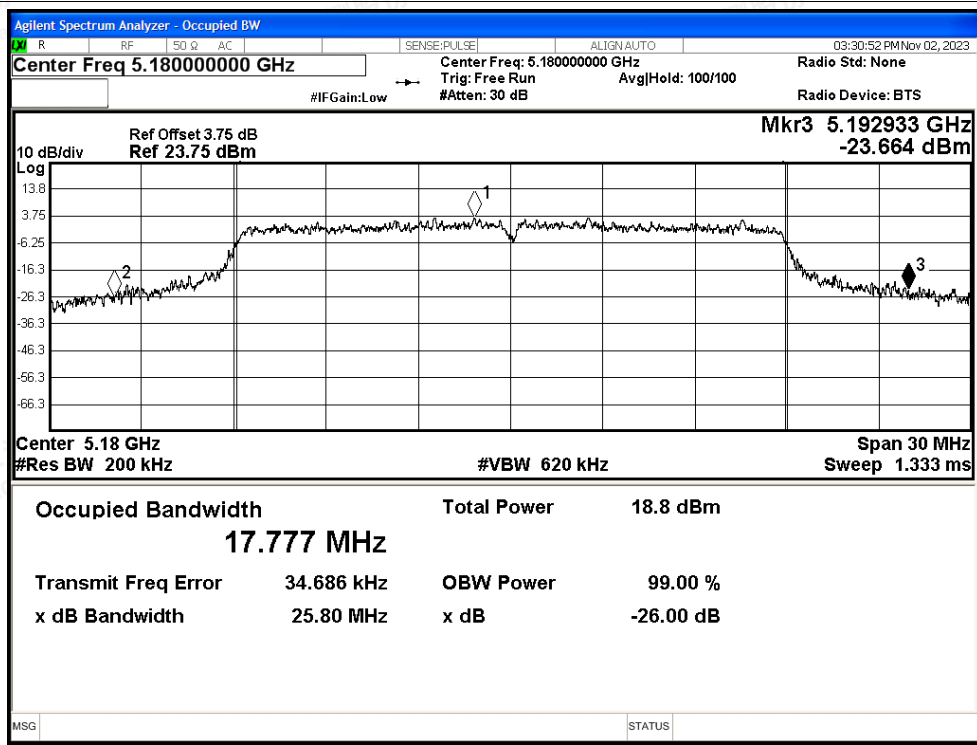




-26dB Bandwidth NVNT n20 5200MHz Ant1

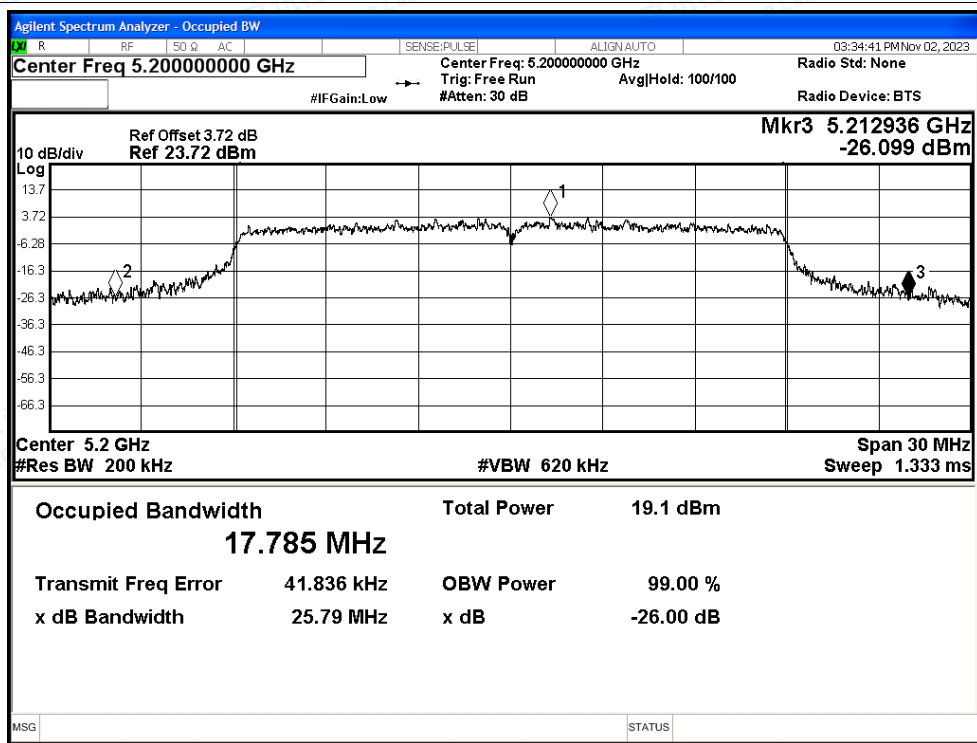


-26dB Bandwidth NVNT n20 5240MHz Ant1

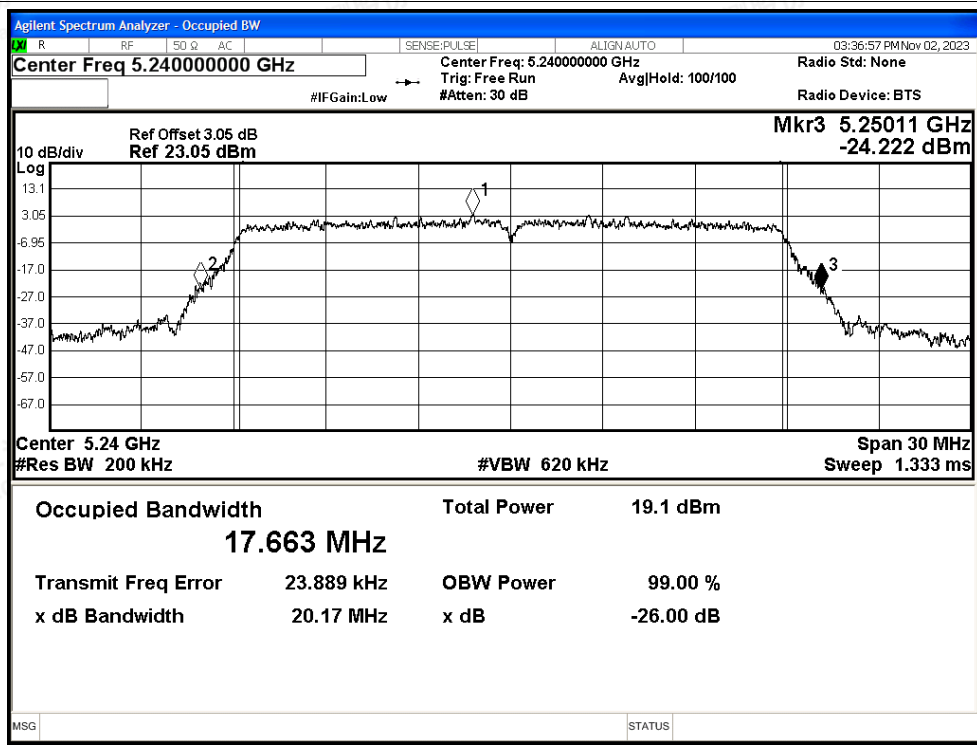




-26dB Bandwidth NVNT n40 5190MHz Ant1

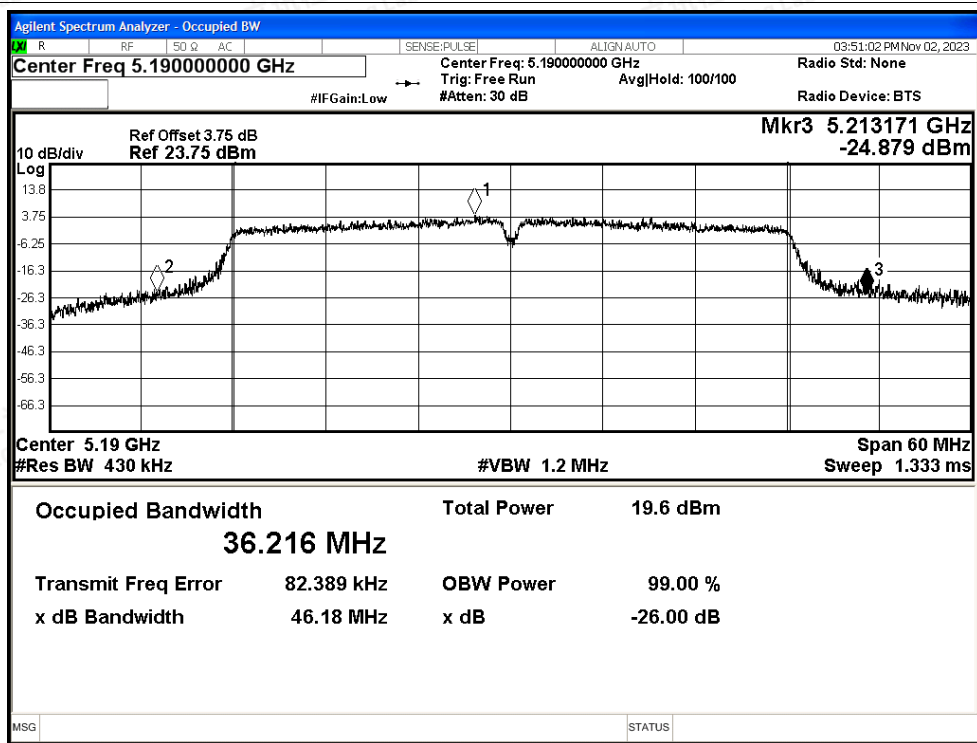


-26dB Bandwidth NVNT n40 5230MHz Ant1

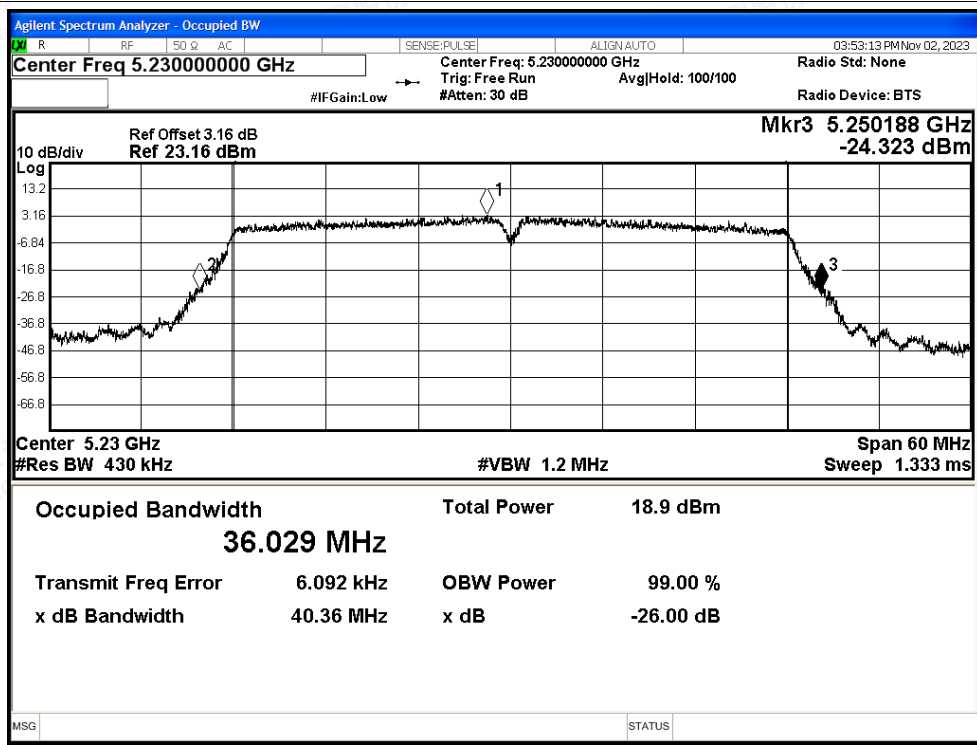




-26dB Bandwidth NVNT ac20 5180MHz Ant1

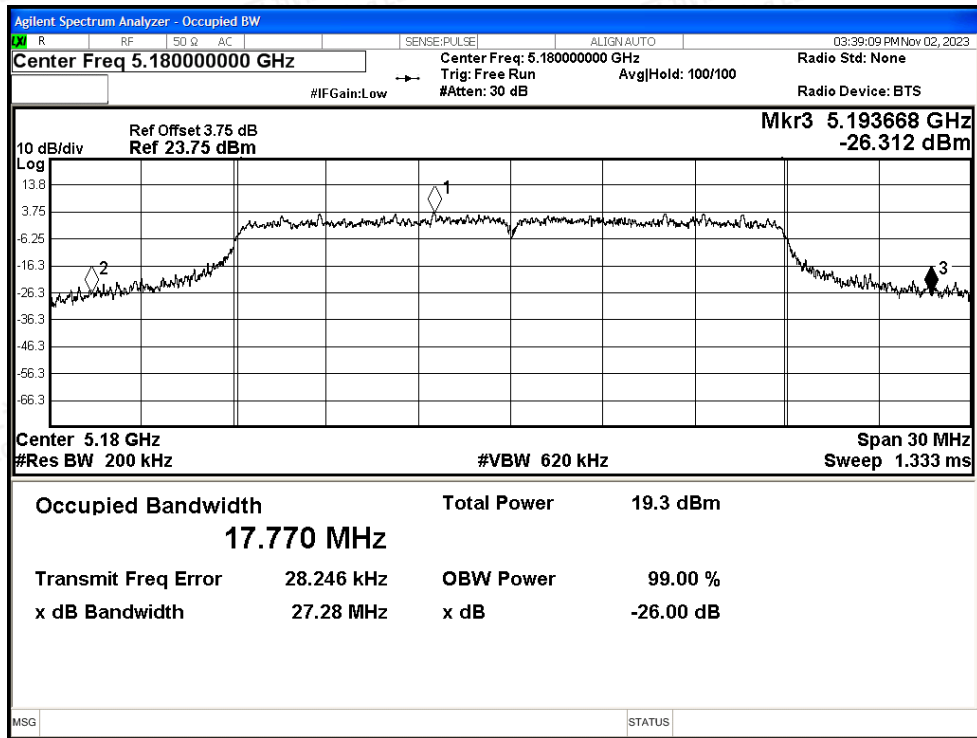

-26dB Bandwidth NVNT ac20 5200MHz Ant1

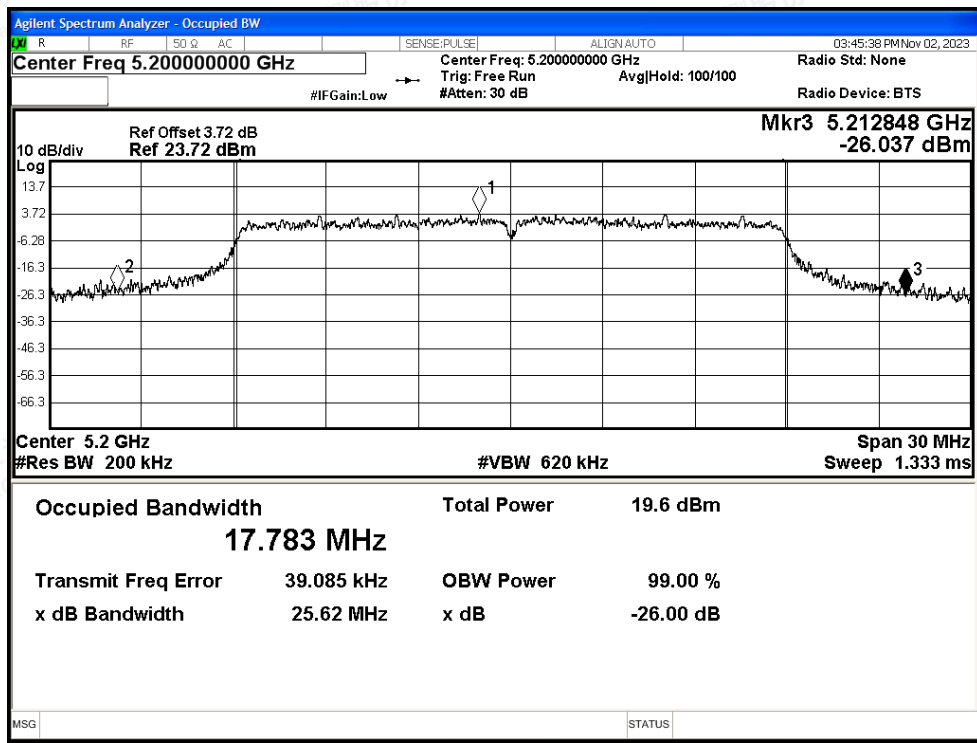






-26dB Bandwidth NVNT ac20 5240MHz Ant1




-26dB Bandwidth NVNT ac40 5190MHz Ant1

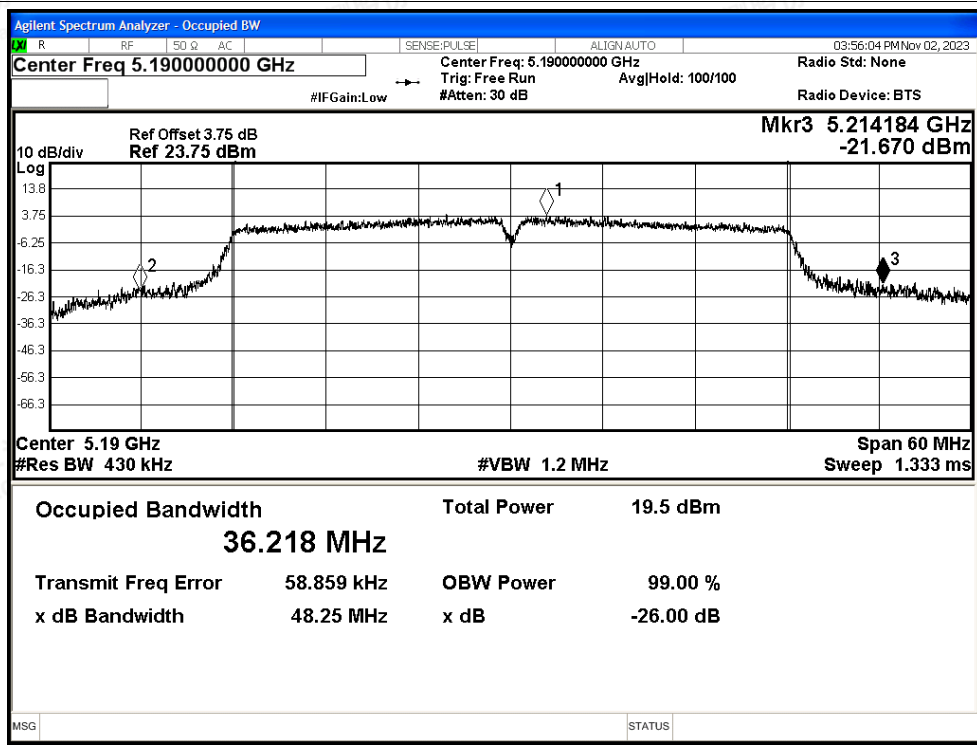

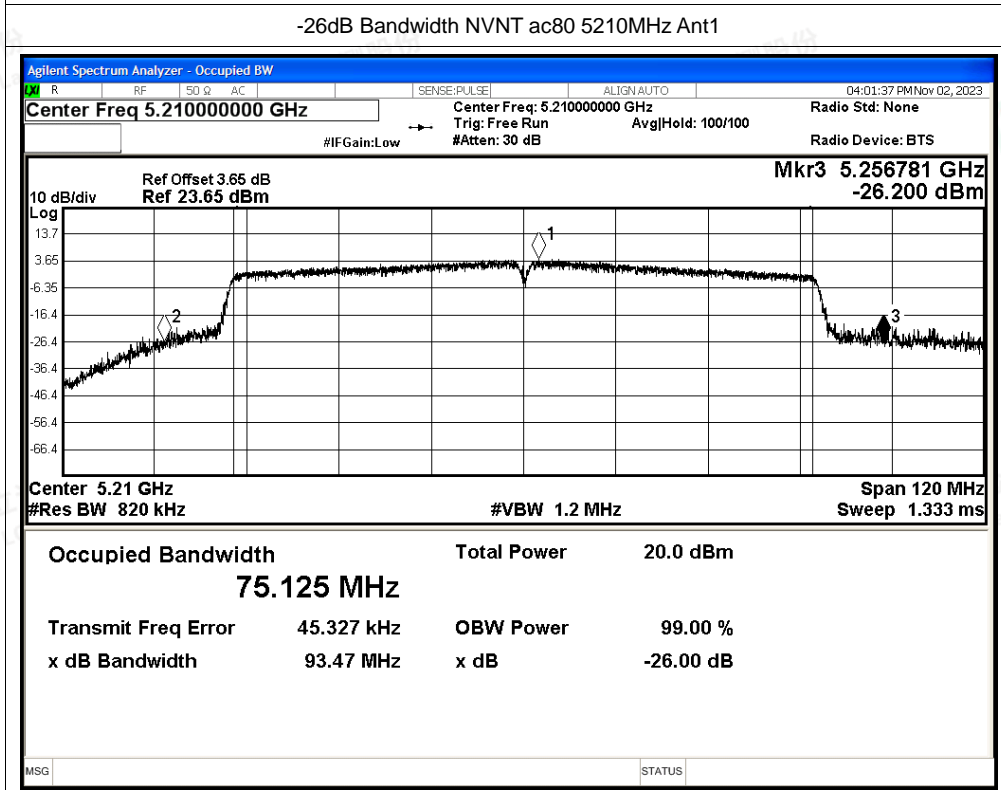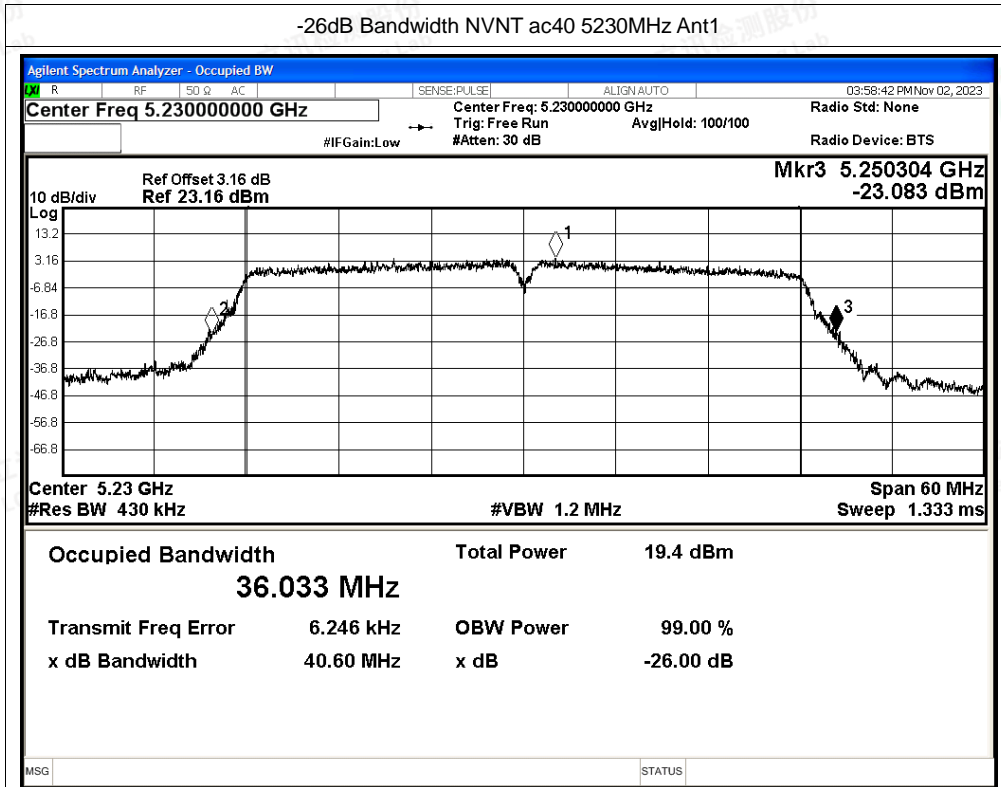




-26dB Bandwidth NVNT ax20 5180MHz Ant1

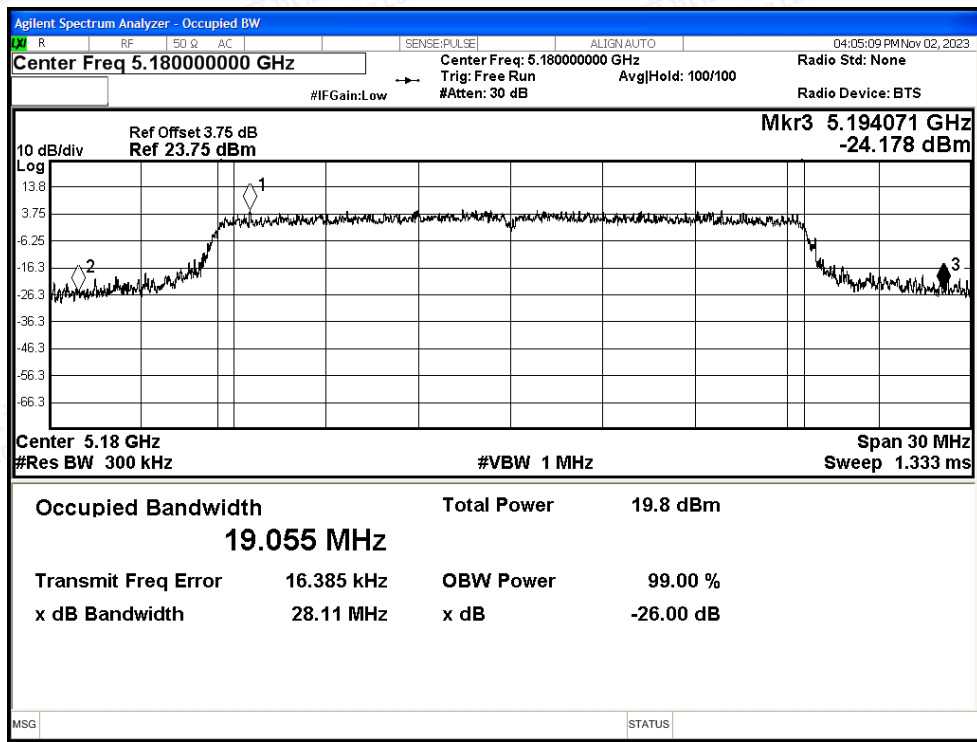


-26dB Bandwidth NVNT ax20 5200MHz Ant1

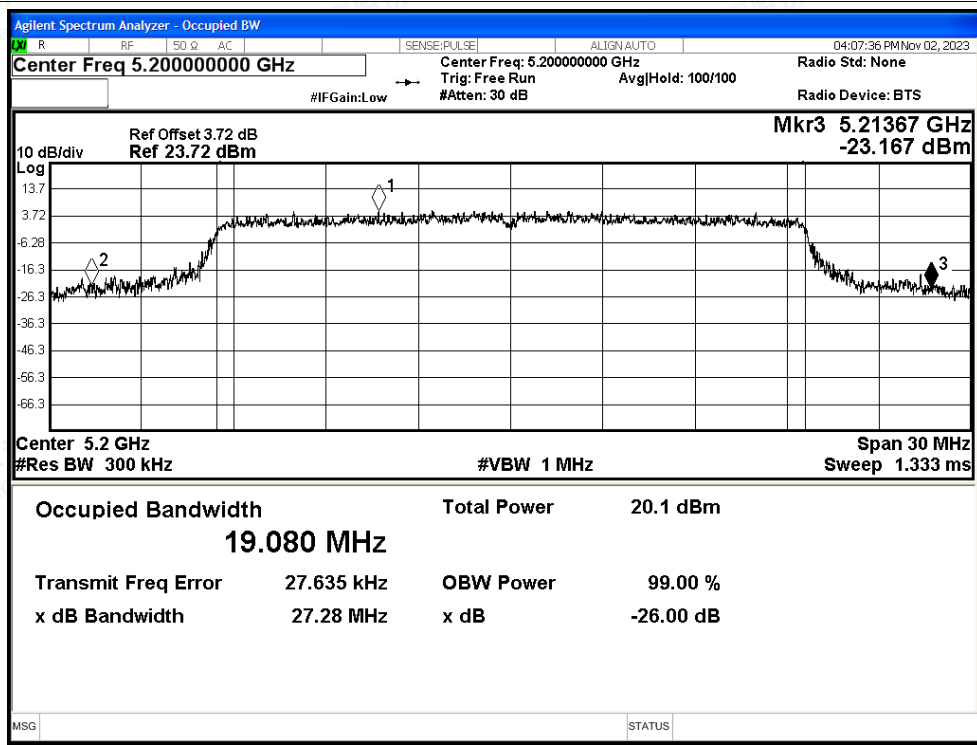




-26dB Bandwidth NVNT ax20 5240MHz Ant1

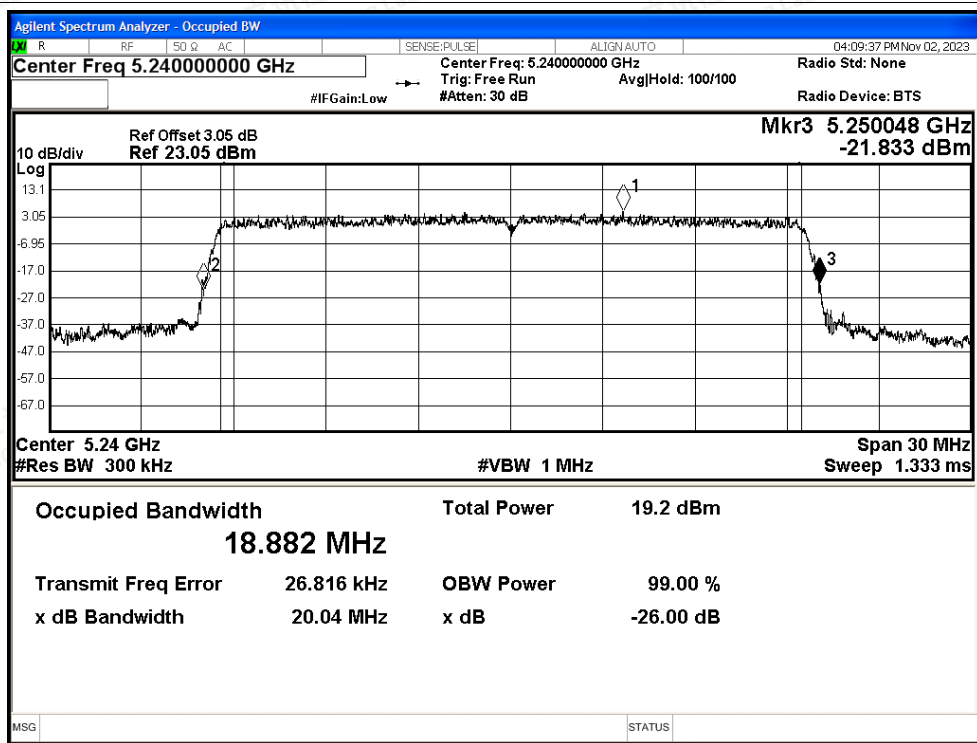


-26dB Bandwidth NVNT ax40 5190MHz Ant1

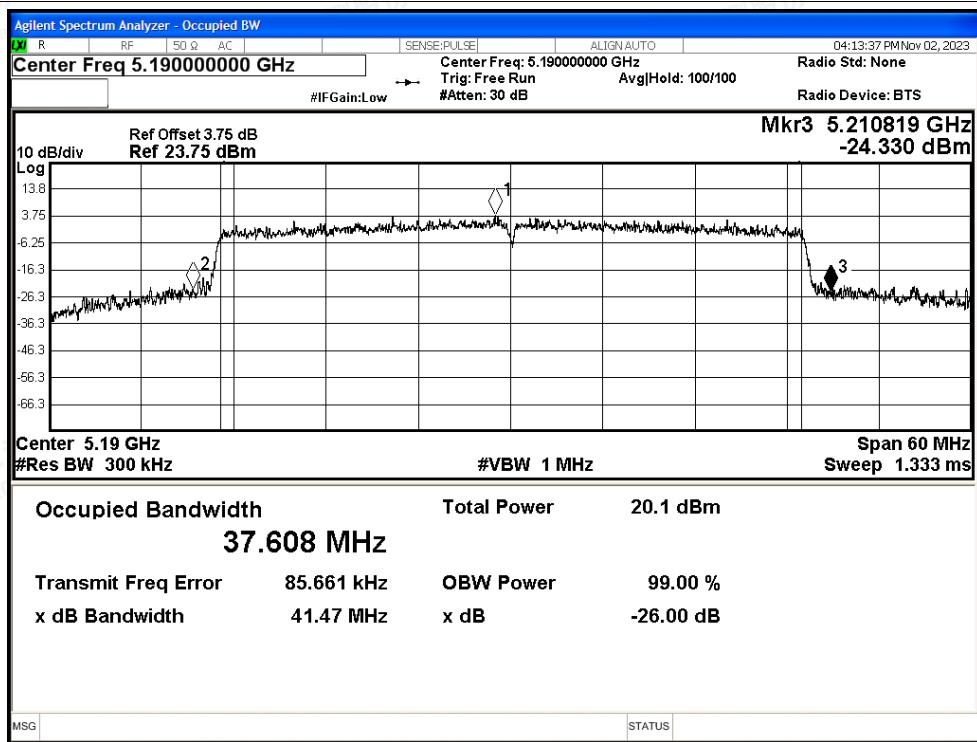




-26dB Bandwidth NVNT ax40 5230MHz Ant1

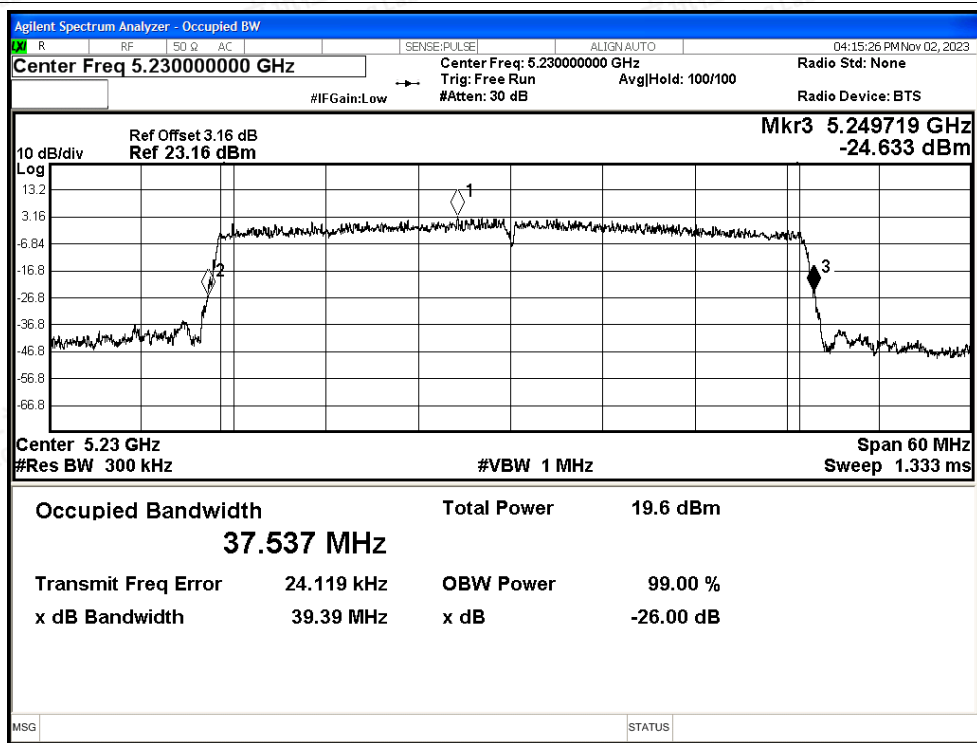

-26dB Bandwidth NVNT ax80 5210MHz Ant1

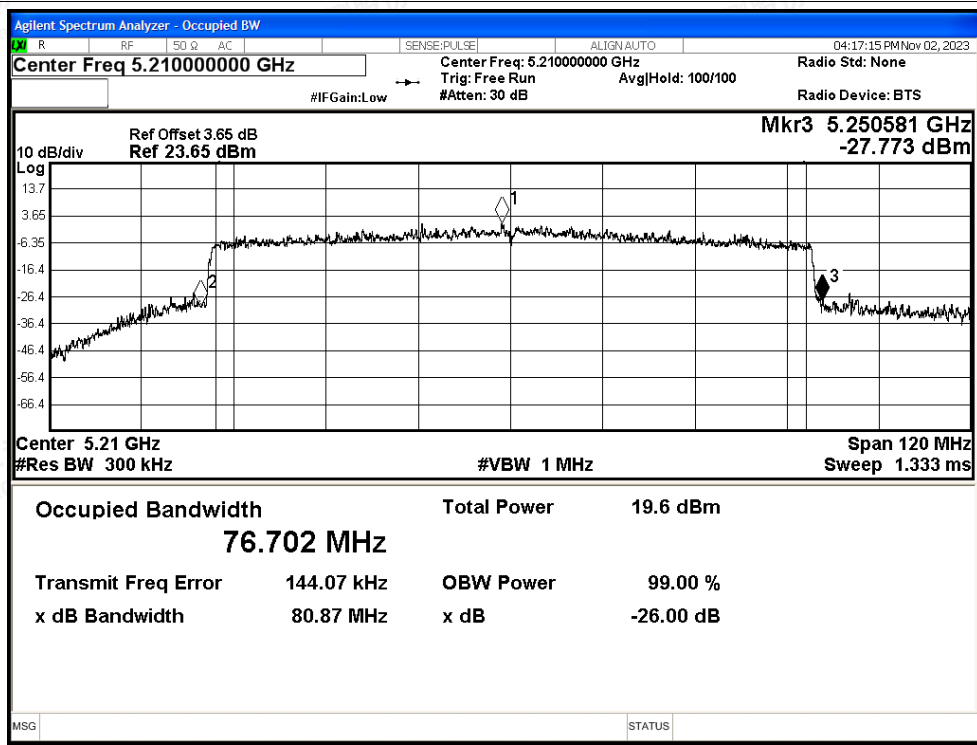



B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	13.5	0.17	13.67	30	Pass
NVNT	a	5200	Ant0	13.88	0.17	14.05	30	Pass
NVNT	a	5240	Ant0	12.97	0.17	13.14	30	Pass
NVNT	n20	5180	Ant0	13.56	0.18	13.74	30	Pass
NVNT	n20	5200	Ant0	13.86	0.18	14.04	30	Pass
NVNT	n20	5240	Ant0	13.44	0.19	13.63	30	Pass
NVNT	n40	5190	Ant0	13.69	0.37	14.06	30	Pass
NVNT	n40	5230	Ant0	13.51	0.37	13.88	30	Pass
NVNT	ac20	5180	Ant0	13.56	0.18	13.74	30	Pass
NVNT	ac20	5200	Ant0	13.83	0.18	14.01	30	Pass
NVNT	ac20	5240	Ant0	13.03	0.18	13.21	30	Pass
NVNT	ac40	5190	Ant0	14.12	0.36	14.48	30	Pass
NVNT	ac40	5230	Ant0	13.37	0.36	13.73	30	Pass
NVNT	ac80	5210	Ant0	13.32	0.7	14.02	30	Pass
NVNT	ax20	5180	Ant0	13.12	0.23	13.35	30	Pass
NVNT	ax20	5200	Ant0	13.39	0.23	13.62	30	Pass
NVNT	ax20	5240	Ant0	13.09	0.23	13.32	30	Pass
NVNT	ax40	5190	Ant0	13.42	0.73	14.15	30	Pass
NVNT	ax40	5230	Ant0	13.24	0.72	13.96	30	Pass
NVNT	ax80	5210	Ant0	13.52	0.76	14.28	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	13.62	0.17	13.79	30	Pass
NVNT	a	5200	Ant1	13.8	0.17	13.97	30	Pass
NVNT	a	5240	Ant1	12.92	0.17	13.09	30	Pass
NVNT	n20	5180	Ant1	13.07	0.18	13.25	30	Pass
NVNT	n20	5200	Ant1	13.29	0.18	13.47	30	Pass
NVNT	n20	5240	Ant1	13.33	0.19	13.52	30	Pass
NVNT	n40	5190	Ant1	13.55	0.37	13.92	30	Pass
NVNT	n40	5230	Ant1	12.84	0.37	13.21	30	Pass
NVNT	ac20	5180	Ant1	13.57	0.18	13.75	30	Pass
NVNT	ac20	5200	Ant1	13.81	0.18	13.99	30	Pass
NVNT	ac20	5240	Ant1	13.45	0.18	13.63	30	Pass
NVNT	ac40	5190	Ant1	13.61	0.36	13.97	30	Pass
NVNT	ac40	5230	Ant1	13.24	0.36	13.60	30	Pass
NVNT	ac80	5210	Ant1	13.27	0.69	13.96	30	Pass





NVNT	ax20	5180	Ant1	13.13	0.23	13.36	30	Pass
NVNT	ax20	5200	Ant1	13.45	0.23	13.68	30	Pass
NVNT	ax20	5240	Ant1	12.59	0.23	12.82	30	Pass
NVNT	ax40	5190	Ant1	13.01	0.72	13.73	30	Pass
NVNT	ax40	5230	Ant1	12.23	0.73	12.96	30	Pass
NVNT	ax80	5210	Ant1	11.9	0.76	12.66	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Antenna		Total Power (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	13.74	13.25	16.51	30	Pass
NVNT	n20	5200	14.04	13.47	16.77	30	Pass
NVNT	n20	5240	13.63	13.52	16.59	30	Pass
NVNT	n40	5190	14.06	13.92	17.00	30	Pass
NVNT	n40	5230	13.88	13.21	16.57	30	Pass
NVNT	ac20	5180	13.74	13.75	16.76	30	Pass
NVNT	ac20	5200	14.01	13.99	17.01	30	Pass
NVNT	ac20	5240	13.21	13.63	16.44	30	Pass
NVNT	ac40	5190	14.48	13.97	17.24	30	Pass
NVNT	ac40	5230	13.73	13.60	16.68	30	Pass
NVNT	ac80	5210	14.02	13.96	17.00	30	Pass
NVNT	ax20	5180	13.35	13.36	16.37	30	Pass
NVNT	ax20	5200	13.62	13.68	16.66	30	Pass
NVNT	ax20	5240	13.32	12.82	16.09	30	Pass
NVNT	ax40	5190	14.15	13.73	16.96	30	Pass
NVNT	ax40	5230	13.96	12.96	16.50	30	Pass
NVNT	ax80	5210	14.28	12.66	16.56	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	3.59	0.17	3.76	17	Pass
NVNT	a	5200	Ant0	3.86	0.17	4.03	17	Pass
NVNT	a	5240	Ant0	2.94	0.17	3.11	17	Pass
NVNT	n20	5180	Ant0	3.42	0.18	3.60	17	Pass
NVNT	n20	5200	Ant0	3.37	0.18	3.55	17	Pass
NVNT	n20	5240	Ant0	3	0.19	3.19	17	Pass
NVNT	n40	5190	Ant0	1.09	0.37	1.46	17	Pass
NVNT	n40	5230	Ant0	1.08	0.37	1.45	17	Pass
NVNT	ac20	5180	Ant0	3.31	0.18	3.49	17	Pass
NVNT	ac20	5200	Ant0	3.64	0.18	3.82	17	Pass
NVNT	ac20	5240	Ant0	2.38	0.18	2.56	17	Pass
NVNT	ac40	5190	Ant0	1.54	0.36	1.90	17	Pass
NVNT	ac40	5230	Ant0	0.68	0.36	1.04	17	Pass
NVNT	ac80	5210	Ant0	-2.08	0.7	-1.38	17	Pass
NVNT	ax20	5180	Ant0	2.63	0.23	2.86	17	Pass
NVNT	ax20	5200	Ant0	2.94	0.23	3.17	17	Pass
NVNT	ax20	5240	Ant0	2.31	0.23	2.54	17	Pass
NVNT	ax40	5190	Ant0	0.59	0.73	1.32	17	Pass
NVNT	ax40	5230	Ant0	0.35	0.72	1.07	17	Pass
NVNT	ax80	5210	Ant0	-1.69	0.76	-0.93	17	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	3.8	0.17	3.97	17	Pass
NVNT	a	5200	Ant1	3.71	0.17	3.88	17	Pass
NVNT	a	5240	Ant1	3.01	0.17	3.18	17	Pass
NVNT	n20	5180	Ant1	2.8	0.18	2.98	17	Pass
NVNT	n20	5200	Ant1	3.1	0.18	3.28	17	Pass
NVNT	n20	5240	Ant1	3.13	0.19	3.32	17	Pass
NVNT	n40	5190	Ant1	0.64	0.37	1.01	17	Pass
NVNT	n40	5230	Ant1	0	0.37	0.37	17	Pass
NVNT	ac20	5180	Ant1	3.3	0.18	3.48	17	Pass
NVNT	ac20	5200	Ant1	3.48	0.18	3.66	17	Pass
NVNT	ac20	5240	Ant1	2.86	0.18	3.04	17	Pass
NVNT	ac40	5190	Ant1	0.83	0.36	1.19	17	Pass
NVNT	ac40	5230	Ant1	1.08	0.36	1.44	17	Pass
NVNT	ac80	5210	Ant1	-1.94	0.69	-1.25	17	Pass
NVNT	ax20	5180	Ant1	2.52	0.23	2.75	17	Pass
NVNT	ax20	5200	Ant1	2.95	0.23	3.18	17	Pass





NVNT	ax20	5240	Ant1	1.9	0.23	2.13	17	Pass
NVNT	ax40	5190	Ant1	0.66	0.72	1.38	17	Pass
NVNT	ax40	5230	Ant1	-0.4	0.73	0.33	17	Pass
NVNT	ax80	5210	Ant1	-3.19	0.76	-2.43	17	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)		Total PSD (dBm)	Limit (dBm)	Verdict
			Duty Factor (dB)				
			Ant0	Ant1			
NVNT	n20	5180	3.60	2.98	6.31	16.99	Pass
NVNT	n20	5200	3.55	3.28	6.43	16.99	Pass
NVNT	n20	5240	3.19	3.32	6.27	16.99	Pass
NVNT	n40	5190	1.46	1.01	4.25	16.99	Pass
NVNT	n40	5230	1.45	0.37	3.95	16.99	Pass
NVNT	ac20	5180	3.49	3.48	6.50	16.99	Pass
NVNT	ac20	5200	3.82	3.66	6.75	16.99	Pass
NVNT	ac20	5240	2.56	3.04	5.82	16.99	Pass
NVNT	ac40	5190	1.90	1.19	4.57	16.99	Pass
NVNT	ac40	5230	1.04	1.44	4.25	16.99	Pass
NVNT	ac80	5210	-1.38	-1.25	1.70	16.99	Pass
NVNT	ax20	5180	2.86	2.75	5.82	16.99	Pass
NVNT	ax20	5200	3.17	3.18	6.19	16.99	Pass
NVNT	ax20	5240	2.54	2.13	5.35	16.99	Pass
NVNT	ax40	5190	1.32	1.38	4.36	16.99	Pass
NVNT	ax40	5230	1.07	0.33	3.73	16.99	Pass
NVNT	ax80	5210	-0.93	-2.43	1.39	16.99	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant0

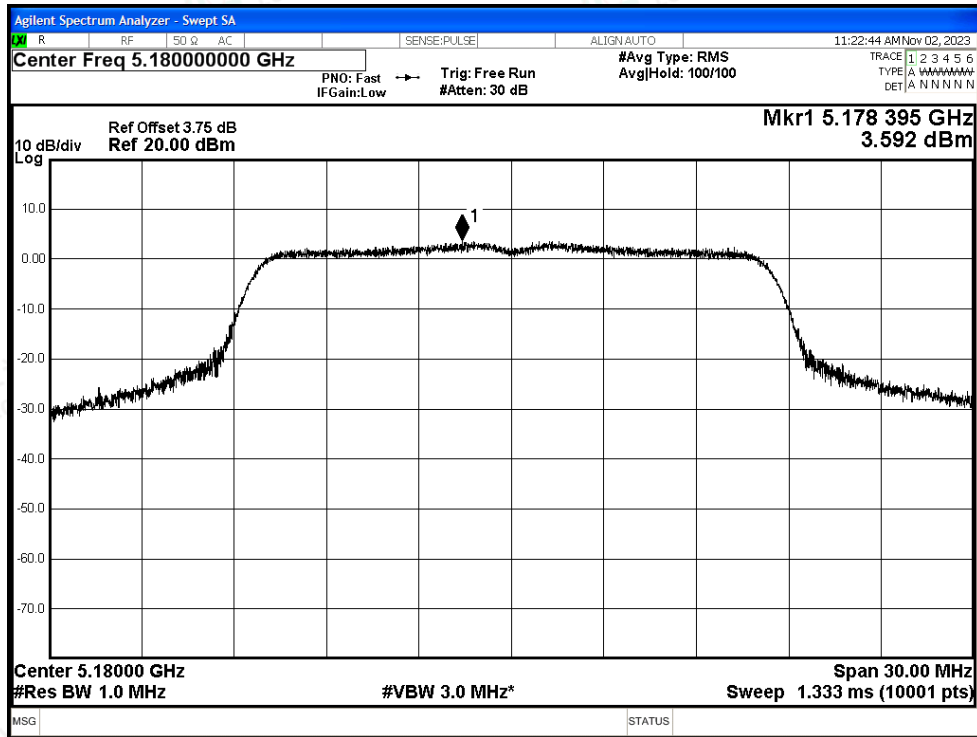


PSD NVNT a 5200MHz Ant0

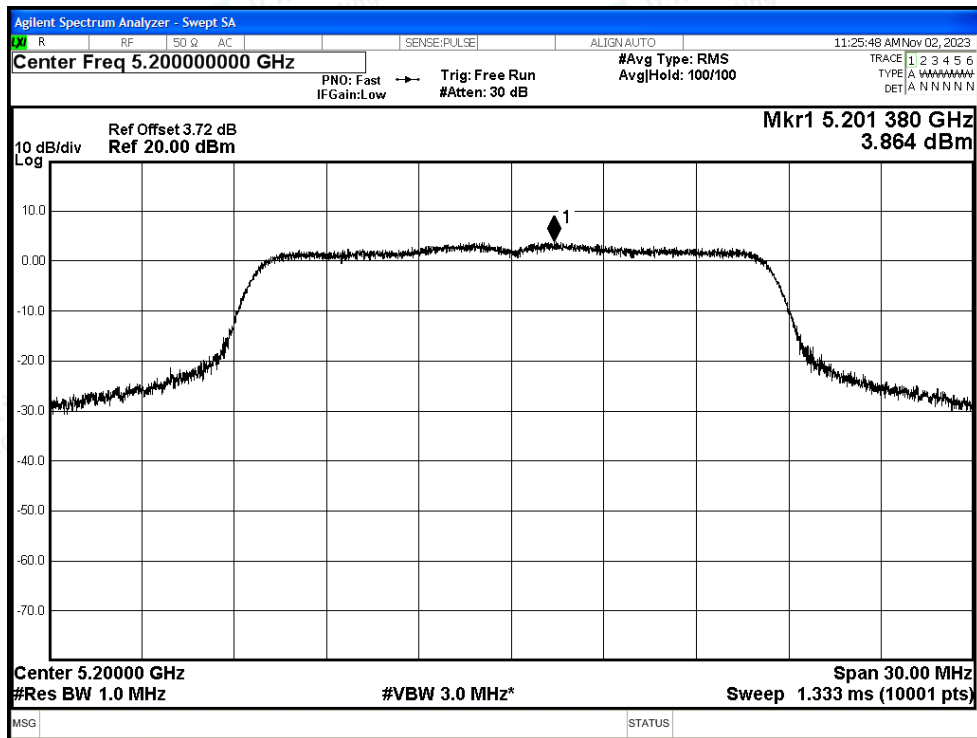








PSD NVNT a 5240MHz Ant0


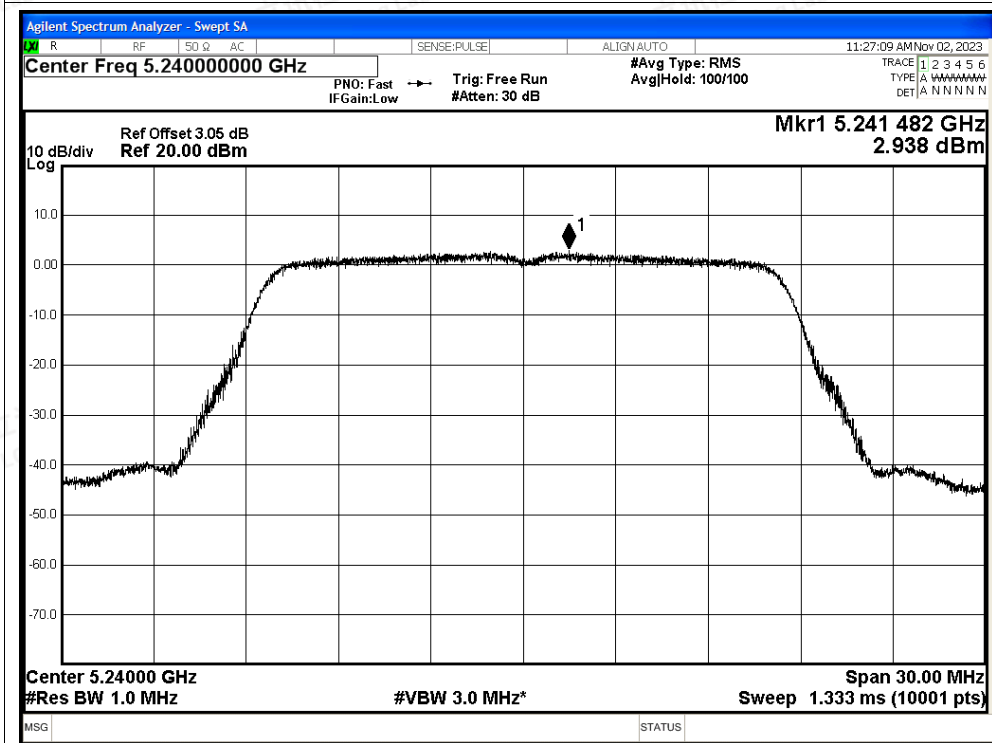




PSD NVNT n20 5180MHz Ant0


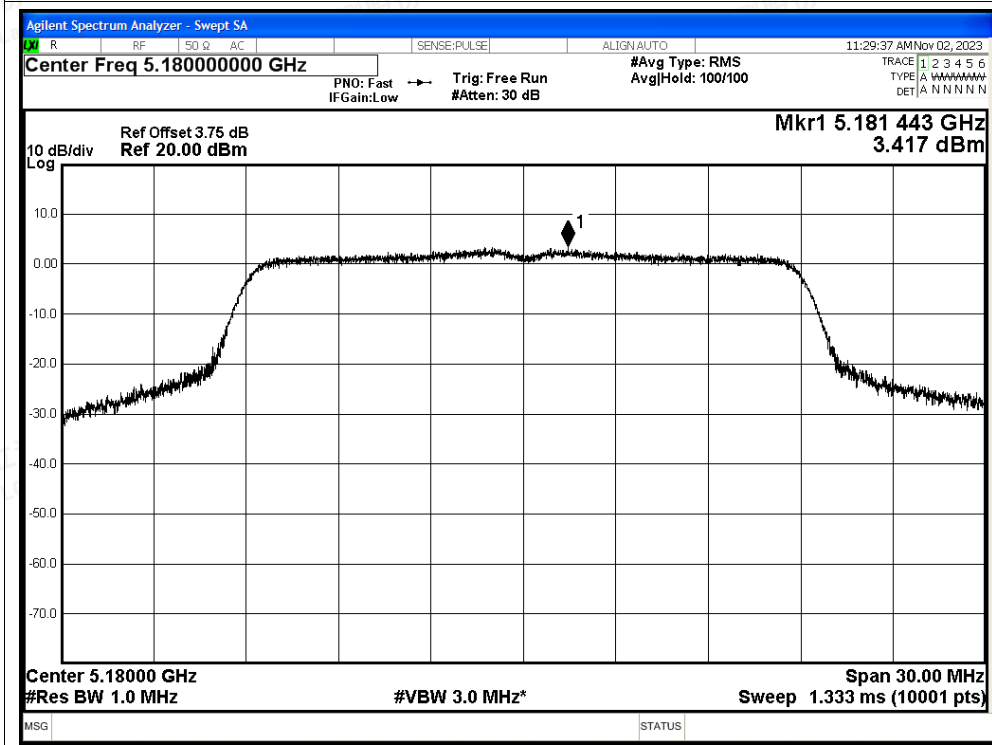


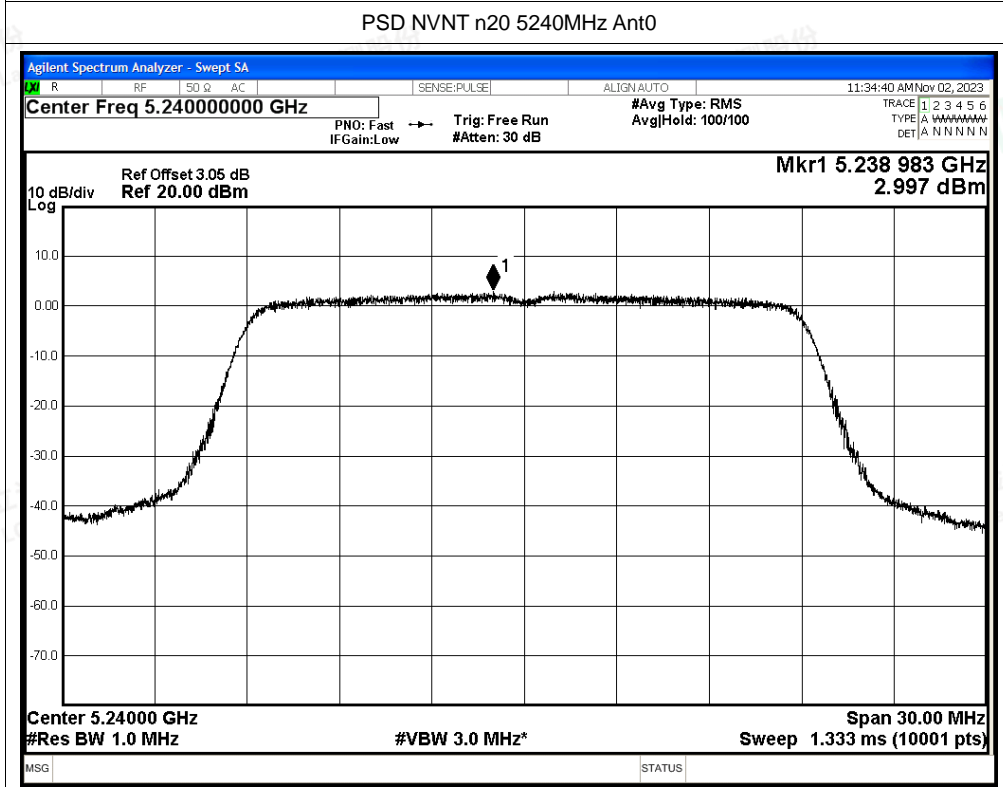
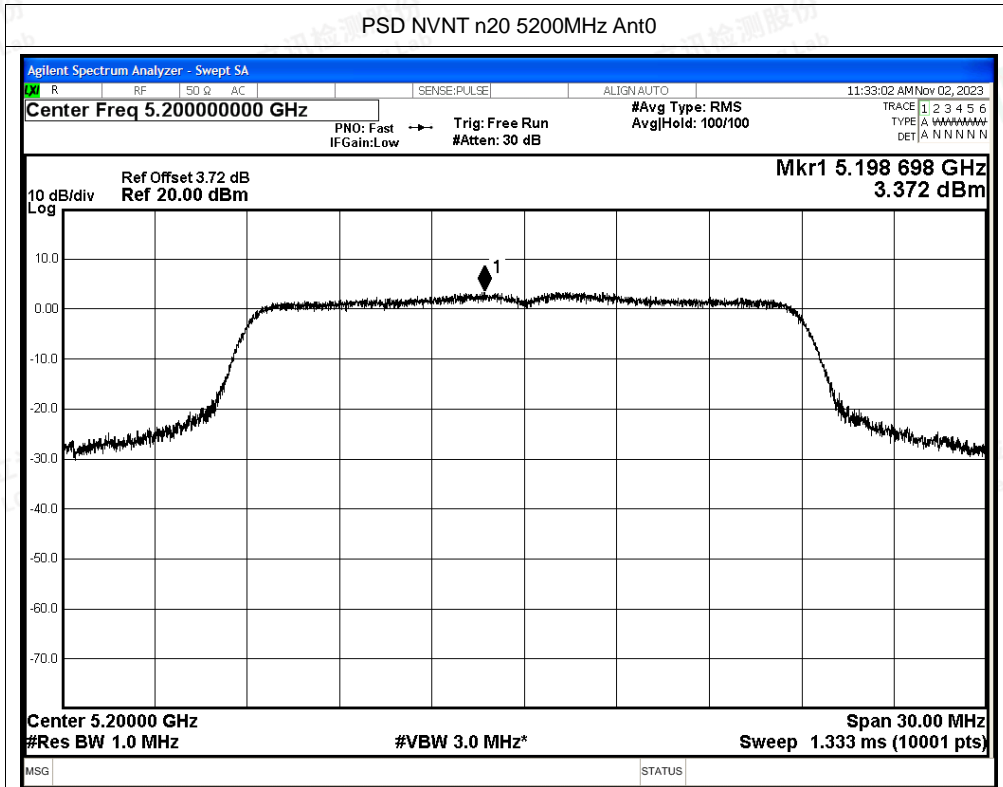


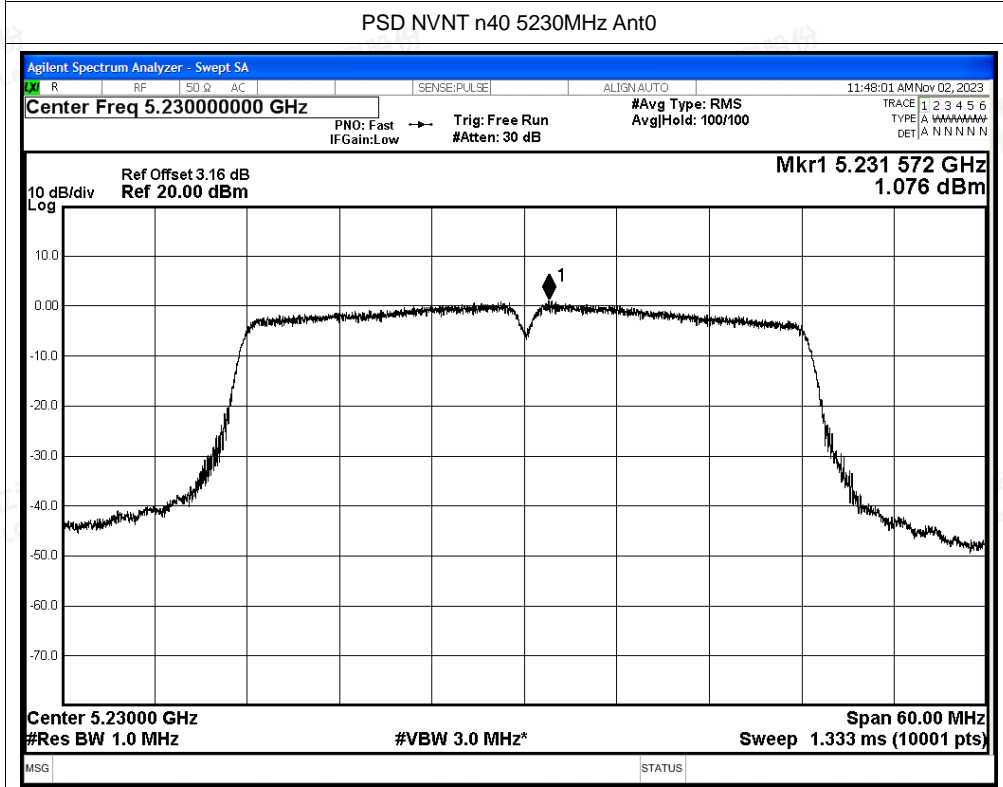
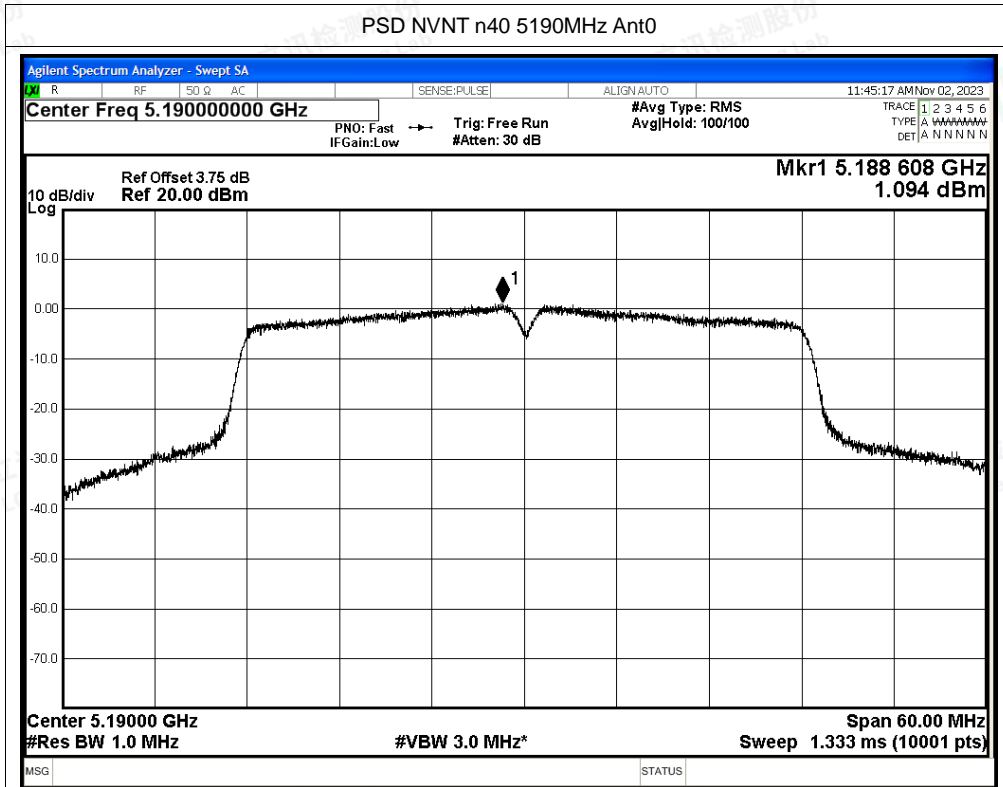


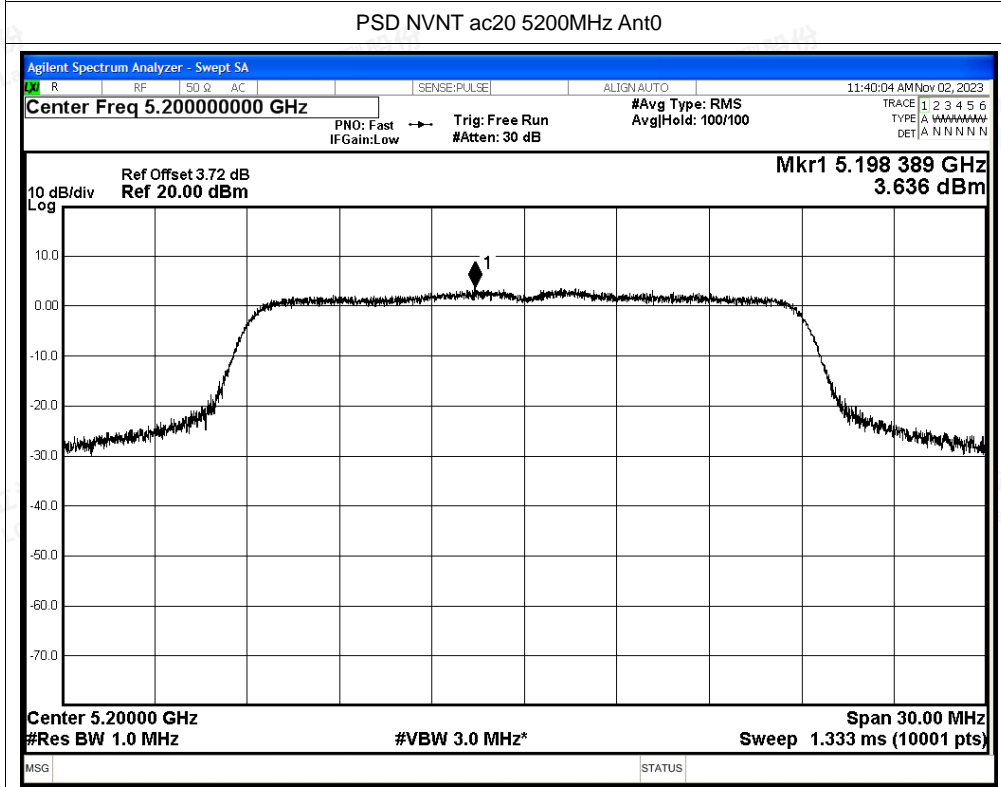
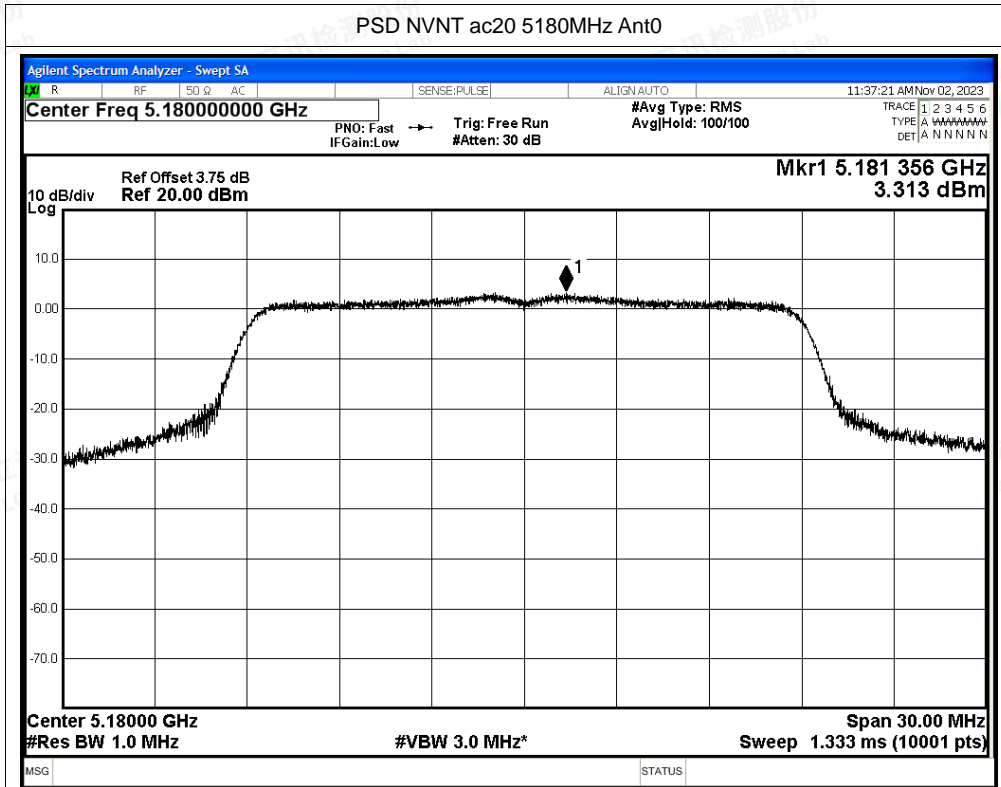


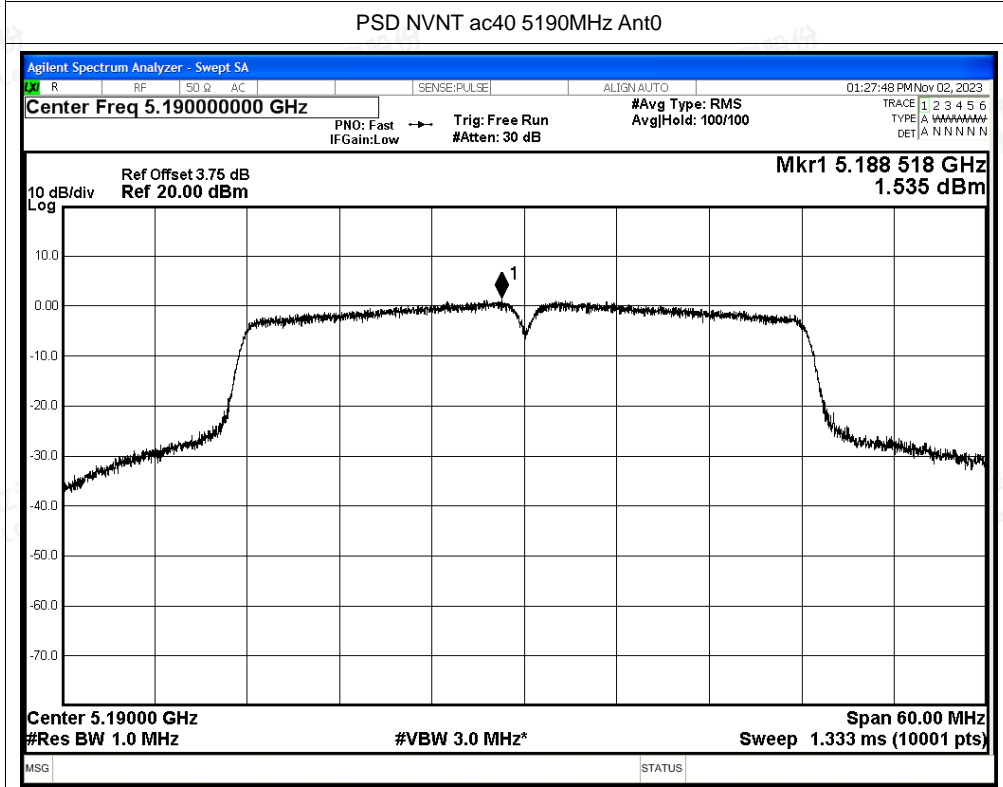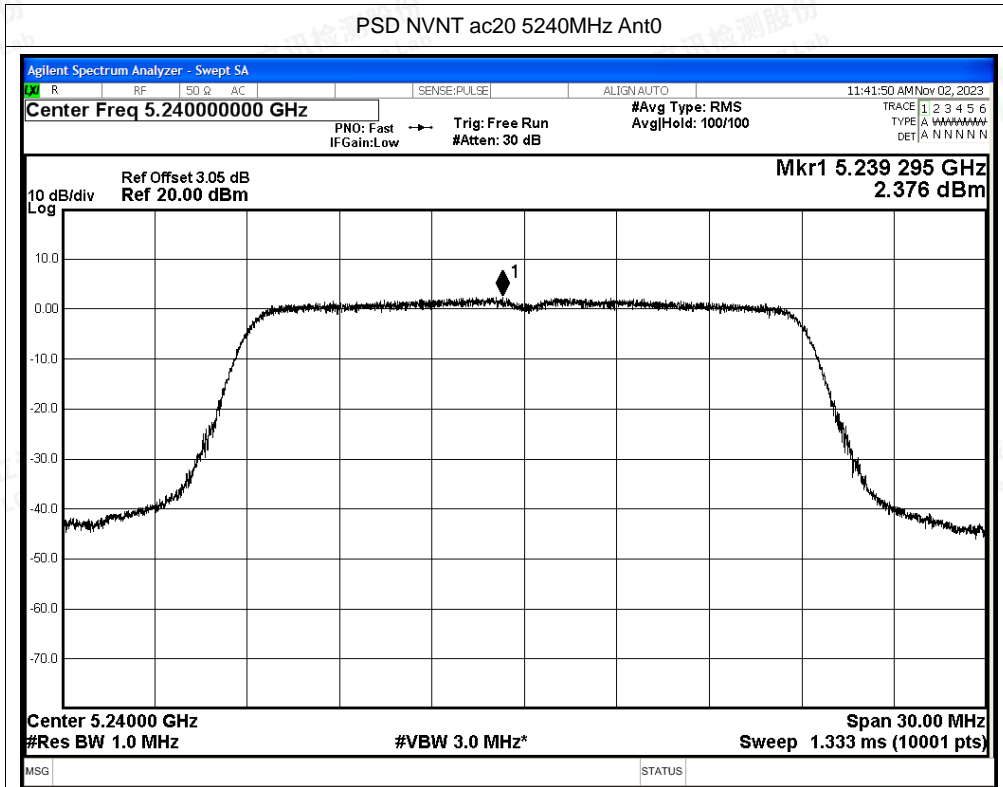

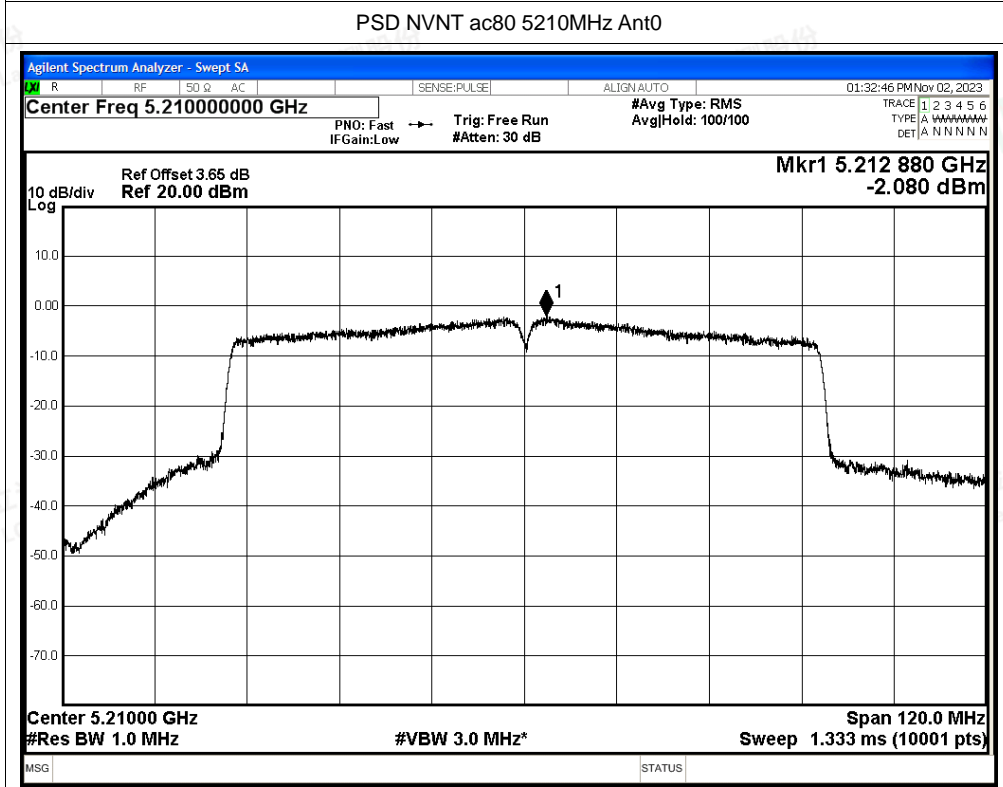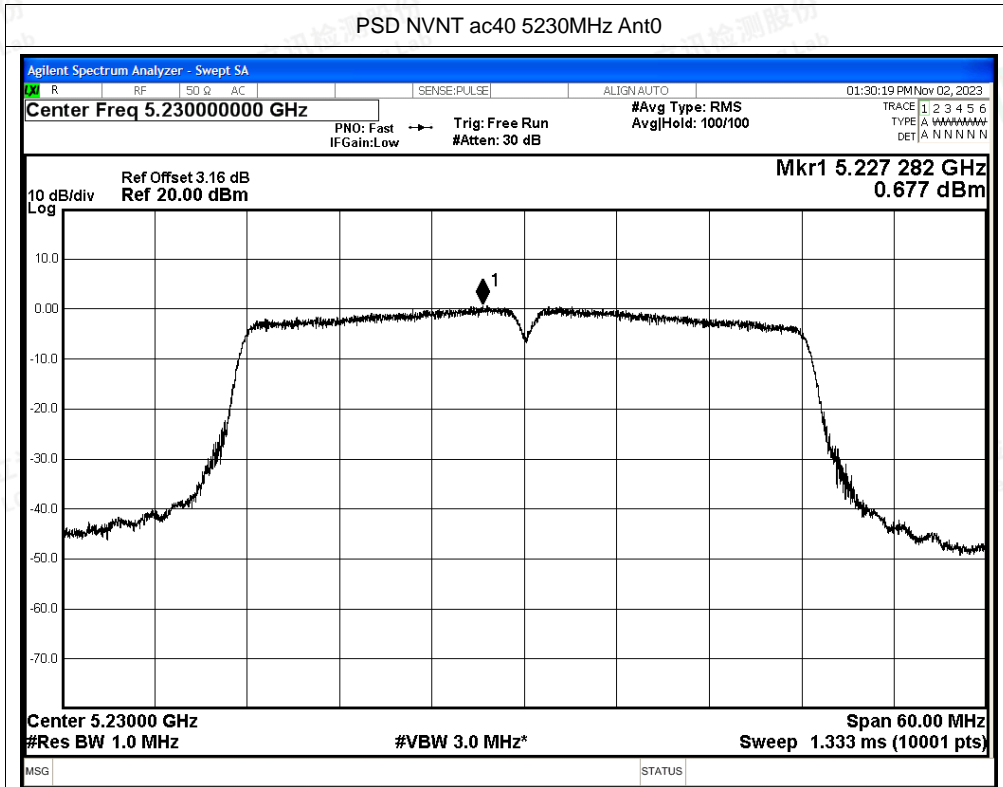

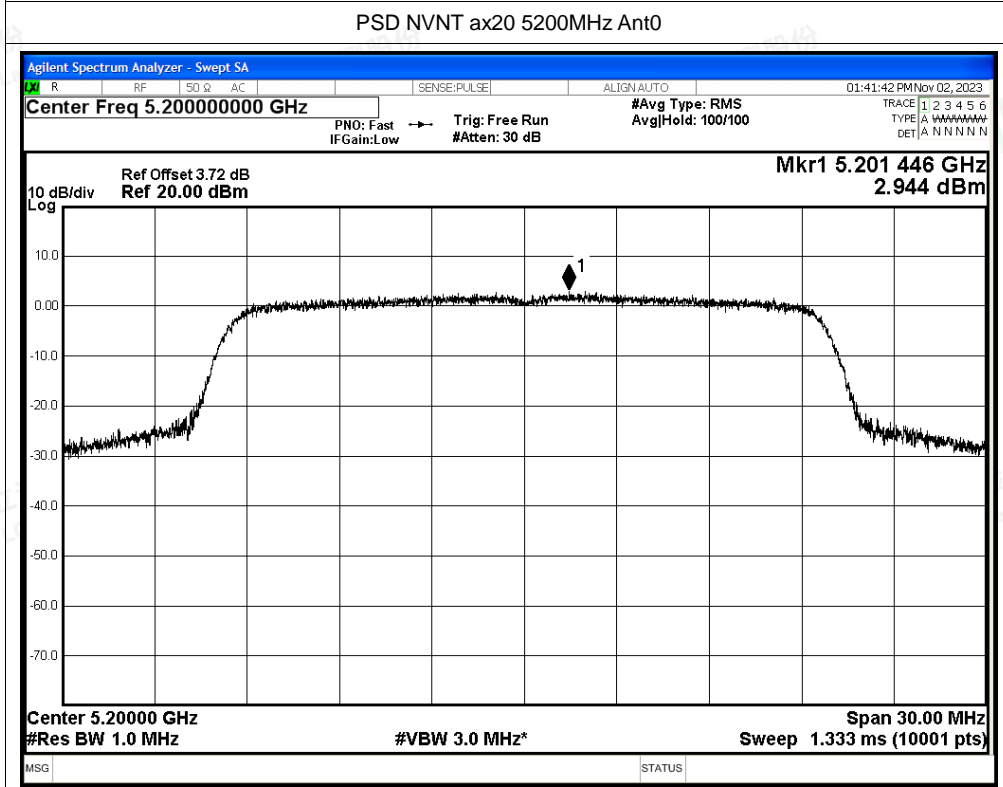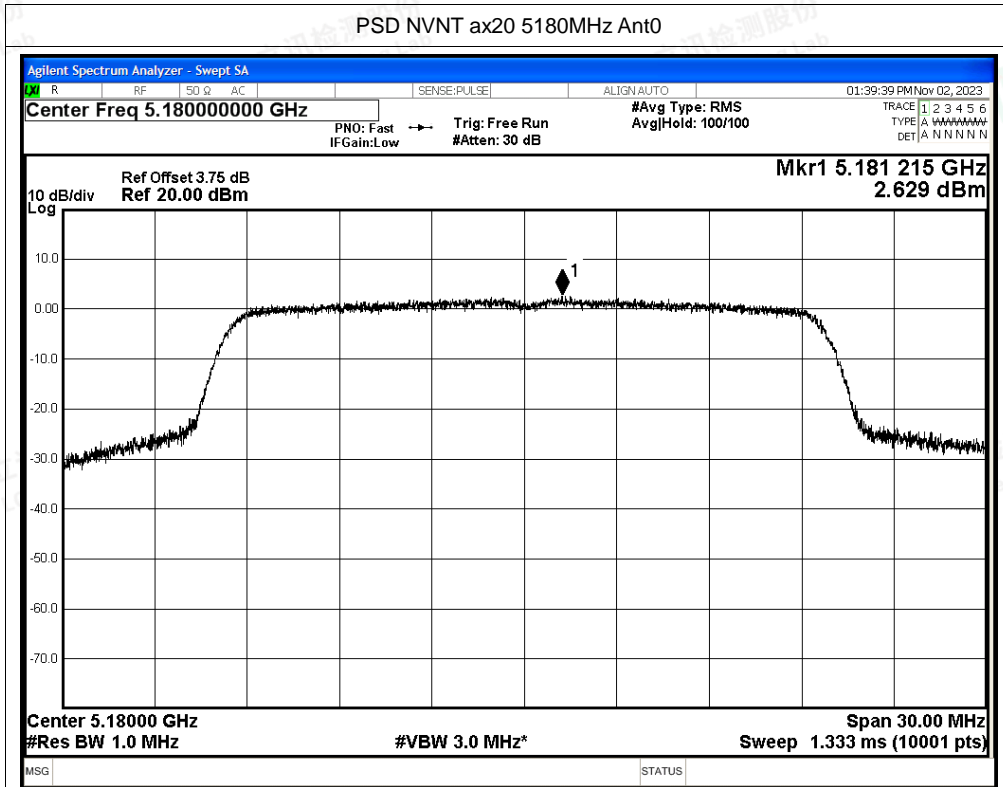

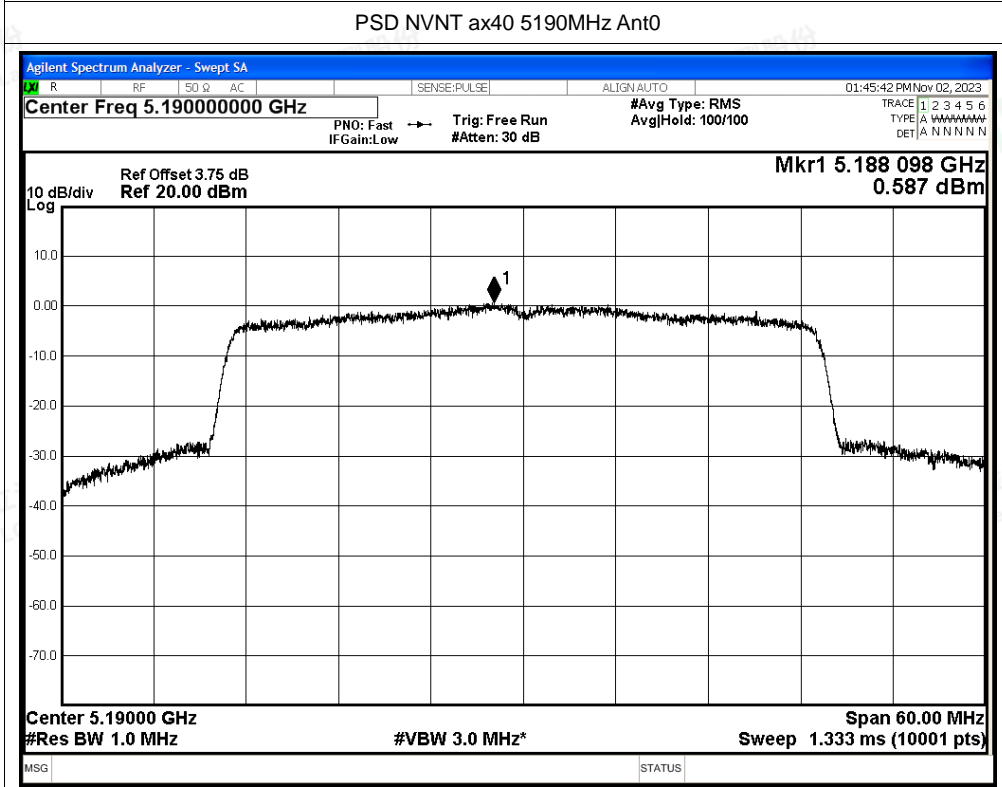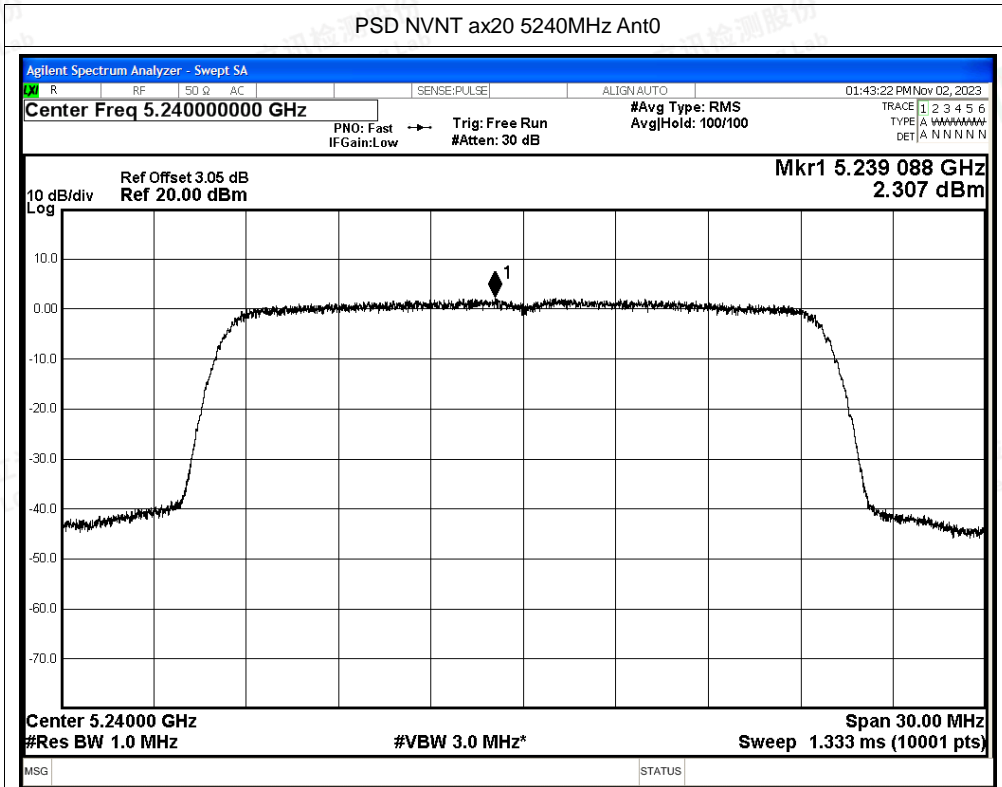


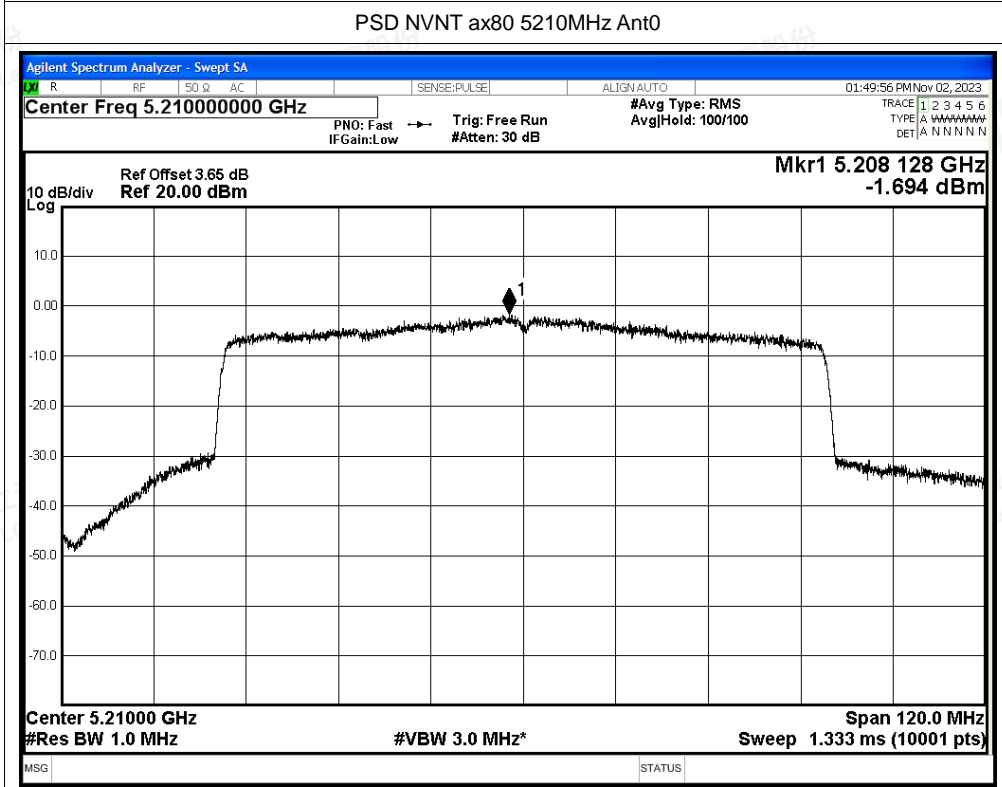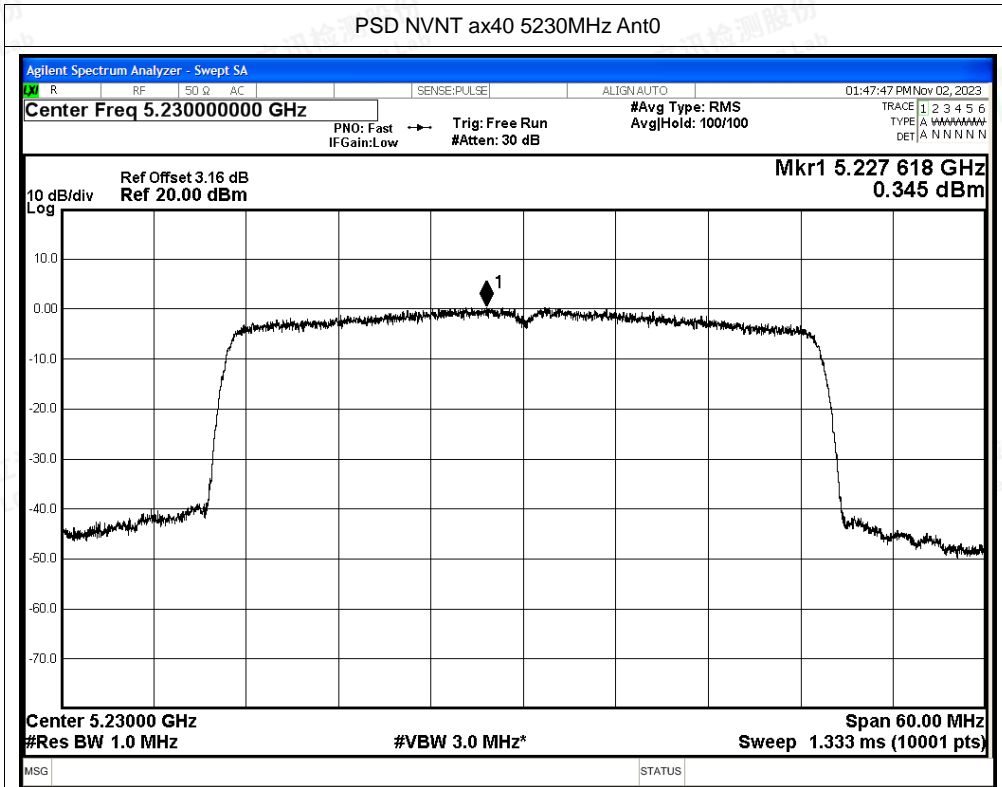




Test Graphs

PSD NVNT a 5180MHz Ant1

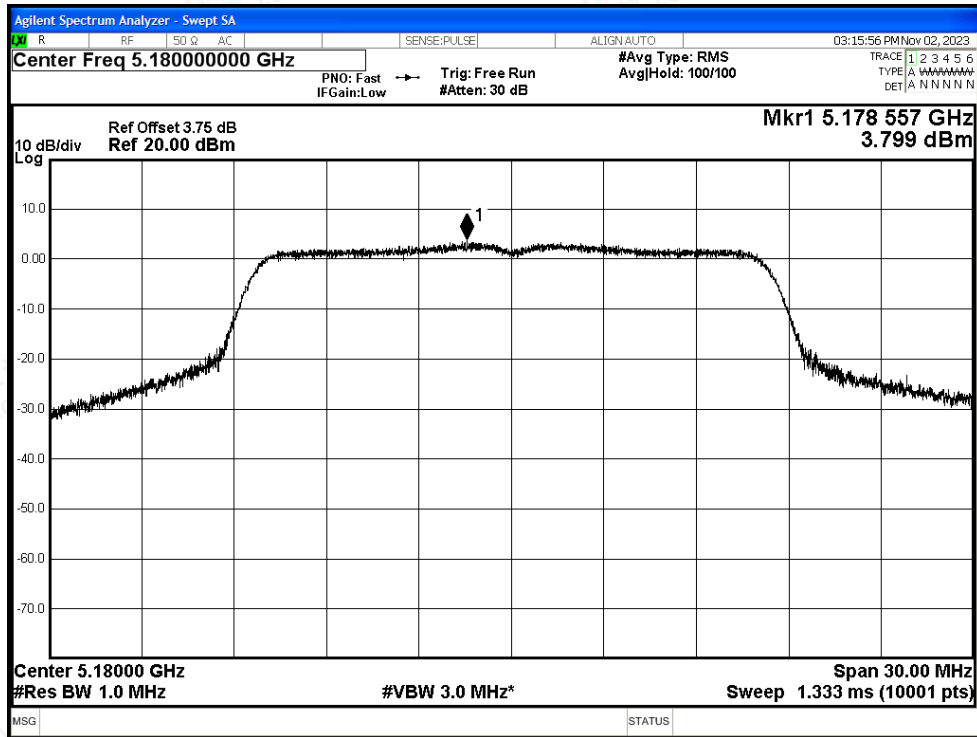


PSD NVNT a 5200MHz Ant1

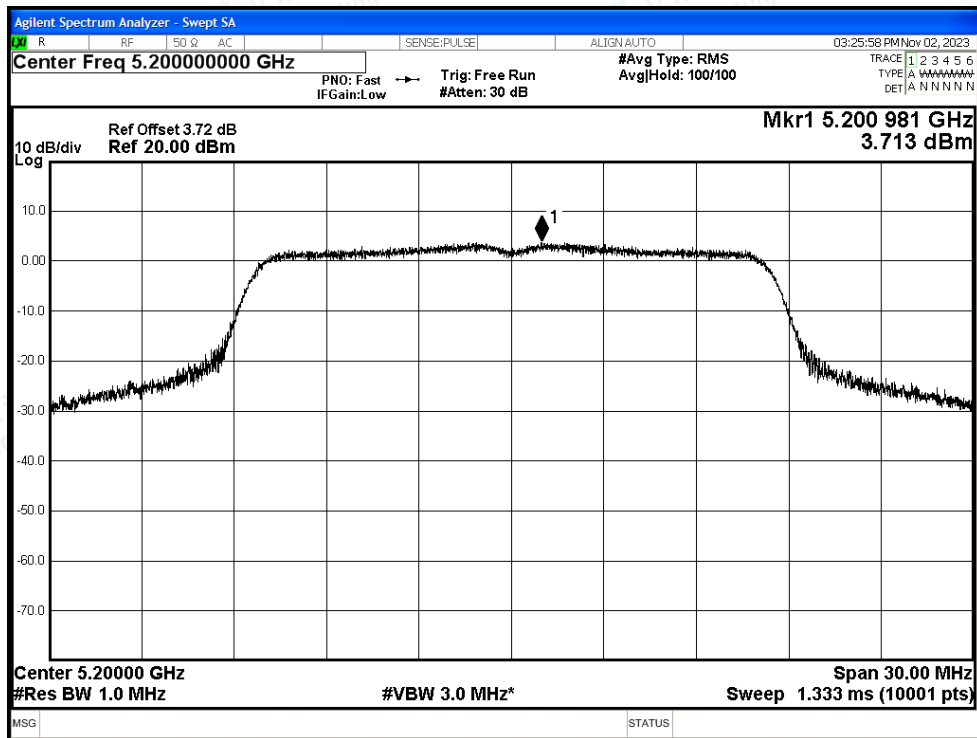








PSD NVNT a 5240MHz Ant1


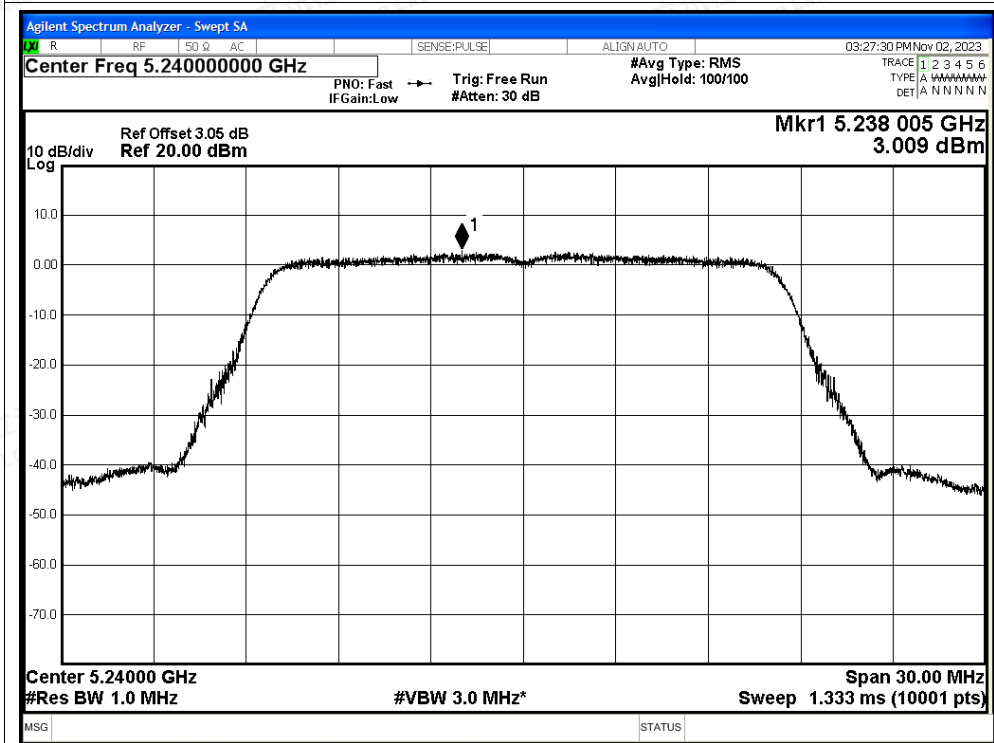




PSD NVNT n20 5180MHz Ant1

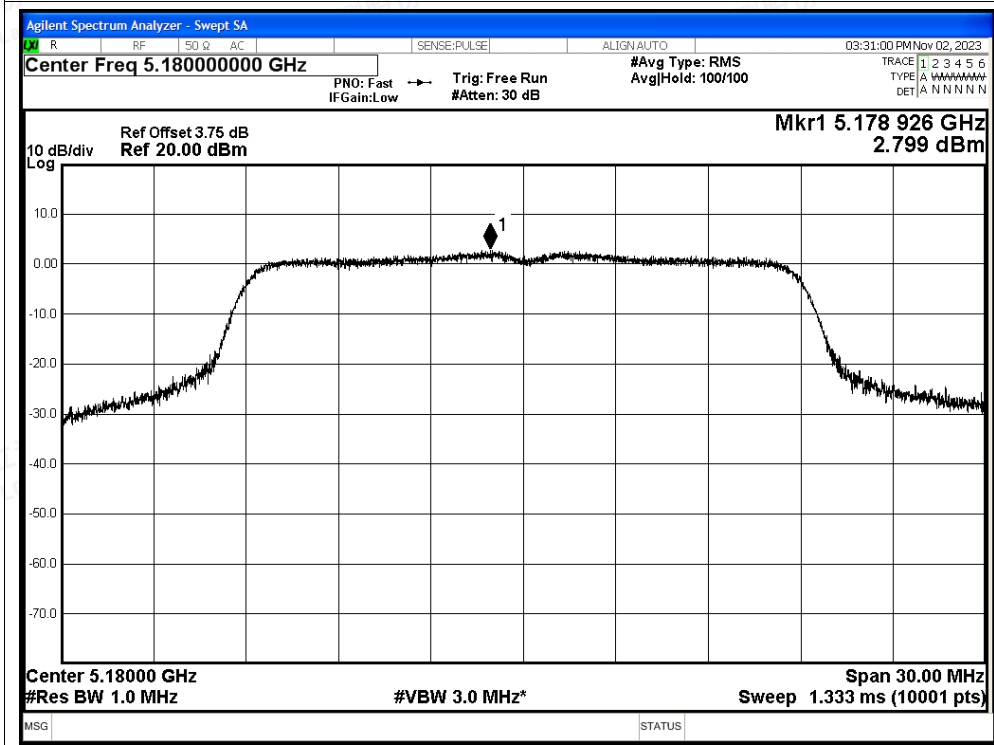

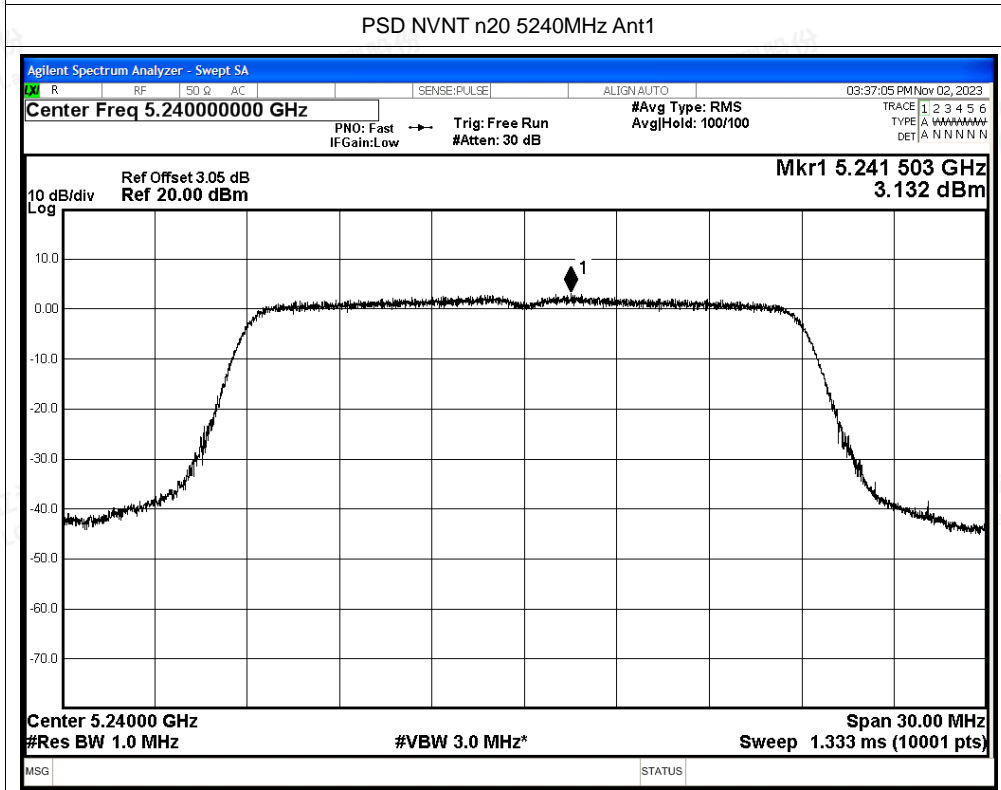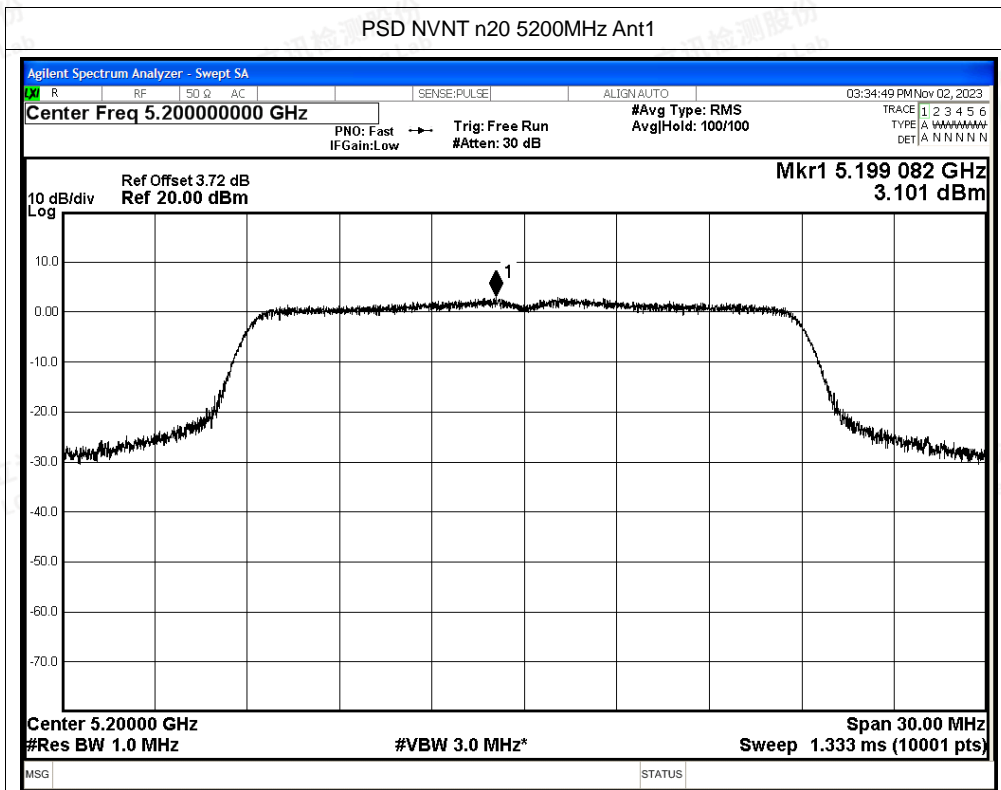

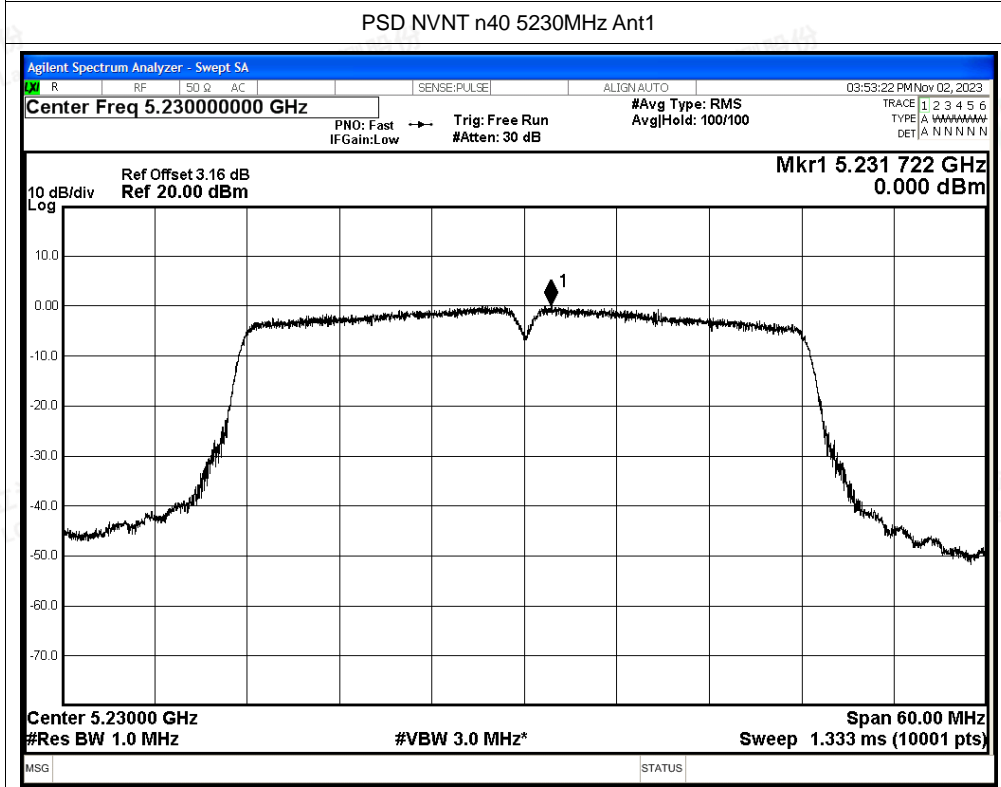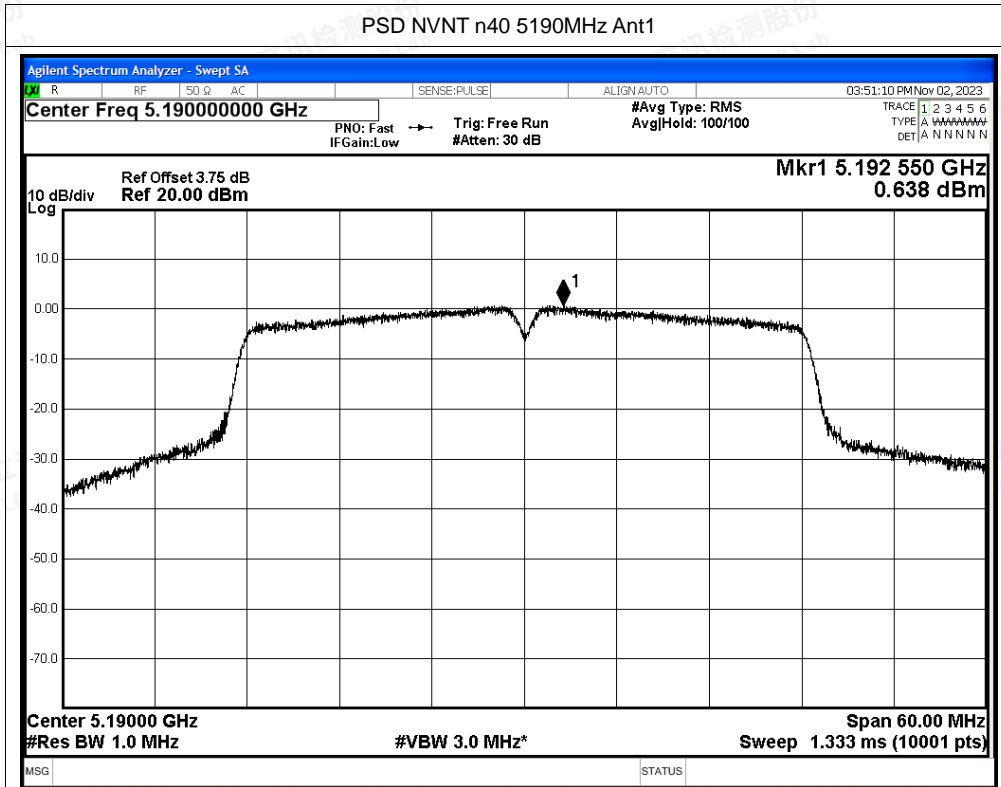


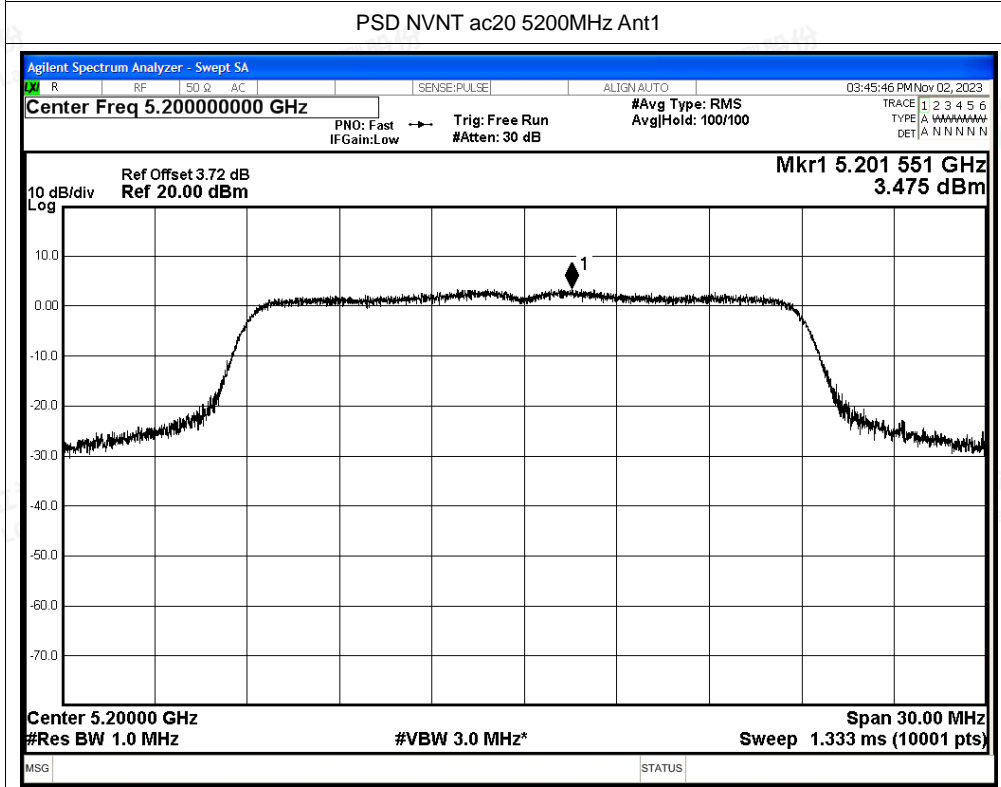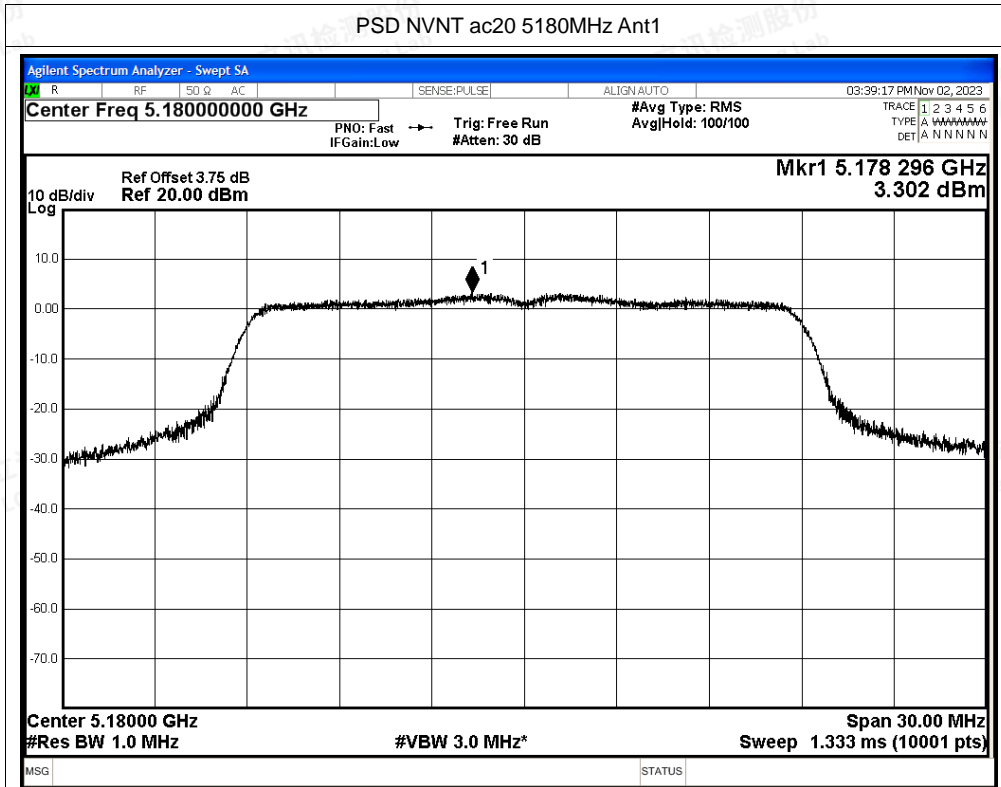

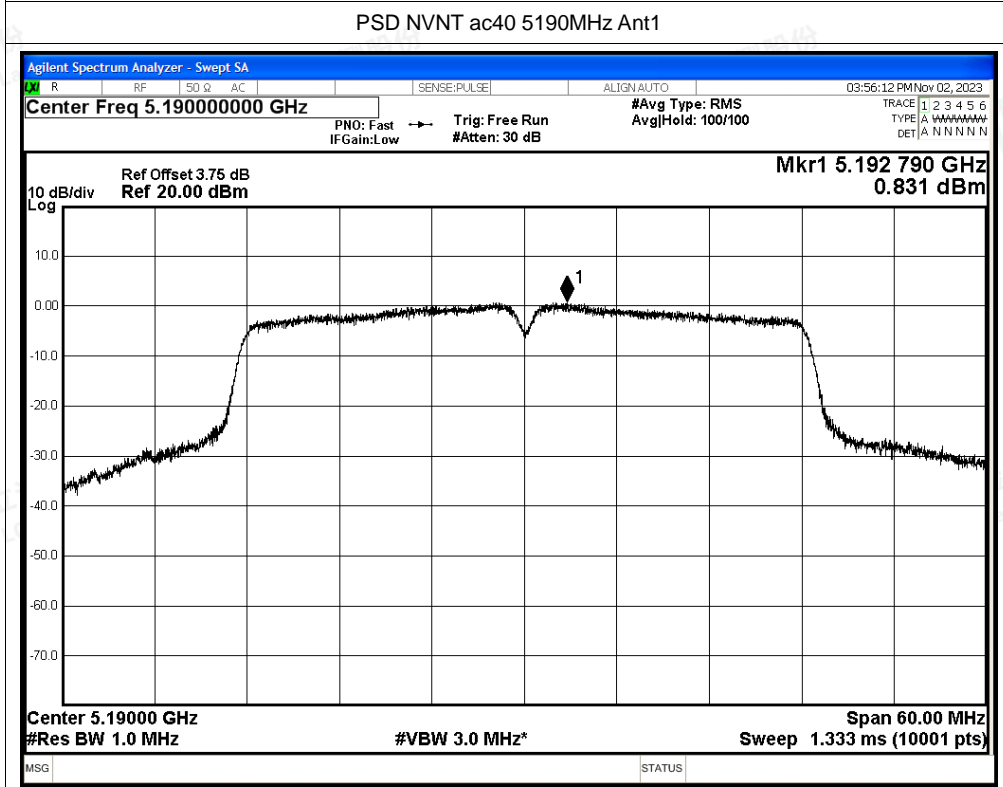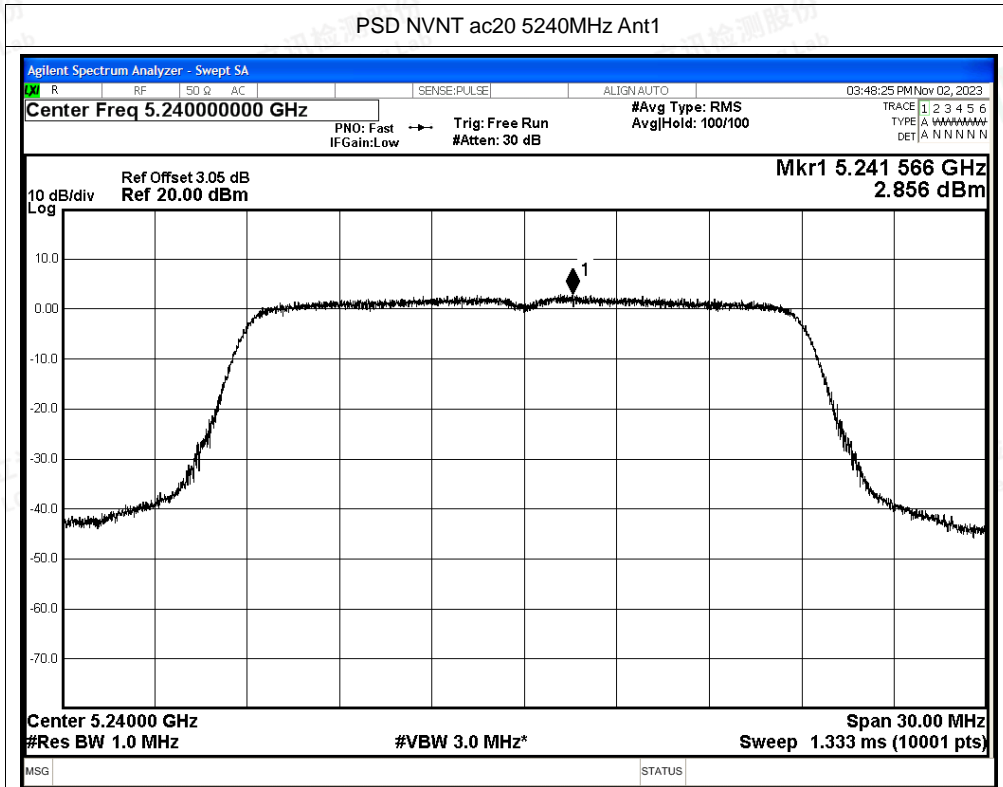








PSD NVNT ac40 5230MHz Ant1

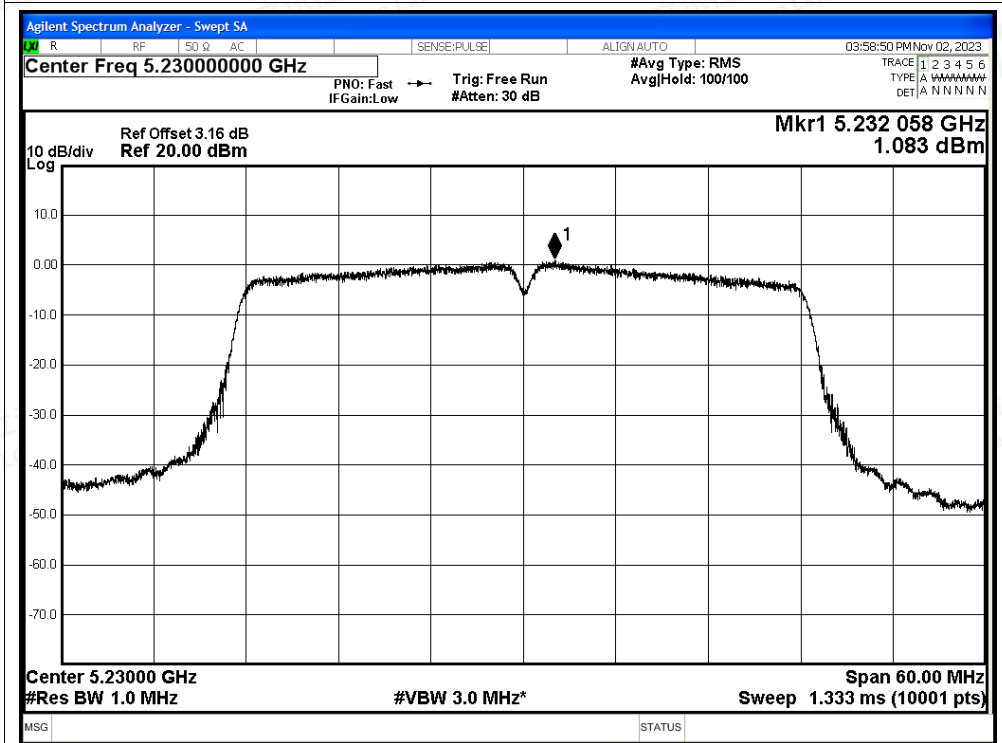

PSD NVNT ac80 5210MHz Ant1

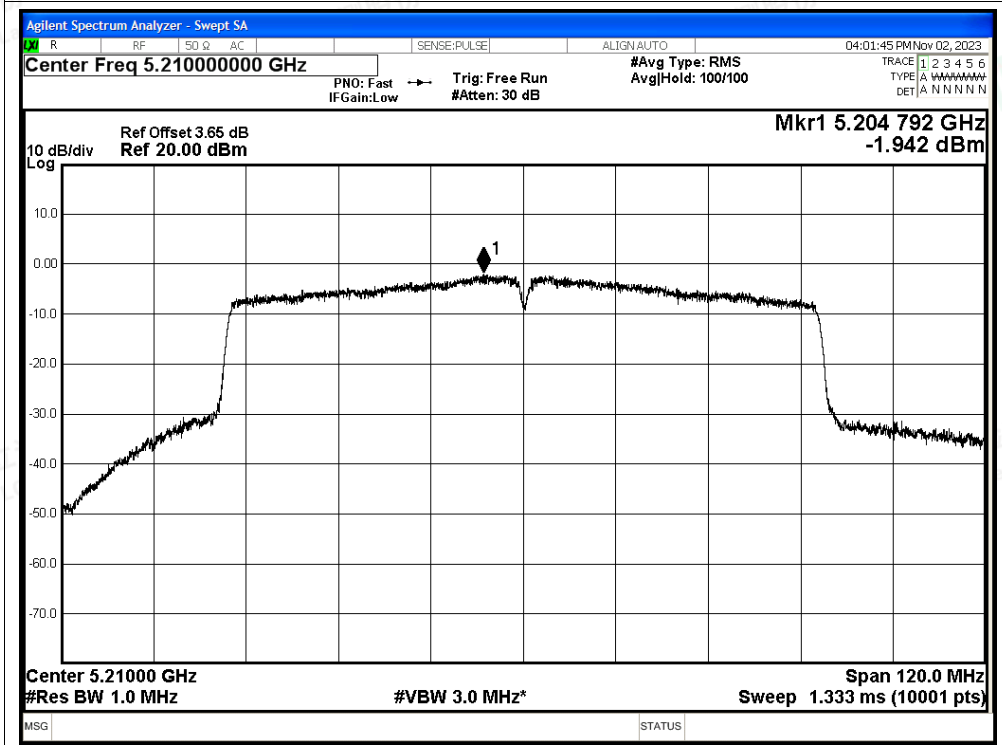


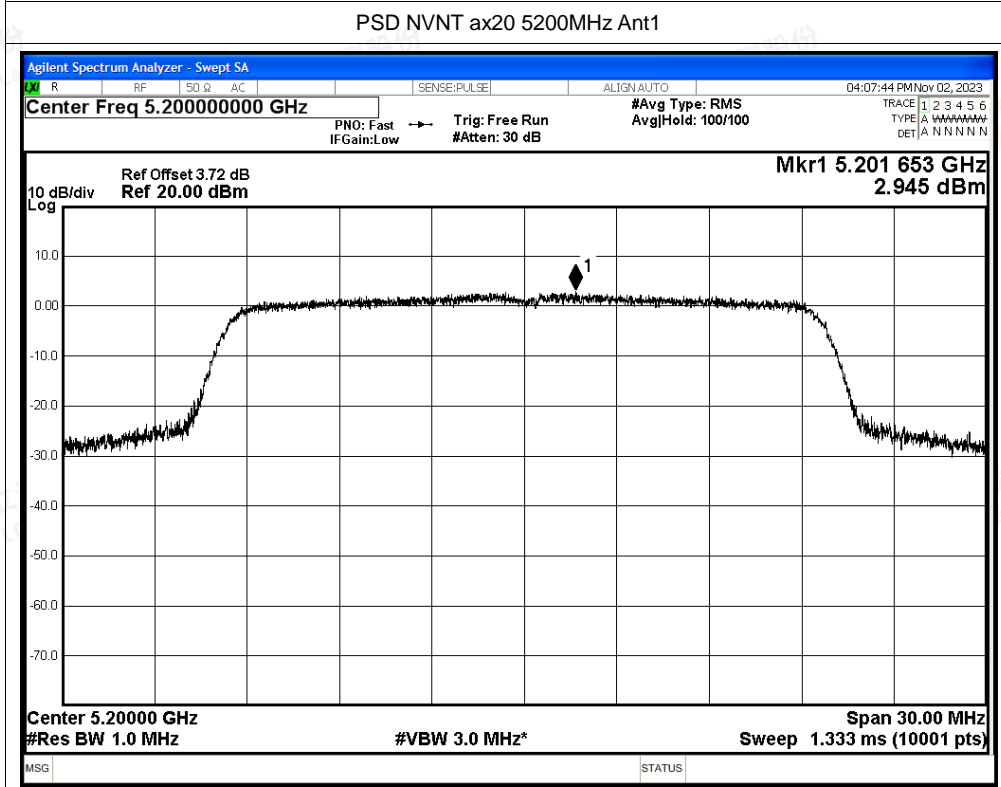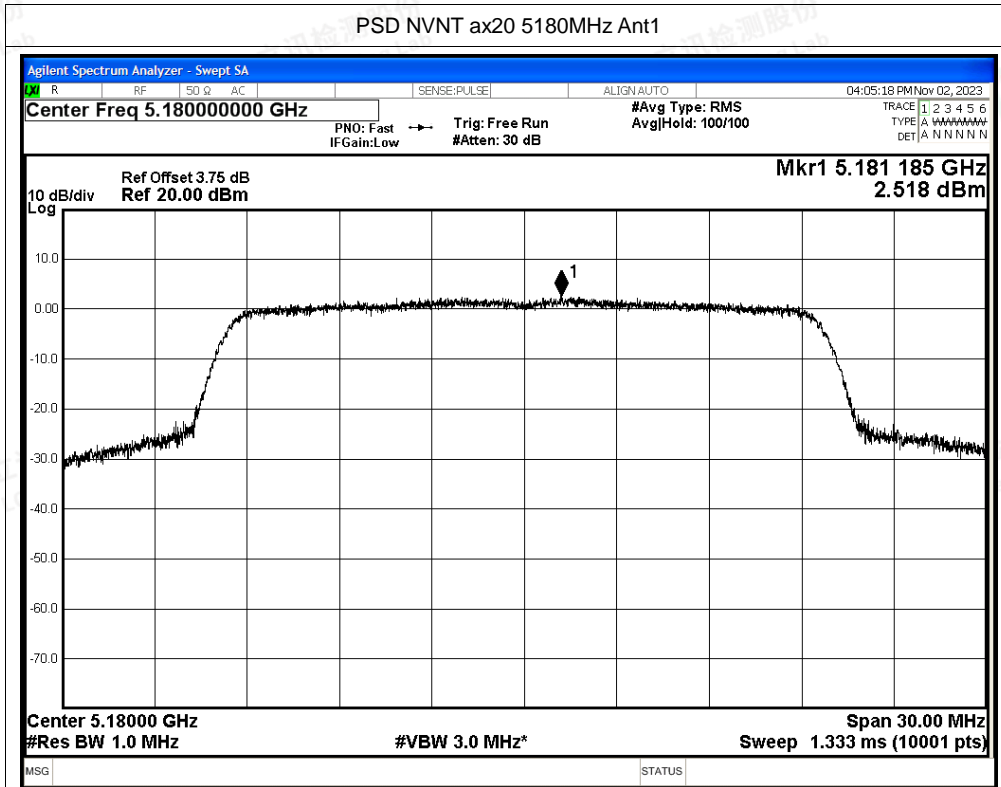

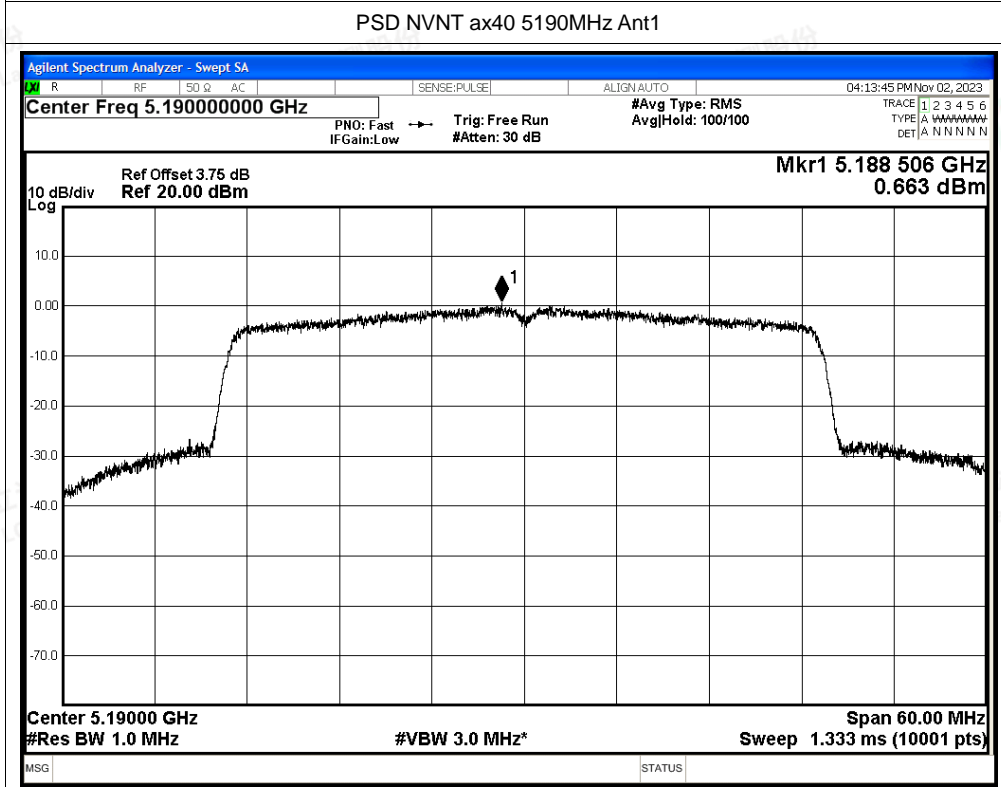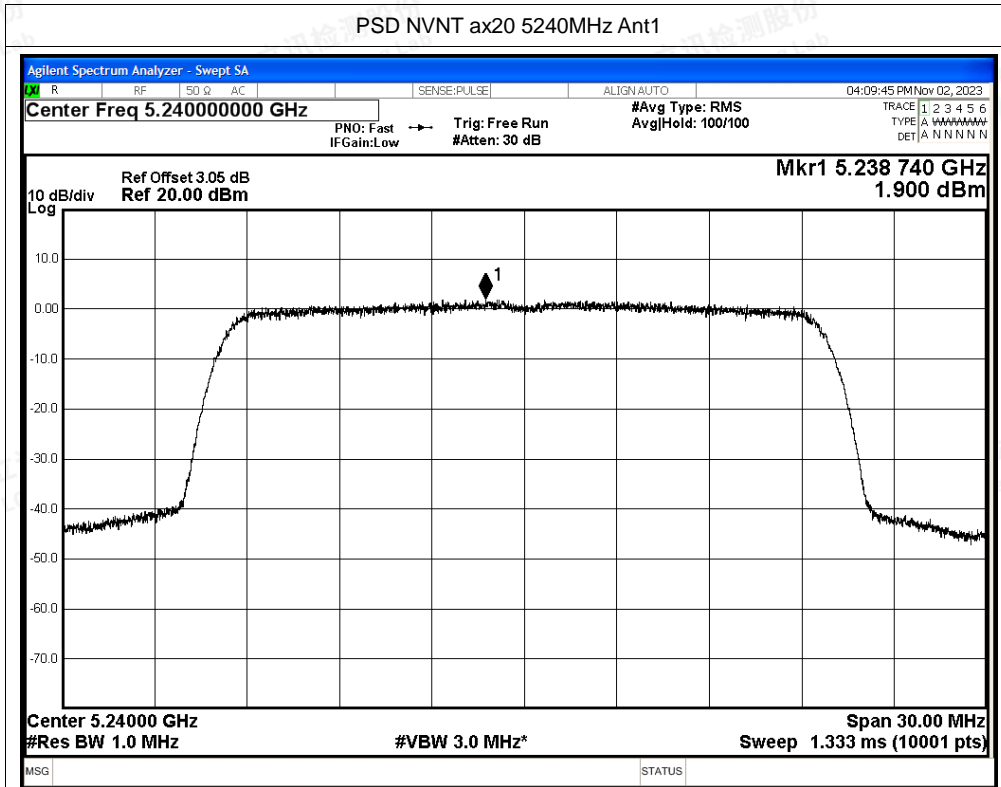




PSD NVNT ax40 5230MHz Ant1

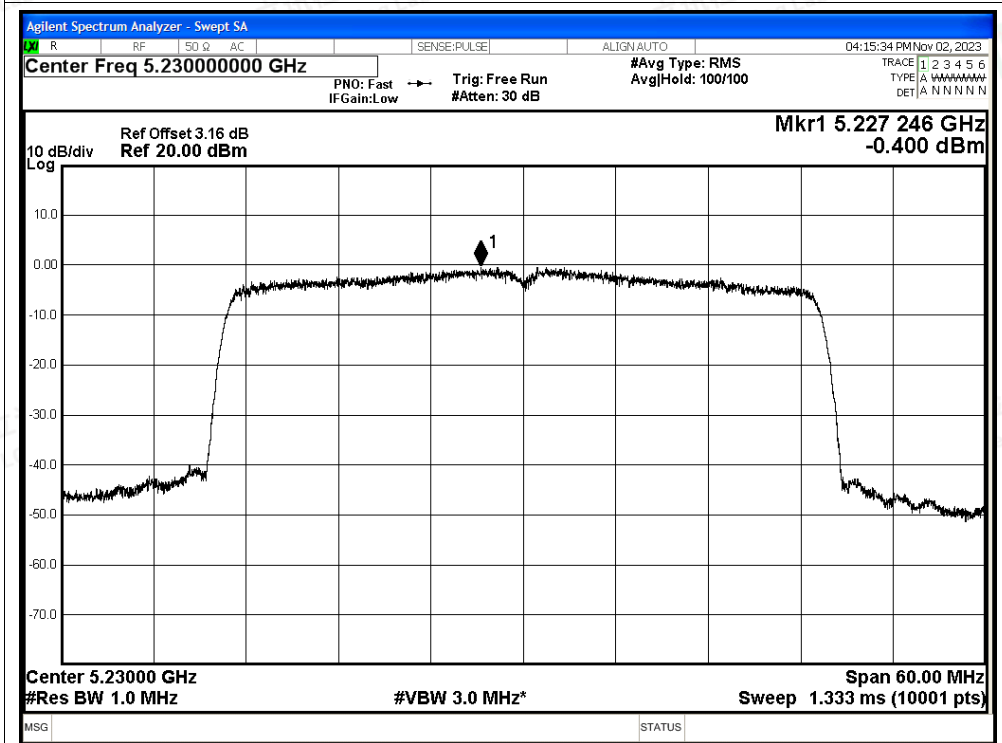

PSD NVNT ax80 5210MHz Ant1

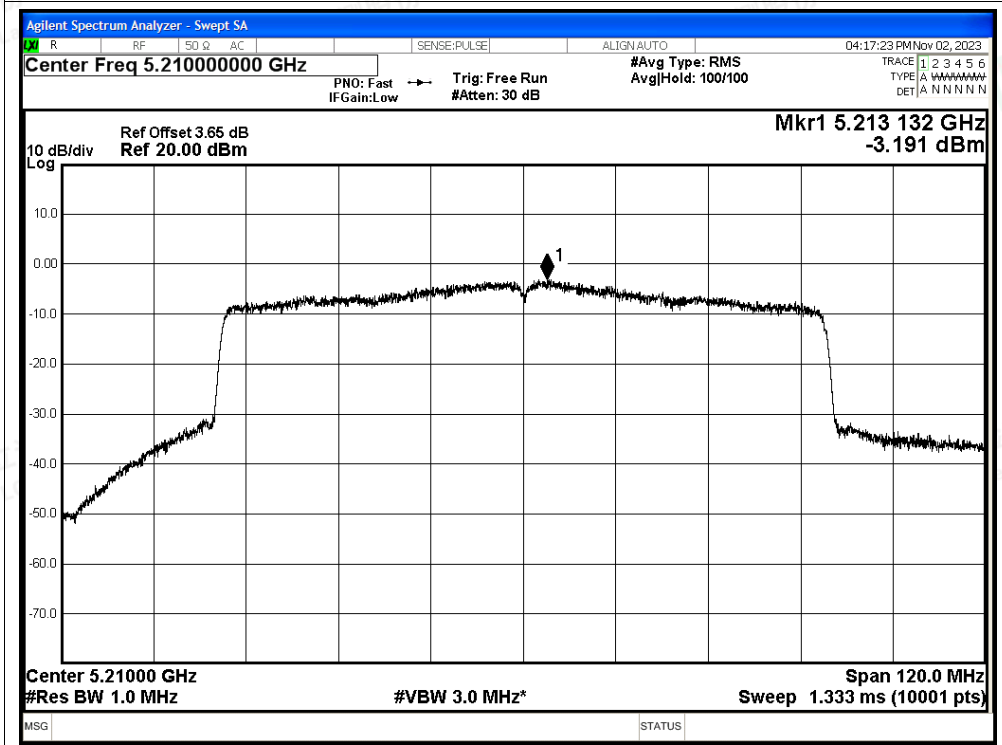



B.4 Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a-Ant0	5180	4500	-50.11	3.0	48.12	Peak	74	Pass
NVNT	a-Ant0	5180	4500	-57.03	3.0	41.20	Average	54	Pass
NVNT	a-Ant0	5180	5018.7	-43.4	3.0	54.83	Peak	74	Pass
NVNT	a-Ant0	5180	5020.1	-50.98	3.0	47.25	Average	54	Pass
NVNT	a-Ant0	5180	5150	-47.01	3.0	51.22	Peak	74	Pass
NVNT	a-Ant0	5180	5150	-52.75	3.0	45.48	Average	54	Pass
NVNT	a-Ant0	5240	5350	-48.36	3.0	49.87	Peak	74	Pass
NVNT	a-Ant0	5240	5350	-55.62	3.0	42.61	Average	54	Pass
NVNT	a-Ant0	5240	5396.64	-45.87	3.0	52.36	Peak	74	Pass
NVNT	a-Ant0	5240	5400	-53.41	3.0	44.82	Average	54	Pass
NVNT	a-Ant0	5240	5460	-48.15	3.0	50.08	Peak	74	Pass
NVNT	a-Ant0	5240	5460	-56.47	3.0	41.76	Average	54	Pass
NVNT	n20-mimo	5180	4500	-50.55	6.01	50.69	Peak	74	Pass
NVNT	n20-mimo	5180	4500	-57.05	6.01	44.19	Average	54	Pass
NVNT	n20-mimo	5180	5086.6	-43.01	6.01	58.23	Peak	74	Pass
NVNT	n20-mimo	5180	5020.1	-51.16	6.01	50.08	Average	54	Pass
NVNT	n20-mimo	5180	5150	-46.34	6.01	54.90	Peak	74	Pass
NVNT	n20-mimo	5180	5150	-52.89	6.01	48.35	Average	54	Pass
NVNT	n20-mimo	5240	5350	-48.65	6.01	52.59	Peak	74	Pass
NVNT	n20-mimo	5240	5350	-55.54	6.01	45.70	Average	54	Pass
NVNT	n20-mimo	5240	5415.12	-46.23	6.01	55.01	Peak	74	Pass
NVNT	n20-mimo	5240	5400	-53.21	6.01	48.03	Average	54	Pass
NVNT	n20-mimo	5240	5460	-48.97	6.01	52.27	Peak	74	Pass
NVNT	n20-mimo	5240	5460	-56.33	6.01	44.91	Average	54	Pass
NVNT	n40-mimo	5190	4500	-49.47	6.01	51.77	Peak	74	Pass
NVNT	n40-mimo	5190	4500	-56.97	6.01	44.27	Average	54	Pass
NVNT	n40-mimo	5190	5149.7	-42.23	6.01	59.01	Peak	74	Pass
NVNT	n40-mimo	5190	5149.7	-50.72	6.01	50.52	Average	54	Pass
NVNT	n40-mimo	5190	5150	-42.23	6.01	59.01	Peak	74	Pass
NVNT	n40-mimo	5190	5150	-50.72	6.01	50.52	Average	54	Pass
NVNT	n40-mimo	5230	5350	-47.32	6.01	53.92	Peak	74	Pass
NVNT	n40-mimo	5230	5350	-54.5	6.01	46.74	Average	54	Pass
NVNT	n40-mimo	5230	5423.82	-46.15	6.01	55.09	Peak	74	Pass
NVNT	n40-mimo	5230	5390.07	-52.98	6.01	48.26	Average	54	Pass
NVNT	n40-mimo	5230	5460	-47.07	6.01	54.17	Peak	74	Pass
NVNT	n40-mimo	5230	5460	-55.83	6.01	45.41	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity