

FCC Radio Test Report

FCC ID: 2AUA9-RQZY004

This report concerns: **Original Grant**

Project No. : 2005C172
Equipment : AX1800 Wi-Fi6 Smart WiFi Router
Brand Name : ROCK, rock space
Test Model : RSD0616
Series Model : N/A
Applicant : Shenzhen Renqing Excellent Technology Co., Ltd.
Address : 104, No.15, Longfu Industrial Zone, Tongsheng Community, Dalang Street, Dalang Street, Longhua District, Shenzhen, Guangdong , China
Manufacturer : Shenzhen Renqing Excellent Technology Co., Ltd.
Address : 104, No.15, Longfu Industrial Zone, Tongsheng Community, Dalang Street, Dalang Street, Longhua District, Shenzhen, Guangdong , China
Date of Receipt : May 27, 2020
Date of Test : May 28, 2020 ~ Jun. 30, 2020
Issued Date : Oct. 09, 2020
Report Version : R01
Test Sample : Engineering Sample No.: DG20200527305 for conducted, DG20200527306 for radiated.
Standard(s) : FCC Part15, Subpart E(15.407)
ANSI C63.10-2013
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Chella Zheng



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	9
2 . GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 TEST MODES	13
2.3 PARAMETERS OF TEST SOFTWARE	16
2.4 DUTY CYCLE	17
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	20
2.6 SUPPORT UNITS	20
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	21
3.1 LIMIT	21
3.2 TEST PROCEDURE	21
3.3 DEVIATION FROM TEST STANDARD	21
3.4 TEST SETUP	22
3.5 EUT OPERATION CONDITIONS	22
3.6 TEST RESULTS	22
4 . RADIATED EMISSIONS TEST	23
4.1 LIMIT	23
4.2 TEST PROCEDURE	24
4.3 DEVIATION FROM TEST STANDARD	24
4.4 TEST SETUP	25
4.5 EUT OPERATION CONDITIONS	26
4.6 TEST RESULTS - 9 KHZ to 30 MHZ	26
4.7 TEST RESULTS - 30 MHz TO 1000 MHz	26
4.8 TEST RESULTS - ABOVE 1000 MHz	26
5 . BANDWIDTH TEST	27
5.1 LIMIT	27
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM STANDARD	27

Table of Contents	Page
5.4 TEST SETUP	27
5.5 EUT OPERATION CONDITIONS	27
5.6 TEST RESULTS	27
6 . MAXIMUM OUTPUT POWER TEST	28
6.1 LIMIT	28
6.2 TEST PROCEDURE	28
6.3 DEVIATION FROM STANDARD	28
6.4 TEST SETUP	28
6.5 EUT OPERATION CONDITIONS	28
6.6 TEST RESULTS	28
7 . POWER SPECTRAL DENSITY TEST	29
7.1 LIMIT	29
7.2 TEST PROCEDURE	29
7.3 DEVIATION FROM STANDARD	29
7.4 TEST SETUP	29
7.5 EUT OPERATION CONDITIONS	29
7.6 TEST RESULTS	29
8 . FREQUENCY STABILITY MEASUREMENT	30
8.1 LIMIT	30
8.2 TEST PROCEDURE	30
8.3 DEVIATION FROM STANDARD	30
8.4 TEST SETUP	30
8.5 EUT OPERATION CONDITIONS	30
8.6 TEST RESULTS	30
9 . MEASUREMENT INSTRUMENTS LIST	31
10 . EUT TEST PHOTOS	33
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	37
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	42
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ	47
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	50
APPENDIX E - BANDWIDTH	173
APPENDIX F - MAXIMUM OUTPUT POWER	188

Table of Contents**Page****APPENDIX G - POWER SPECTRAL DENSITY****207****APPENDIX H - FREQUENCY STABILITY****228**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 23, 2020
R01	Changed the product name.	Oct. 09, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Spectrum Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 Access point device Client device

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement:

Test Item	Uncertainty
Spectrum Bandwidth	±3.8 %
Maximum Output Power	±0.95 dB
Power Spectral Density	±0.86 dB
Frequency Stability	±0.16 dB
Temperature	±0.08 °C
Time	±0.58 %
Supply voltages	±0.3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	55%	AC 120V/60Hz AC 240V/50Hz	Sheldon Ou
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz	Sheldon Ou
Radiated Emissions-30 MHz to 1GHz	22°C	54%	AC 120V/60Hz	Sheldon Ou
Radiated Emissions-Above 1000 MHz	22°C	54%	AC 120V/60Hz	Sheldon Ou
Spectrum Bandwidth	25°C	60%	DC 12V	Hayden Chen
Maximum Output Power	25°C	60%	DC 12V	Laughing Zhang
Power Spectral Density	25°C	60%	DC 12V	Hayden Chen
Frequency Stability	Normal & Extreme	60%	Normal & Extreme	Hayden Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AX1800 Wi-Fi6 Smart WiFi Router
Brand Name	ROCK, rock space
Test Model	RSD0616
Series Model	N/A
Model Difference(s)	N/A
Power Source	DC voltage supplied from AC adapter. Model: RD1201500-C55-153MG
Power Rating	I/P: 100-240V ~50/60Hz 0.6A O/P: 12V \equiv 1.5A
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	up to 1201 Mbps
Maximum Output Power for UNII-1	IEEE 802.11a: 24.16 dBm (0.2606 W) IEEE 802.11n (HT20): 24.09 dBm (0.2564 W) IEEE 802.11n (HT40): 24.38 dBm (0.2742 W) IEEE 802.11ac (VHT20): 23.87 dBm (0.2438 W) IEEE 802.11ac (VHT40): 24.04 dBm (0.2535 W) IEEE 802.11ac (VHT80): 20.36 dBm (0.1086 W) IEEE 802.11ax (HEW20): 24.10 dBm (0.2570 W) IEEE 802.11ax (HEW40): 24.27 dBm (0.2673 W) IEEE 802.11ax (HEW80): 18.95 dBm (0.0785 W)
Maximum Output Power for UNII-3	IEEE 802.11a: 23.85 dBm (0.2427 W) IEEE 802.11n (HT20): 23.75 dBm (0.2371 W) IEEE 802.11n (HT40): 24.47 dBm (0.2799 W) IEEE 802.11ac (VHT20): 23.49 dBm (0.2234 W) IEEE 802.11ac (VHT40): 24.42 dBm (0.2767 W) IEEE 802.11ac (VHT80): 24.40 dBm (0.2754 W) IEEE 802.11ax (HEW20): 23.82 dBm (0.2410 W) IEEE 802.11ax (HEW40): 24.52 dBm (0.2831 W) IEEE 802.11ax (HEW80): 24.72 dBm (0.2965 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. RU Configuration:

IEEE 802.11ax(HEW20)	Resource Unit	242 Tone(20M)
	Specific Resource Unit	61
IEEE 802.11ax(HEW40)	Resource Unit	484 Tone(40M)
	Specific Resource Unit	65
IEEE 802.11ax(HEW80)	Resource Unit	996 Tone(80M)
	Specific Resource Unit	67

Remark: IEEE 802.11ax mode only supports the highest tone, so the highest tone was evaluated and measured inside report.

4. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Dipole	N/A	4.82	UNII-1
2	N/A	N/A	Dipole	N/A	4.82	UNII-1
1	N/A	N/A	Dipole	N/A	5.92	UNII-3
2	N/A	N/A	Dipole	N/A	5.92	UNII-3

Note:

This EUT supports CDD, and all antennas have the same gain, then the Directional gain = $G_{ANT} + \text{Array Gain}$,

a) For UNII-1:

For power measurements, Array Gain = 0 dB ($N_{ANT} \leq 4$), so the Directional gain=4.82.

For power spectral density measurements, $N_{ANT} = 2$, $N_{SS} = 1$. So Directional gain = $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})$ dB = $4.82 + 10\log(2/1)$ dBi=7.83. Then, the power spectral density limit is $17 - (7.83 - 6) = 15.17$.

b) For UNII-3:

For power measurements, Array Gain = 0 dB ($N_{ANT} \leq 4$), so the Directional gain=5.92.

For power spectral density measurements, $N_{ANT} = 2$, $N_{SS} = 1$. So Directional gain = $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})$ dB = $5.92 + 10\log(2/1)$ dBi=8.93. Then, the power spectral density limit is $30 - (8.93 - 6) = 27.07$.

5. Table for Antenna Configuration:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n (HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n (HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW80)		V (Ant. 1 + Ant. 2)

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 8	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 9	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 10	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 12	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 13	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 14	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 15	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 16	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 17	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 18	TX AX (HEW80) Mode / CH155 (UNII-3)
Mode 19	TX AX (HEW80) Mode / CH155 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 19	TX AX (HEW80) Mode / CH155 (UNII-3)

Radiated emissions test – Below 1GHz	
Final Test Mode	Description
Mode 19	TX AX (HEW80) Mode / CH155 (UNII-3)

Radiated emissions test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 8	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 9	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 10	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 12	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 15	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 16	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 17	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 18	TX AX (HEW80) Mode / CH155 (UNII-3)

Output Power test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 8	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 9	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 10	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 12	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 13	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 14	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 15	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 16	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 17	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 18	TX AX (HEW80) Mode / CH155 (UNII-3)

Other Conducted test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 8	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 9	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 10	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 12	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 15	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 16	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 17	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 18	TX AX (HEW80) Mode / CH155 (UNII-3)

Note:

- (1) For radiated emission below 1 GHz test, the IEEE 802.11ax80 channel 155 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) The measurements for Output Power were tested, the worst case were IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode, IEEE 802.11ax(HEW20) mode, IEEE 802.11ax(HEW40) mode and IEEE 802.11ax(HEW80), only the worst case were documented for other test items.
- (4) For radiated emissions, the TX WLAN 2.4G B Mode 2437MHz + WLAN 5G A Mode 5785MHz was found the worst case of simultaneous transmission and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software	accessMTool_REL_3_1_0_4		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	78	80	80
IEEE 802.11n (HT20)	77	80	81
IEEE 802.11ac (VHT20)	77	80	81
IEEE 802.11ax (HEW20)	76	79	80
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	69	82	
IEEE 802.11ac (VHT40)	69	81	
IEEE 802.11ax (HEW40)	67	81	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	69		
IEEE 802.11ax (HEW80)	62		

UNII-3			
Test Software	accessMTool_REL_3_1_0_4		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	84	76	72
IEEE 802.11n (HT20)	82	80	80
IEEE 802.11ac (VHT20)	82	80	80
IEEE 802.11ax (HEW20)	81	80	80
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	88	88	
IEEE 802.11ac (VHT40)	89	89	
IEEE 802.11ax (HEW40)	88	88	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	89		
IEEE 802.11ax (HEW80)	89		

2.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

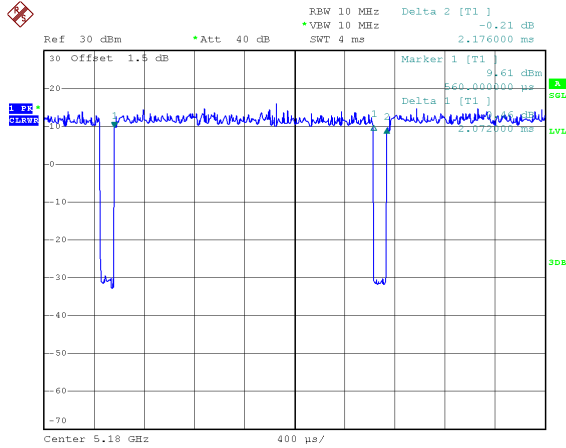

Date: 1.JUN.2020 20:37:41

Duty cycle = $2.072 \text{ ms} / 2.176 \text{ ms} = 95.22\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.21$


IEEE 802.11n (HT20)

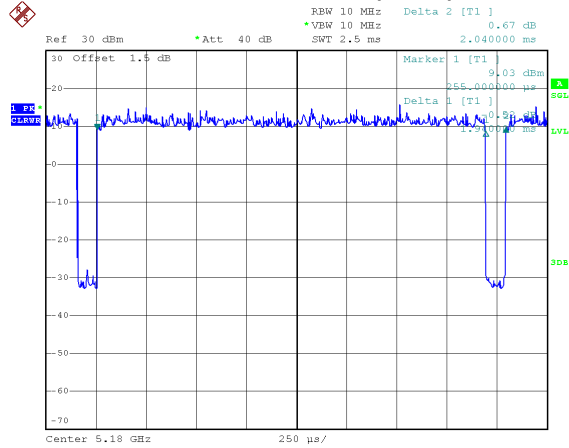

Date: 1.JUN.2020 20:38:10

Duty cycle = $1.940 \text{ ms} / 2.040 \text{ ms} = 95.10\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.22$


IEEE 802.11n (HT40)

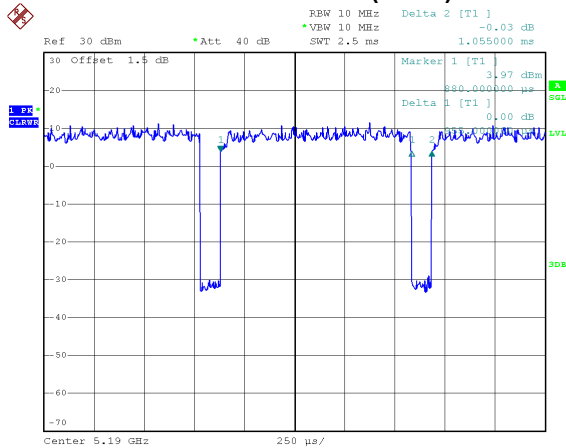

Date: 1.JUN.2020 20:39:02

Duty cycle = $0.955 \text{ ms} / 1.055 \text{ ms} = 90.52\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.43$


IEEE 802.11ac (VHT20)

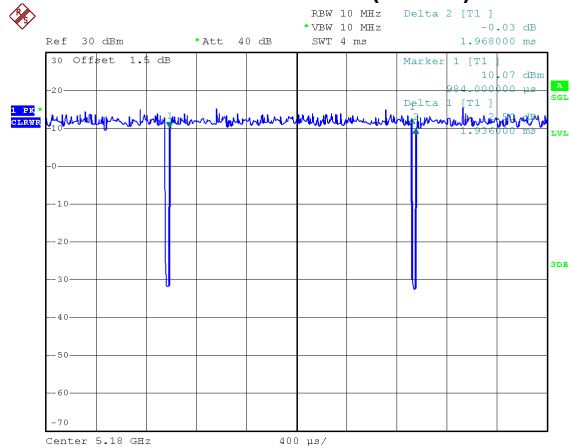

Date: 1.JUN.2020 20:38:36

Duty cycle = $1.936 \text{ ms} / 1.968 \text{ ms} = 98.37\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$


IEEE 802.11ac (VHT40)

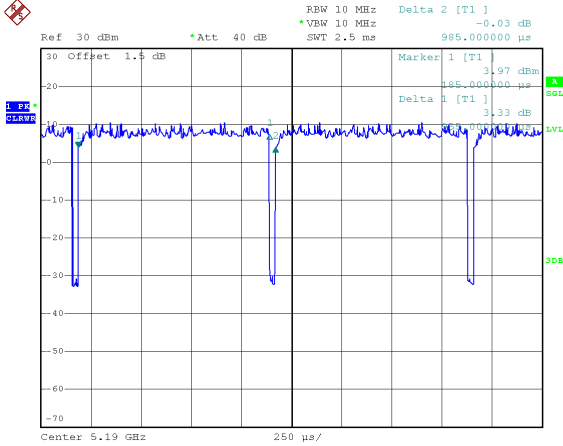

Date: 1.JUN.2020 20:39:24

Duty cycle = 0.955 ms / 0.985 ms = 96.95%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.13$


IEEE 802.11ac (VHT80)

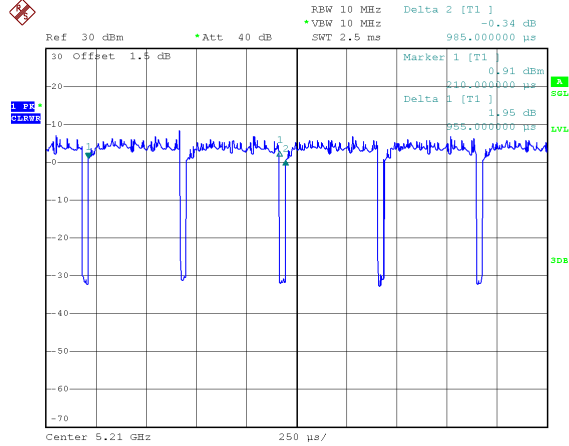

Date: 1.JUN.2020 20:39:51

Duty cycle = 0.955 ms / 0.985 ms = 96.95%
 Duty Factor = $10 * \log(1 / \text{Duty cycle}) = 0.13$


IEEE 802.11ax (HEW20)

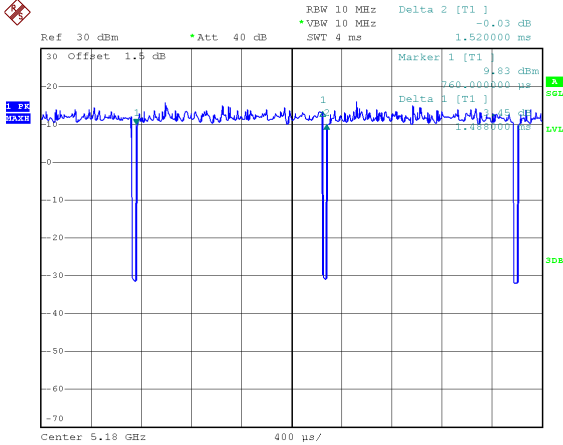

Date: 1.JUN.2020 20:41:38

Duty cycle = 1.488 ms / 1.520 ms = 97.89%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.09$


IEEE 802.11ax (HEW40)

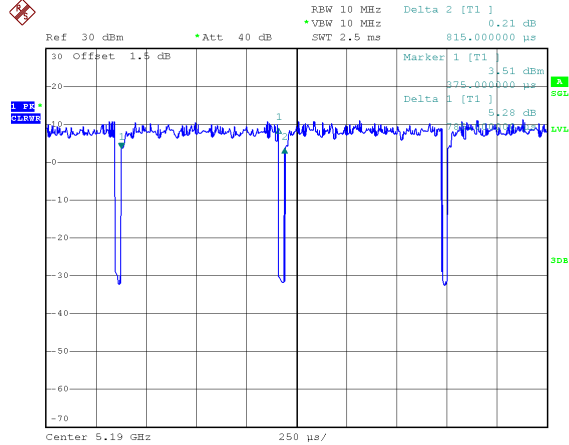

Date: 1.JUN.2020 20:41:59

Duty cycle = 0.785 ms / 0.815 ms = 96.32%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.16$

IEEE 802.11ax (HEW80)

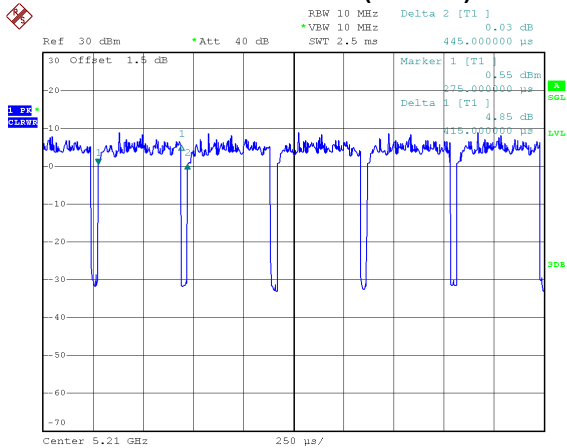


Date: 1.JUN.2020 20:42:16

Duty cycle = $0.415 \text{ ms} / 0.445 \text{ ms} = 93.26\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.30$

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20), IEEE 802.11ac (VHT20) and IEEE 802.11ax (HEW20):
 For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).
 For IEEE 802.11n (HT40), IEEE 802.11ac (VHT40) and IEEE 802.11ax (HEW40):
 For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).
 For IEEE 802.11ac (VHT80) and IEEE 802.11ax (HEW80):
 For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

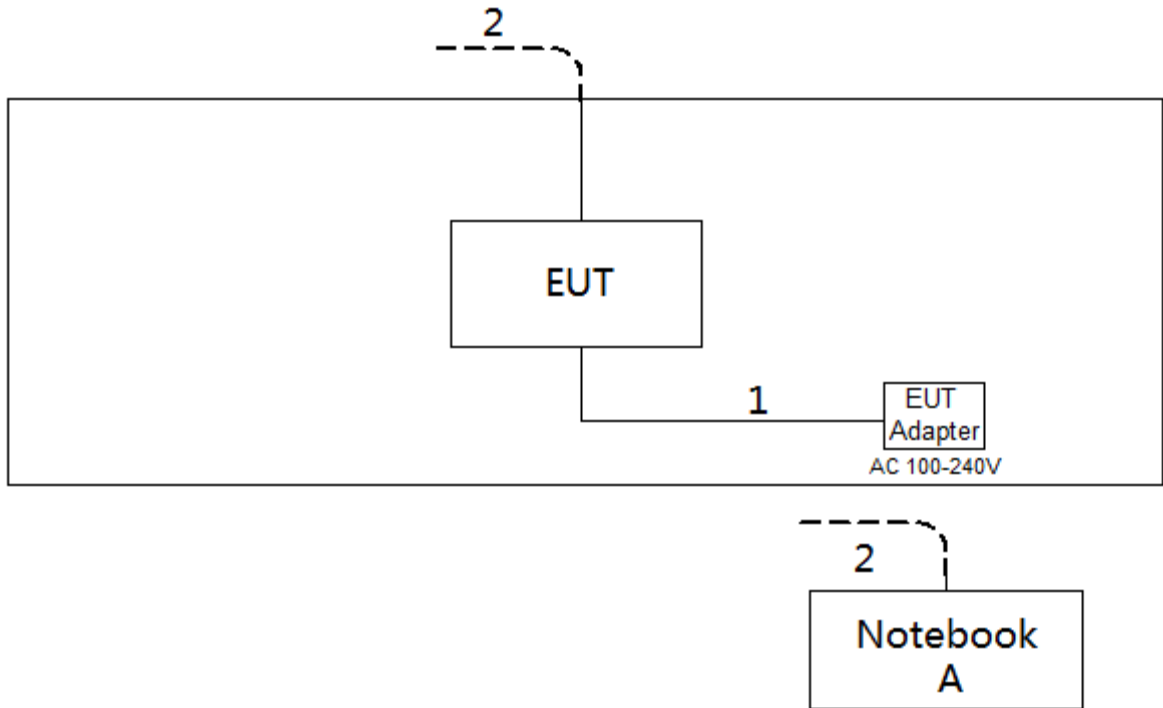

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBµV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

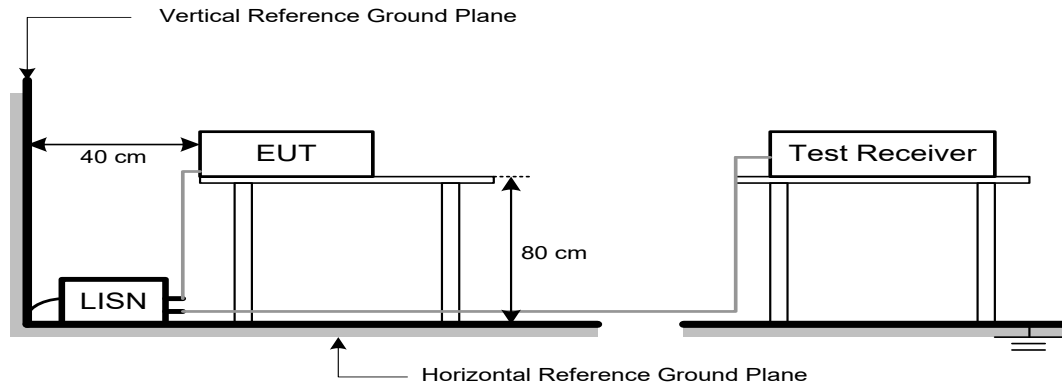

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

For WLAN 2.4GHz:

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

For WLAN 5GHz:

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBµV/m)
5150-5250	-27	68.3
5725-5850	-27 NOTE (2)	68.3
	10 NOTE (2)	105.3
	15.6 NOTE (2)	110.9
	27 NOTE (2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (3) The limit for radiated test was performed according to FCC PART 15C & FCC PART 15E.


4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

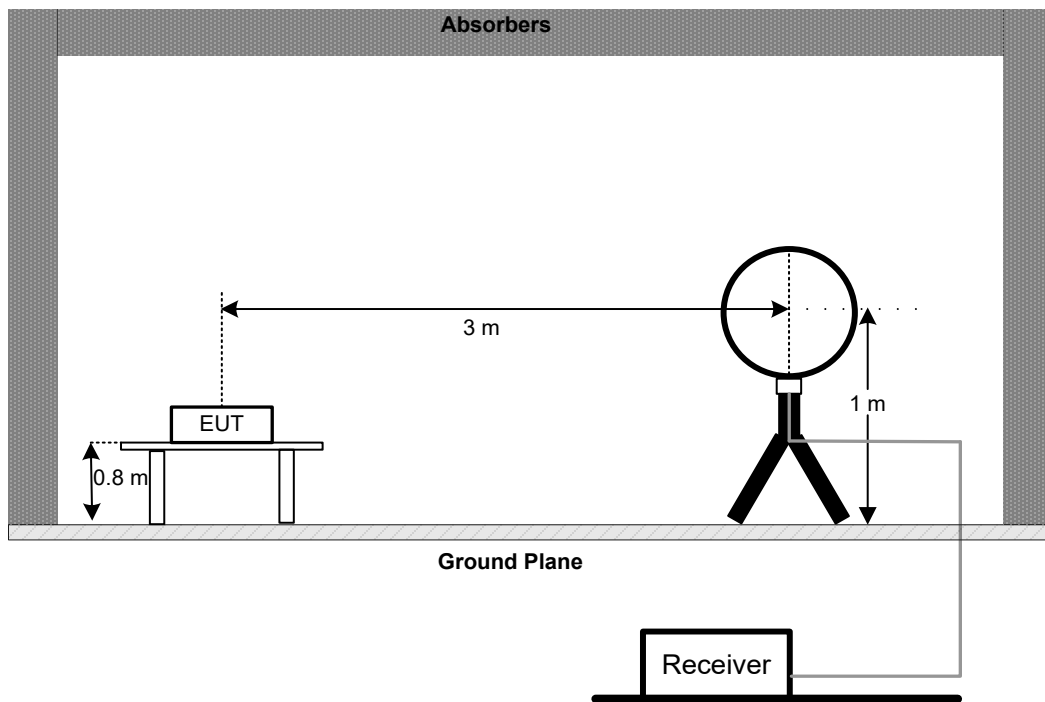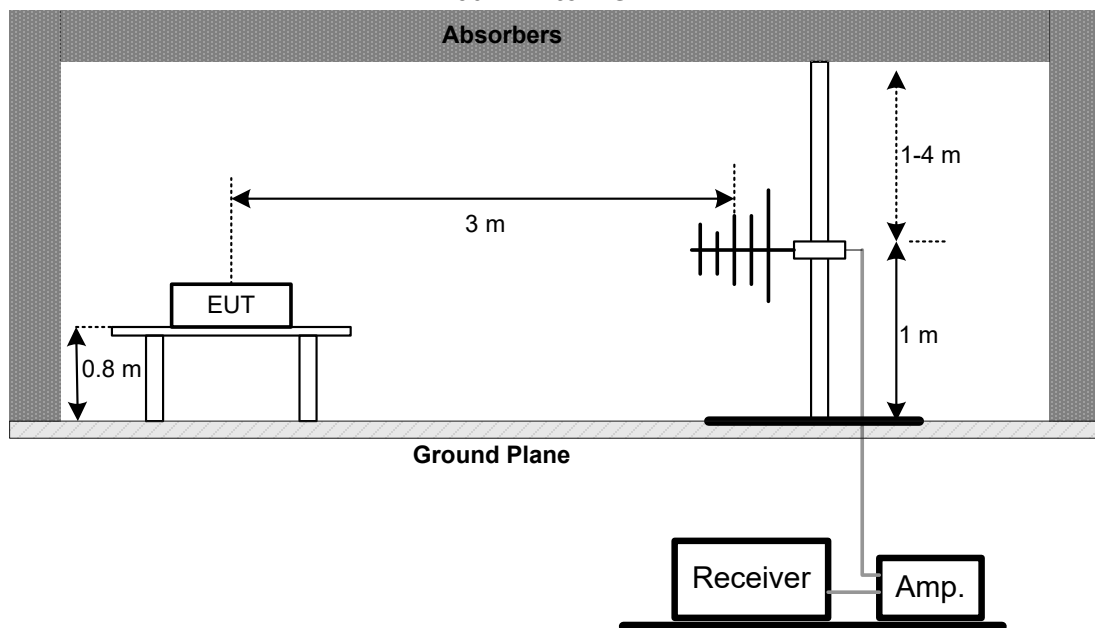4.4 TEST SETUP**9 kHz to 30 MHz****30 MHz to 1 GHz**

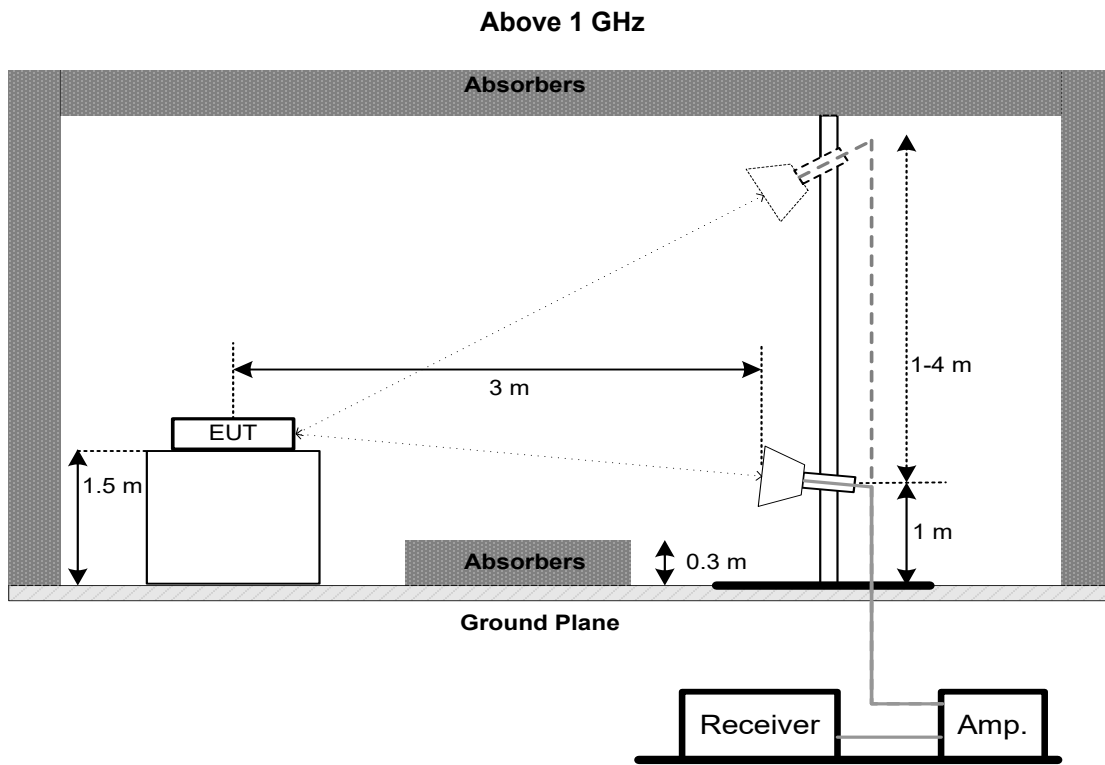

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ to 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	-	5150-5250
15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5725-5850

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz and 40 MHz) 1 MHz (Bandwidth 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz and 40 MHz) 3 MHz (Bandwidth 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (24 dBm)	5150-5250
		1 Watt (30dBm)	5725-5850

Note:

- a. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY TEST

7.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		30 dBm/500 kHz	5725-5850

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW.
2. The value measured with RBW=100kHz is to be added with $10\log(500\text{ kHz}/100\text{kHz})$ which is +7 dB. During the test, the offset has added 7 dB, For example, if the offset value is +2dB , then the converted value will be $2+7=9\text{dB}$ using RBW=100kHz.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. FREQUENCY STABILITY MEASUREMENT

8.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5725-5850

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is -5°C~40°C.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

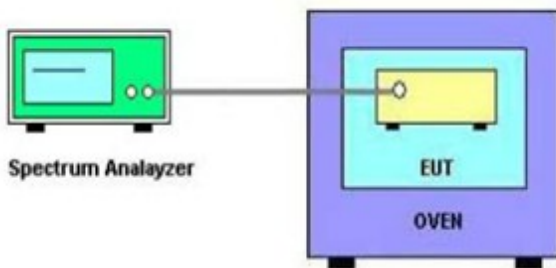

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2021
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EM	EM-6876-1	230	Apr. 16, 2021
2	Cable	N/A	RG 213/U	N/A	May 29, 2021
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2*	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 12, 2021
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 23, 2021
3	Amplifier	Agilent	8449B	3008A02333	Mar. 01, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 07, 2021
5	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6 000	N/A	May 09, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Band Reject Filter	Micro-Tronics	BRC50705-01	10	Feb. 28, 2021
11	Band Reject Filter	Micro-Tronics	BRC50703-01	7	Feb. 28, 2021
12	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020
2	RF Cable	Tongkaichuan	N/A	N/A	N/A
3	DC Block	Mini	N/A	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 03, 2020
2	Wideband power sensor	Keysight	N1923A	MY58310004	Aug. 03, 2020
3	RF Cable	Tongkaichuan	N/A	N/A	N/A

Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020
2	Const Temp. & Humidity Chamber	CEPREI	CEEC-M64T-40	15-008	Feb. 28, 2021
3	RF Cable	Tongkaichuan	N/A	N/A	N/A
4	DC Block	Mini	N/A	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

"**" calibration period of equipment list is three year.


Except * item, all calibration period of equipment list is one year.

10. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**

Radiated Emissions Test Photos**9 kHz to 30 MHz**

Radiated Emissions Test Photos

30 MHz to 1 GHz

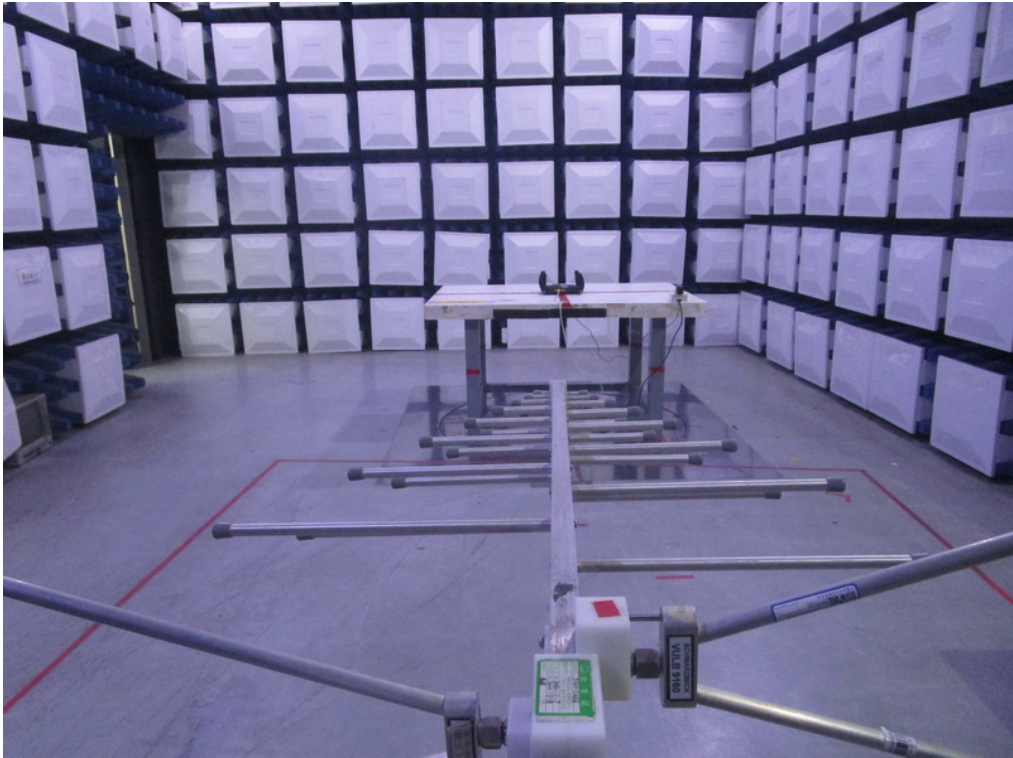


Radiated Emissions Test Photos

Above 1 GHz



APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Voltage:	AC 120V/60Hz
Test Mode:	TX AX80 MODE CHANNEL 155

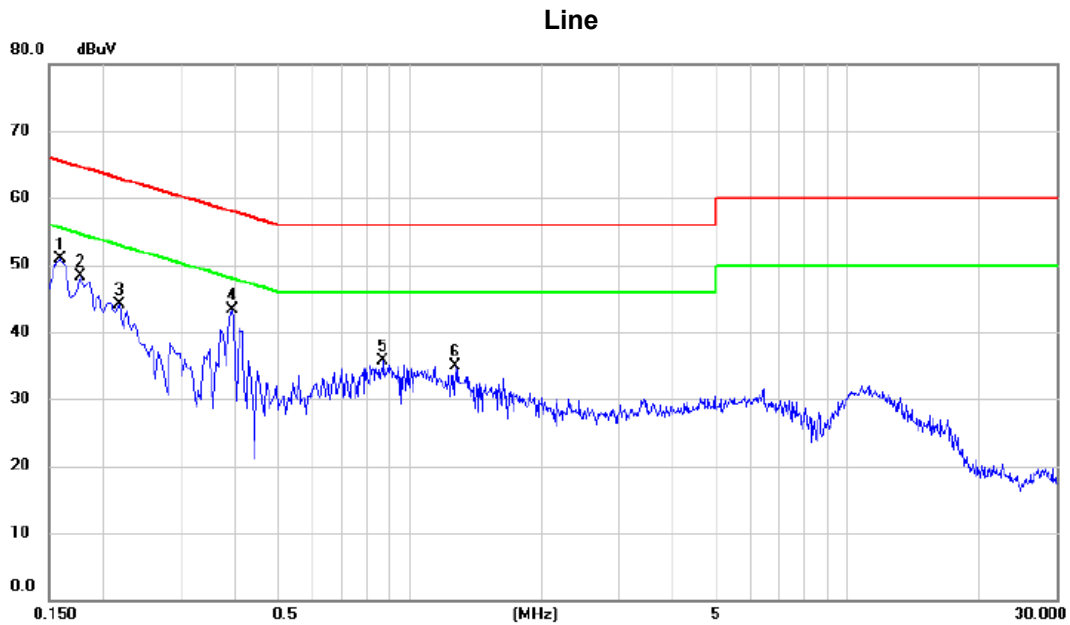


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	41.13	9.73	50.86	65.52	-14.66	peak	
2		0.1770	38.53	9.84	48.37	64.63	-16.26	peak	
3		0.2175	34.19	9.90	44.09	62.91	-18.82	peak	
4	*	0.3930	33.46	9.92	43.38	58.00	-14.62	peak	
5		0.8700	25.73	10.00	35.73	56.00	-20.27	peak	
6		1.2705	24.91	10.03	34.94	56.00	-21.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX AX80 MODE CHANNEL 155

Neutral

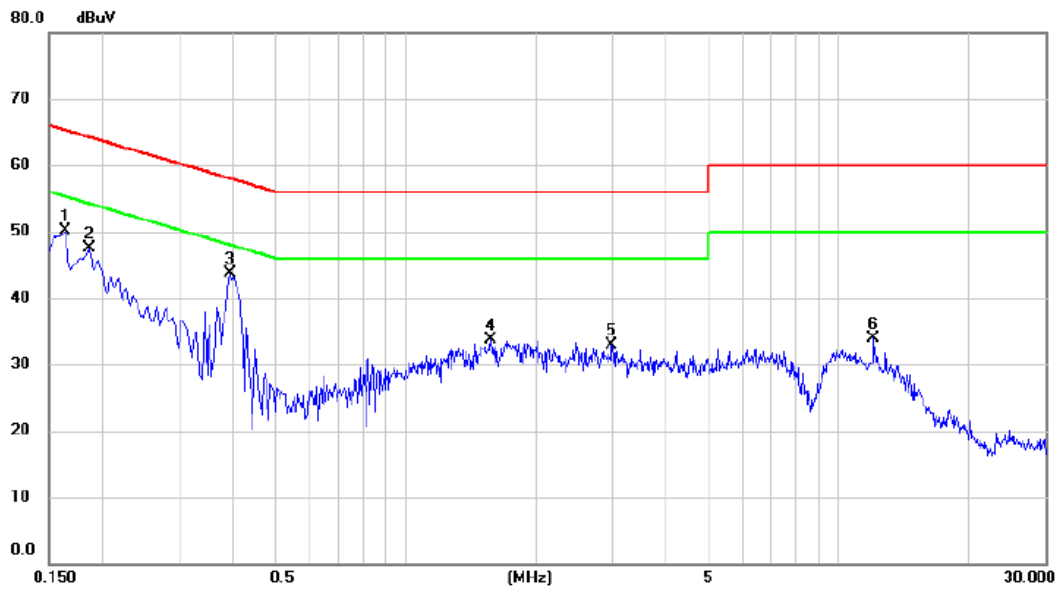


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1635	40.24	9.85	50.09	65.28	-15.19	peak	
2		0.1860	37.58	9.95	47.53	64.21	-16.68	peak	
3	*	0.3930	33.52	10.09	43.61	58.00	-14.39	peak	
4		1.5765	23.32	10.37	33.69	56.00	-22.31	peak	
5		2.9940	22.46	10.52	32.98	56.00	-23.02	peak	
6		12.0390	22.87	11.08	33.95	60.00	-26.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Voltage:	AC 240V/50Hz
Test Mode:	TX AX80 MODE CHANNEL 155

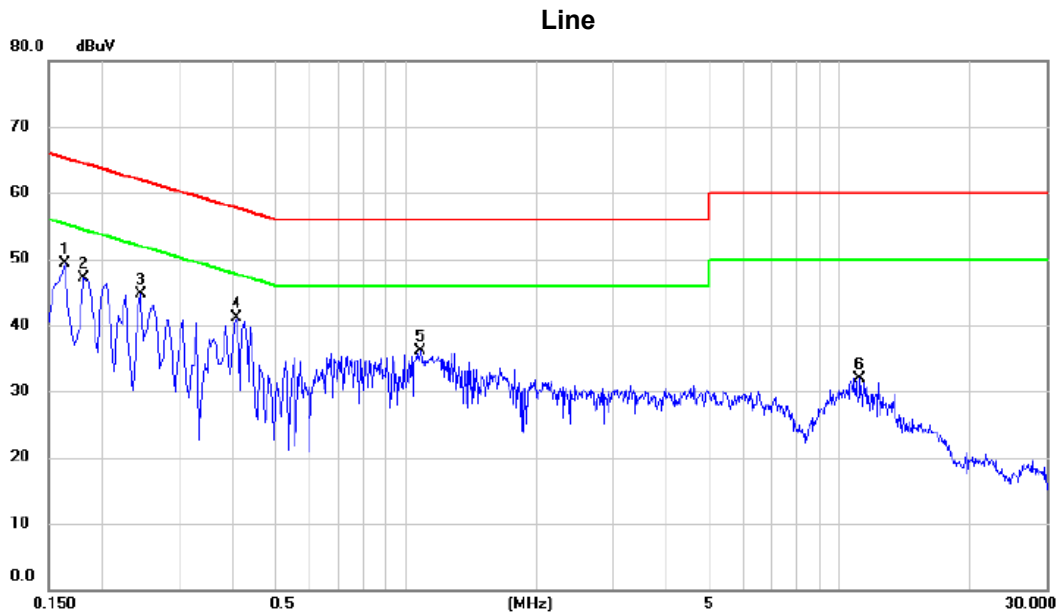


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1635	39.48	9.77	49.25	65.28	-16.03	peak	
2		0.1815	37.18	9.85	47.03	64.42	-17.39	peak	
3		0.2445	34.76	9.87	44.63	61.94	-17.31	peak	
4		0.4065	31.14	9.92	41.06	57.72	-16.66	peak	
5		1.0815	25.99	10.02	36.01	56.00	-19.99	peak	
6		11.1570	21.21	10.75	31.96	60.00	-28.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Voltage:	AC 240V/50Hz
Test Mode:	TX AX80 MODE CHANNEL 155

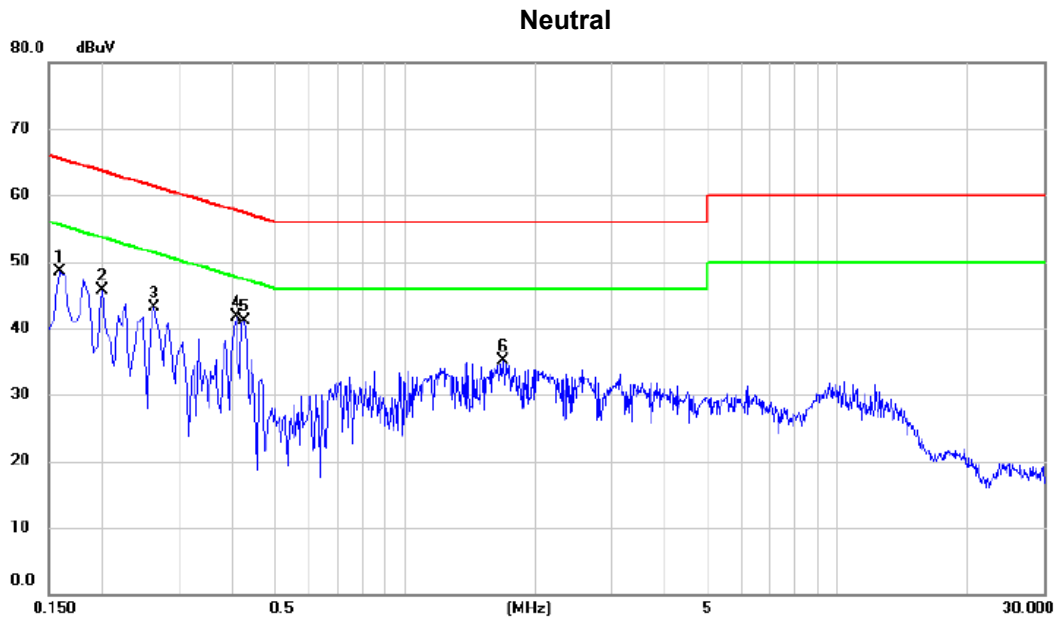

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	38.78	9.81	48.59	65.52	-16.93	peak	
2		0.1995	35.78	10.01	45.79	63.63	-17.84	peak	
3		0.2625	33.21	9.99	43.20	61.35	-18.15	peak	
4	*	0.4065	31.55	10.09	41.64	57.72	-16.08	peak	
5		0.4245	31.09	10.10	41.19	57.36	-16.17	peak	
6		1.6890	24.67	10.39	35.06	56.00	-20.94	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX AX80 MODE CHANNEL 155

Ant 0°

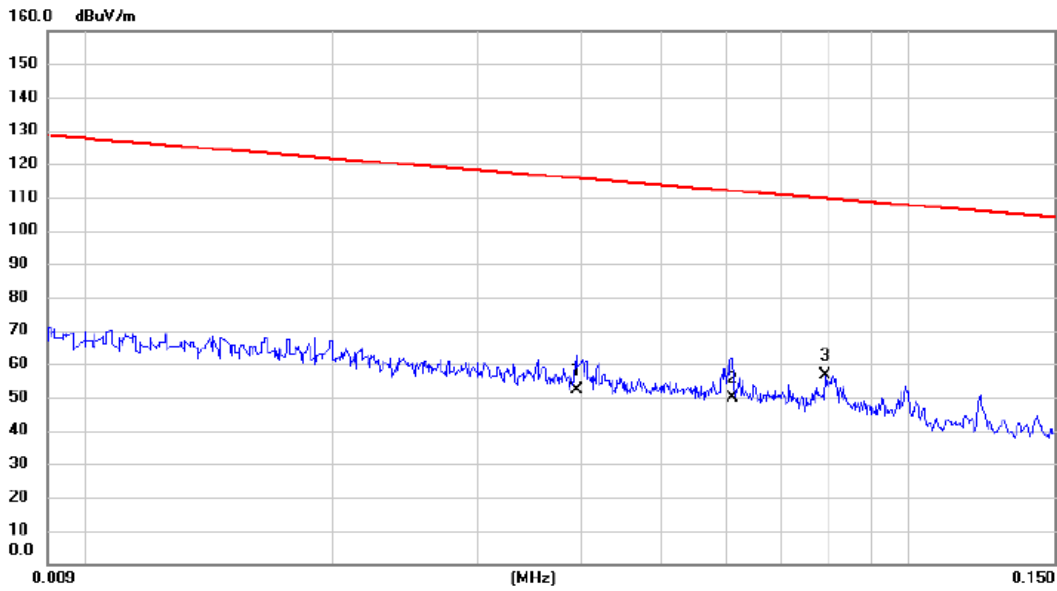


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1		0.0395	31.25	21.00	52.25	115.67	-63.42	AVG	
2		0.0610	28.76	20.97	49.73	111.90	-62.17	AVG	
3	*	0.0792	35.54	20.99	56.53	109.63	-53.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX80 MODE CHANNEL 155

Ant 0°

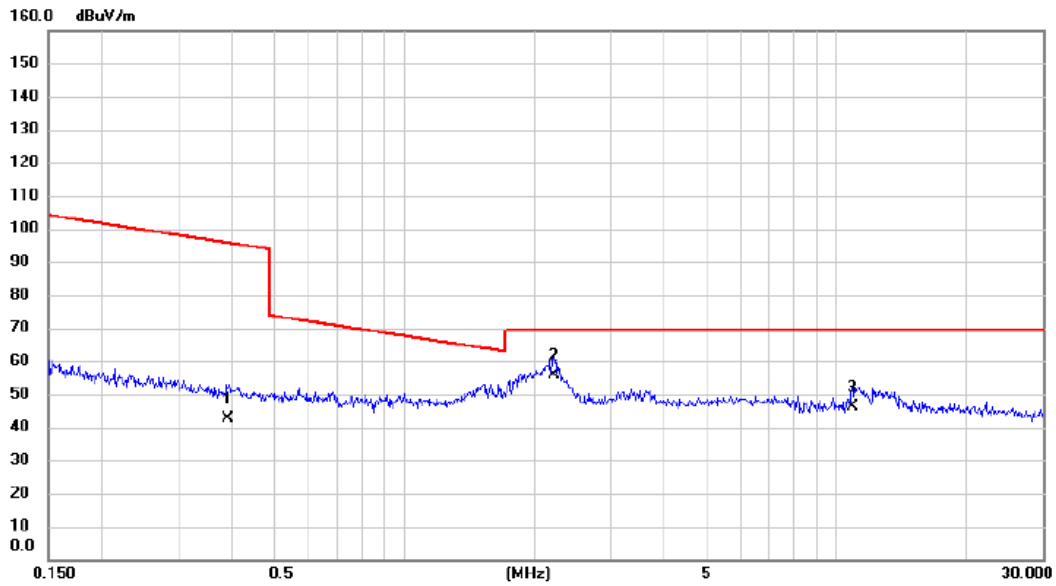


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3893	21.64	20.80	42.44	95.80	-53.36	AVG	
2	*	2.2250	33.85	21.84	55.69	69.54	-13.85	QP	
3		10.9050	23.82	22.45	46.27	69.54	-23.27	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX80 MODE CHANNEL 155

Ant 90°

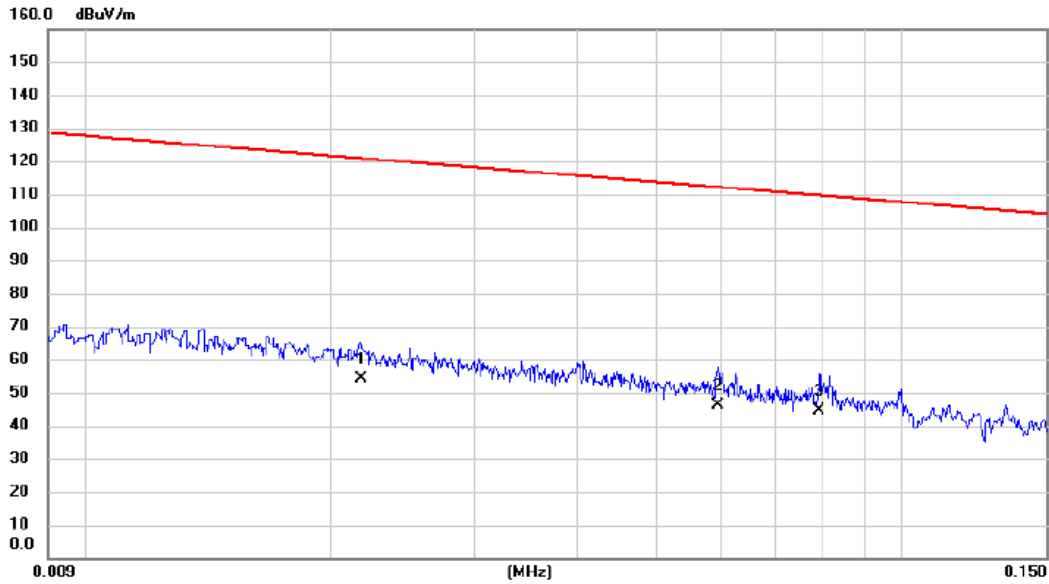


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0218	33.09	21.11	54.20	120.84	-66.64	AVG	
2		0.0594	25.36	20.97	46.33	112.13	-65.80	AVG	
3	*	0.0792	23.57	20.99	44.56	109.63	-65.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX80 MODE CHANNEL 155

Ant 90°

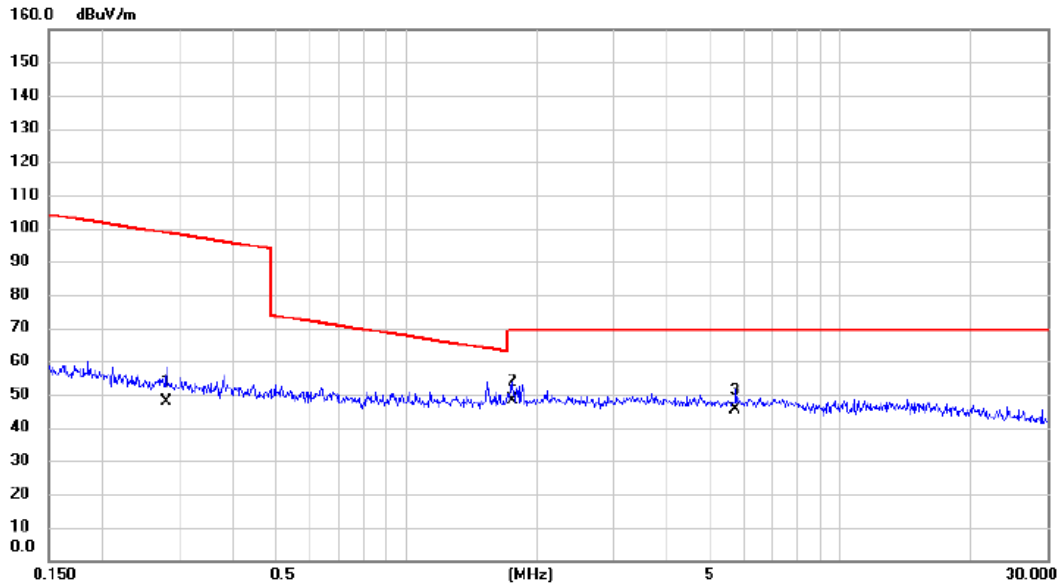


No. Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2803	26.84	20.85	47.69	98.65	-50.96	AVG	
2 *	1.7530	26.42	21.76	48.18	69.54	-21.36	QP	
3	5.7437	23.51	21.84	45.35	69.54	-24.19	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ

Test Mode: TX AX80 MODE CHANNEL 155

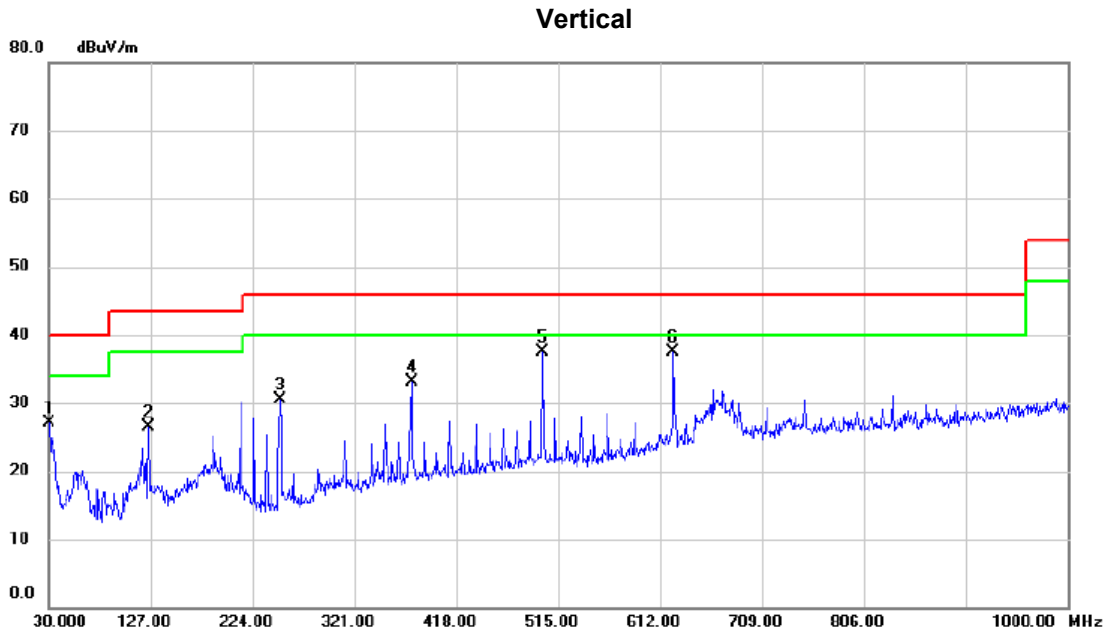


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.970	41.69	-14.55	27.14	40.00	-12.86	peak	
2		125.060	39.22	-12.74	26.48	43.50	-17.02	peak	
3		250.190	43.74	-13.28	30.46	46.00	-15.54	peak	
4		375.320	42.67	-9.59	33.08	46.00	-12.92	peak	
5	*	500.450	44.83	-7.27	37.56	46.00	-8.44	peak	
6		624.610	42.30	-4.82	37.48	46.00	-8.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX80 MODE CHANNEL 155

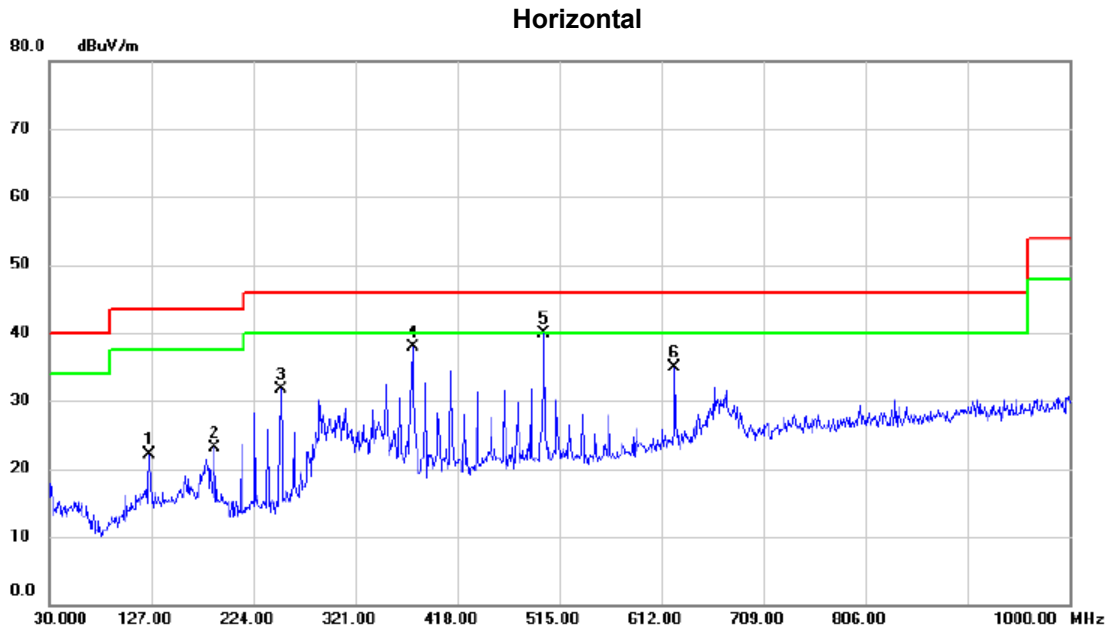


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		125.060	34.89	-12.74	22.15	43.50	-21.35	peak	
2		187.140	36.83	-13.72	23.11	43.50	-20.39	peak	
3		250.190	44.90	-13.28	31.62	46.00	-14.38	peak	
4		375.320	47.44	-9.59	37.85	46.00	-8.15	peak	
5	*	500.450	47.17	-7.27	39.90	46.00	-6.10	peak	
6		624.610	39.81	-4.82	34.99	46.00	-11.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

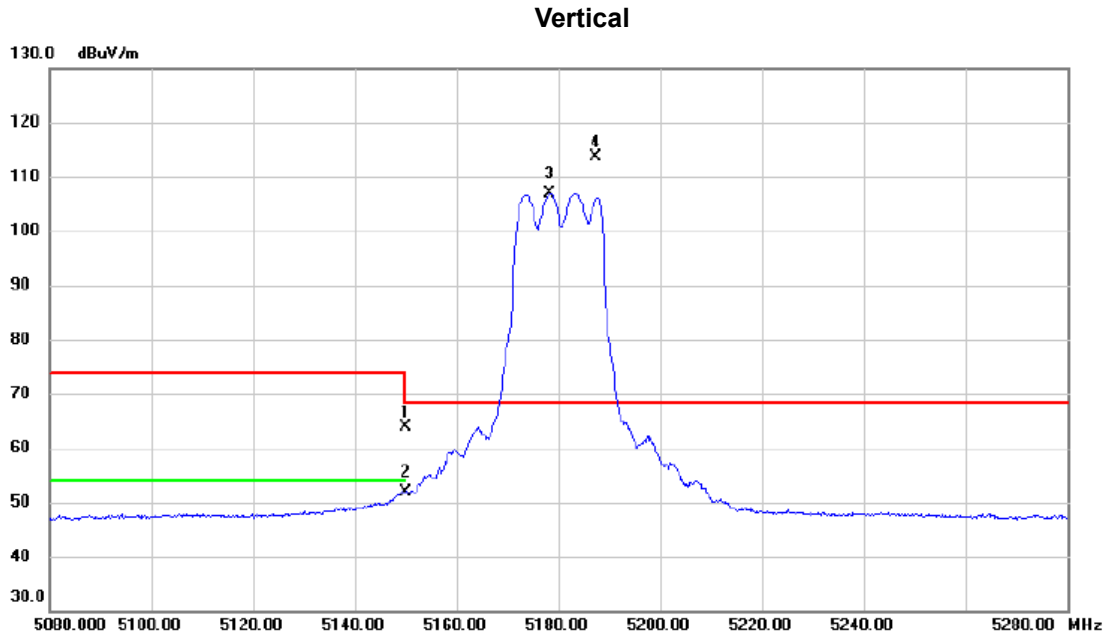

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	46.66	17.17	63.83	74.00	-10.17	peak	
2		5150.000	34.78	17.17	51.95	54.00	-2.05	AVG	
3	X	5178.400	89.78	17.21	106.99	68.30	38.69	AVG	No Limit
4	*	5187.400	96.48	17.22	113.70	68.30	45.40	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

80 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.3040	35.79	13.51	49.30	54.00	-4.70	AVG	
2	10358.3099	47.94	13.51	61.45	68.30	-6.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

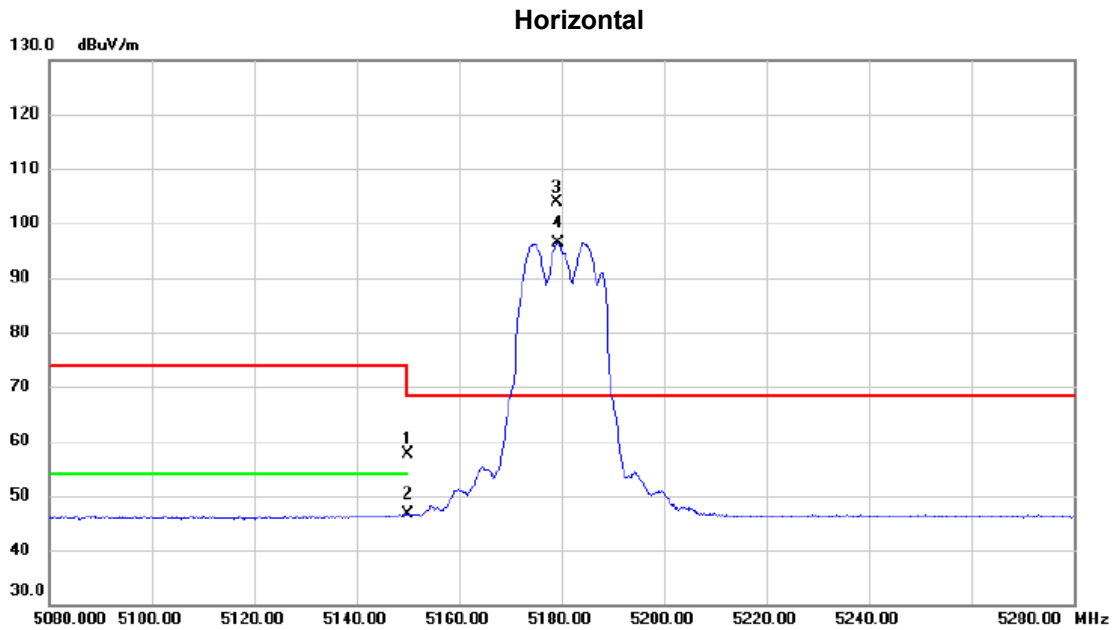

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	41.53	16.15	57.68	74.00	-16.32	peak	
2		5150.000	30.43	16.15	46.58	54.00	-7.42	AVG	
3	*	5179.200	87.67	16.22	103.89	68.30	35.59	peak	No Limit
4	X	5179.400	80.16	16.22	96.38	68.30	28.08	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Horizontal

80 dBuV/m

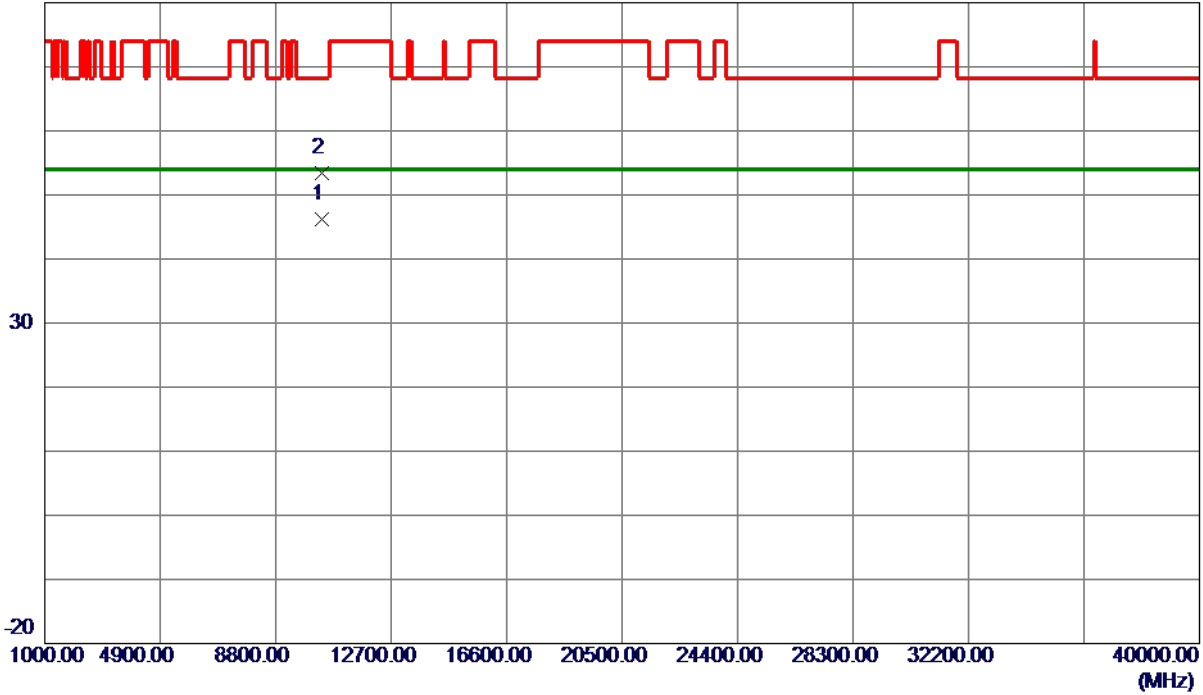


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10361.1710	32.63	13.52	46.15	54.00	-7.85	AVG	
2	10361.2450	39.91	13.52	53.43	68.30	-14.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

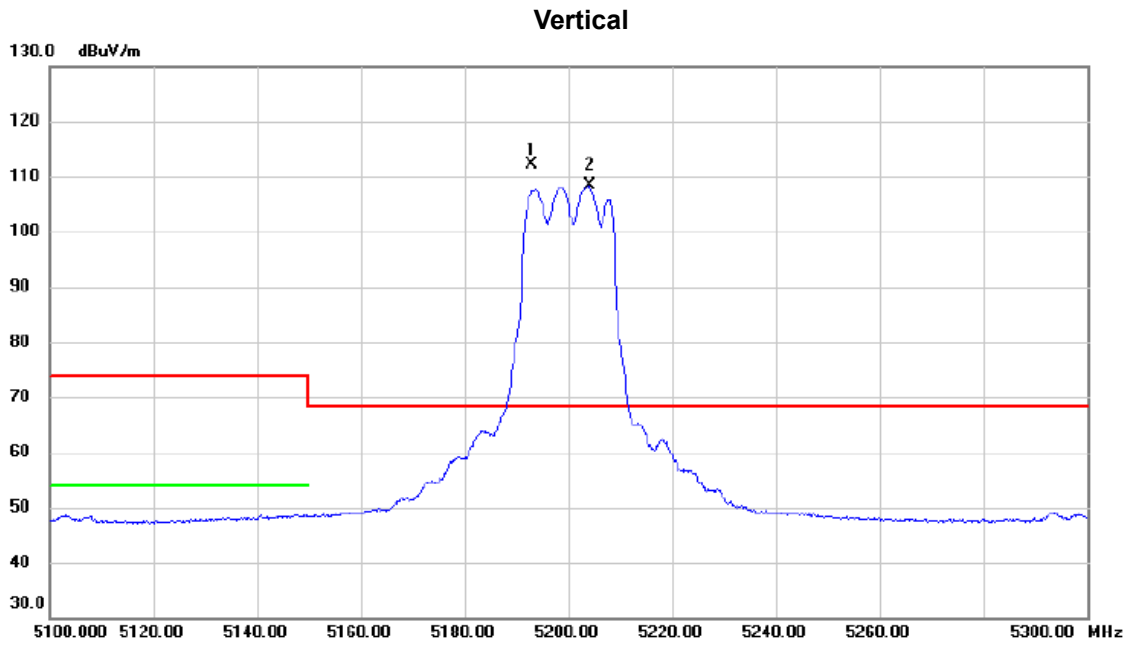

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5192.800	94.82	17.23	112.05	68.30	43.75	peak	No Limit
2	X	5204.000	91.07	17.24	108.31	68.30	40.01	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

80 dBuV/m

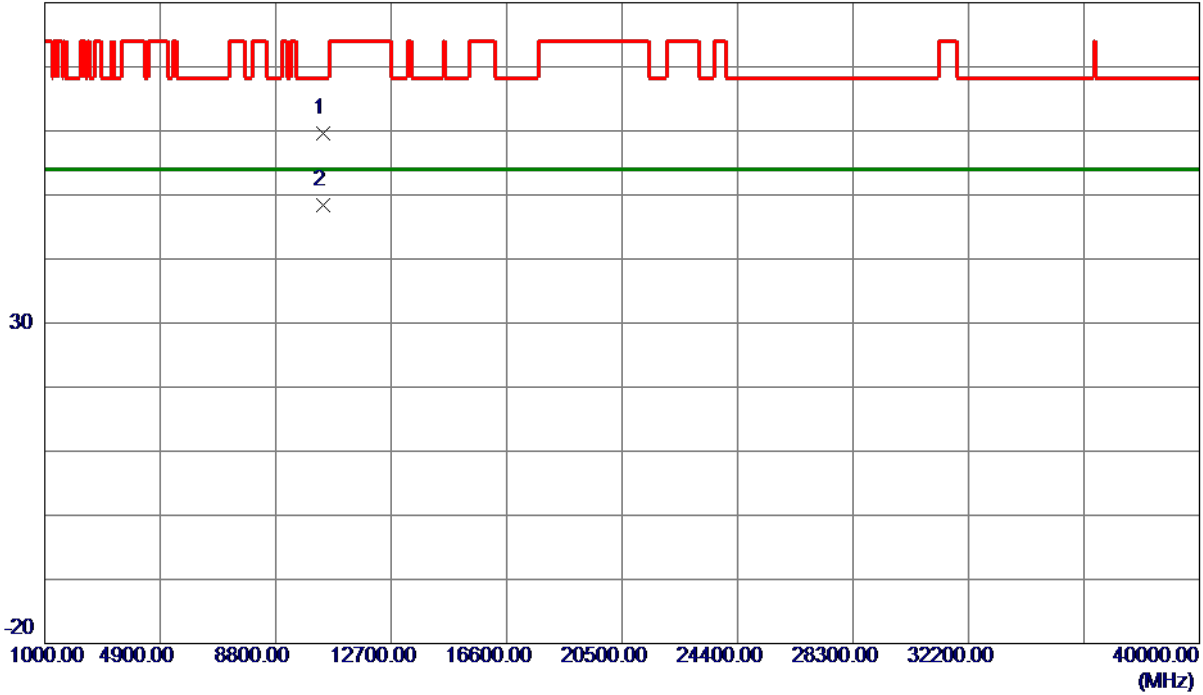


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10398.1750	46.03	13.55	59.58	68.30	-8.72	Peak	
2 *	10398.2570	34.80	13.55	48.35	54.00	-5.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

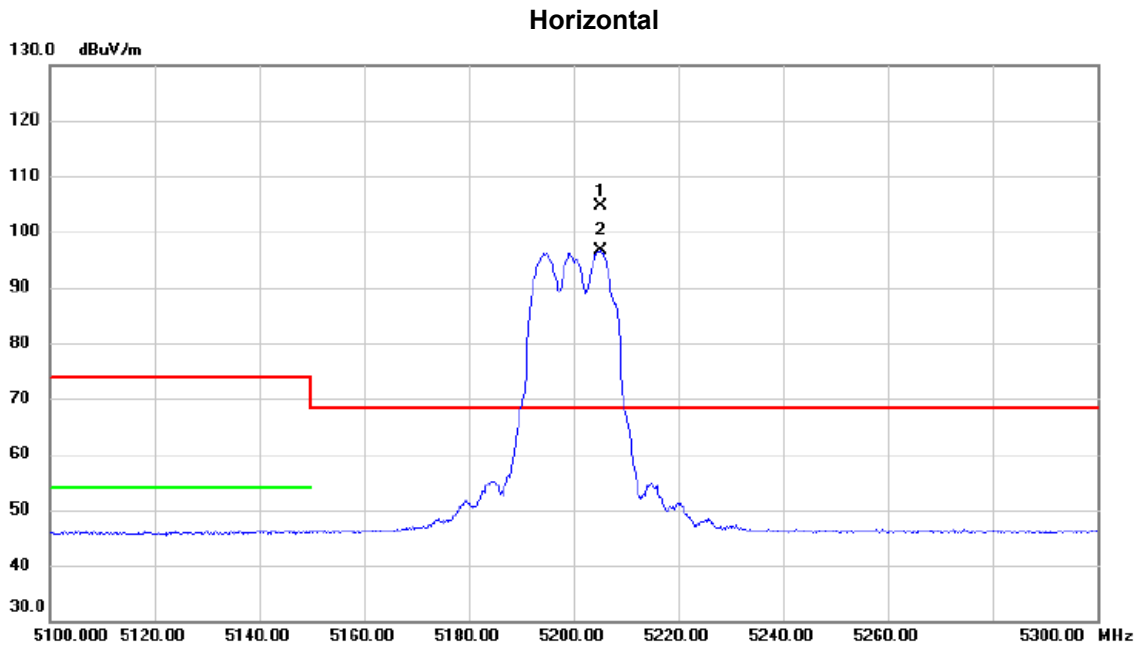


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5205.200	88.33	16.29	104.62	68.30	36.32	peak	No Limit
2	X	5205.200	80.34	16.29	96.63	68.30	28.33	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz


Horizontal

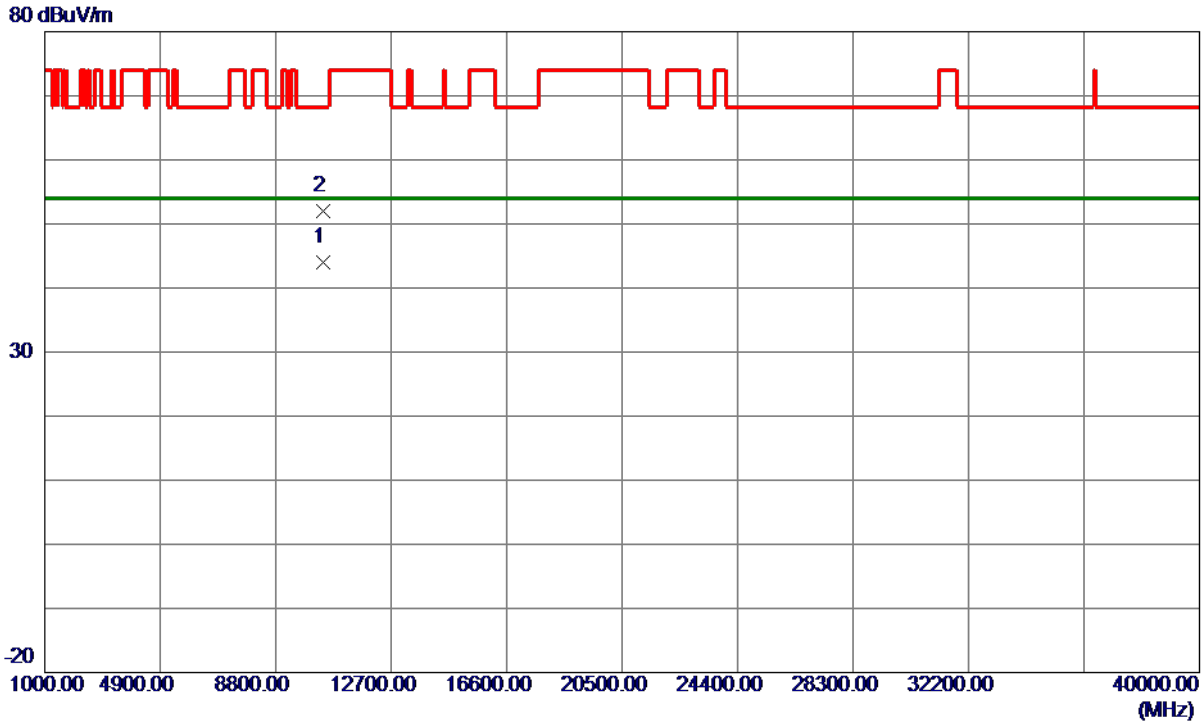

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.5550	30.42	13.55	43.97	54.00	-10.03	AVG	
2	10398.8600	38.45	13.55	52.00	68.30	-16.30	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

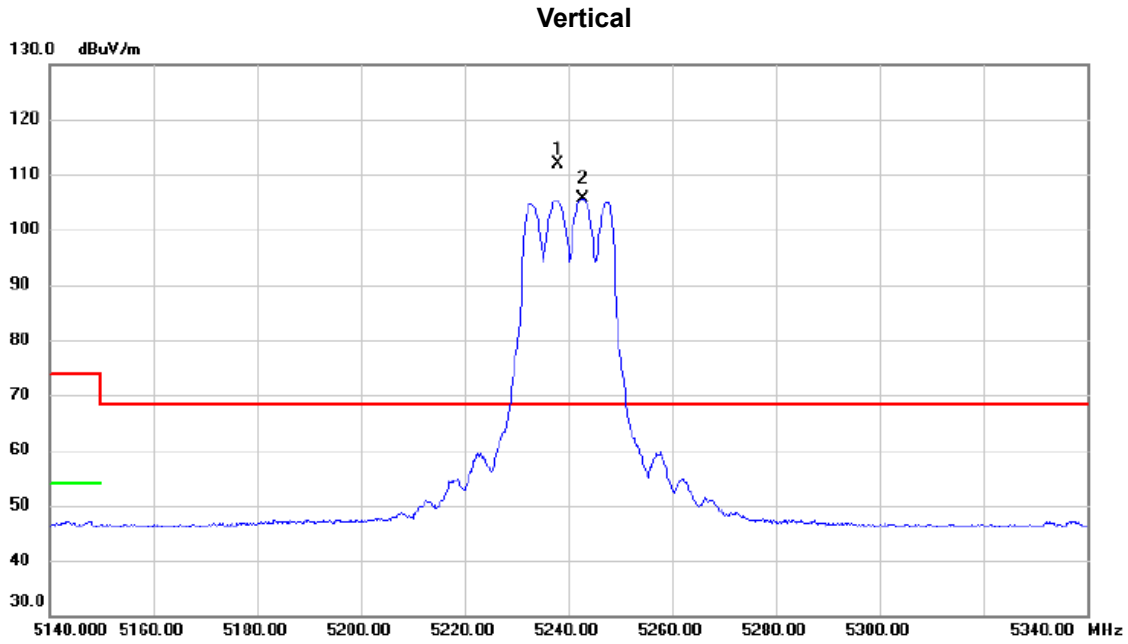

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5238.000	94.61	17.28	111.89	68.30	43.59	peak	No Limit
2	X	5242.800	88.31	17.29	105.60	68.30	37.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

80 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10478.7410	35.23	13.63	48.86	54.00	-5.14	AVG	
2	10478.8600	46.83	13.63	60.46	68.30	-7.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

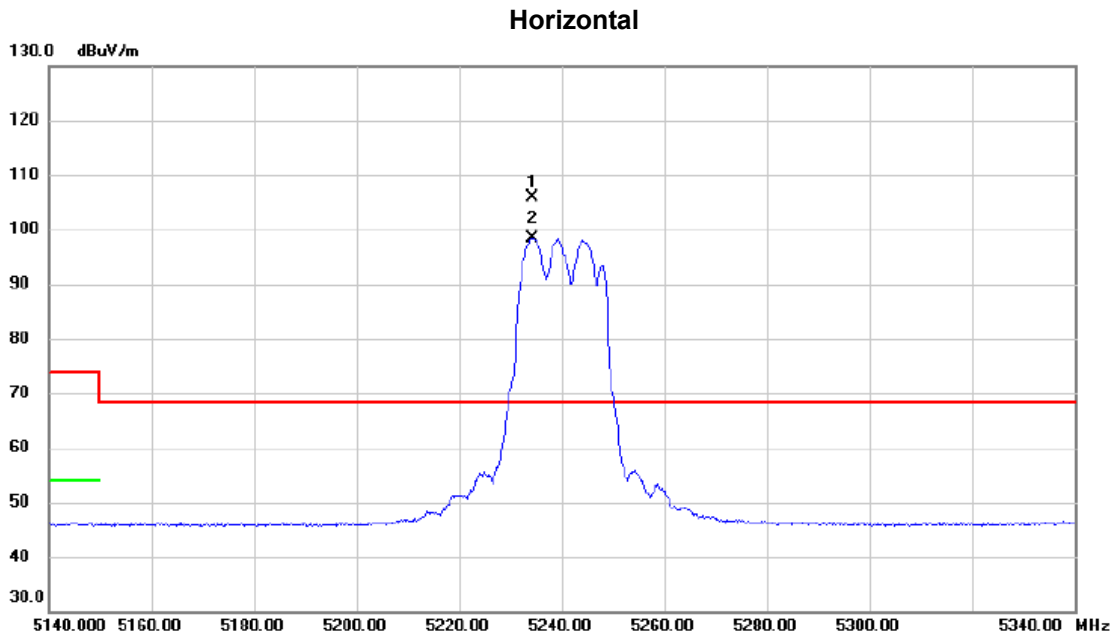

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5234.200	89.51	16.36	105.87	68.30	37.57	peak	No Limit
2	X	5234.400	82.07	16.36	98.43	68.30	30.13	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

80 dBuV/m

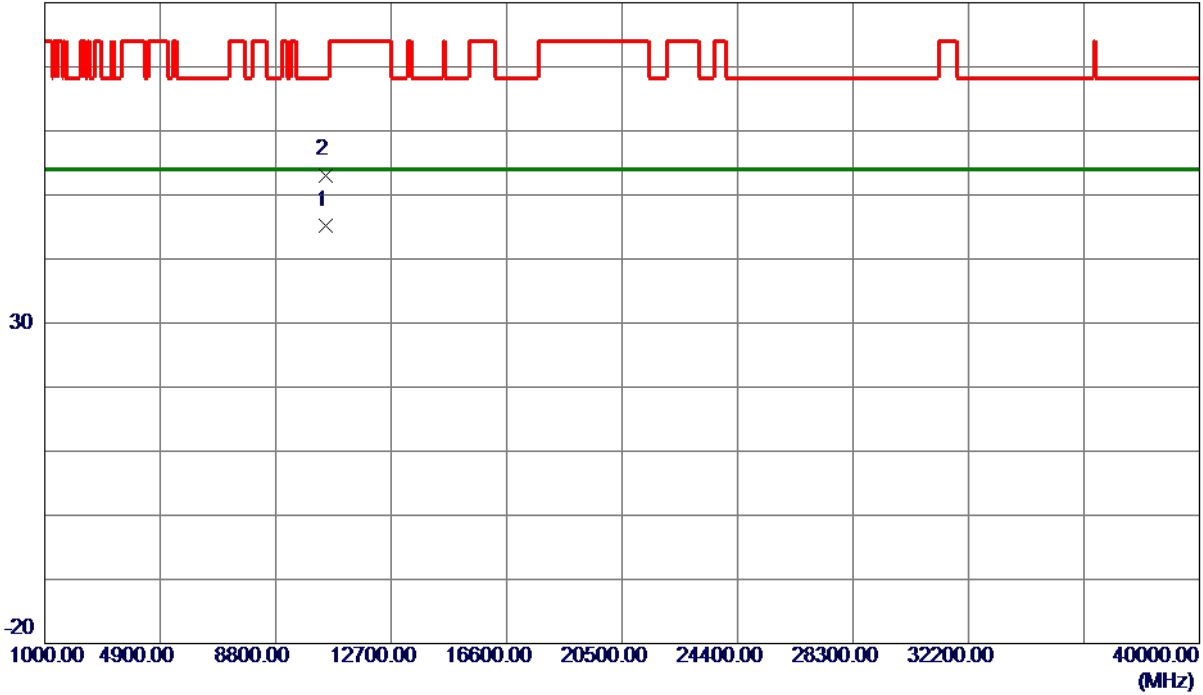


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.6340	31.56	13.63	45.19	54.00	-8.81	AVG	
2	10480.8700	39.47	13.63	53.10	68.30	-15.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

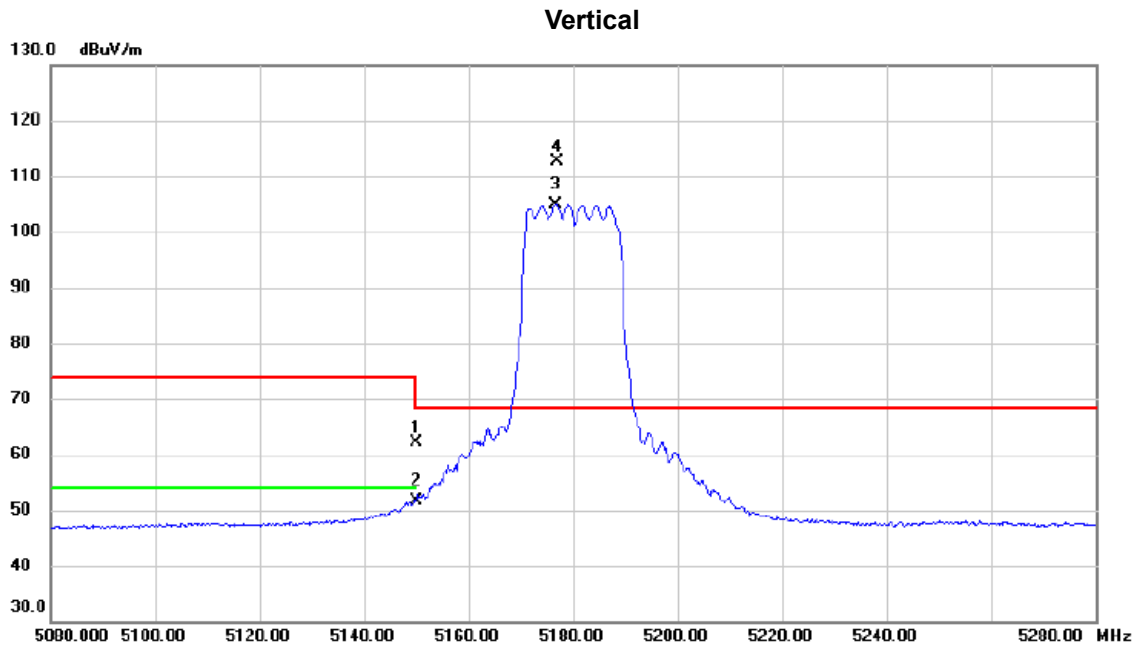


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	46.01	16.15	62.16	74.00	-11.84	peak	
2		5150.000	35.49	16.15	51.64	54.00	-2.36	AVG	
3	X	5176.600	88.57	16.22	104.79	68.30	36.49	AVG	No Limit
4	*	5177.000	96.52	16.22	112.74	68.30	44.44	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz


Vertical

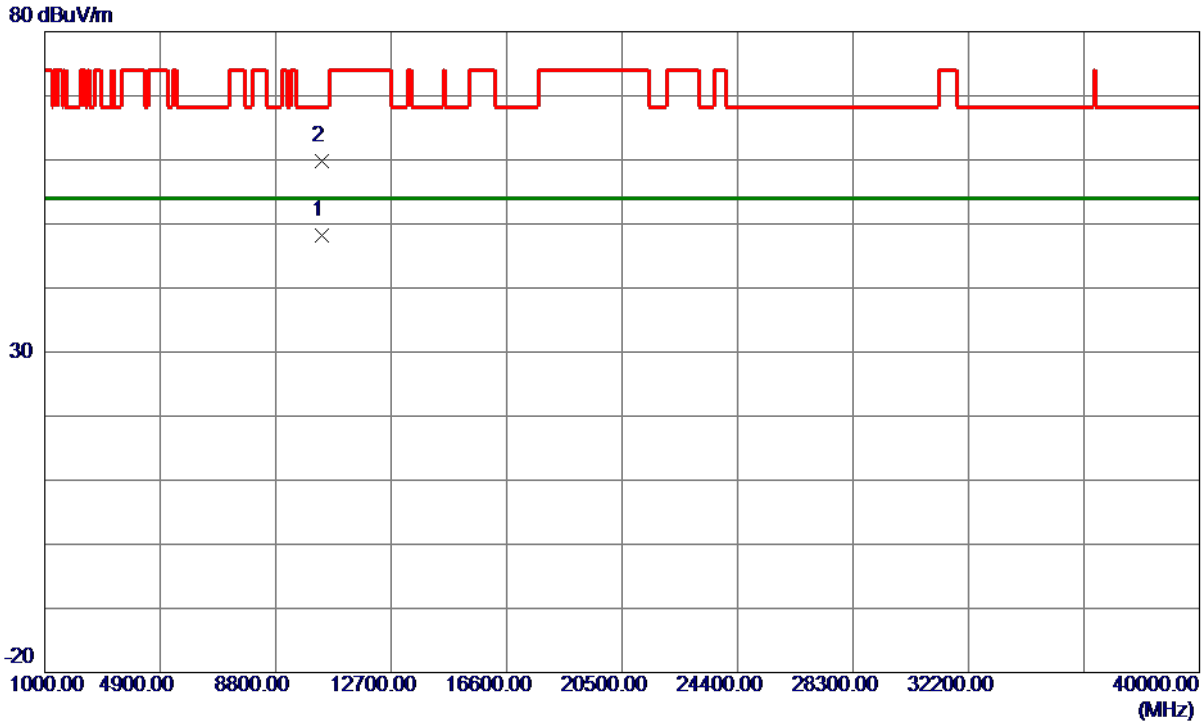

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.1170	34.62	13.51	48.13	54.00	-5.87	AVG	
2	10359.2750	46.21	13.51	59.72	68.30	-8.58	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

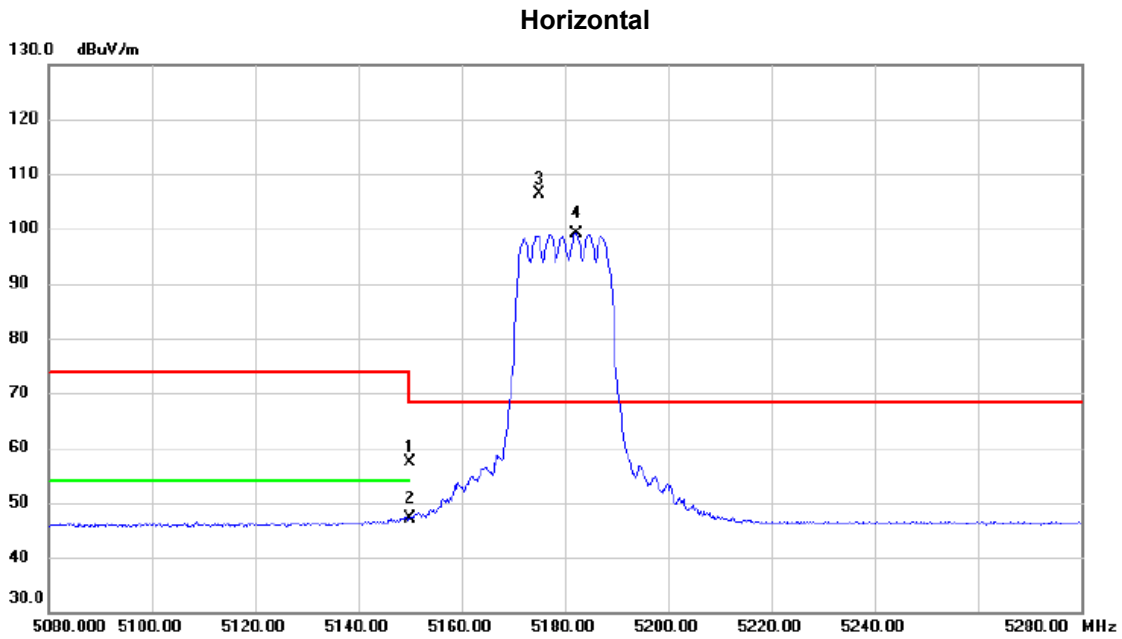


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	41.22	16.15	57.37	74.00	-16.63	peak	
2		5150.000	30.95	16.15	47.10	54.00	-6.90	AVG	
3	*	5175.000	90.28	16.22	106.50	68.30	38.20	peak	No Limit
4	X	5182.200	82.97	16.23	99.20	68.30	30.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz


Horizontal

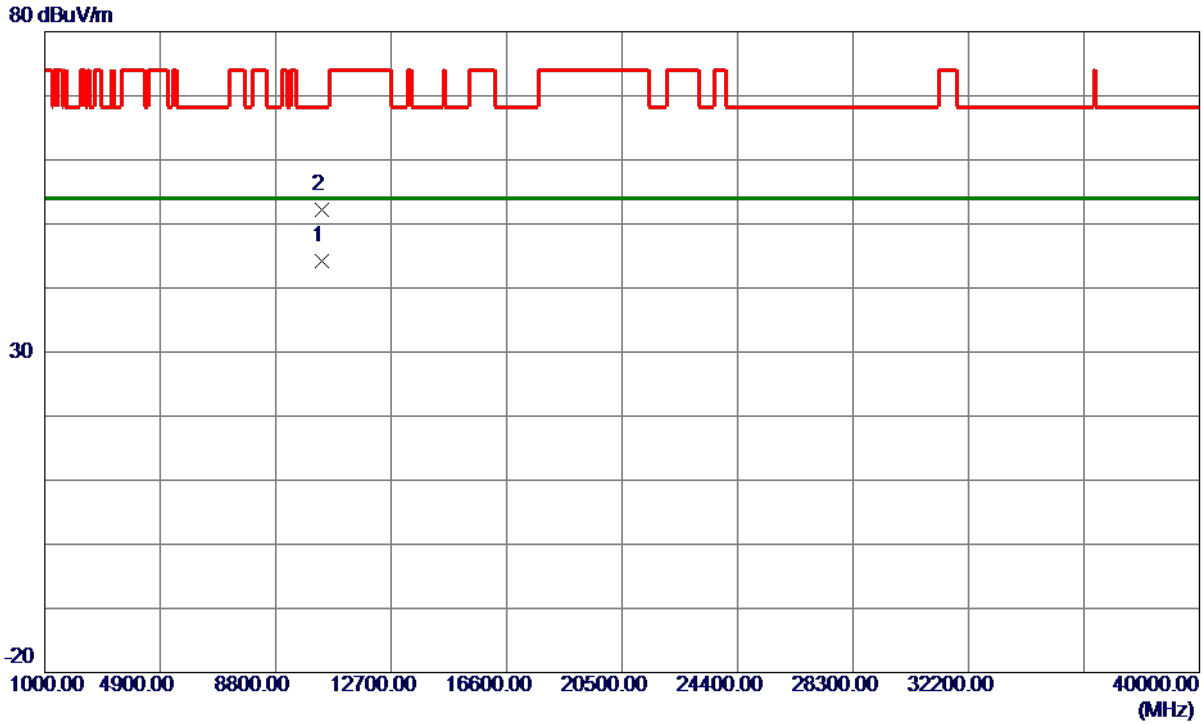

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.7880	30.64	13.52	44.16	54.00	-9.84	AVG	
2	10360.9850	38.62	13.52	52.14	68.30	-16.16	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

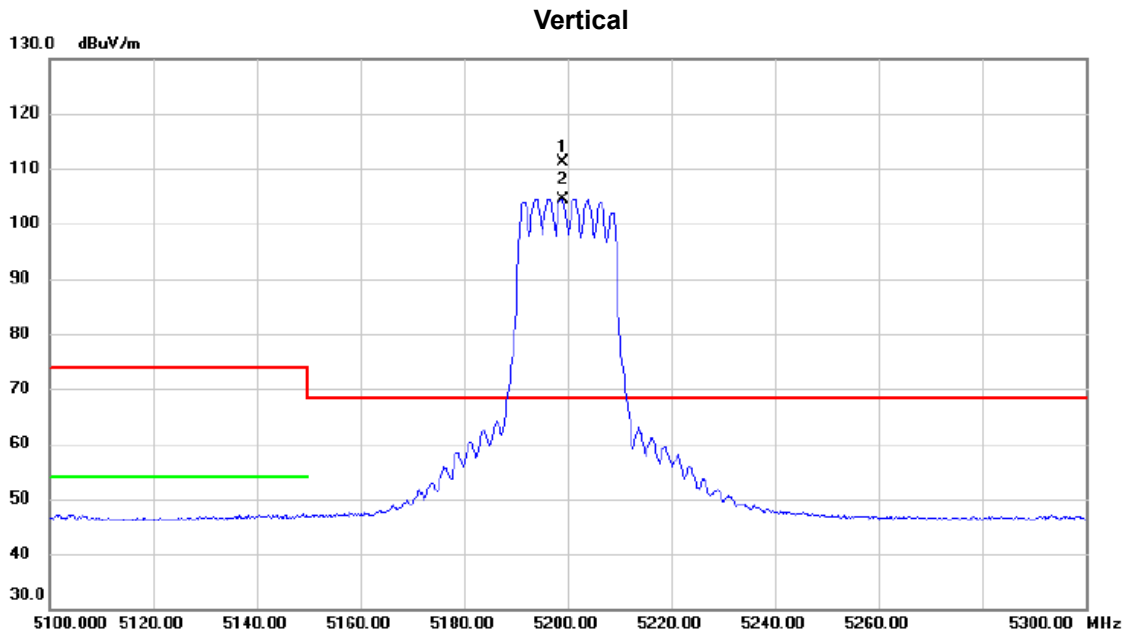

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5199.000	93.97	17.23	111.20	68.30	42.90	peak	No Limit
2	X	5199.000	87.27	17.23	104.50	68.30	36.20	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

Vertical

80 dBuV/m

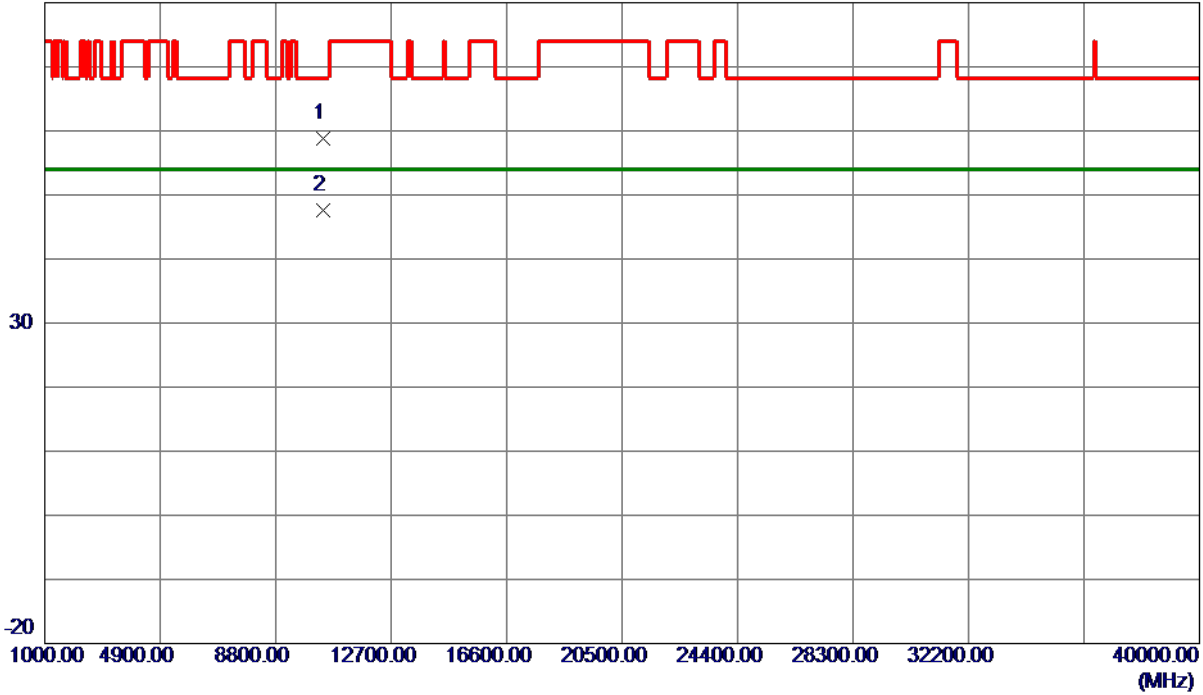


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10397.7150	45.24	13.55	58.79	68.30	-9.51	Peak	
2 *	10397.7150	33.99	13.55	47.54	54.00	-6.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

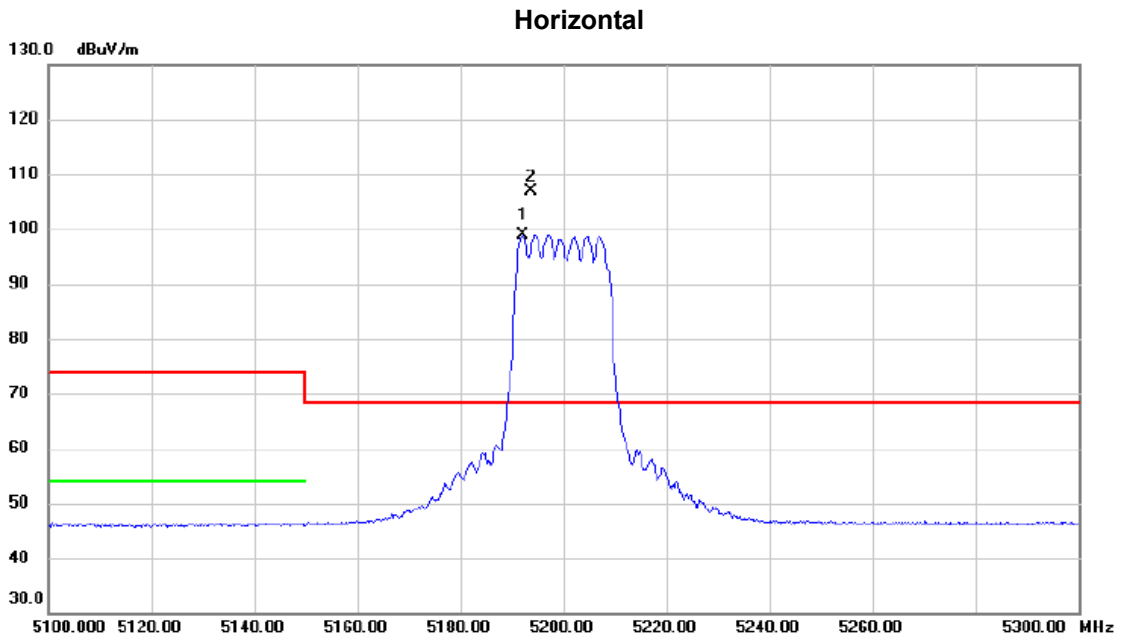


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5192.000	82.61	16.26	98.87	68.30	30.57	AVG	No Limit
2	*	5193.800	90.70	16.26	106.96	68.30	38.66	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

Horizontal

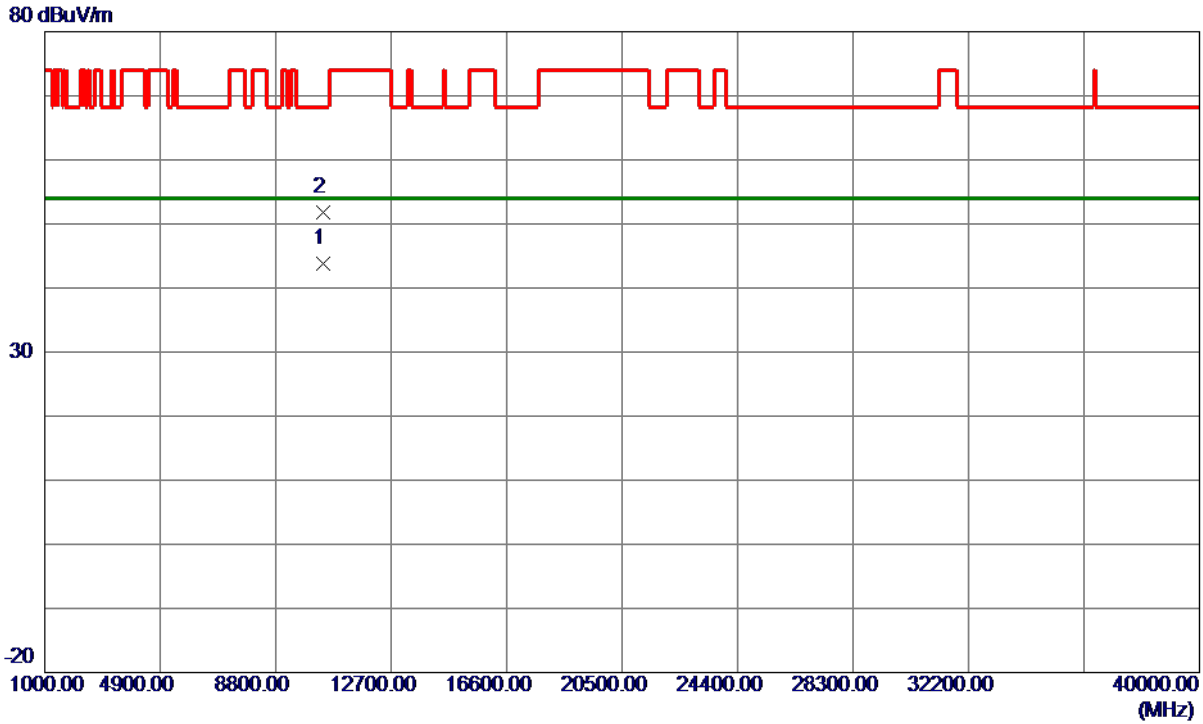


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10397.7450	30.21	13.55	43.76	54.00	-10.24	AVG	
2	10397.9650	38.20	13.55	51.75	68.30	-16.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

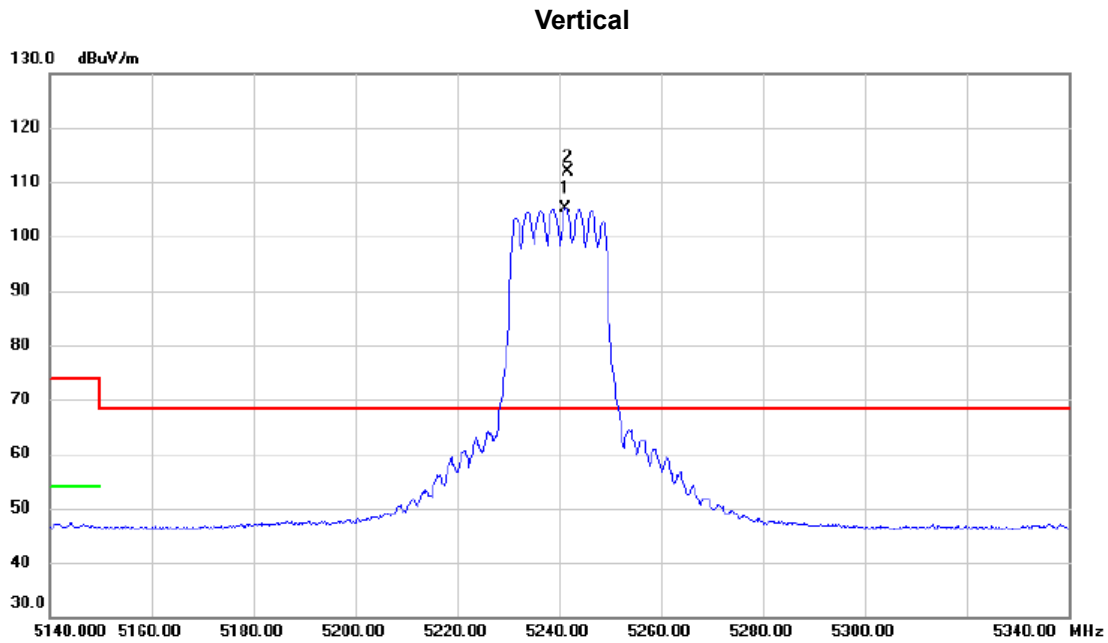


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5241.200	87.78	17.28	105.06	68.30	36.76	AVG	No Limit
2	*	5241.600	94.50	17.28	111.78	68.30	43.48	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Vertical

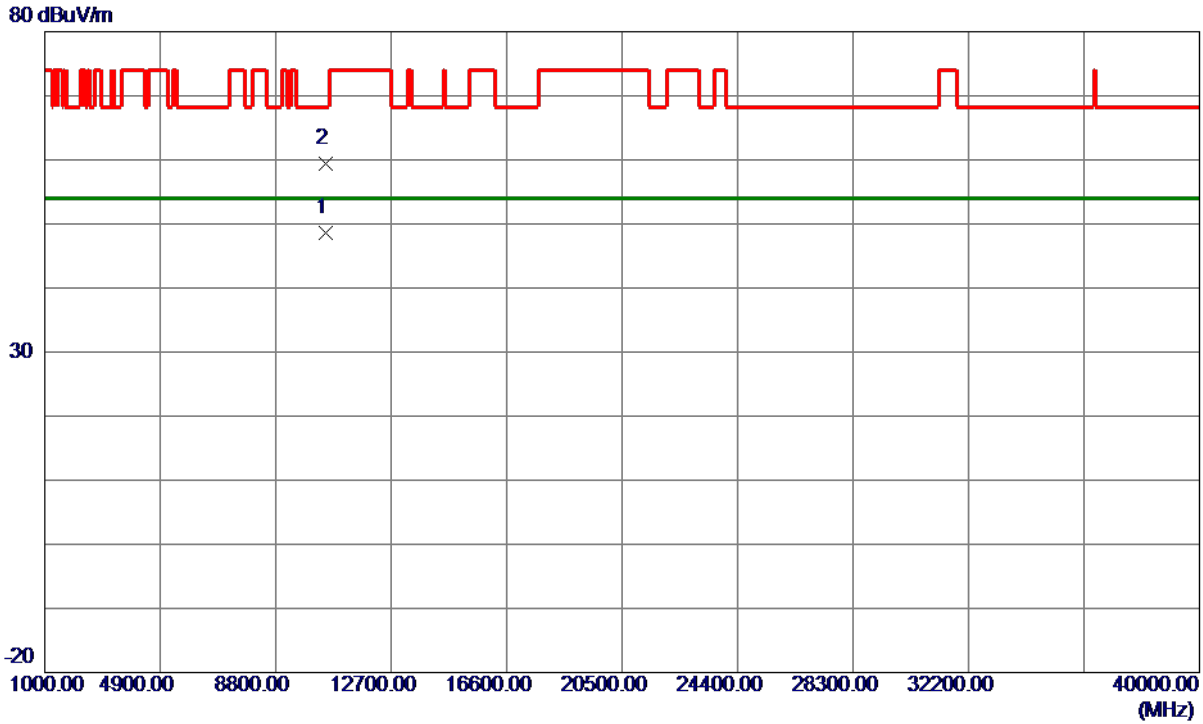


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.5880	34.88	13.63	48.51	54.00	-5.49	AVG	
2	10479.5950	45.69	13.63	59.32	68.30	-8.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

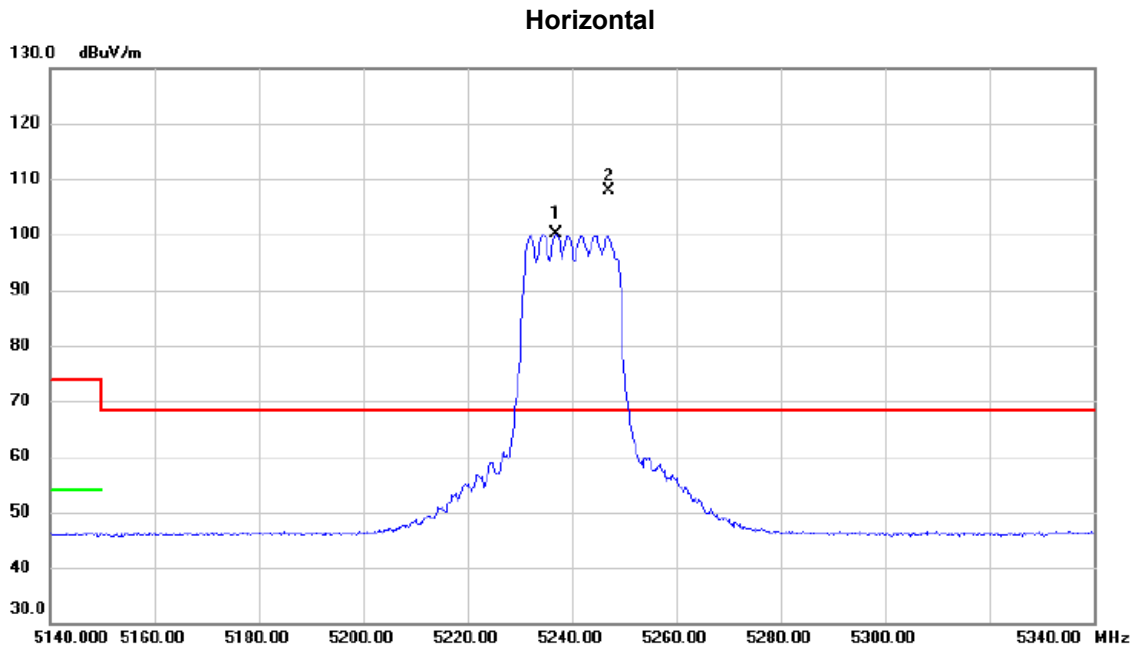


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5237.000	83.68	16.37	100.05	68.30	31.75	AVG	No Limit
2	*	5247.000	91.62	16.38	108.00	68.30	39.70	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Horizontal

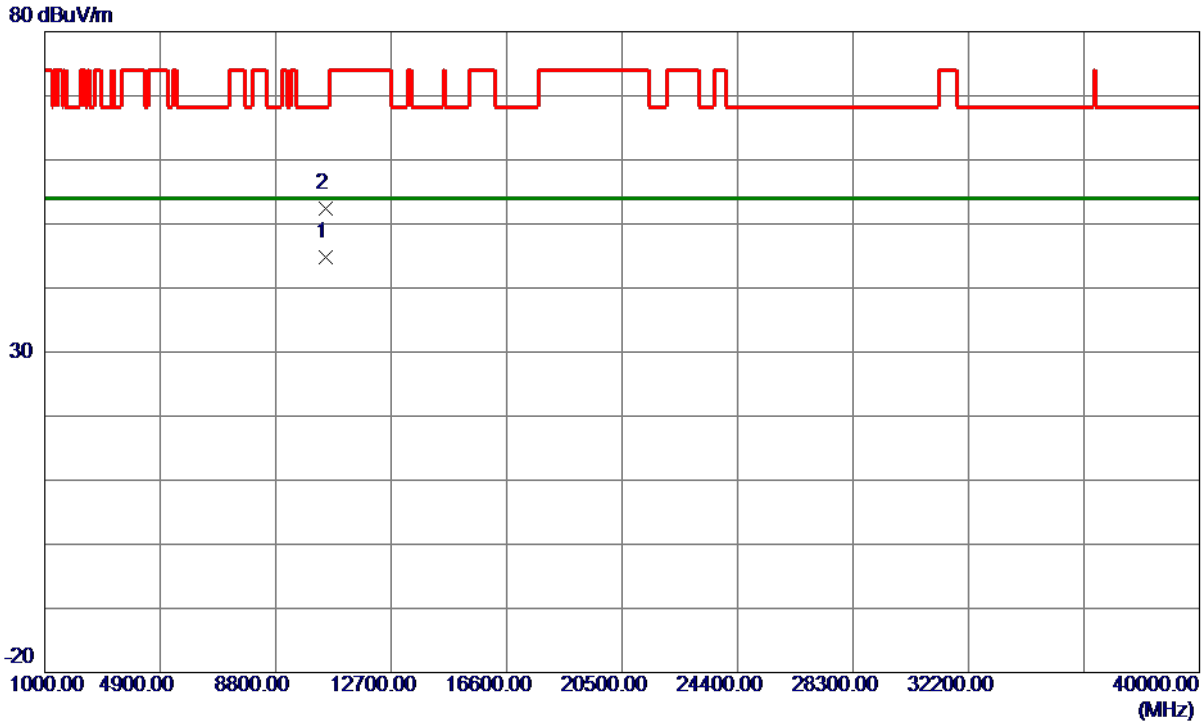


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.1720	31.09	13.63	44.72	54.00	-9.28	AVG	
2	10479.2000	38.80	13.63	52.43	68.30	-15.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

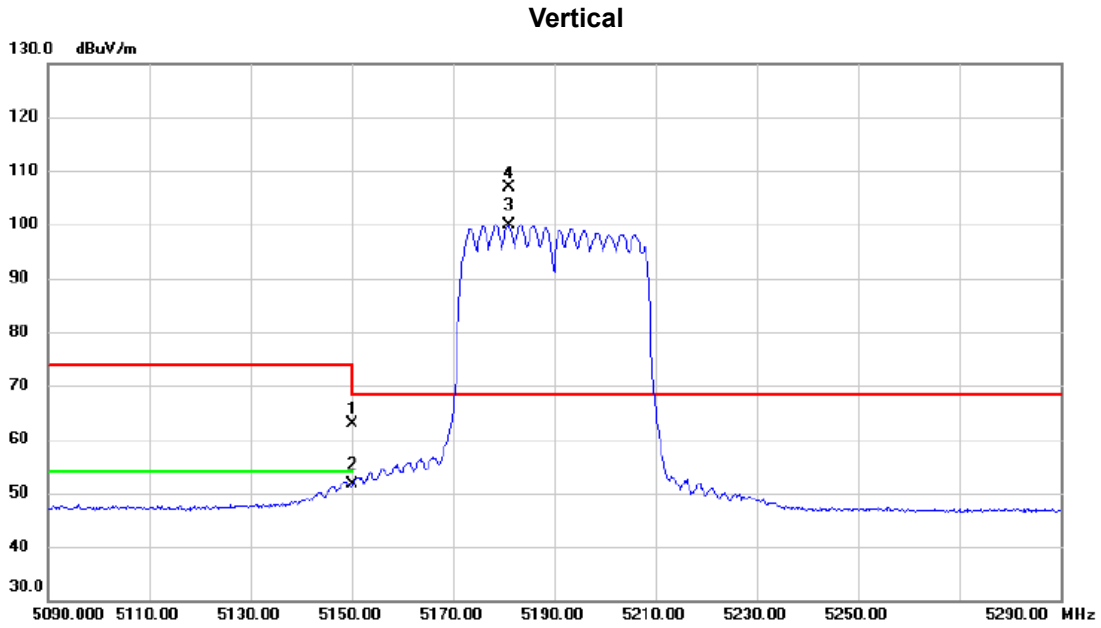

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	46.65	16.15	62.80	74.00	-11.20	peak	
2		5150.000	35.36	16.15	51.51	54.00	-2.49	AVG	
3	X	5181.000	83.54	16.23	99.77	68.30	31.47	AVG	No Limit
4	*	5181.200	90.73	16.23	106.96	68.30	38.66	peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Vertical

80 dBuV/m

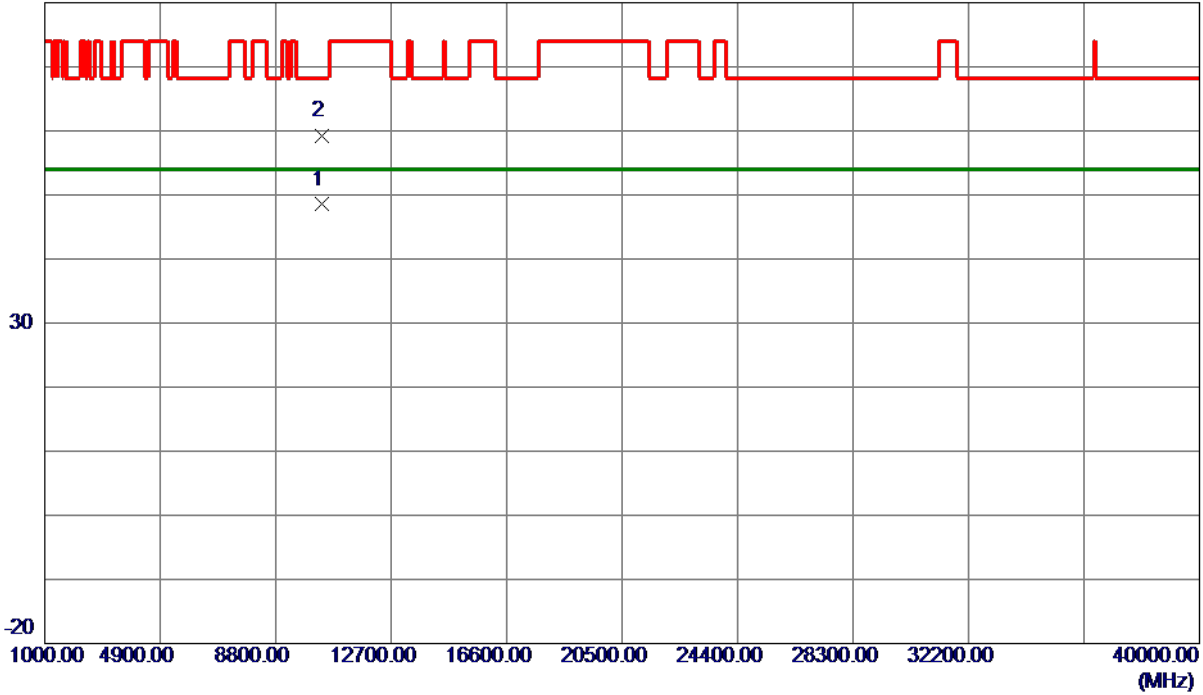


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10378.3380	34.97	13.53	48.50	54.00	-5.50	AVG	
2	10378.7600	45.73	13.53	59.26	68.30	-9.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Horizontal

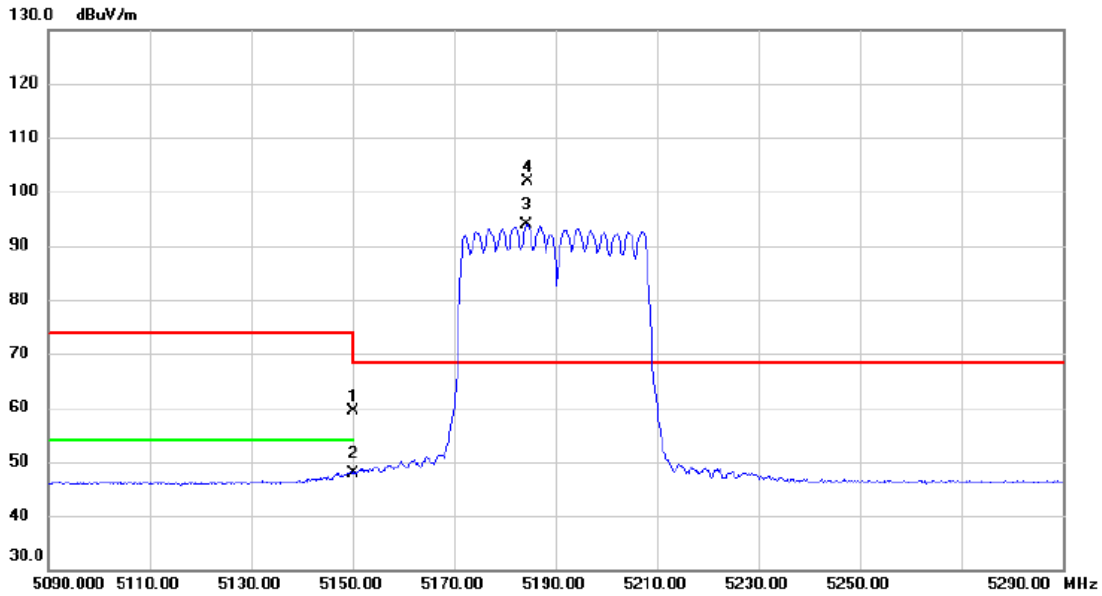


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	43.21	16.15	59.36	74.00	-14.64	peak	
2		5150.000	31.80	16.15	47.95	54.00	-6.05	AVG	
3	X	5184.400	77.62	16.23	93.85	68.30	25.55	AVG	No Limit
4	*	5184.600	85.54	16.23	101.77	68.30	33.47	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz


Horizontal

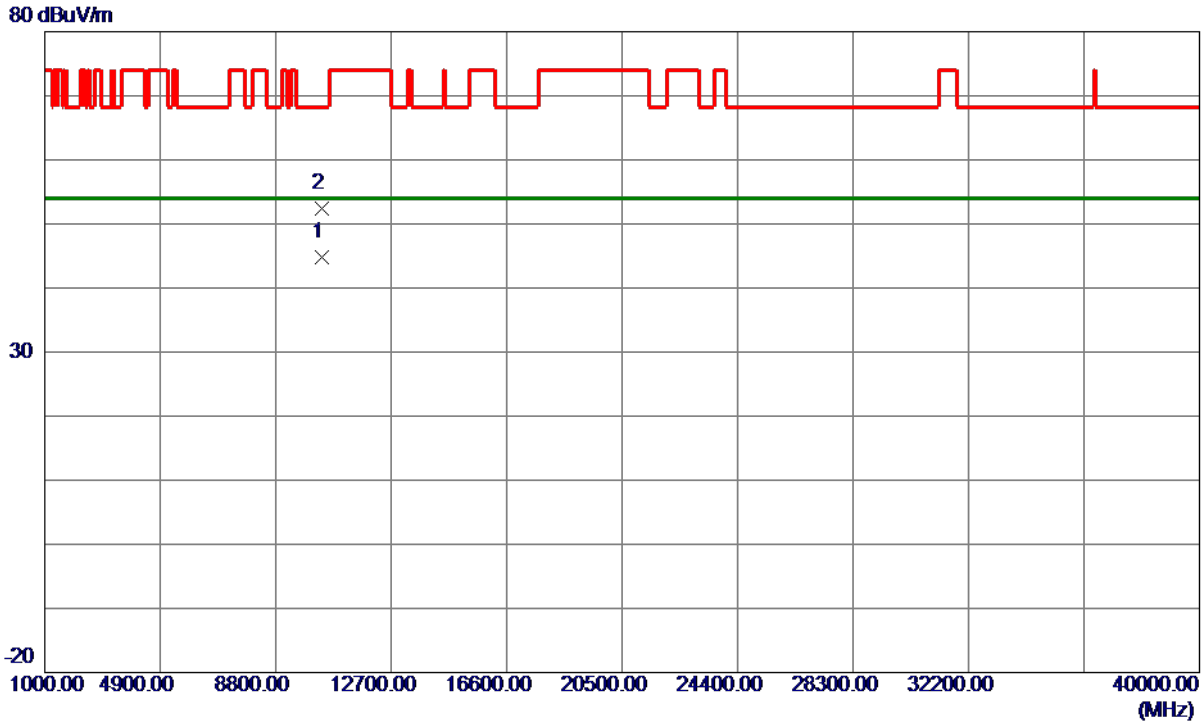

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.2250	31.33	13.53	44.86	54.00	-9.14	AVG	
2	10380.8949	38.89	13.53	52.42	68.30	-15.88	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

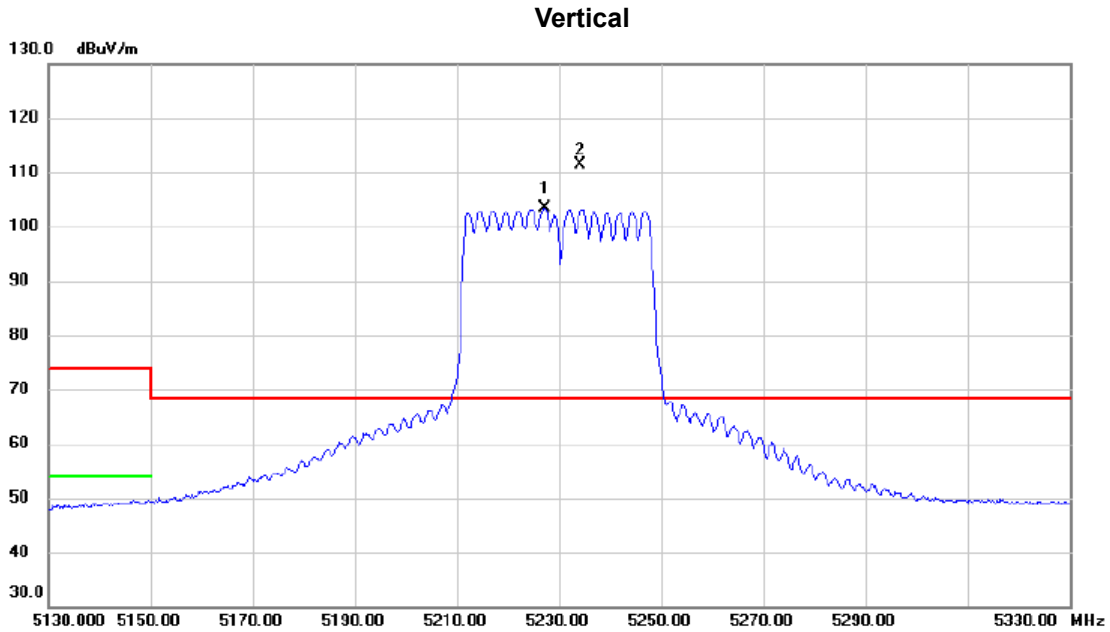


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5227.200	86.98	16.34	103.32	68.30	35.02	AVG	No Limit
2	*	5234.200	95.12	16.36	111.48	68.30	43.18	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Vertical

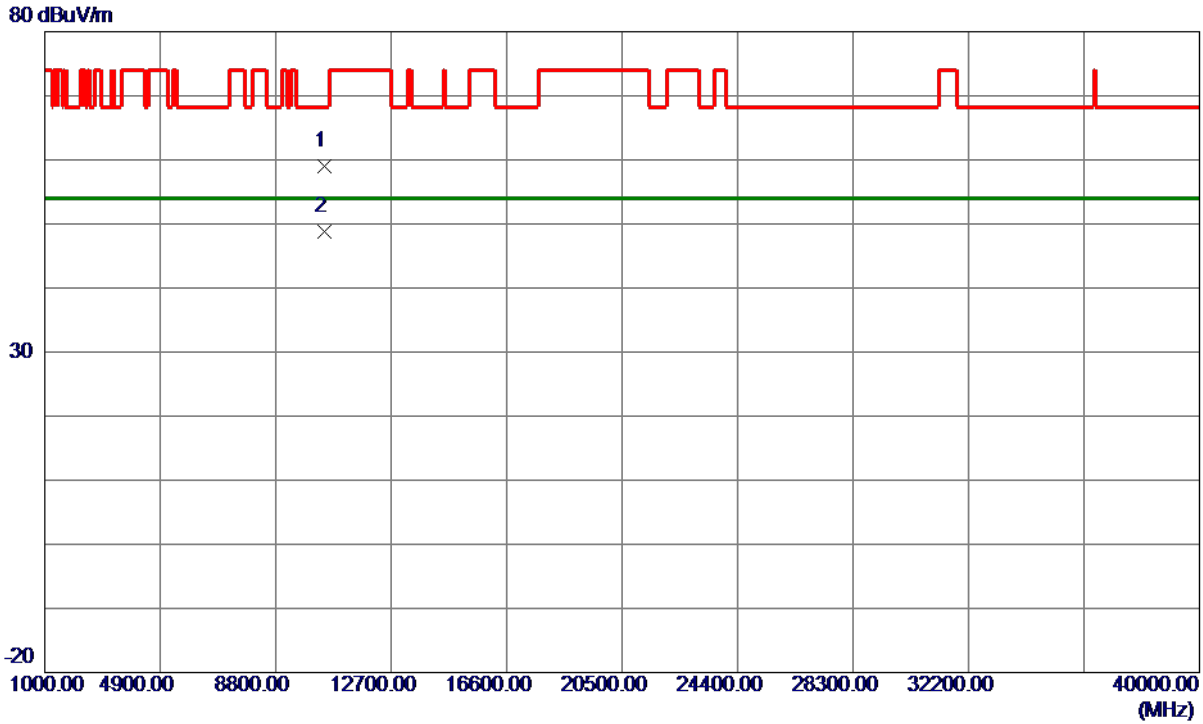


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10461.7600	45.47	13.61	59.08	68.30	-9.22	Peak	
2 *	10461.8220	35.13	13.61	48.74	54.00	-5.26	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Horizontal

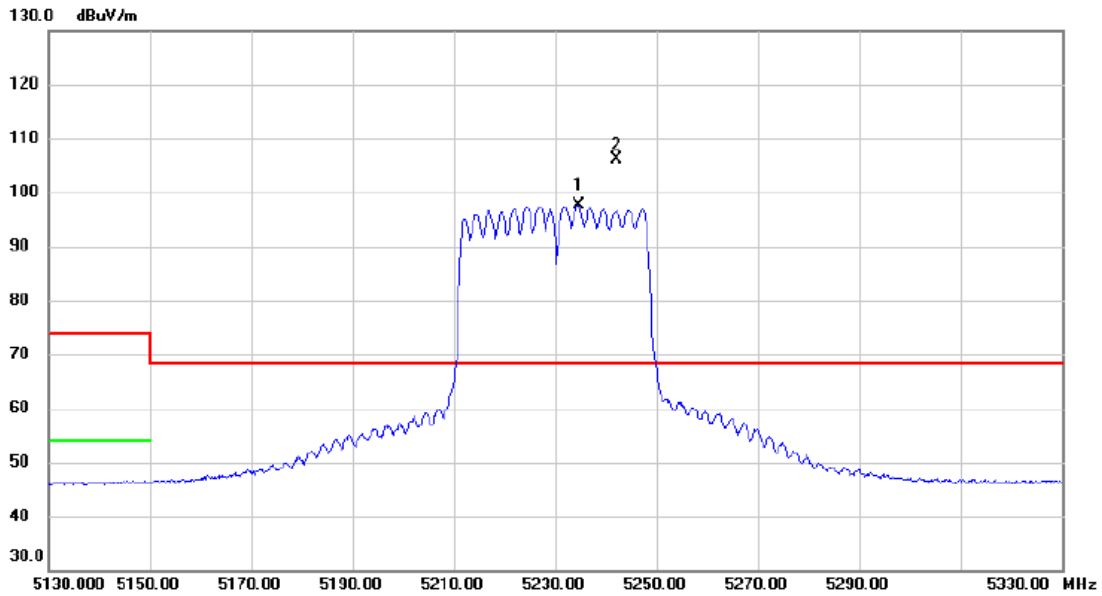


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5234.600	81.16	16.36	97.52	68.30	29.22	AVG	No Limit
2	*	5242.000	89.77	16.38	106.15	68.30	37.85	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Horizontal

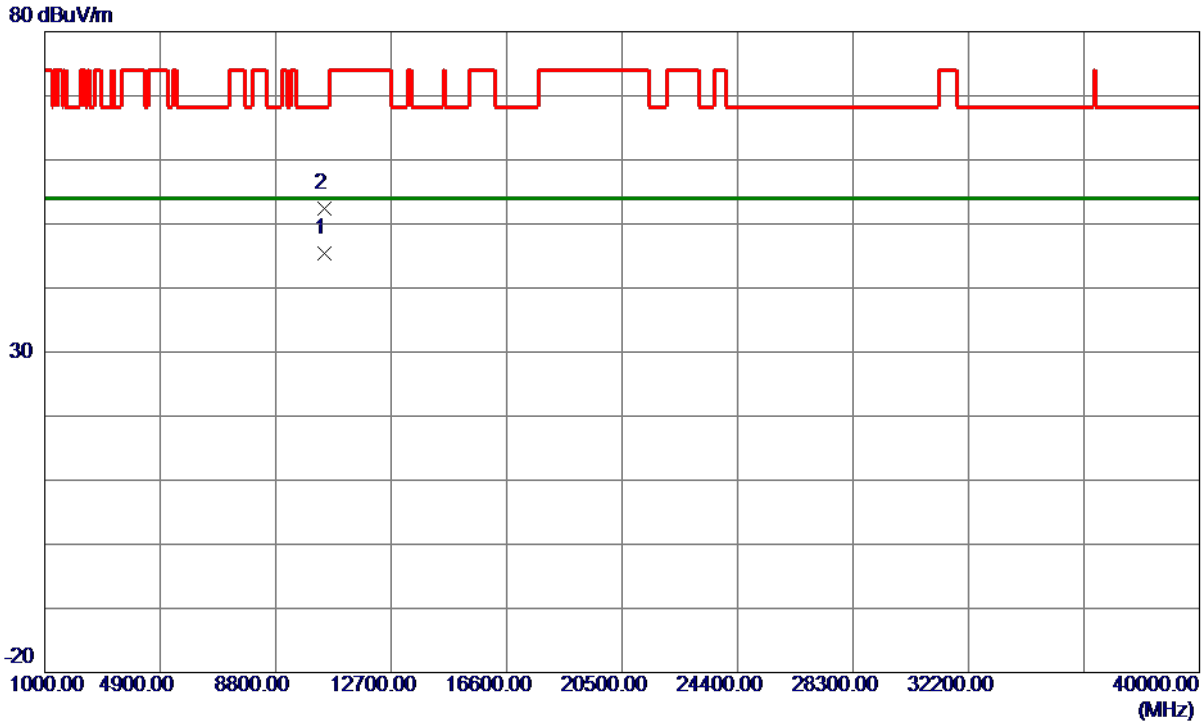


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10461.8270	31.76	13.61	45.37	54.00	-8.63	AVG	
2	10461.9550	38.81	13.61	52.42	68.30	-15.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

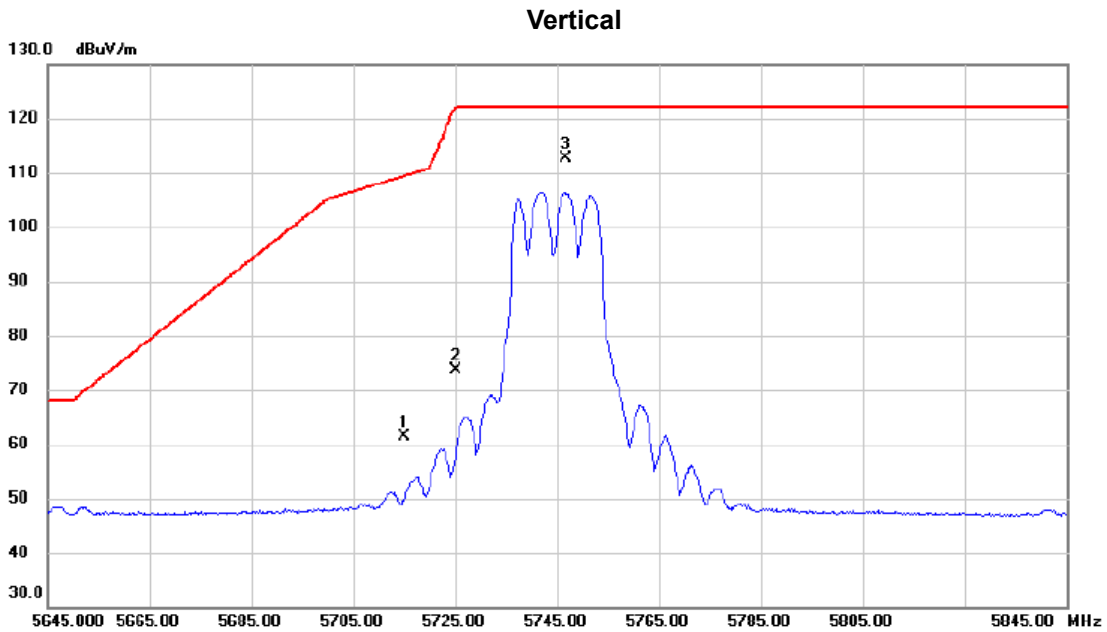

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	43.58	17.92	61.50	109.40	-47.90	peak	
2		5725.000	55.80	17.93	73.73	122.20	-48.47	peak	
3	*	5746.600	94.68	17.97	112.65	122.20	-9.55	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Vertical

80 dBuV/m

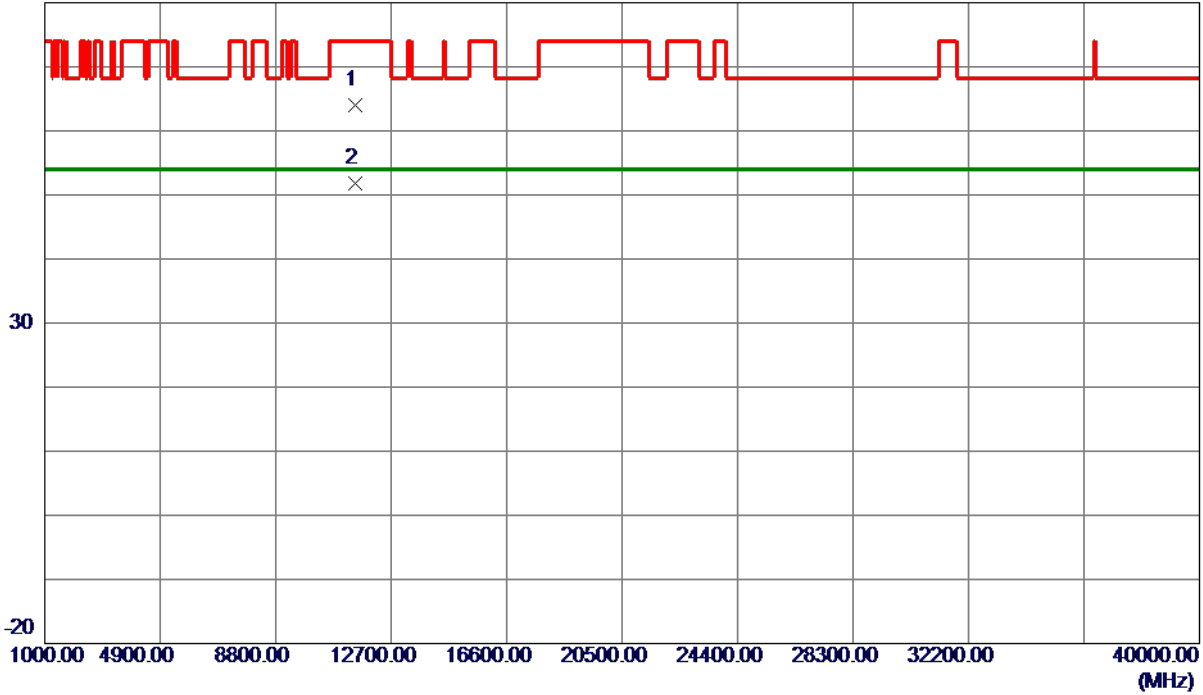


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.5990	49.51	14.55	64.06	74.00	-9.94	Peak	
2 *	11489.9440	37.16	14.55	51.71	54.00	-2.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

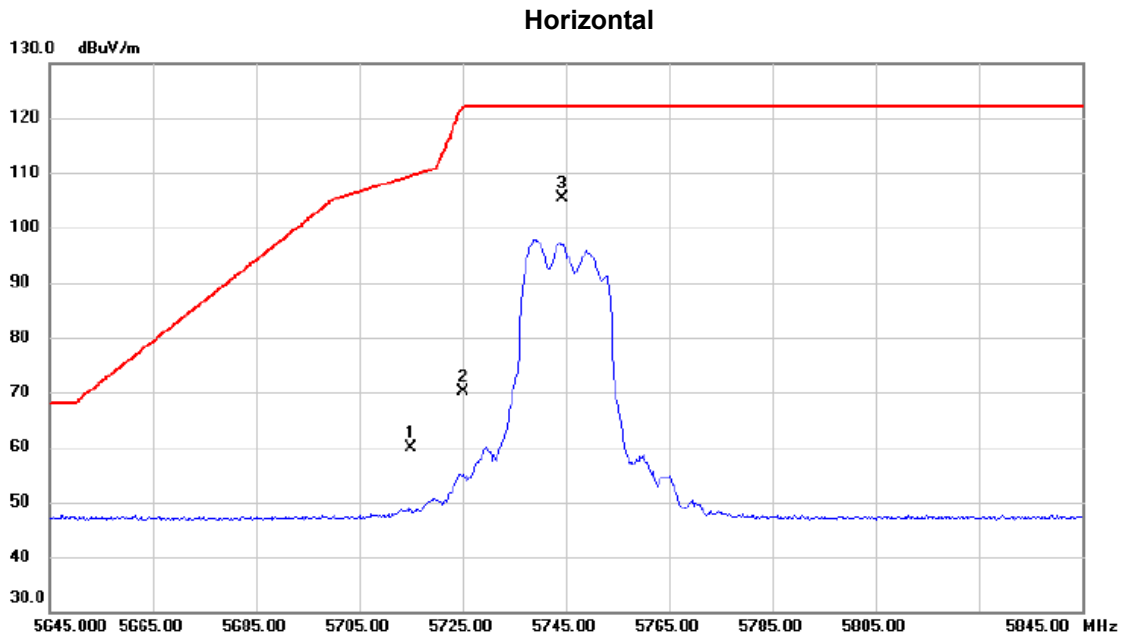


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.000	42.28	17.62	59.90	109.40	-49.50	peak	
2	5725.000	52.59	17.65	70.24	122.20	-51.96	peak	
3 *	5744.400	87.75	17.71	105.46	122.20	-16.74	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Horizontal

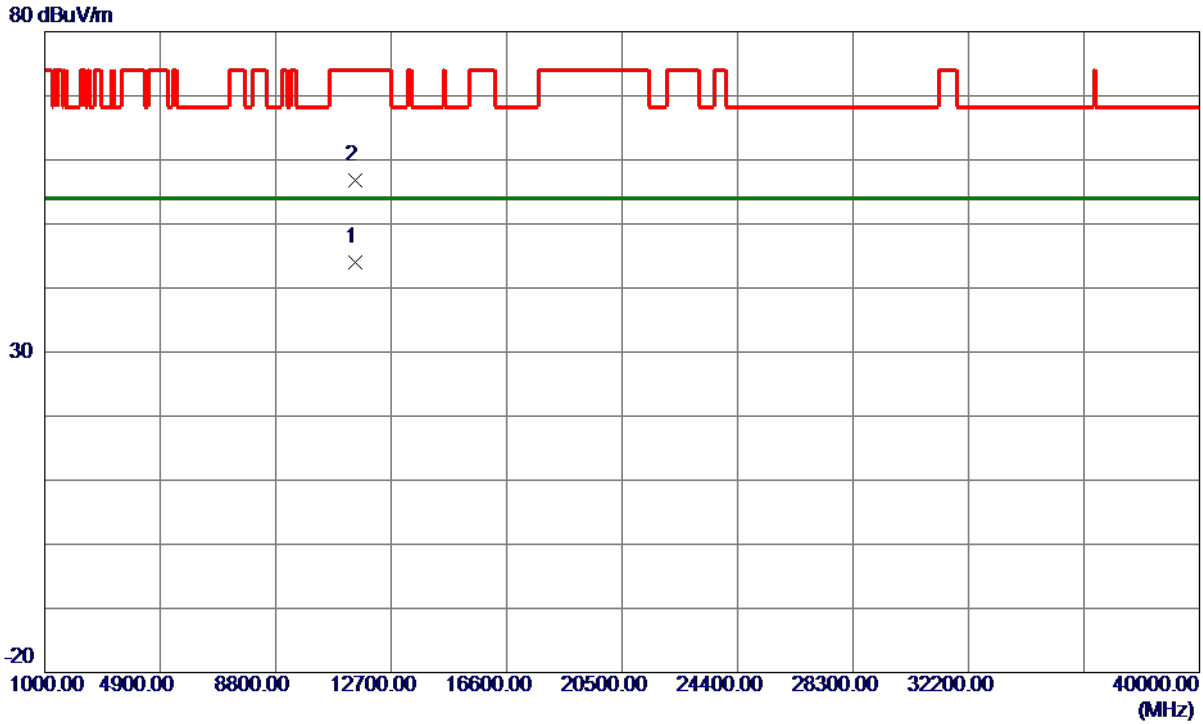


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11488.1849	29.51	14.55	44.06	54.00	-9.94	AVG	
2	11491.1100	42.32	14.55	56.87	74.00	-17.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

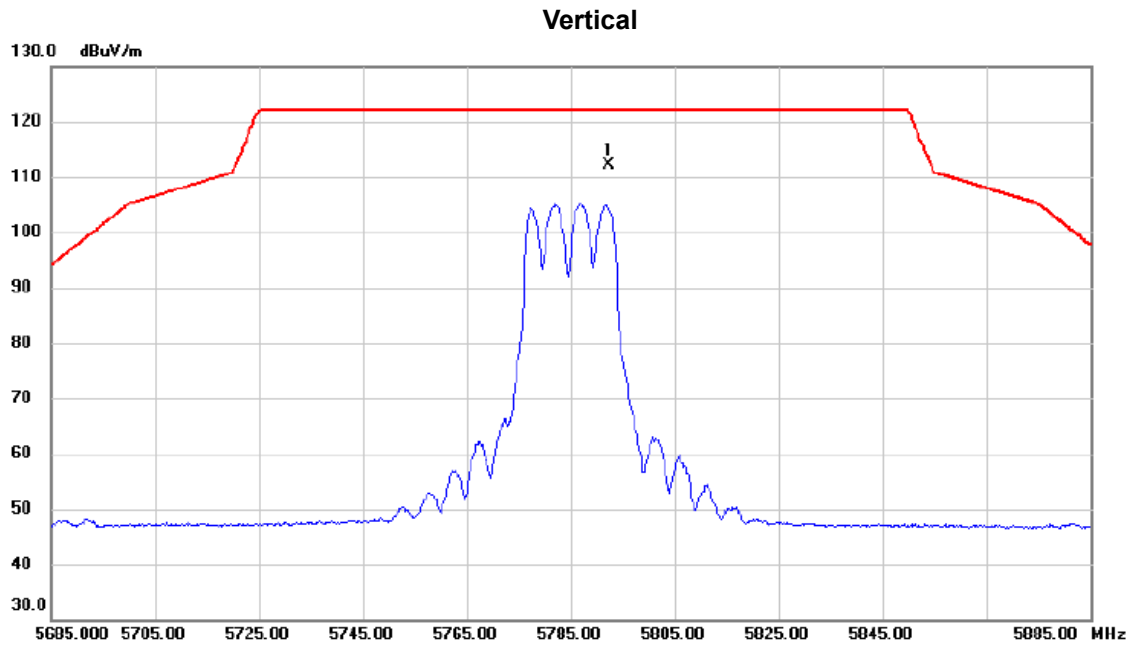


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5792.400	93.97	18.04	112.01	122.20	-10.19	peak	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Vertical

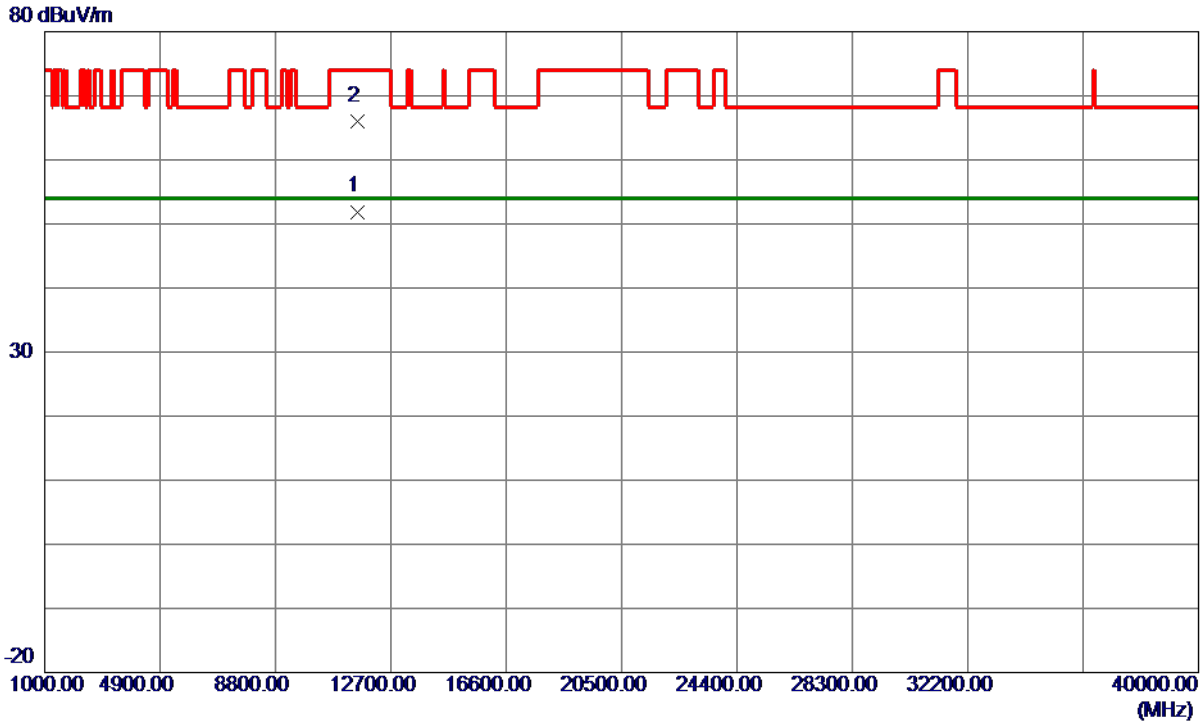


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.9650	37.33	14.57	51.90	54.00	-2.10	AVG	
2	11569.0340	51.35	14.57	65.92	74.00	-8.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

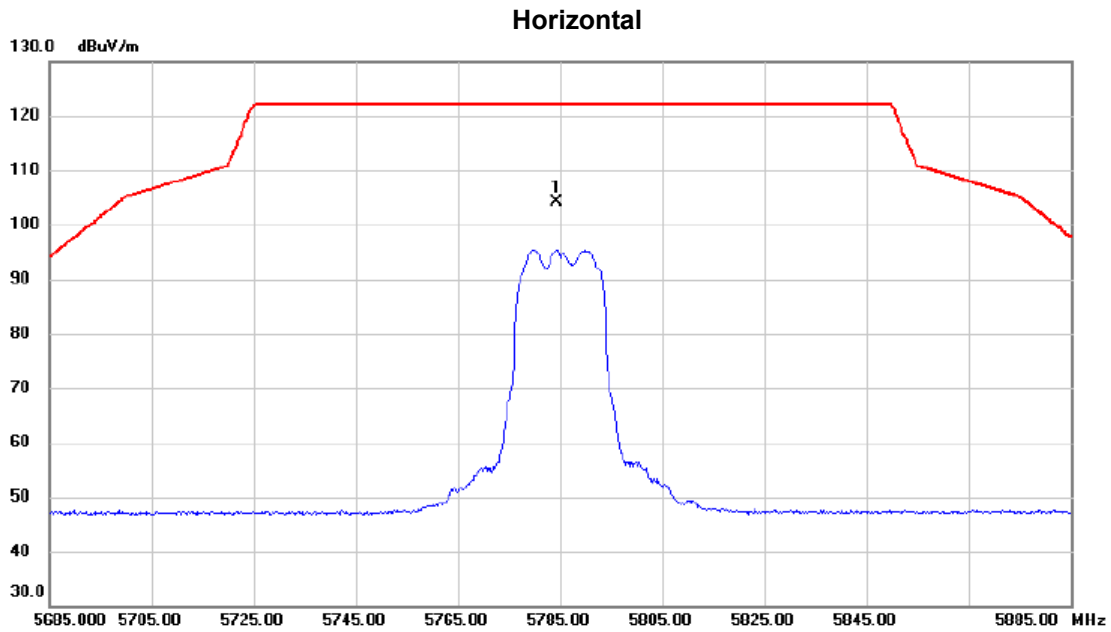


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5784.400	86.29	17.83	104.12	122.20	-18.08	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Horizontal

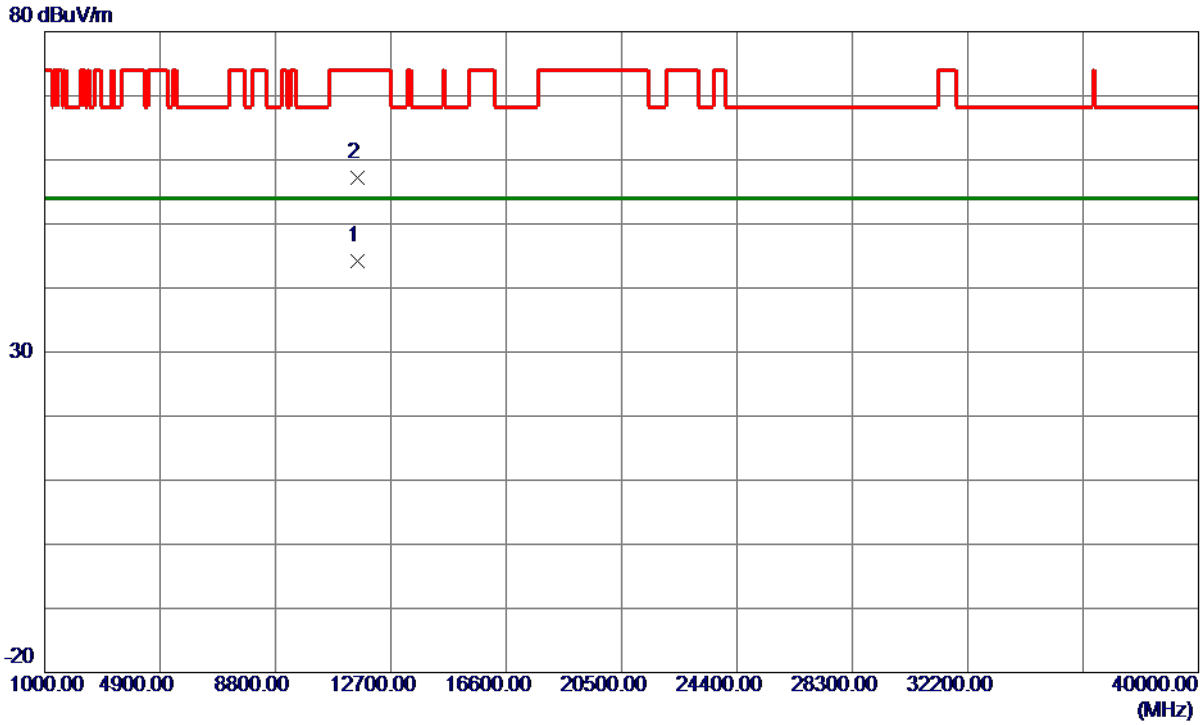


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11567.6150	29.58	14.57	44.15	54.00	-9.85	AVG	
2	11571.7850	42.54	14.57	57.11	74.00	-16.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

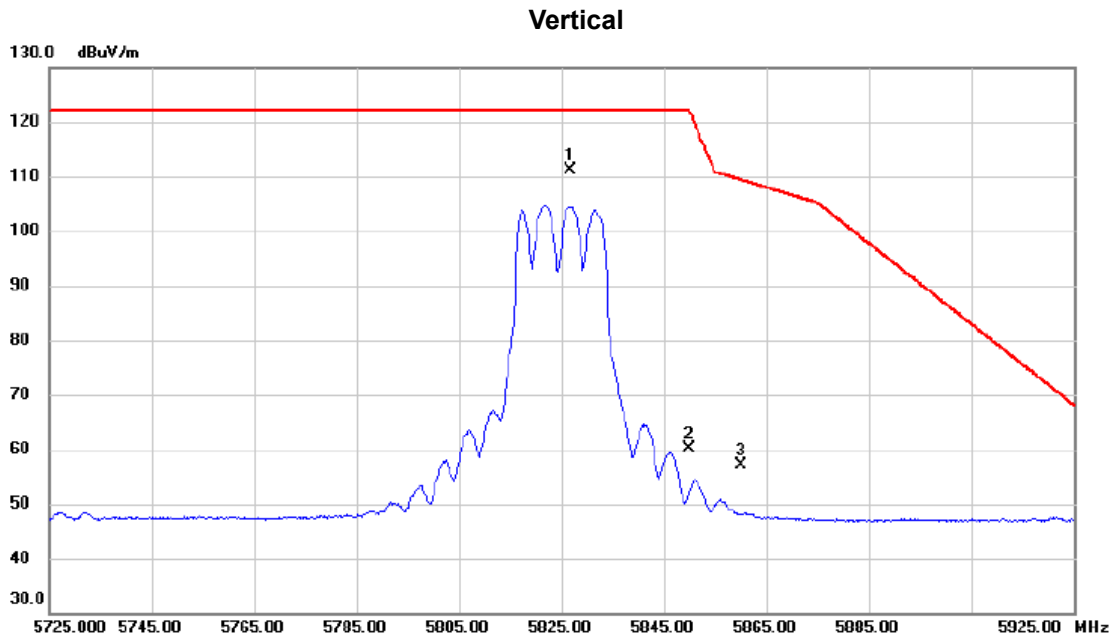

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.600	92.99	18.10	111.09	122.20	-11.11	peak	No Limit
2		5850.000	41.97	18.14	60.11	122.20	-62.09	peak	
3		5860.000	39.01	18.15	57.16	109.40	-52.24	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Vertical

80 dBuV/m

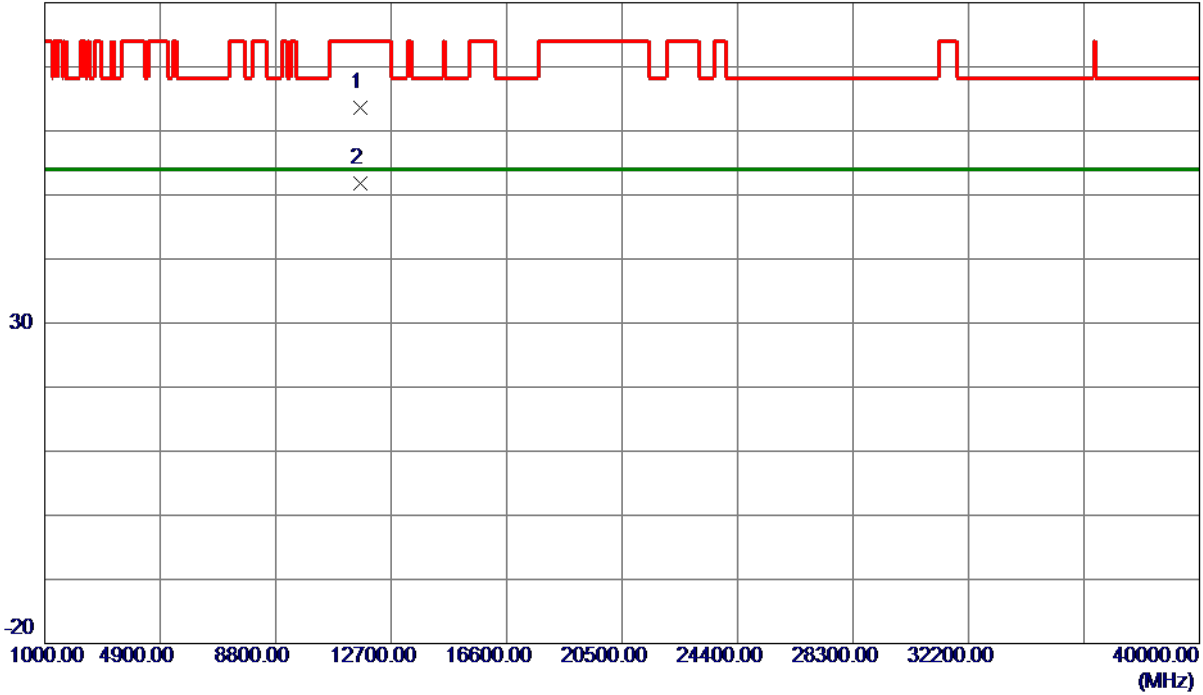


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.4130	48.94	14.57	63.51	74.00	-10.49	Peak	
2 *	11649.2410	37.28	14.57	51.85	54.00	-2.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

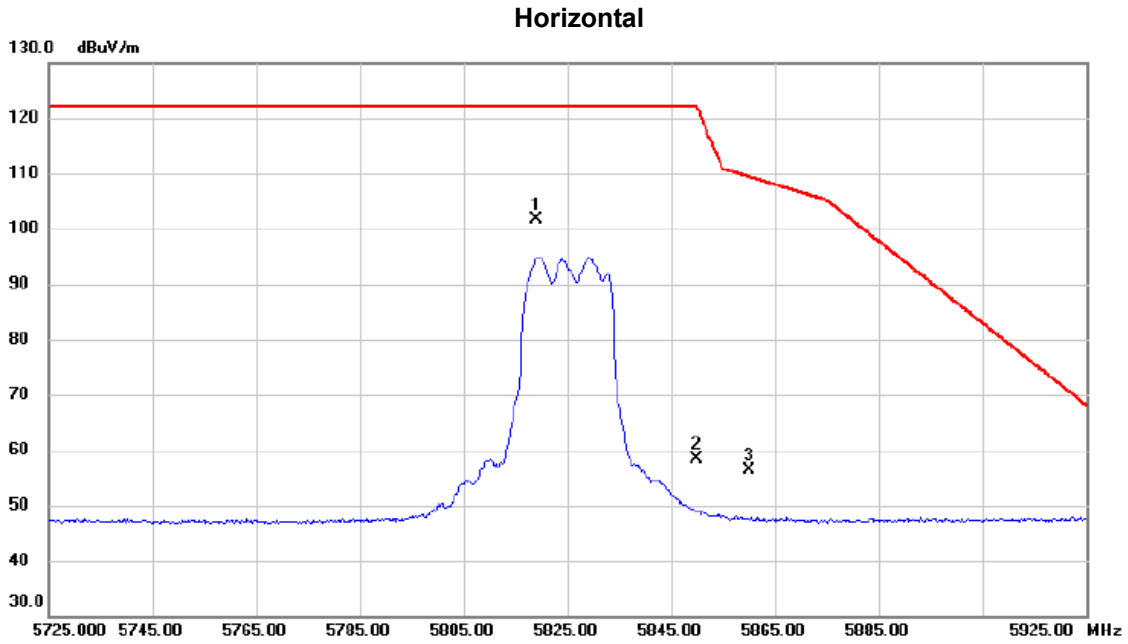

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5819.000	83.72	17.93	101.65	122.20	-20.55	peak	No Limit
2		5850.000	40.34	18.03	58.37	122.20	-63.83	peak	
3		5860.000	38.39	18.06	56.45	109.40	-52.95	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

80 dBuV/m

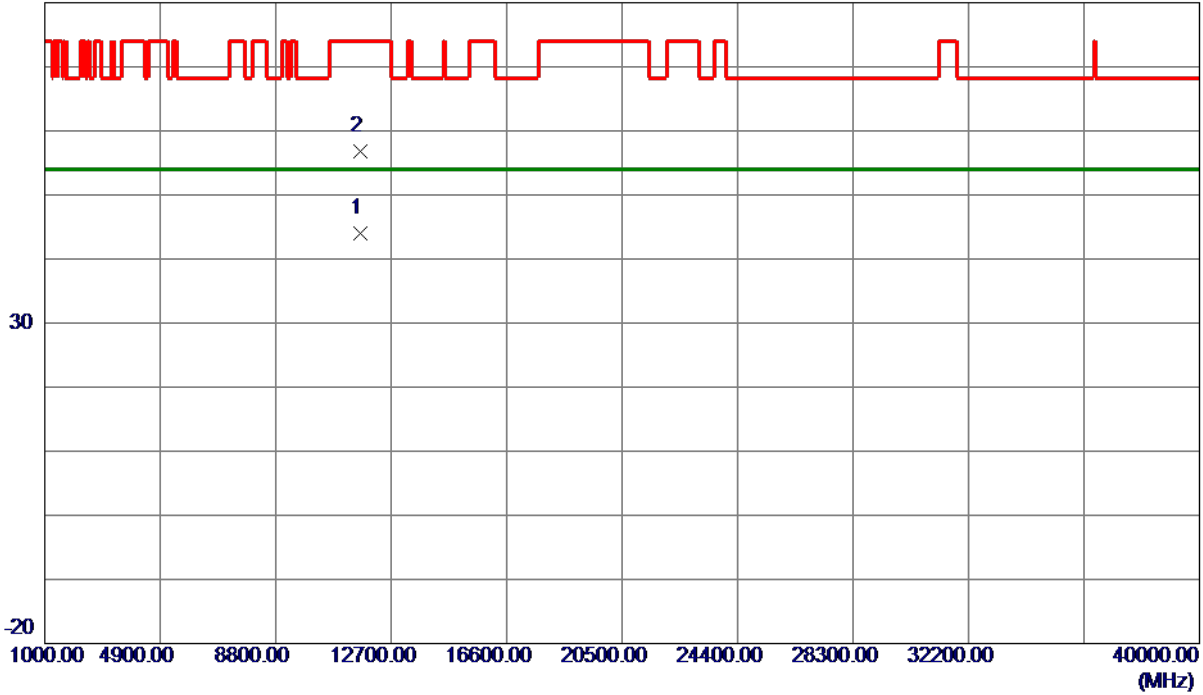


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.5550	29.47	14.57	44.04	54.00	-9.96	AVG	
2	11649.6500	42.15	14.57	56.72	74.00	-17.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

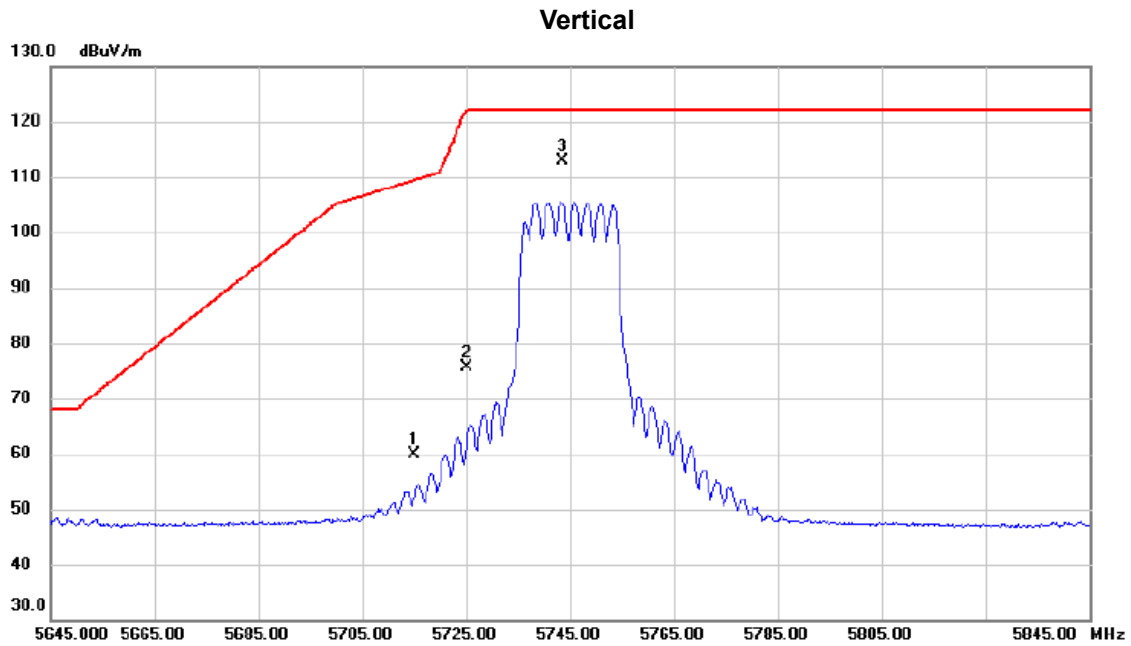


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	42.05	17.92	59.97	109.40	-49.43	peak	
2		5725.000	57.78	17.93	75.71	122.20	-46.49	peak	
3	*	5743.600	94.84	17.96	112.80	122.20	-9.40	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz


Vertical

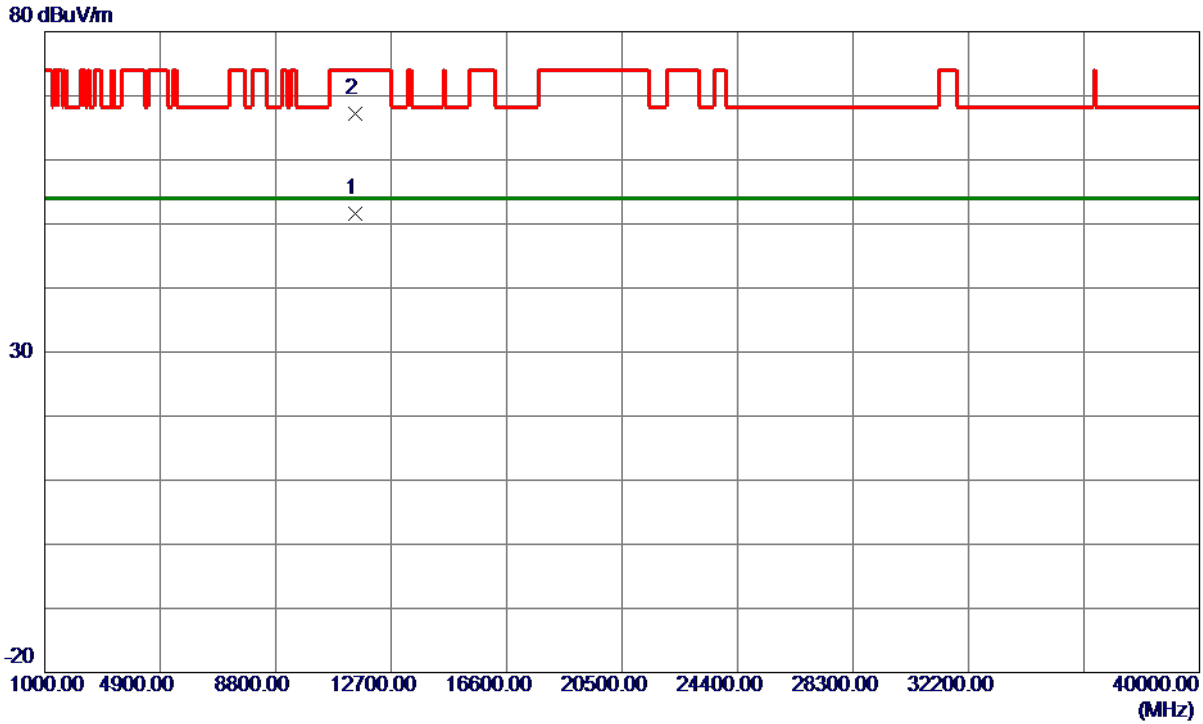

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.4450	37.11	14.55	51.66	54.00	-2.34	AVG	
2	11489.6350	52.73	14.55	67.28	74.00	-6.72	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

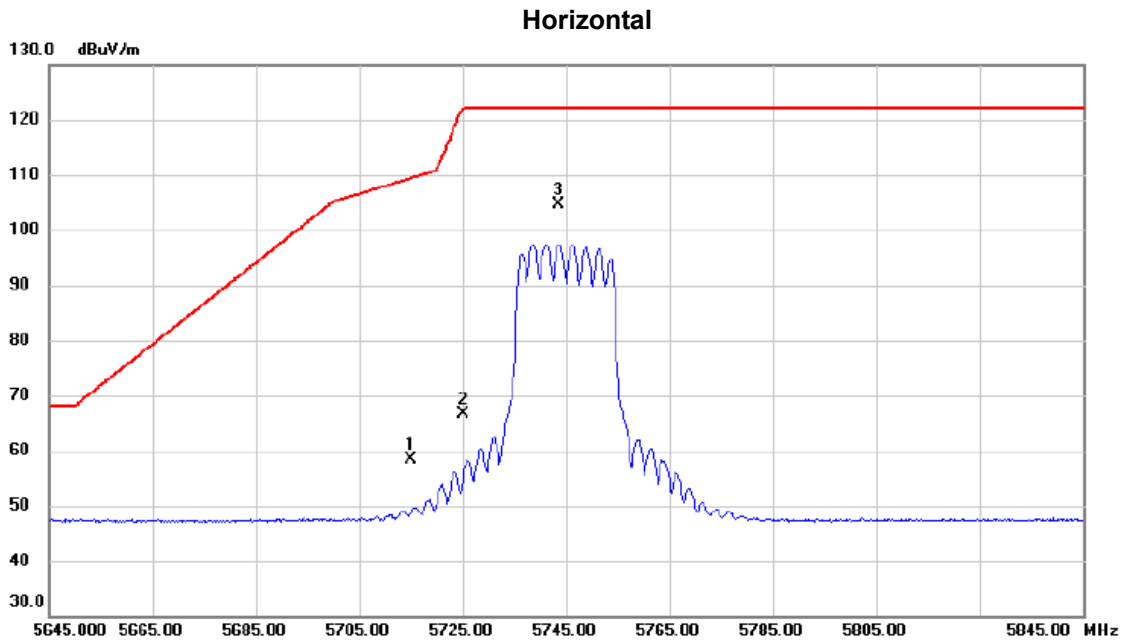

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	40.85	17.62	58.47	109.40	-50.93	peak	
2		5725.000	48.93	17.65	66.58	122.20	-55.62	peak	
3	*	5743.600	86.84	17.70	104.54	122.20	-17.66	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

Horizontal

80 dBuV/m

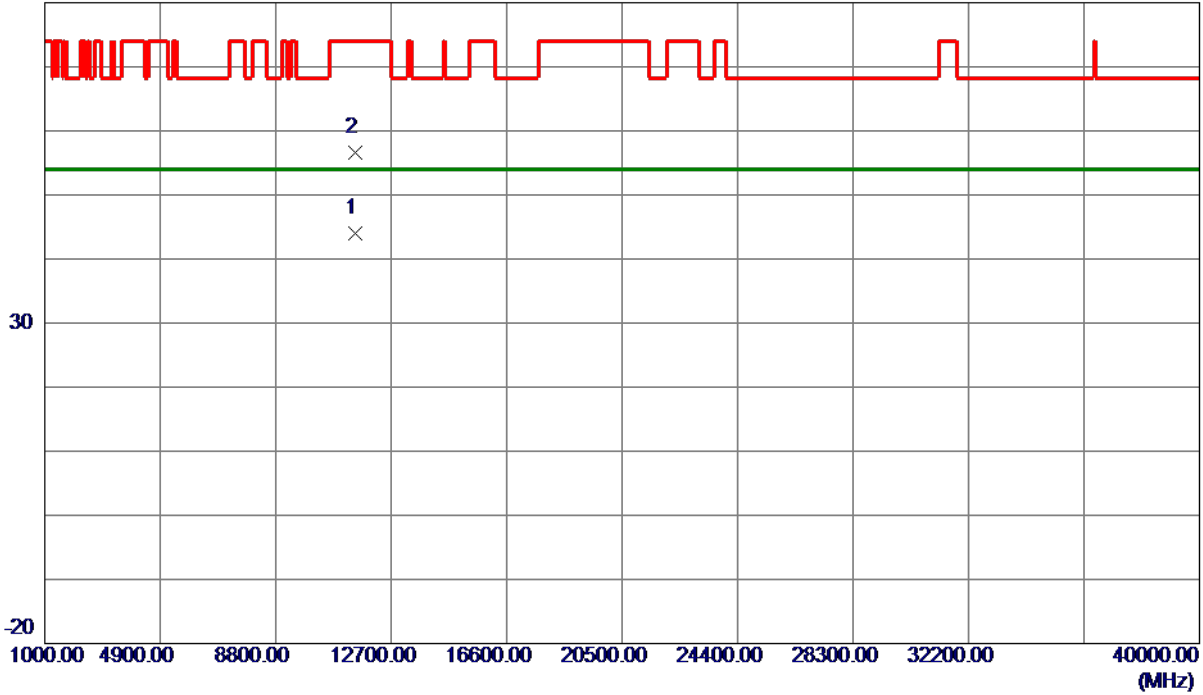


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.3650	29.40	14.55	43.95	54.00	-10.05	AVG	
2	11488.9400	42.13	14.55	56.68	74.00	-17.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

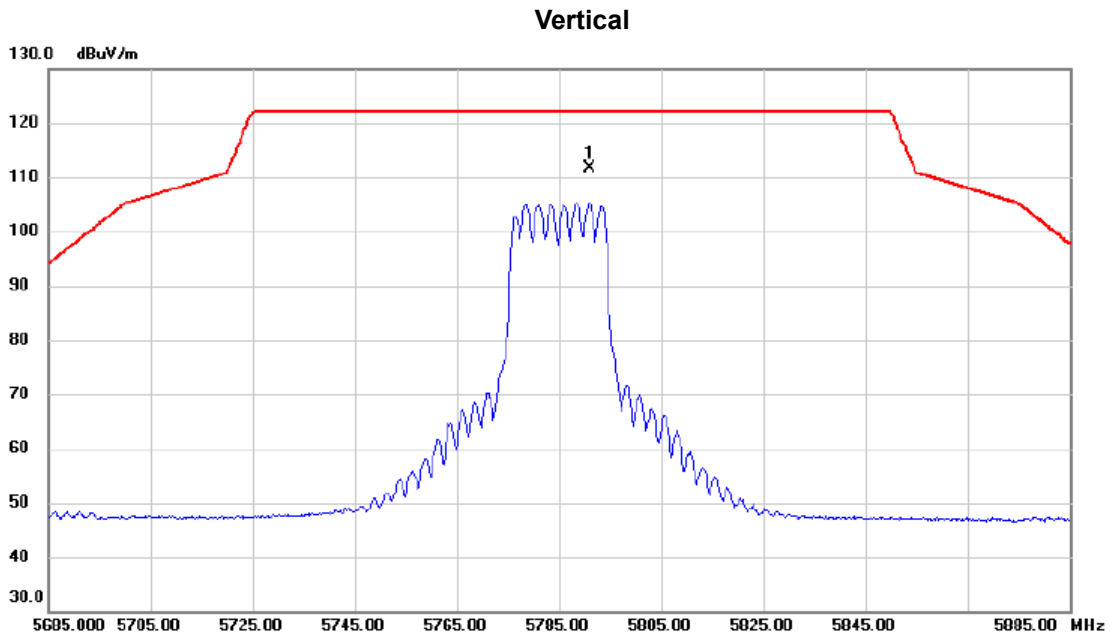


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.000	93.62	18.04	111.66	122.20	-10.54	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz


Vertical

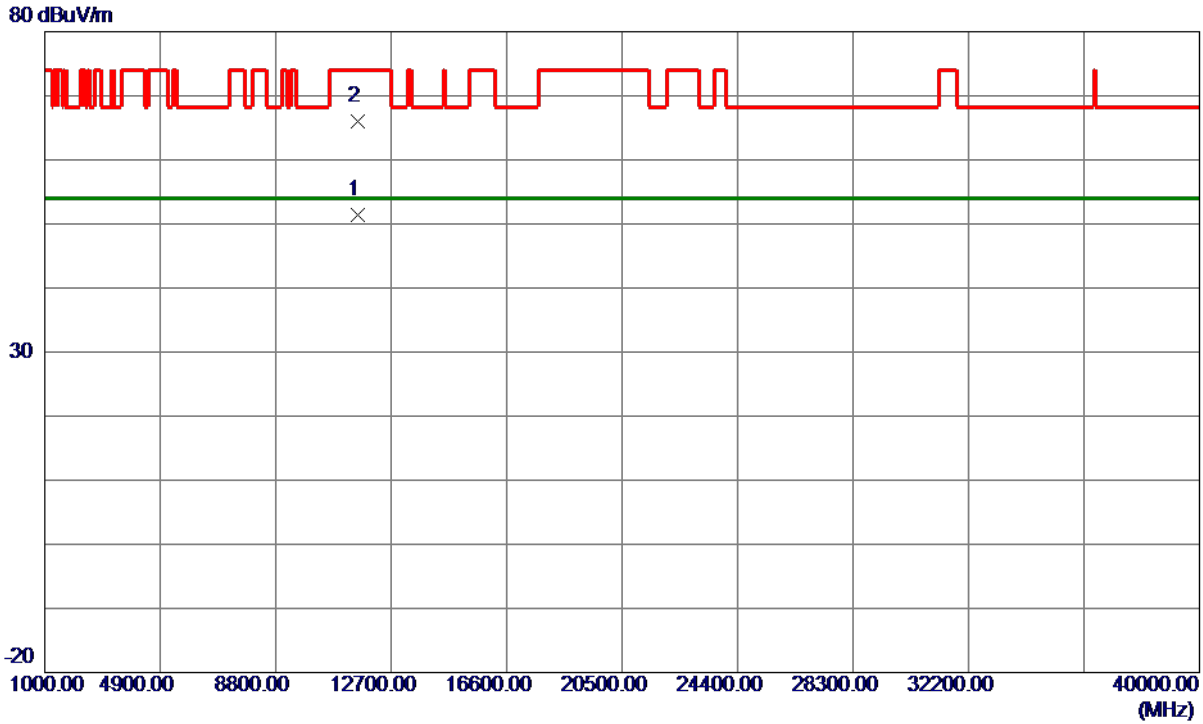

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11569.5300	36.74	14.57	51.31	74.00	-22.69	Peak	
2 *	11569.6950	51.39	14.57	65.96	74.00	-8.04	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

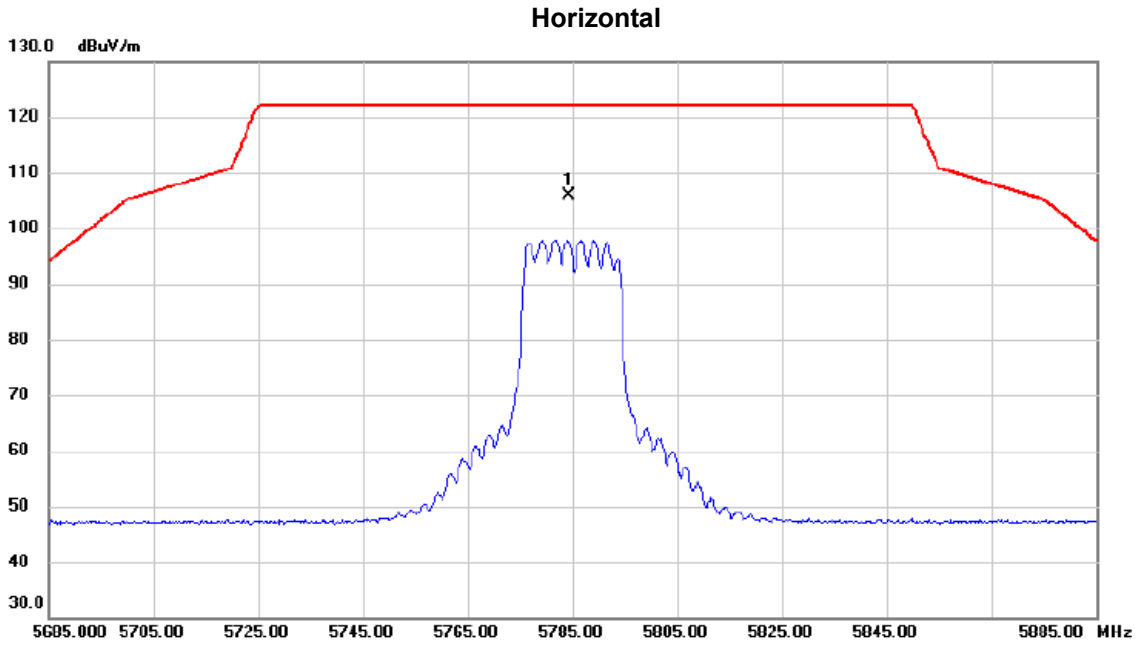


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5784.400	88.08	17.83	105.91	122.20	-16.29	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Horizontal

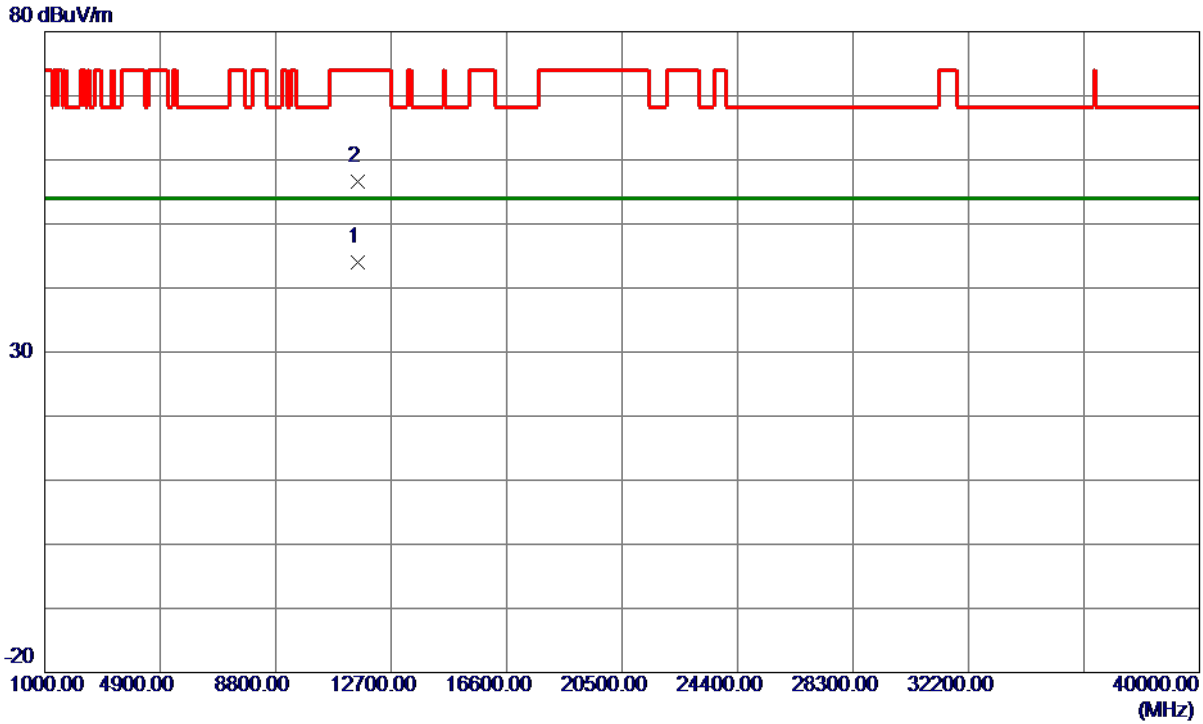


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.6600	29.47	14.57	44.04	54.00	-9.96	AVG	
2	11571.0900	42.12	14.57	56.69	74.00	-17.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

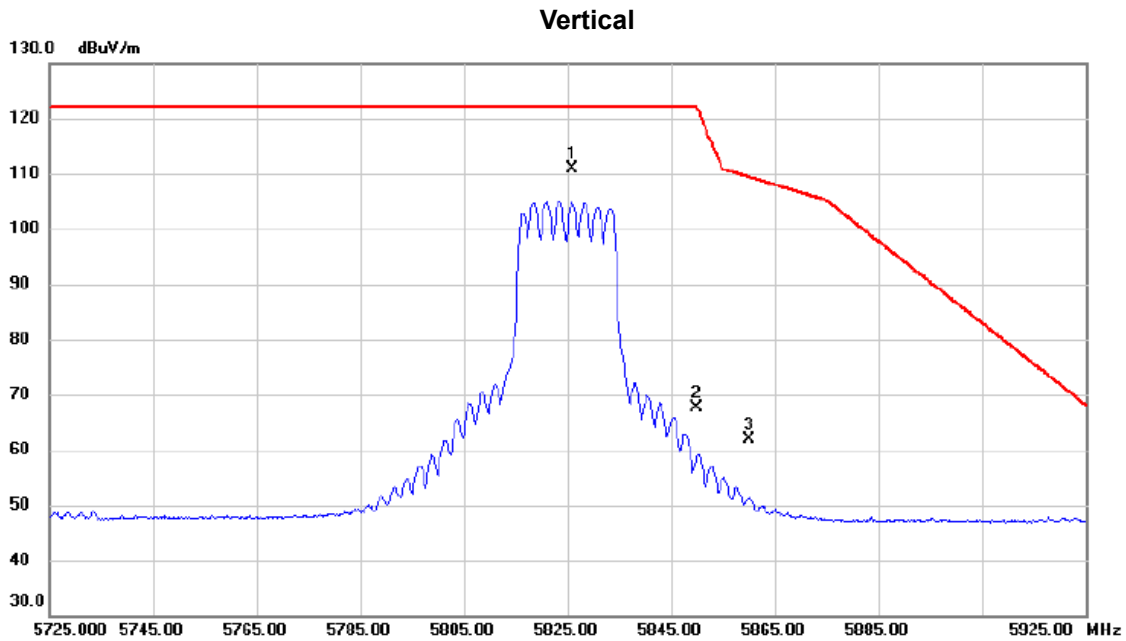

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.000	92.83	18.10	110.93	122.20	-11.27	peak	No Limit
2		5850.000	49.49	18.14	67.63	122.20	-54.57	peak	
3		5860.000	43.76	18.15	61.91	109.40	-47.49	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Vertical

80 dBuV/m

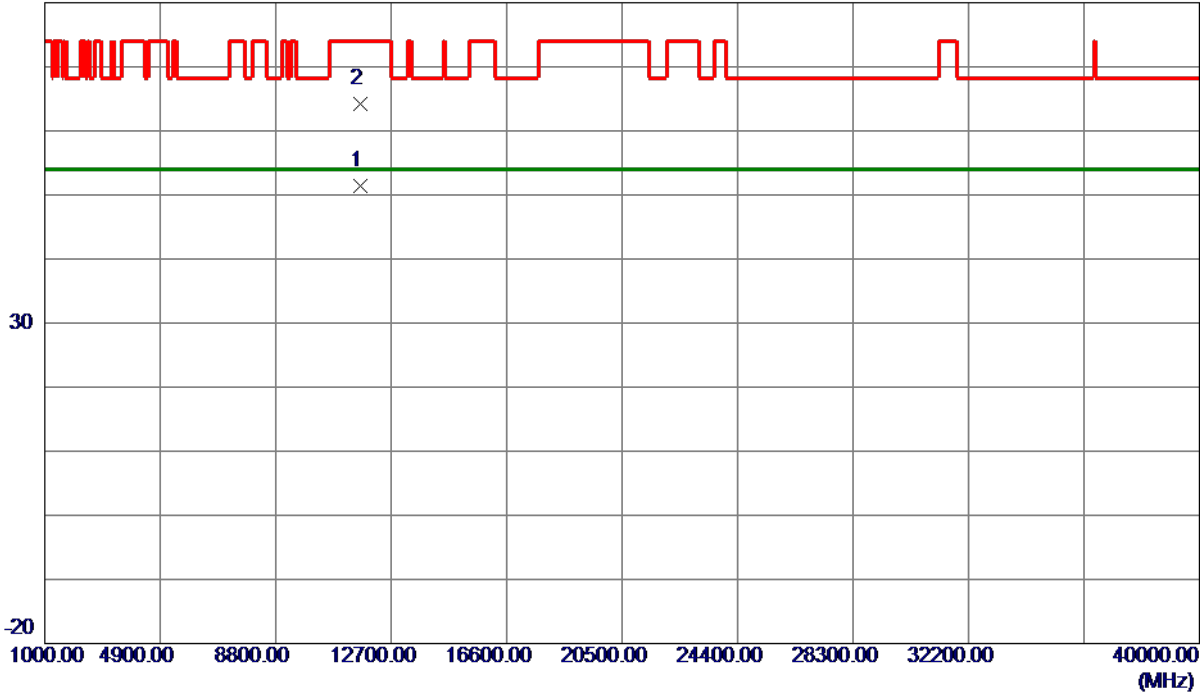


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.5850	36.74	14.57	51.31	54.00	-2.69	AVG	
2	11649.7600	49.65	14.57	64.22	74.00	-9.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

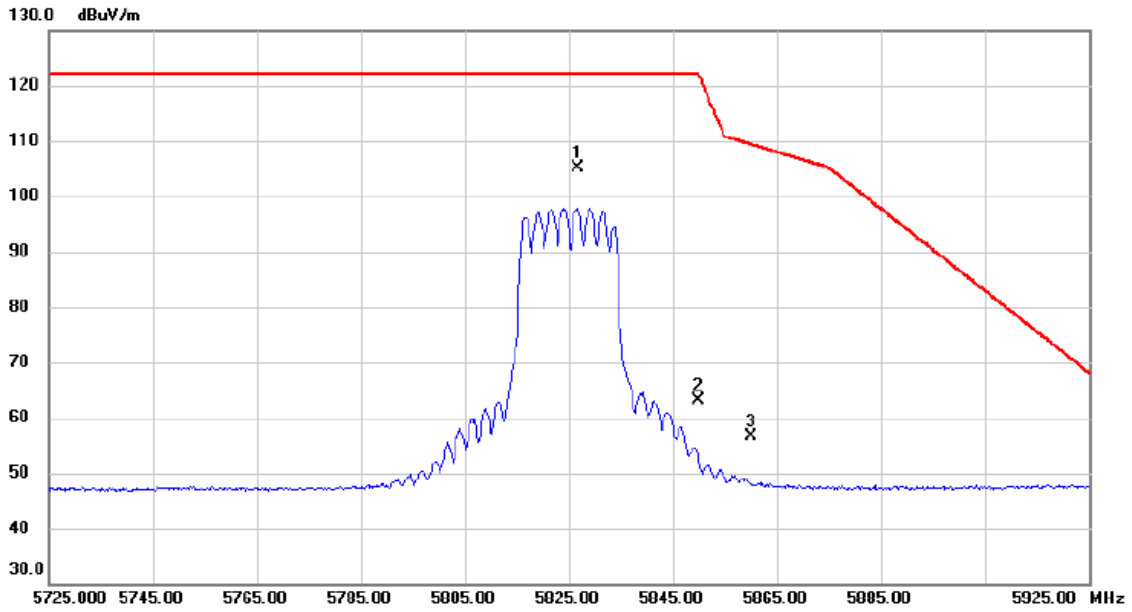

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.800	87.07	17.96	105.03	122.20	-17.17	peak	No Limit
2		5850.000	45.06	18.03	63.09	122.20	-59.11	peak	
3		5860.000	38.58	18.06	56.64	109.40	-52.76	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

80 dBuV/m

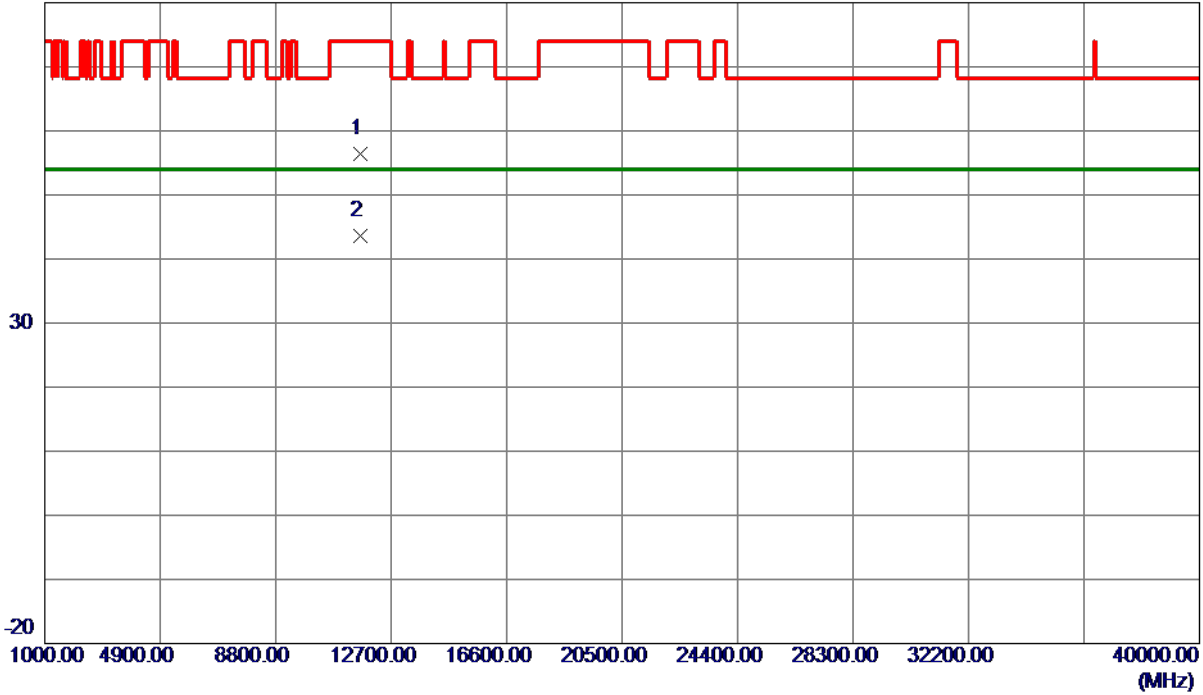


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.6500	41.85	14.57	56.42	74.00	-17.58	Peak	
2 *	11649.9200	29.12	14.57	43.69	54.00	-10.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

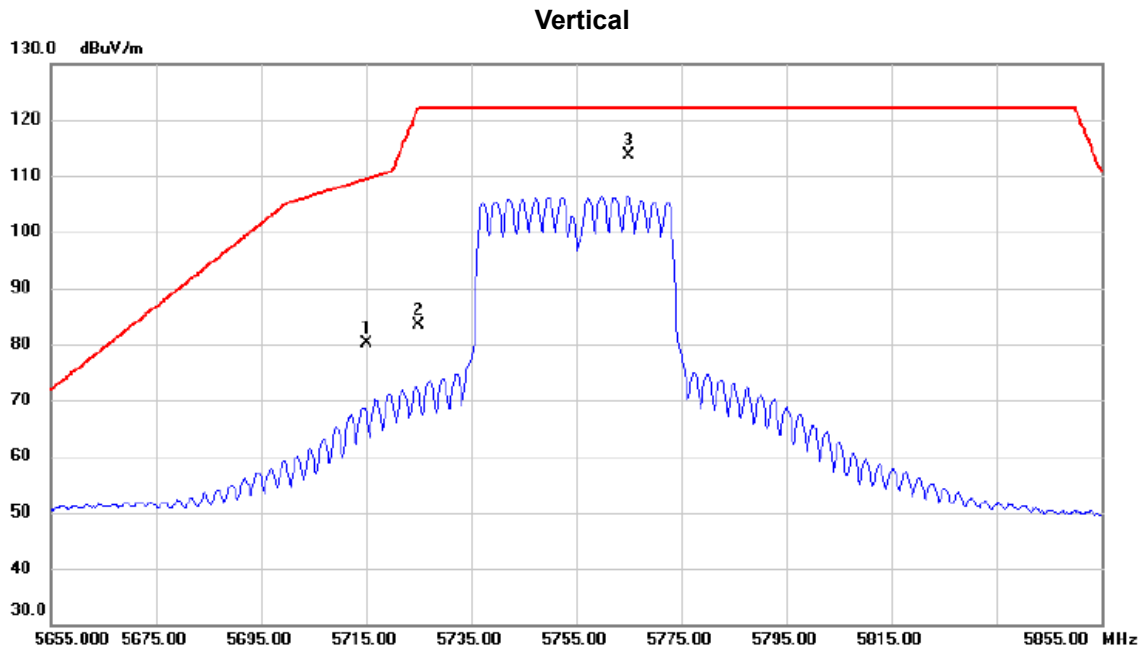

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	62.52	17.62	80.14	109.40	-29.26	peak	
2		5725.000	65.65	17.65	83.30	122.20	-38.90	peak	
3	*	5765.000	95.76	17.77	113.53	122.20	-8.67	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Vertical

80 dBuV/m

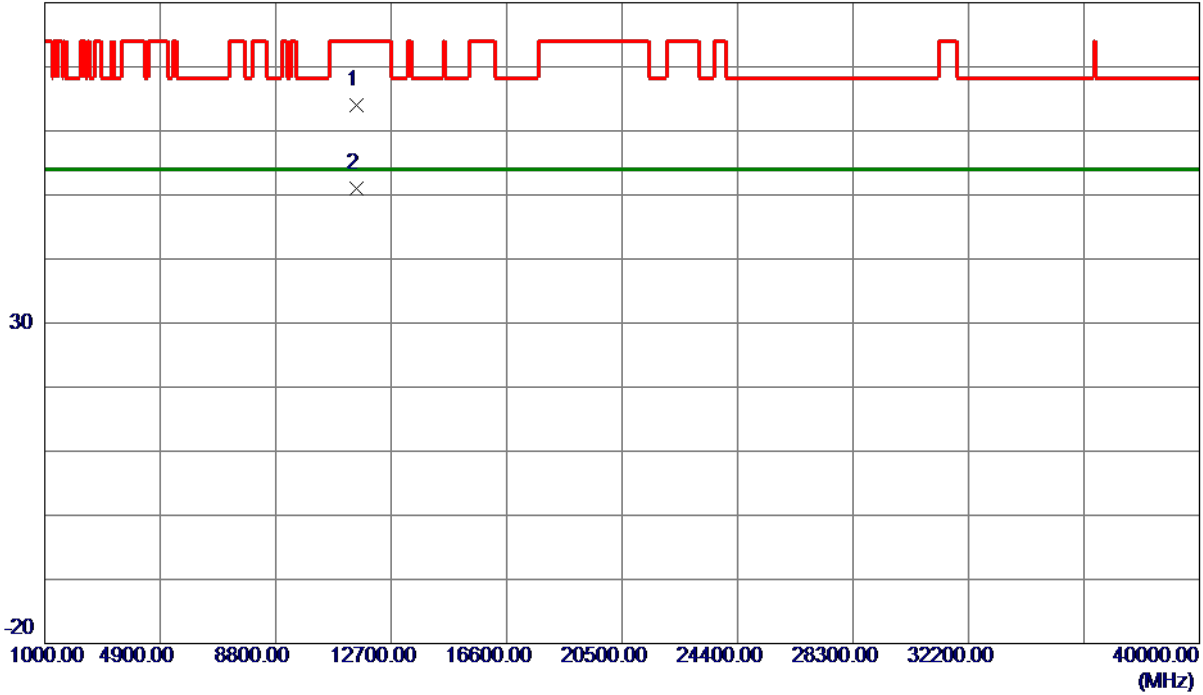


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11509.0450	49.41	14.57	63.98	74.00	-10.02	Peak	
2 *	11511.8050	36.41	14.57	50.98	54.00	-3.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

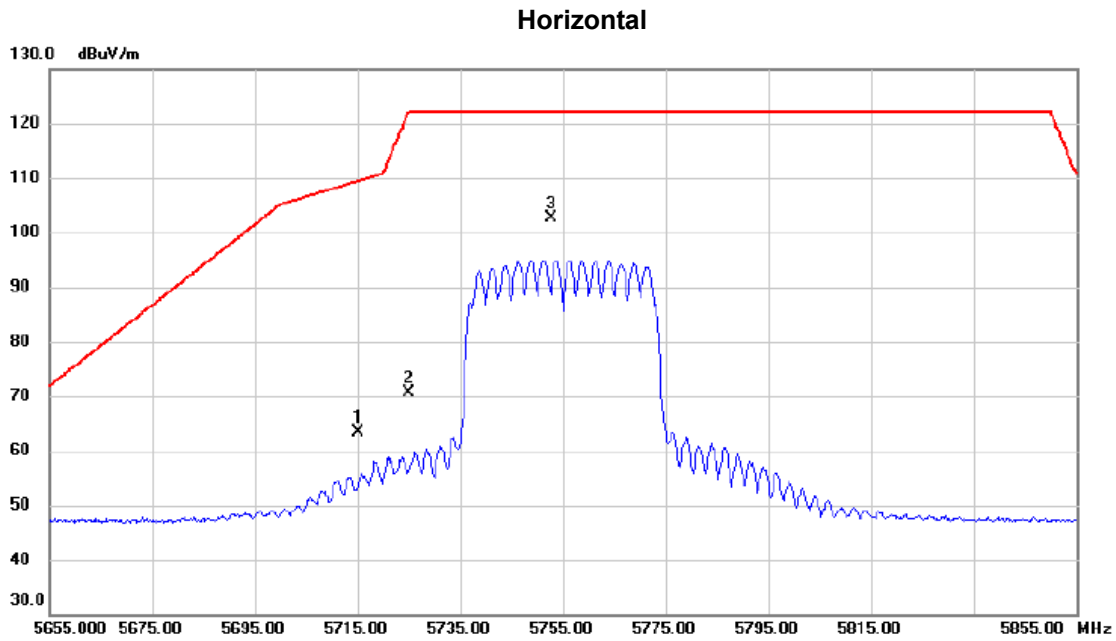

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	45.87	17.62	63.49	109.40	-45.91	peak	
2		5725.000	53.07	17.65	70.72	122.20	-51.48	peak	
3	*	5752.800	84.82	17.74	102.56	122.20	-19.64	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

80 dBuV/m

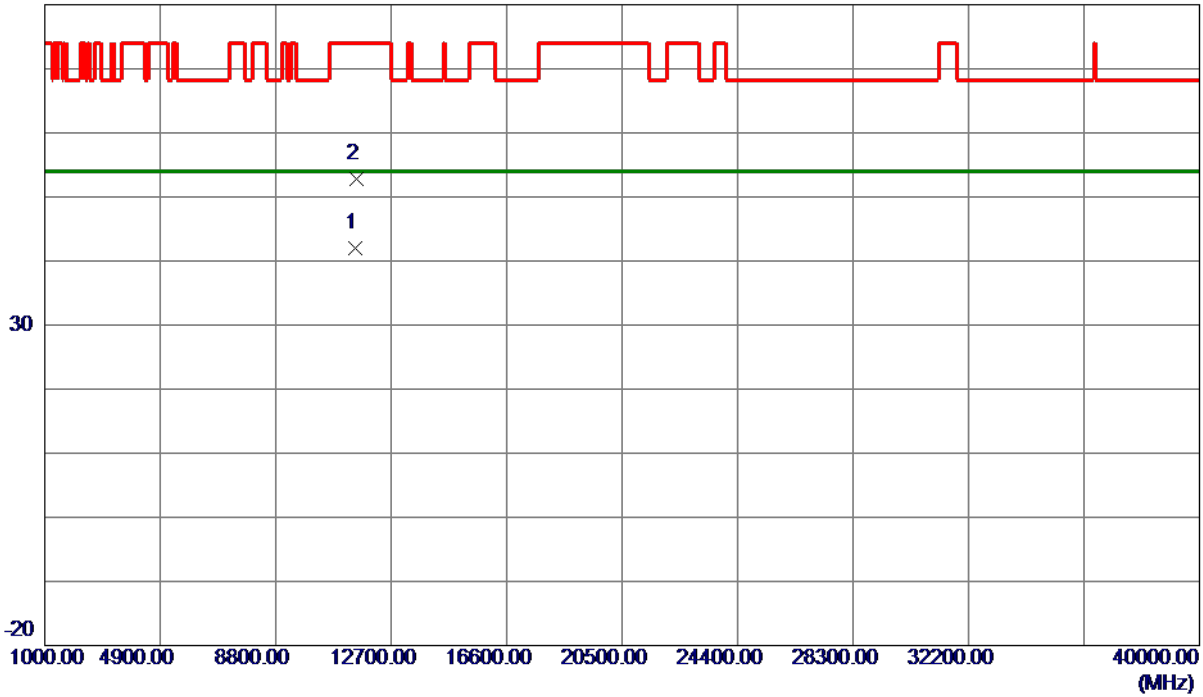


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.2750	27.42	14.57	41.99	54.00	-12.01	AVG	
2	11508.8200	38.30	14.57	52.87	74.00	-21.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

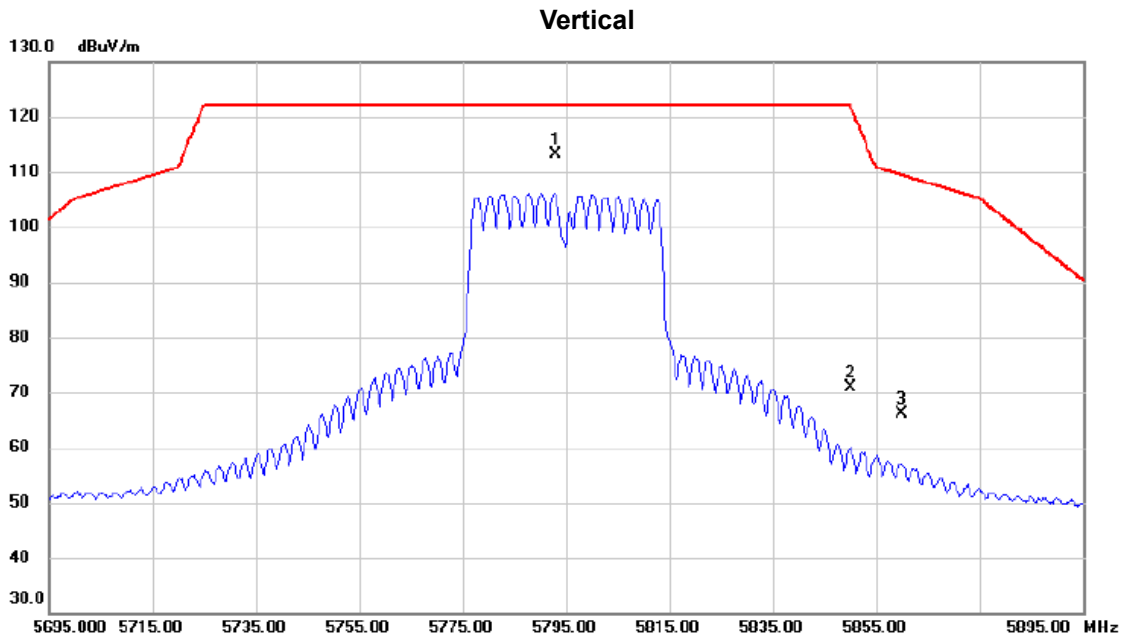

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5793.000	95.33	17.85	113.18	122.20	-9.02	peak	No Limit
2		5850.000	52.95	18.03	70.98	122.20	-51.22	peak	
3		5860.000	48.13	18.06	66.19	109.40	-43.21	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Vertical

80 dBuV/m

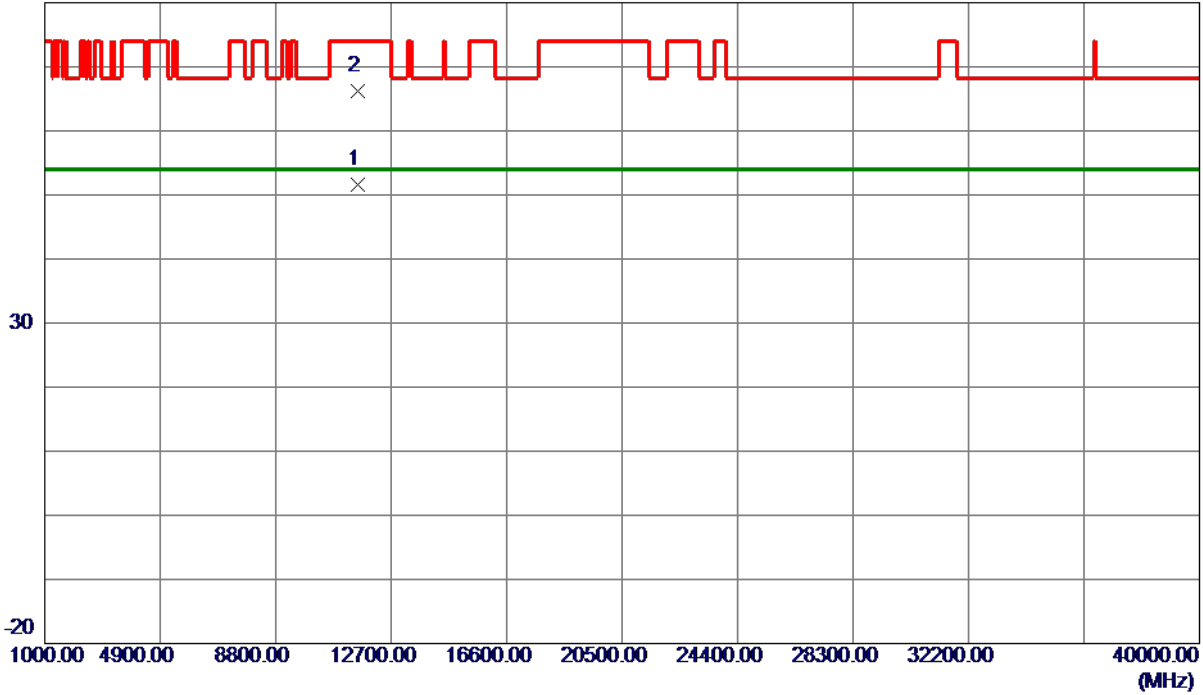


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11587.5000	37.12	14.57	51.69	54.00	-2.31	AVG	
2	11588.9900	51.69	14.57	66.26	74.00	-7.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

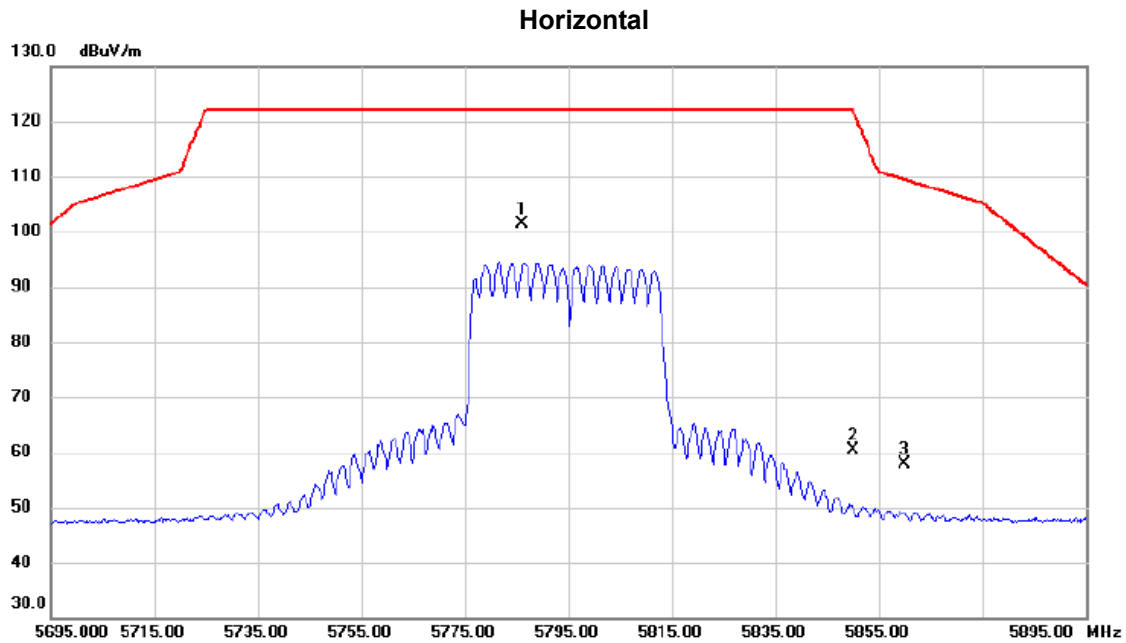

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5786.200	83.54	17.83	101.37	122.20	-20.83	peak	No Limit
2		5850.000	42.38	18.03	60.41	122.20	-61.79	peak	
3		5860.000	39.78	18.06	57.84	109.40	-51.56	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Horizontal

80 dBuV/m

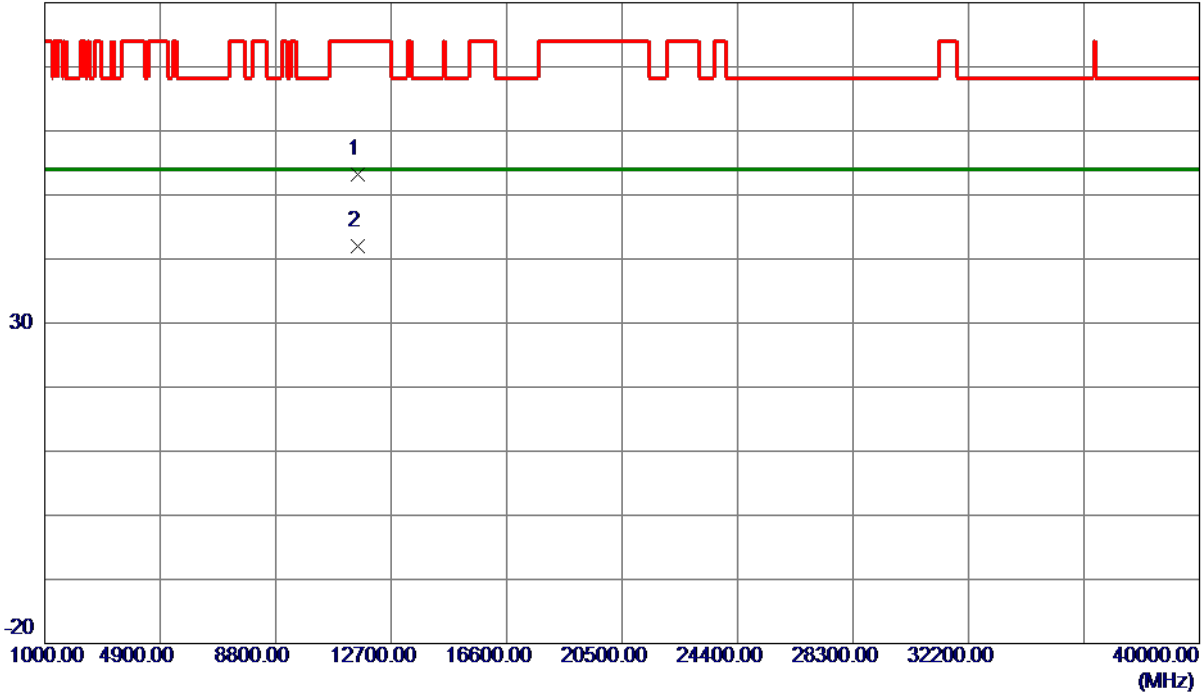


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.7300	38.70	14.57	53.27	74.00	-20.73	Peak	
2 *	11590.9700	27.44	14.57	42.01	54.00	-11.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

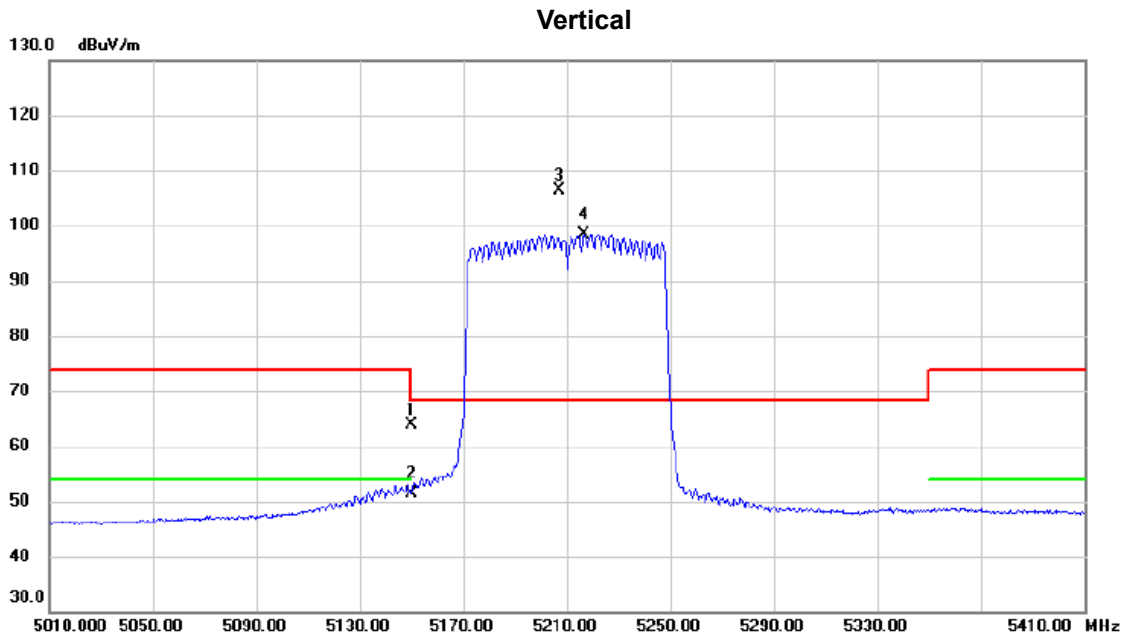


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	47.75	16.15	63.90	74.00	-10.10	peak	
2		5150.000	35.34	16.15	51.49	54.00	-2.51	AVG	
3	*	5207.200	90.18	16.29	106.47	68.30	38.17	peak	No Limit
4	X	5216.800	82.12	16.31	98.43	68.30	30.13	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

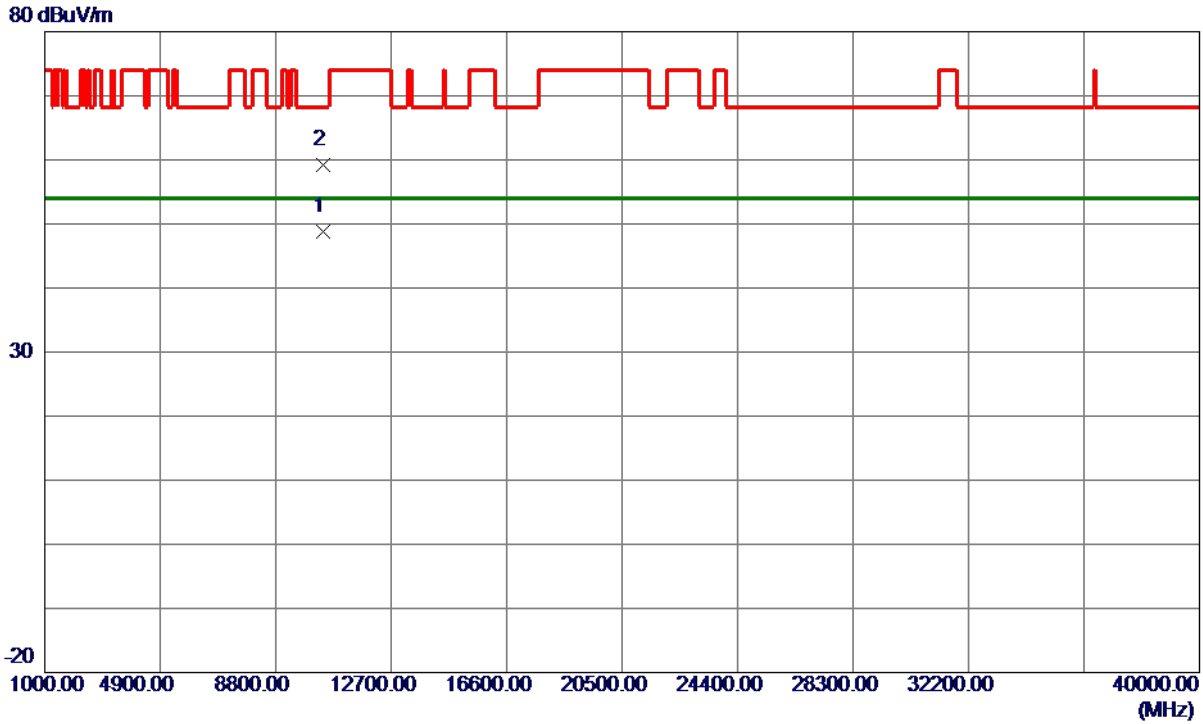


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10421.5530	35.26	13.57	48.83	54.00	-5.17	AVG	
2	10421.6100	45.57	13.57	59.14	68.30	-9.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

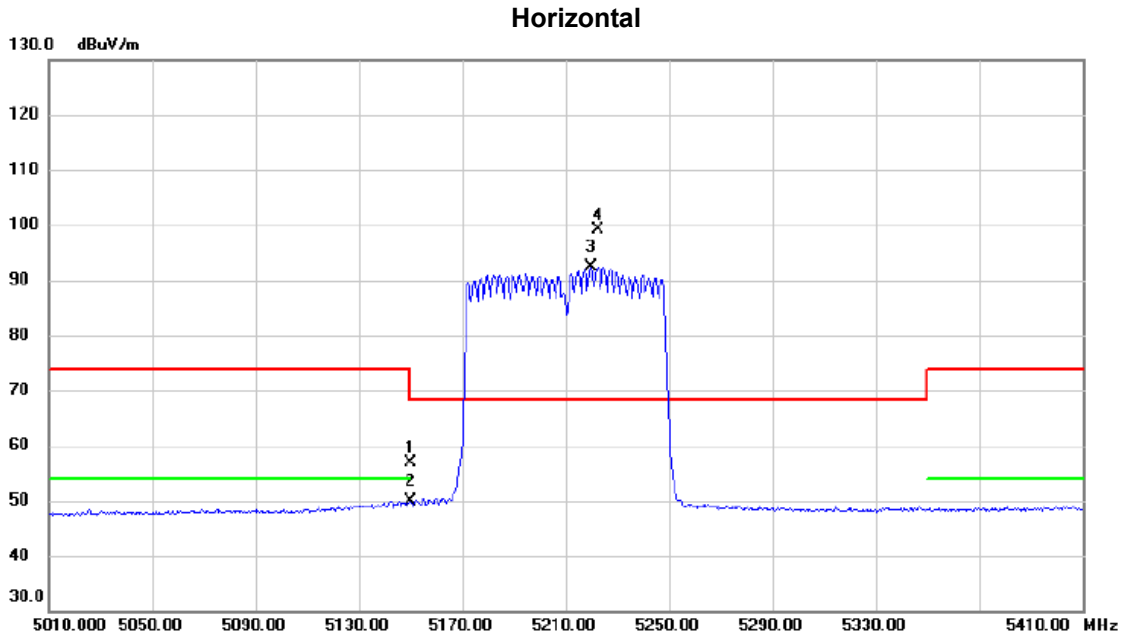

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	40.84	16.15	56.99	74.00	-17.01	peak	
2		5150.000	33.65	16.15	49.80	54.00	-4.20	AVG	
3	X	5219.600	76.05	16.33	92.38	68.30	24.08	AVG	No Limit
4	*	5222.400	82.81	16.33	99.14	68.30	30.84	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

80 dBuV/m

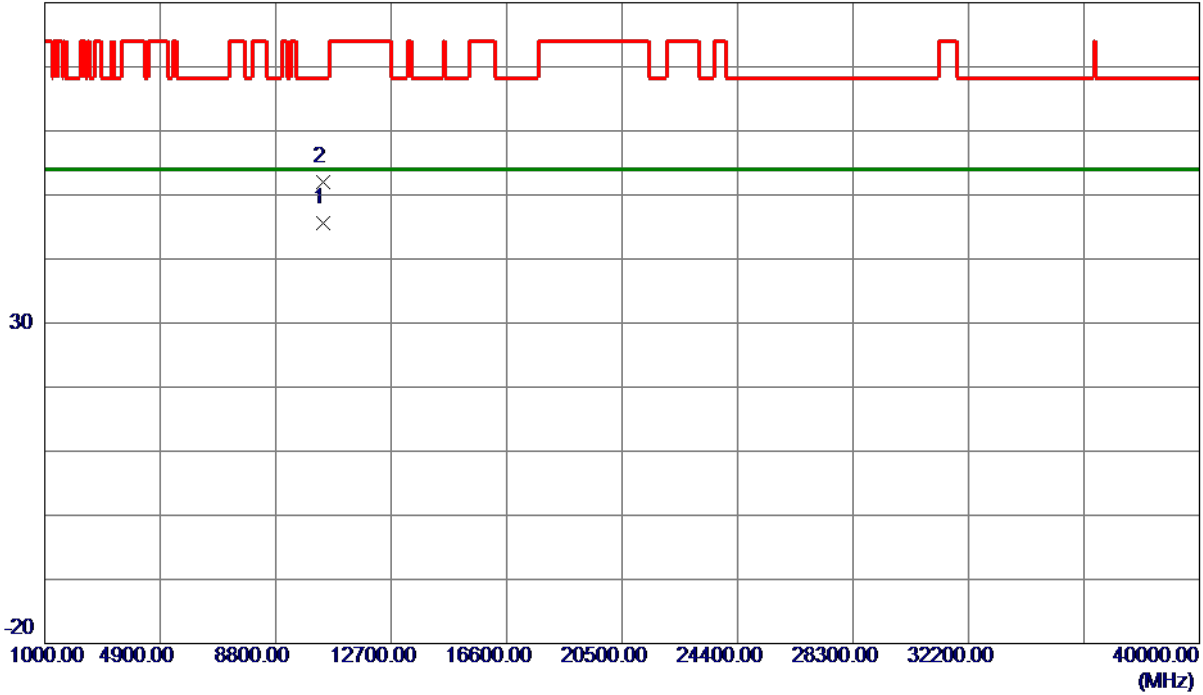


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10417.5519	31.96	13.57	45.53	54.00	-8.47	AVG	
2	10417.7950	38.35	13.57	51.92	68.30	-16.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

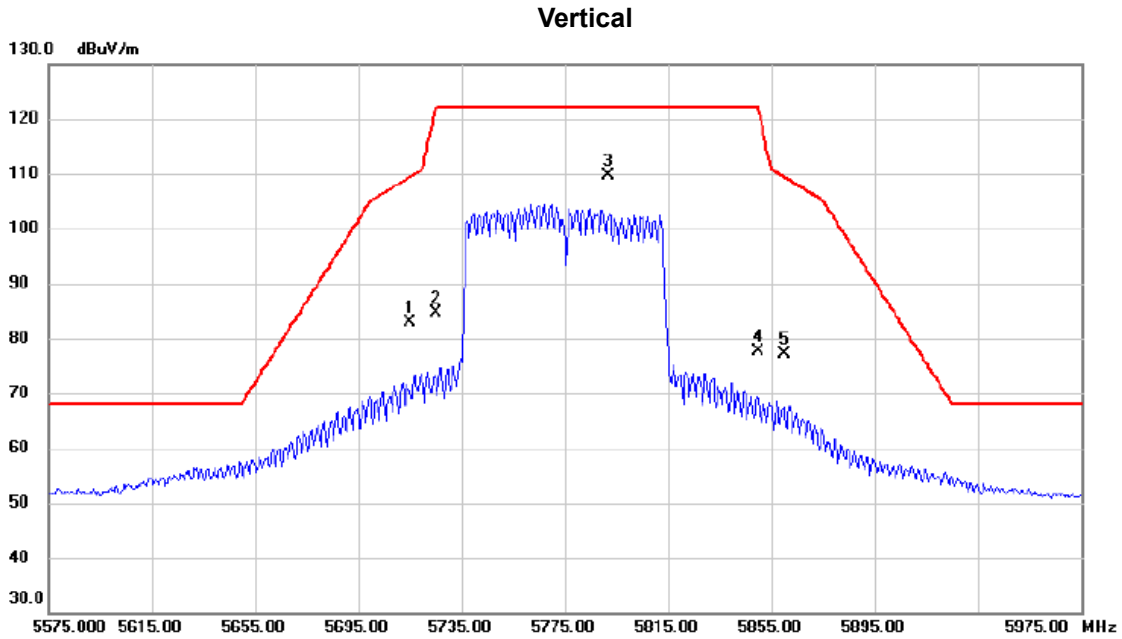


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	65.23	17.62	82.85	109.40	-26.55	peak	
2		5725.000	66.89	17.65	84.54	122.20	-37.66	peak	
3	*	5791.800	91.72	17.85	109.57	122.20	-12.63	peak	No Limit
4		5850.000	59.50	18.03	77.53	122.20	-44.67	peak	
5		5860.000	58.99	18.06	77.05	109.40	-32.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

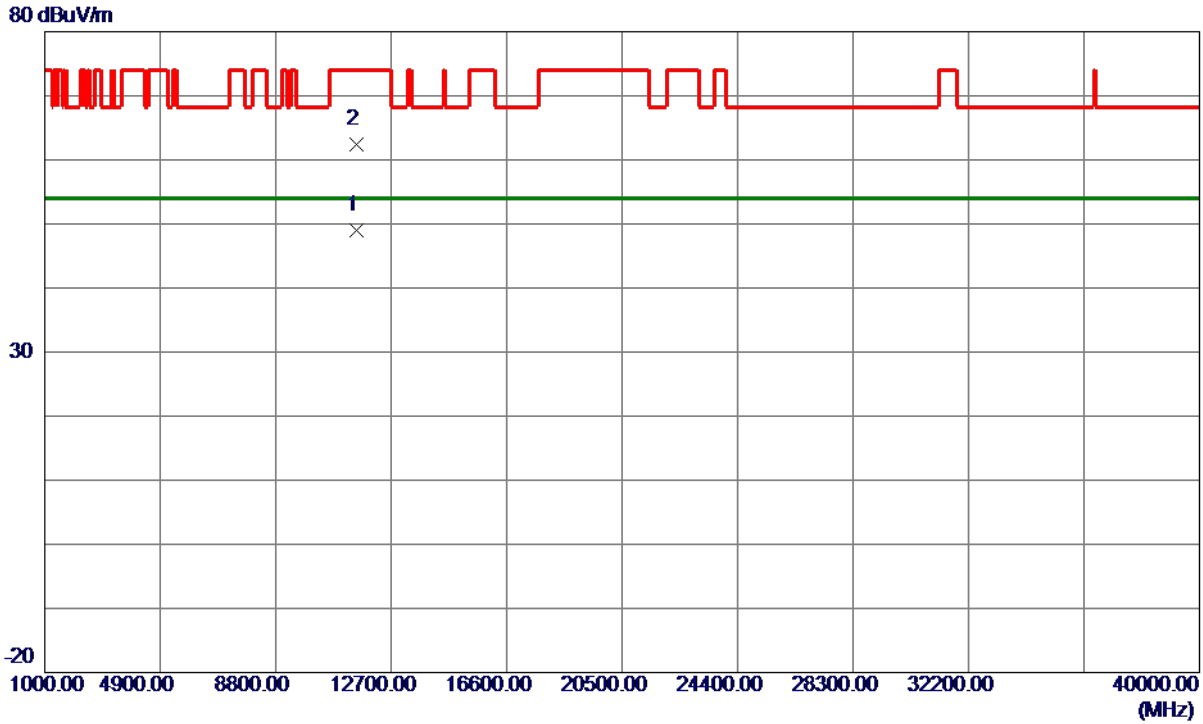


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.7950	34.41	14.57	48.98	54.00	-5.02	AVG	
2	11550.3600	47.85	14.57	62.42	74.00	-11.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

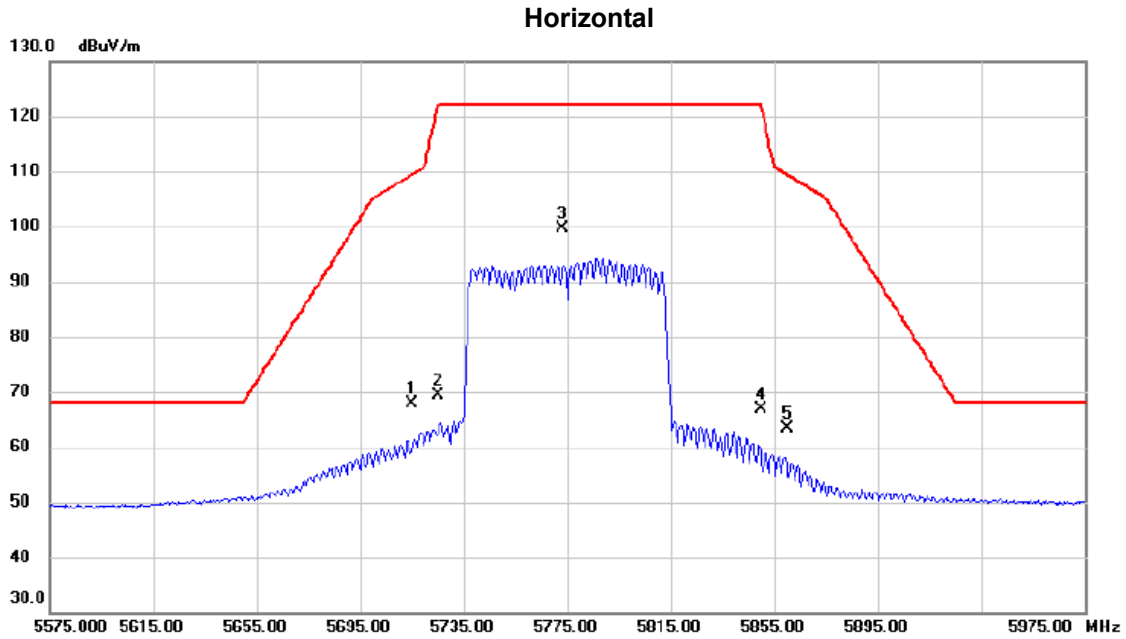

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.000	50.37	17.62	67.99	109.40	-41.41	peak	
2	5725.000	51.77	17.65	69.42	122.20	-52.78	peak	
3 *	5773.400	81.89	17.79	99.68	122.20	-22.52	peak	No Limit
4	5850.000	48.89	18.03	66.92	122.20	-55.28	peak	
5	5860.000	45.30	18.06	63.36	109.40	-46.04	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

80 dBuV/m

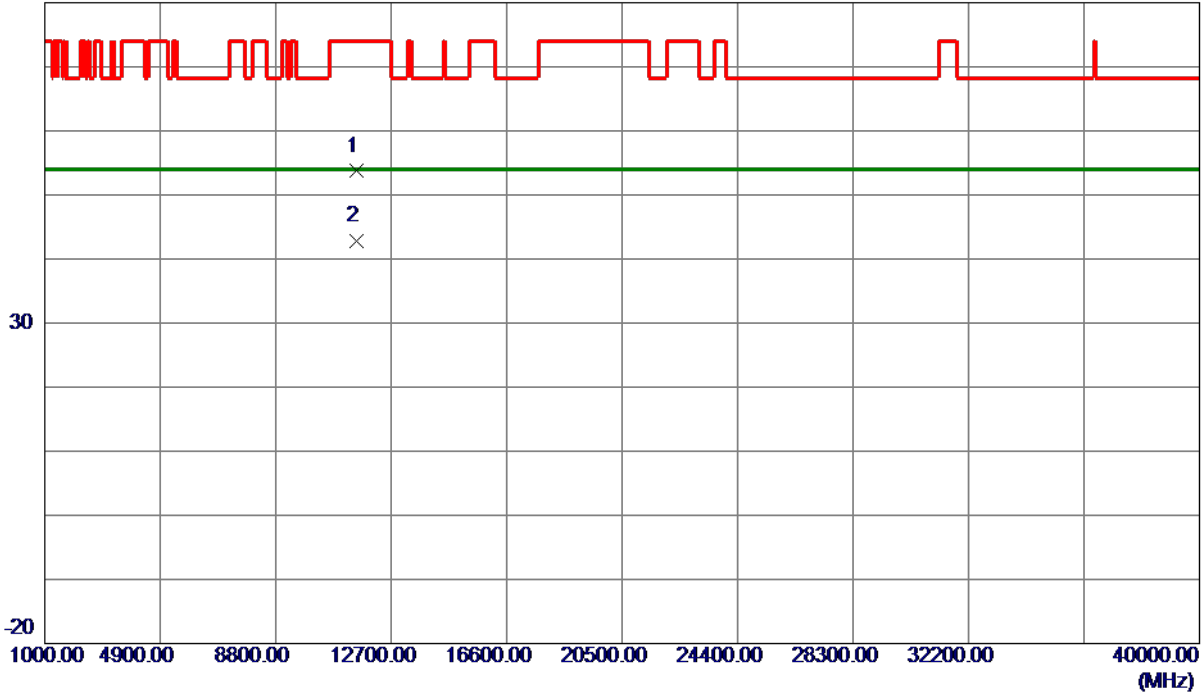


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.7250	39.13	14.57	53.70	74.00	-20.30	Peak	
2 *	11550.7350	28.30	14.57	42.87	54.00	-11.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

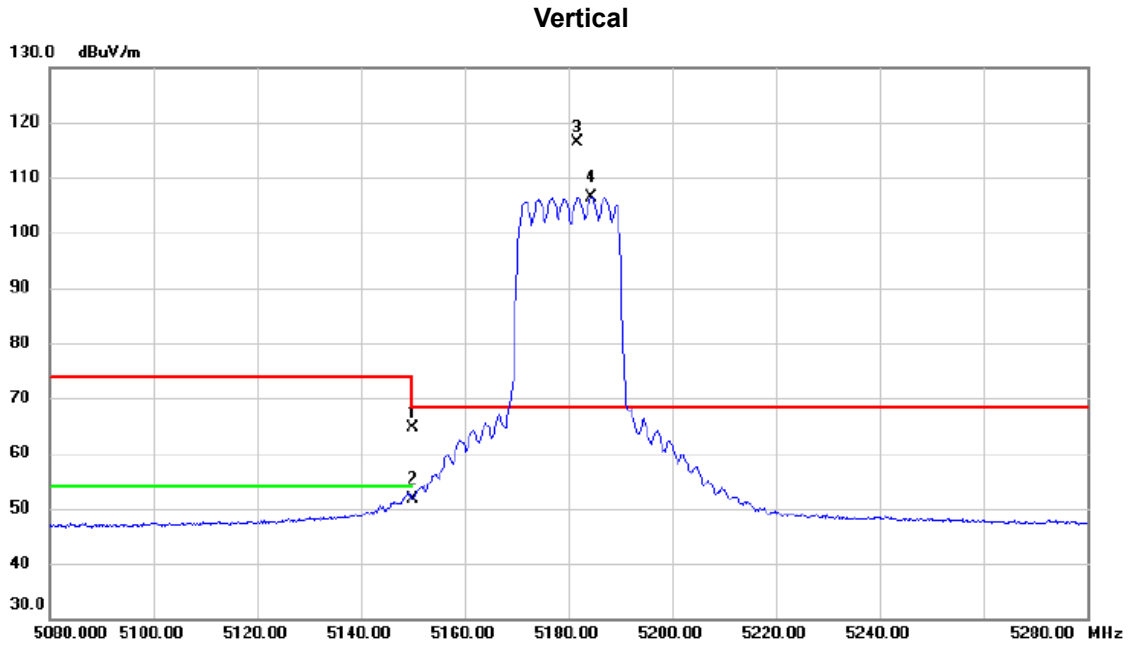

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	48.54	16.15	64.69	74.00	-9.31	peak	
2		5150.000	35.45	16.15	51.60	54.00	-2.40	AVG	
3	*	5181.800	100.16	16.23	116.39	68.30	48.09	peak	No Limit
4	X	5184.400	90.18	16.23	106.41	68.30	38.11	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

Vertical

80 dBuV/m

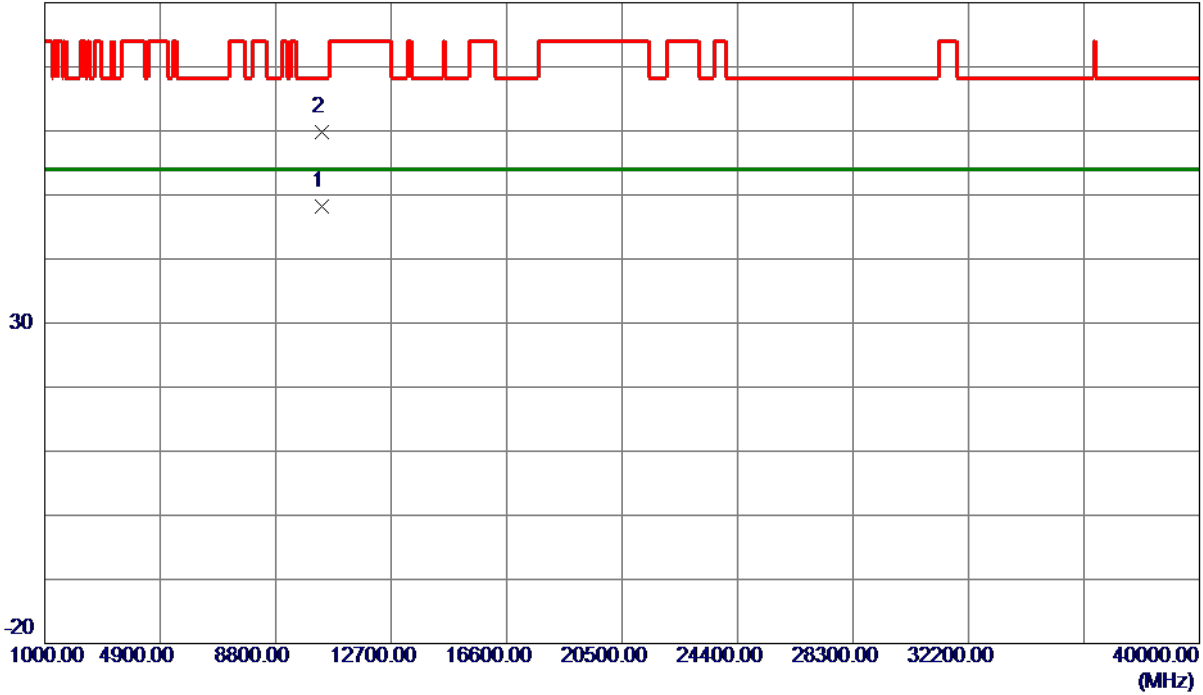


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.1170	34.62	13.51	48.13	54.00	-5.87	AVG	
2	10359.2750	46.21	13.51	59.72	68.30	-8.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

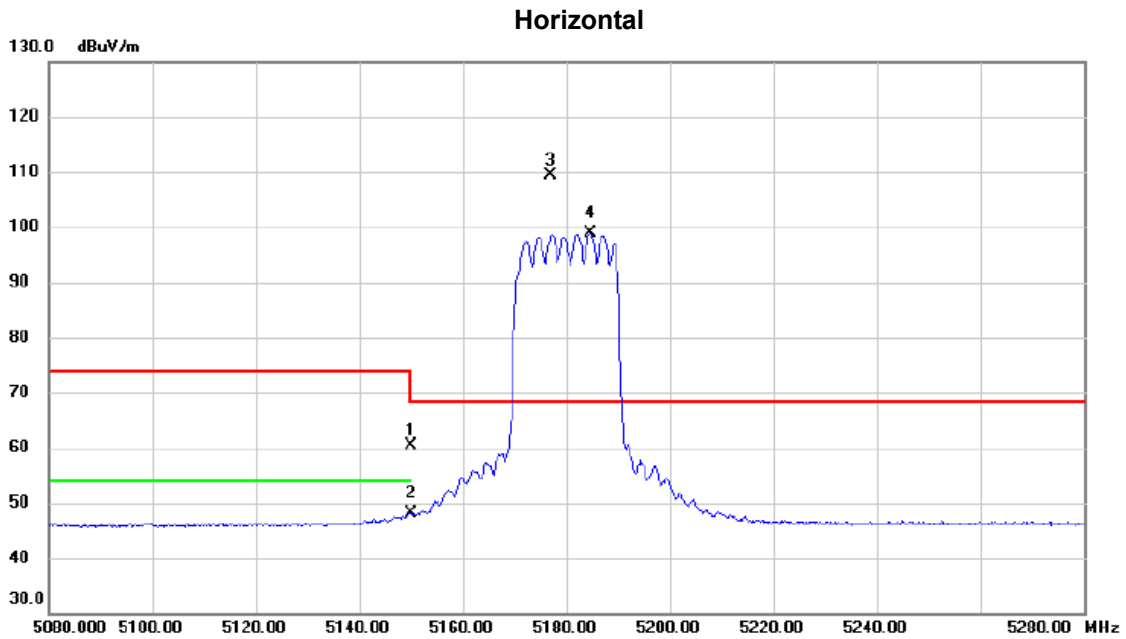

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	44.15	16.15	60.30	74.00	-13.70	peak	
2		5150.000	31.95	16.15	48.10	54.00	-5.90	AVG	
3	*	5176.800	93.05	16.22	109.27	68.30	40.97	peak	No Limit
4	X	5184.600	82.54	16.23	98.77	68.30	30.47	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

Horizontal

80 dBuV/m

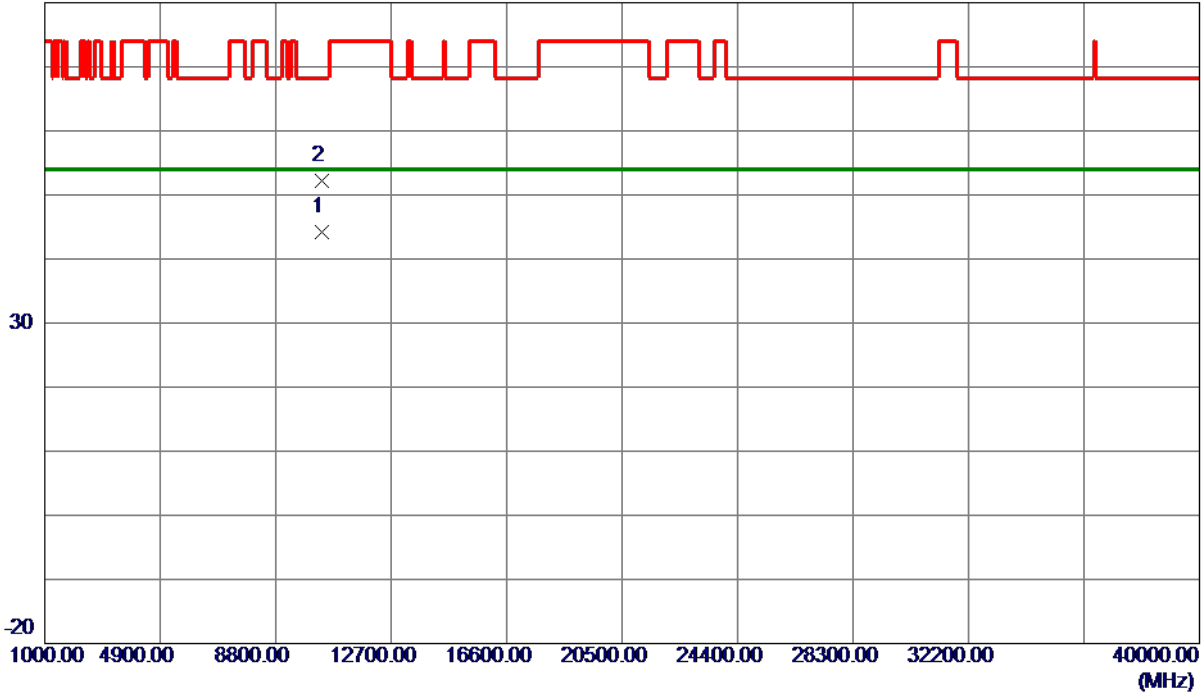


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.7880	30.64	13.52	44.16	54.00	-9.84	AVG	
2	10360.9850	38.62	13.52	52.14	68.30	-16.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

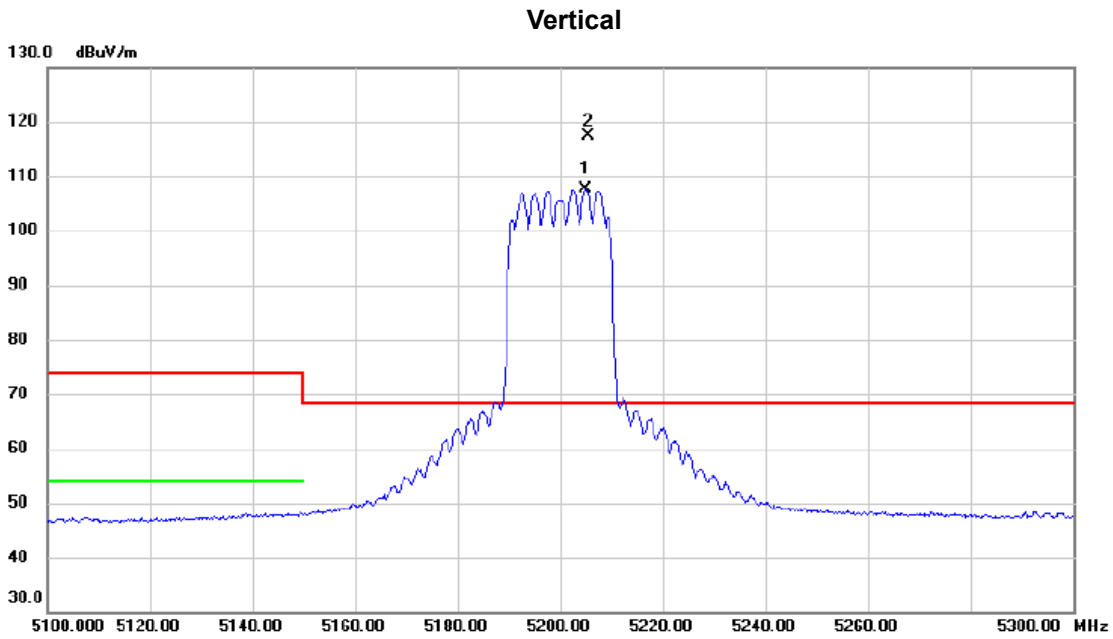


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5205.000	91.23	16.29	107.52	68.30	39.22	AVG	No Limit
2	*	5205.400	101.08	16.29	117.37	68.30	49.07	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz


Vertical

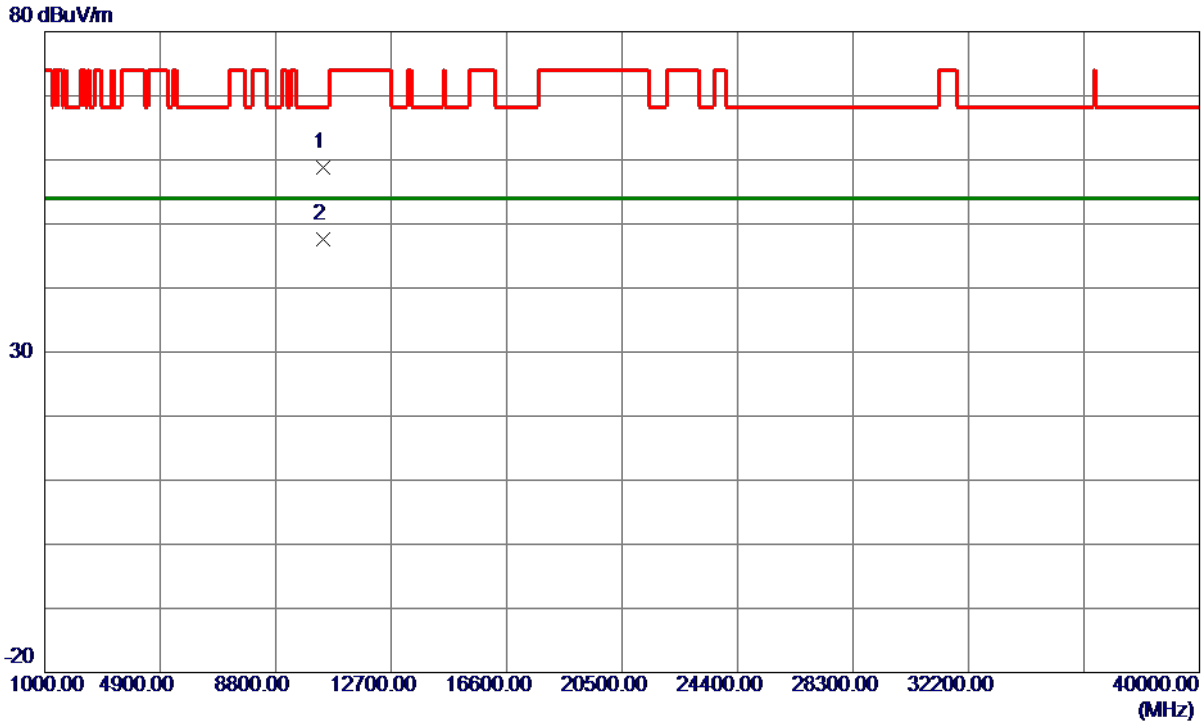

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10397.7150	45.24	13.55	58.79	68.30	-9.51	Peak	
2 *	10397.7150	33.99	13.55	47.54	54.00	-6.46	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

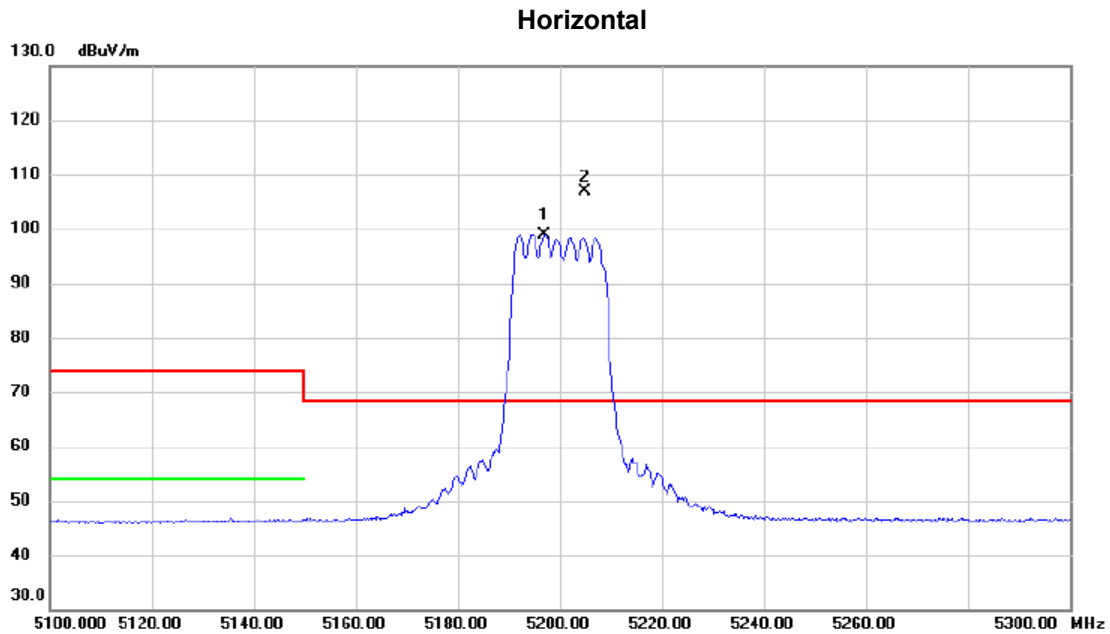


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5197.000	82.66	16.26	98.92	68.30	30.62	AVG	No Limit
2	*	5204.800	90.51	16.29	106.80	68.30	38.50	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

Horizontal

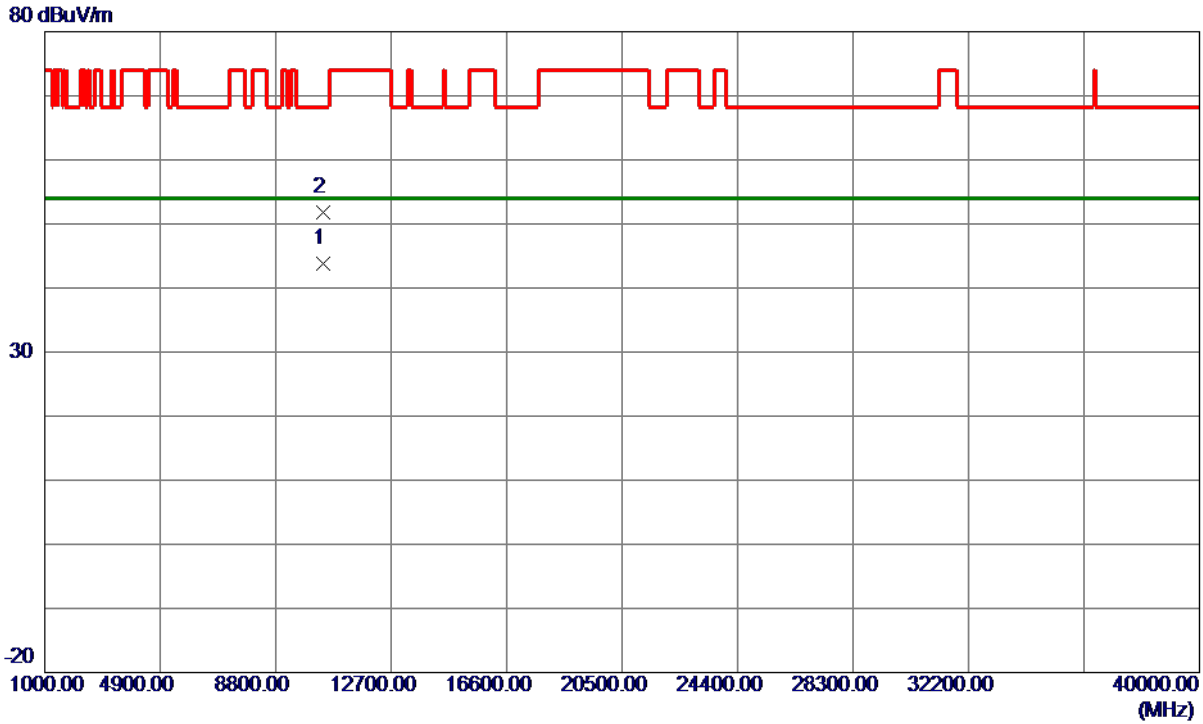


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10397.7450	30.21	13.55	43.76	54.00	-10.24	AVG	
2	10397.9650	38.20	13.55	51.75	68.30	-16.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

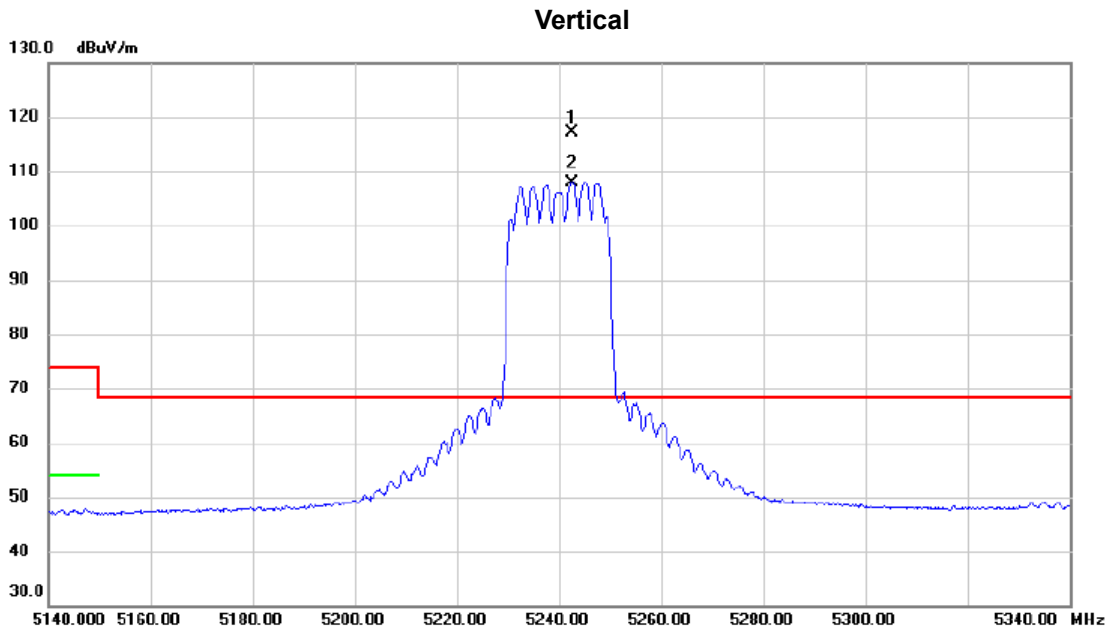


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5242.600	100.87	16.38	117.25	68.30	48.95	peak	No Limit
2	X	5242.600	91.57	16.38	107.95	68.30	39.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

Vertical

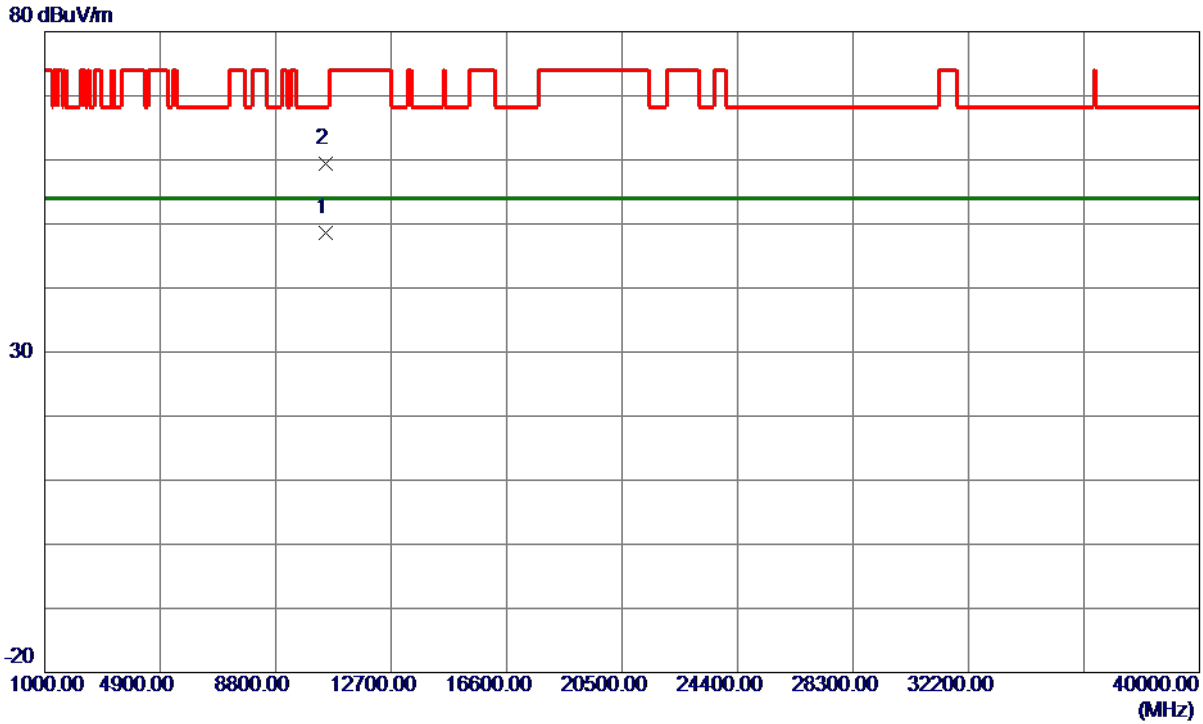


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.5880	34.88	13.63	48.51	54.00	-5.49	AVG	
2	10479.5950	45.69	13.63	59.32	68.30	-8.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

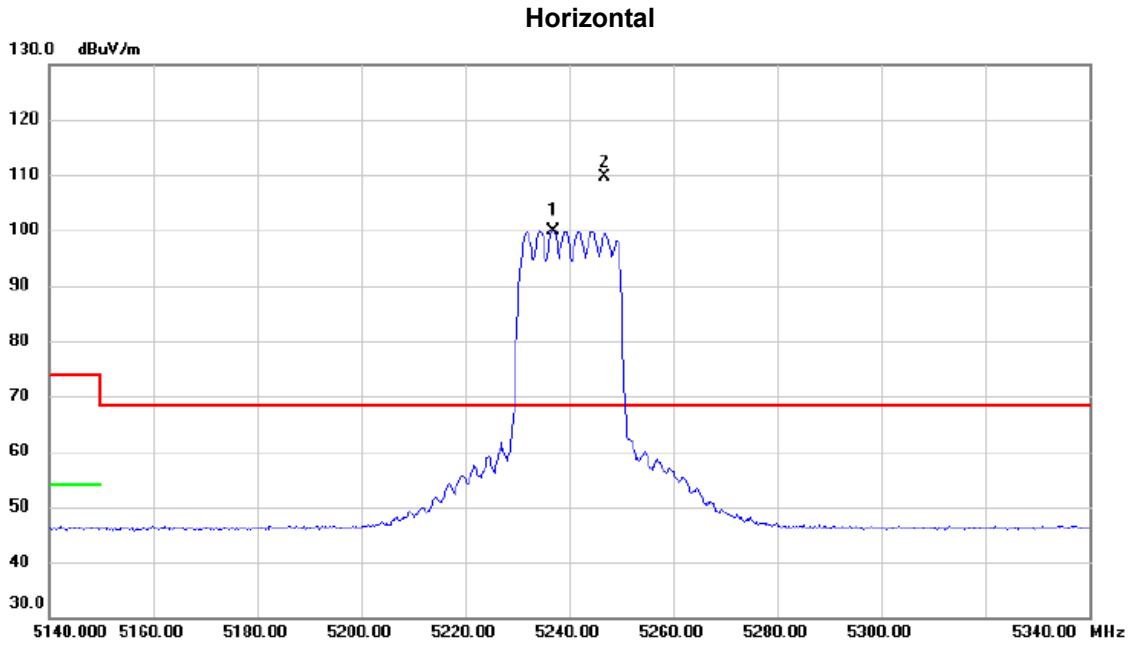


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5237.000	83.53	16.37	99.90	68.30	31.60	AVG	No Limit
2	*	5246.800	93.17	16.38	109.55	68.30	41.25	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

Horizontal

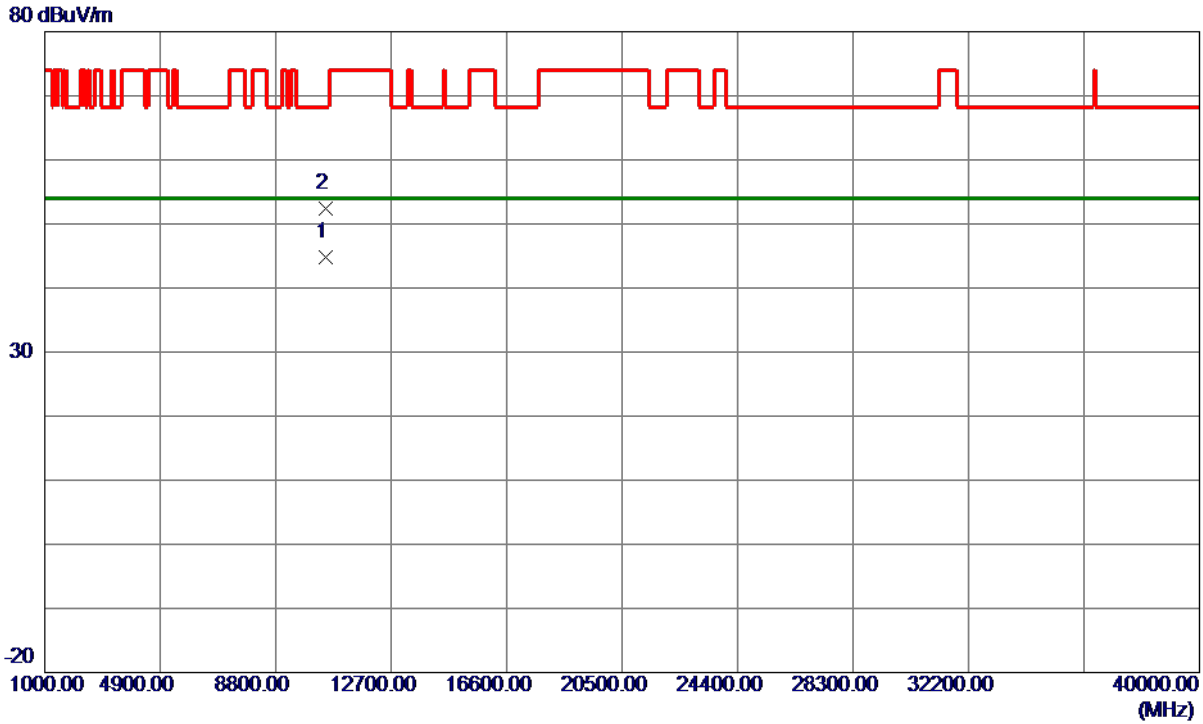


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.1720	31.09	13.63	44.72	54.00	-9.28	AVG	
2	10479.2000	38.80	13.63	52.43	68.30	-15.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

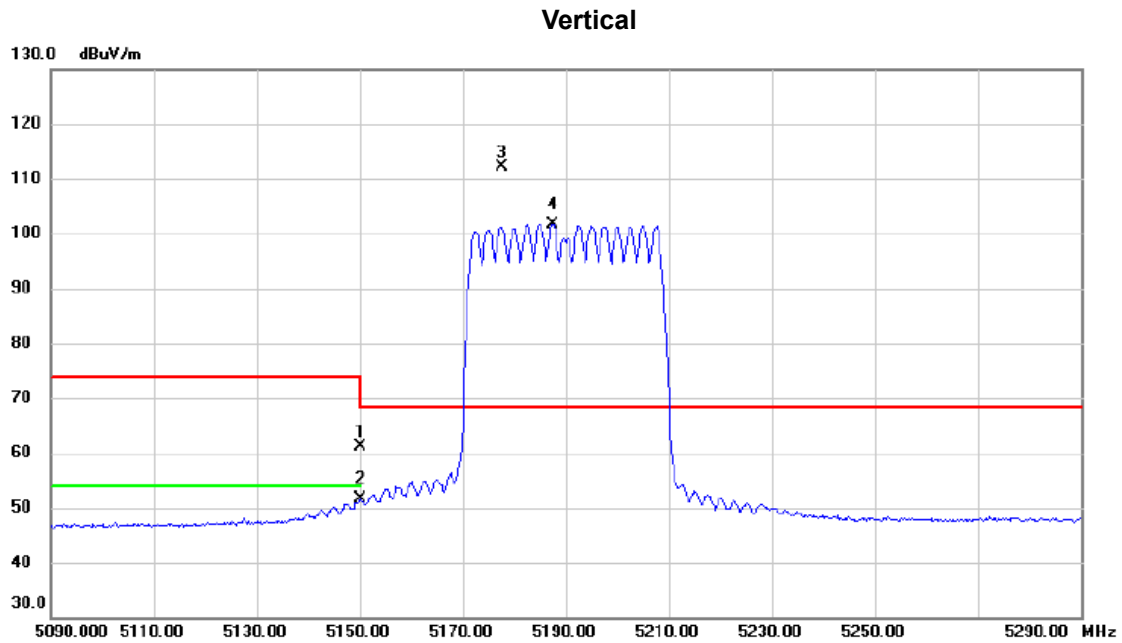


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	44.87	16.15	61.02	74.00	-12.98	peak	
2		5150.000	35.48	16.15	51.63	54.00	-2.37	AVG	
3	*	5177.600	95.95	16.22	112.17	68.30	43.87	peak	No Limit
4	X	5187.400	85.49	16.25	101.74	68.30	33.44	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

Vertical

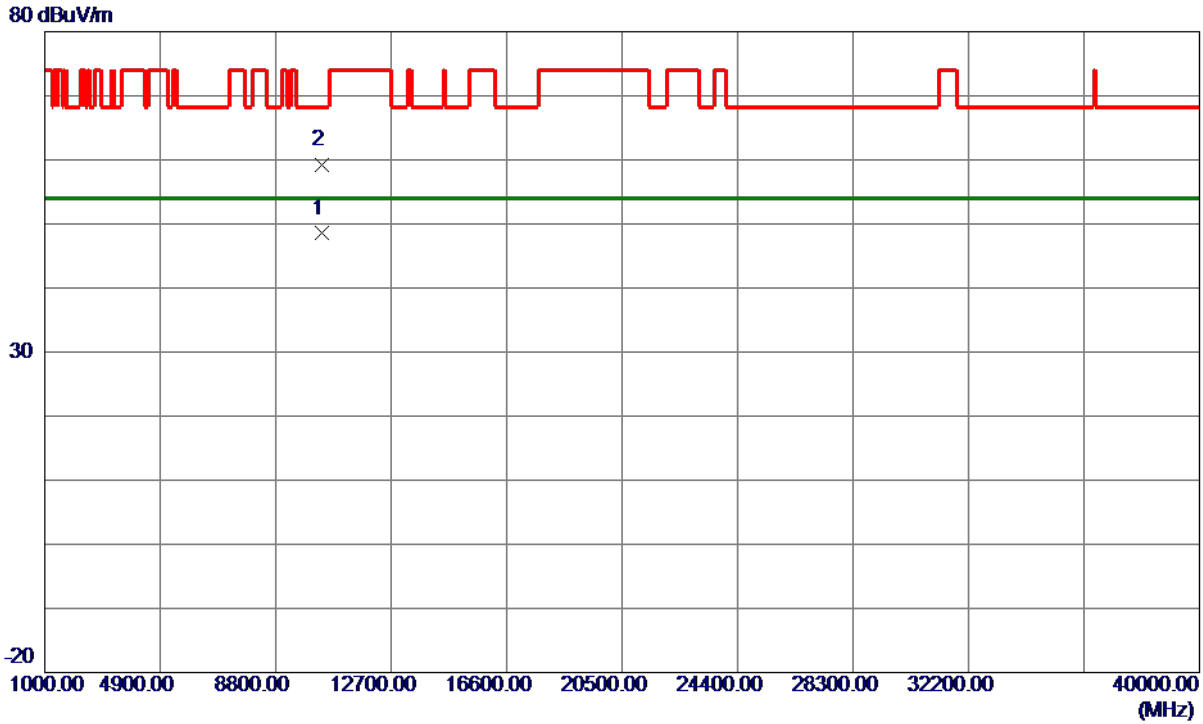


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10378.3380	34.97	13.53	48.50	54.00	-5.50	AVG	
2	10378.7600	45.73	13.53	59.26	68.30	-9.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

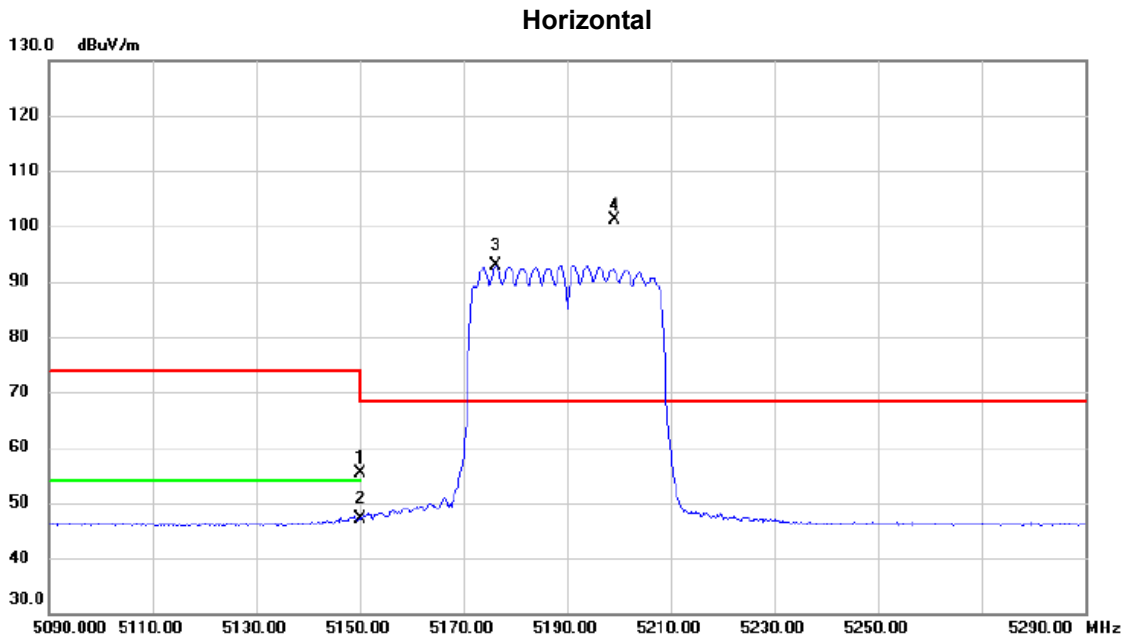


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	39.20	16.15	55.35	74.00	-18.65	peak	
2		5150.000	31.03	16.15	47.18	54.00	-6.82	AVG	
3	X	5176.400	76.65	16.22	92.87	68.30	24.57	AVG	No Limit
4	*	5199.200	84.78	16.27	101.05	68.30	32.75	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

Horizontal

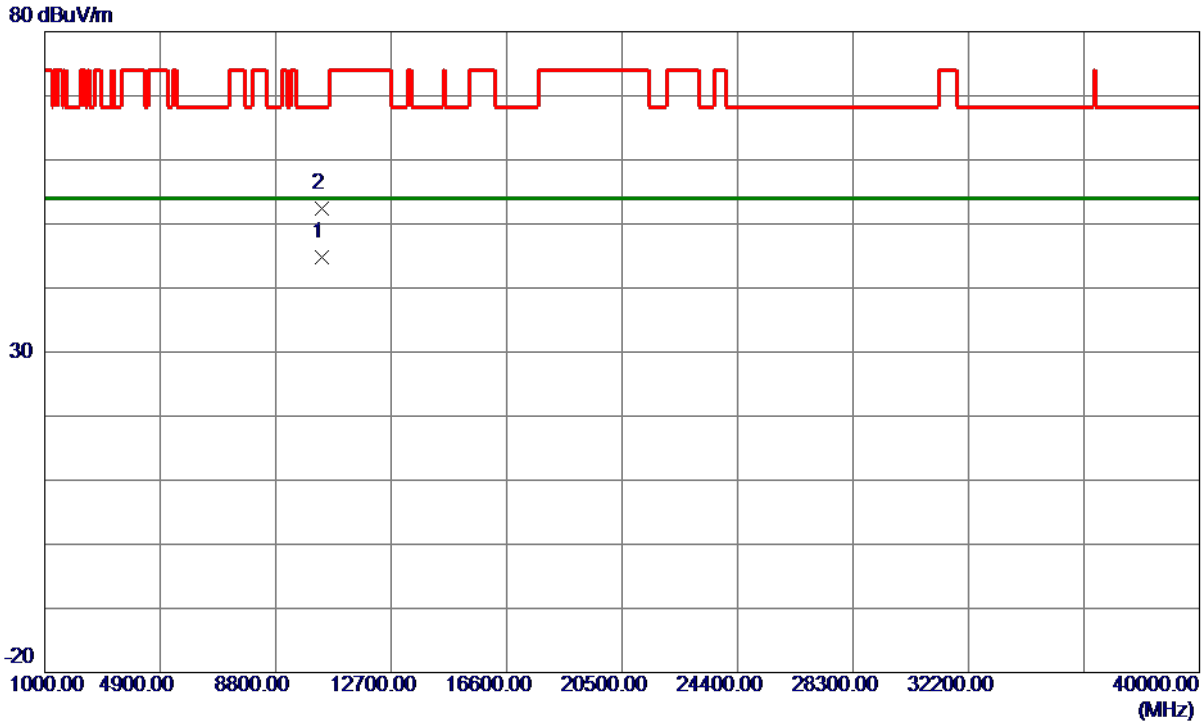


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.2250	31.33	13.53	44.86	54.00	-9.14	AVG	
2	10380.8949	38.89	13.53	52.42	68.30	-15.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz

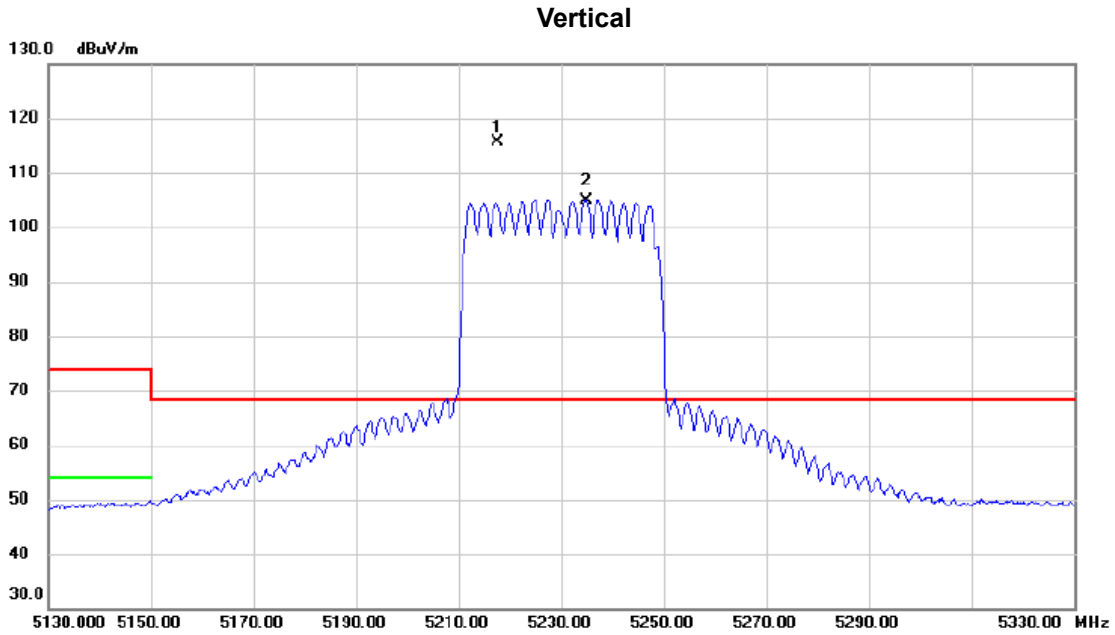


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5217.600	99.31	16.31	115.62	68.30	47.32	peak	No Limit
2	X	5234.800	88.59	16.36	104.95	68.30	36.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz


Vertical

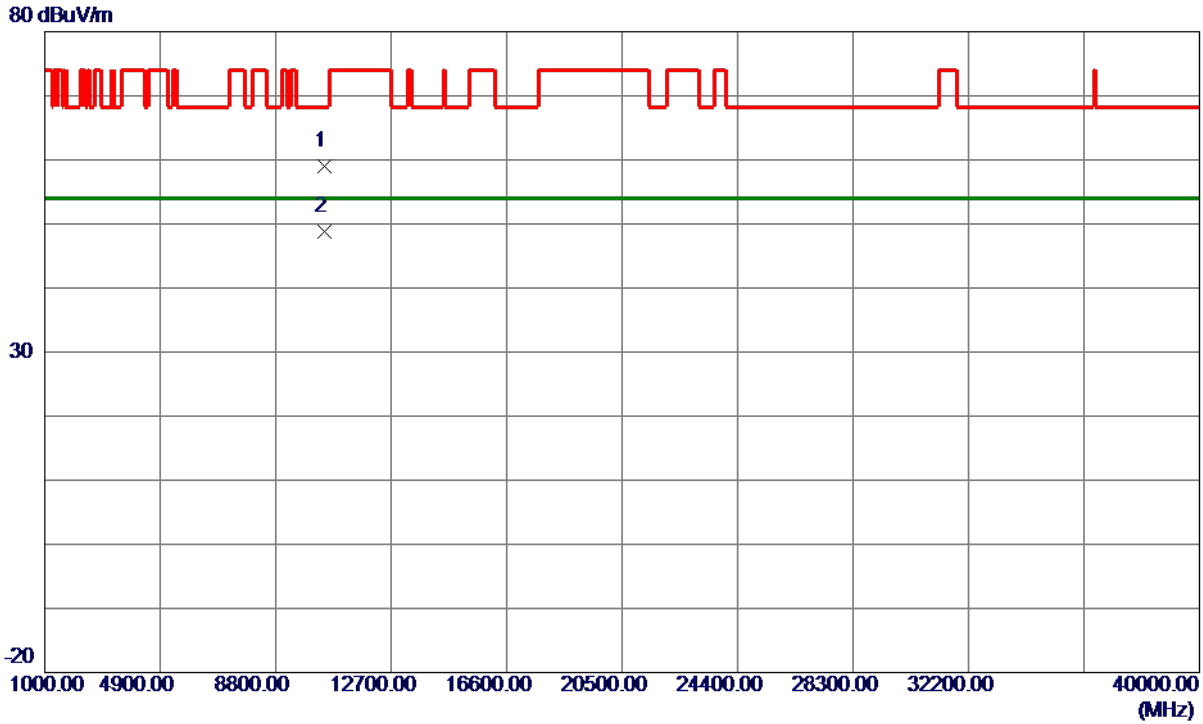

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10461.7600	45.47	13.61	59.08	68.30	-9.22	Peak	
2 *	10461.8220	35.13	13.61	48.74	54.00	-5.26	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz

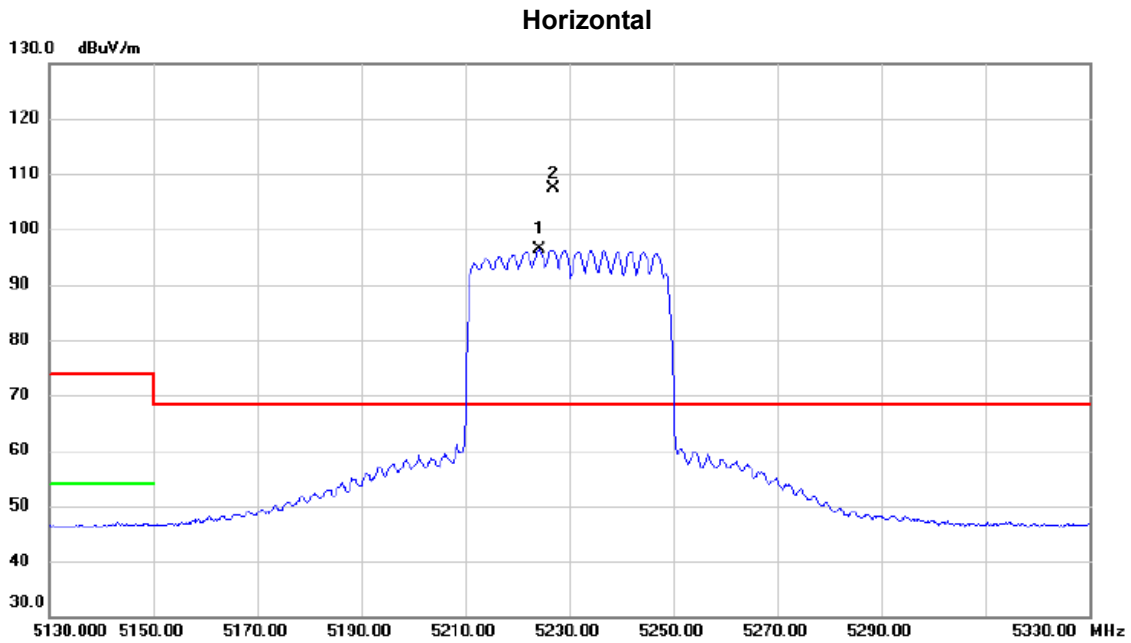


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5224.200	80.03	16.33	96.36	68.30	28.06	AVG	No Limit
2	*	5226.800	91.11	16.34	107.45	68.30	39.15	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz


Horizontal

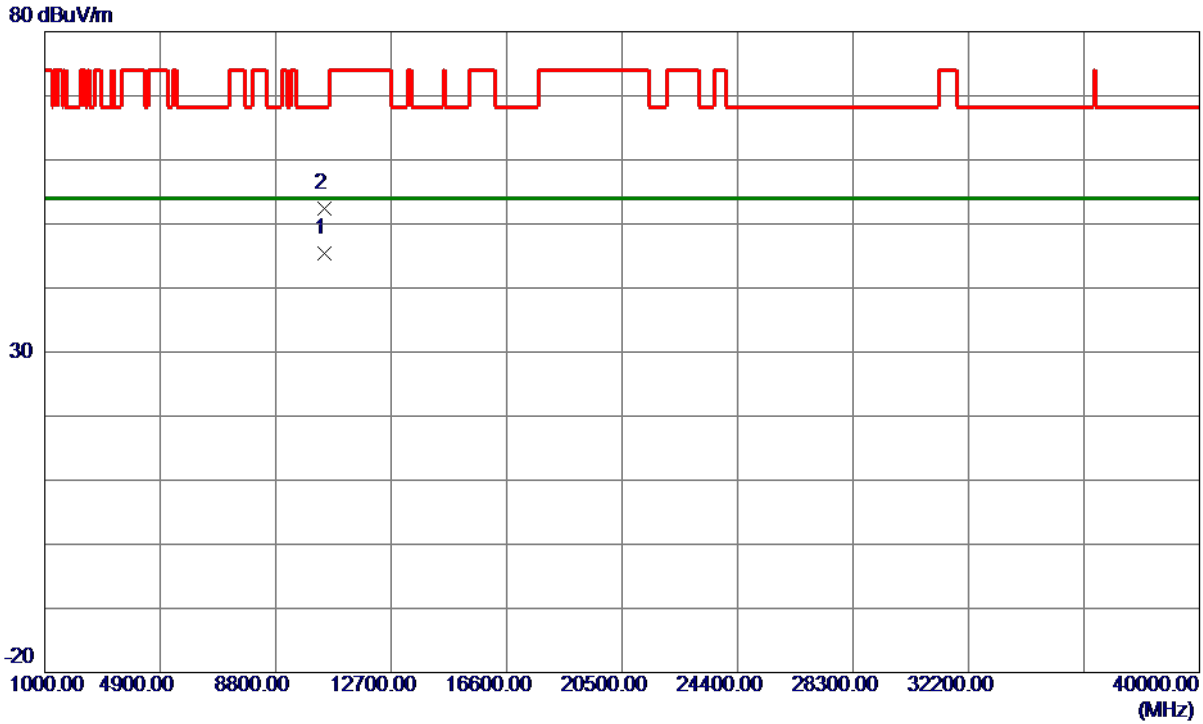

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10461.8270	31.76	13.61	45.37	54.00	-8.63	AVG	
2	10461.9550	38.81	13.61	52.42	68.30	-15.88	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

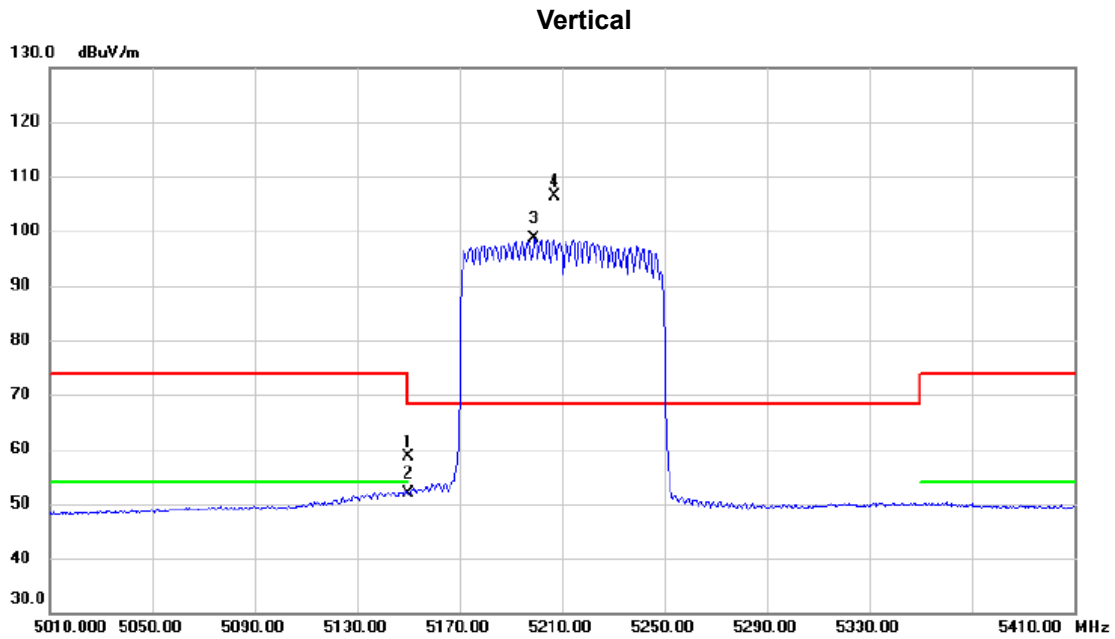

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	42.44	16.15	58.59	74.00	-15.41	peak	
2		5150.000	35.68	16.15	51.83	54.00	-2.17	AVG	
3	X	5199.200	82.29	16.27	98.56	68.30	30.26	AVG	No Limit
4	*	5206.800	90.19	16.29	106.48	68.30	38.18	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

Vertical

80 dBuV/m

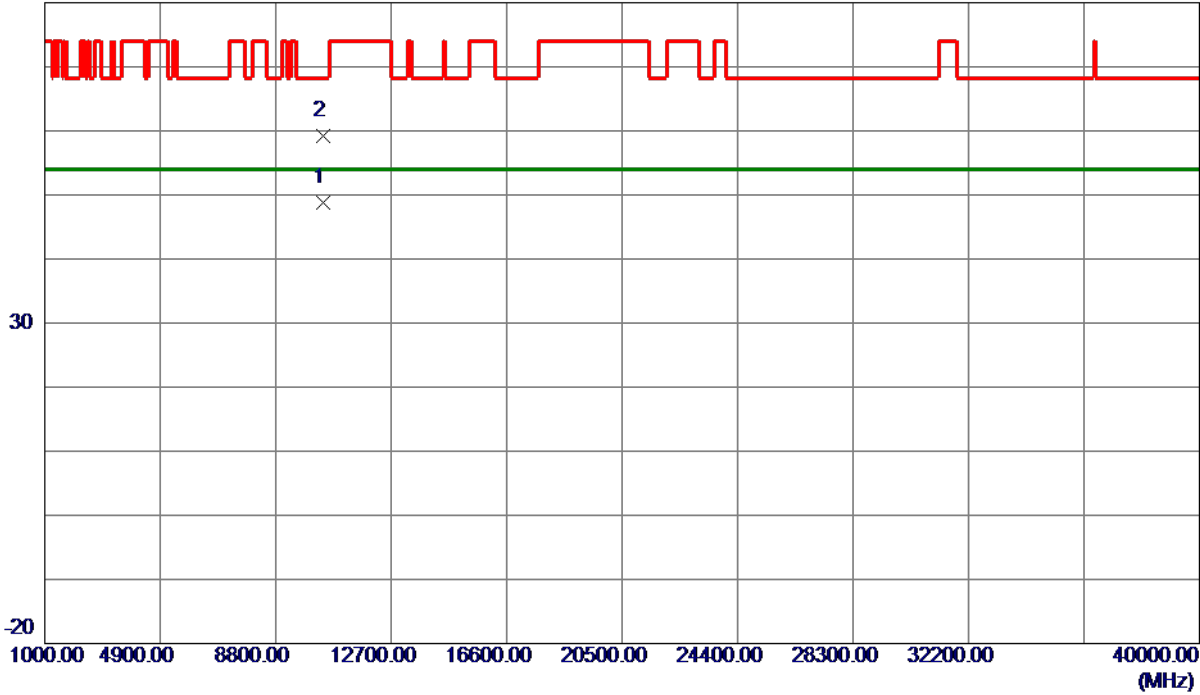


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10421.5530	35.26	13.57	48.83	54.00	-5.17	AVG	
2	10421.6100	45.57	13.57	59.14	68.30	-9.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

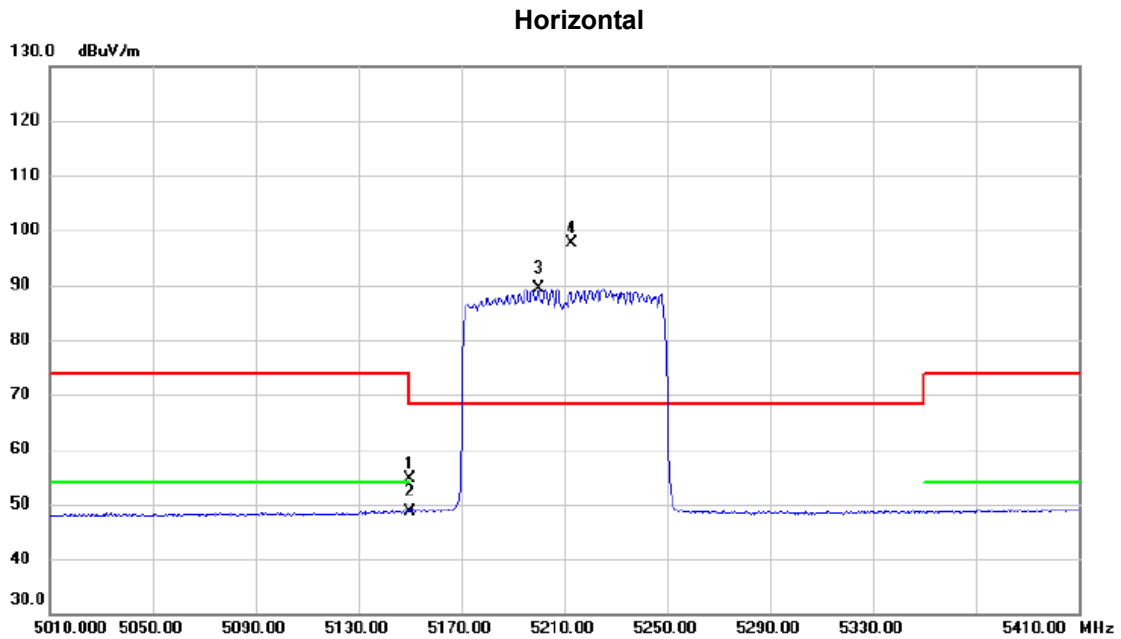

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	38.47	16.15	54.62	74.00	-19.38	peak	
2		5150.000	32.58	16.15	48.73	54.00	-5.27	AVG	
3	X	5200.000	72.99	16.27	89.26	68.30	20.96	AVG	No Limit
4	*	5212.800	81.45	16.30	97.75	68.30	29.45	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

Horizontal

80 dBuV/m

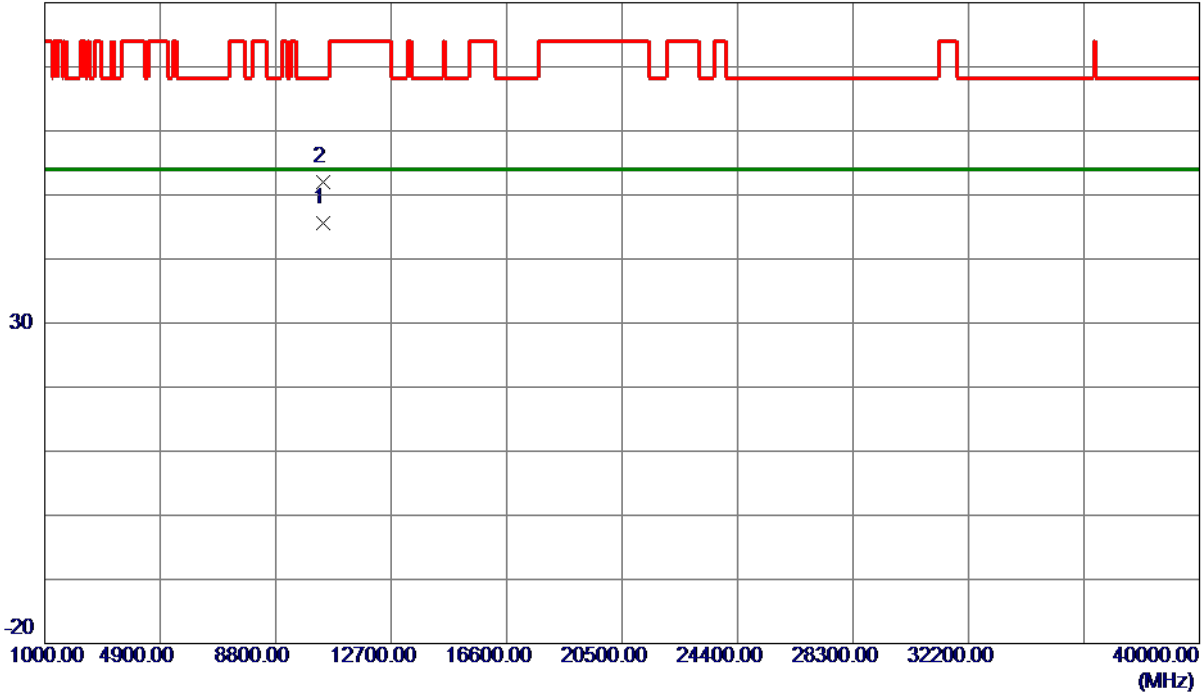


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10417.5519	31.96	13.57	45.53	54.00	-8.47	AVG	
2	10417.7950	38.35	13.57	51.92	68.30	-16.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

Vertical

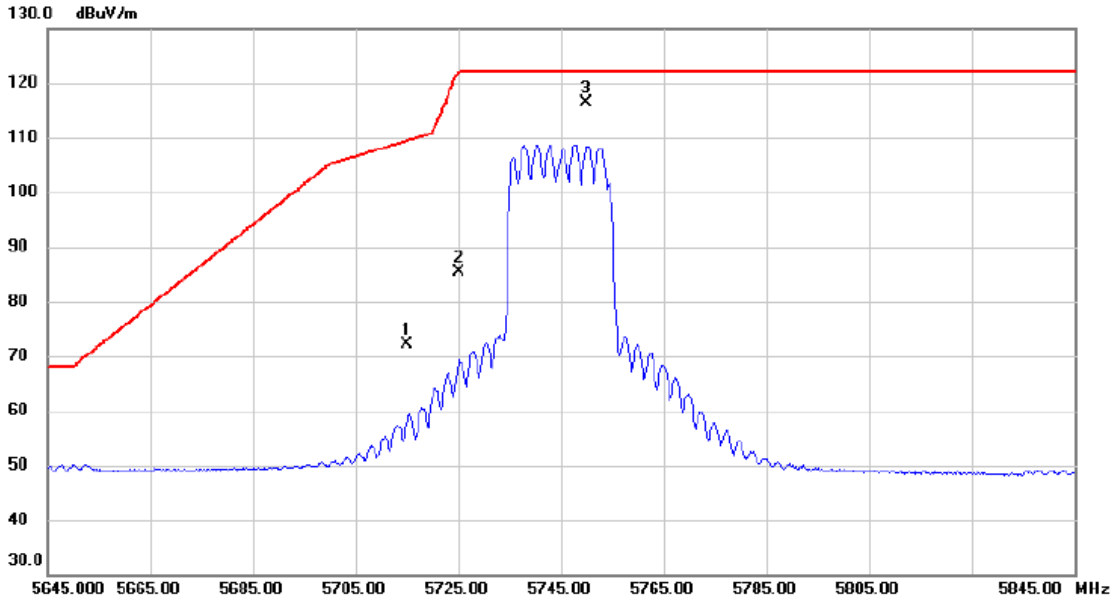


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	54.51	17.62	72.13	109.40	-37.27	peak	
2		5725.000	67.64	17.65	85.29	122.20	-36.91	peak	
3	*	5750.000	98.60	17.73	116.33	122.20	-5.87	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

Vertical

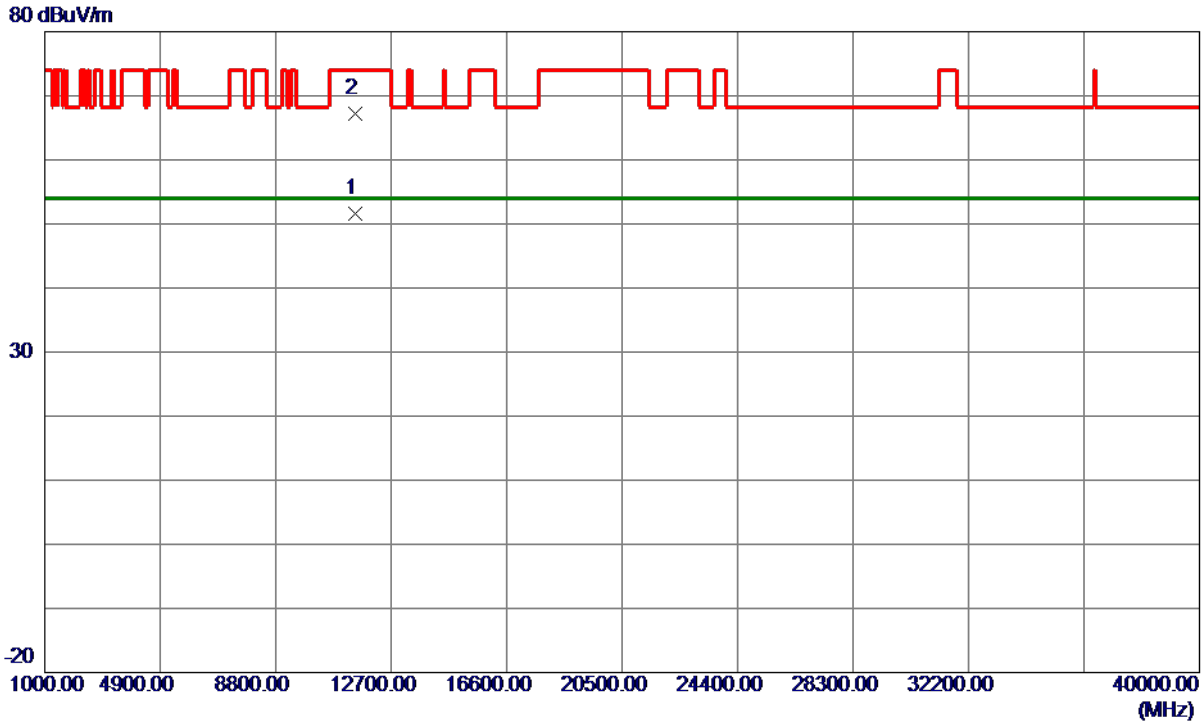


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.4450	37.11	14.55	51.66	54.00	-2.34	AVG	
2	11489.6350	52.73	14.55	67.28	74.00	-6.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

Horizontal

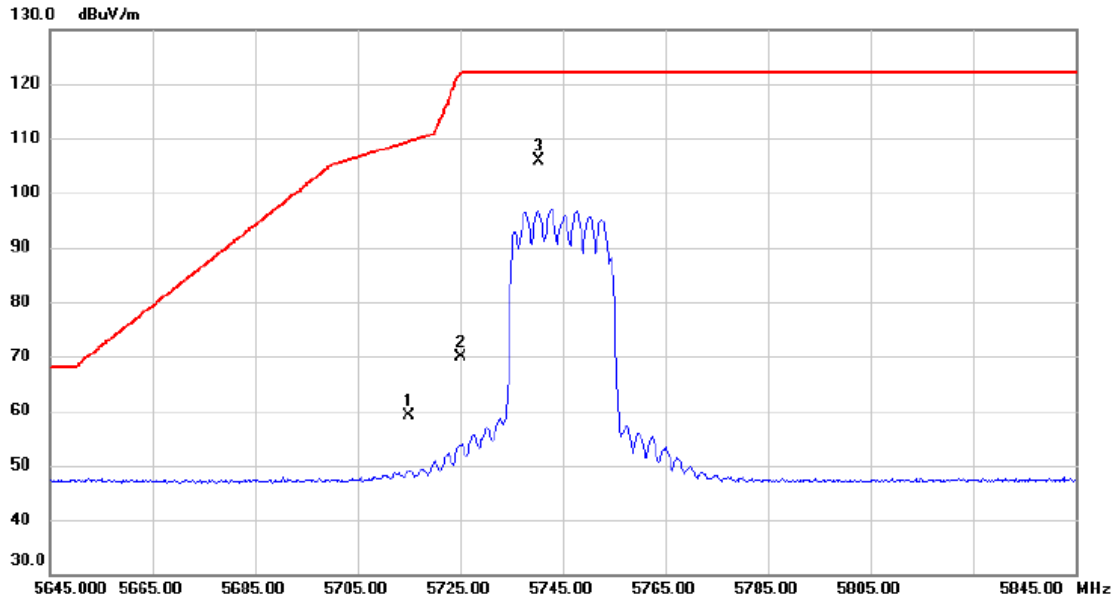


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	41.40	17.62	59.02	109.40	-50.38	peak	
2		5725.000	52.21	17.65	69.86	122.20	-52.34	peak	
3	*	5740.400	88.22	17.70	105.92	122.20	-16.28	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

Horizontal

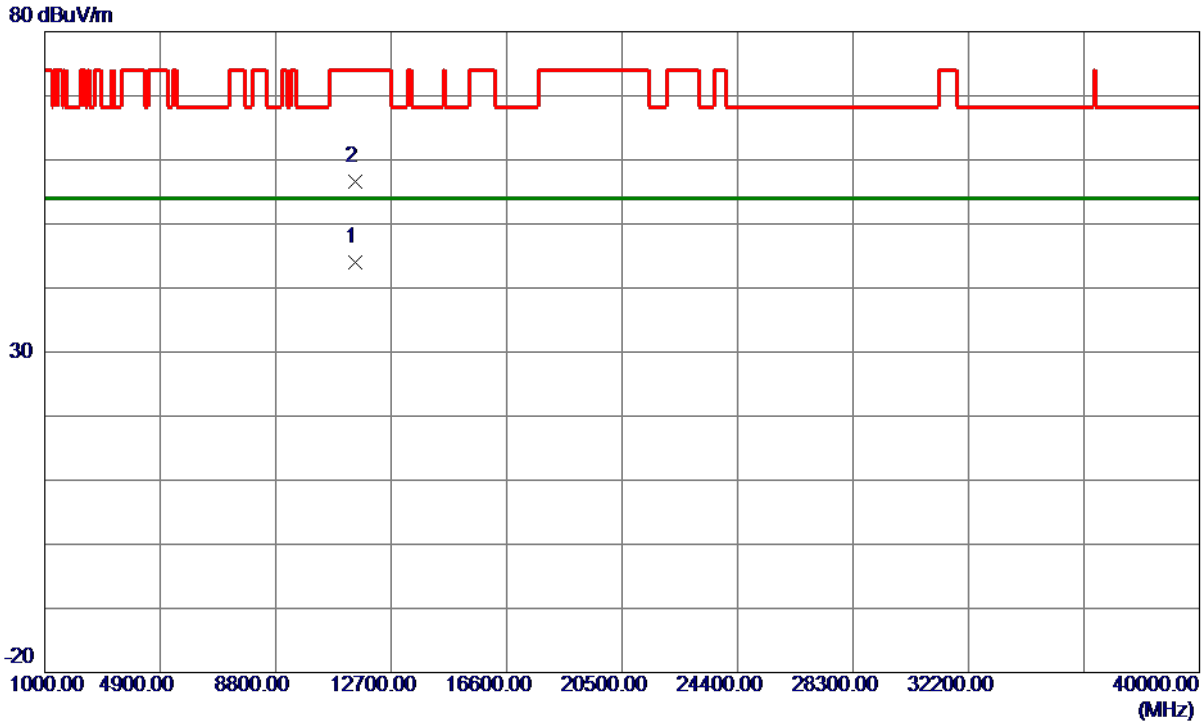


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.3650	29.40	14.55	43.95	54.00	-10.05	AVG	
2	11488.9400	42.13	14.55	56.68	74.00	-17.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

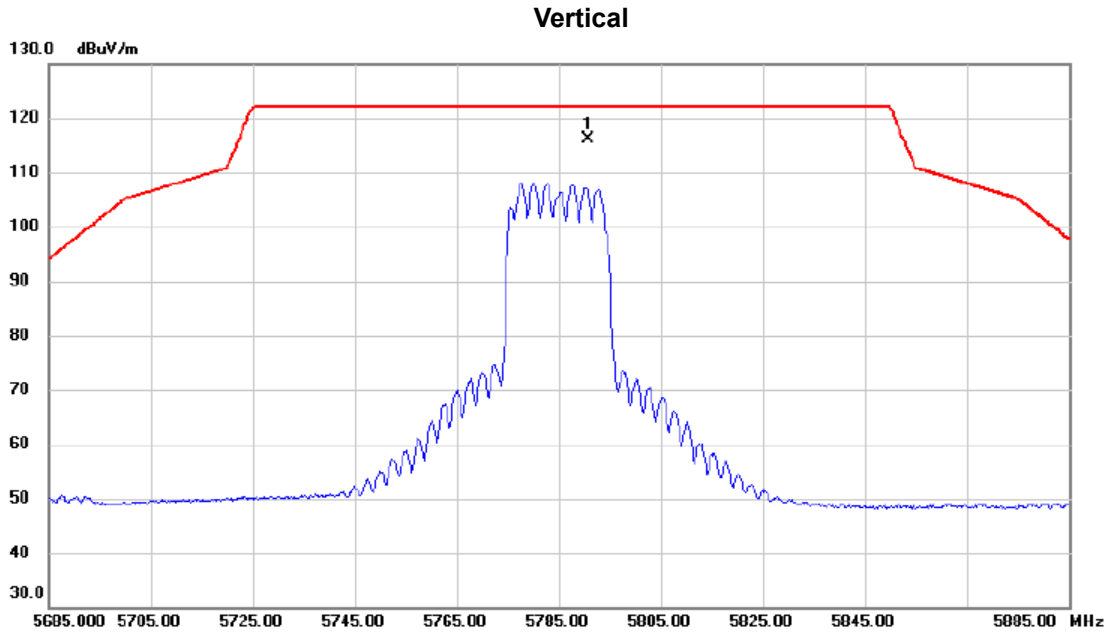


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5790.800	98.20	17.85	116.05	122.20	-6.15	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

Vertical

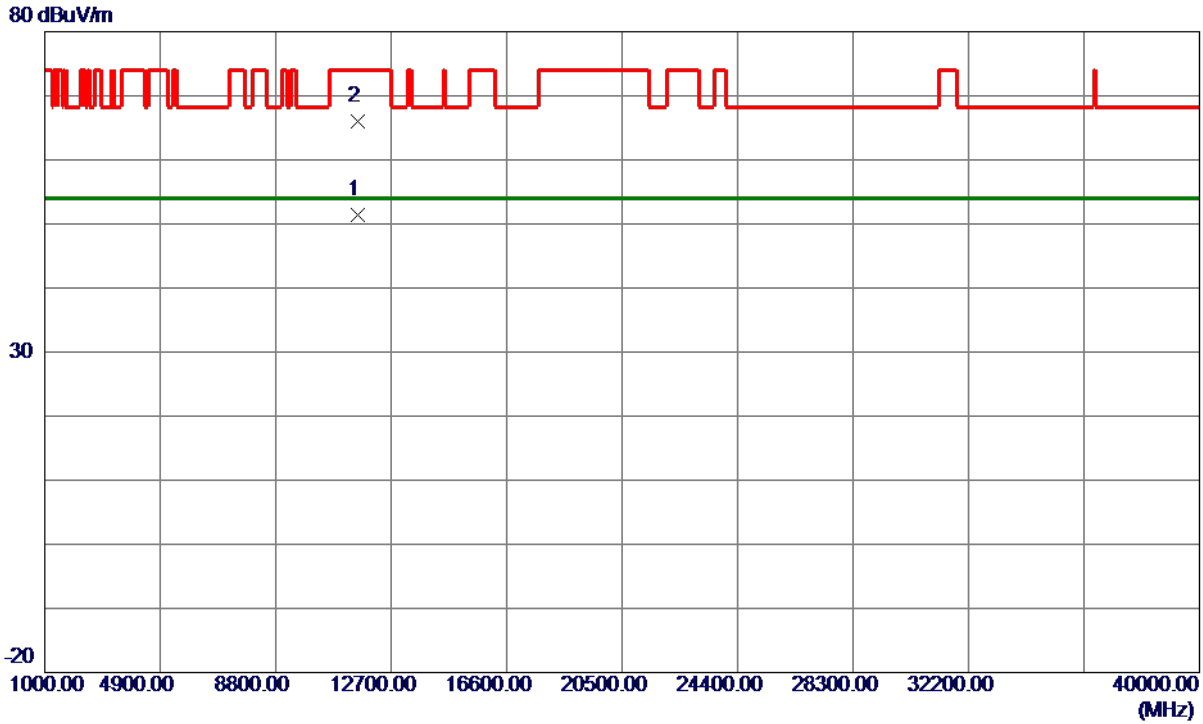


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11569.5300	36.74	14.57	51.31	74.00	-22.69	Peak	
2 *	11569.6950	51.39	14.57	65.96	74.00	-8.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

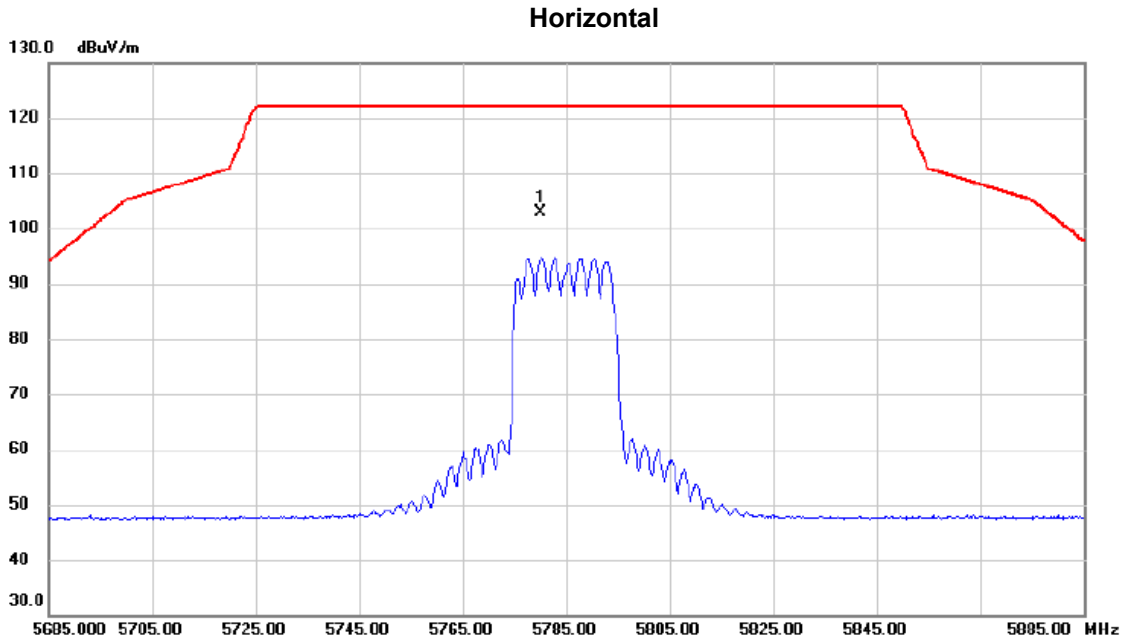


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5780.200	84.96	17.82	102.78	122.20	-19.42	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz


Horizontal

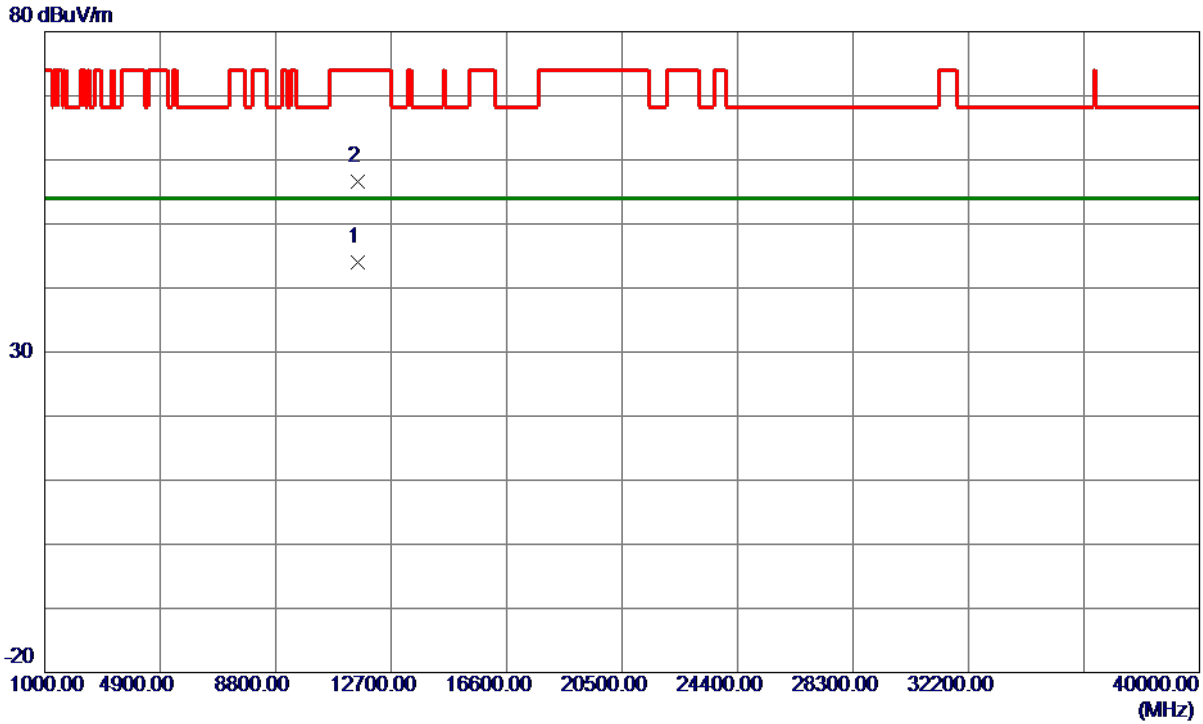

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.6600	29.47	14.57	44.04	54.00	-9.96	AVG	
2	11571.0900	42.12	14.57	56.69	74.00	-17.31	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

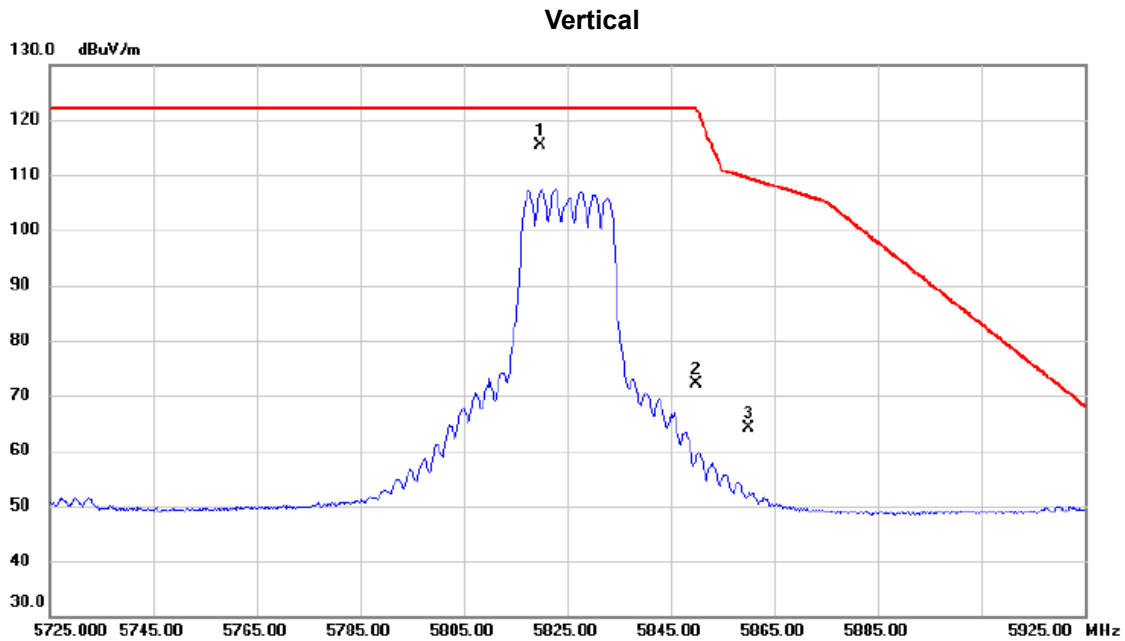


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5819.800	97.35	17.93	115.28	122.20	-6.92	peak	No Limit
2		5850.000	54.03	18.03	72.06	122.20	-50.14	peak	
3		5860.000	46.05	18.06	64.11	109.40	-45.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

Vertical

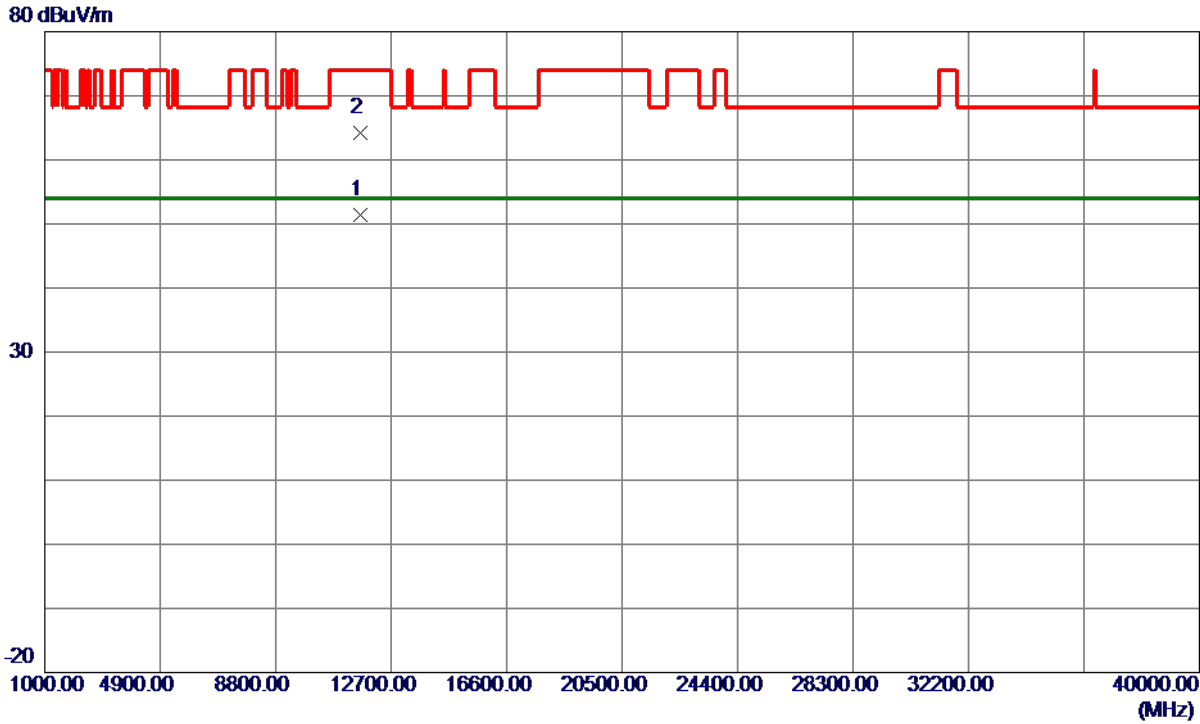


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.5850	36.74	14.57	51.31	54.00	-2.69	AVG	
2	11649.7600	49.65	14.57	64.22	74.00	-9.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

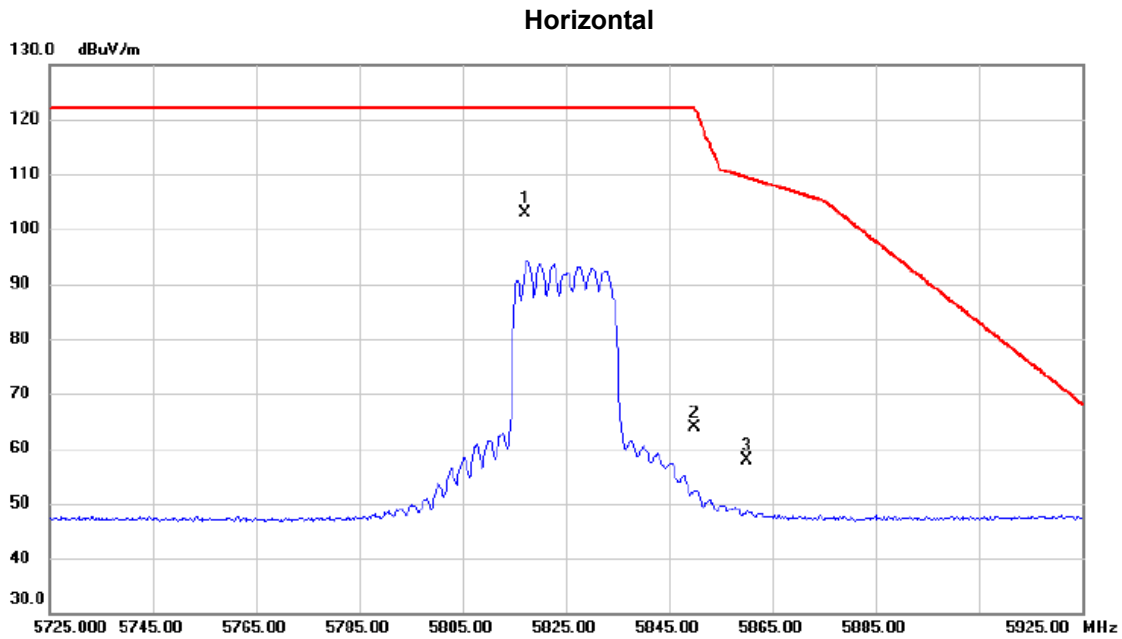


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5817.200	84.90	17.92	102.82	122.20	-19.38	peak	No Limit
2		5850.000	45.73	18.03	63.76	122.20	-58.44	peak	
3		5860.000	39.81	18.06	57.87	109.40	-51.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

Horizontal

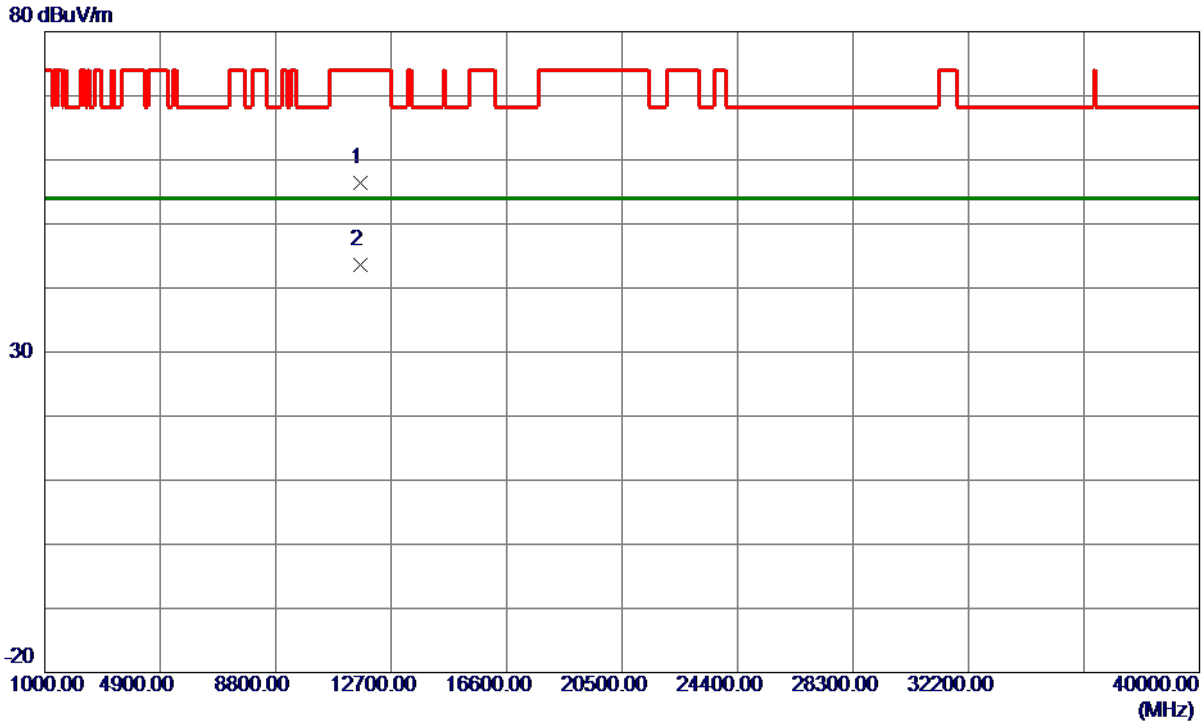


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.6500	41.85	14.57	56.42	74.00	-17.58	Peak	
2 *	11649.9200	29.12	14.57	43.69	54.00	-10.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

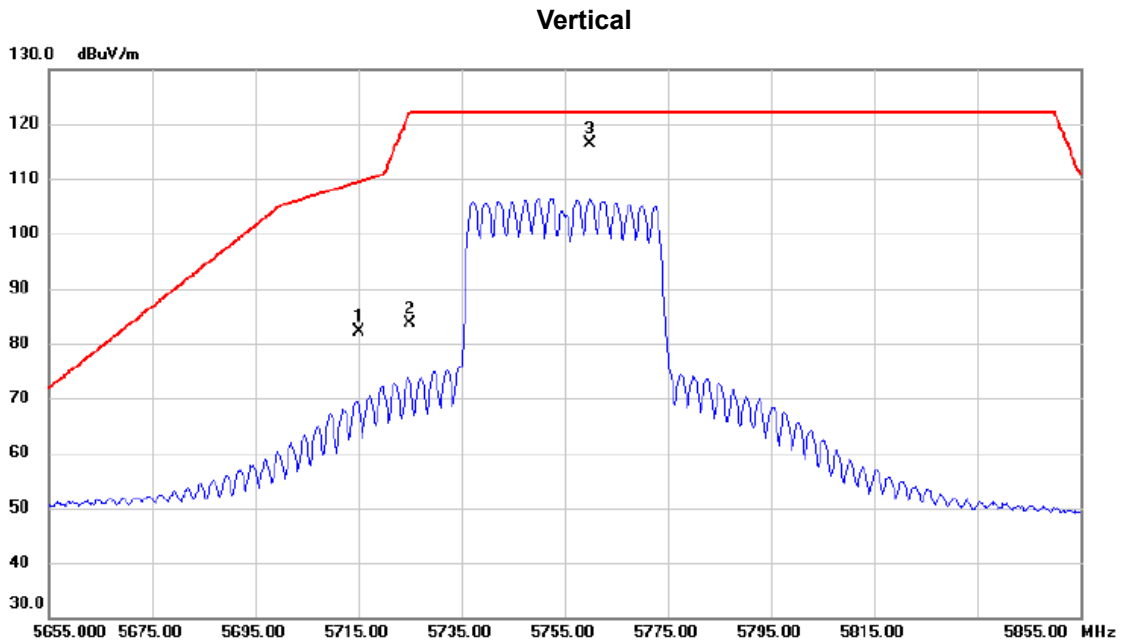


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	64.52	17.62	82.14	109.40	-27.26	peak	
2		5725.000	66.04	17.65	83.69	122.20	-38.51	peak	
3	*	5760.000	98.67	17.76	116.43	122.20	-5.77	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

Vertical

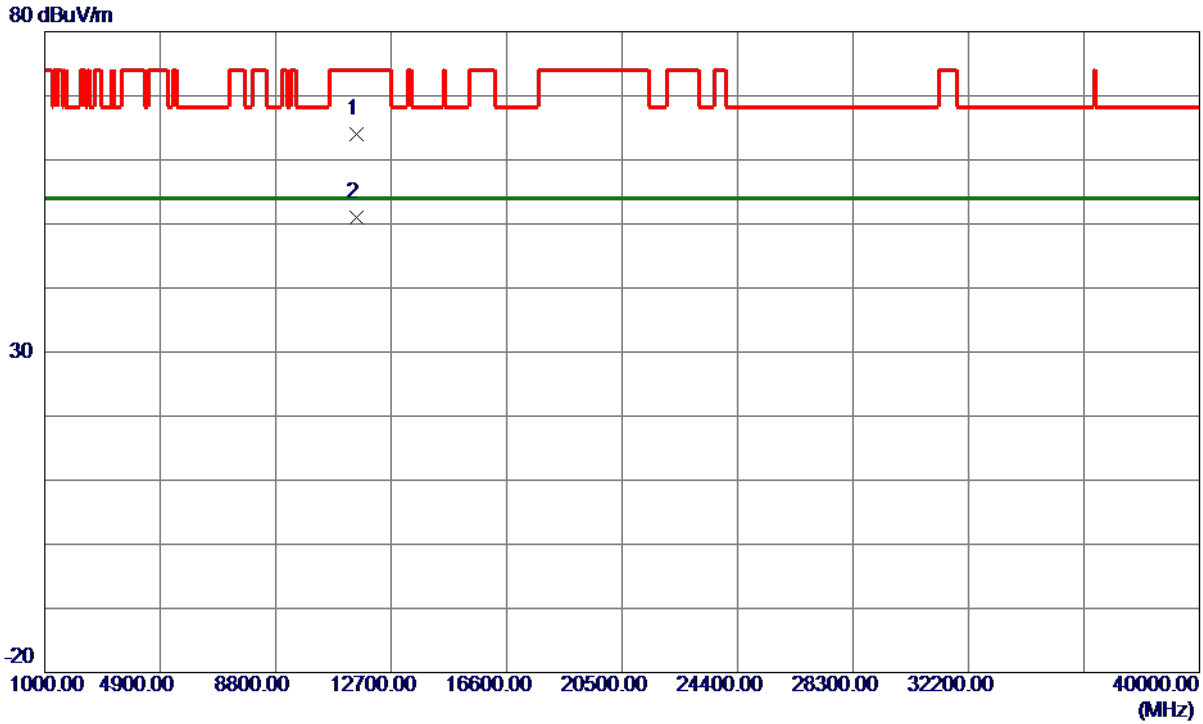


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11509.0450	49.41	14.57	63.98	74.00	-10.02	Peak	
2 *	11511.8050	36.41	14.57	50.98	54.00	-3.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

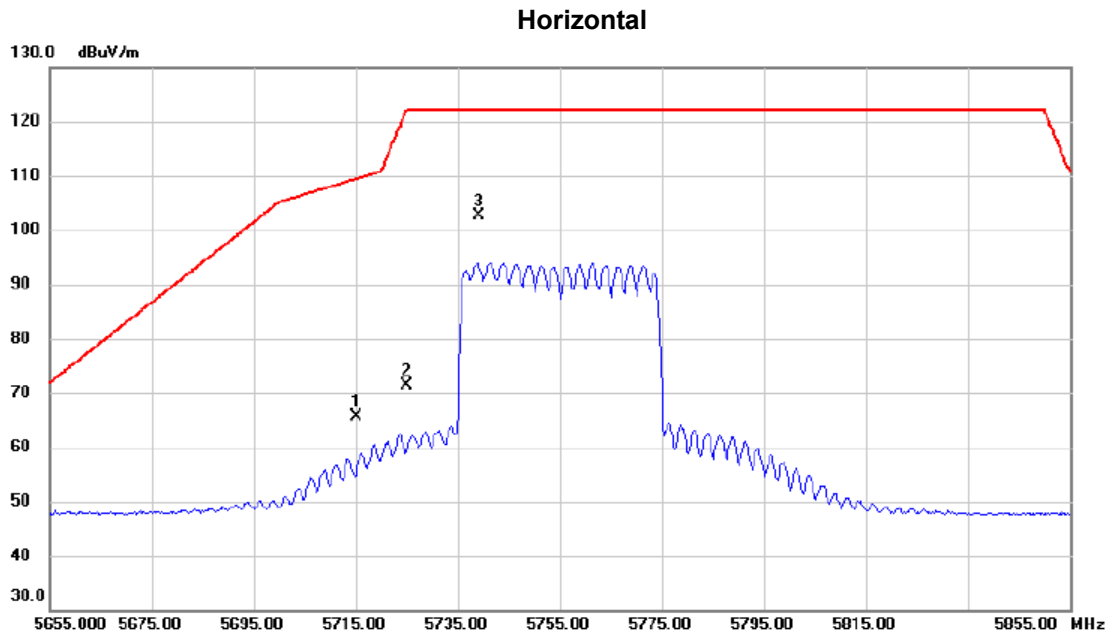

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	47.98	17.62	65.60	109.40	-43.80	peak	
2		5725.000	53.71	17.65	71.36	122.20	-50.84	peak	
3	*	5739.200	84.85	17.69	102.54	122.20	-19.66	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

Horizontal

80 dBuV/m

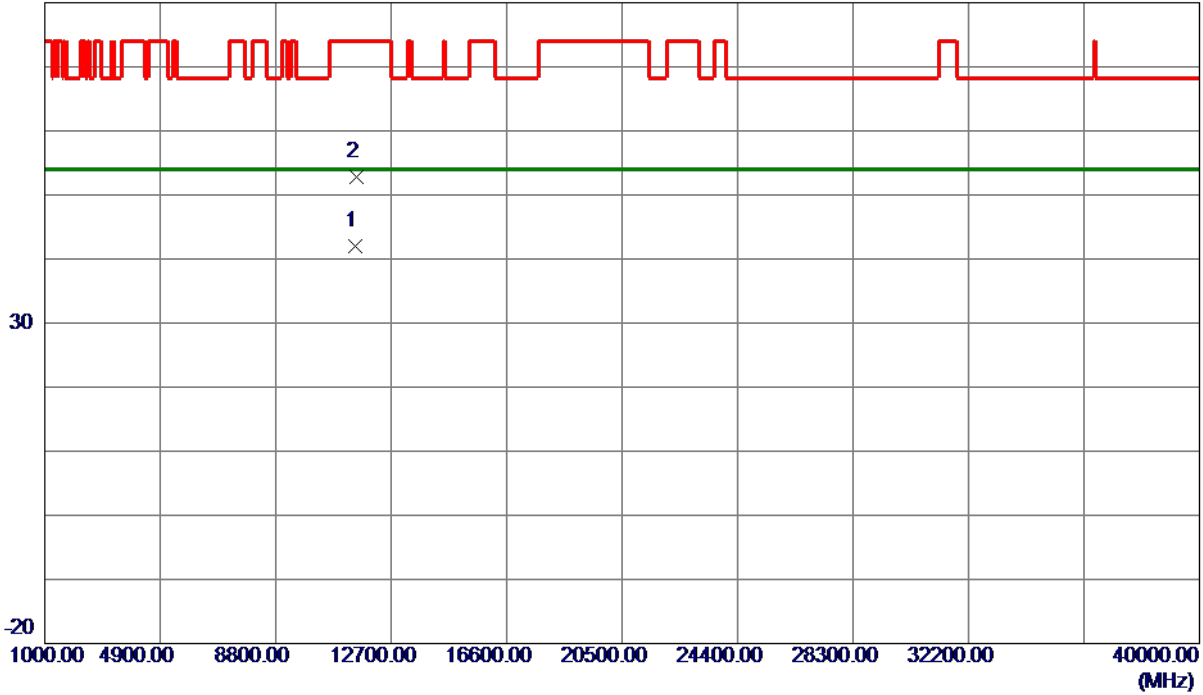


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.2750	27.42	14.57	41.99	54.00	-12.01	AVG	
2	11508.8200	38.30	14.57	52.87	74.00	-21.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

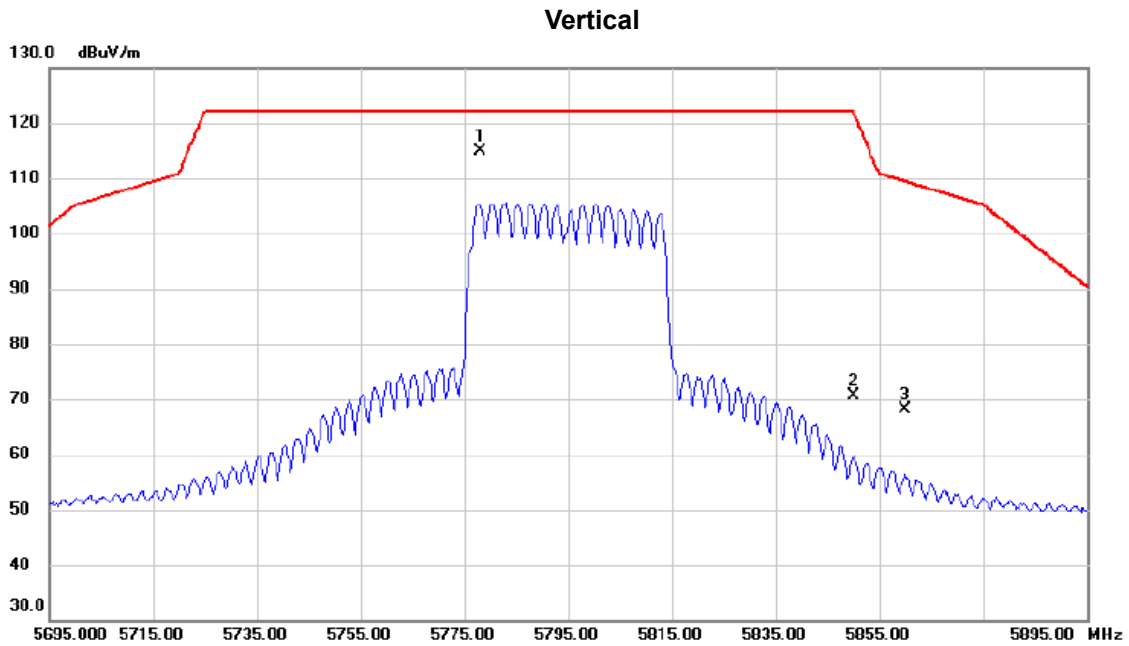


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5778.200	97.08	17.81	114.89	122.20	-7.31	peak	No Limit
2		5850.000	52.64	18.03	70.67	122.20	-51.53	peak	
3		5860.000	50.00	18.06	68.06	109.40	-41.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz


Vertical

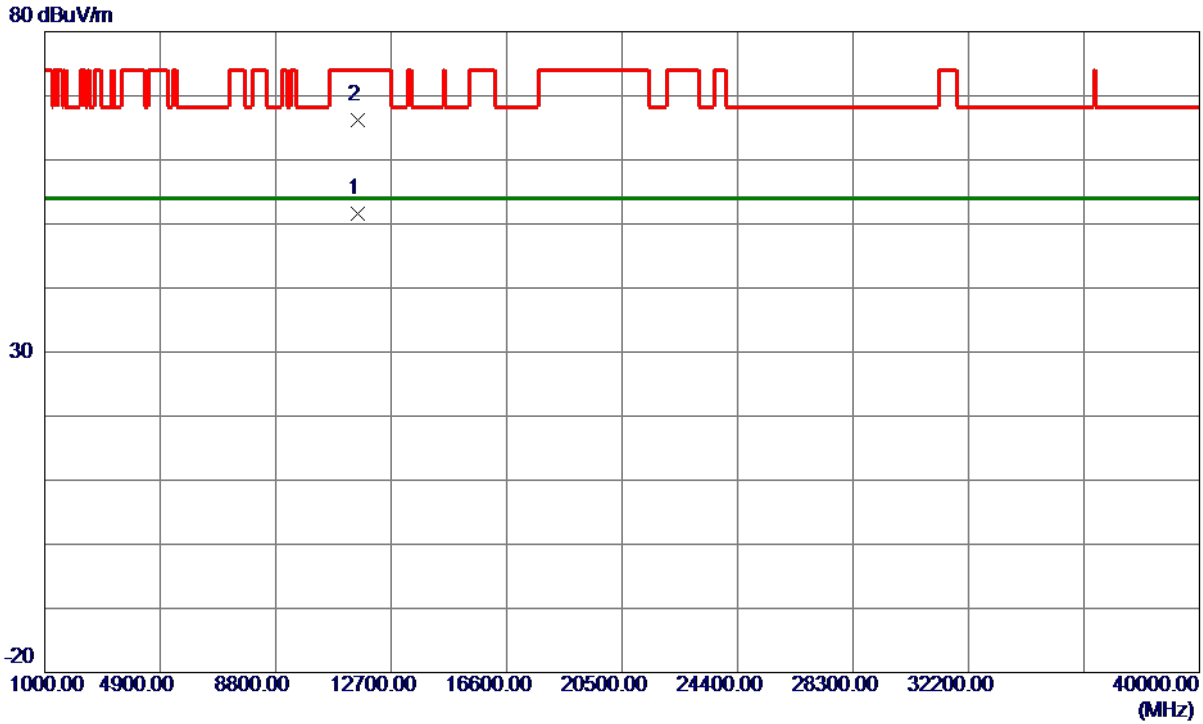

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11587.5000	37.12	14.57	51.69	54.00	-2.31	AVG	
2	11588.9900	51.69	14.57	66.26	74.00	-7.74	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

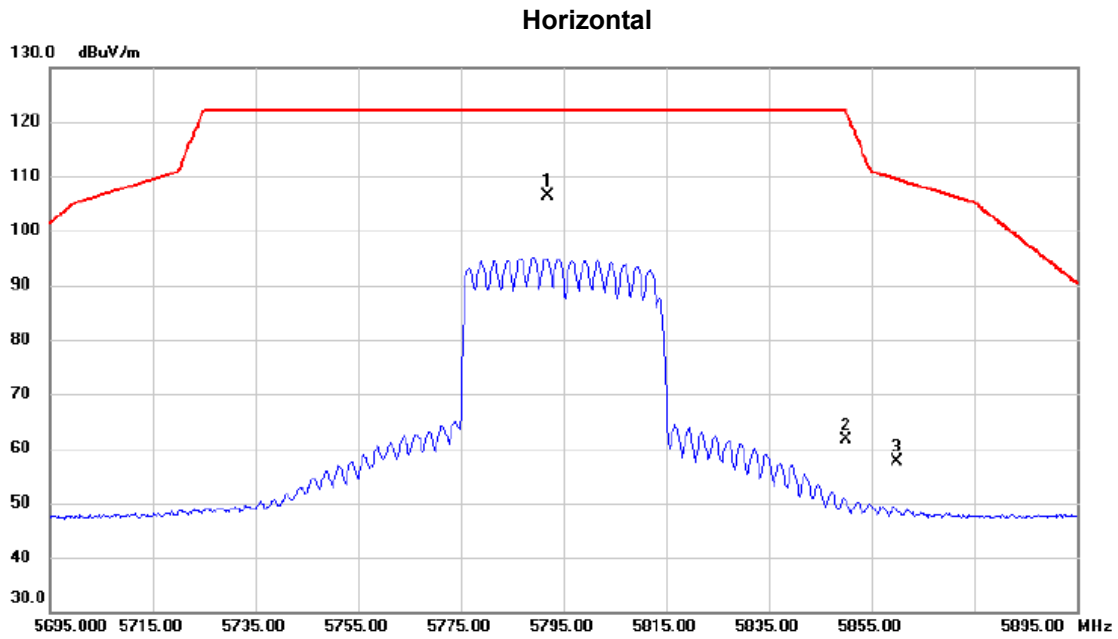


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5792.000	88.50	17.85	106.35	122.20	-15.85	peak	No Limit
2		5850.000	43.67	18.03	61.70	122.20	-60.50	peak	
3		5860.000	39.62	18.06	57.68	109.40	-51.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

Horizontal

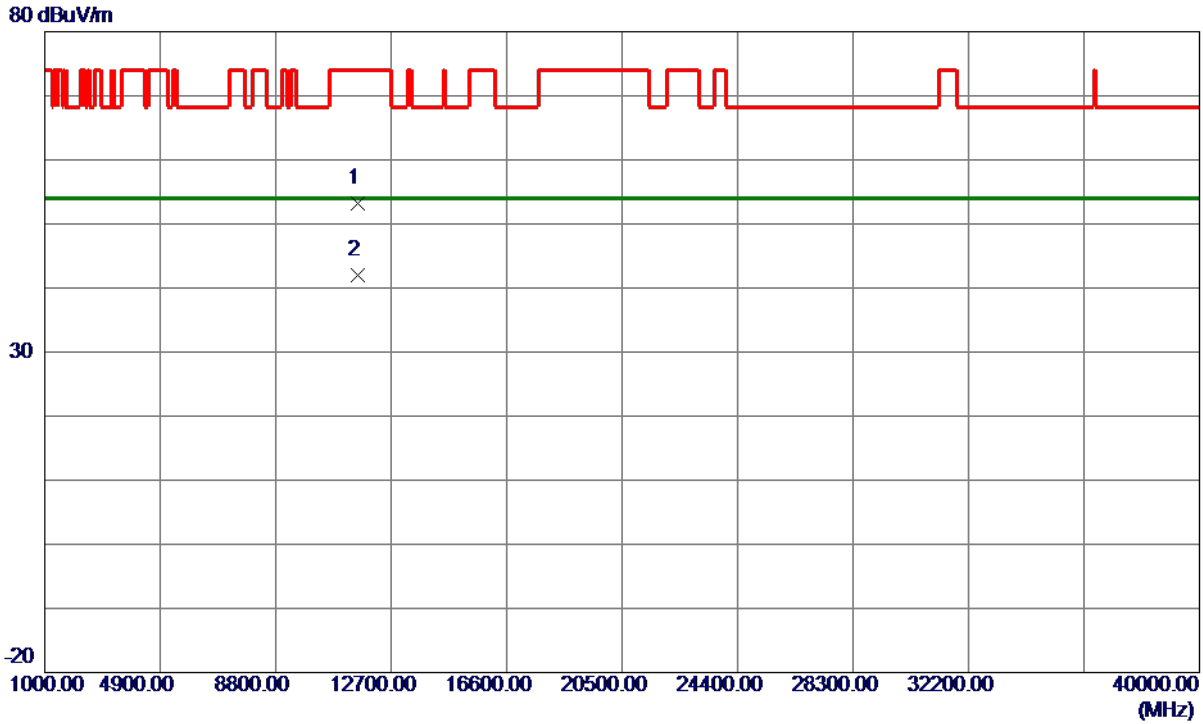


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.7300	38.70	14.57	53.27	74.00	-20.73	Peak	
2 *	11590.9700	27.44	14.57	42.01	54.00	-11.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

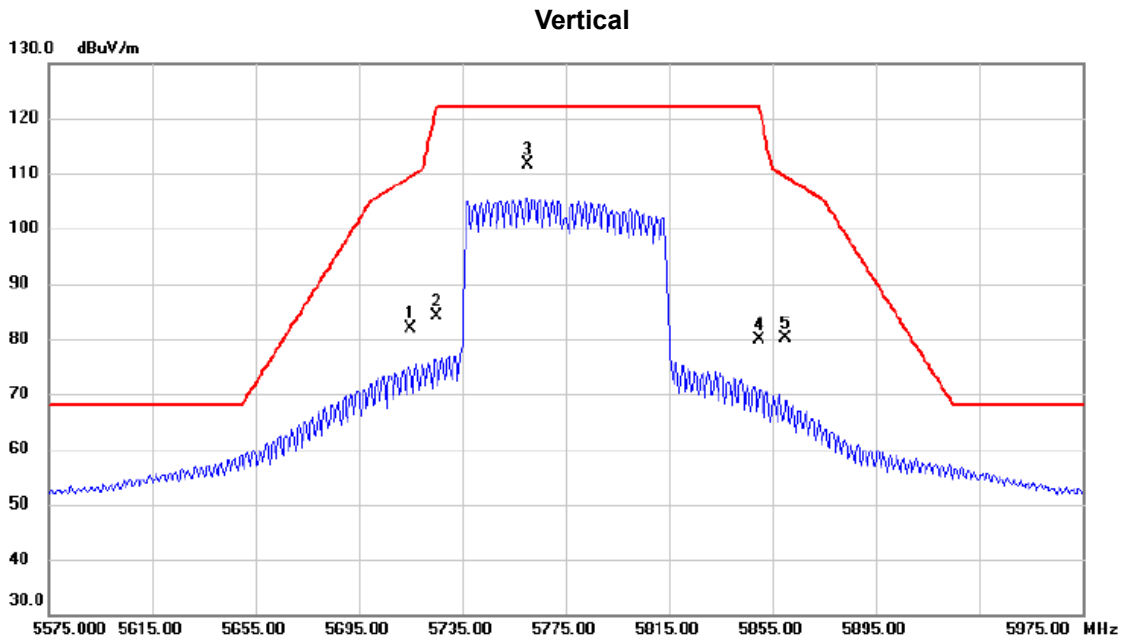


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	64.36	17.62	81.98	109.40	-27.42	peak	
2		5725.000	66.53	17.65	84.18	122.20	-38.02	peak	
3	*	5760.200	93.98	17.76	111.74	122.20	-10.46	peak	No Limit
4		5850.000	61.80	18.03	79.83	122.20	-42.37	peak	
5		5860.000	62.12	18.06	80.18	109.40	-29.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

Vertical

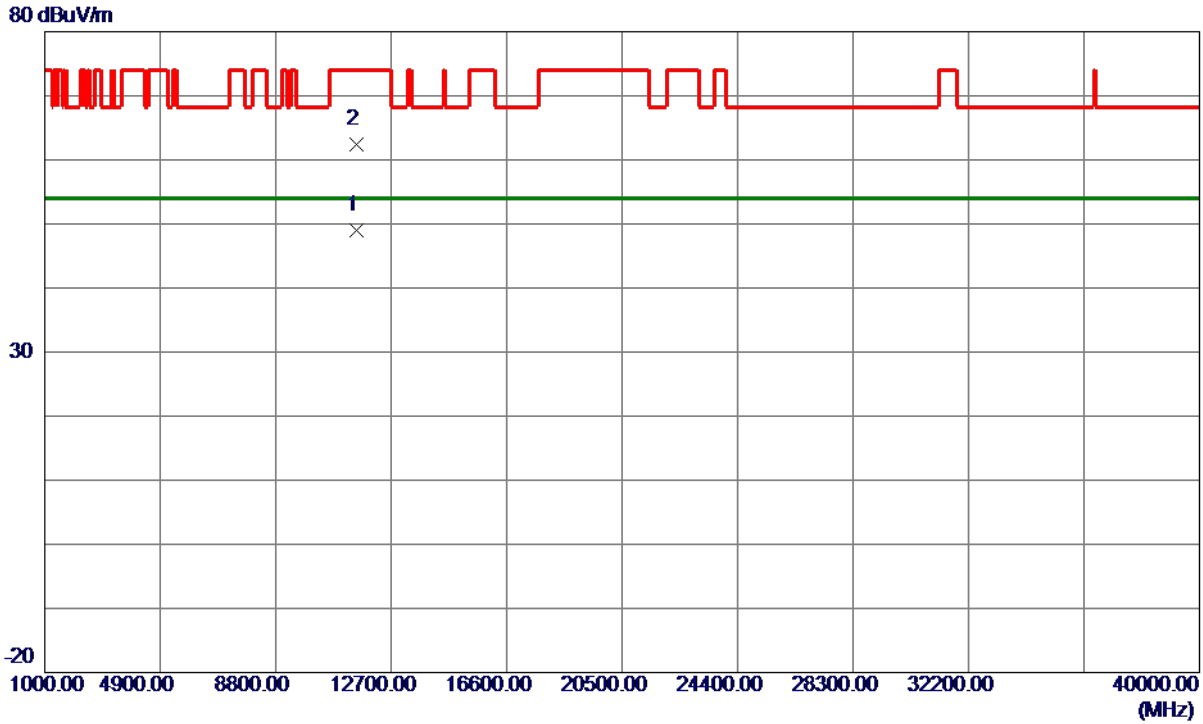


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.7950	34.41	14.57	48.98	54.00	-5.02	AVG	
2	11550.3600	47.85	14.57	62.42	74.00	-11.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

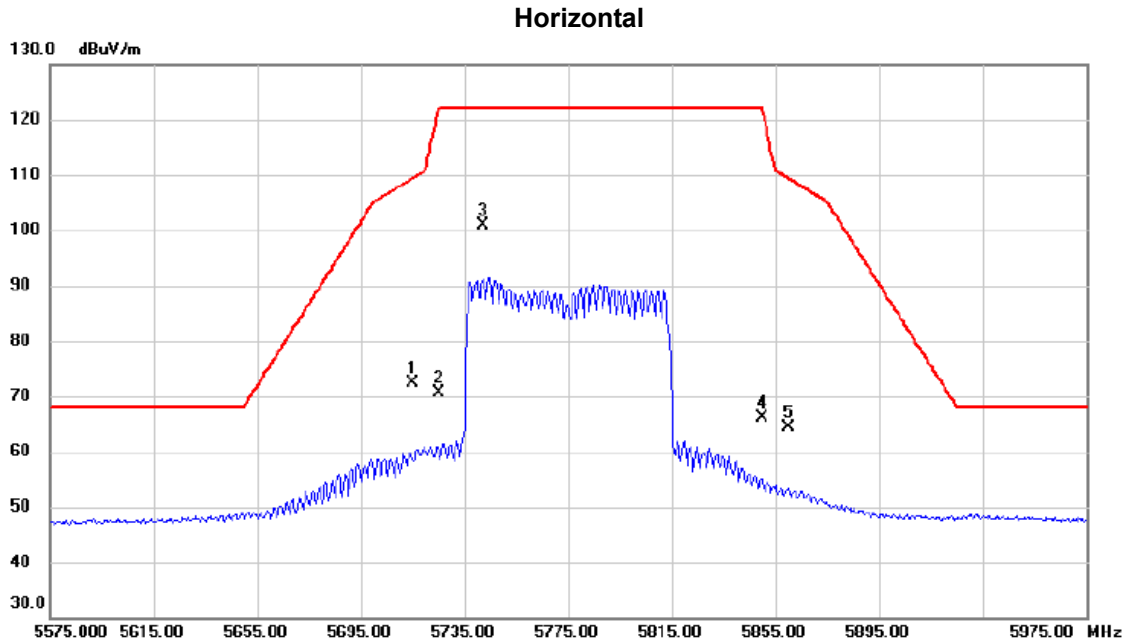

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	54.74	17.62	72.36	109.40	-37.04	peak	
2		5725.000	53.05	17.65	70.70	122.20	-51.50	peak	
3	*	5742.200	83.18	17.70	100.88	122.20	-21.32	peak	No Limit
4		5850.000	48.13	18.03	66.16	122.20	-56.04	peak	
5		5860.000	46.33	18.06	64.39	109.40	-45.01	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

Horizontal

80 dBuV/m

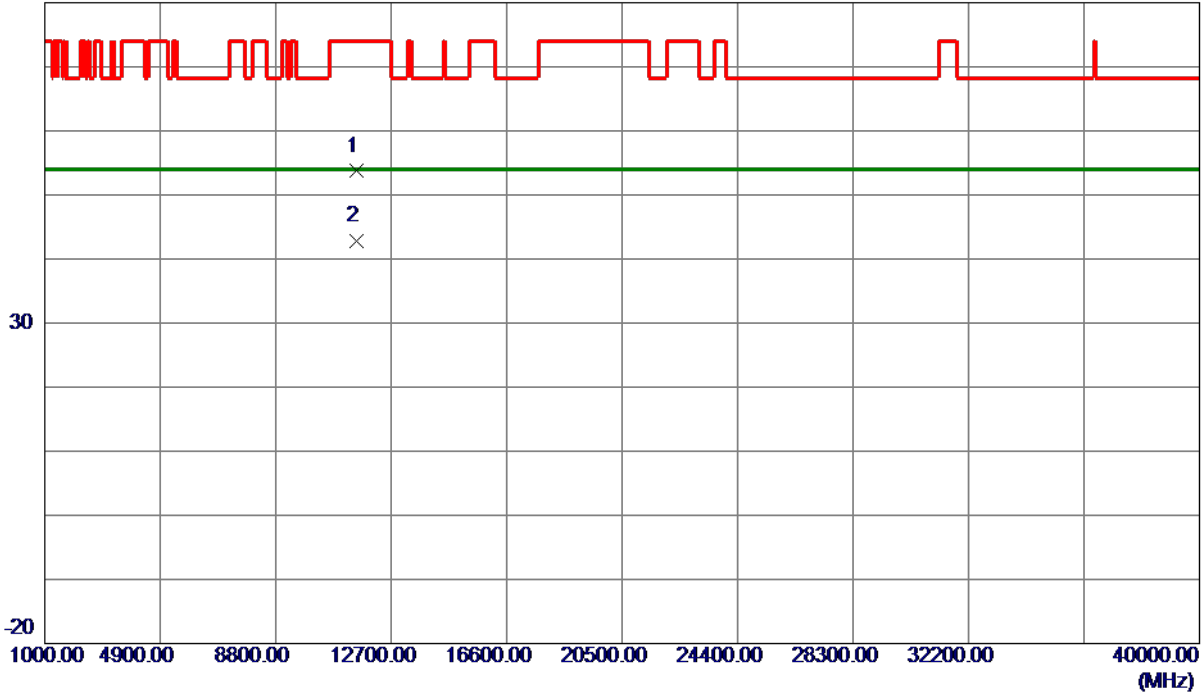

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.7250	39.13	14.57	53.70	74.00	-20.30	Peak	
2 *	11550.7350	28.30	14.57	42.87	54.00	-11.13	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

The worst case of simultaneous transmission:

Test Mode:	TX WLAN 2.4G B Mode 2437MHz + WLAN 5G A Mode 5785MHz
------------	--

Vertical

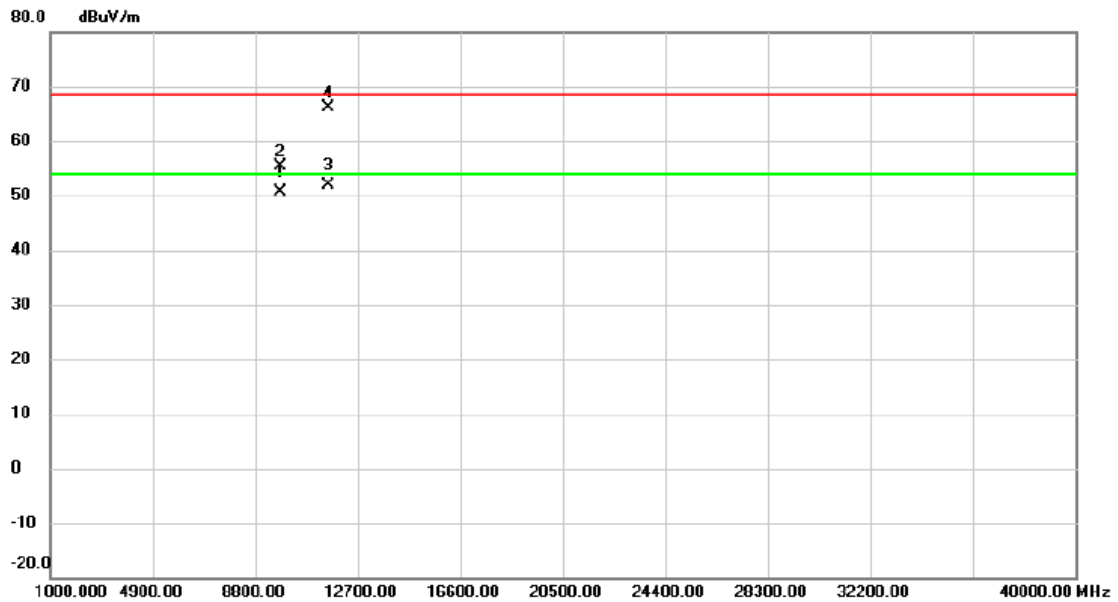


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		9749.021	37.59	12.96	50.55	54.00	-3.45	AVG	
2		9749.425	42.43	12.96	55.39	68.30	-12.91	peak	
3	*	11568.935	37.32	14.57	51.89	54.00	-2.11	AVG	
4		11570.101	51.53	14.57	66.10	68.30	-2.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX WLAN 2.4G B Mode 2437MHz + WLAN 5G A Mode 5785MHz

Horizontal

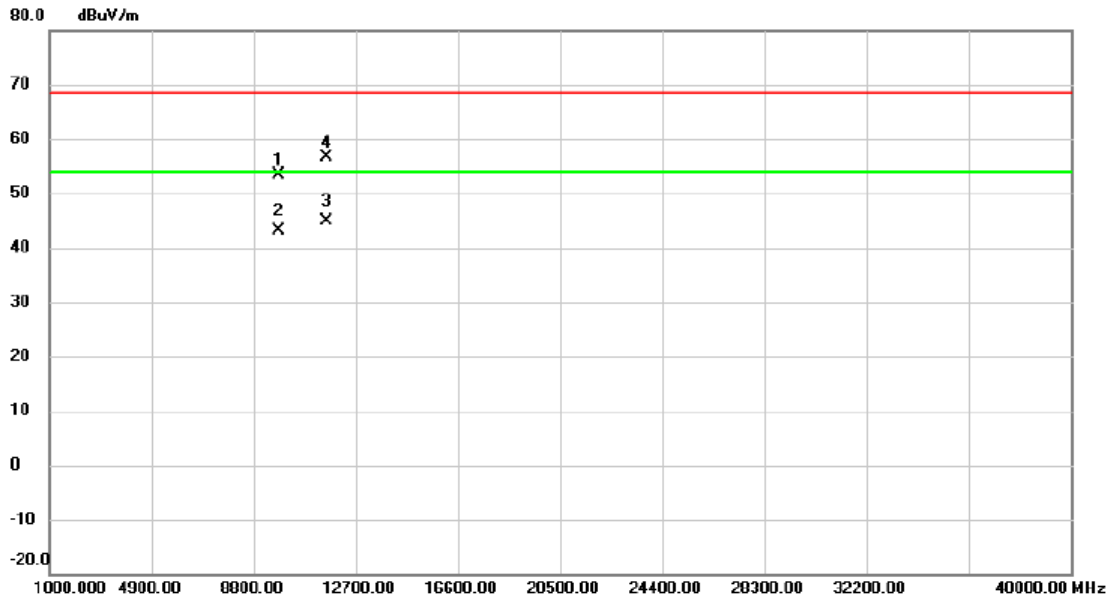

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		9750.221	40.44	12.97	53.41	68.30	-14.89	peak	
2		9750.365	30.10	12.97	43.07	54.00	-10.93	AVG	
3	*	11568.882	30.23	14.57	44.80	54.00	-9.20	AVG	
4		11570.328	42.01	14.57	56.58	68.30	-11.72	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.95	17.00
40	5200	21.95	17.00
48	5240	22.01	17.00

CH36

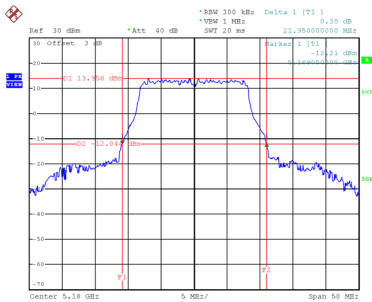


Date: 10 JUN 2020 10:48:28

CH40
26 dB Bandwidth

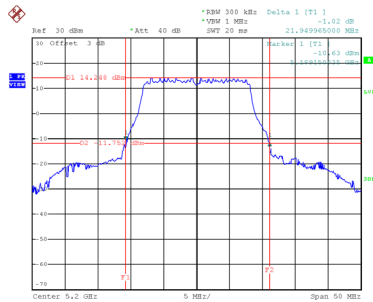


Date: 10 JUN 2020 10:50:09

CH48

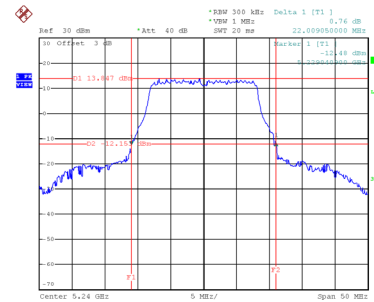


Date: 10 JUN 2020 10:51:04


99 % Emission Bandwidth

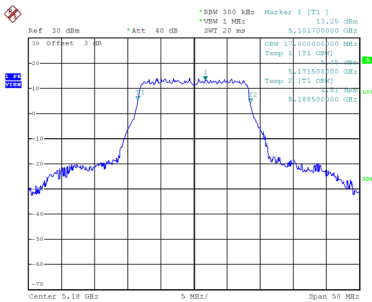

Date: 10 JUN 2020 10:48:09

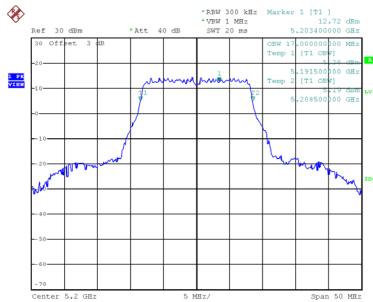

Date: 10 JUN 2020 10:49:50

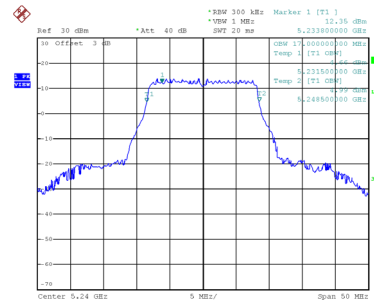


Date: 10 JUN 2020 10:50:45

Test Mode UNII-1_TX N (HT20) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.80	18.00
40	5200	21.85	18.00
48	5240	21.89	18.10

CH36

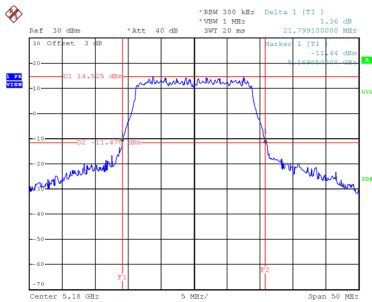


Date: 10 JUN 2020 10:58:29

CH40
26 dB Bandwidth

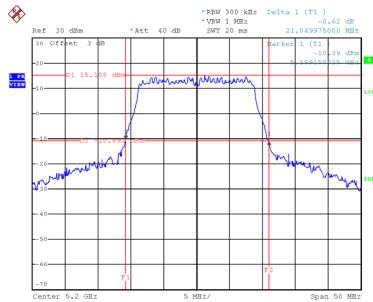


Date: 10 JUN 2020 10:59:35

CH48

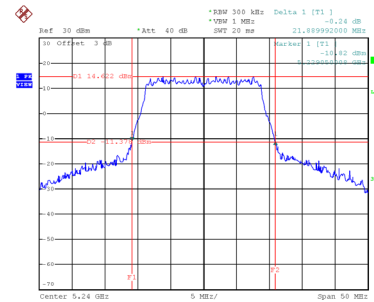


Date: 10 JUN 2020 11:01:36


99 % Emission Bandwidth

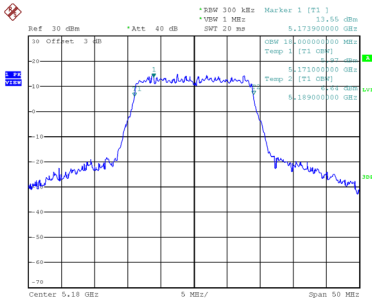

Date: 10 JUN 2020 10:58:10

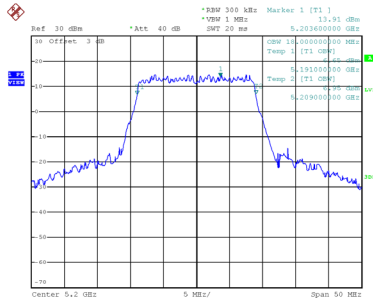

Date: 10 JUN 2020 10:59:15

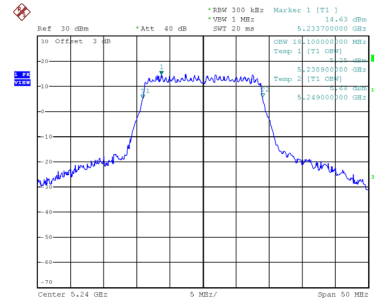

Date: 10 JUN 2020 11:01:16