

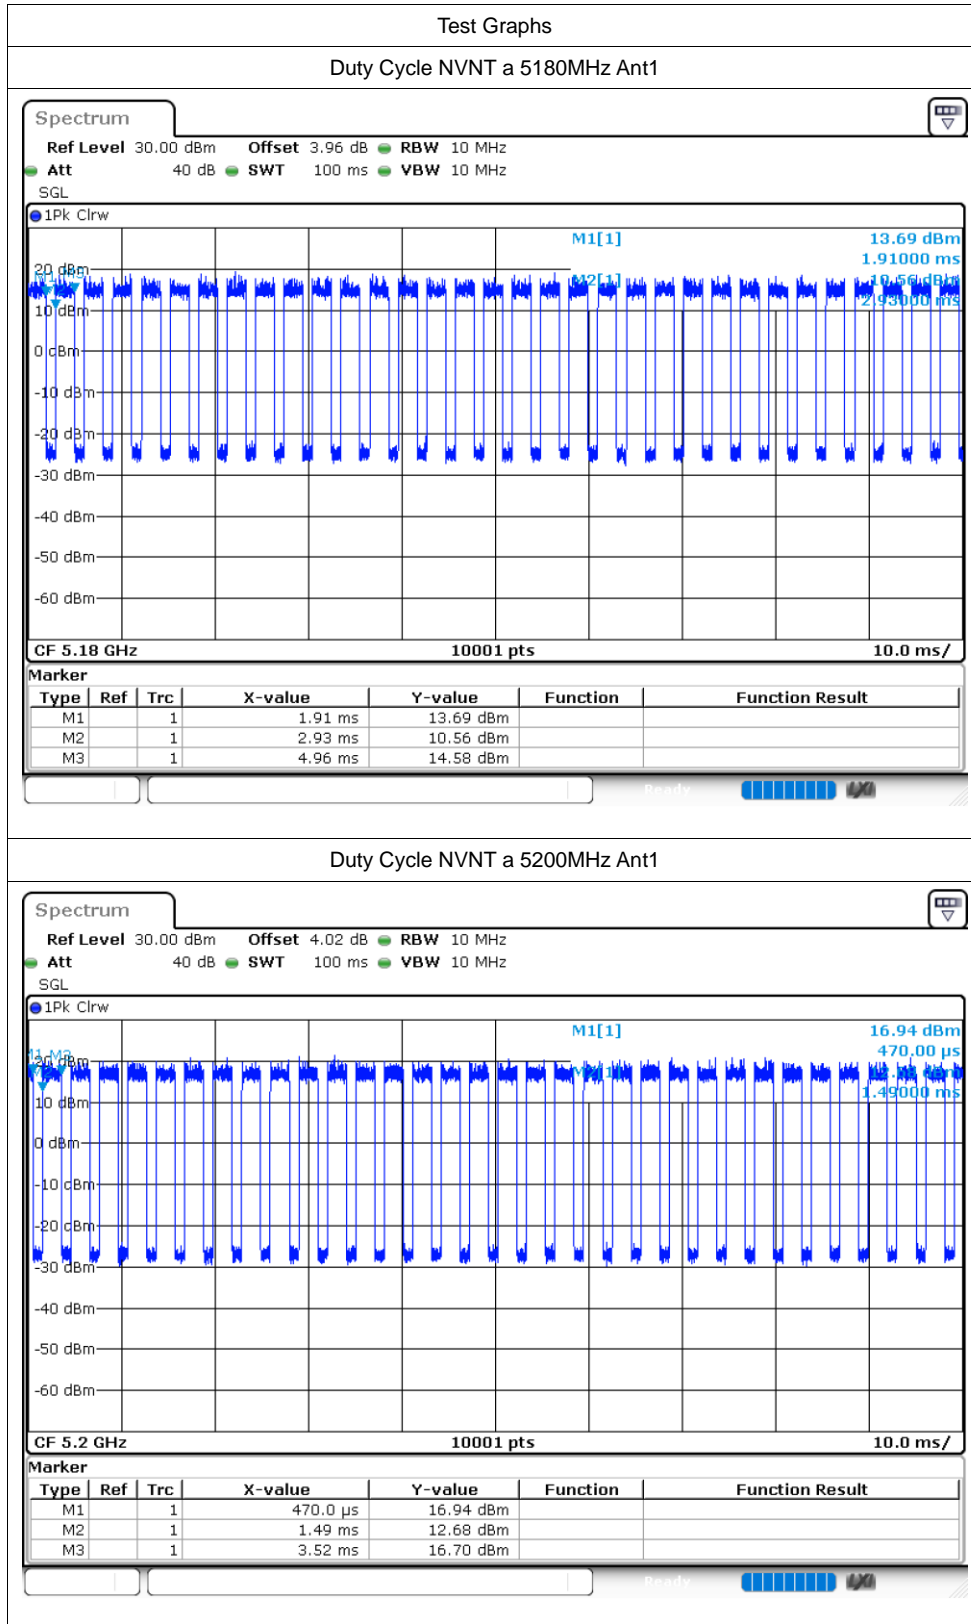



5.2G:


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	67.24	1.72	0.49
NVNT	a	5200	Ant1	66.74	1.76	0.49
NVNT	a	5240	Ant1	67.18	1.73	0.49
NVNT	n20	5180	Ant1	86.86	0.61	0.15
NVNT	n20	5200	Ant1	86.34	0.64	0.15
NVNT	n20	5240	Ant1	86.84	0.61	0.15
NVNT	n40	5190	Ant1	76.73	1.15	0.3
NVNT	n40	5230	Ant1	76.71	1.15	0.3
NVNT	ac20	5180	Ant1	65.43	1.84	0.53
NVNT	ac20	5200	Ant1	65.44	1.84	0.53
NVNT	ac20	5240	Ant1	65.76	1.82	0.53
NVNT	ac40	5190	Ant1	77	1.13	0.2
NVNT	ac40	5230	Ant1	76.19	1.18	0.2
NVNT	ac80	5210	Ant1	75.47	1.22	0.22
NVNT	ax20	5180	Ant1	77.35	1.12	0.19
NVNT	ax20	5200	Ant1	76.94	1.14	0.19
NVNT	ax20	5240	Ant1	77.34	1.12	0.19
NVNT	ax40	5190	Ant1	71.31	1.47	0.26
NVNT	ax40	5230	Ant1	72.06	1.42	0.26
NVNT	ax80	5210	Ant1	71.16	1.48	0.27

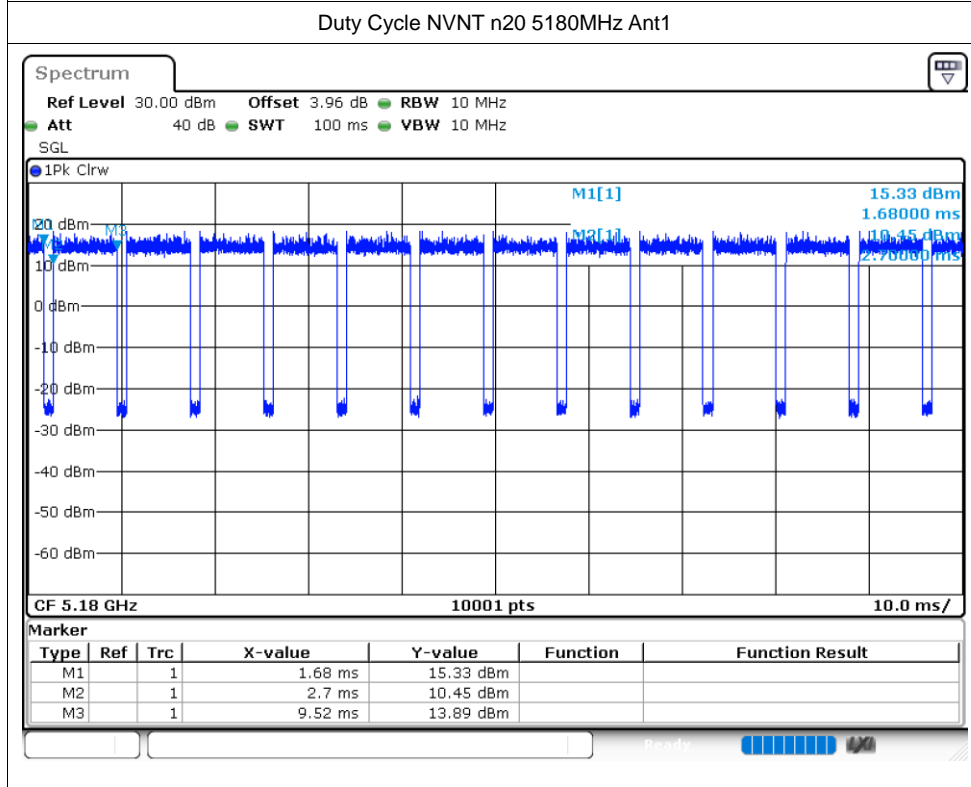


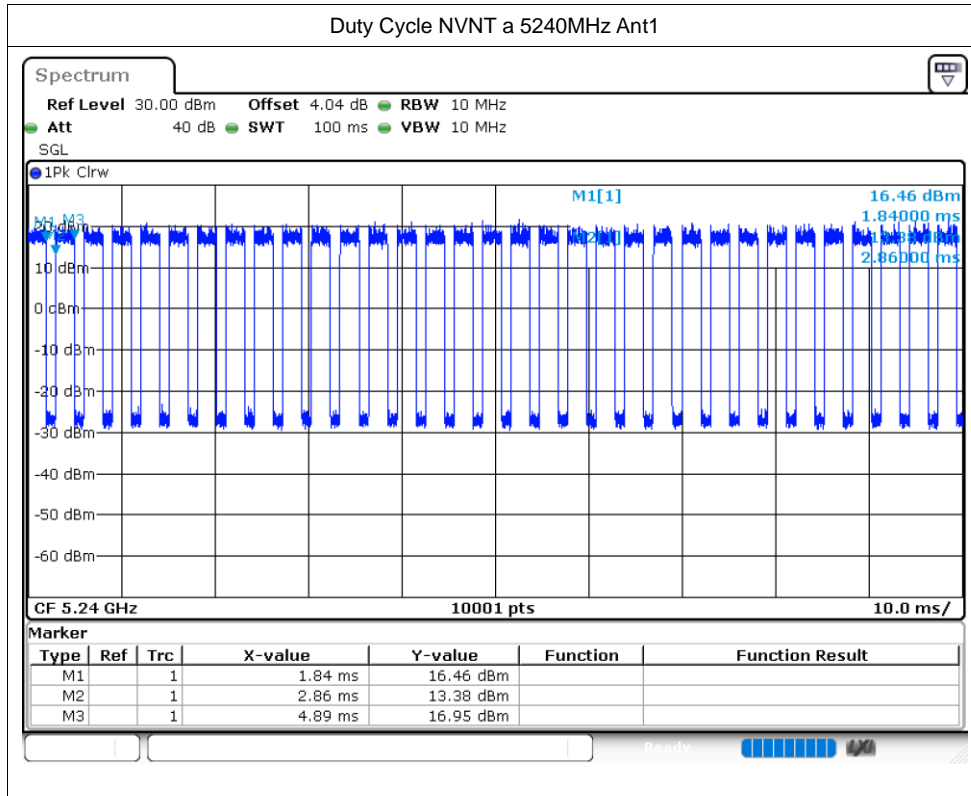



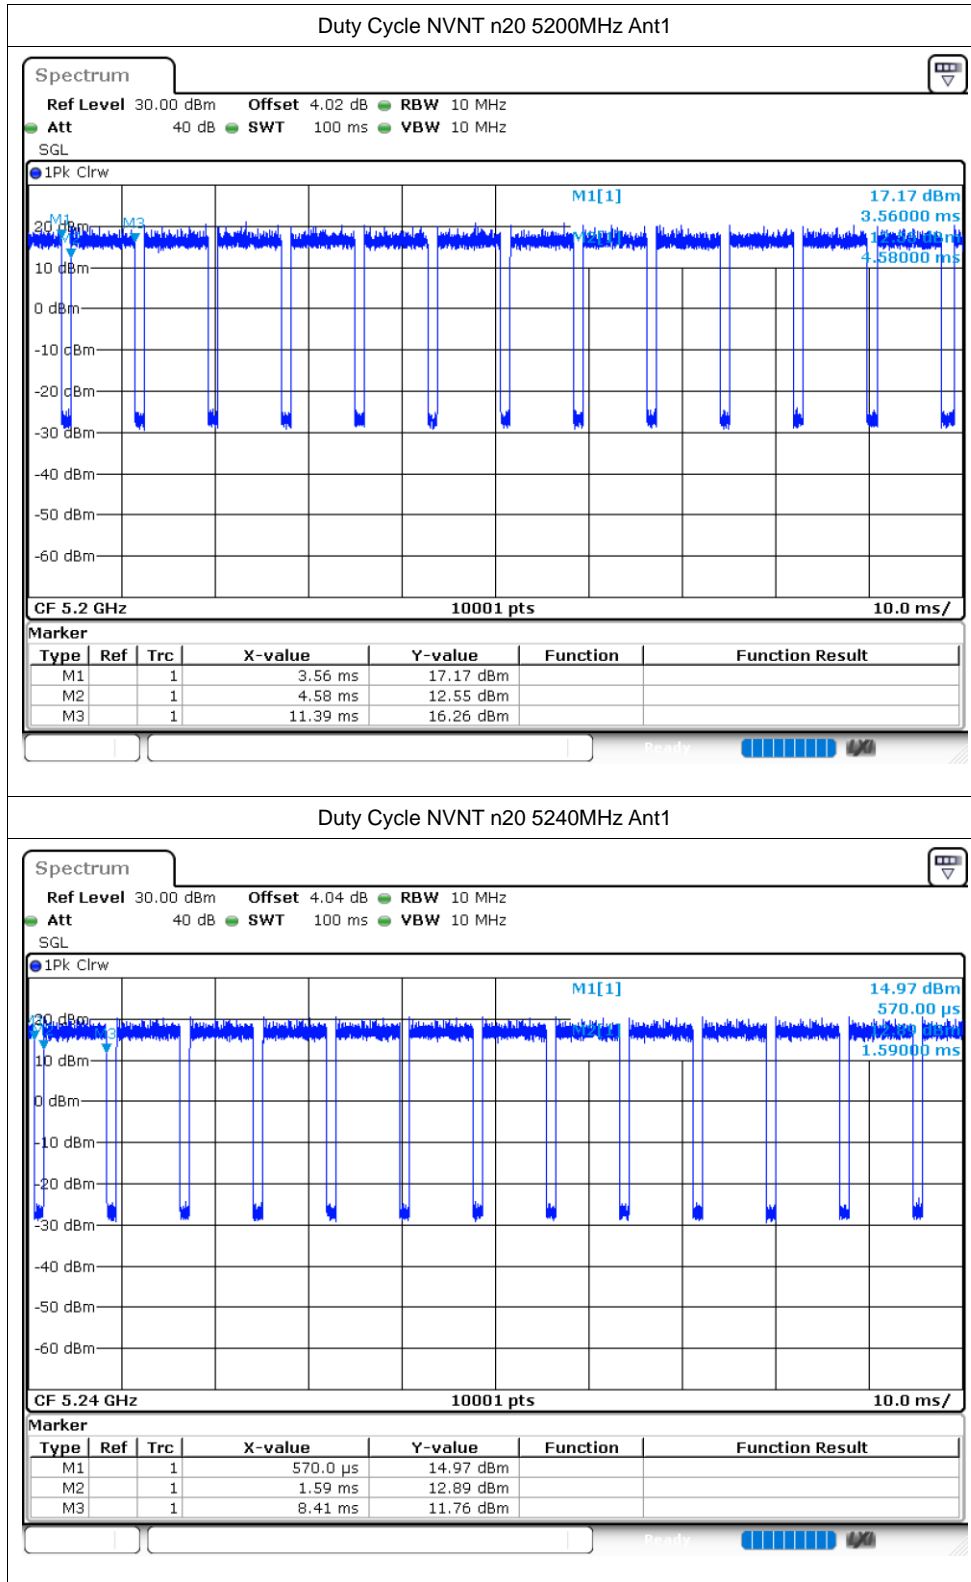



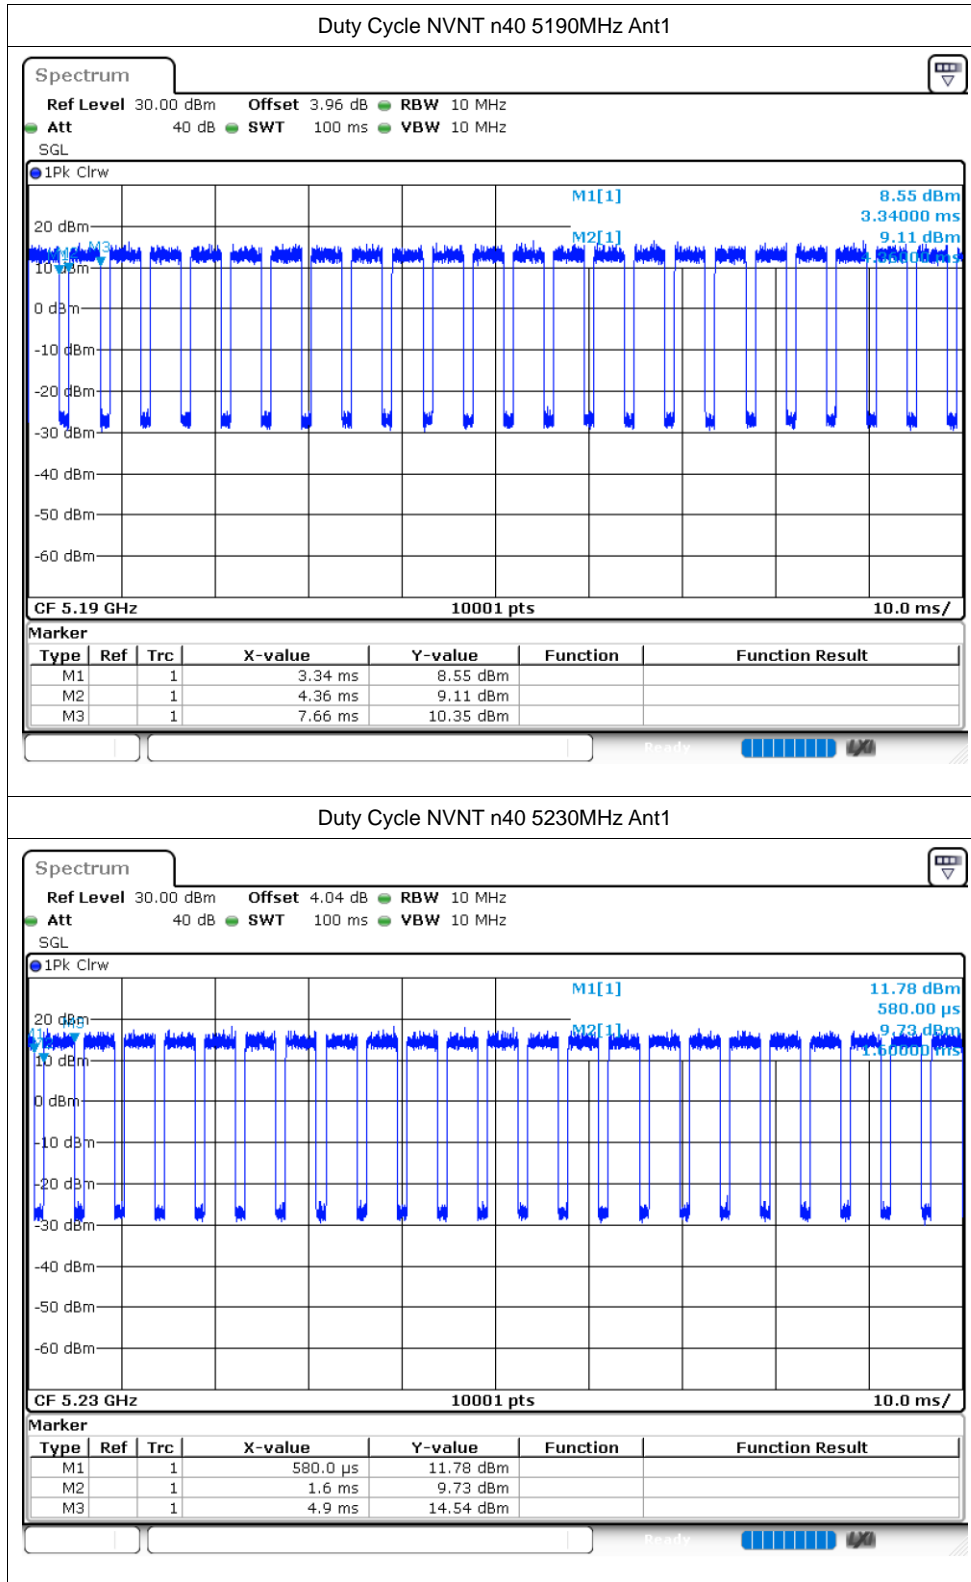


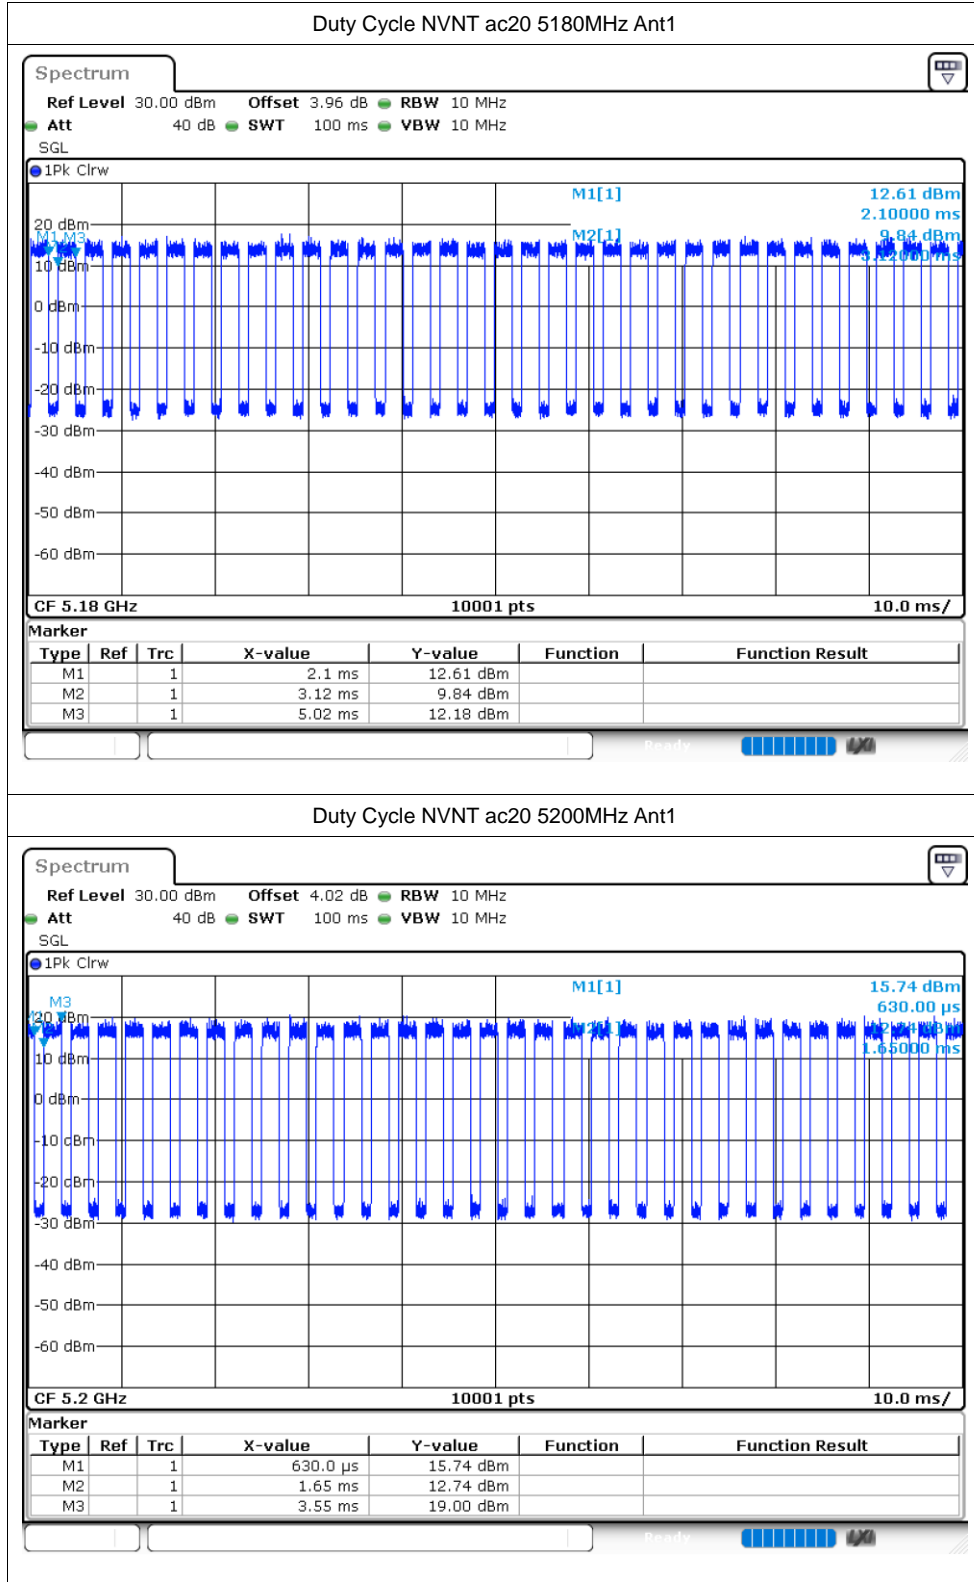

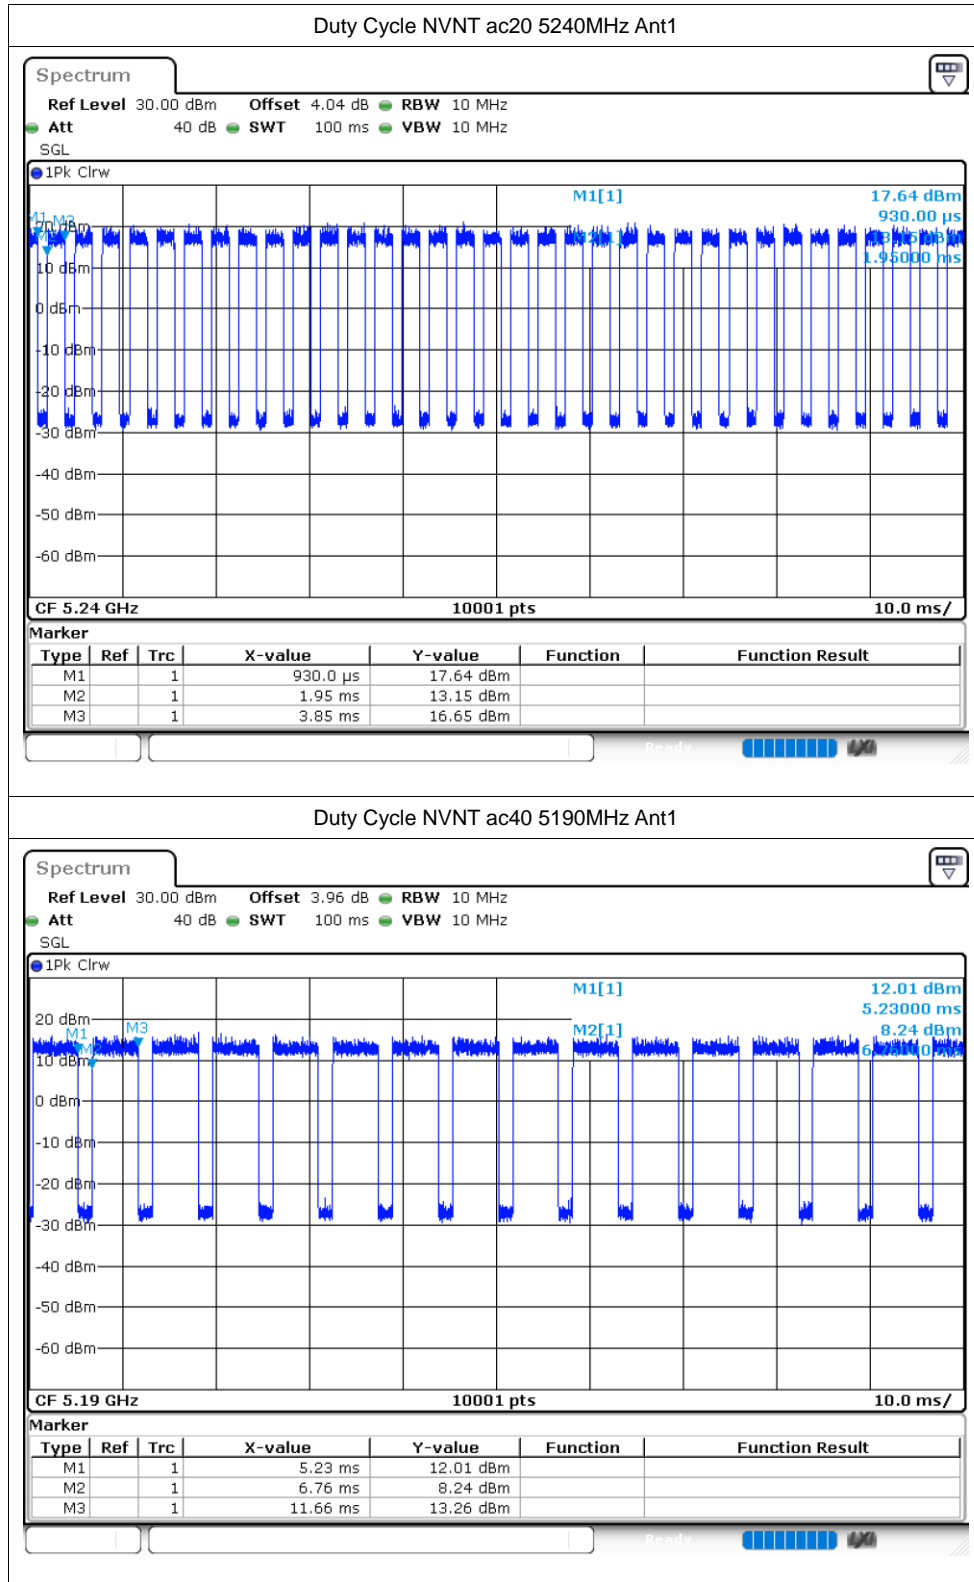

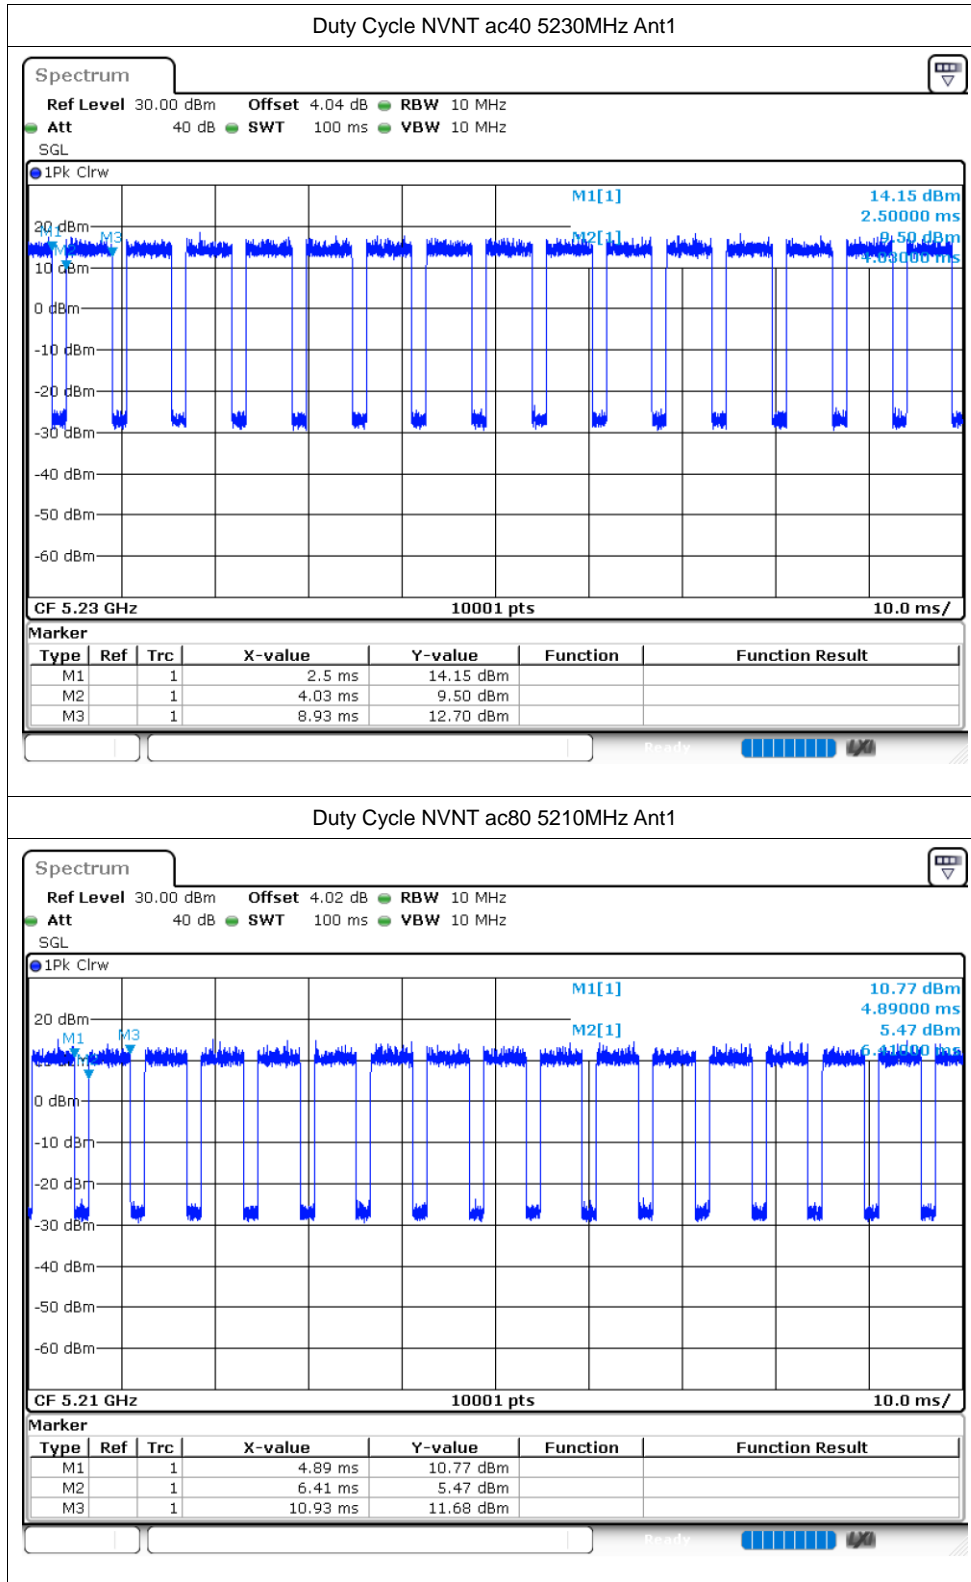

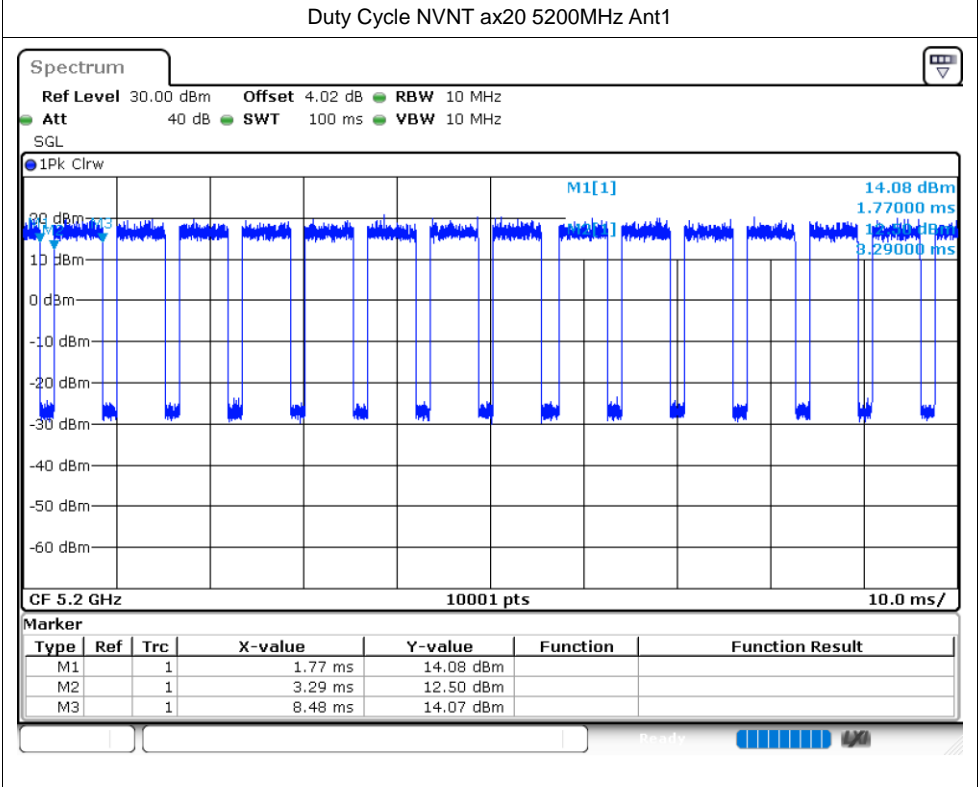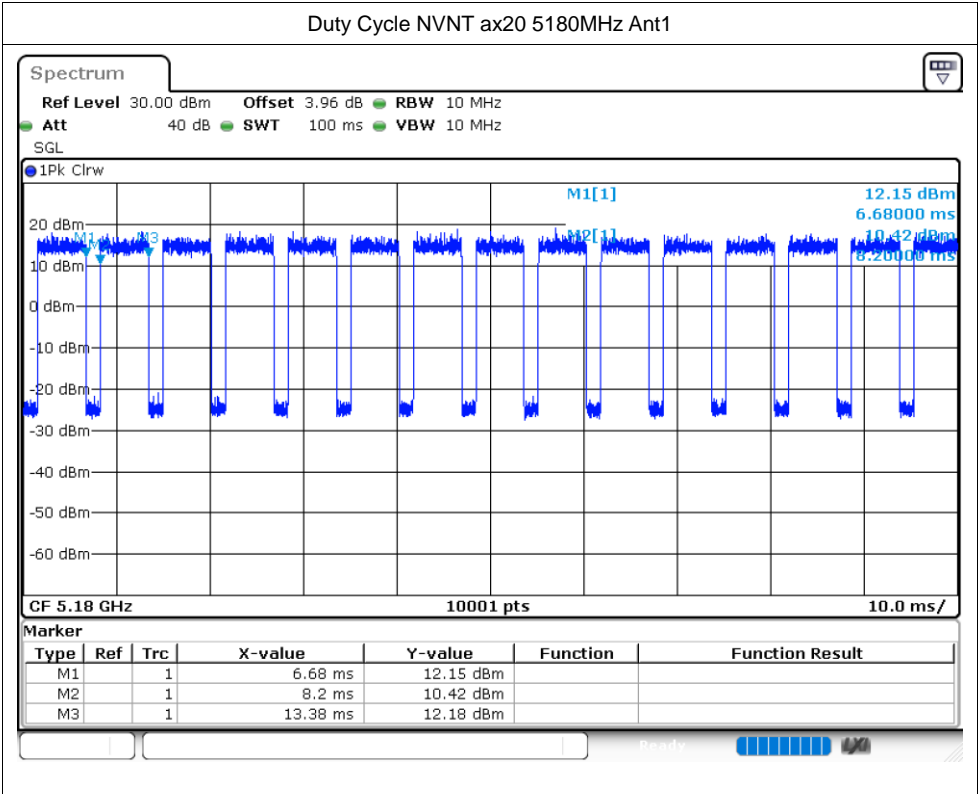

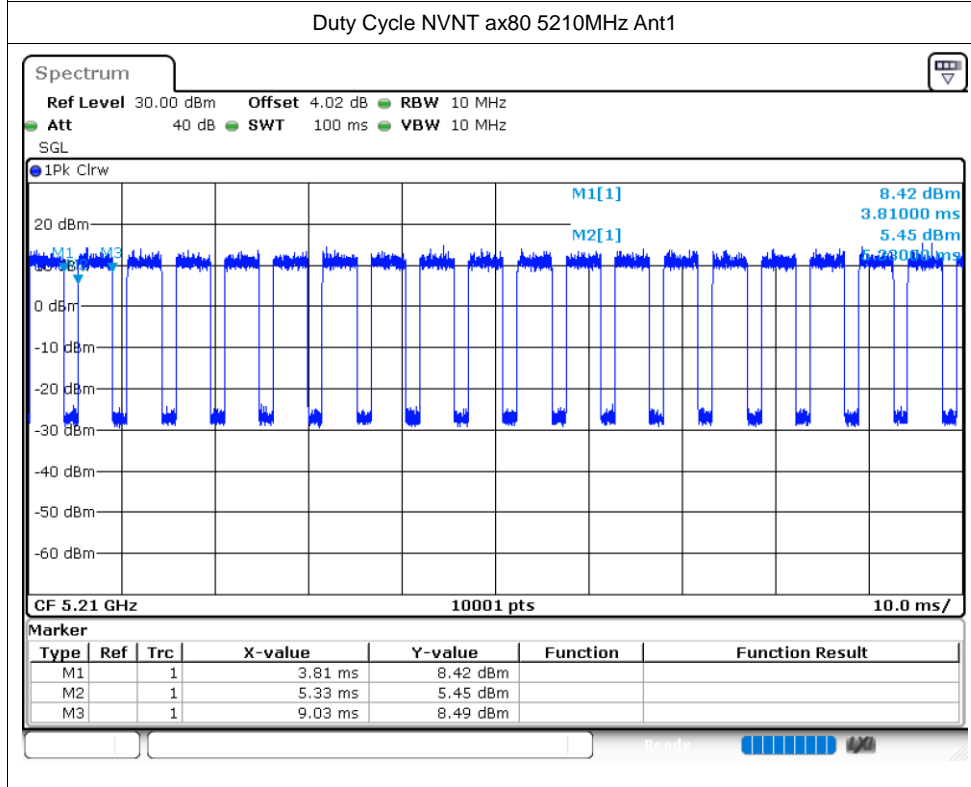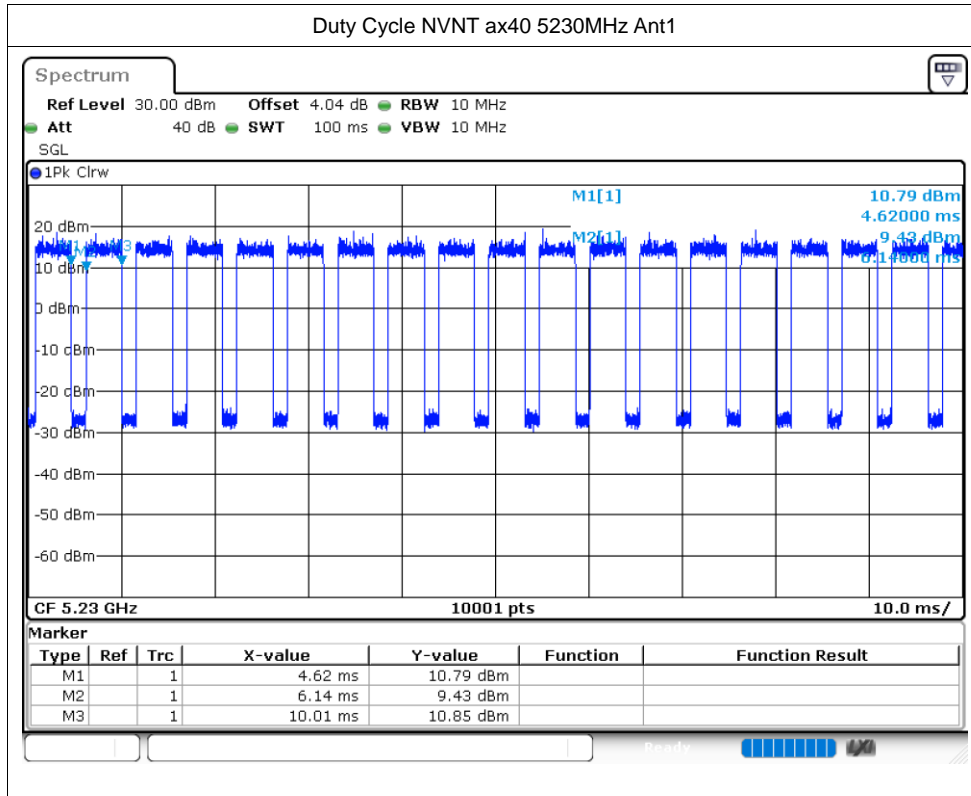




Maximum Conducted Output Power



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.9	24	Pass
NVNT	a	5200	Ant1	12.34	24	Pass
NVNT	a	5240	Ant1	13.38	24	Pass
NVNT	n20	5180	Ant1	11.63	24	Pass
NVNT	n20	5200	Ant1	12.12	24	Pass
NVNT	n20	5240	Ant1	13.14	24	Pass
NVNT	n40	5190	Ant1	11.88	24	Pass
NVNT	n40	5230	Ant1	12.92	24	Pass
NVNT	ac20	5180	Ant1	11.04	24	Pass
NVNT	ac20	5200	Ant1	12.3	24	Pass
NVNT	ac20	5240	Ant1	13.39	24	Pass
NVNT	ac40	5190	Ant1	11.9	24	Pass
NVNT	ac40	5230	Ant1	12.86	24	Pass
NVNT	ac80	5210	Ant1	12.23	24	Pass
NVNT	ax20	5180	Ant1	11.66	24	Pass
NVNT	ax20	5200	Ant1	12.04	24	Pass
NVNT	ax20	5240	Ant1	13.14	24	Pass
NVNT	ax40	5190	Ant1	11.85	24	Pass
NVNT	ax40	5230	Ant1	12.93	24	Pass
NVNT	ax80	5210	Ant1	12.28	24	Pass



-26dB Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	24.792	Pass
NVNT	a	5200	Ant1	22.869	Pass
NVNT	a	5240	Ant1	23.628	Pass
NVNT	n20	5180	Ant1	25.989	Pass
NVNT	n20	5200	Ant1	23.934	Pass
NVNT	n20	5240	Ant1	24.432	Pass
NVNT	n40	5190	Ant1	46.92	Pass
NVNT	n40	5230	Ant1	45.552	Pass
NVNT	ac20	5180	Ant1	24.357	Pass
NVNT	ac20	5200	Ant1	22.761	Pass
NVNT	ac20	5240	Ant1	23.1	Pass
NVNT	ac40	5190	Ant1	47.316	Pass
NVNT	ac40	5230	Ant1	46.548	Pass
NVNT	ac80	5210	Ant1	86.82	Pass
NVNT	ax20	5180	Ant1	23.019	Pass
NVNT	ax20	5200	Ant1	22.863	Pass
NVNT	ax20	5240	Ant1	24.438	Pass
NVNT	ax40	5190	Ant1	45.354	Pass
NVNT	ax40	5230	Ant1	45.288	Pass
NVNT	ax80	5210	Ant1	86.976	Pass


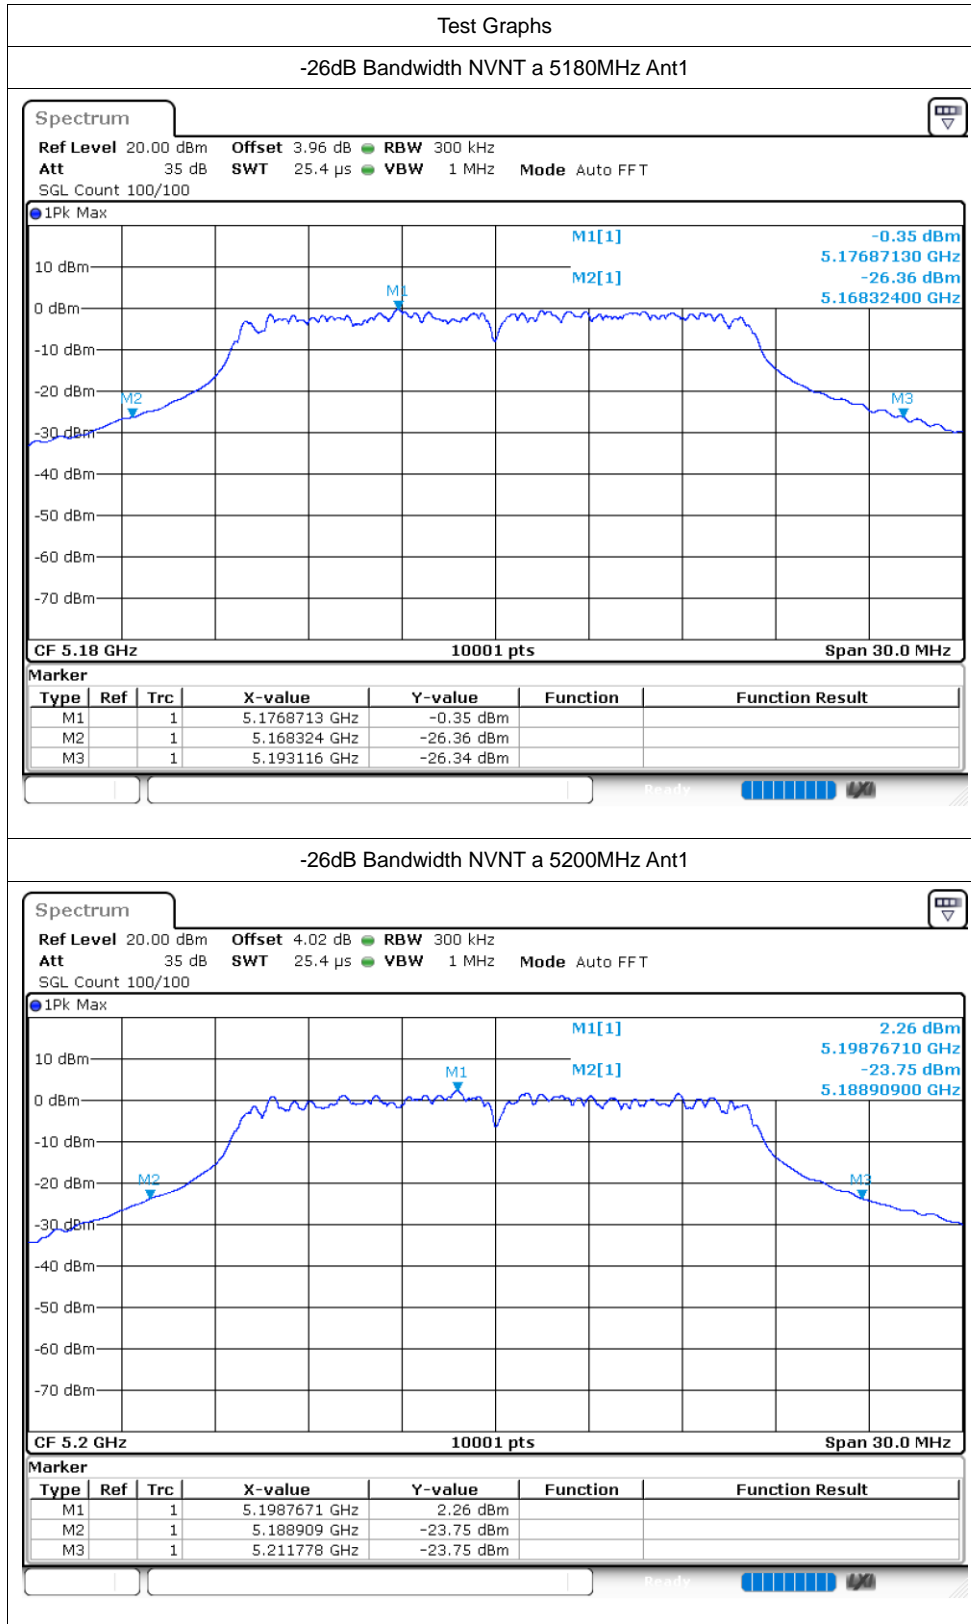


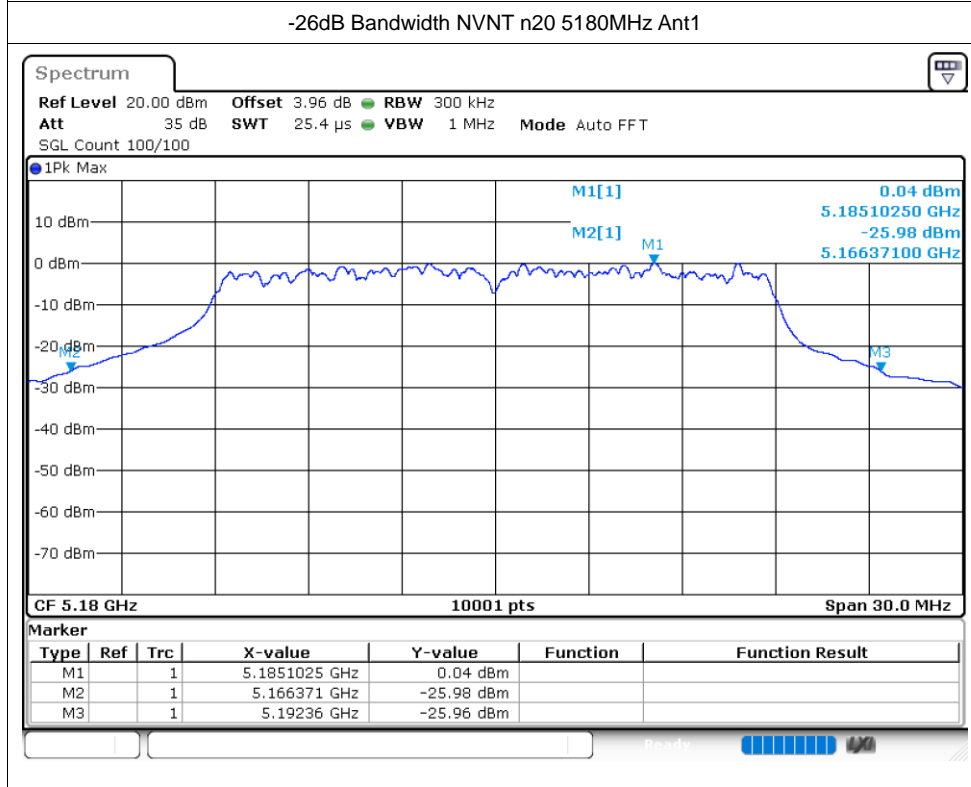
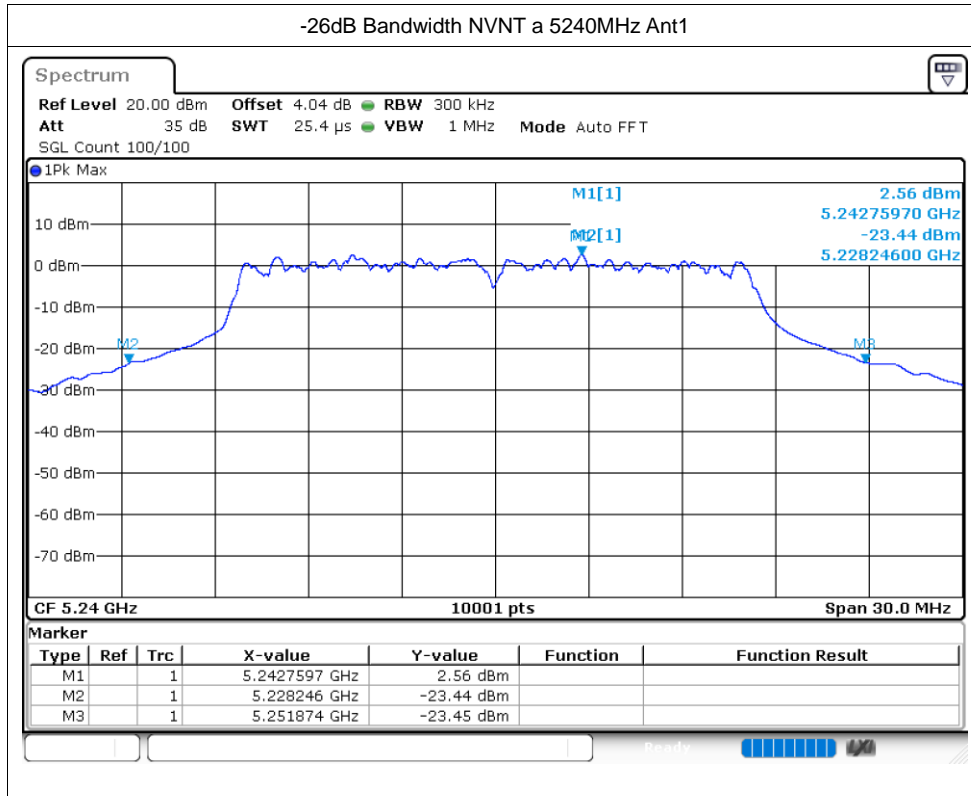


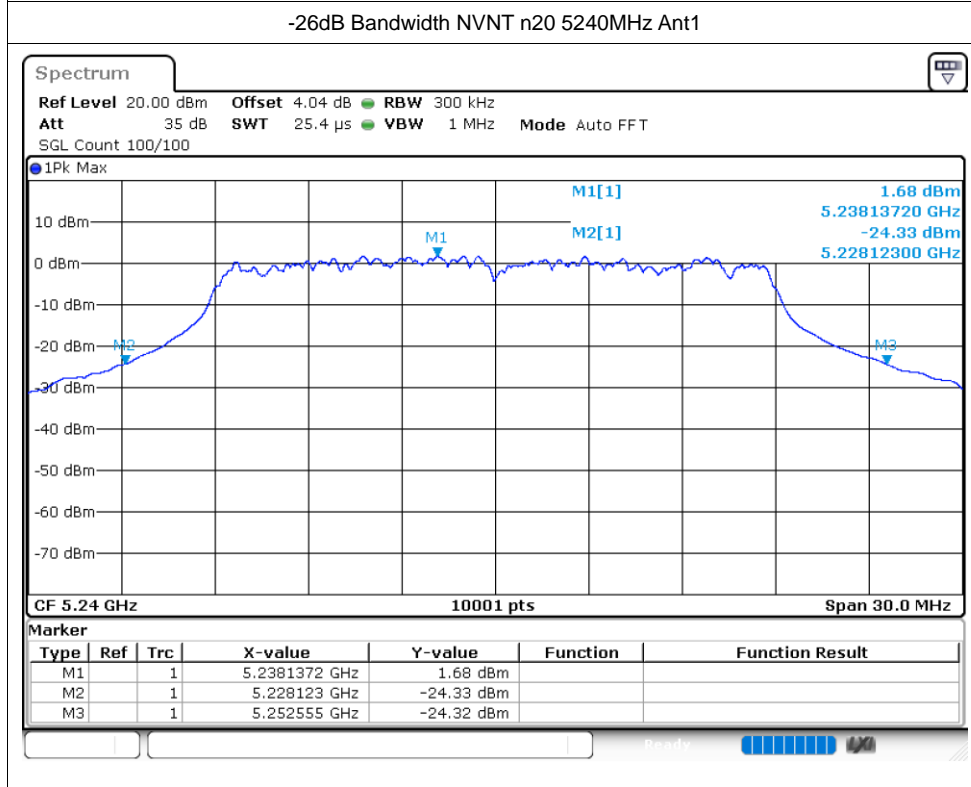
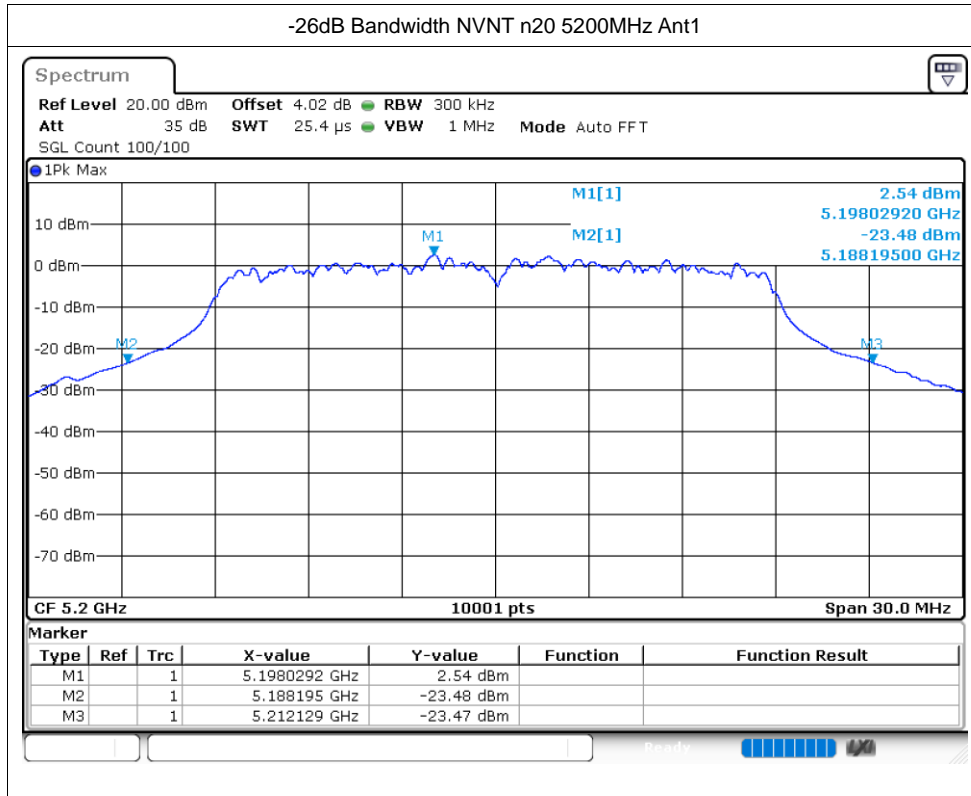


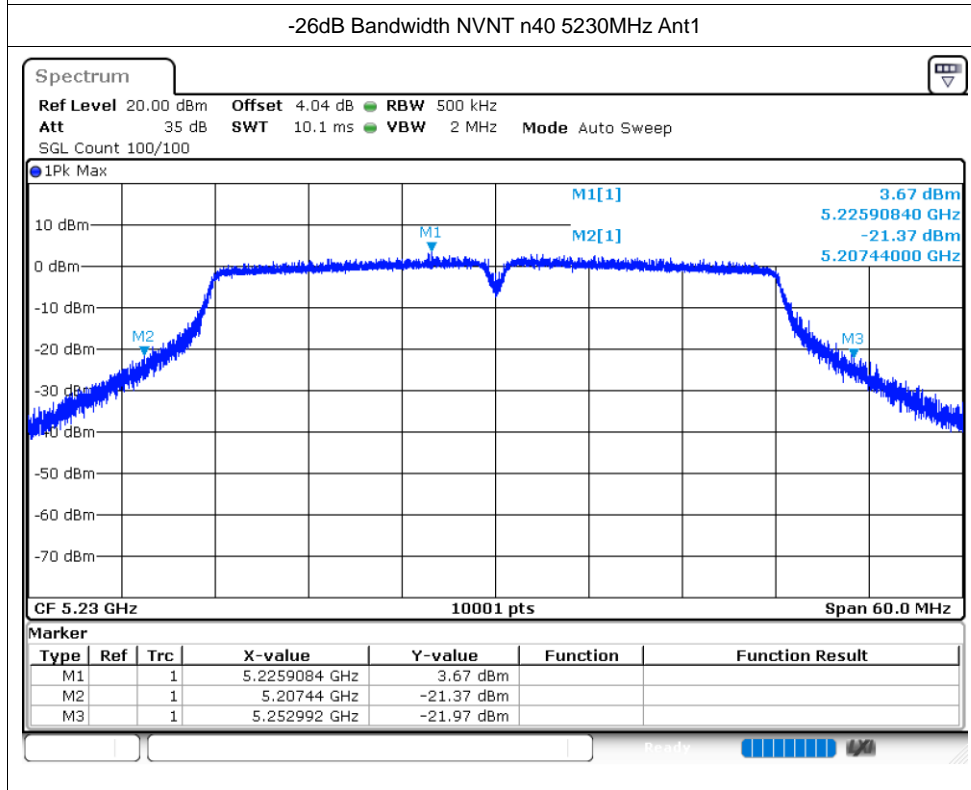
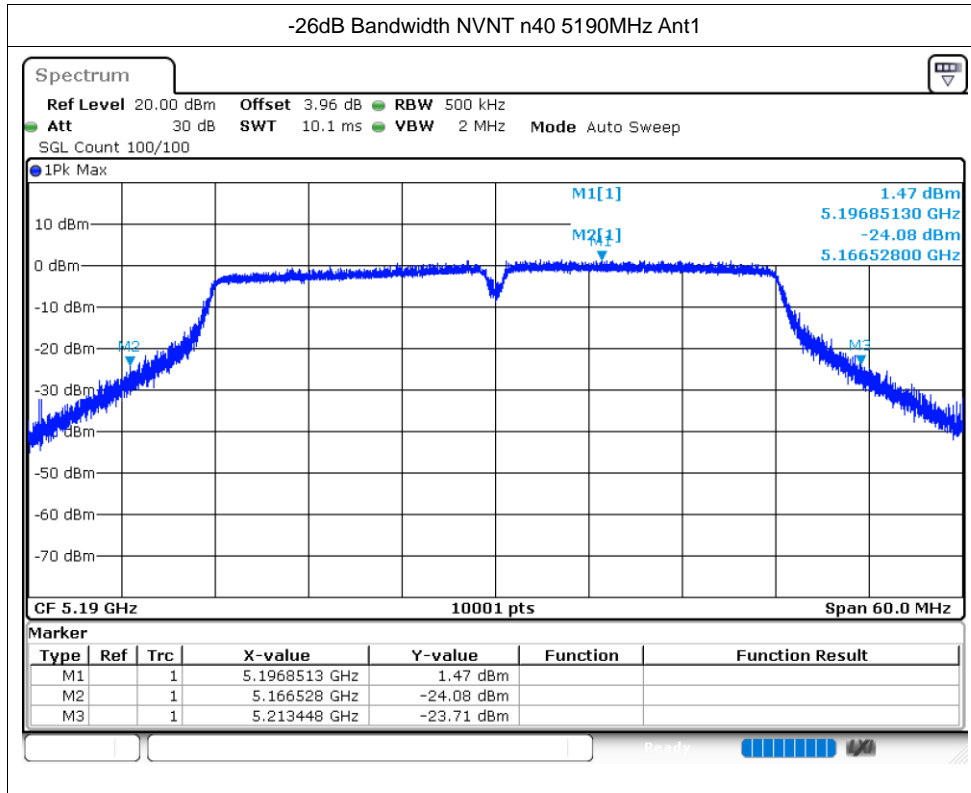


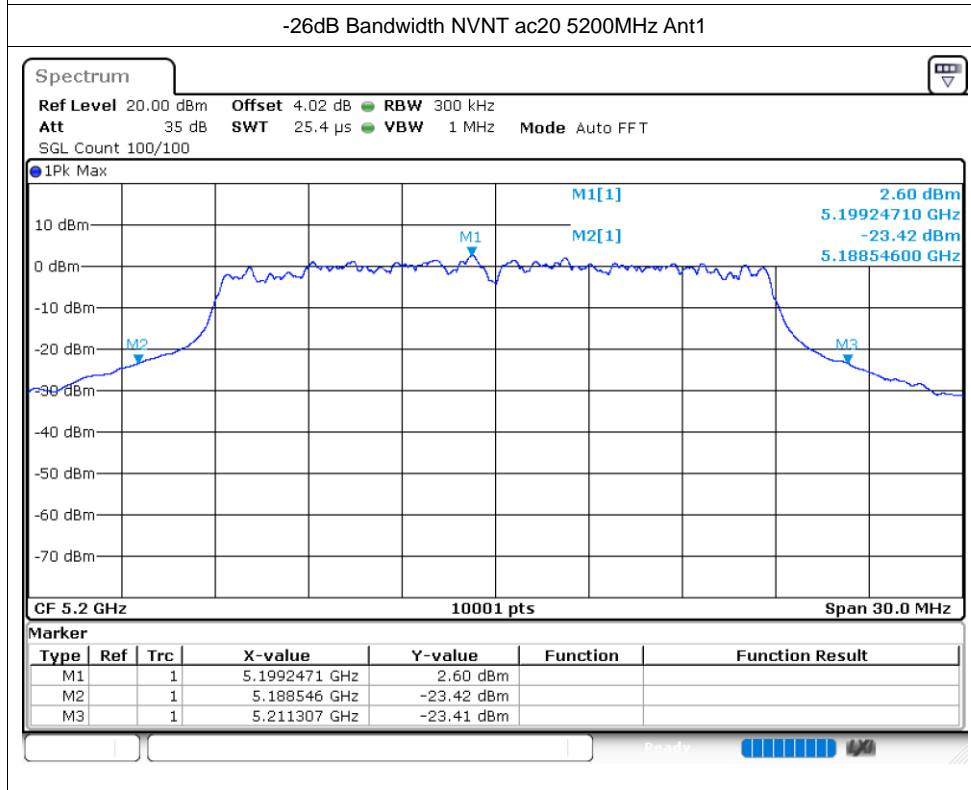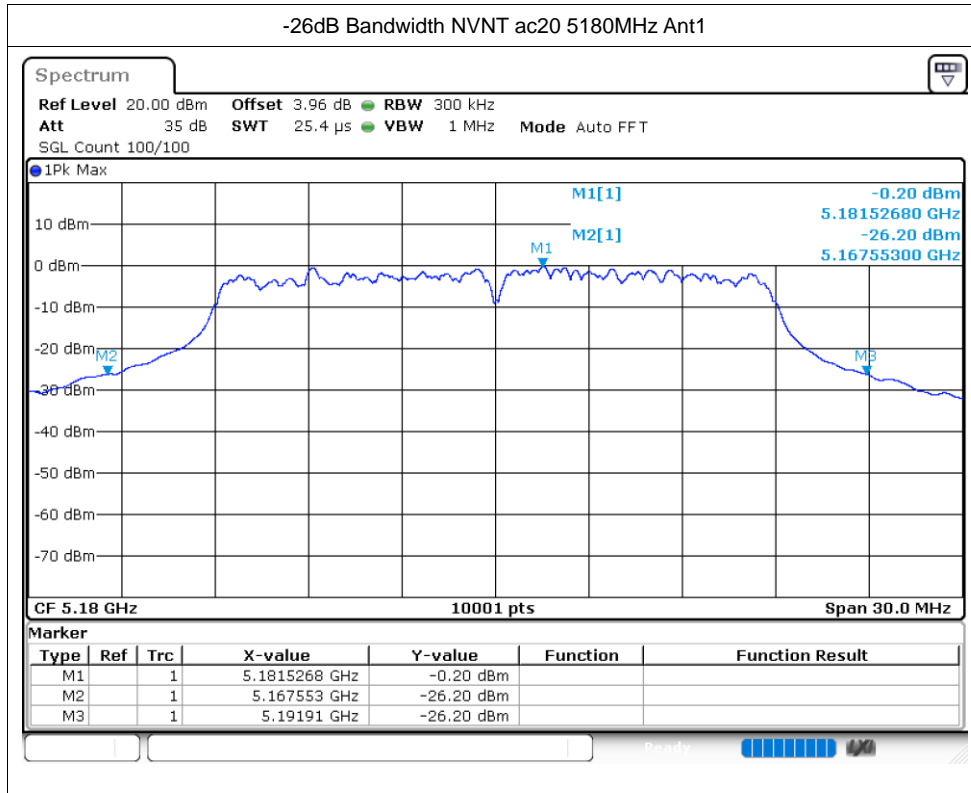

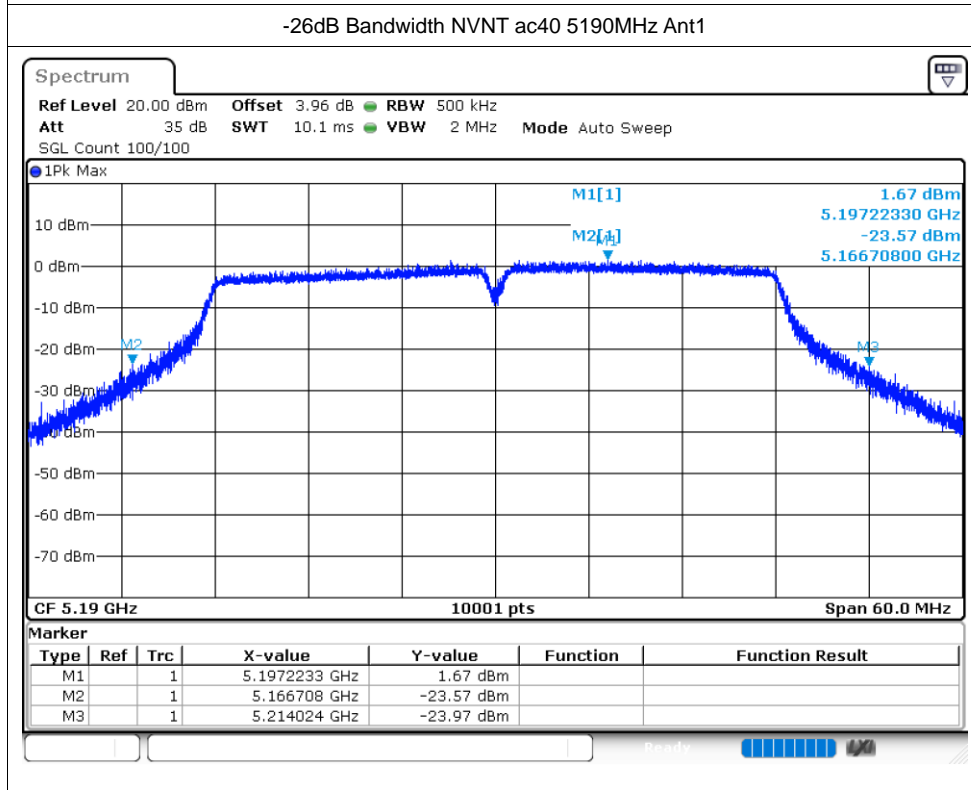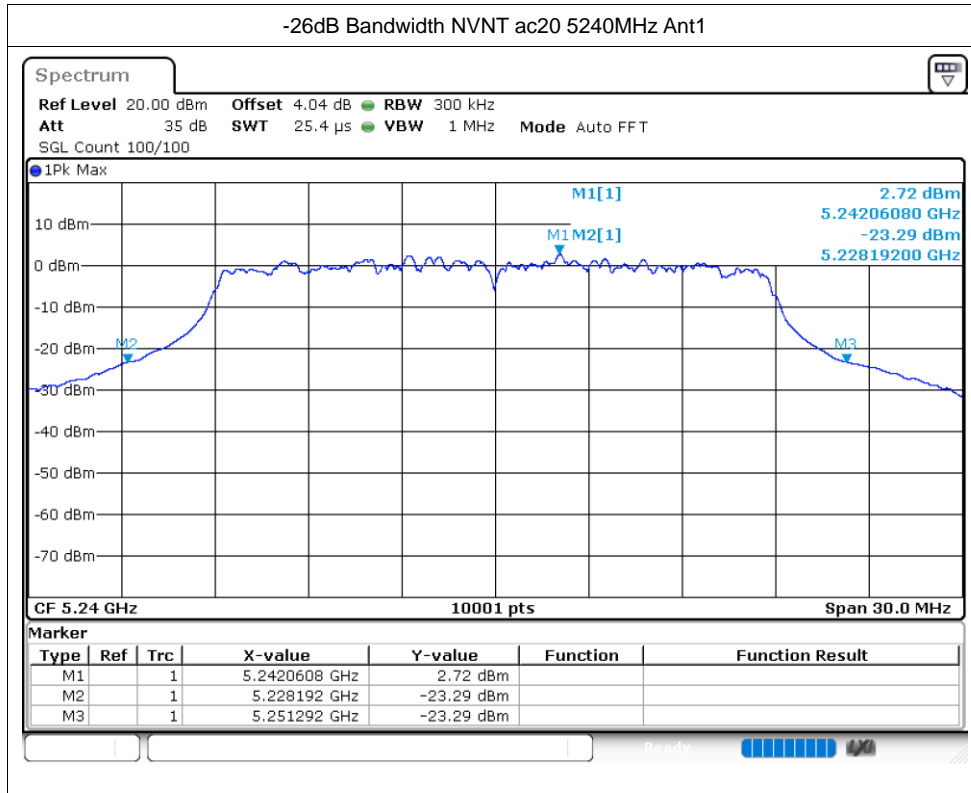

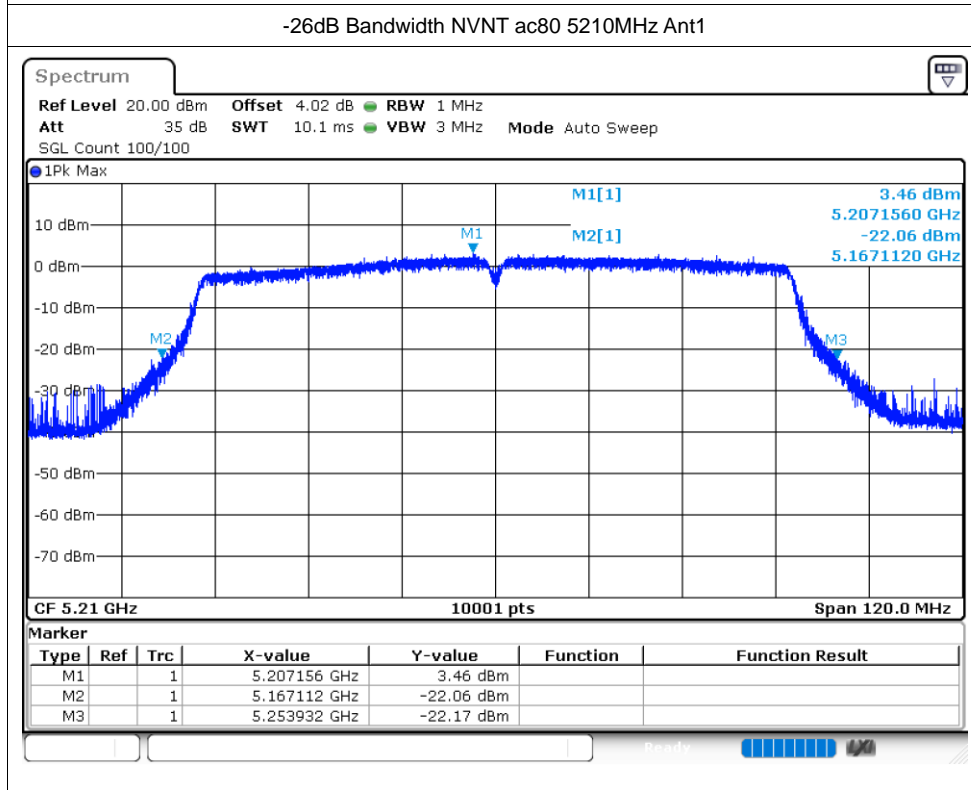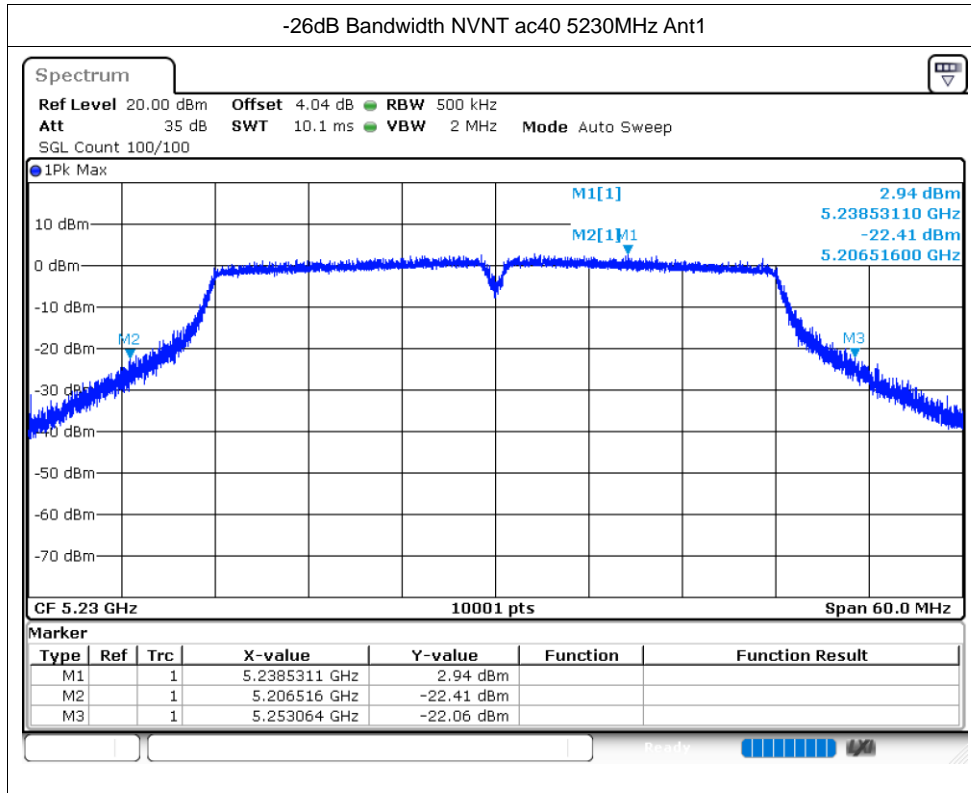

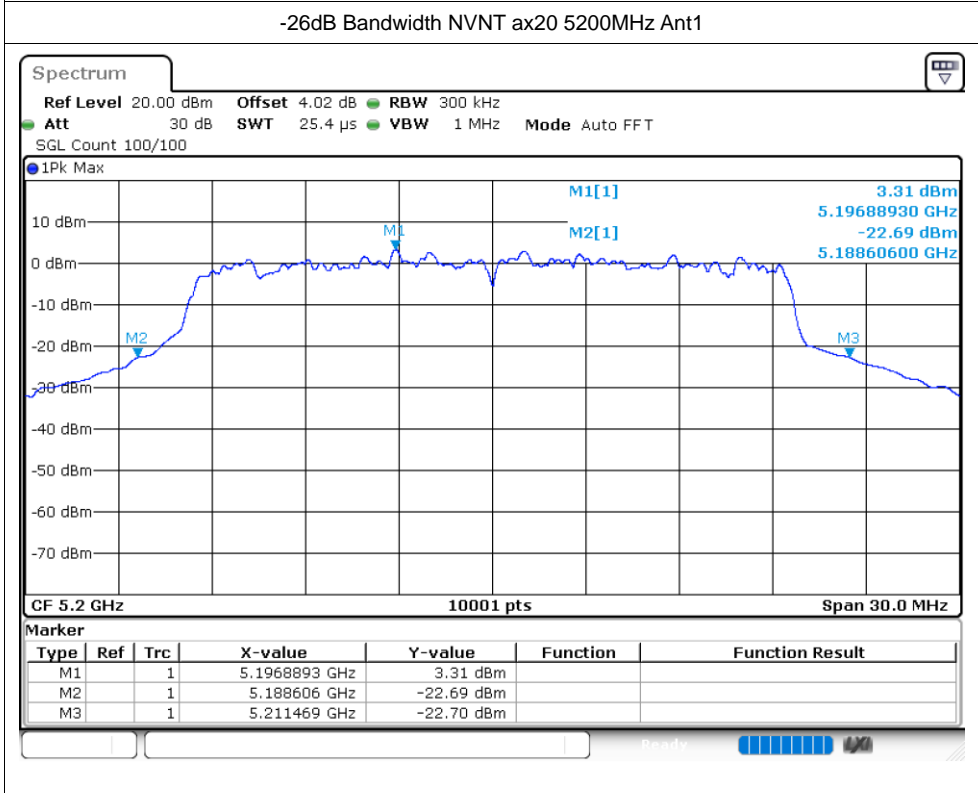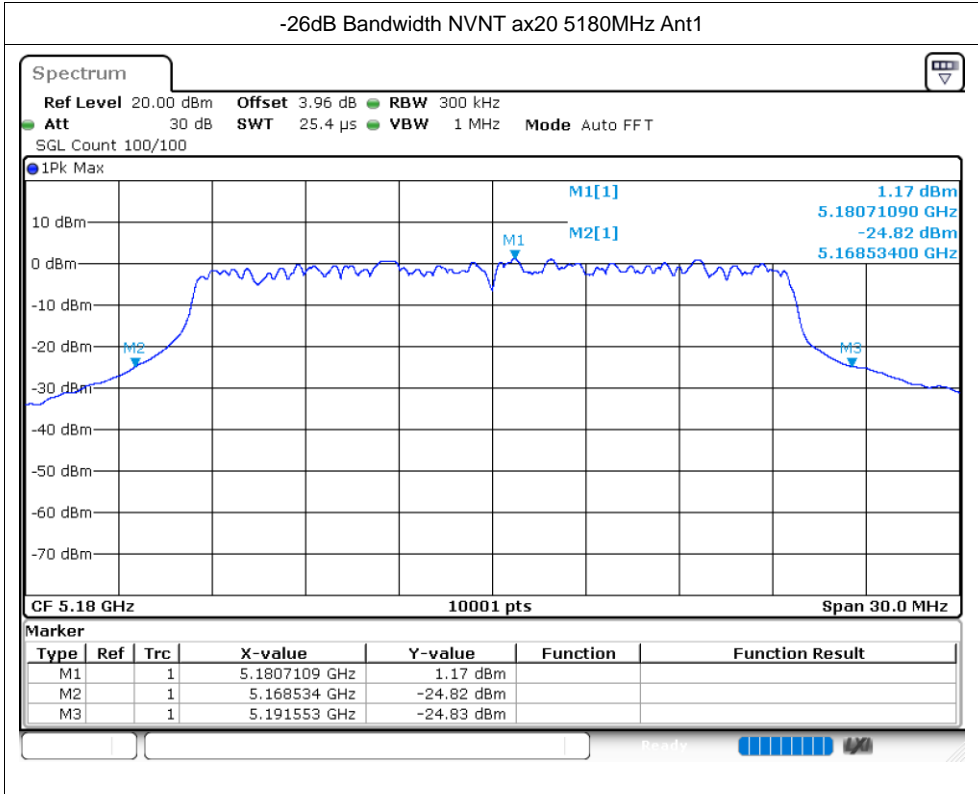

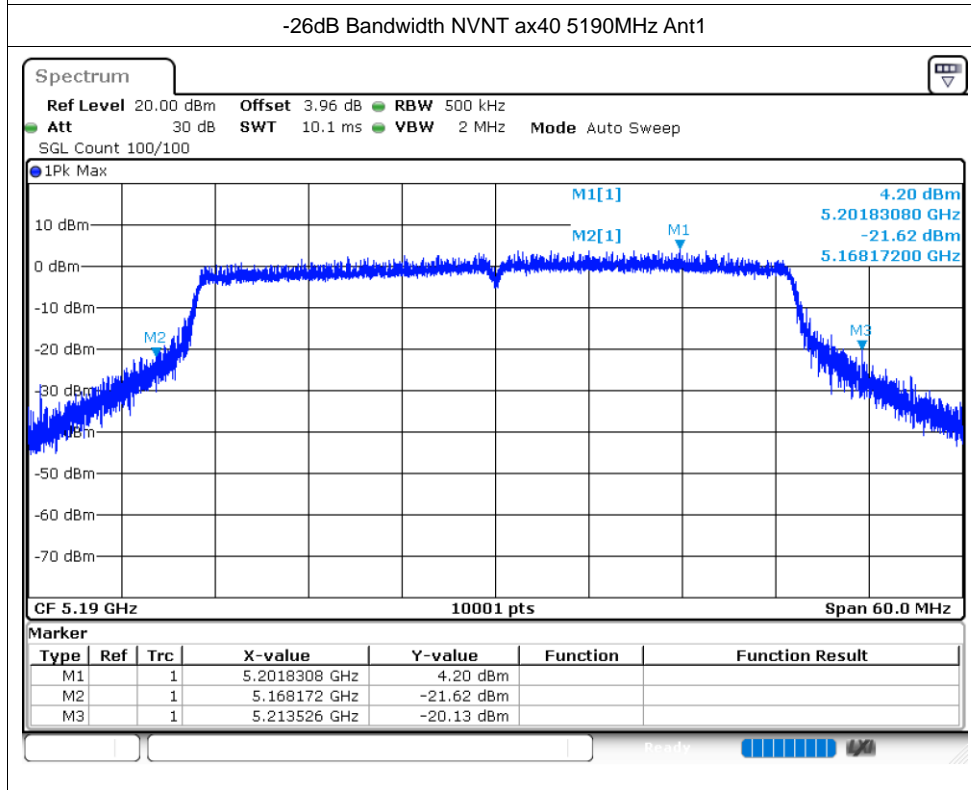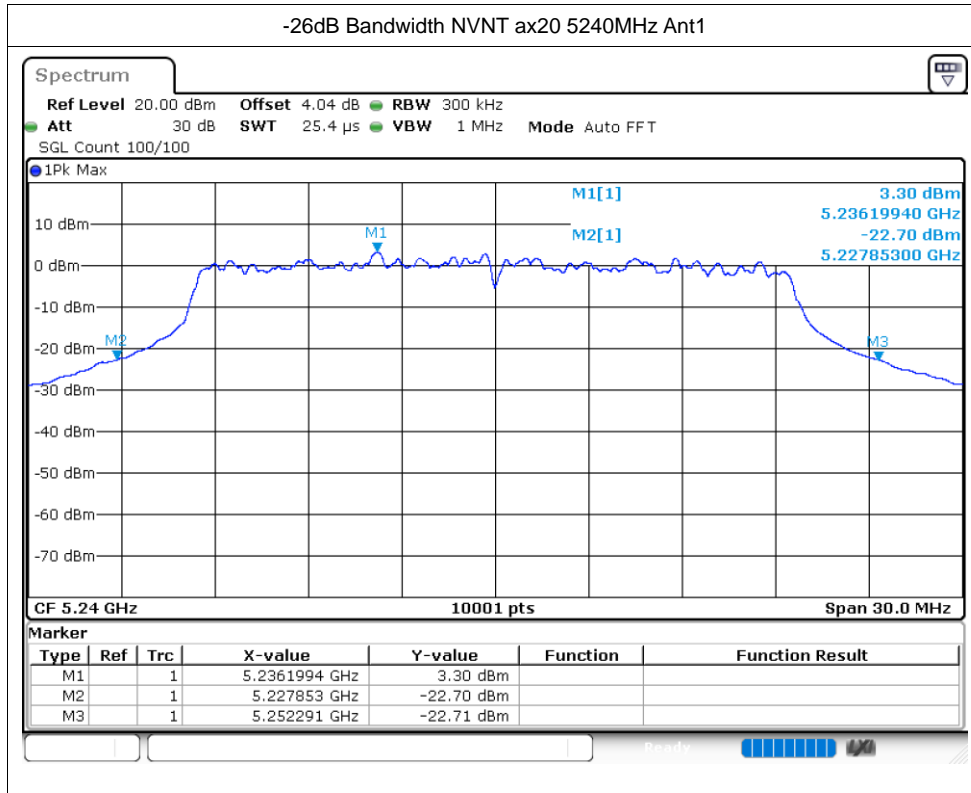


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.642
NVNT	a	5200	Ant1	16.495
NVNT	a	5240	Ant1	16.531
NVNT	n20	5180	Ant1	17.914
NVNT	n20	5200	Ant1	17.776
NVNT	n20	5240	Ant1	17.884
NVNT	n40	5190	Ant1	36.542
NVNT	n40	5230	Ant1	36.524
NVNT	ac20	5180	Ant1	18.007
NVNT	ac20	5200	Ant1	17.653
NVNT	ac20	5240	Ant1	17.935
NVNT	ac40	5190	Ant1	36.578
NVNT	ac40	5230	Ant1	36.536
NVNT	ac80	5210	Ant1	75.58
NVNT	ax20	5180	Ant1	18.925
NVNT	ax20	5200	Ant1	18.979
NVNT	ax20	5240	Ant1	19.072
NVNT	ax40	5190	Ant1	37.886
NVNT	ax40	5230	Ant1	37.832
NVNT	ax80	5210	Ant1	77.152



Test Graphs



OBW NVNT a 5180MHz Ant1


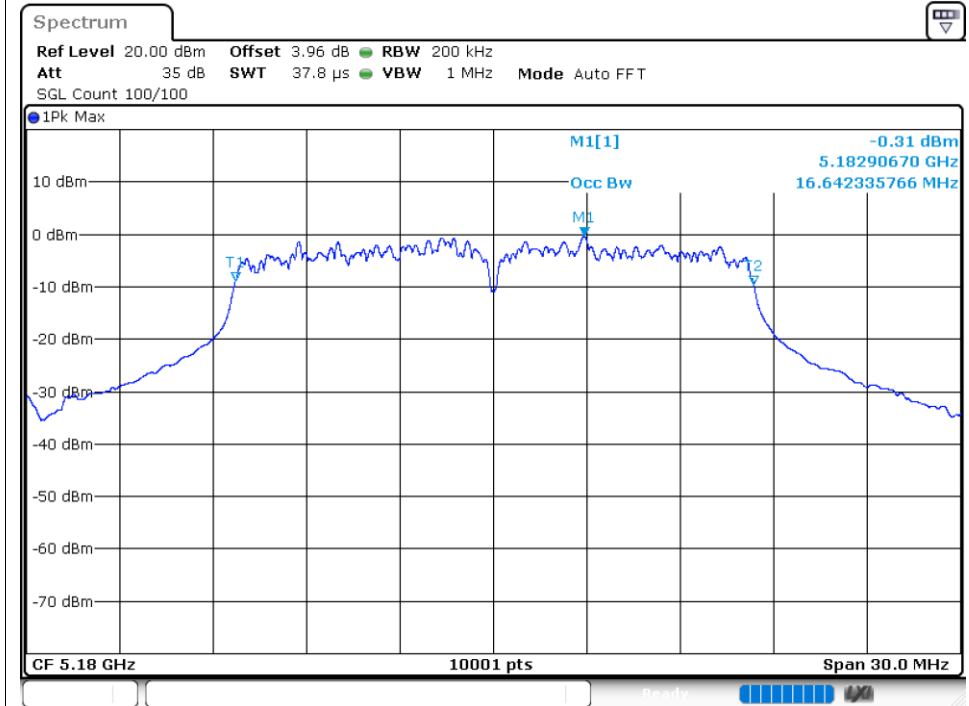




OBW NVNT a 5200MHz Ant1


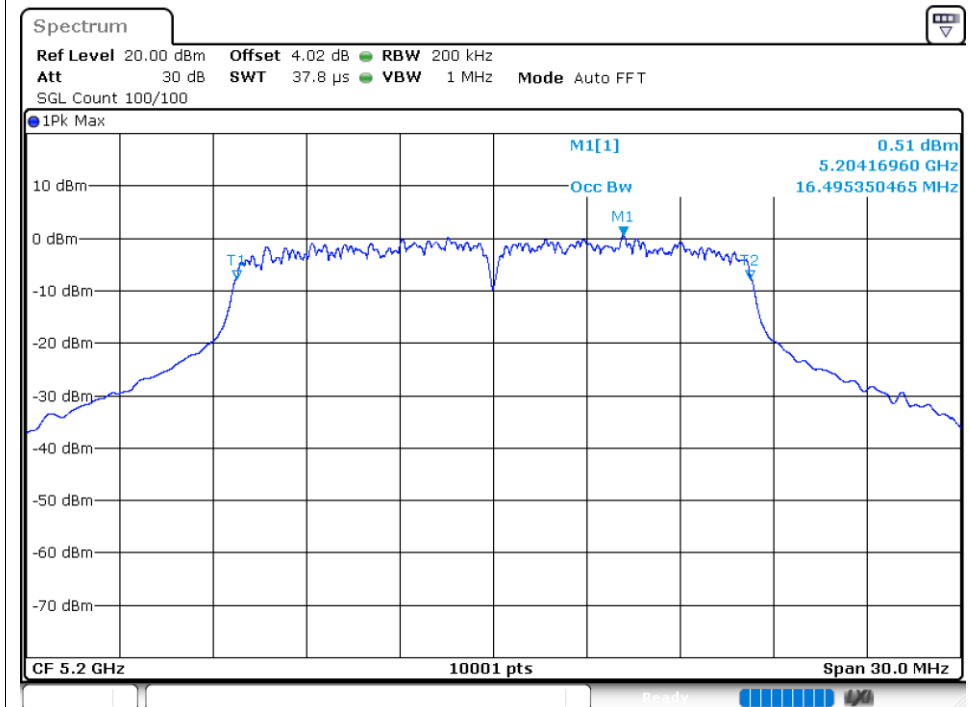


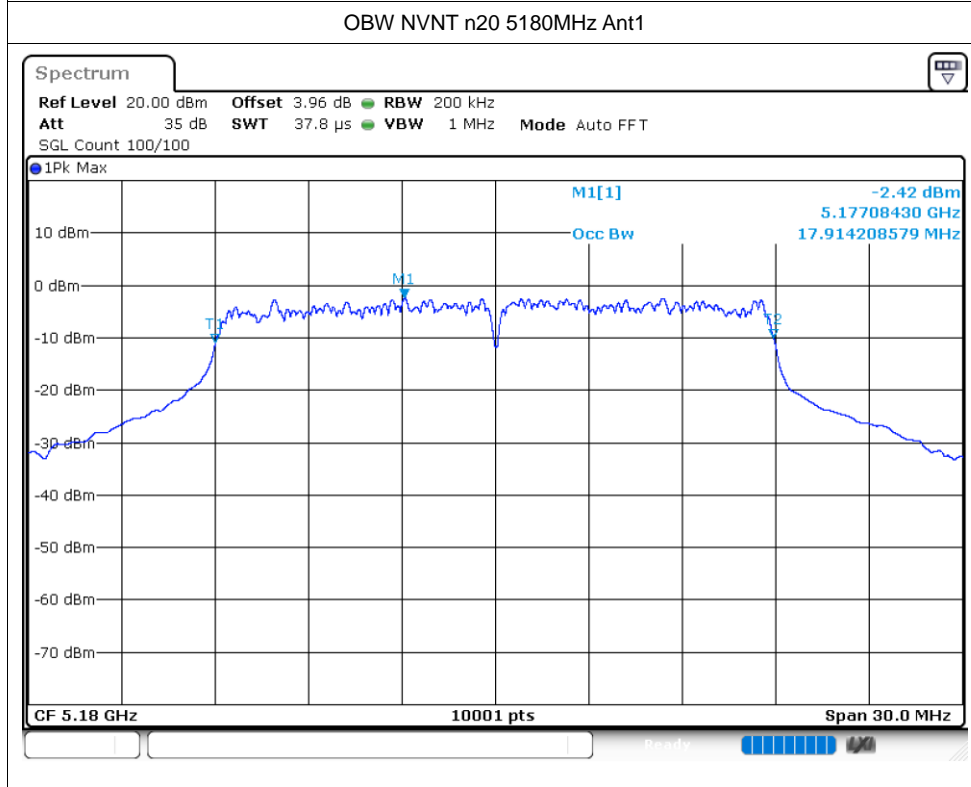
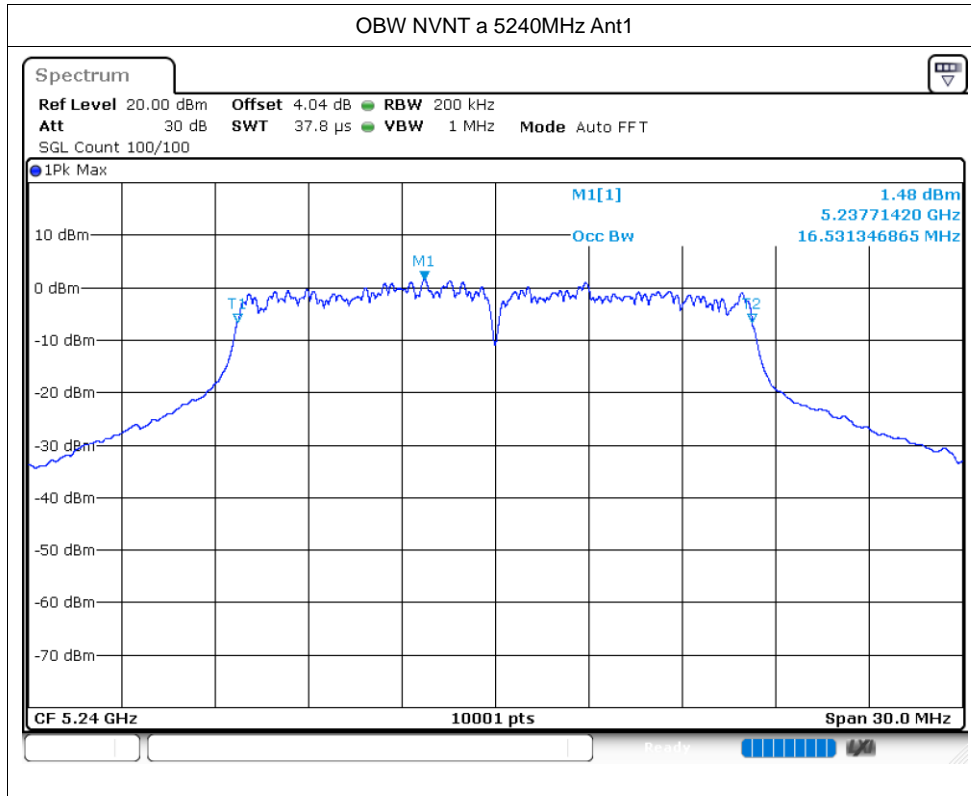


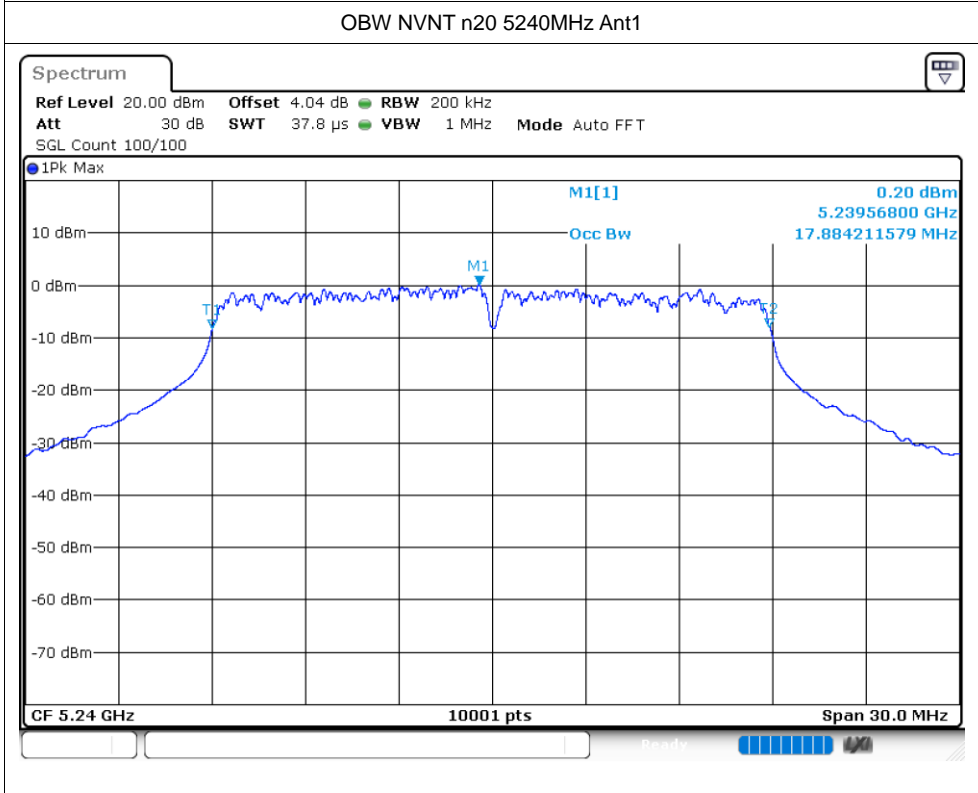
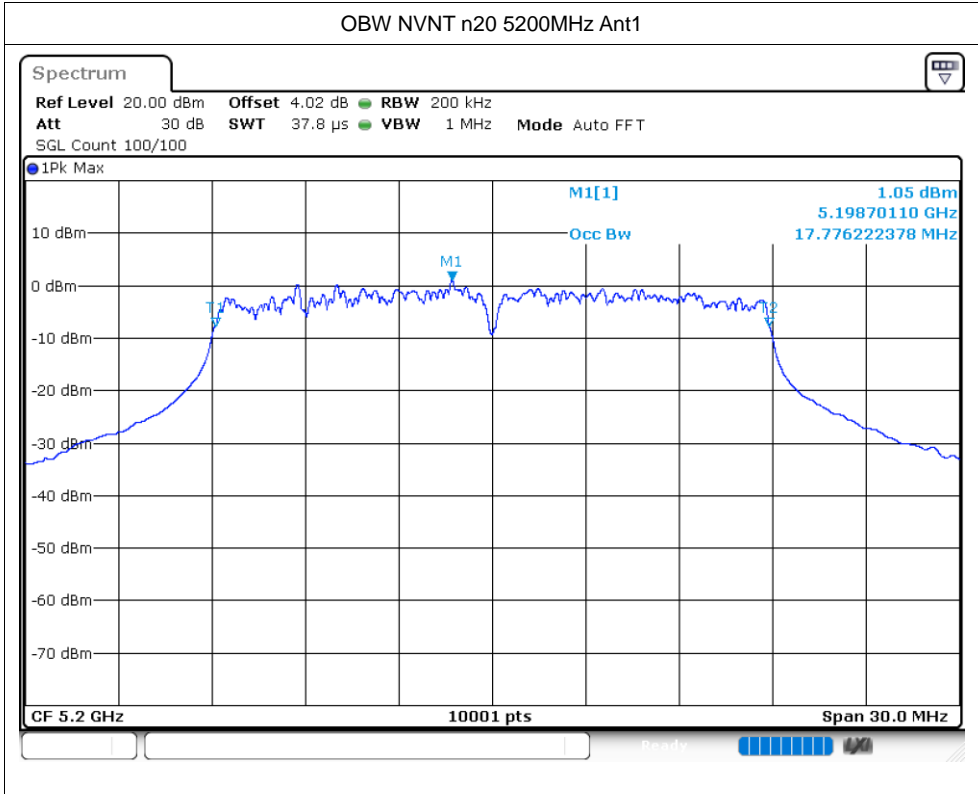


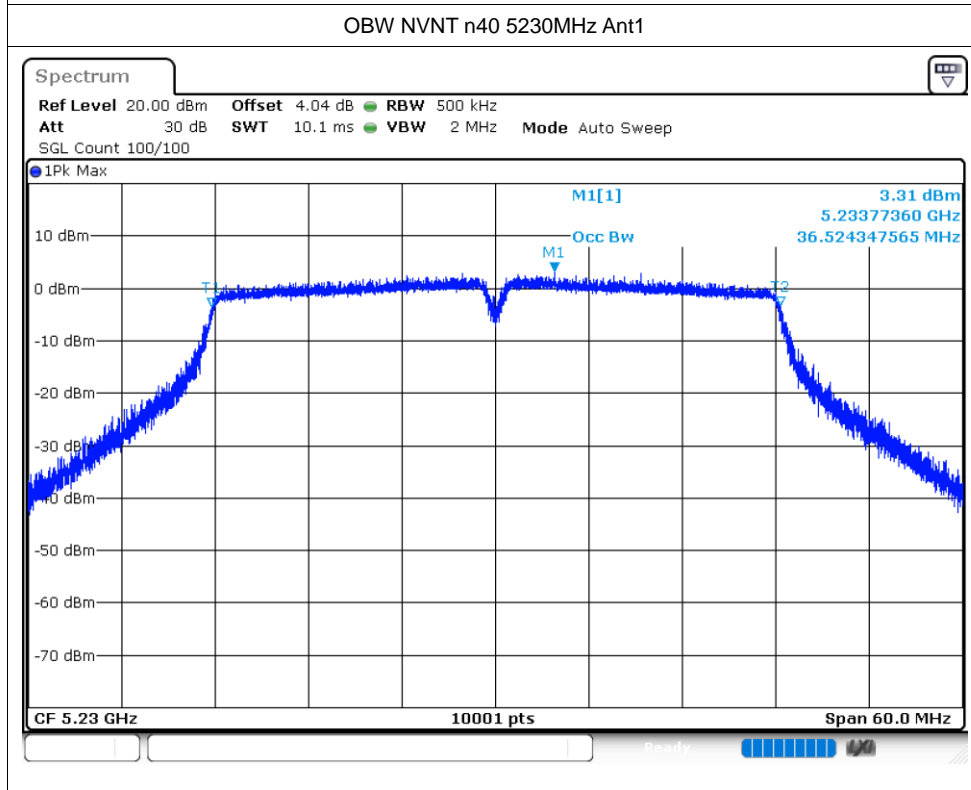
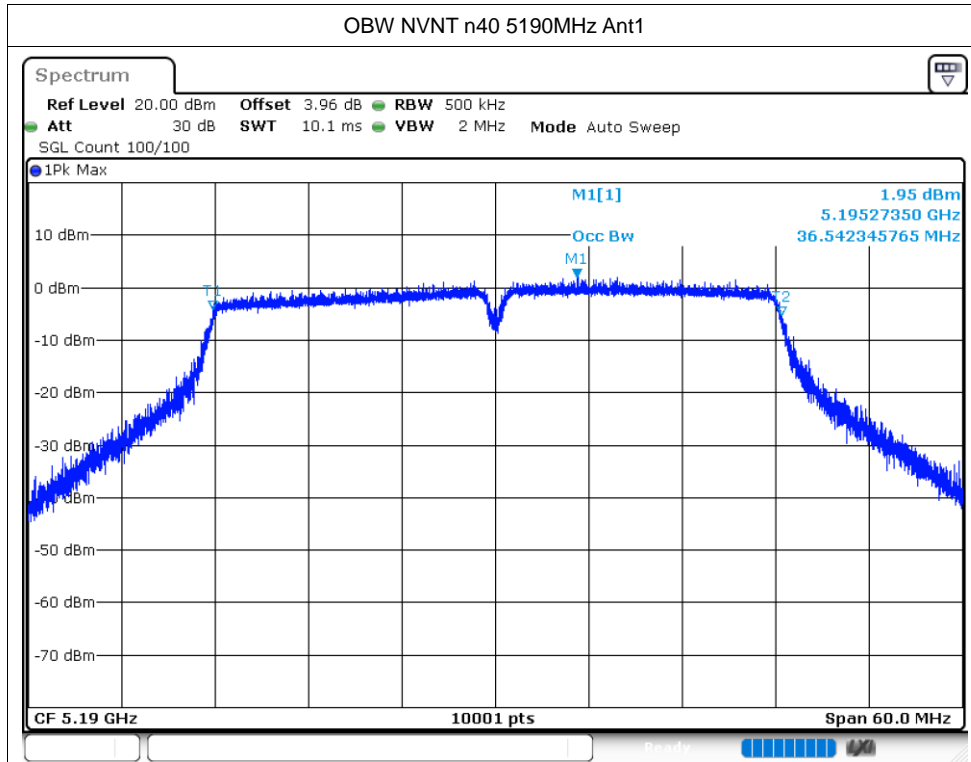


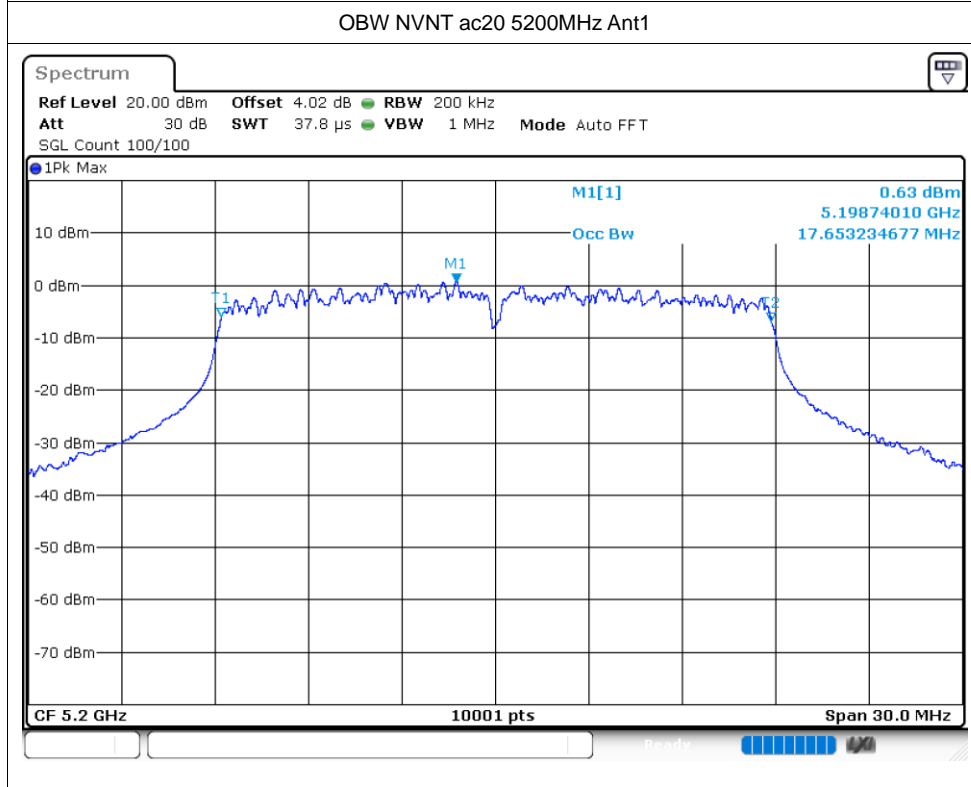
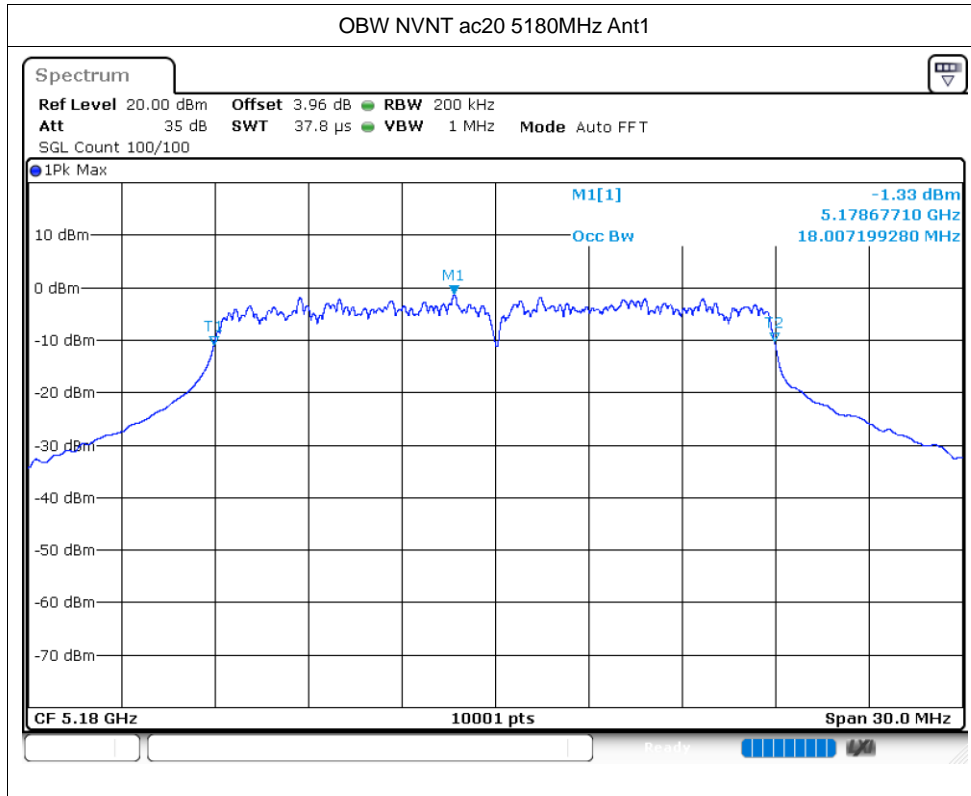


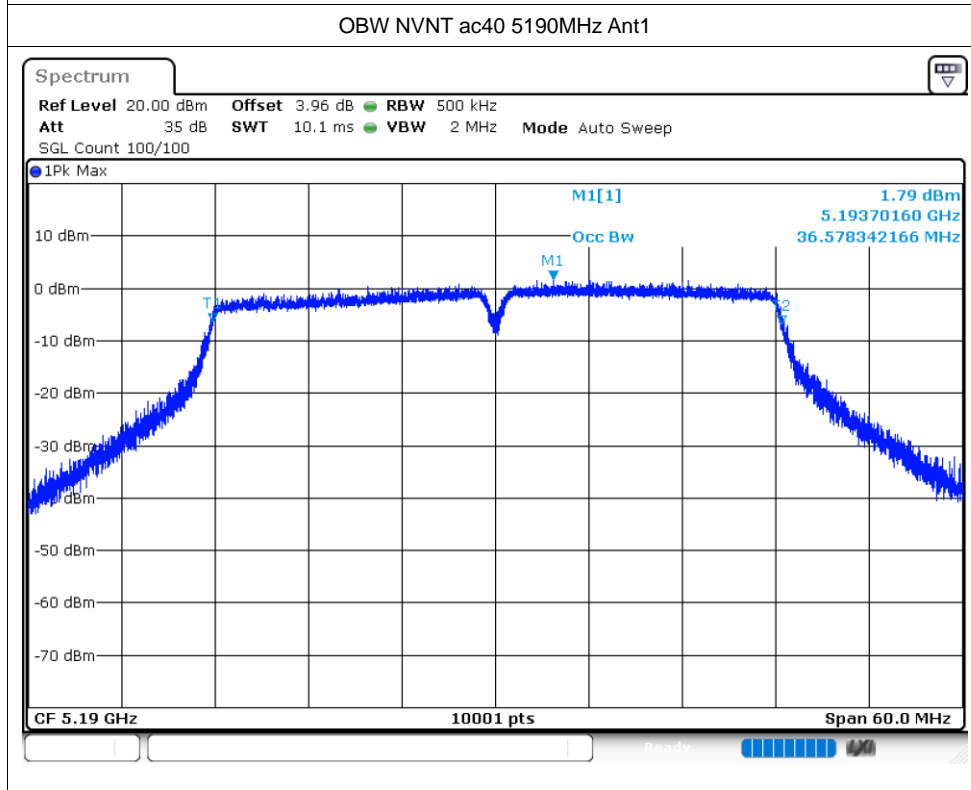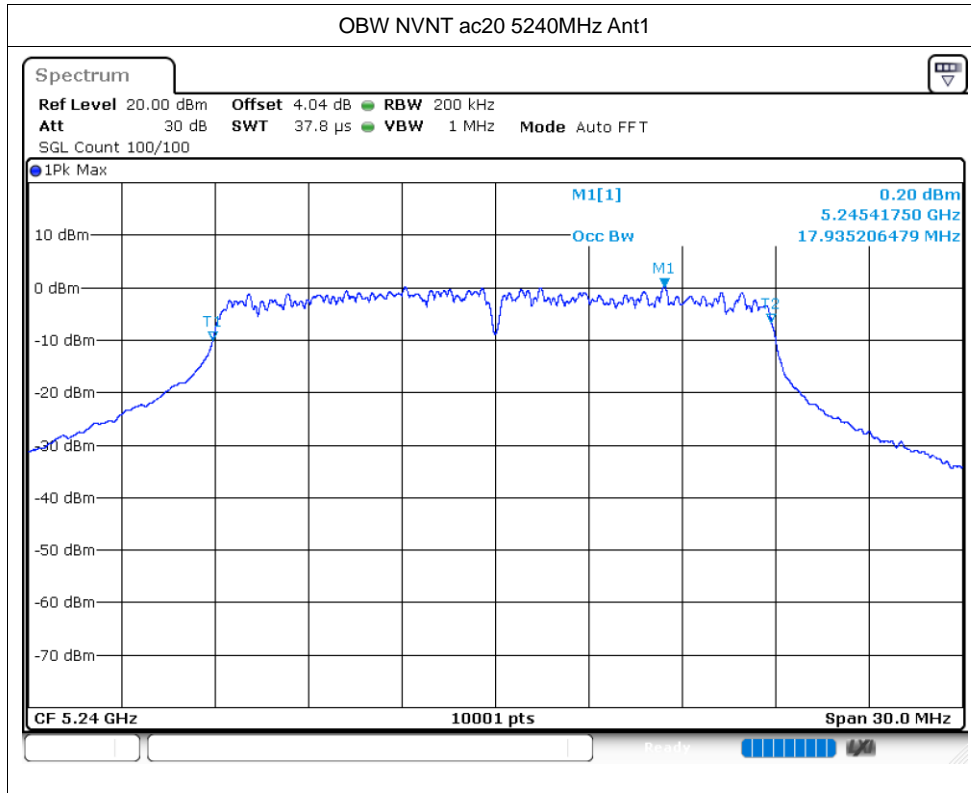

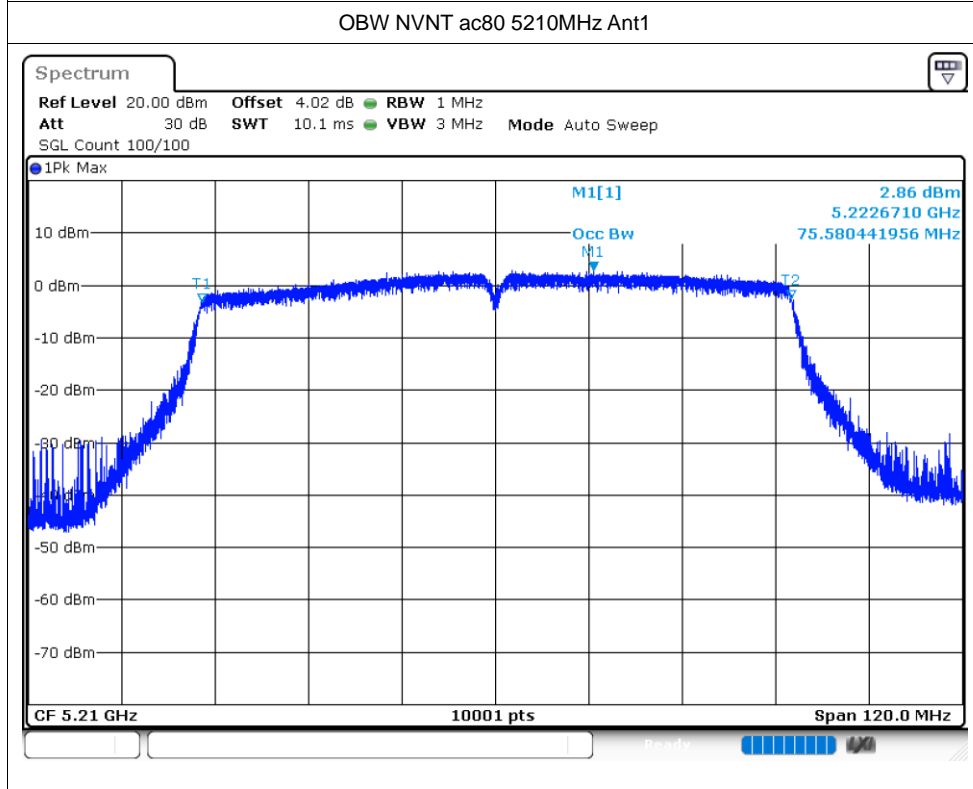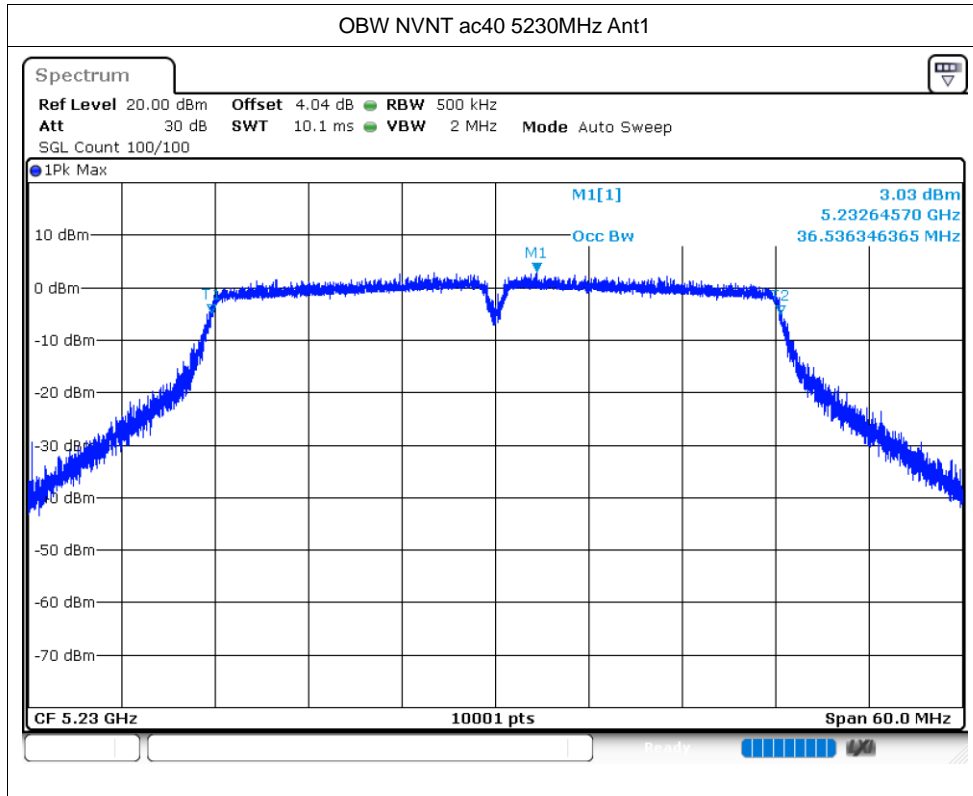

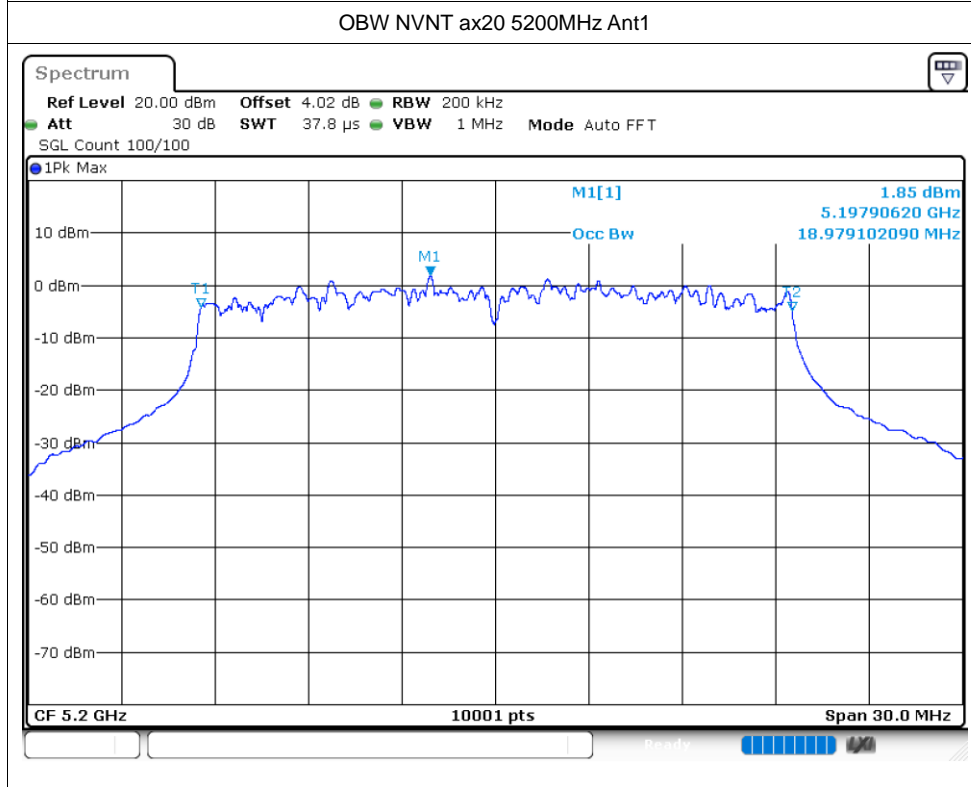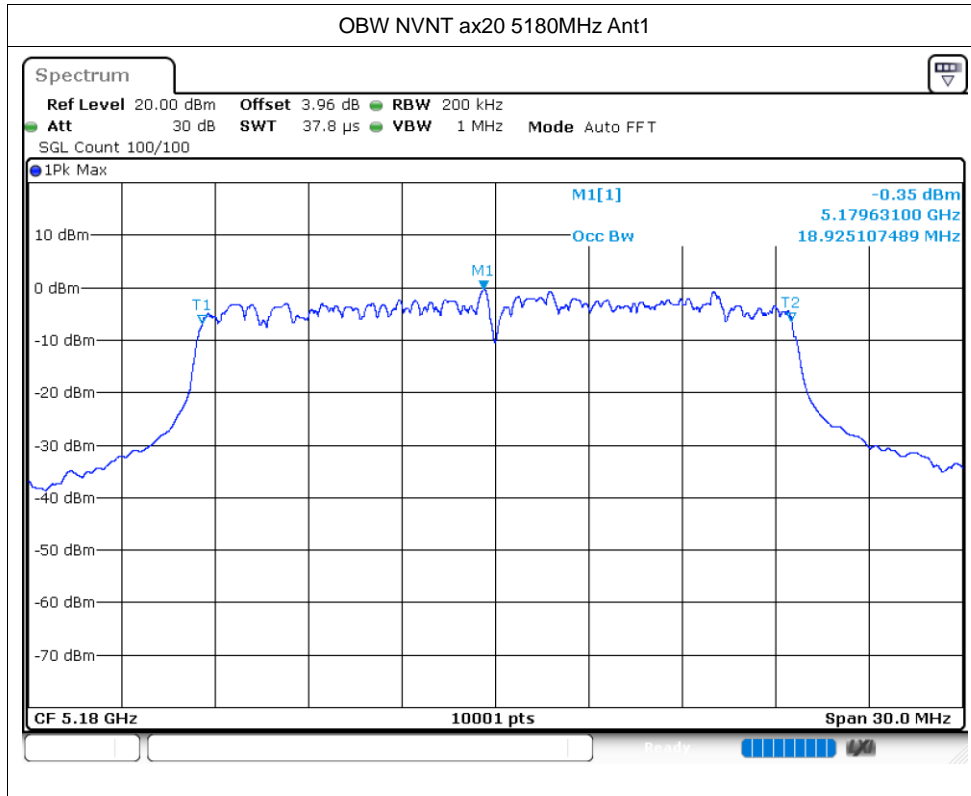

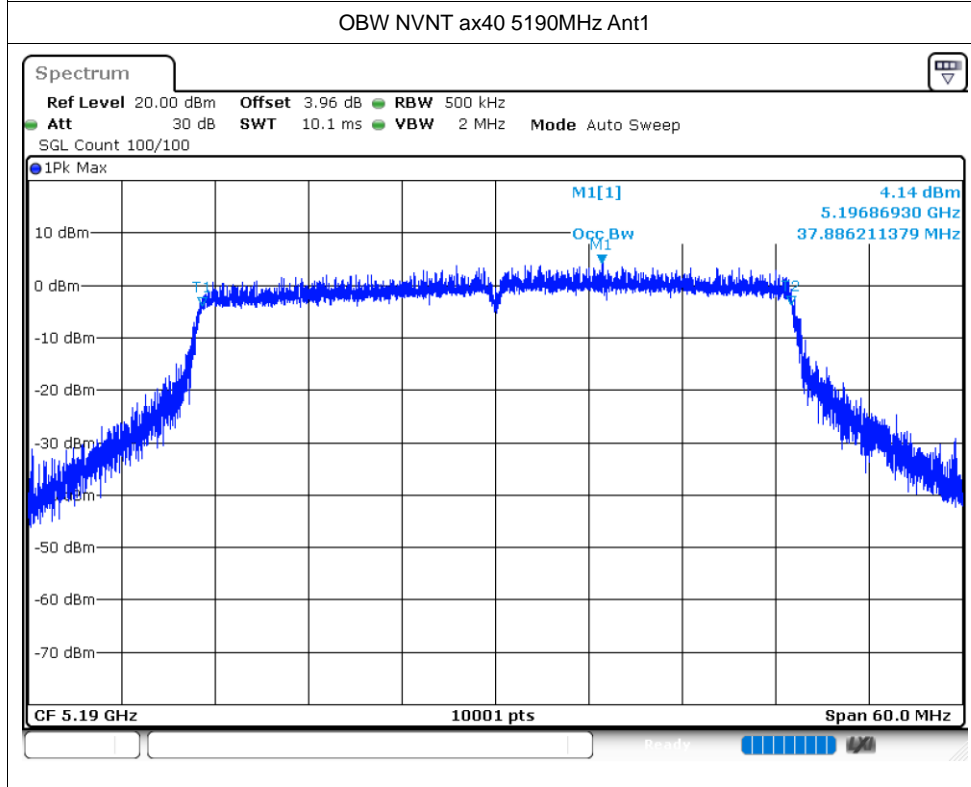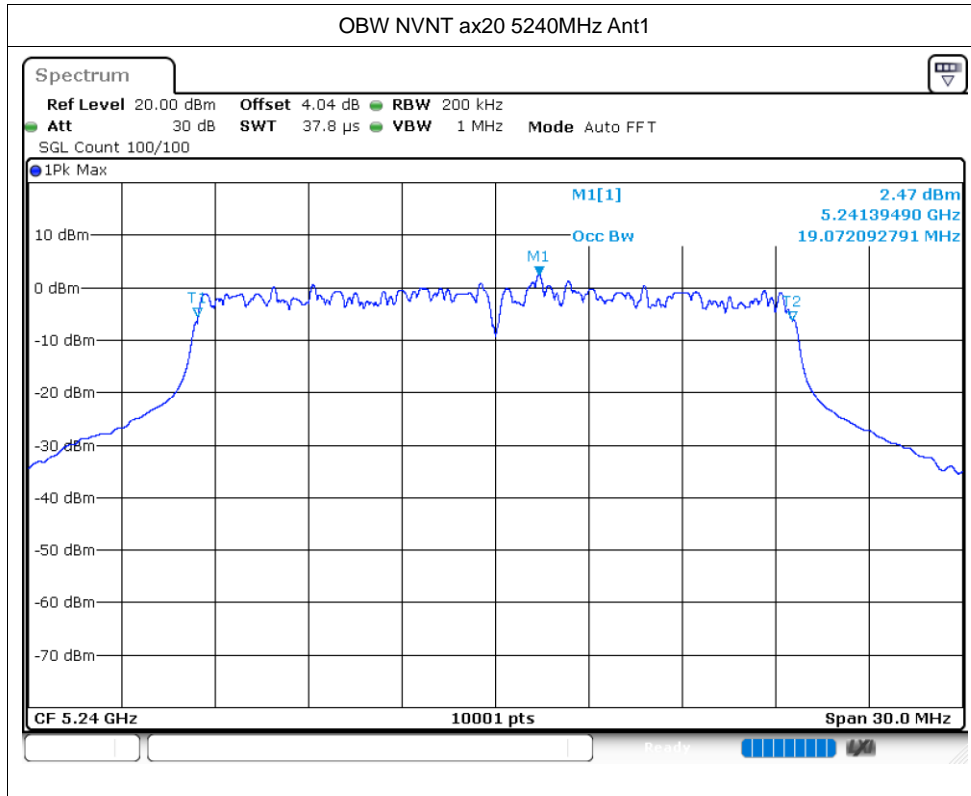

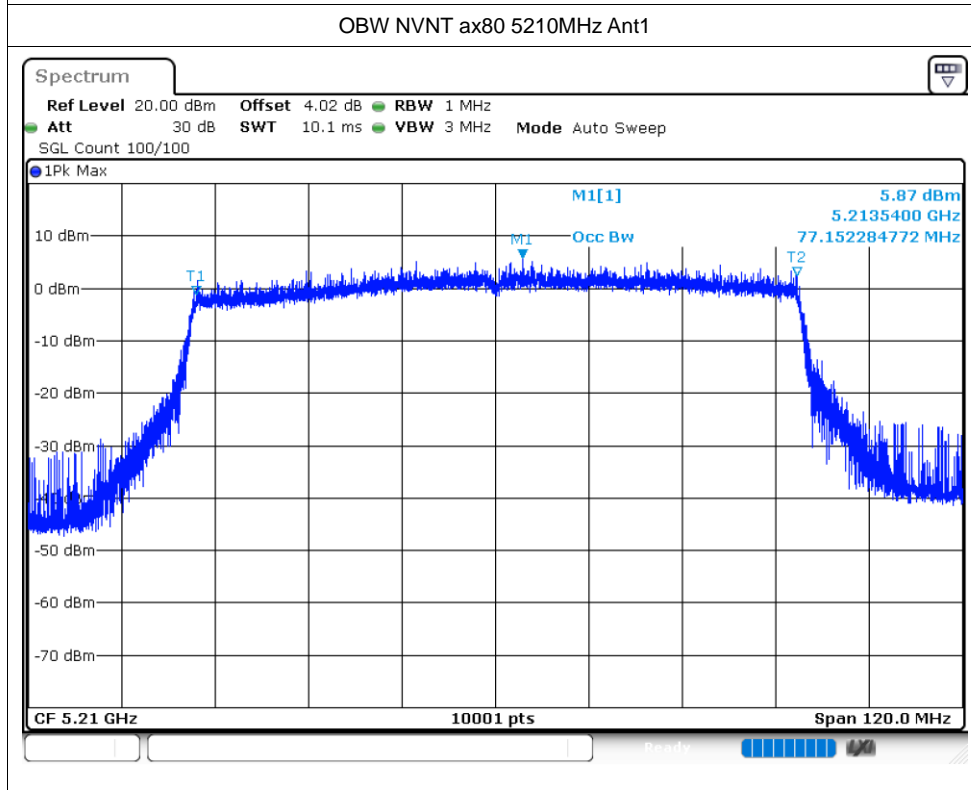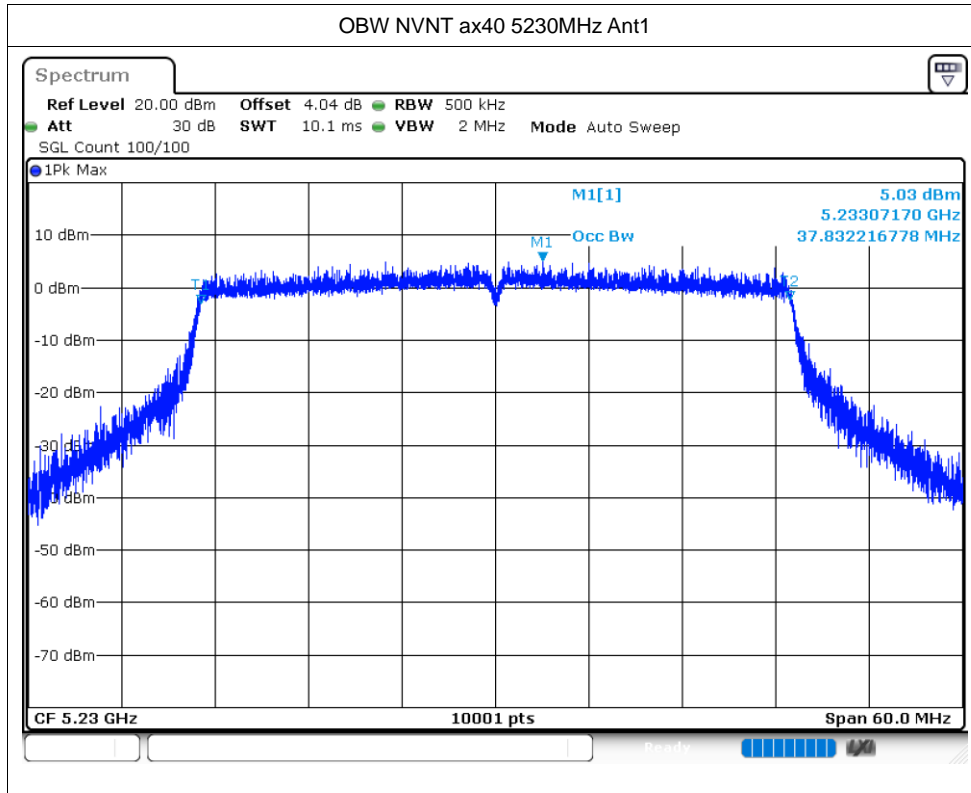

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	5.02	1.72	6.74	11	Pass
NVNT	a	5200	Ant1	4.21	1.76	5.97	11	Pass
NVNT	a	5240	Ant1	4.03	1.73	5.76	11	Pass
NVNT	n20	5180	Ant1	3.72	0.61	4.33	11	Pass
NVNT	n20	5200	Ant1	4.9	0.64	5.54	11	Pass
NVNT	n20	5240	Ant1	3.89	0.61	4.5	11	Pass
NVNT	n40	5190	Ant1	2.55	1.15	3.7	11	Pass
NVNT	n40	5230	Ant1	4.05	1.15	5.2	11	Pass
NVNT	ac20	5180	Ant1	4.32	1.84	6.16	11	Pass
NVNT	ac20	5200	Ant1	2.78	1.84	4.62	11	Pass
NVNT	ac20	5240	Ant1	4.03	1.82	5.85	11	Pass
NVNT	ac40	5190	Ant1	2.35	1.13	3.48	11	Pass
NVNT	ac40	5230	Ant1	3.85	1.18	5.03	11	Pass
NVNT	ac80	5210	Ant1	2.44	1.22	3.66	11	Pass
NVNT	ax20	5180	Ant1	4.38	1.12	5.5	11	Pass
NVNT	ax20	5200	Ant1	5.31	1.14	6.45	11	Pass
NVNT	ax20	5240	Ant1	5.96	1.12	7.08	11	Pass
NVNT	ax40	5190	Ant1	3.51	1.47	4.98	11	Pass
NVNT	ax40	5230	Ant1	4.65	1.42	6.07	11	Pass
NVNT	ax80	5210	Ant1	2.54	1.48	4.02	11	Pass

