




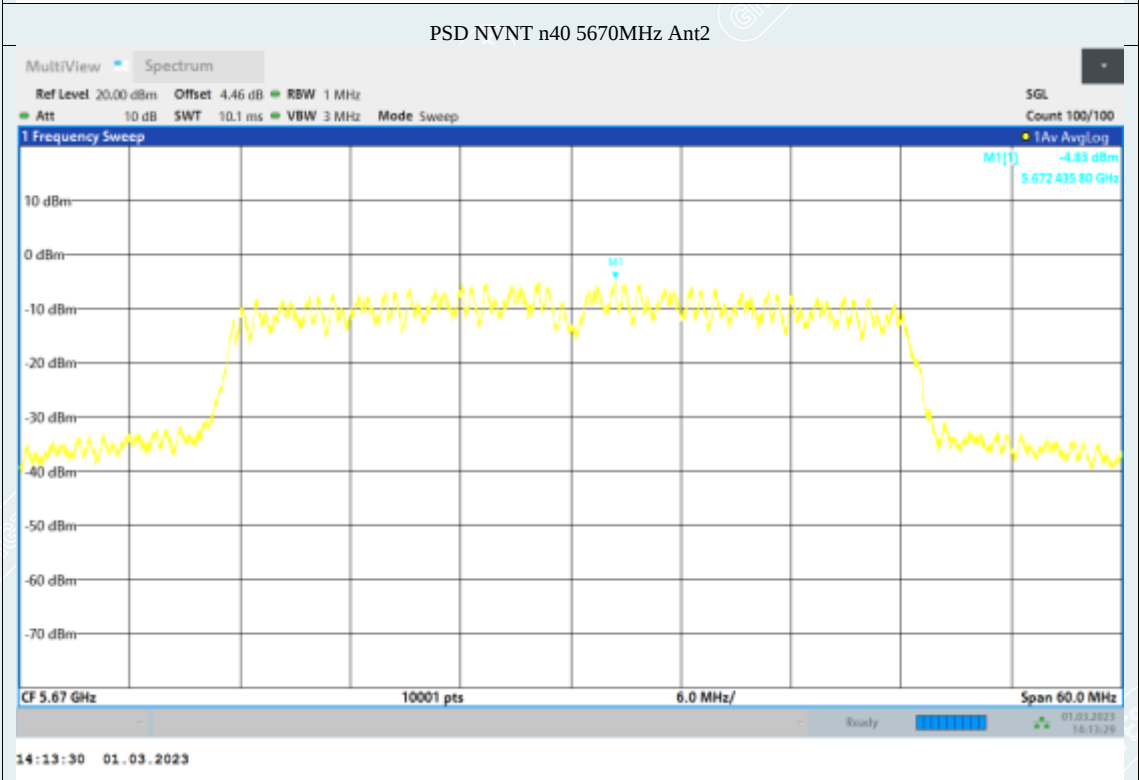
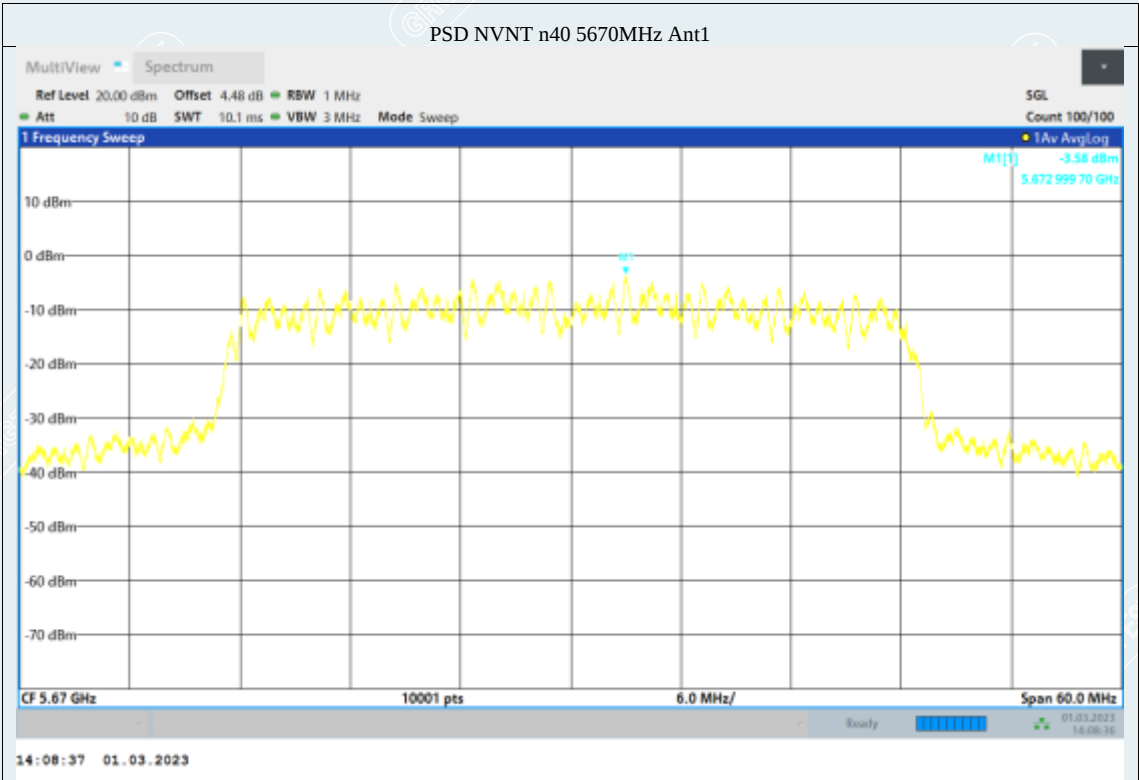
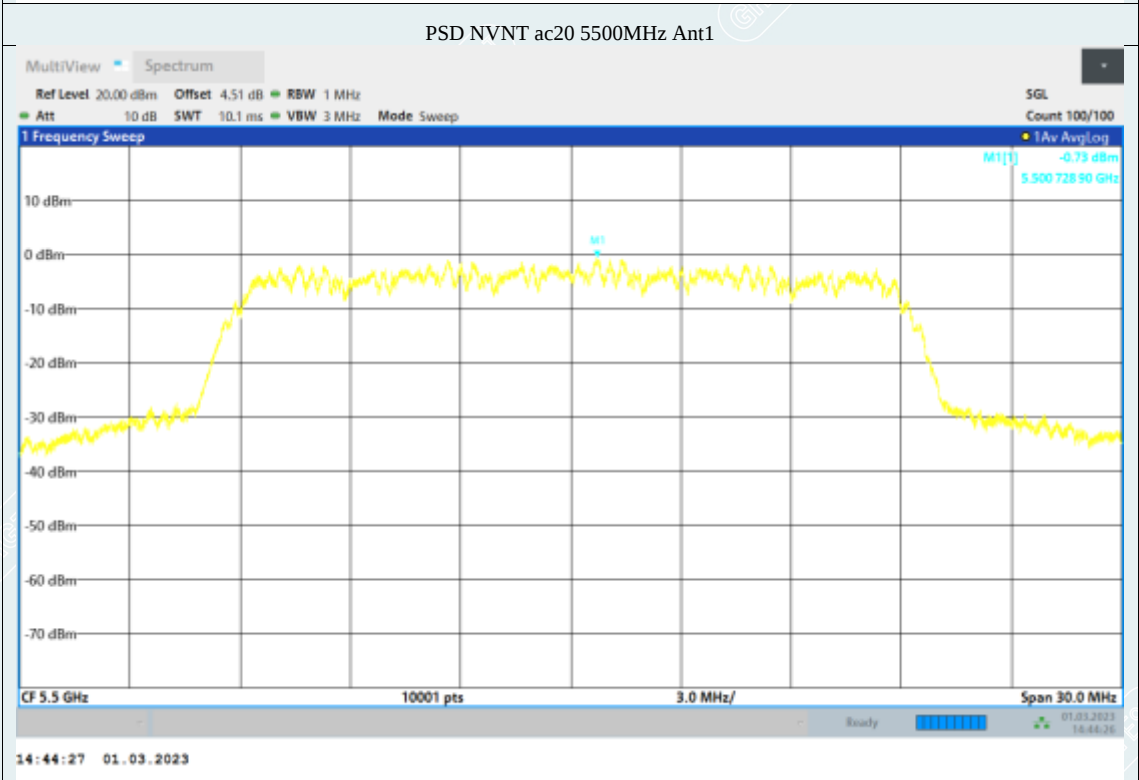
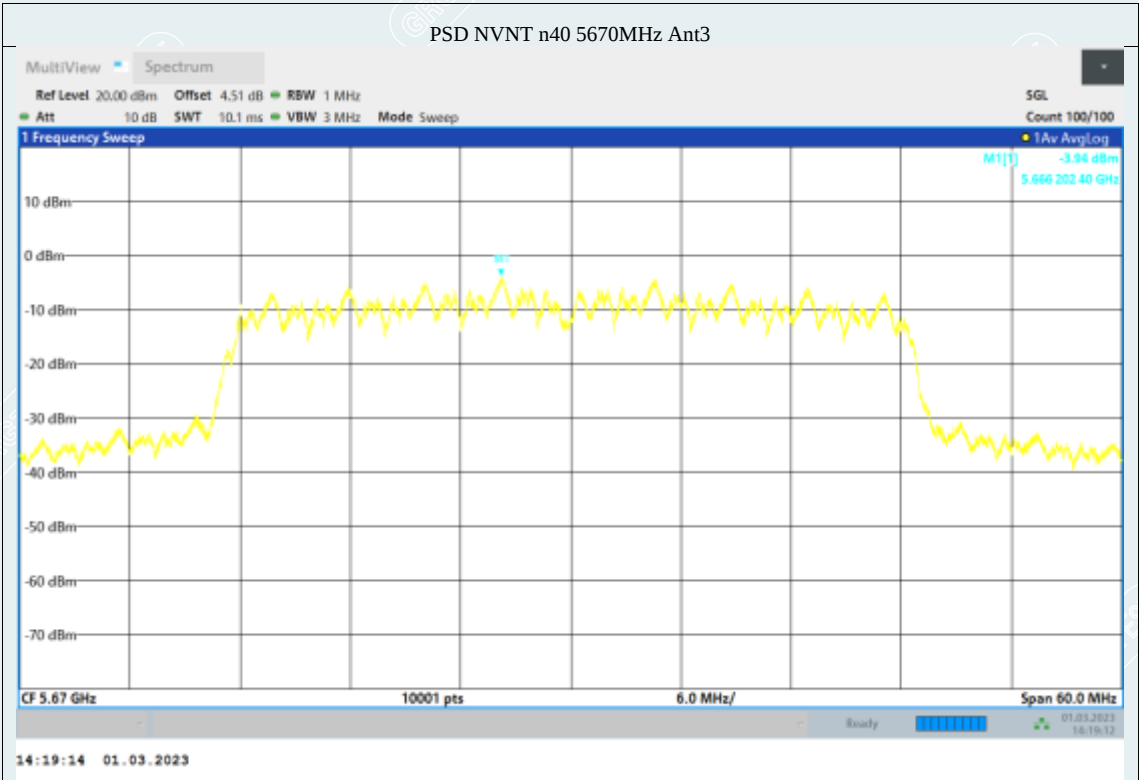
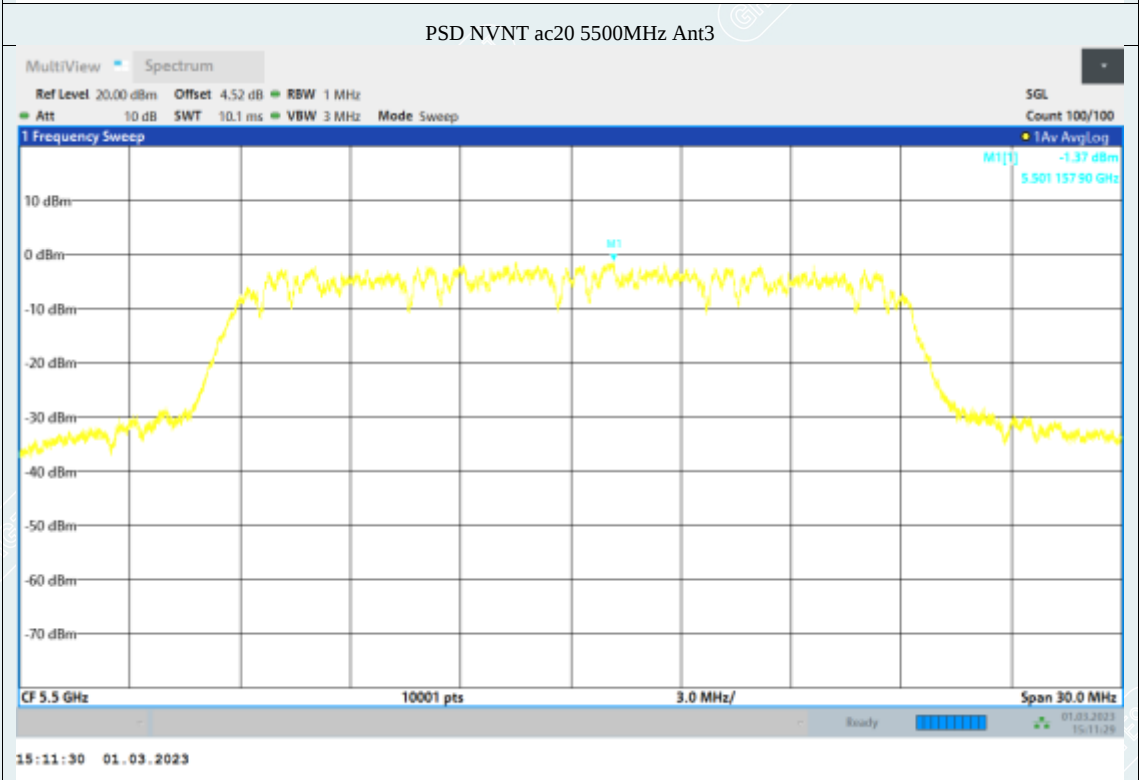



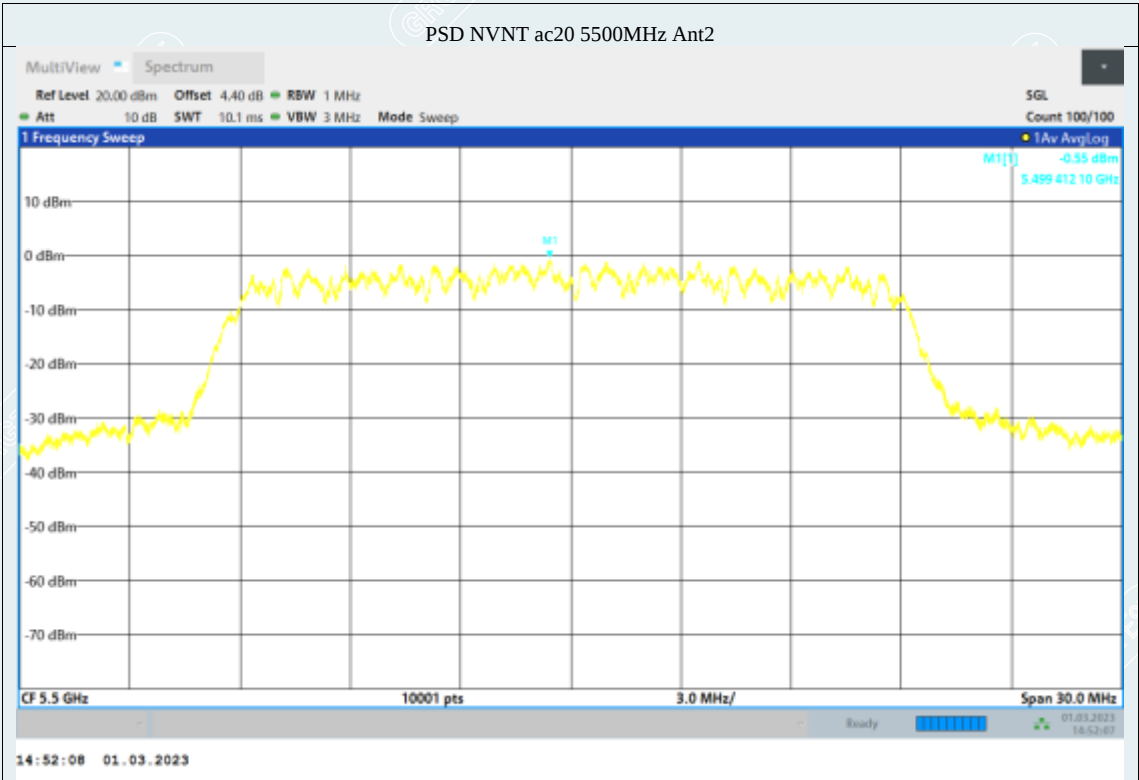



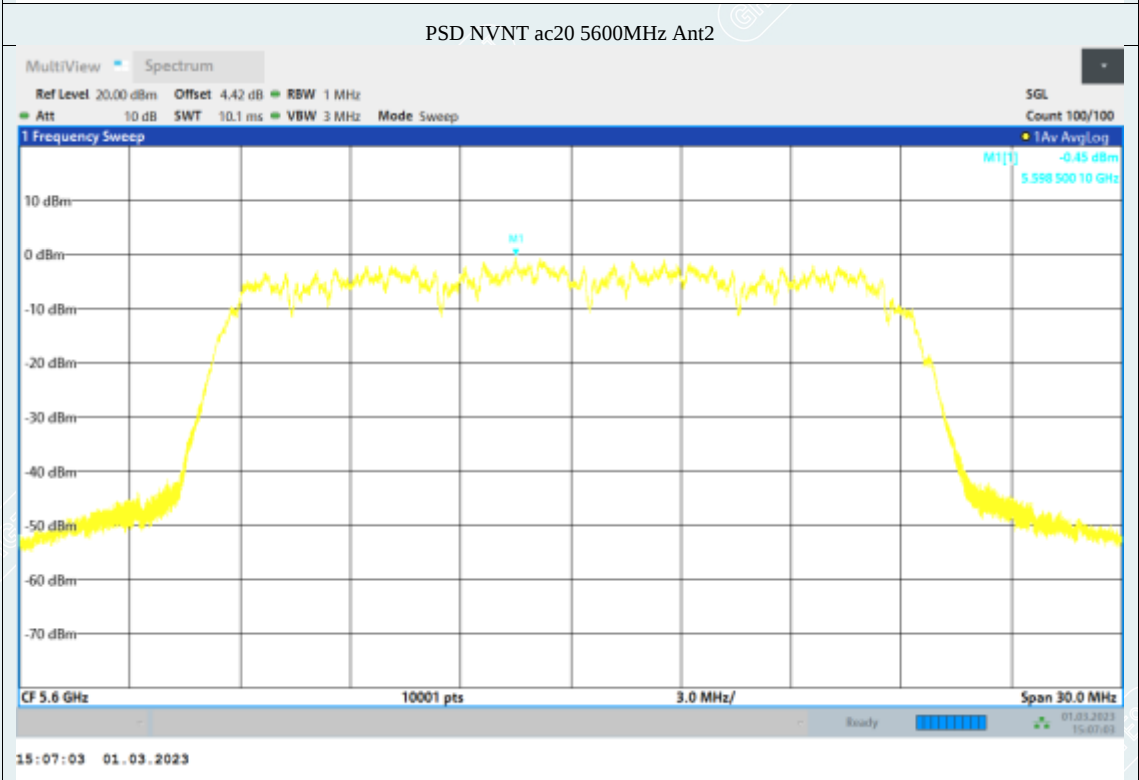



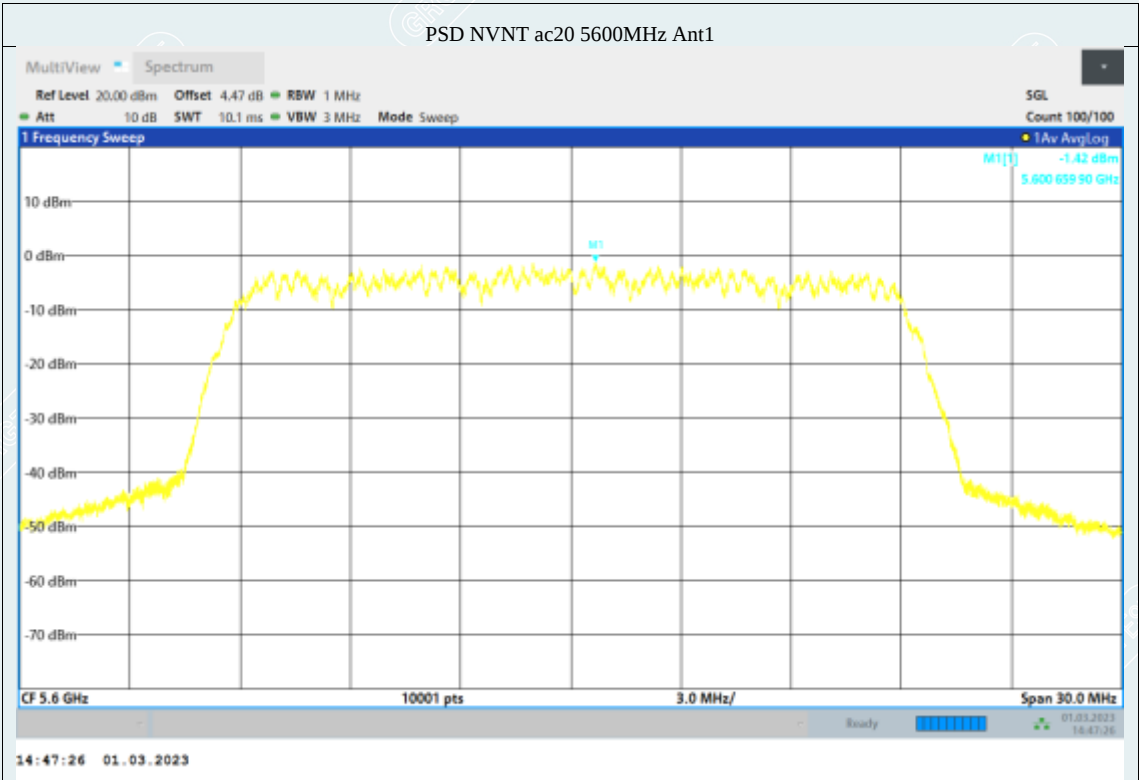



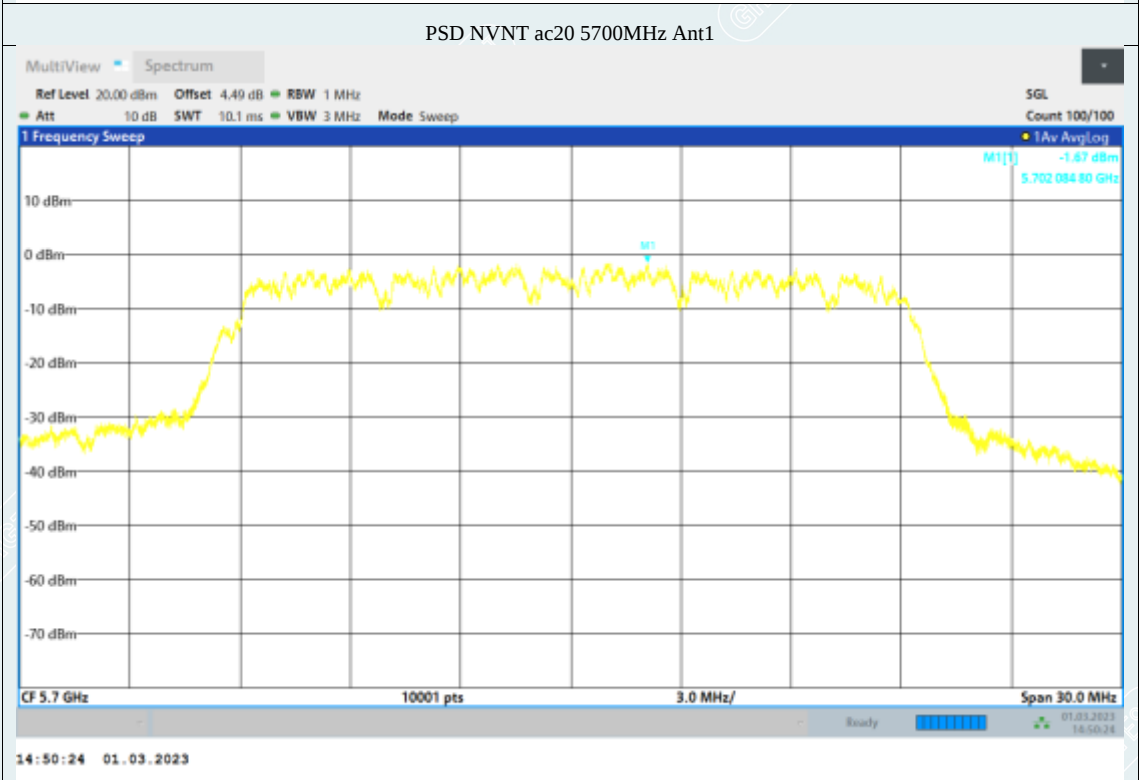



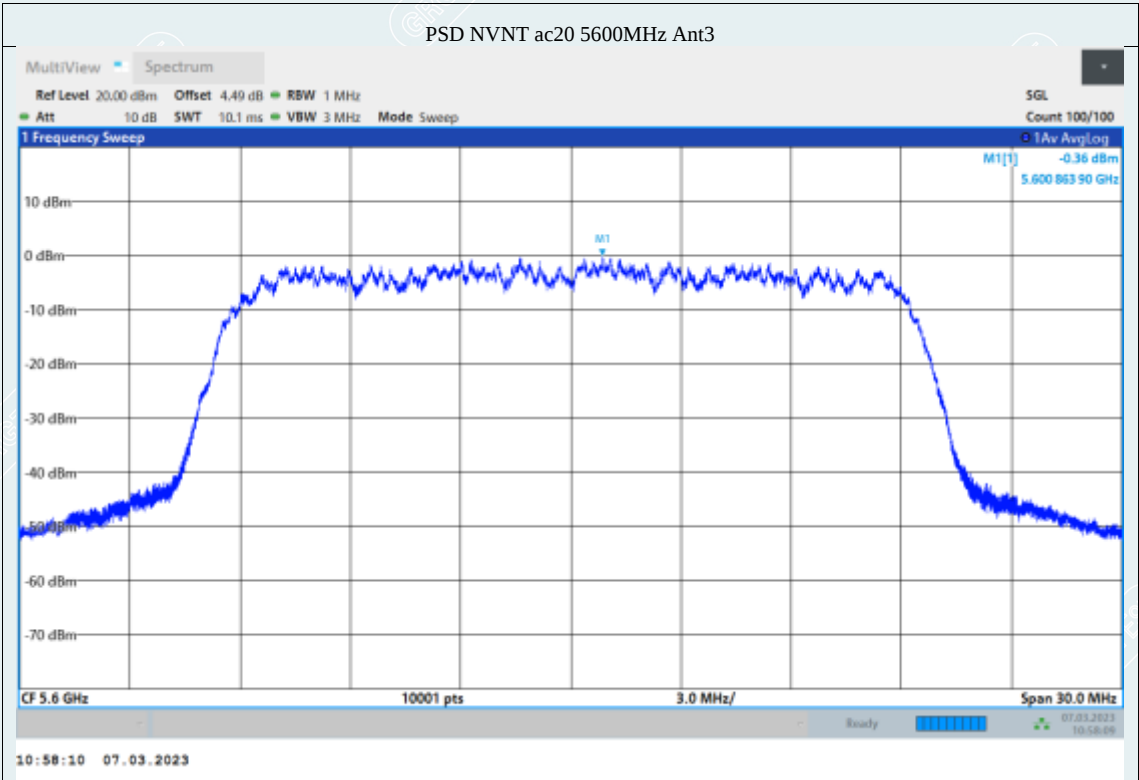


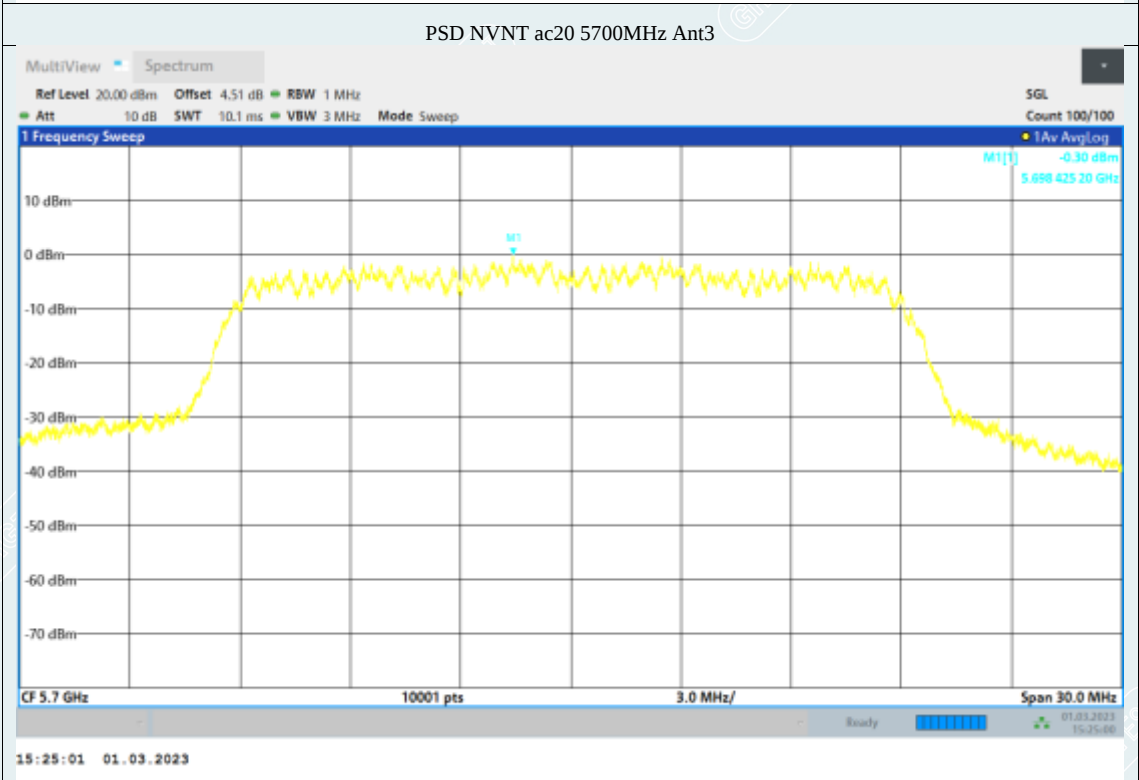
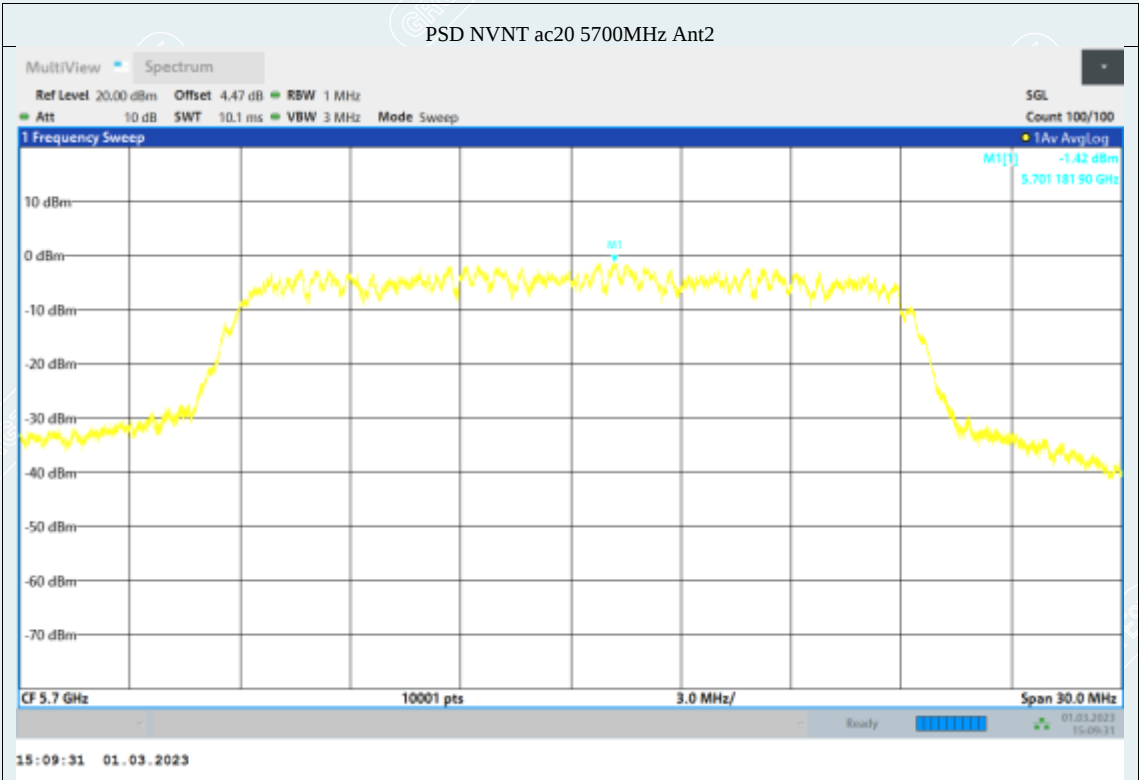


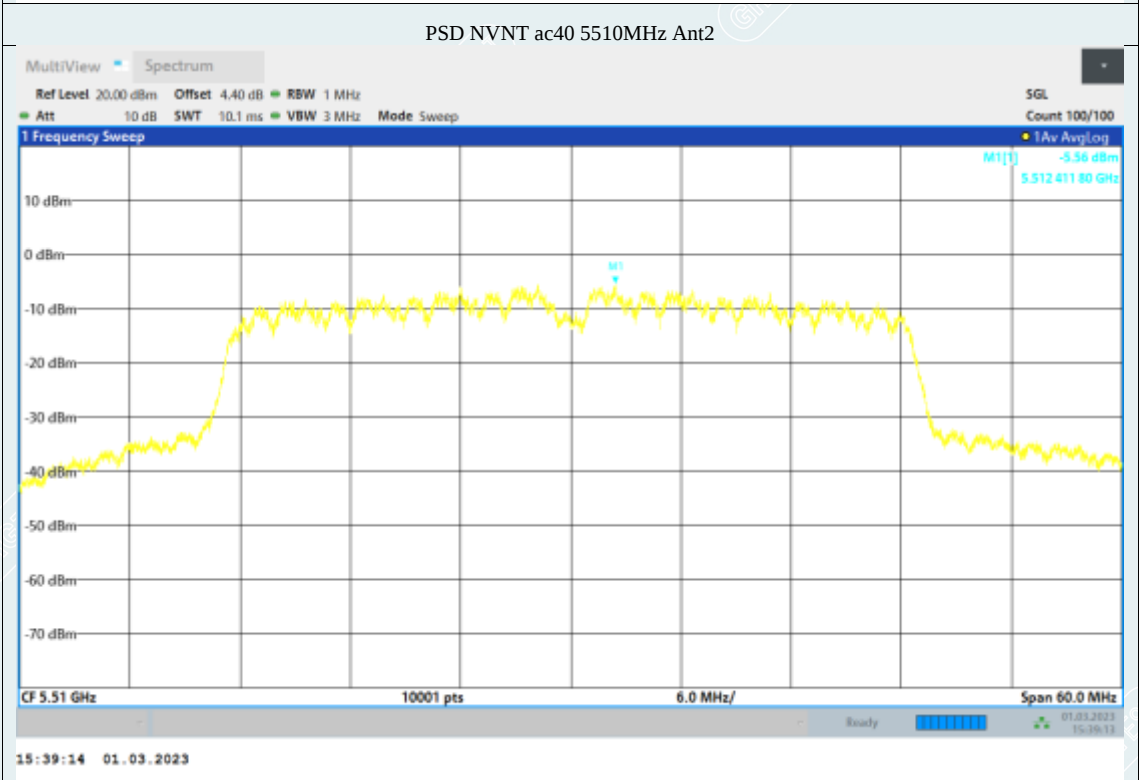
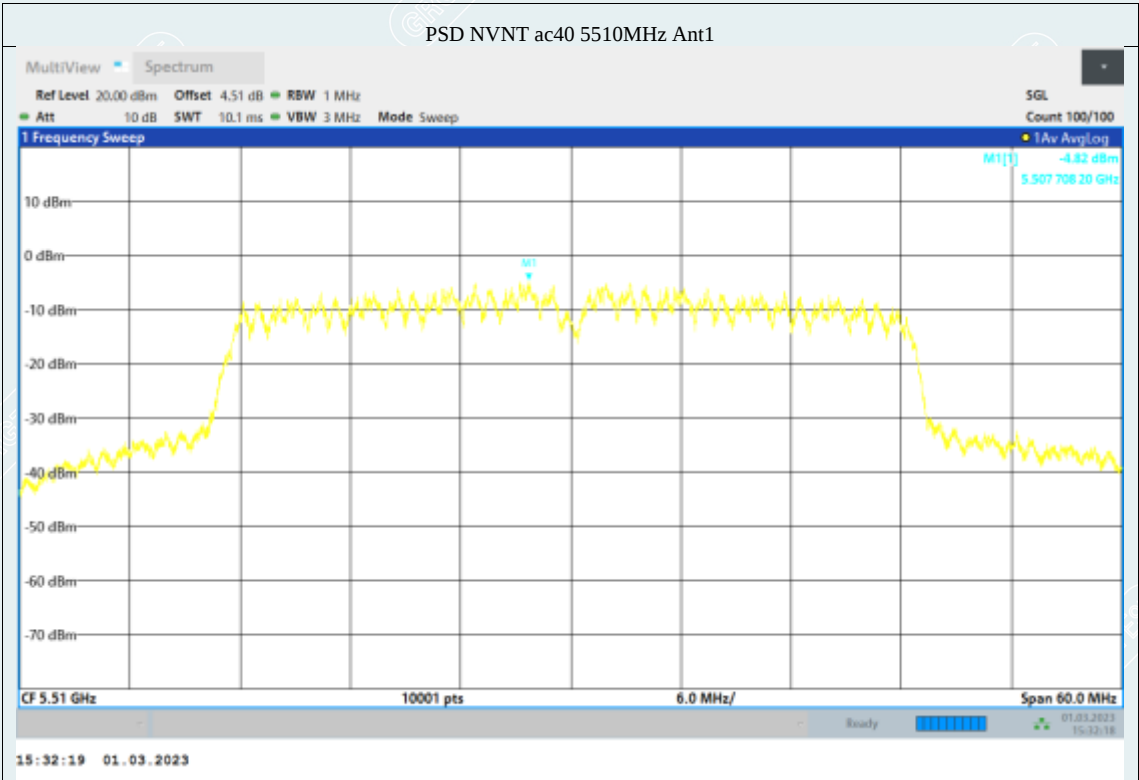


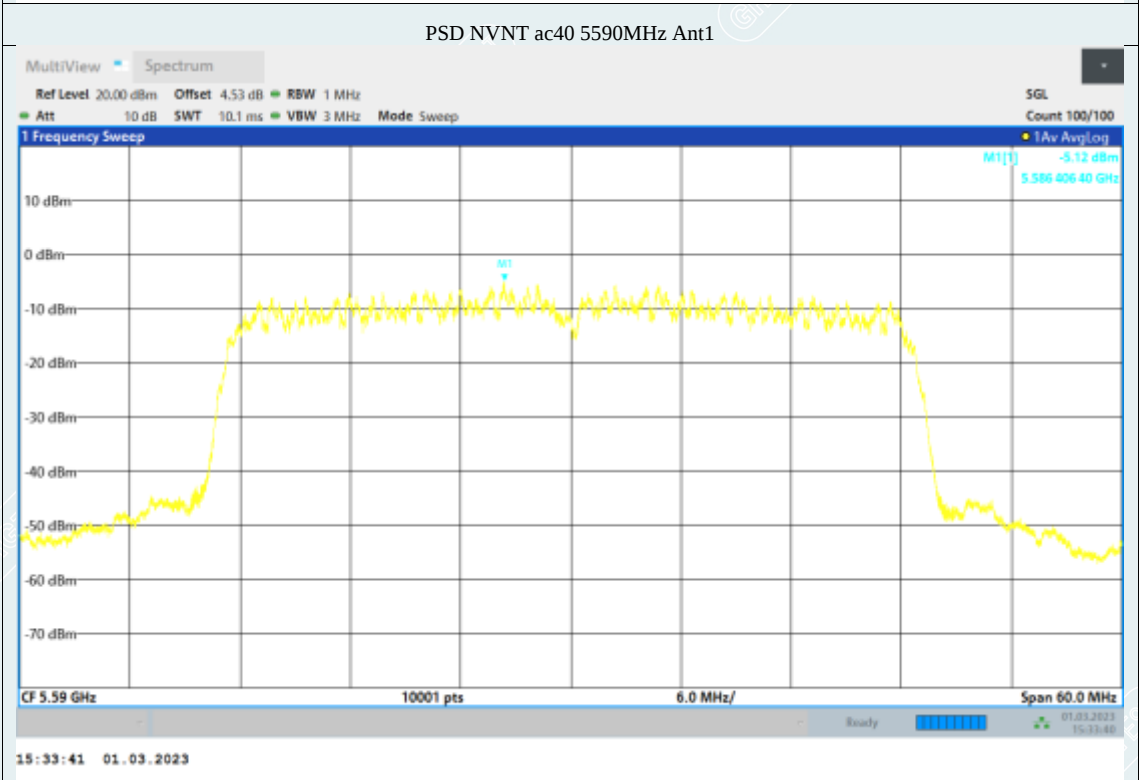
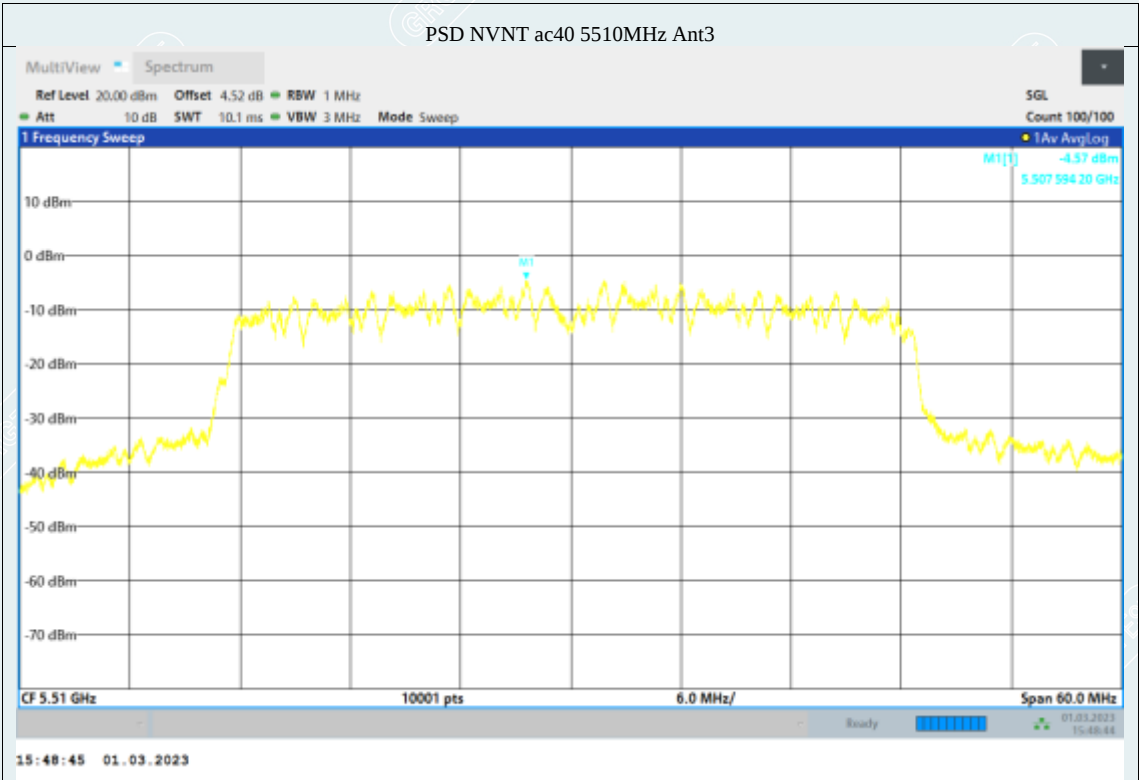


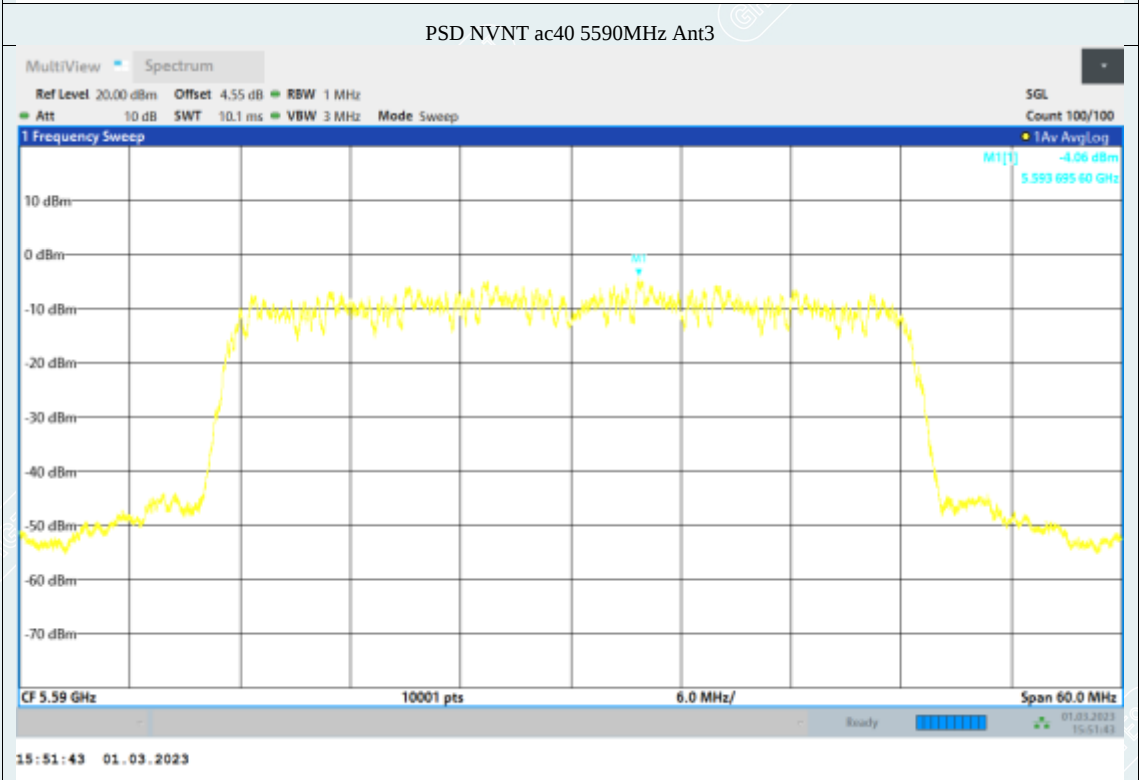
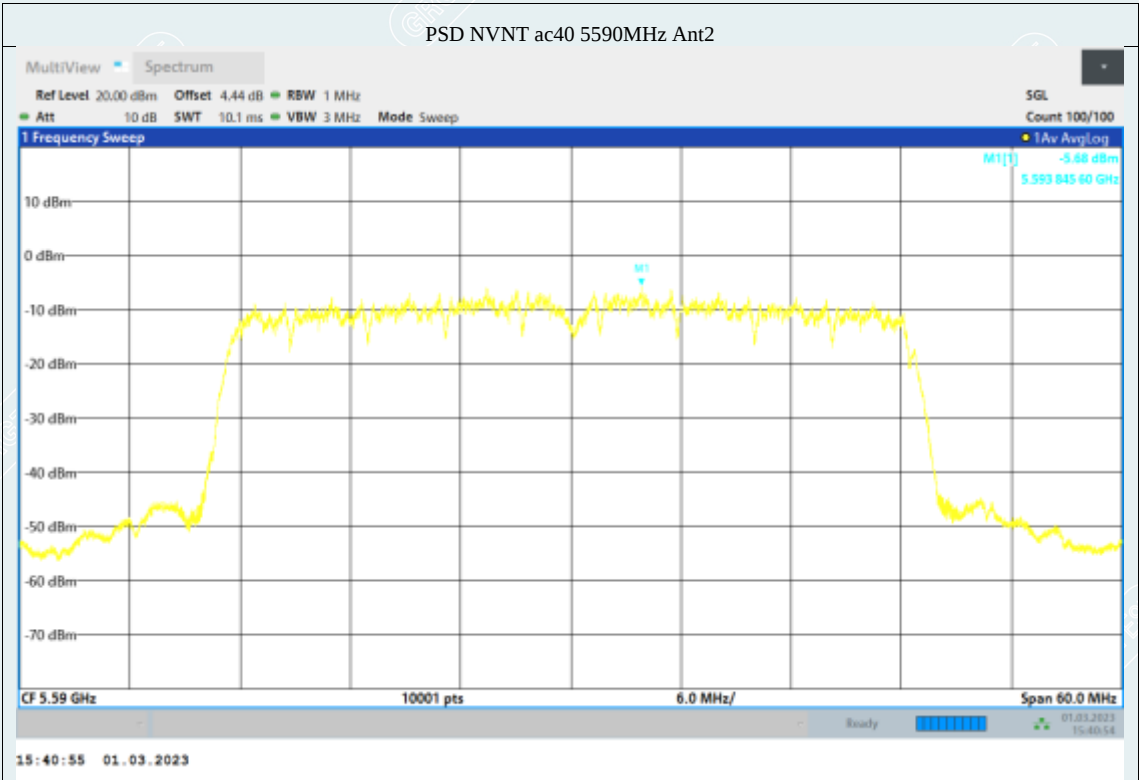


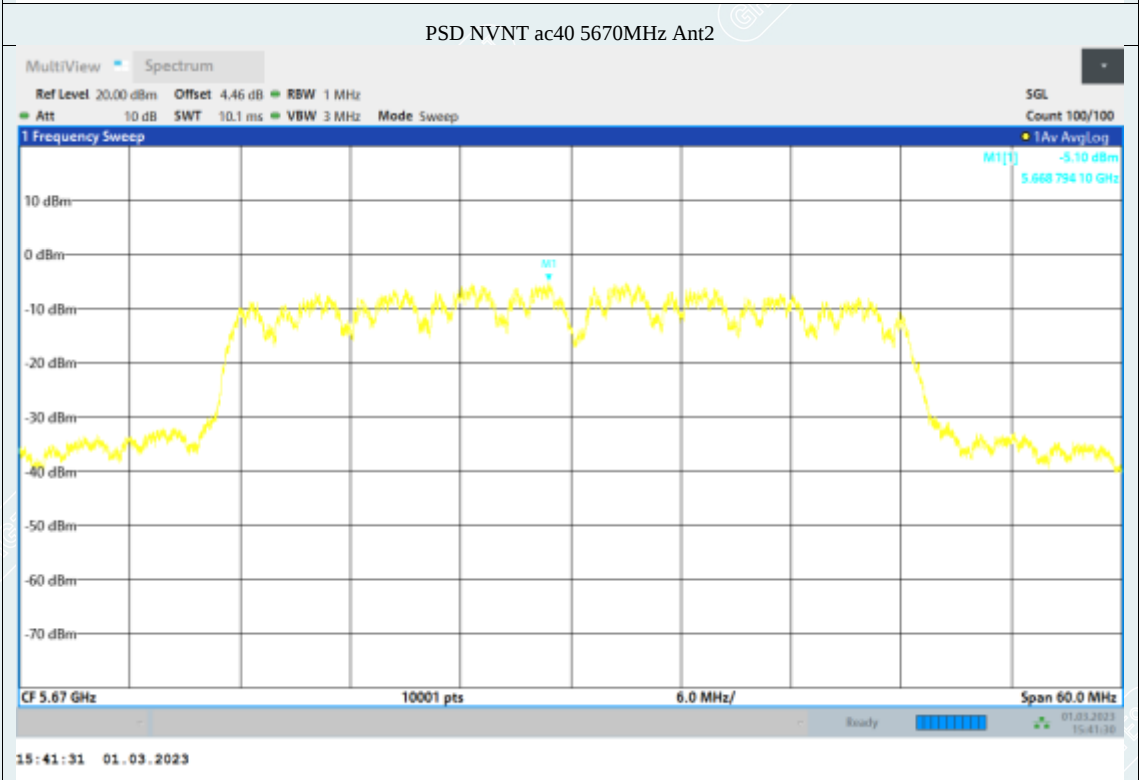
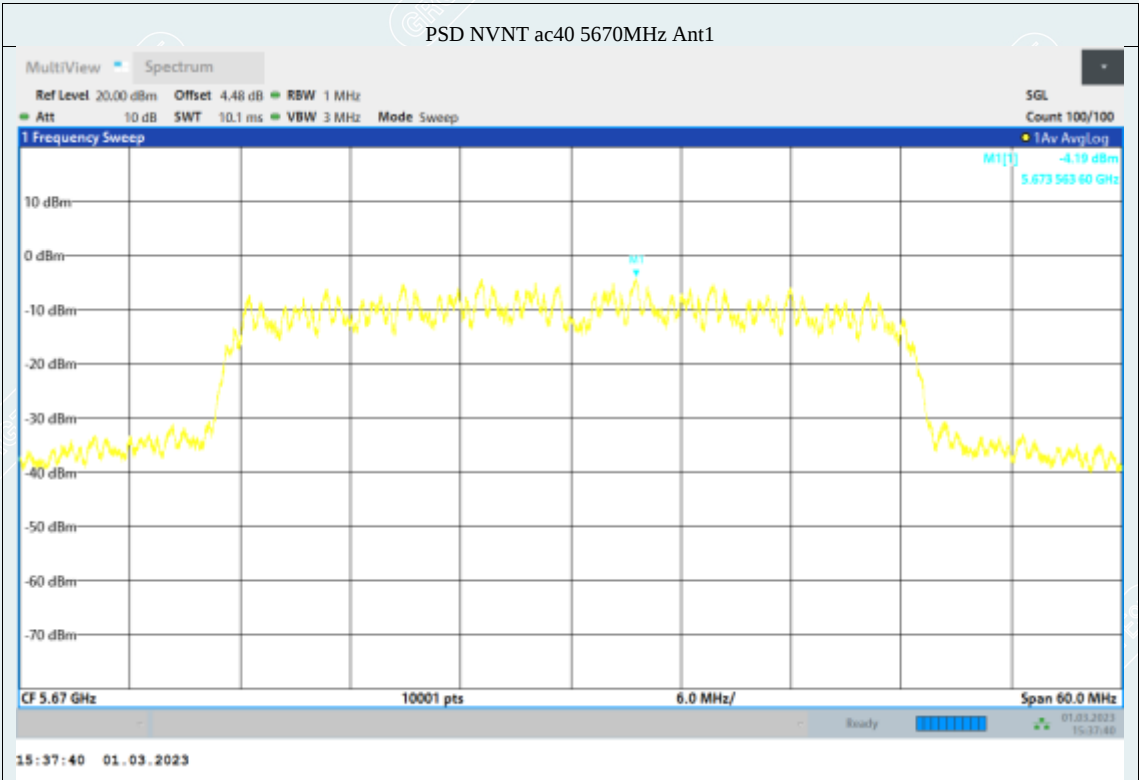


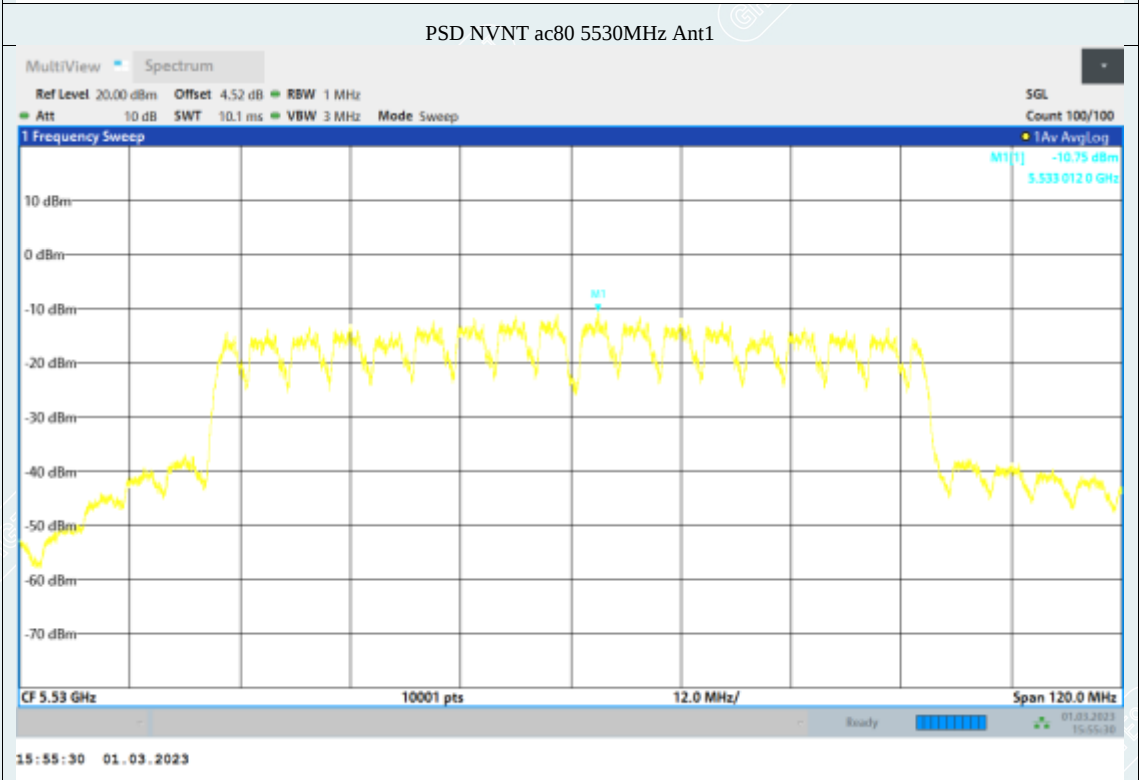
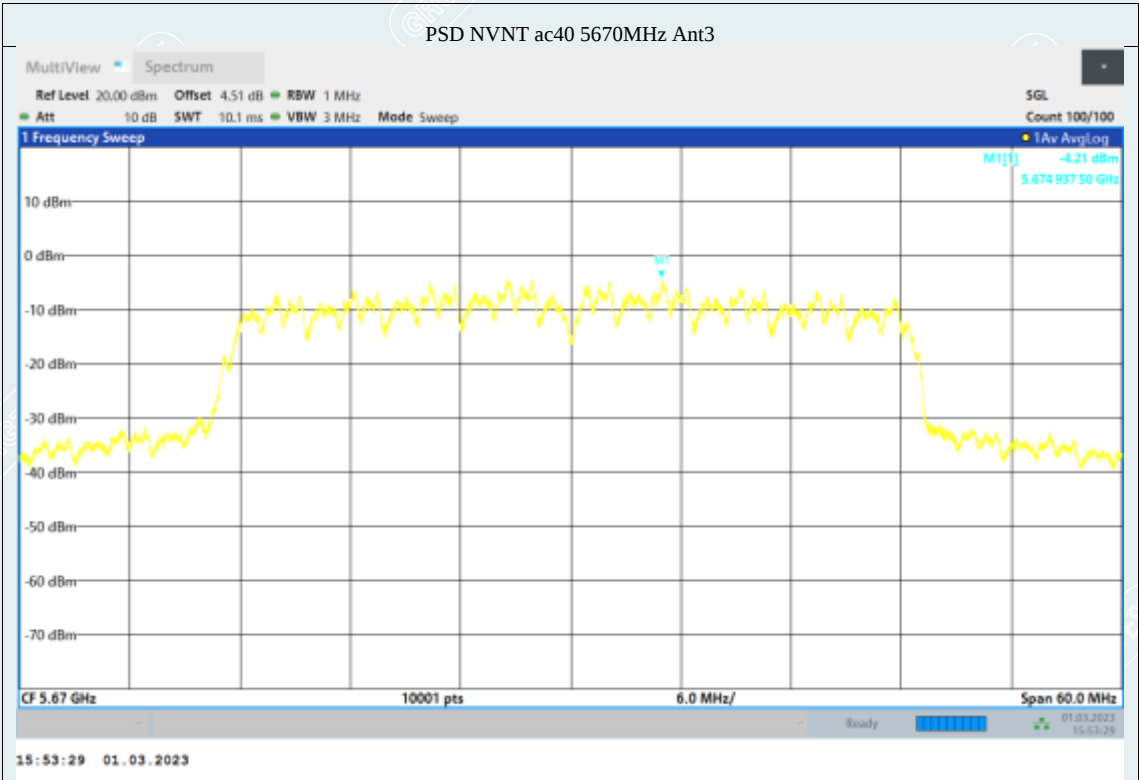


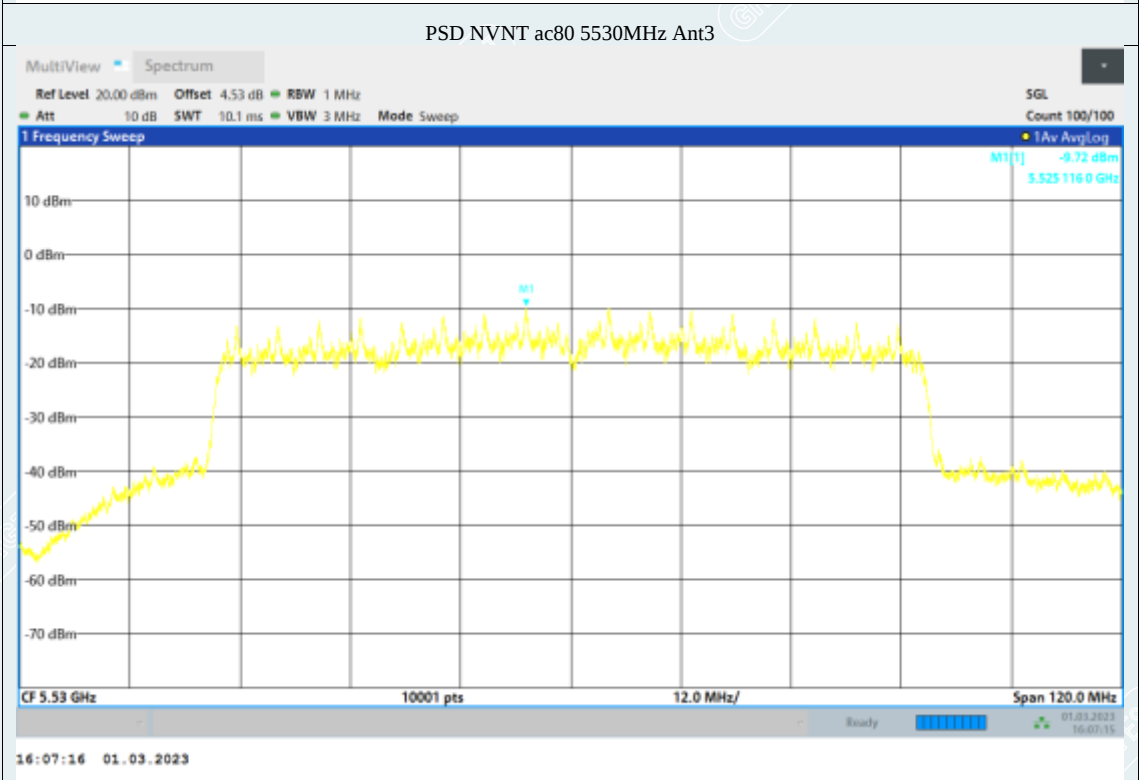
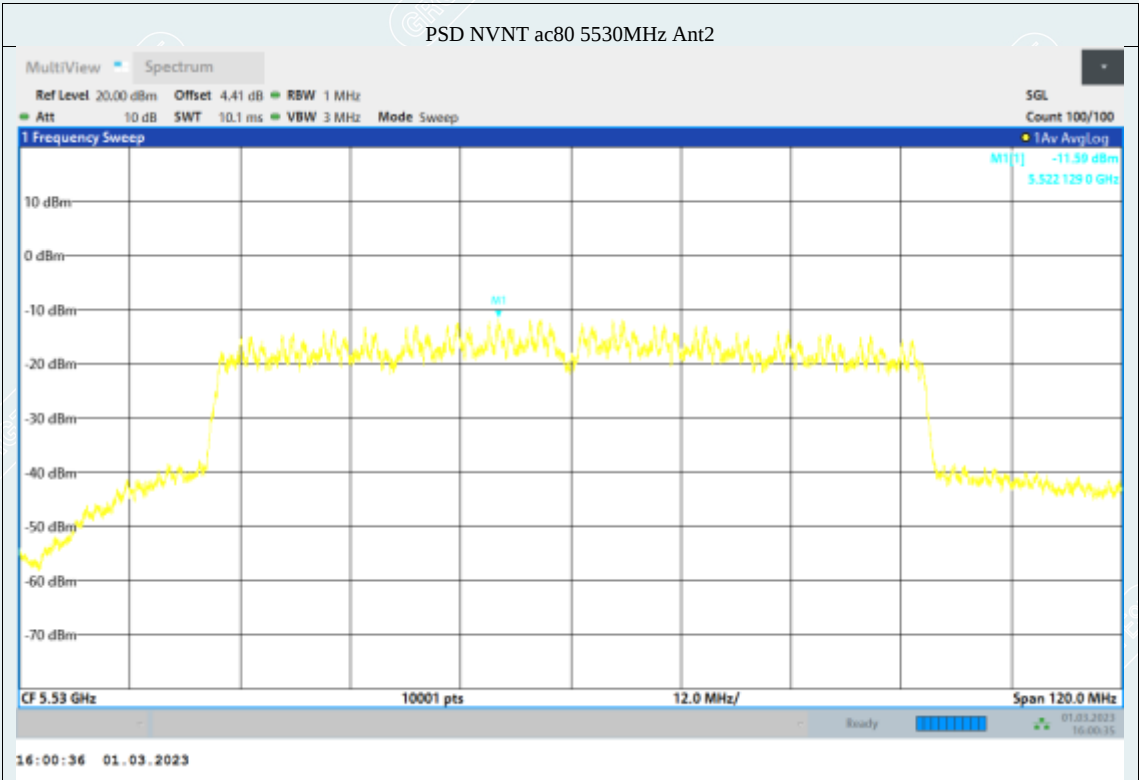


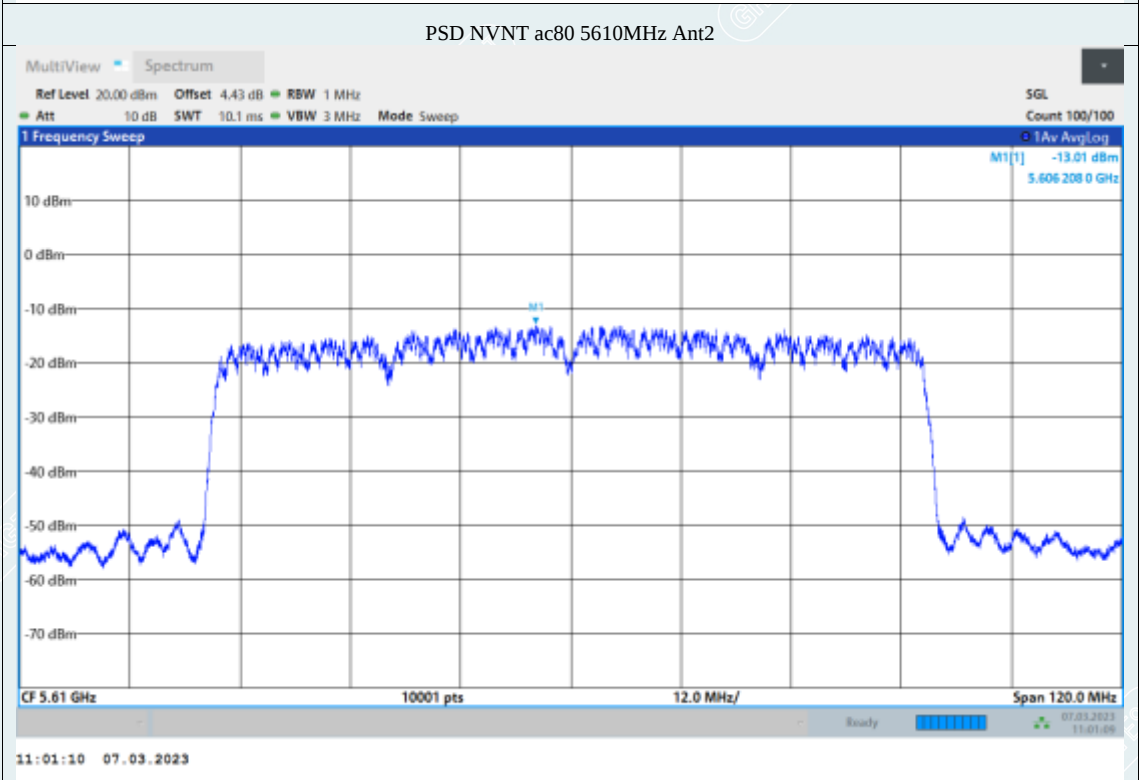
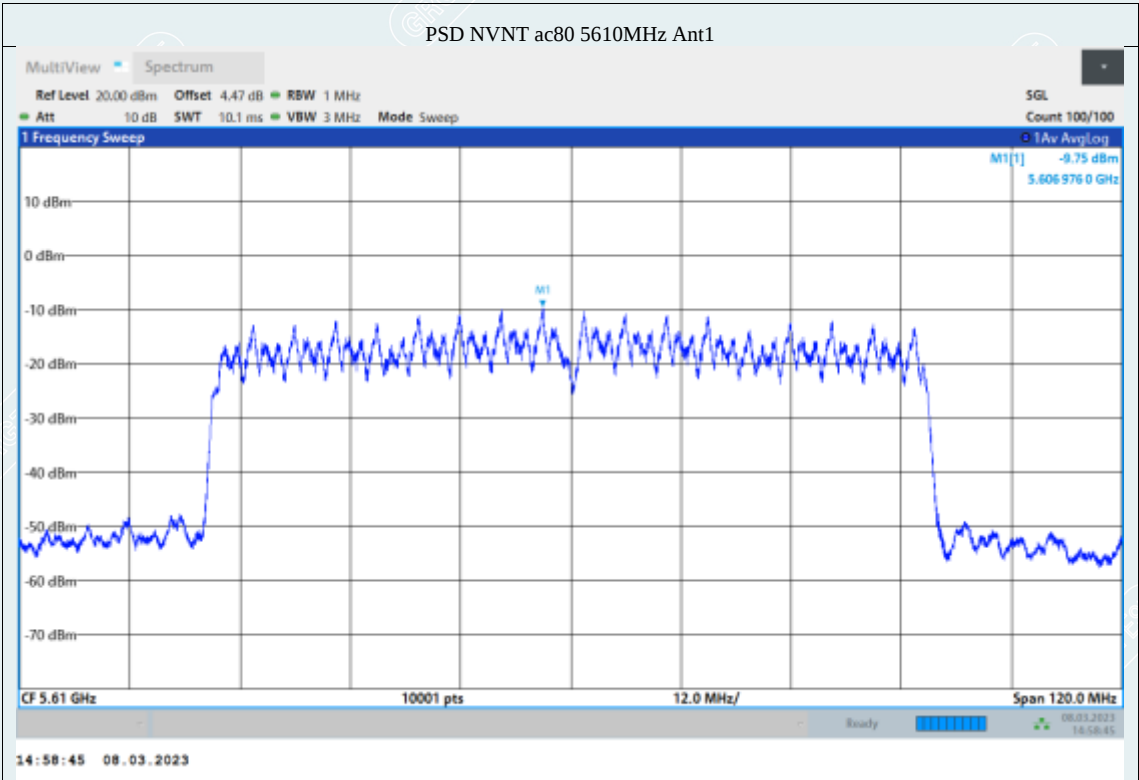


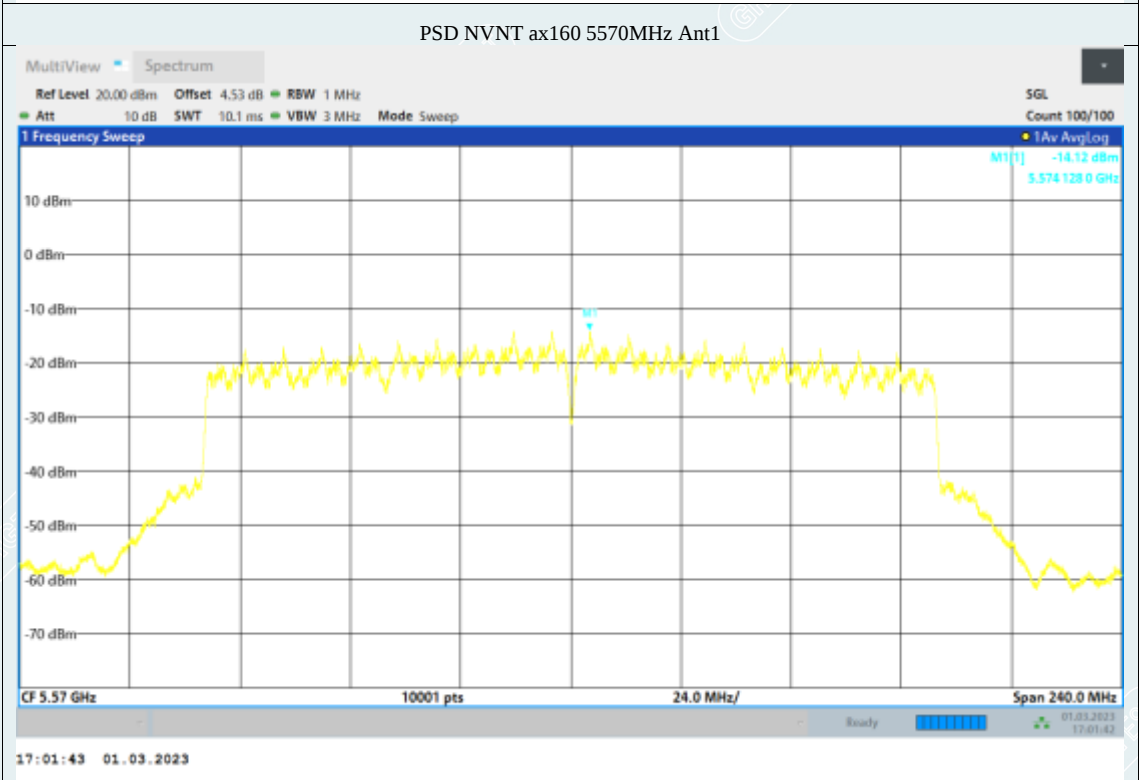
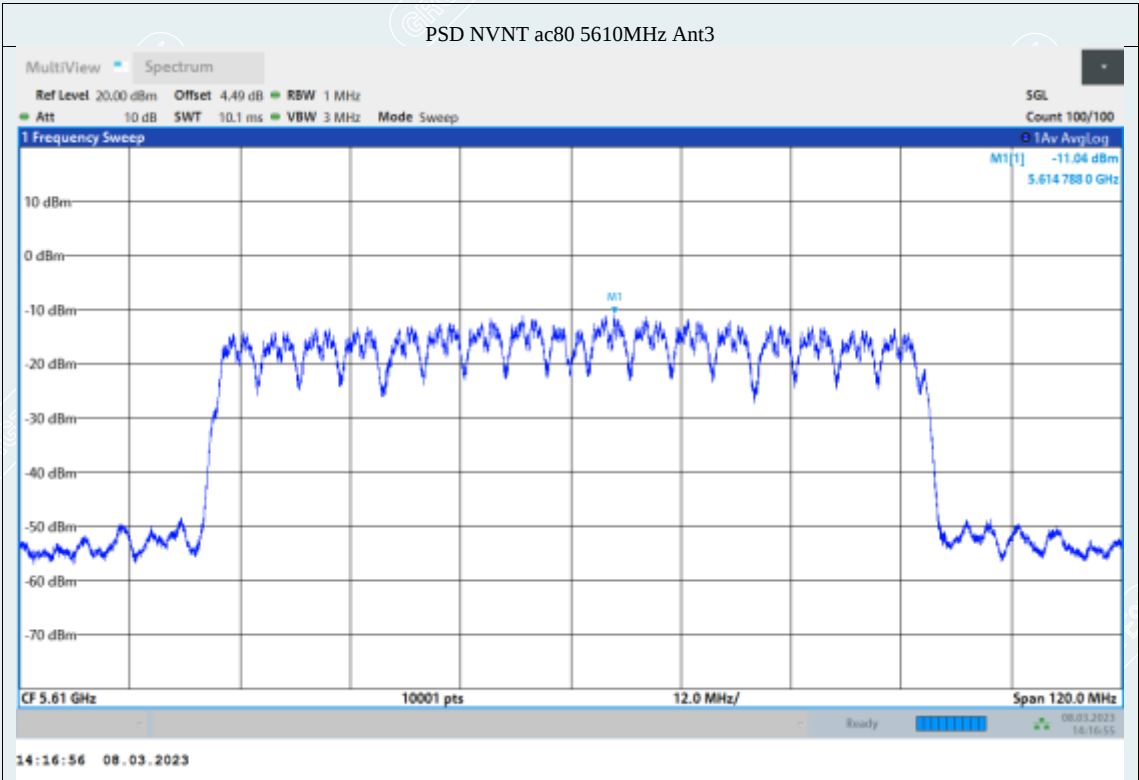


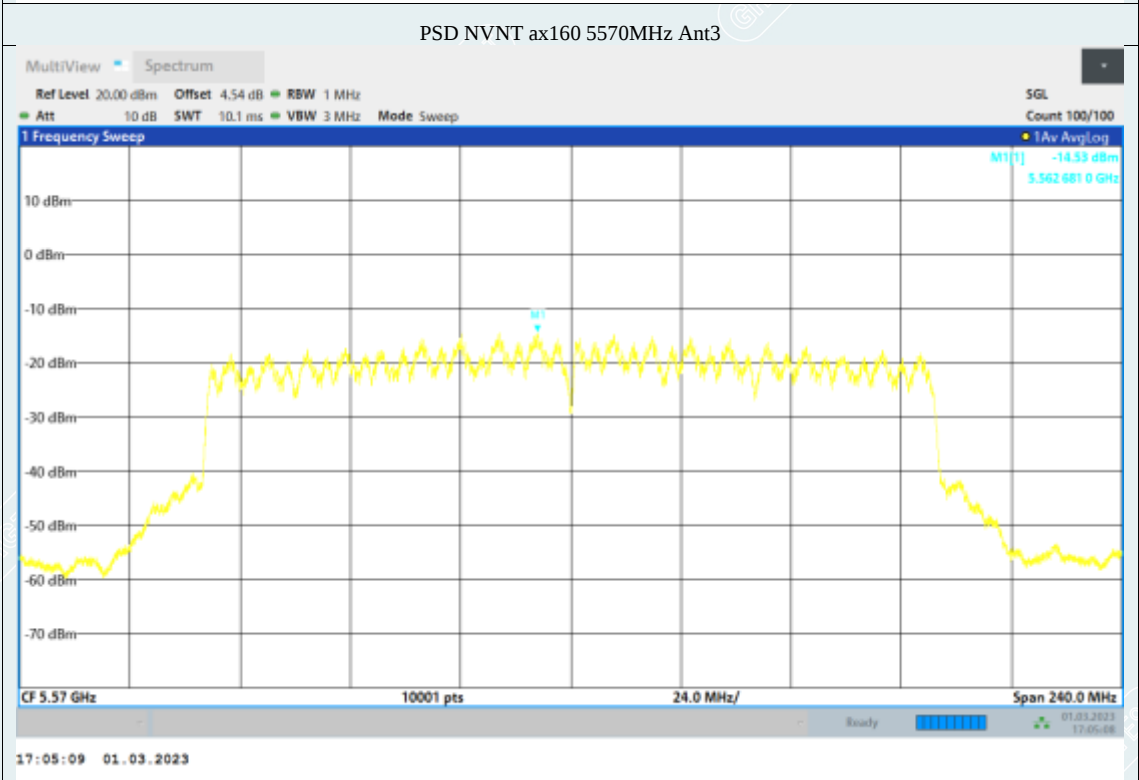
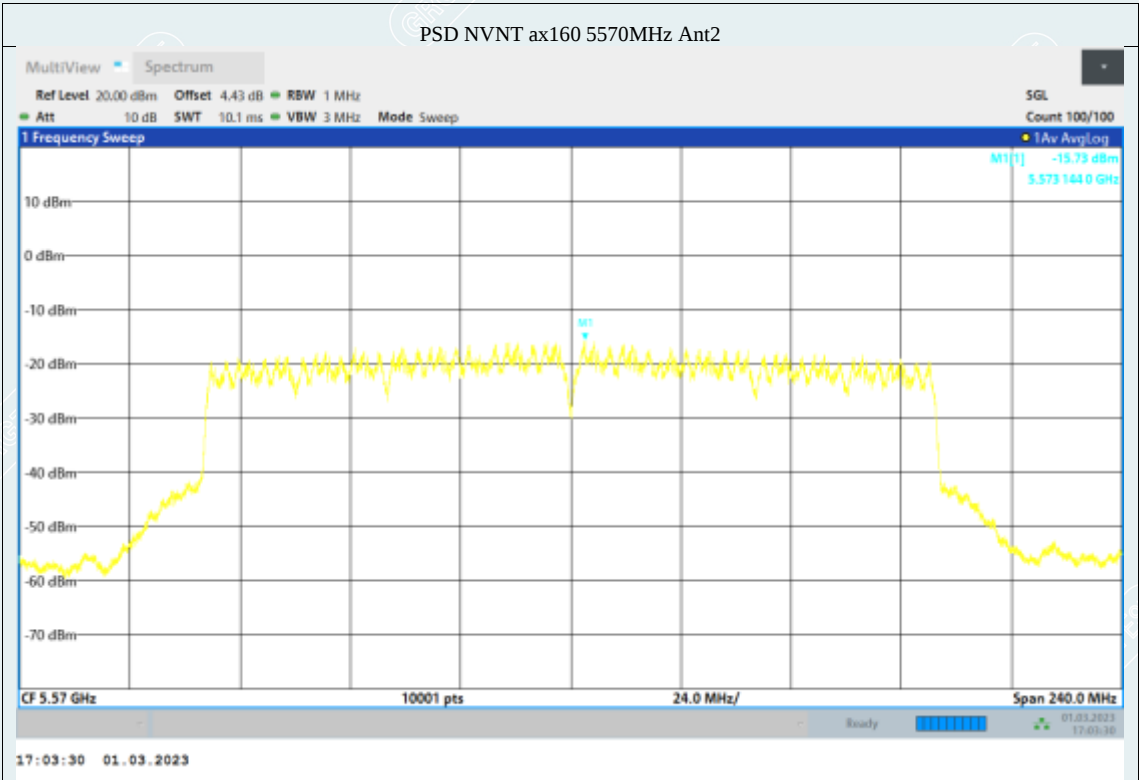


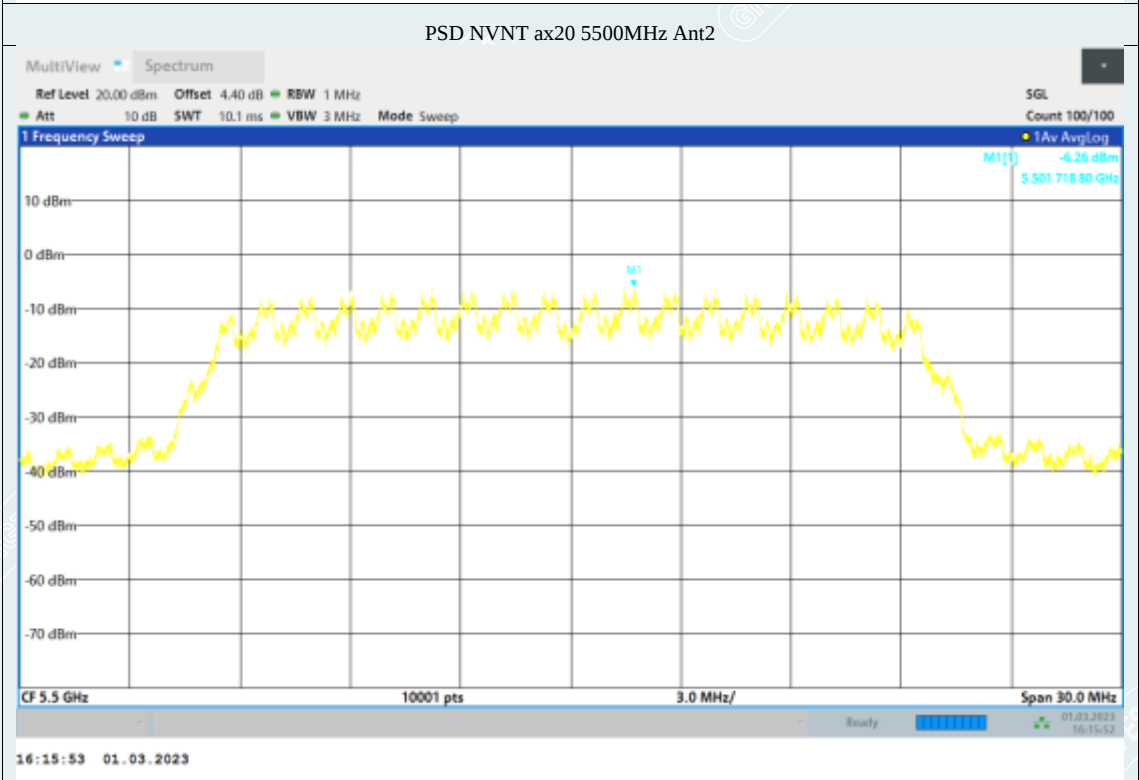
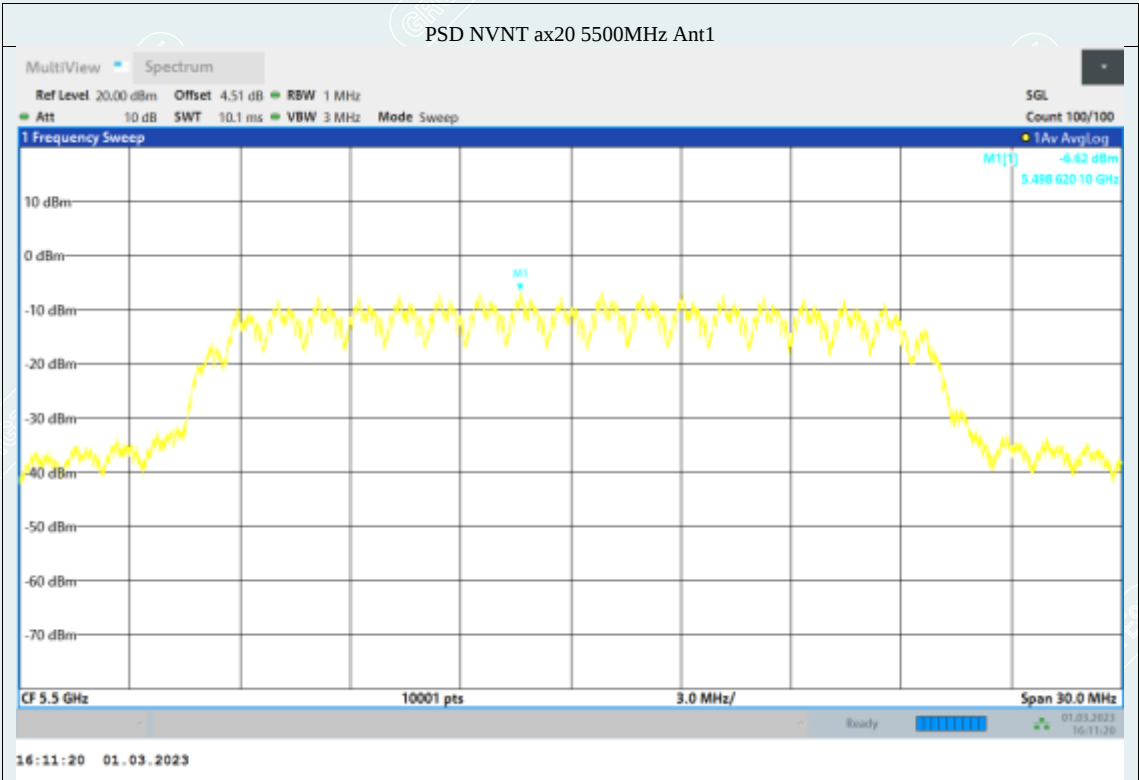


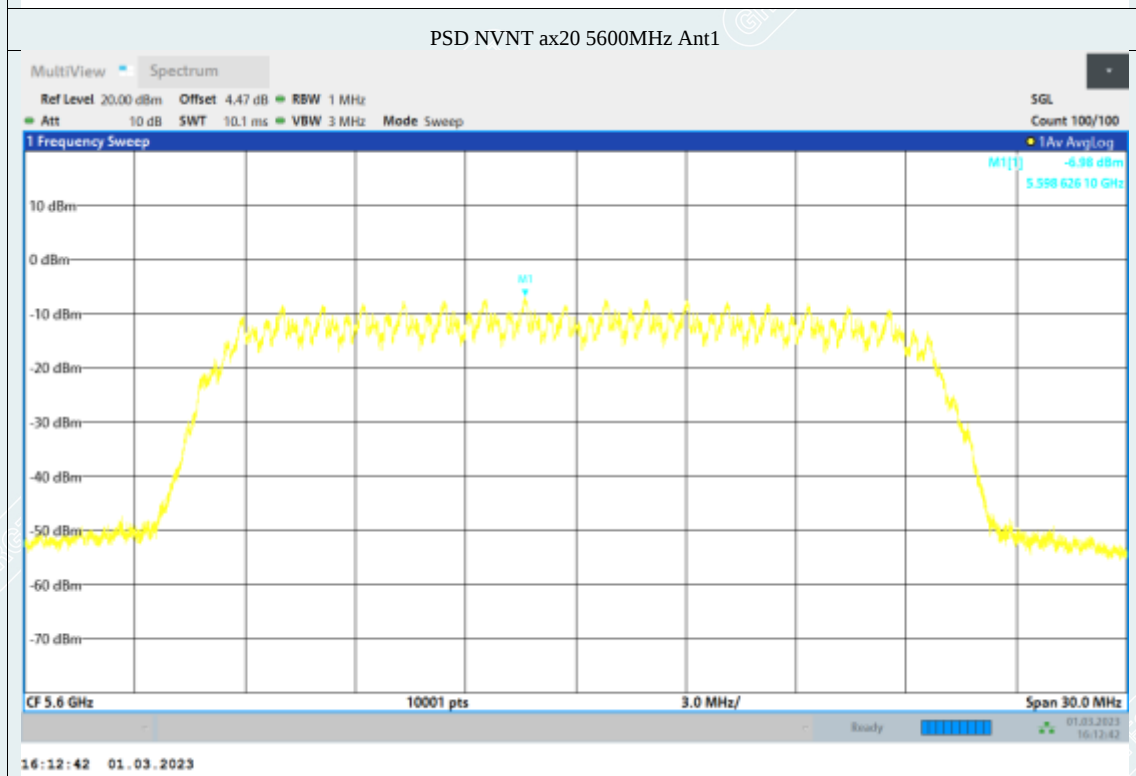
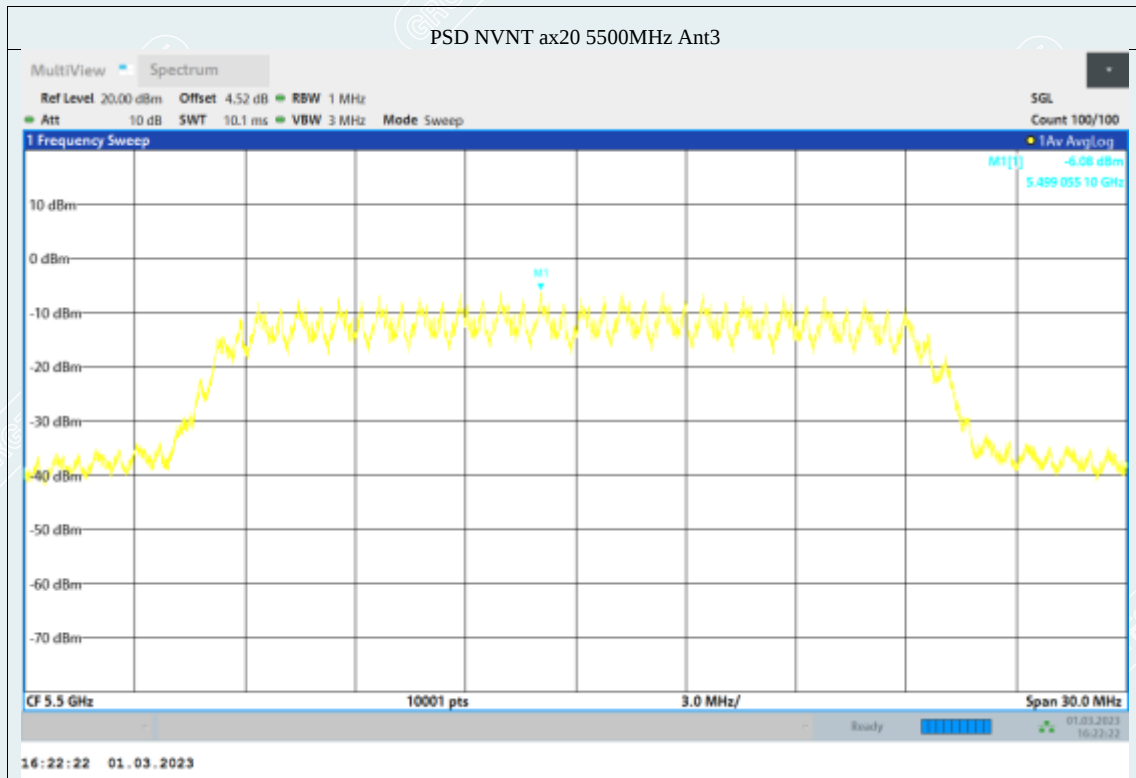


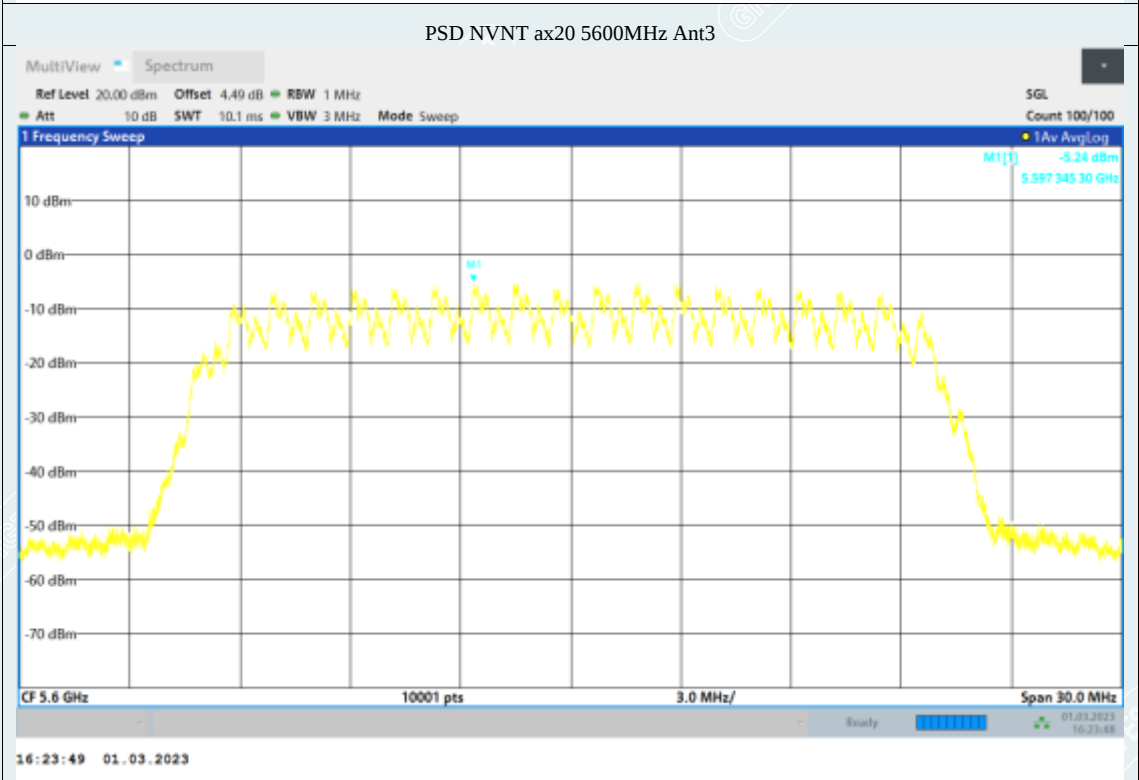
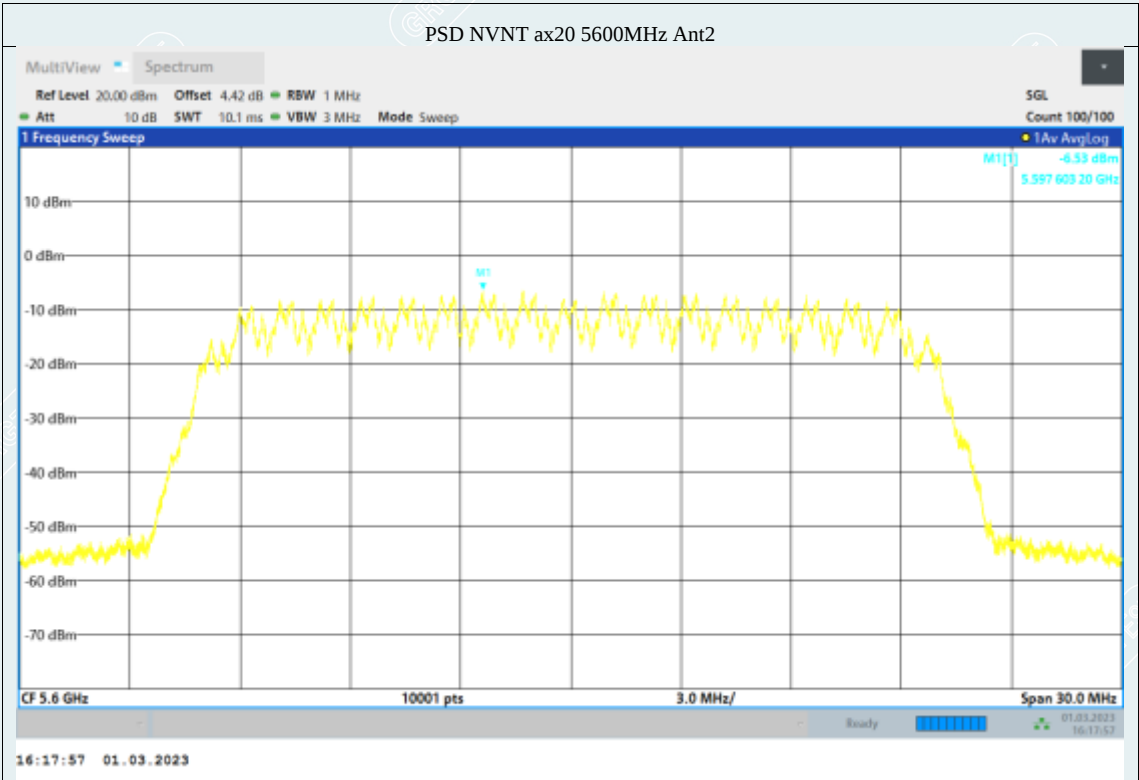


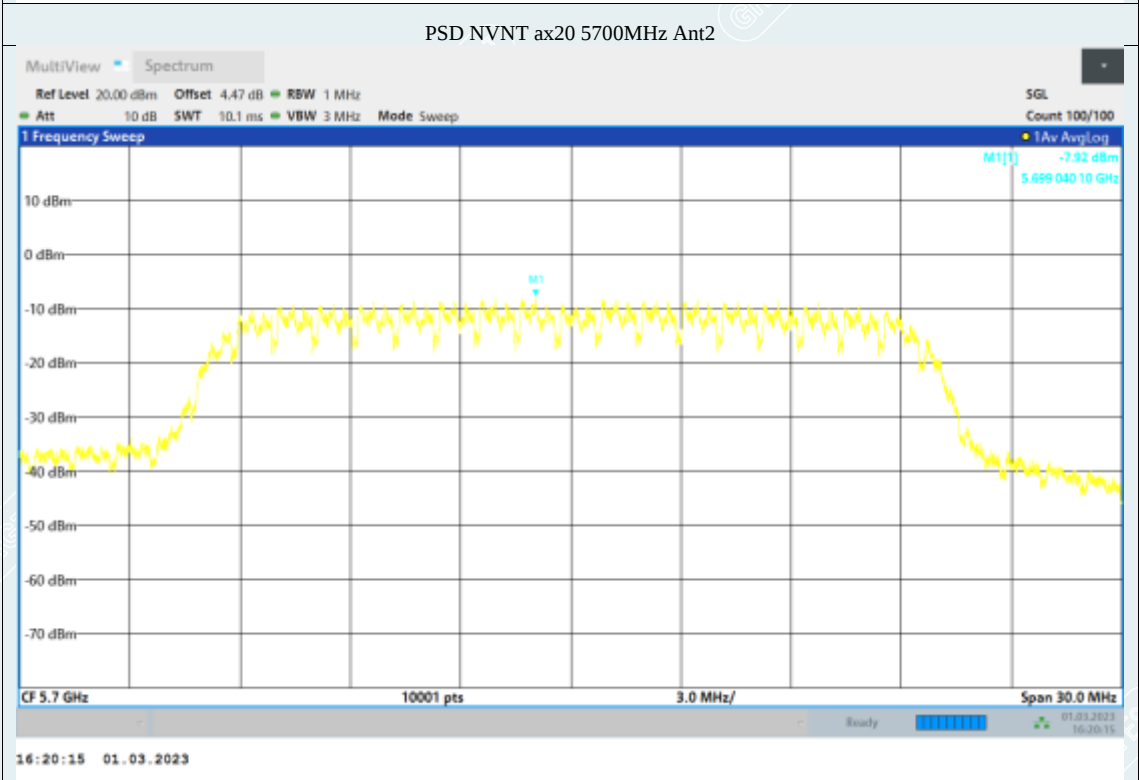
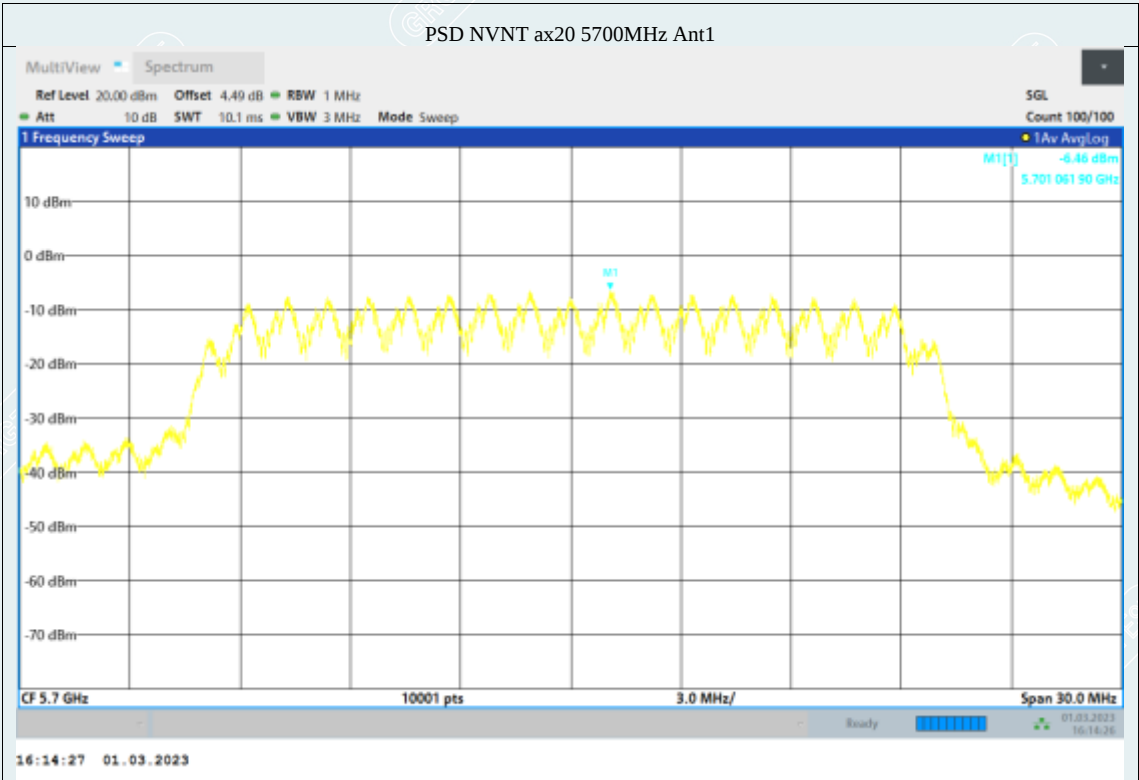


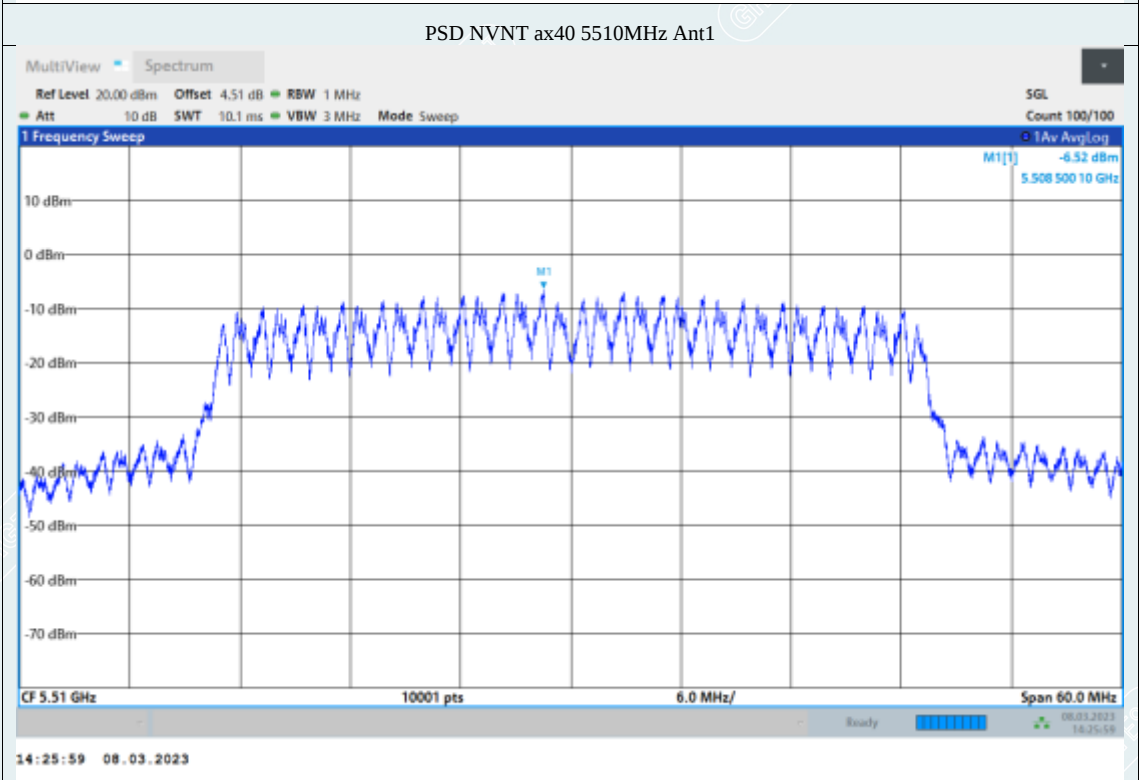
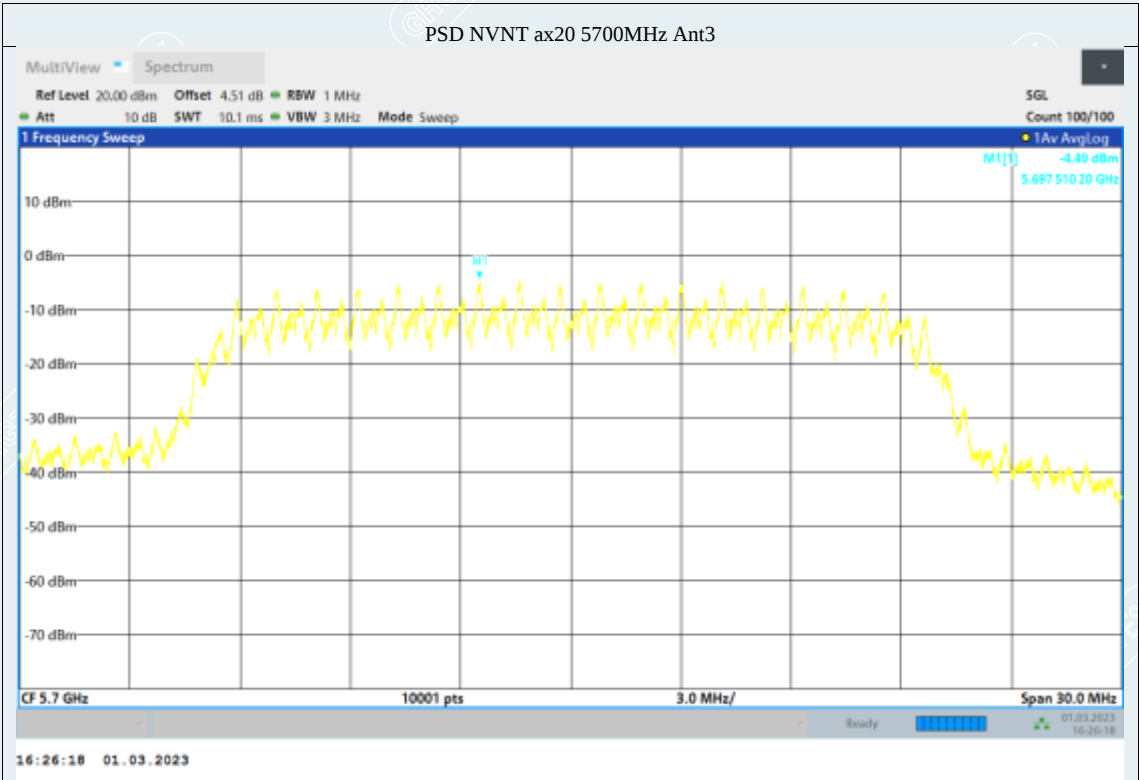


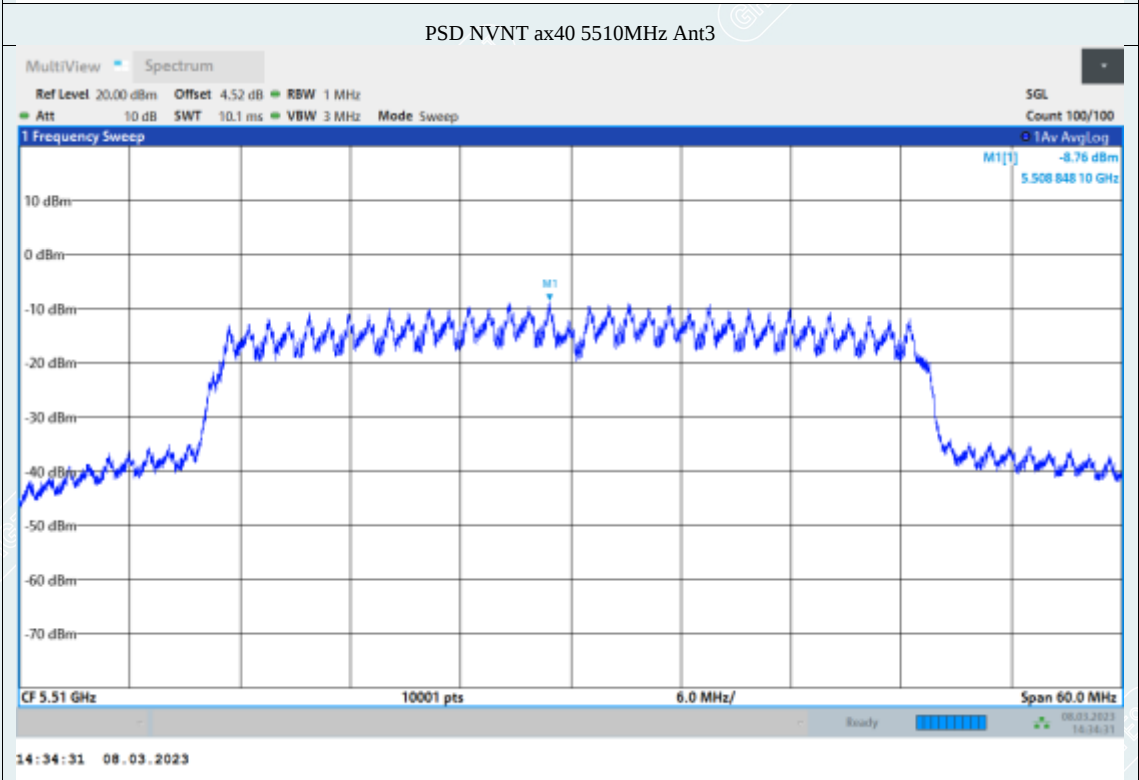
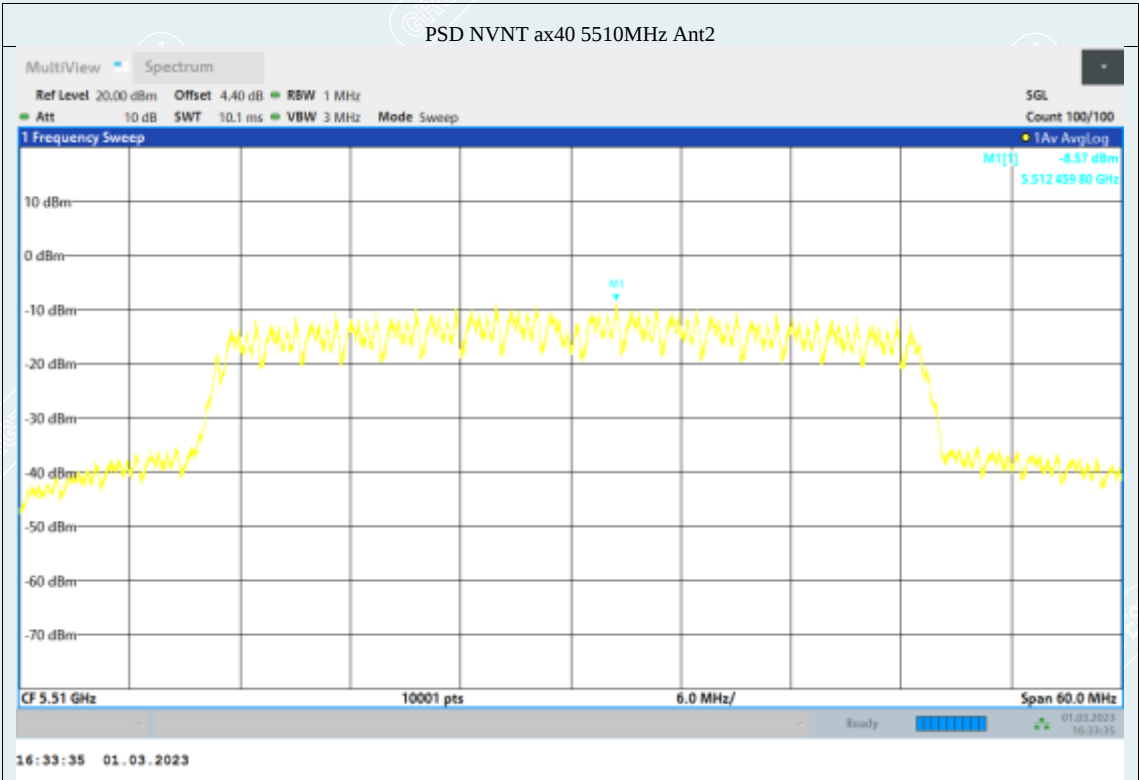


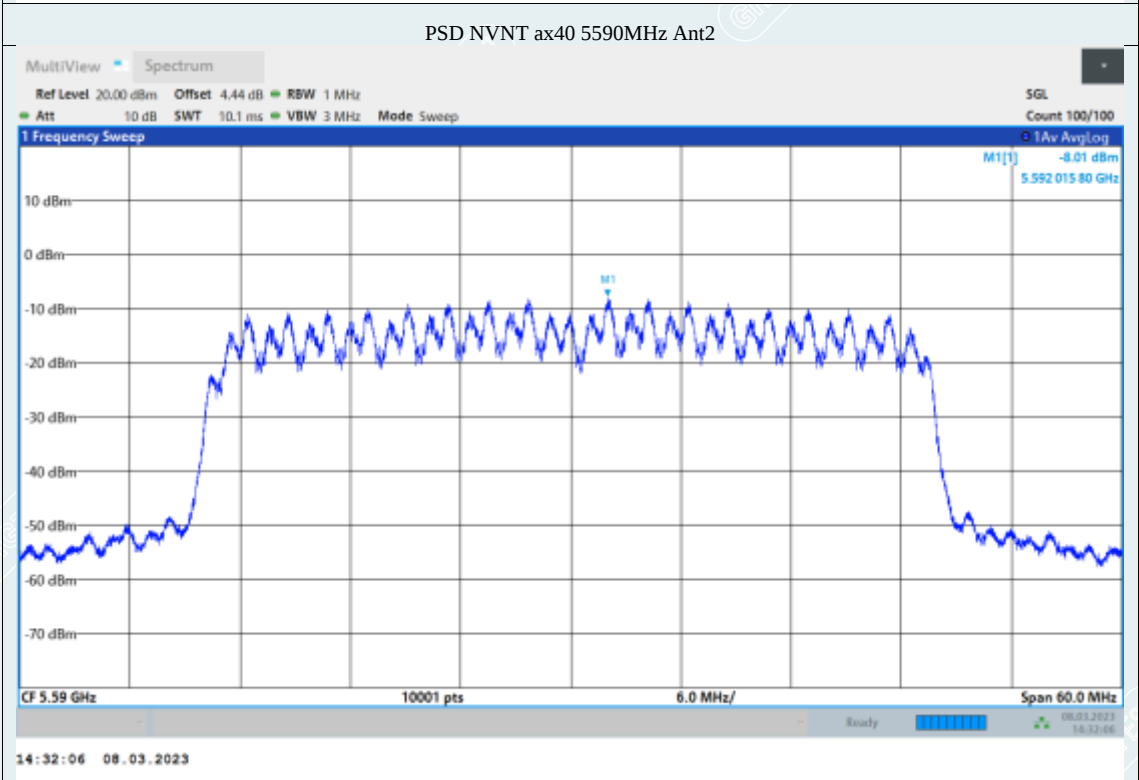
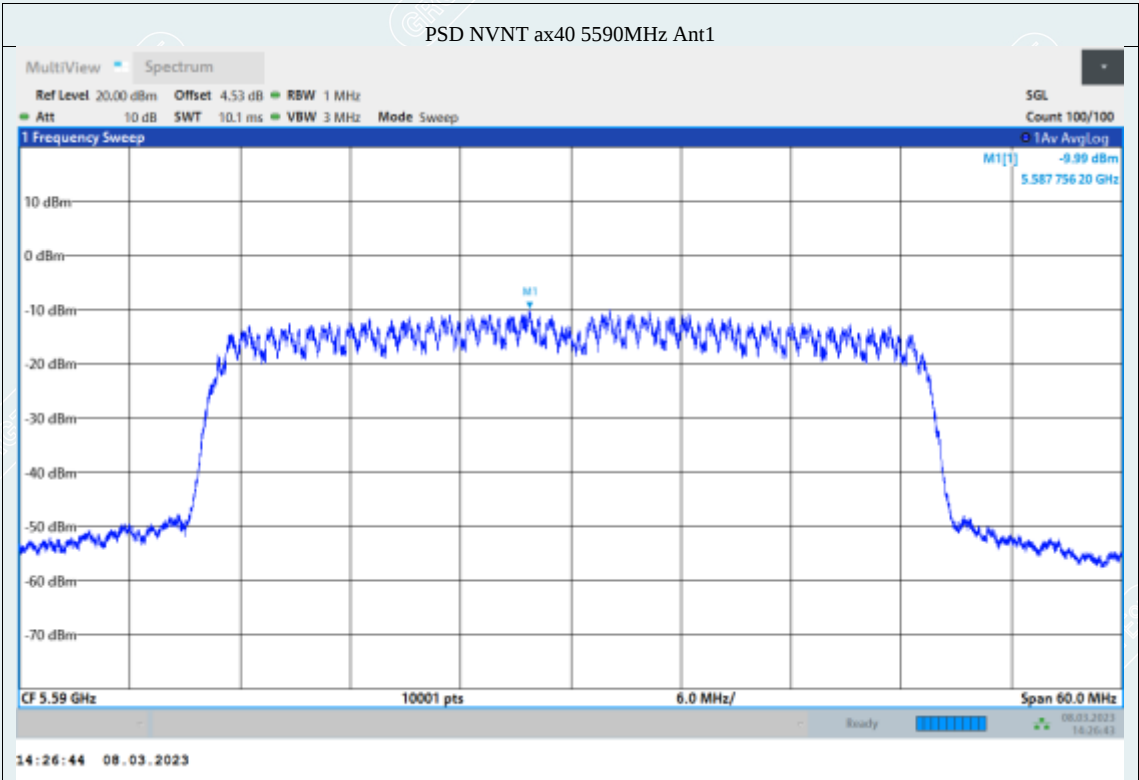


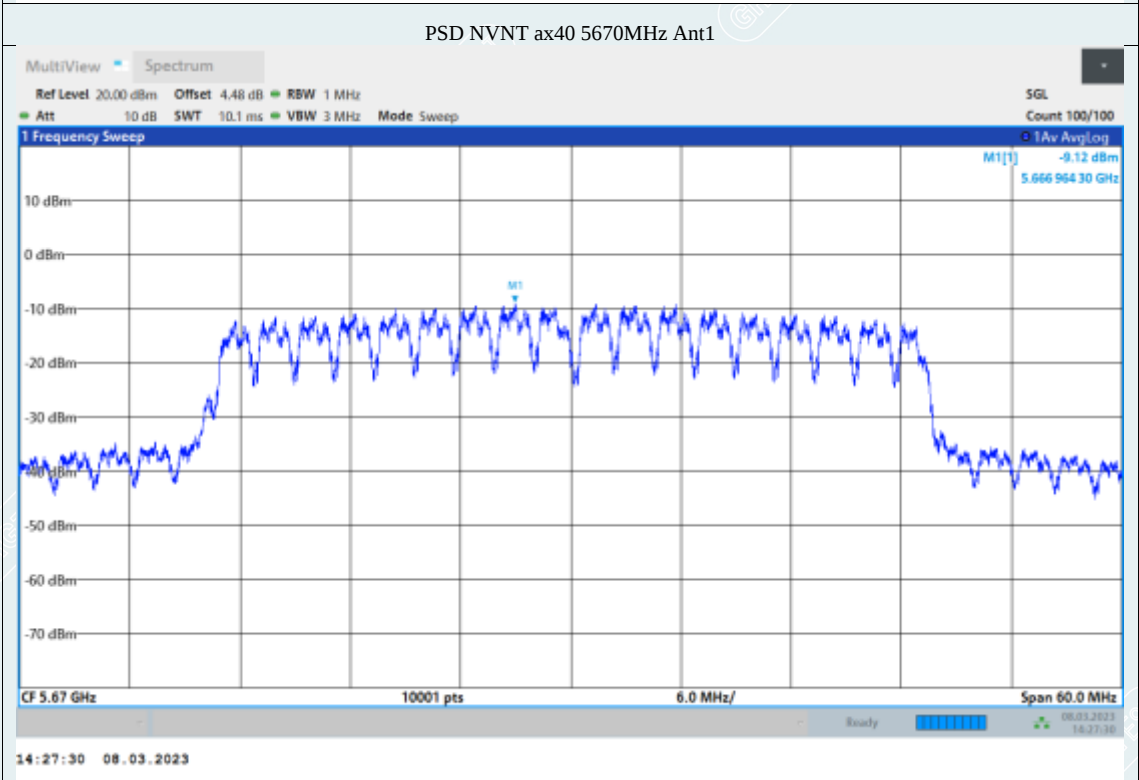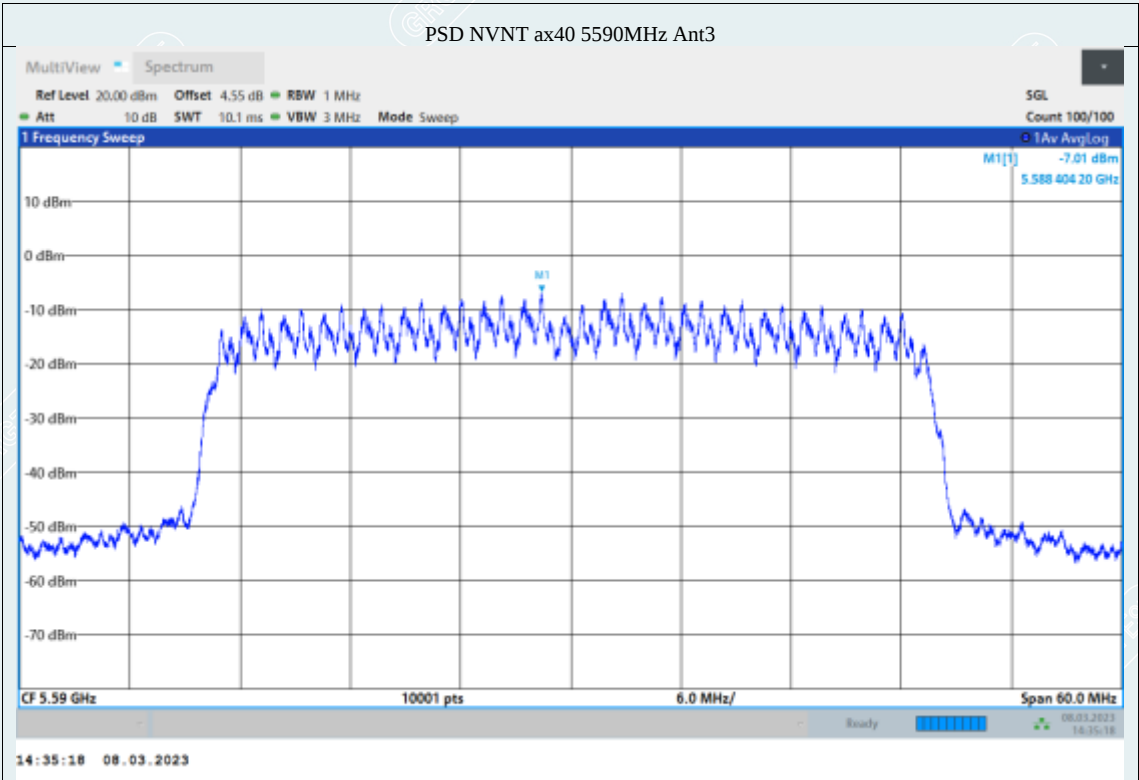

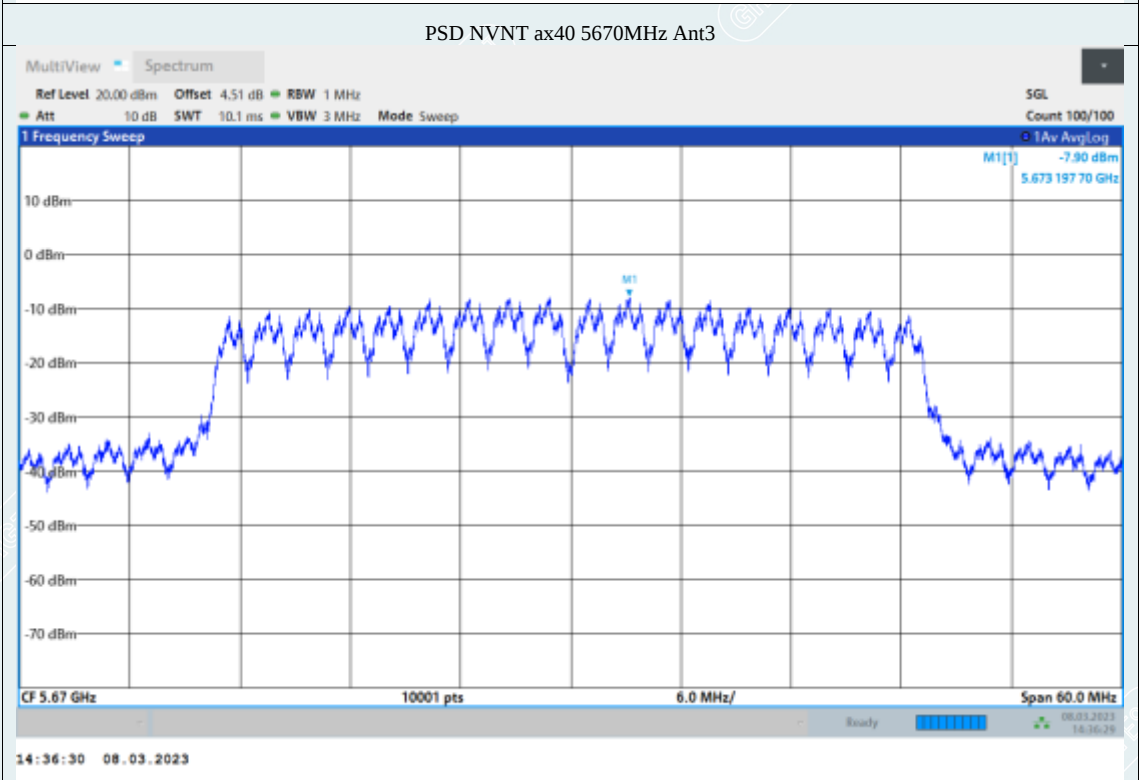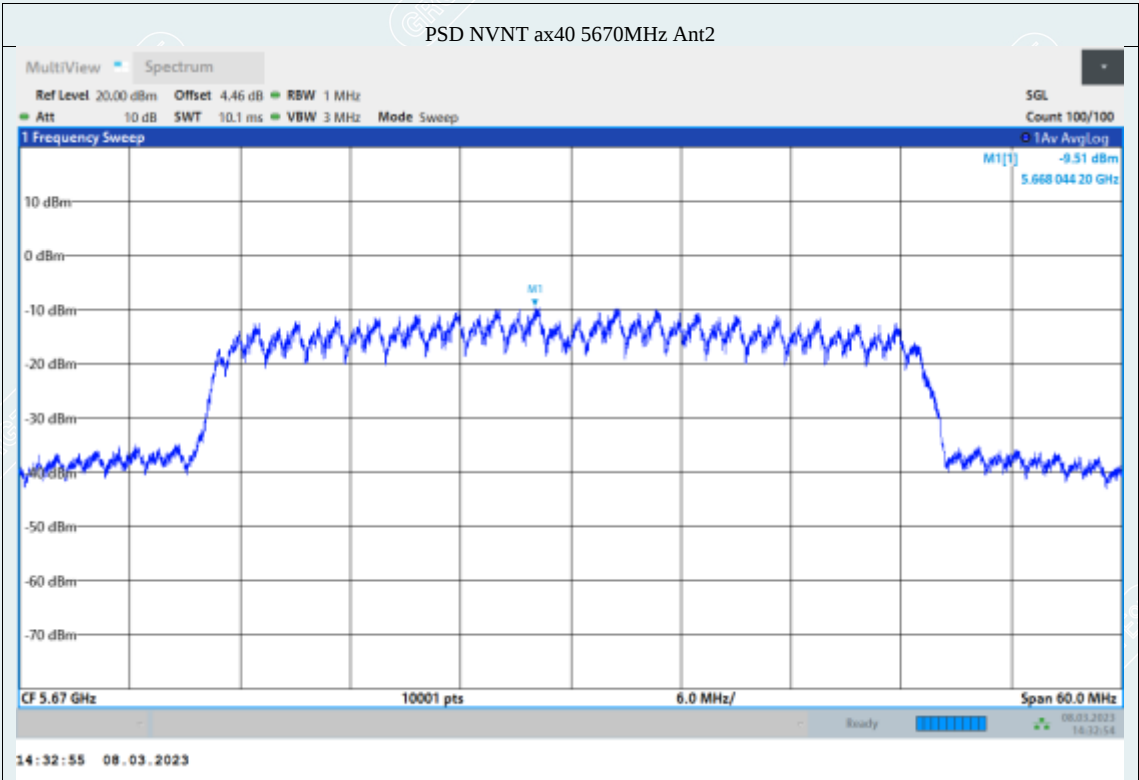

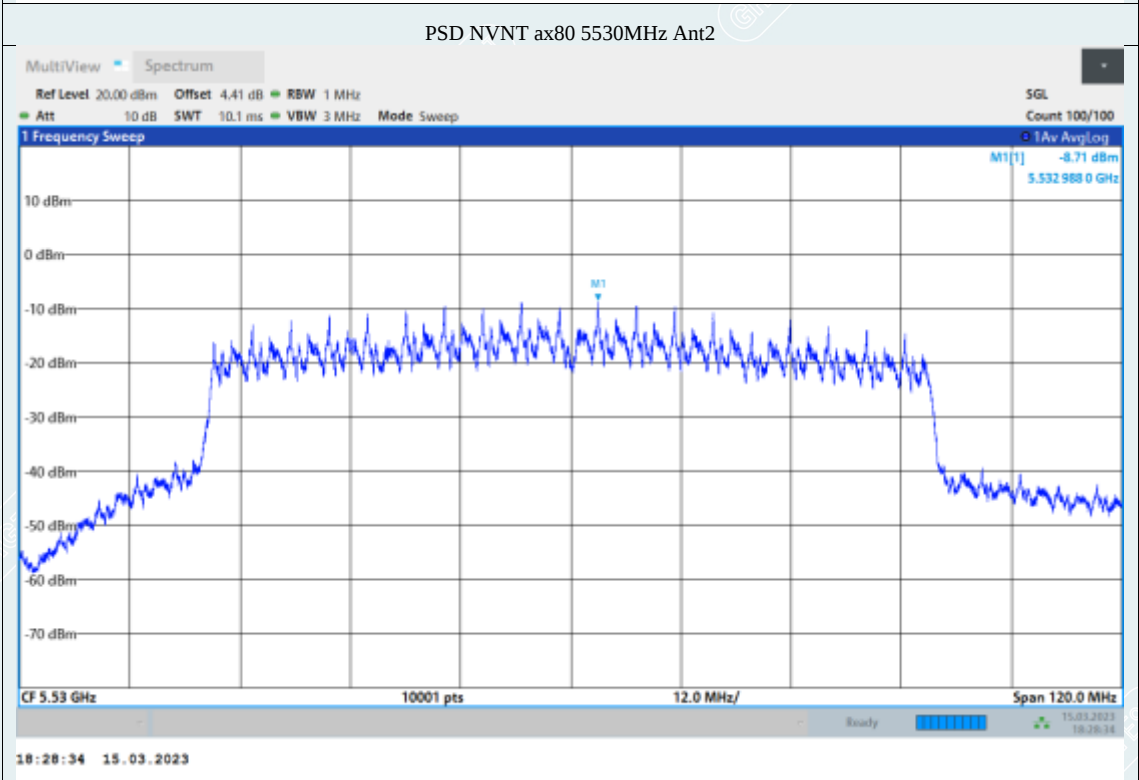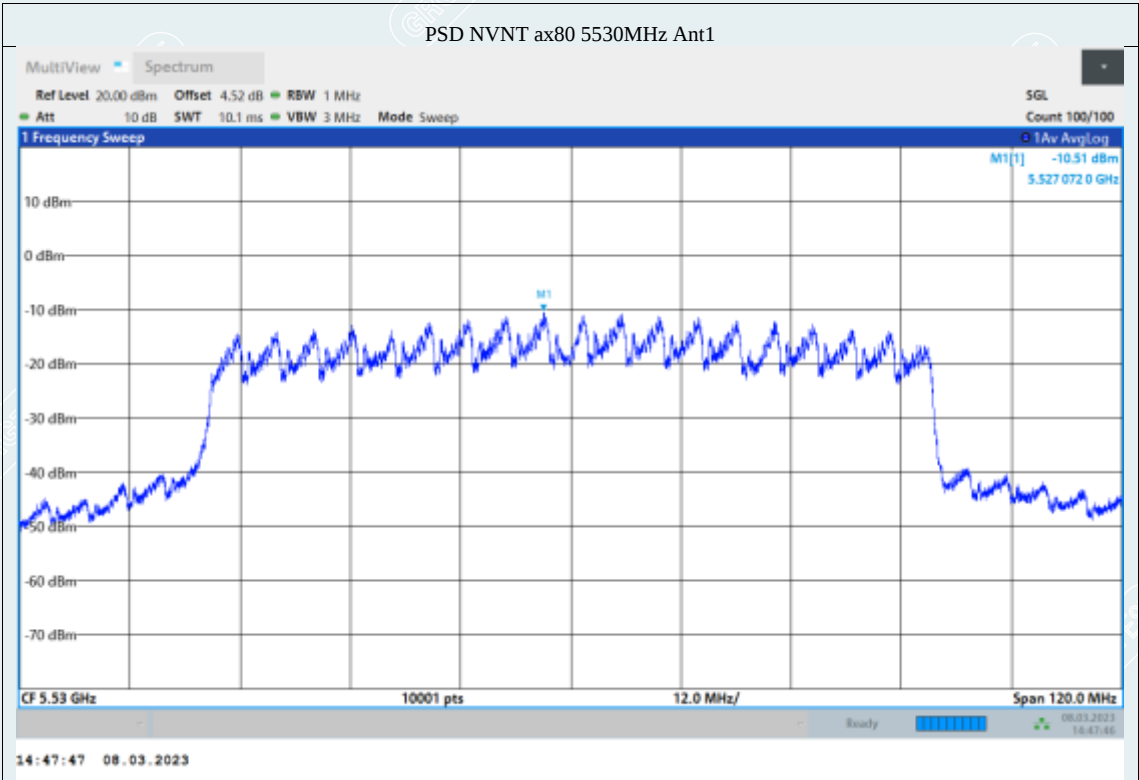

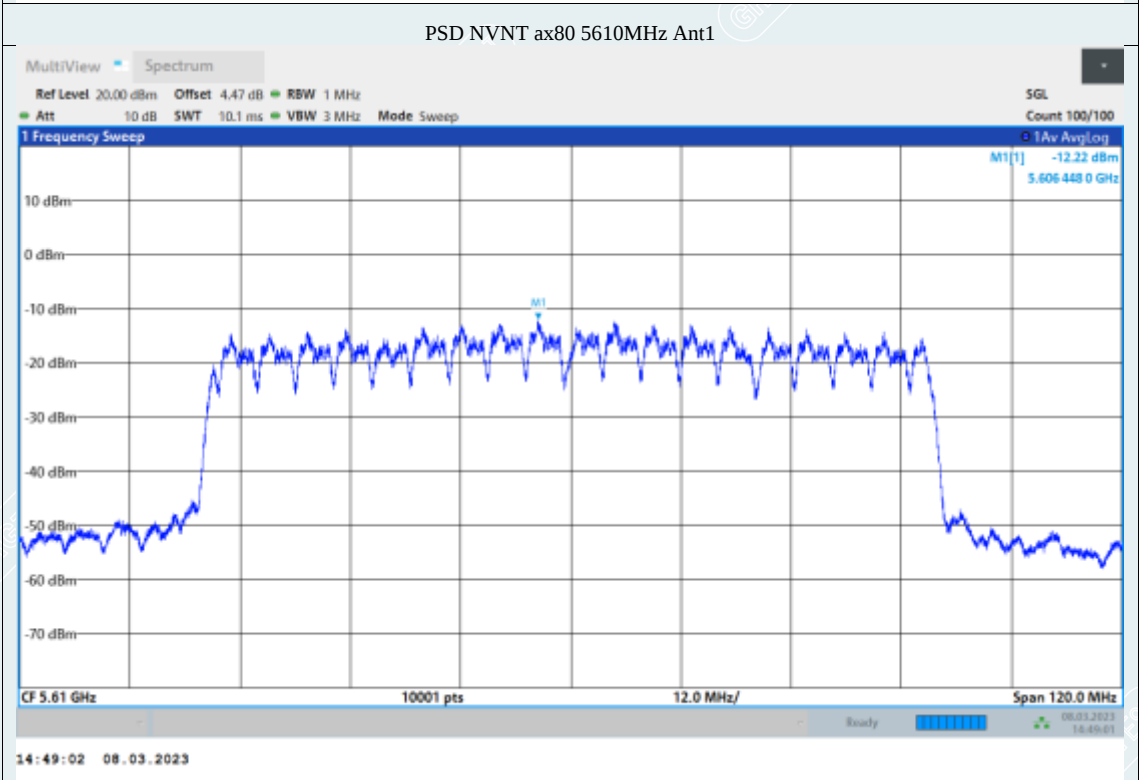
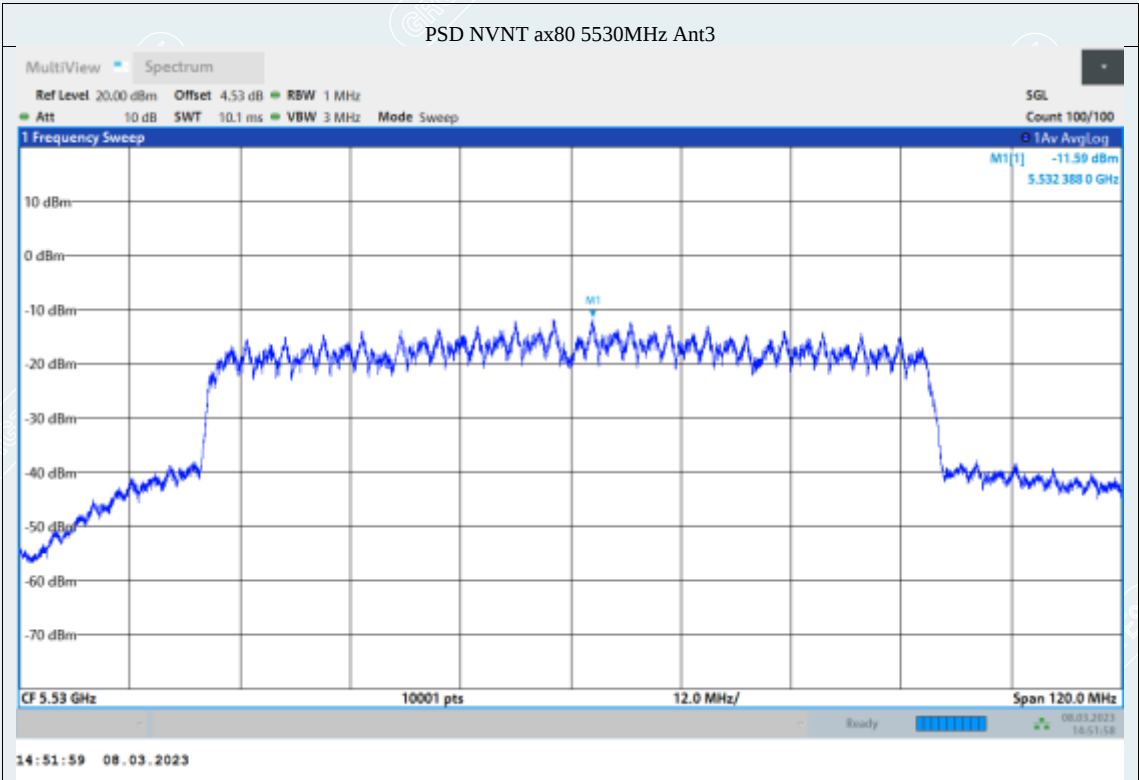


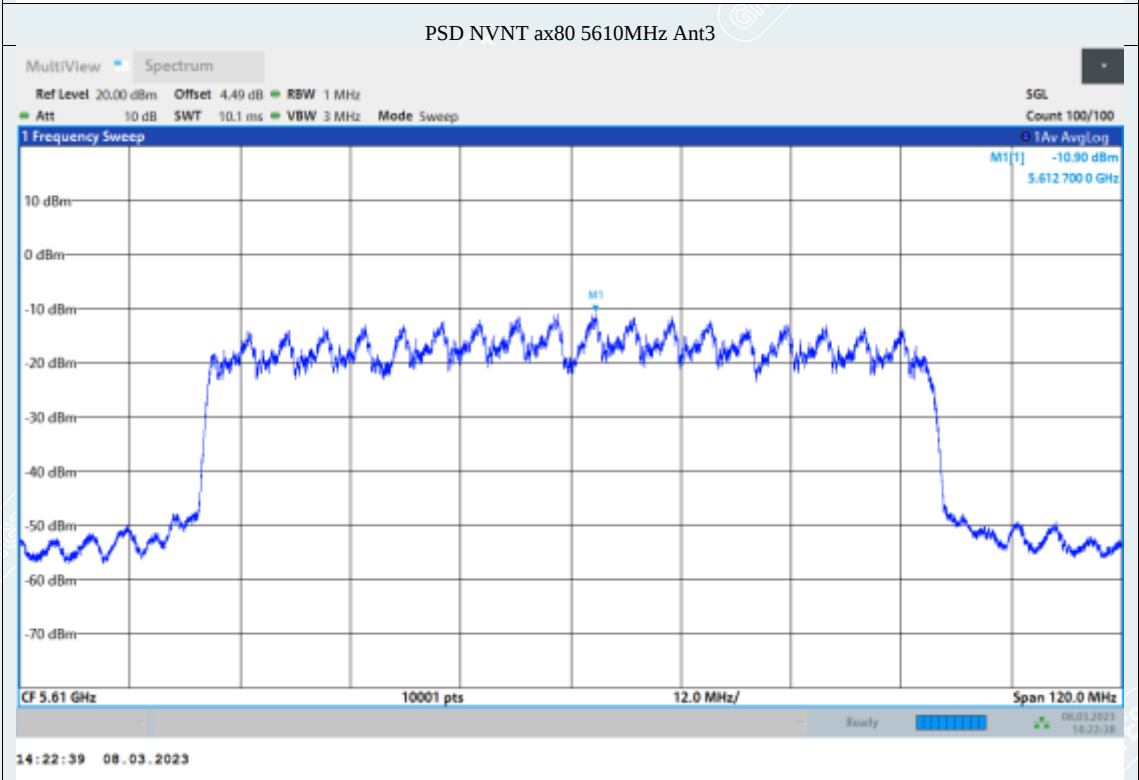
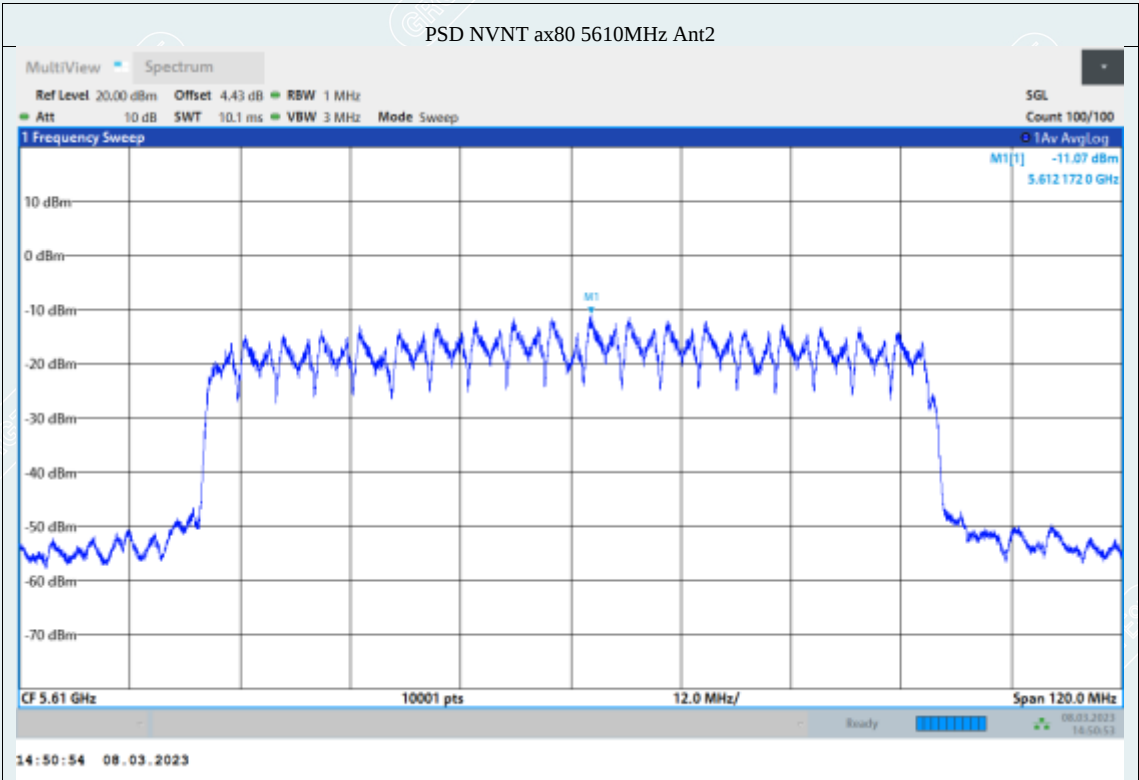




BAND U-NII-3:



Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
a	5745	Ant1	-2.91	0	-2.91	30	Pass
a	5745	Ant2	-3	0	-3	30	Pass
a	5745	Ant3	-3.22	0	-3.22	30	Pass
a	5785	Ant1	-2.27	0	-2.27	30	Pass
a	5785	Ant2	-2.59	0	-2.59	30	Pass
a	5785	Ant3	-2.85	0	-2.85	30	Pass
a	5825	Ant1	-3.52	0	-3.52	30	Pass
a	5825	Ant2	-3.49	0.09	-3.4	30	Pass
a	5825	Ant3	-2.95	0	-2.95	30	Pass
n20	5745	Ant1	-3.79	0.18	-3.61	30	Pass
n20	5745	Ant2	-3.88	0.18	-3.7	30	Pass
n20	5745	Ant3	-3.2	0.19	-3.01	30	Pass
n20	5745	Sum	1.16	-	1.35	27.44	Pass
n20	5785	Ant1	-2.81	0.18	-2.63	30	Pass
n20	5785	Ant2	-3.09	0.18	-2.91	30	Pass
n20	5785	Ant3	-2.39	0.18	-2.21	30	Pass
n20	5785	Sum	2.02	-	2.2	27.44	Pass
n20	5825	Ant1	-4.22	0.19	-4.03	30	Pass
n20	5825	Ant2	-4.52	0.18	-4.34	30	Pass
n20	5825	Ant3	-3.43	0.18	-3.25	30	Pass
n20	5825	Sum	0.74	-	0.92	27.44	Pass
n40	5755	Ant1	-7.59	0.35	-7.24	30	Pass
n40	5755	Ant2	-7.37	0.35	-7.02	30	Pass
n40	5755	Ant3	-8.07	0.35	-7.72	30	Pass
n40	5755	Sum	-2.9	-	-2.55	27.44	Pass
n40	5795	Ant1	-8.19	0.35	-7.84	30	Pass
n40	5795	Ant2	-8.18	0.36	-7.82	30	Pass
n40	5795	Ant3	-8.05	0.36	-7.69	30	Pass
n40	5795	Sum	-3.37	-	-3.01	27.44	Pass
ac20	5745	Ant1	-3.72	0.18	-3.54	30	Pass
ac20	5745	Ant2	-3.67	0.18	-3.49	30	Pass
ac20	5745	Ant3	-3.11	0.18	-2.93	30	Pass
ac20	5745	Sum	1.28	-	1.46	27.44	Pass
ac20	5785	Ant1	-2.26	0.18	-2.08	30	Pass
ac20	5785	Ant2	-2.78	0.18	-2.6	30	Pass
ac20	5785	Ant3	-3.01	0.18	-2.83	30	Pass
ac20	5785	Sum	2.1	-	2.28	27.44	Pass
ac20	5825	Ant1	-3.98	0.18	-3.8	30	Pass
ac20	5825	Ant2	-4.75	0.18	-4.57	30	Pass



ac20	5825	Ant3	-3.36	0.18	-3.18	30	Pass
ac20	5825	Sum	0.78	-	0.96	27.44	Pass
ac40	5755	Ant1	-7.59	0.36	-7.23	30	Pass
ac40	5755	Ant2	-8.59	0.35	-8.24	30	Pass
ac40	5755	Ant3	-8.22	0.35	-7.87	30	Pass
ac40	5755	Sum	-3.34	-	-2.99	27.44	Pass
ac40	5795	Ant1	-7.97	0.35	-7.62	30	Pass
ac40	5795	Ant2	-8.12	0.36	-7.76	30	Pass
ac40	5795	Ant3	-7.43	0.36	-7.07	30	Pass
ac40	5795	Sum	-3.06	-	-2.7	27.44	Pass
ac80	5775	Ant1	-14.08	0.68	-13.4	30	Pass
ac80	5775	Ant2	-14.25	0.68	-13.57	30	Pass
ac80	5775	Ant3	-14.01	0.68	-13.33	30	Pass
ac80	5775	Sum	-9.34	-	-8.66	27.44	Pass
ax20	5745	Ant1	-8.18	0.71	-7.47	30	Pass
ax20	5745	Ant2	-7.96	0.71	-7.25	30	Pass
ax20	5745	Ant3	-6.51	0.71	-5.8	30	Pass
ax20	5745	Sum	-2.71	-	-2	27.44	Pass
ax20	5785	Ant1	-6.98	0.71	-6.27	30	Pass
ax20	5785	Ant2	-6.9	0.71	-6.19	30	Pass
ax20	5785	Ant3	-6.62	0.71	-5.91	30	Pass
ax20	5785	Sum	-2.06	-	-1.35	27.44	Pass
ax20	5825	Ant1	-8.01	0.71	-7.3	30	Pass
ax20	5825	Ant2	-8.27	0.72	-7.55	30	Pass
ax20	5825	Ant3	-9.92	0.71	-9.21	30	Pass
ax20	5825	Sum	-3.89	-	-3.17	27.44	Pass
ax40	5755	Ant1	-10.48	0.72	-9.76	30	Pass
ax40	5755	Ant2	-11.73	0.72	-11.01	30	Pass
ax40	5755	Ant3	-11.83	0.72	-11.11	30	Pass
ax40	5755	Sum	-6.53	-	-5.81	27.44	Pass
ax40	5795	Ant1	-11.77	0.72	-11.05	30	Pass
ax40	5795	Ant2	-10.93	0.7	-10.23	30	Pass
ax40	5795	Ant3	-10.98	0.7	-10.28	30	Pass
ax40	5795	Sum	-6.44	-	-5.73	27.44	Pass
ax80	5775	Ant1	-14.36	0.73	-13.63	30	Pass
ax80	5775	Ant2	-12.85	0.75	-12.1	30	Pass
ax80	5775	Ant3	-13.89	0.73	-13.16	30	Pass
ax80	5775	Sum	-8.88	-	-8.15	27.44	Pass

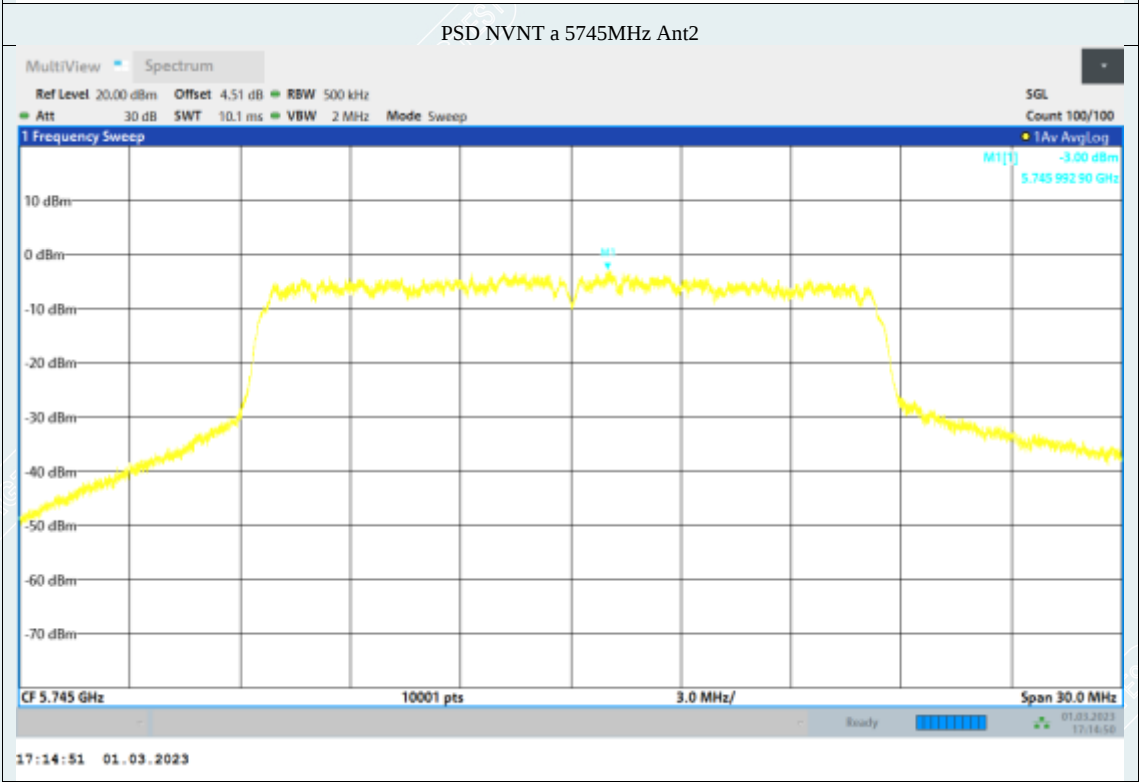
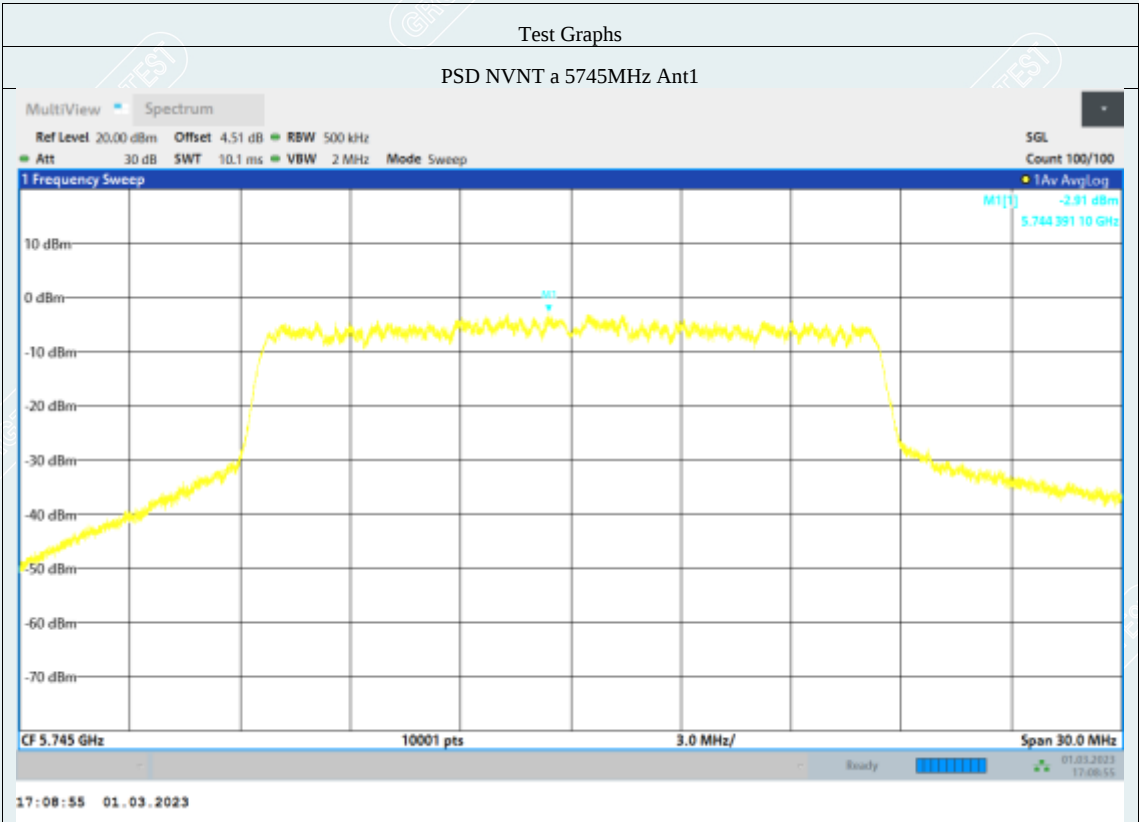


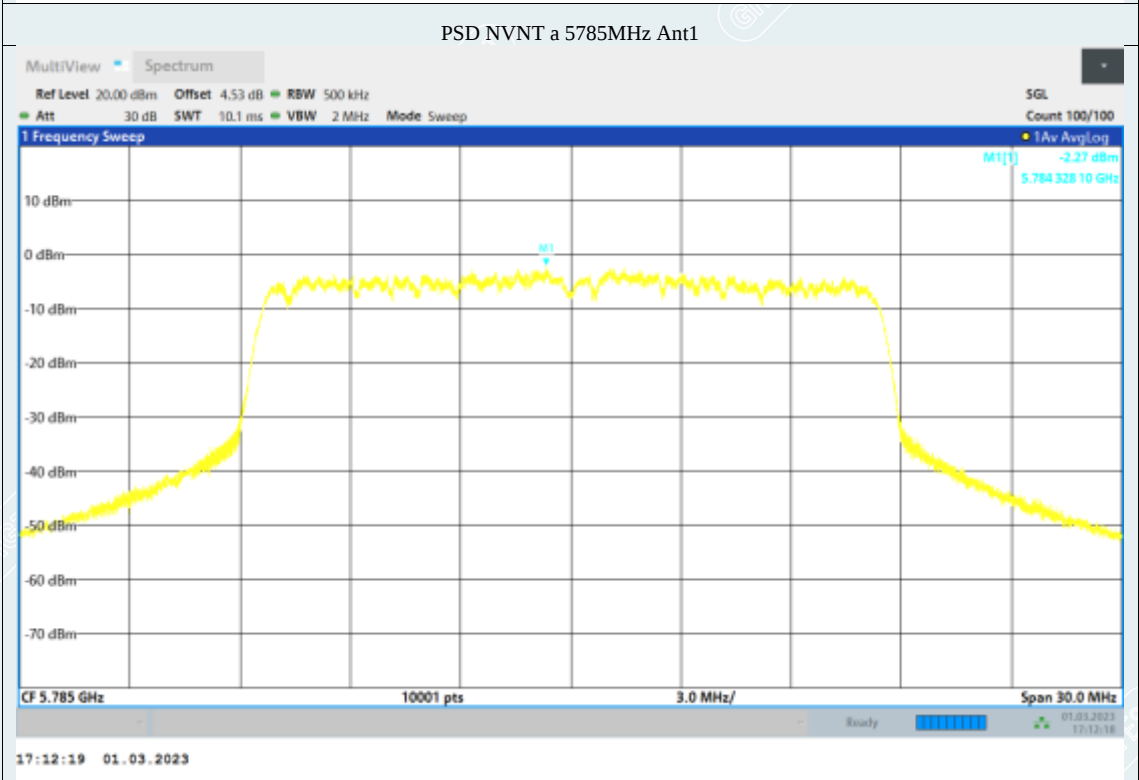
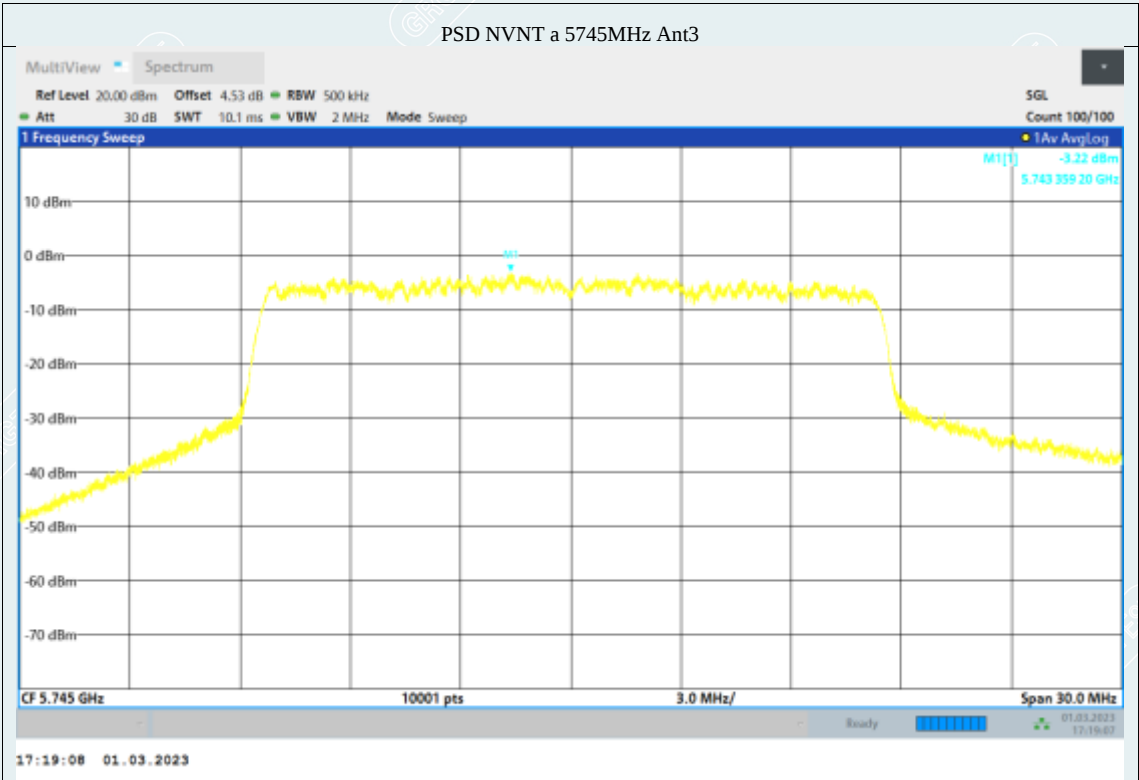


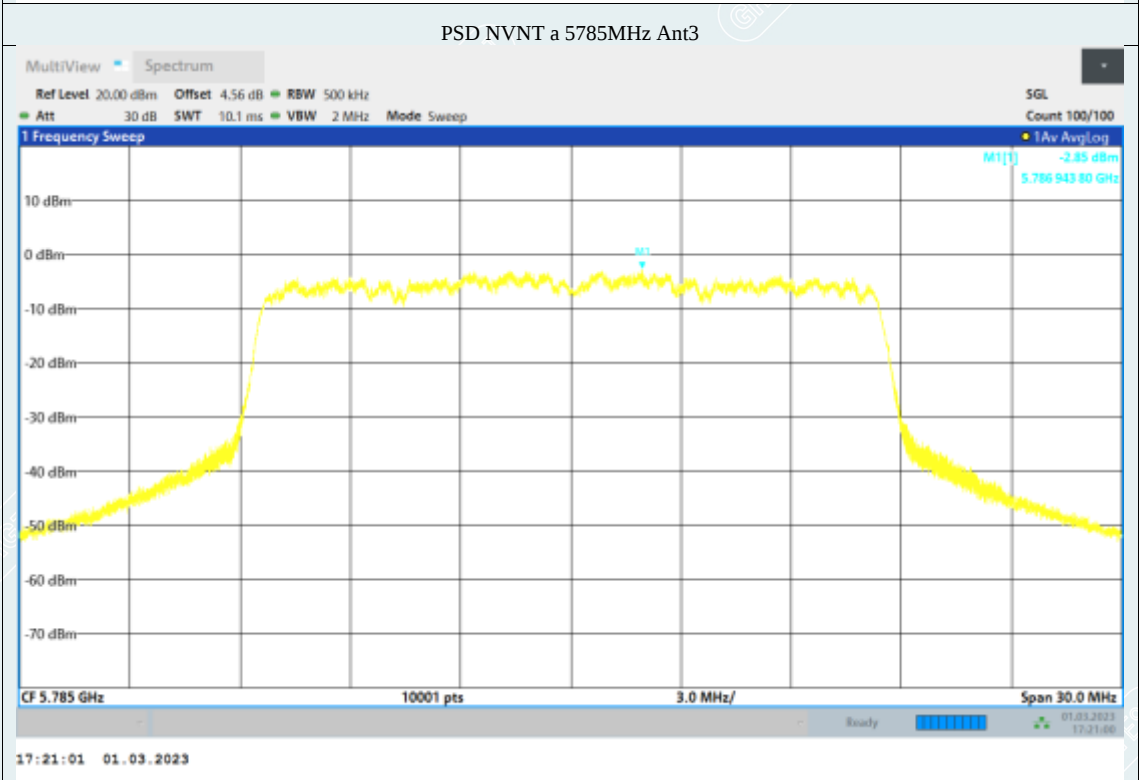
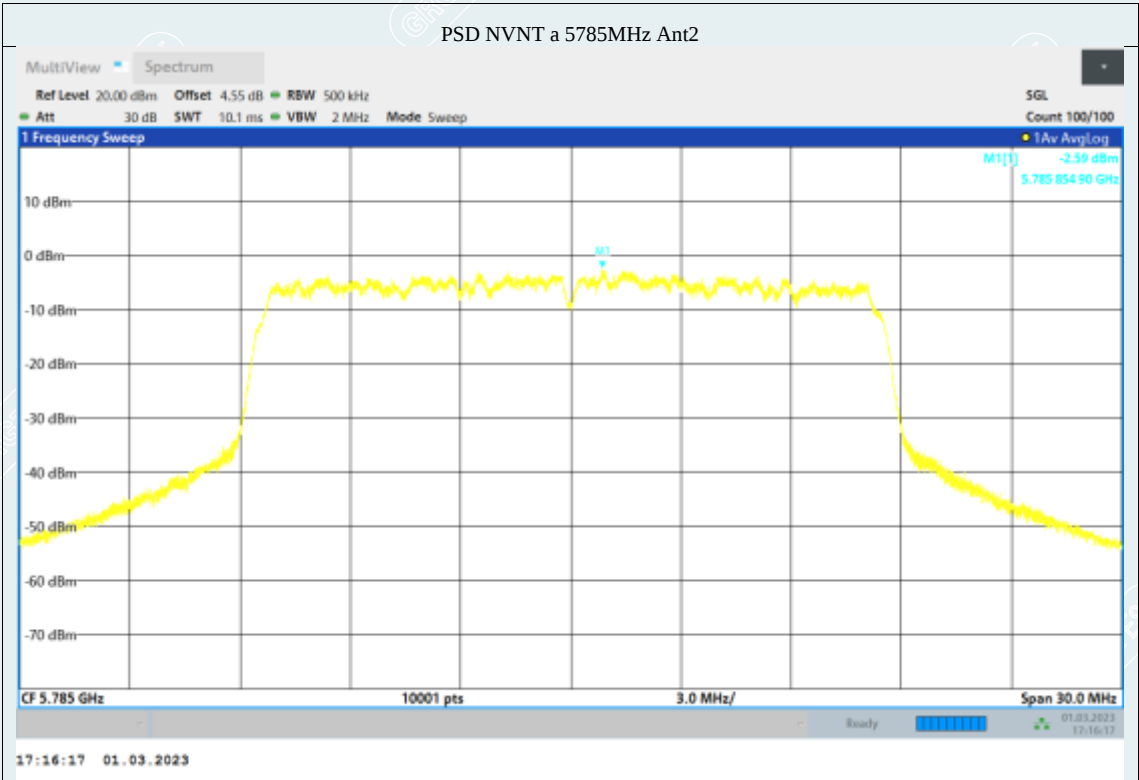


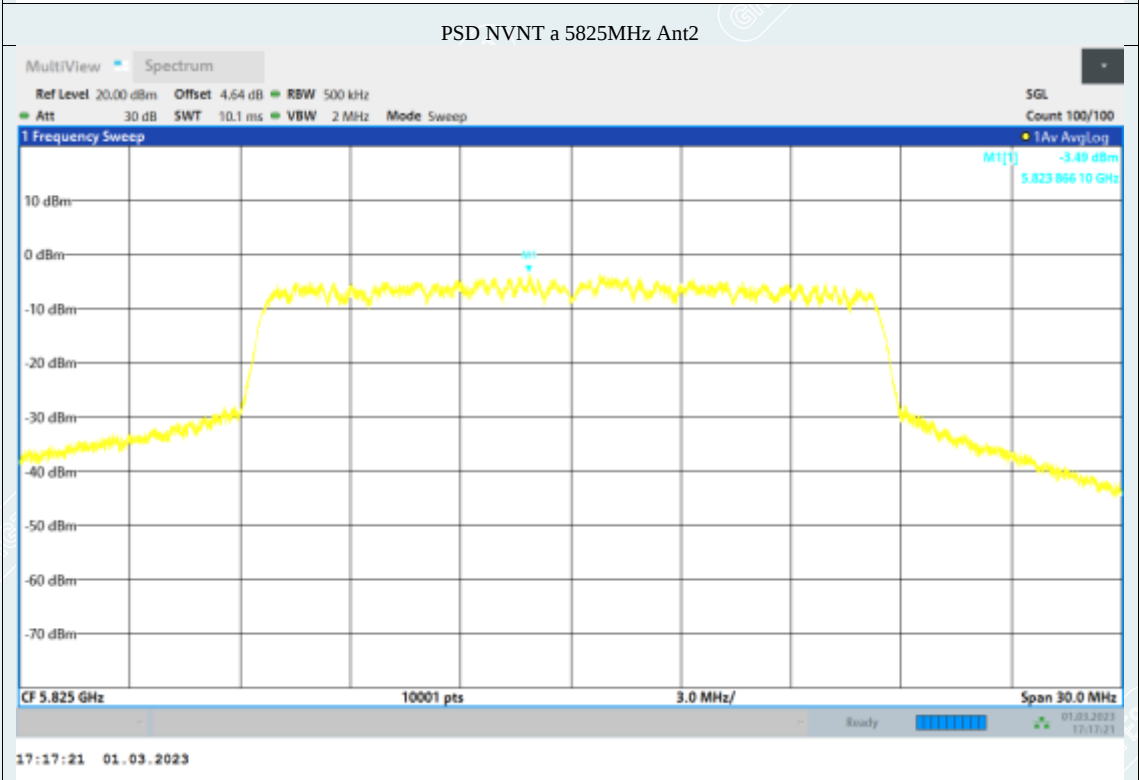
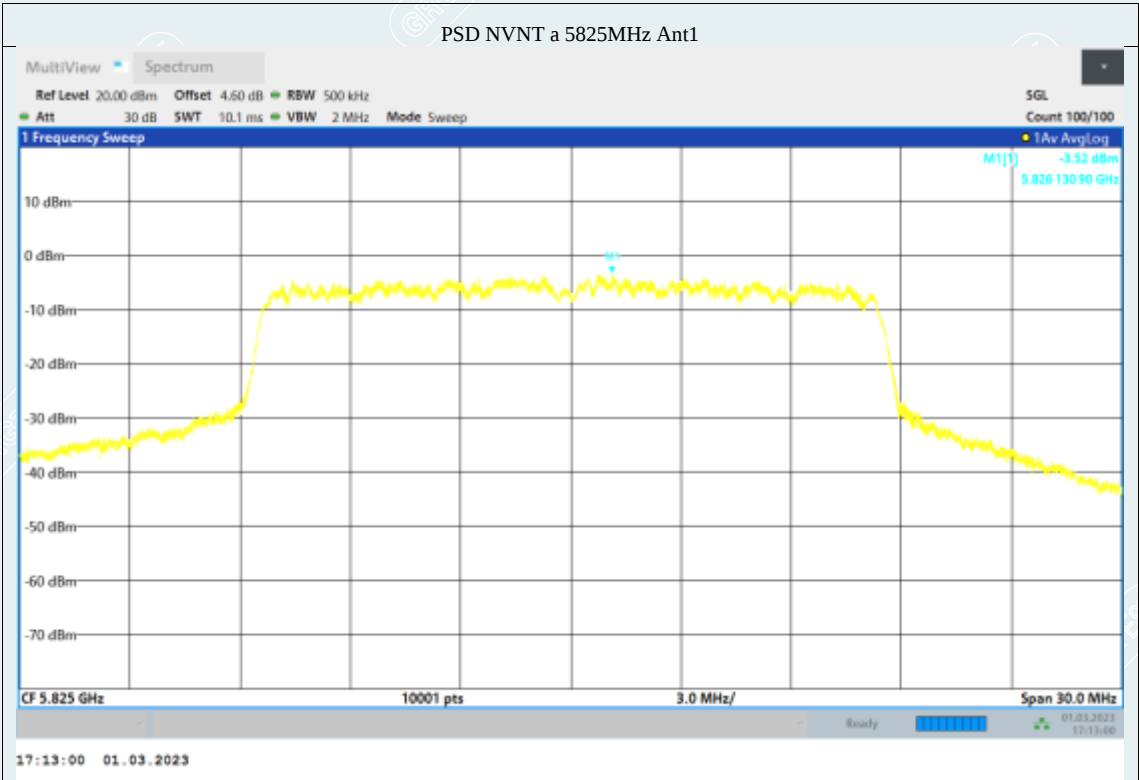


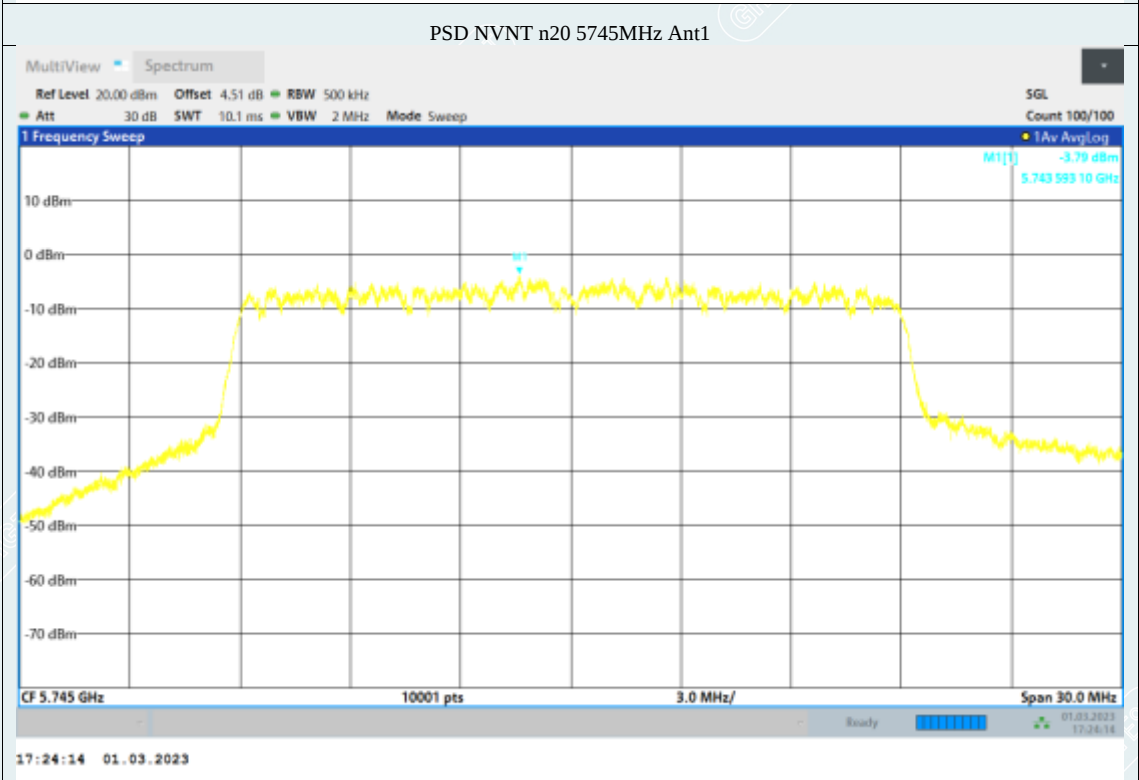
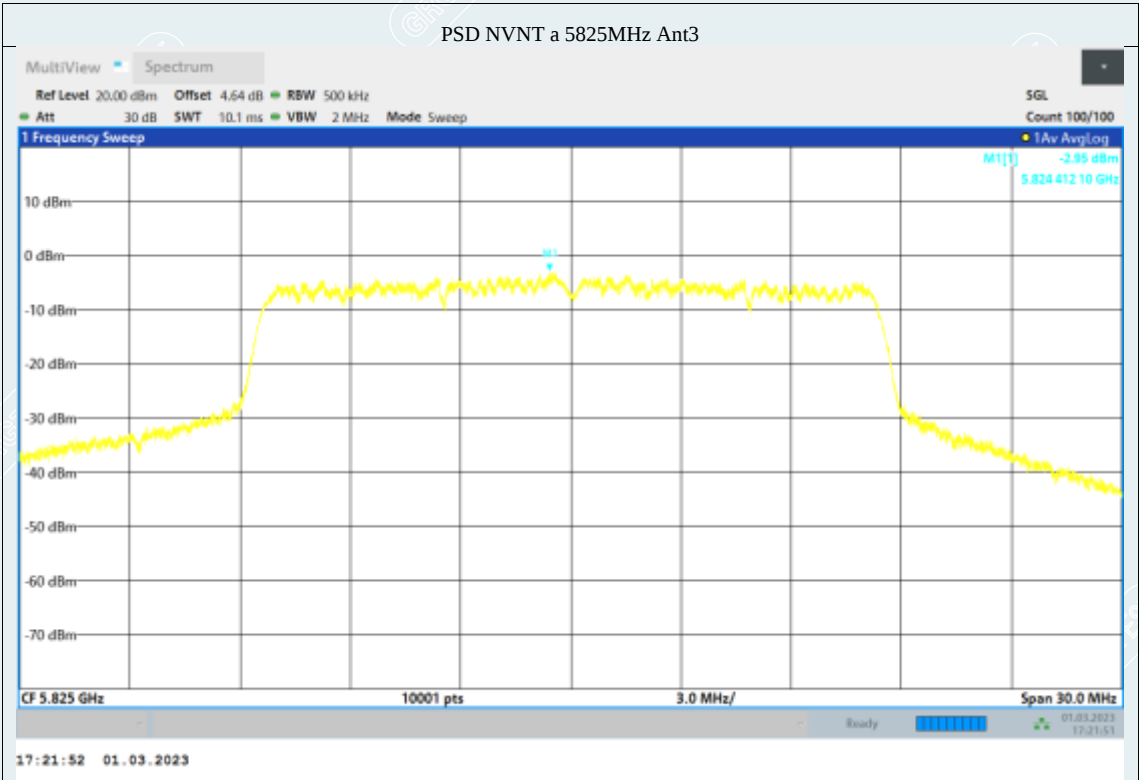


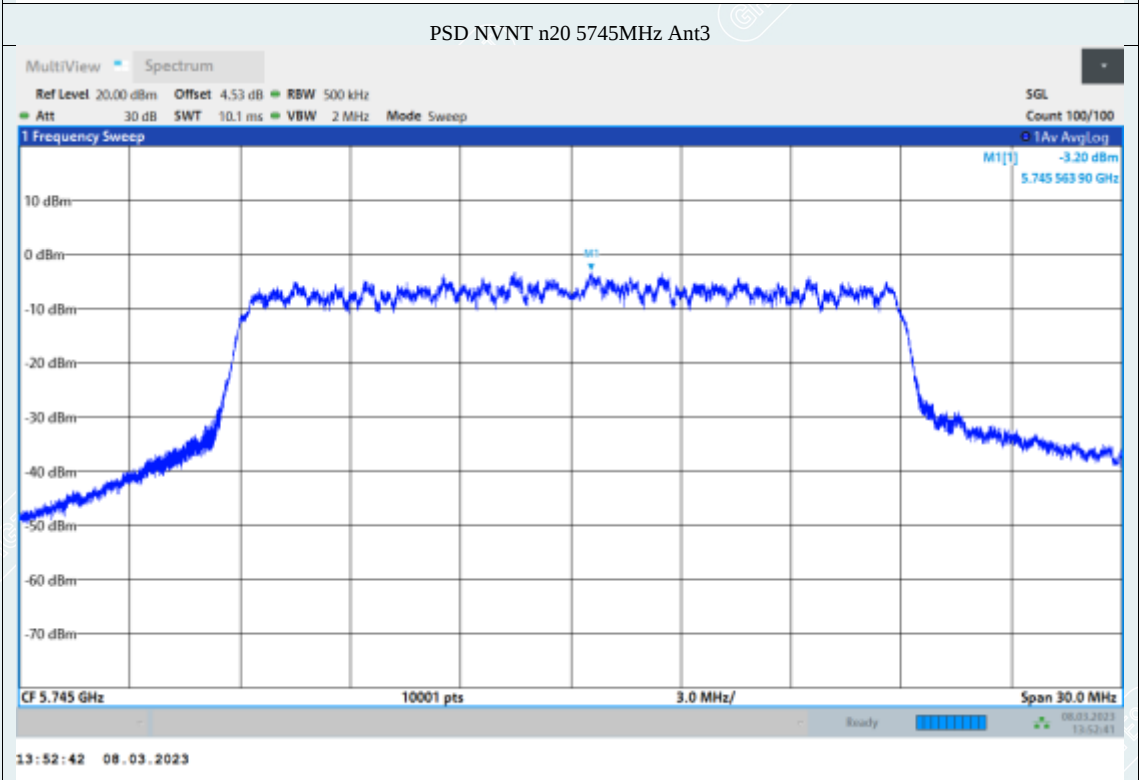
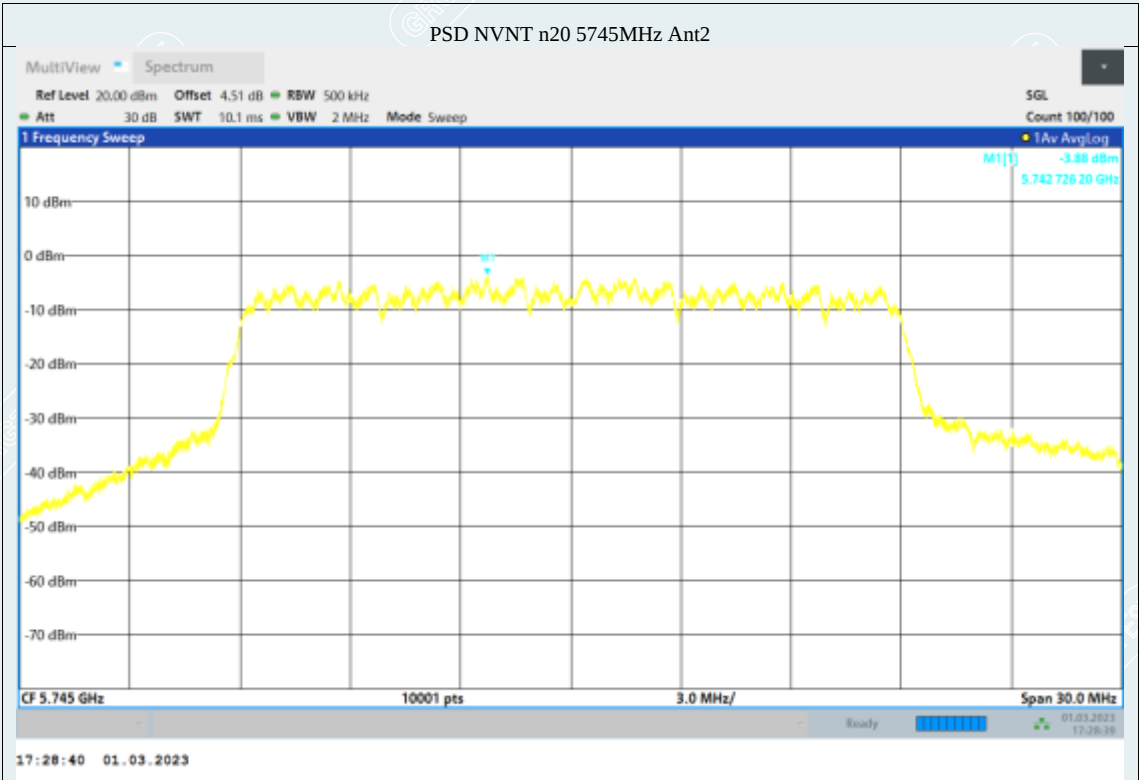


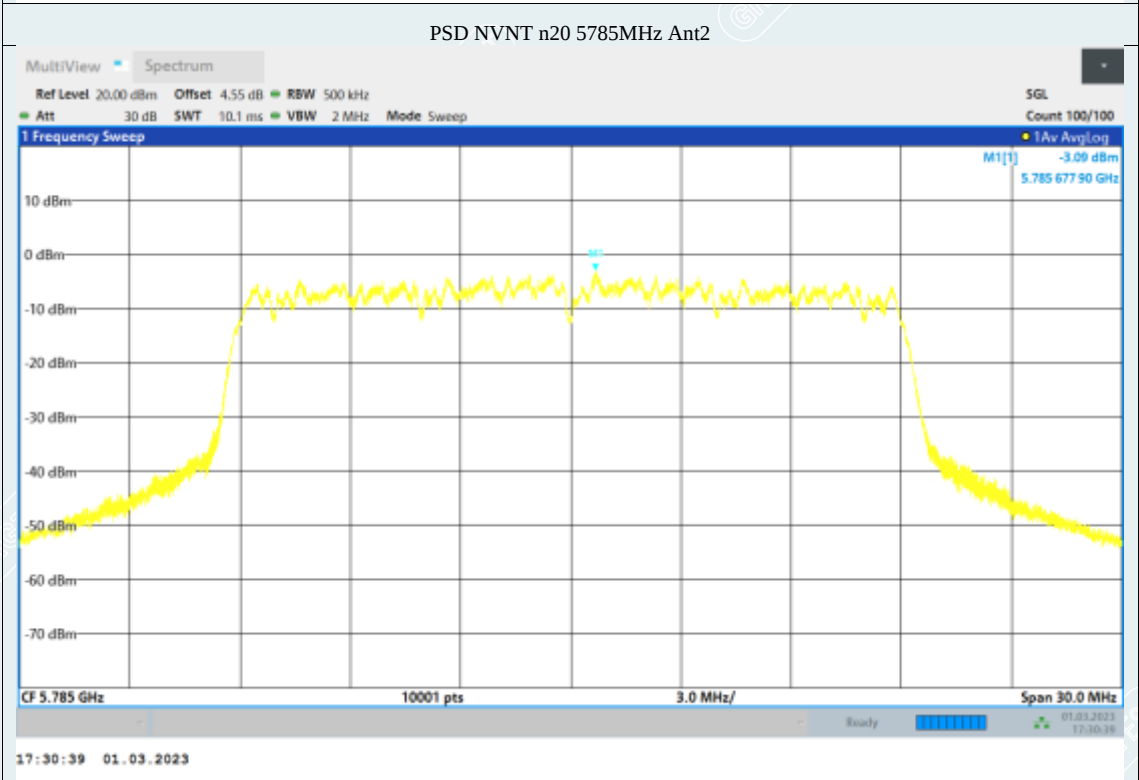
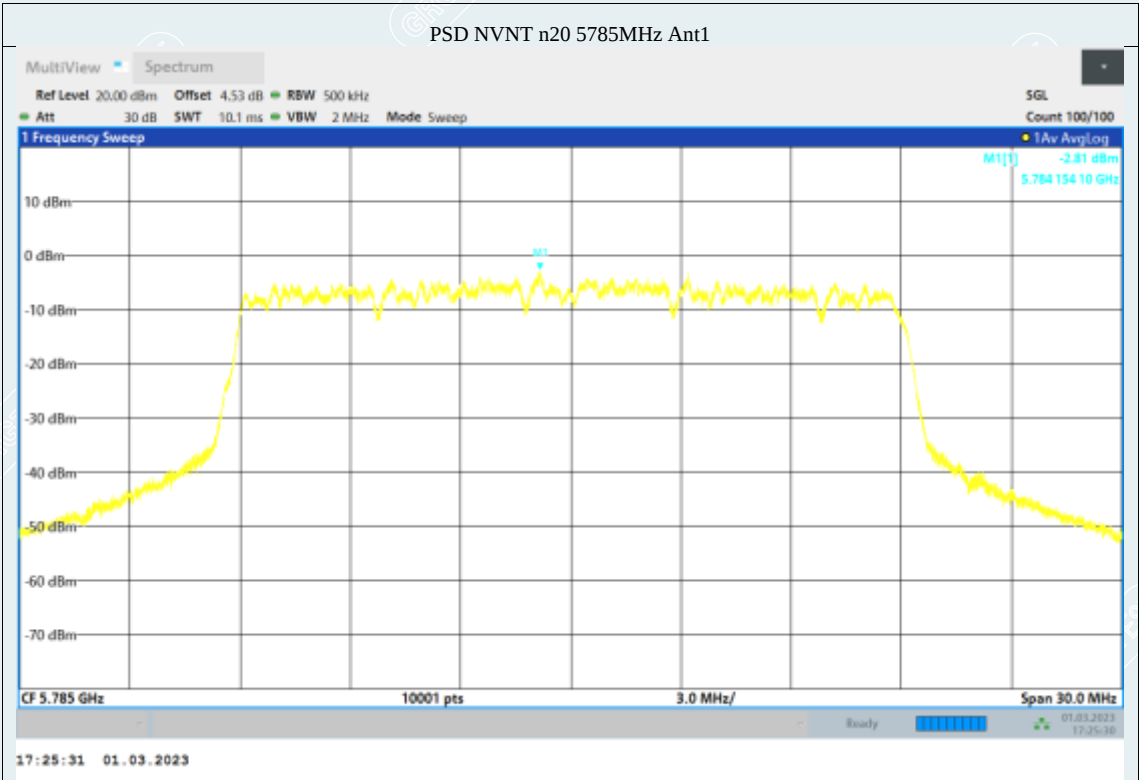


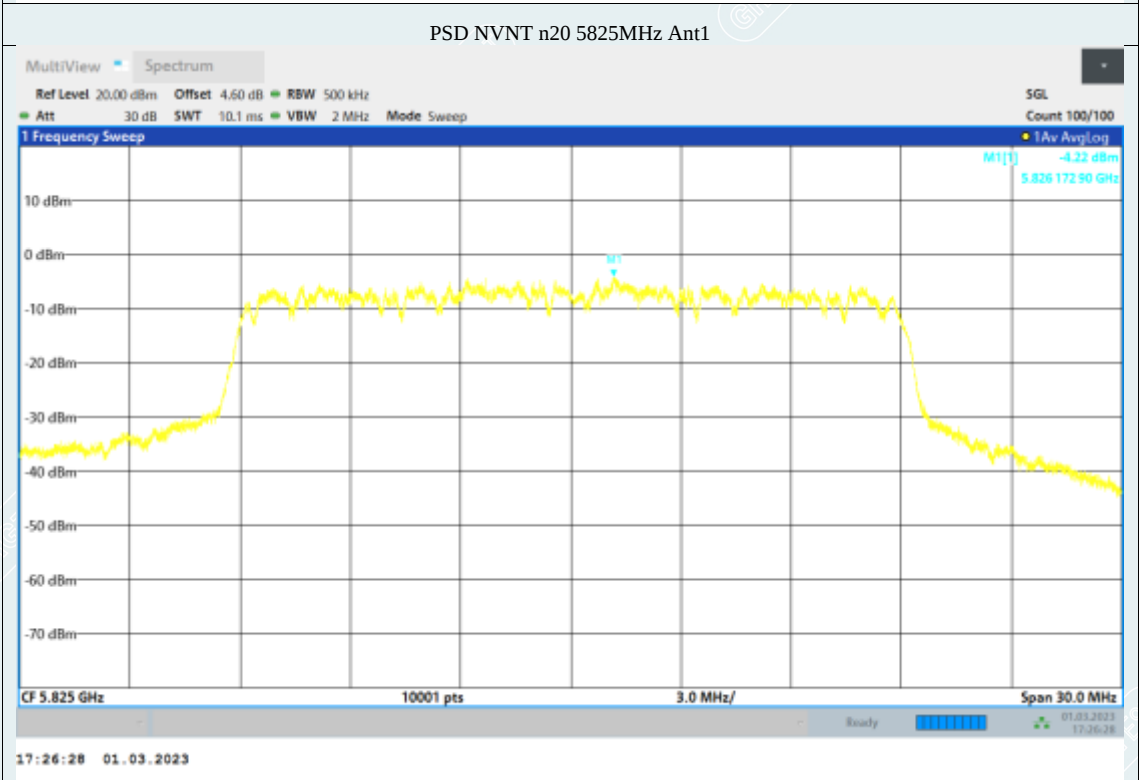
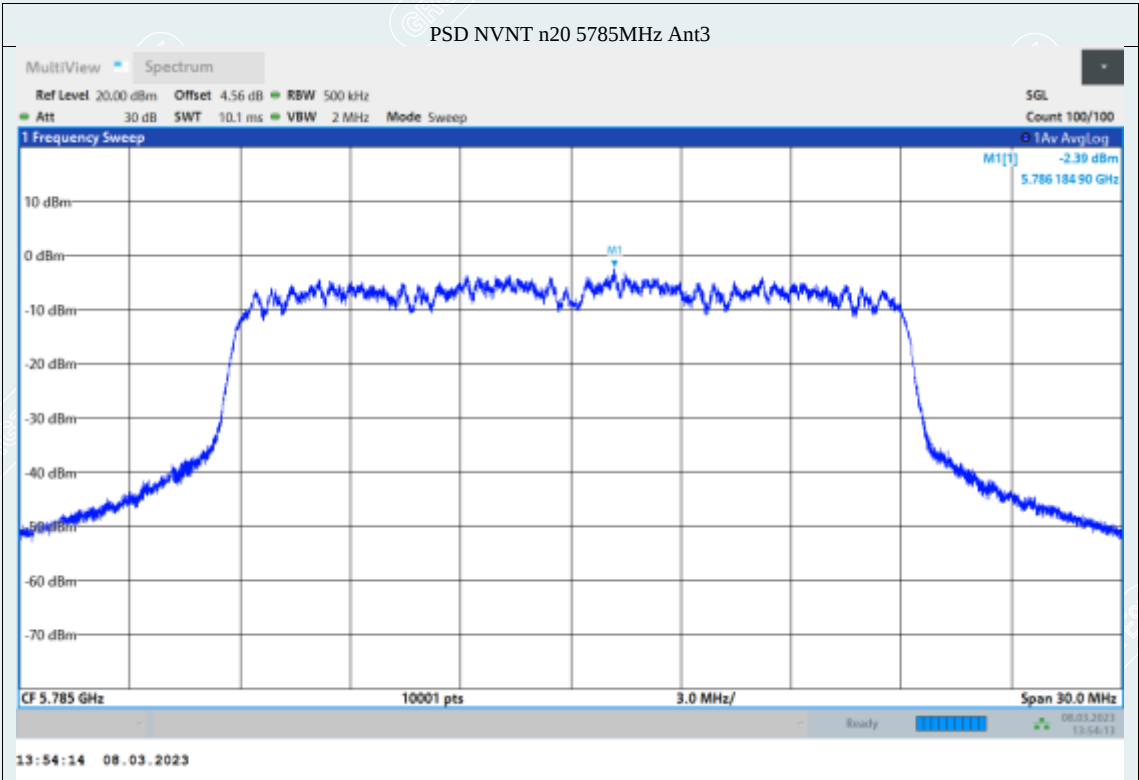


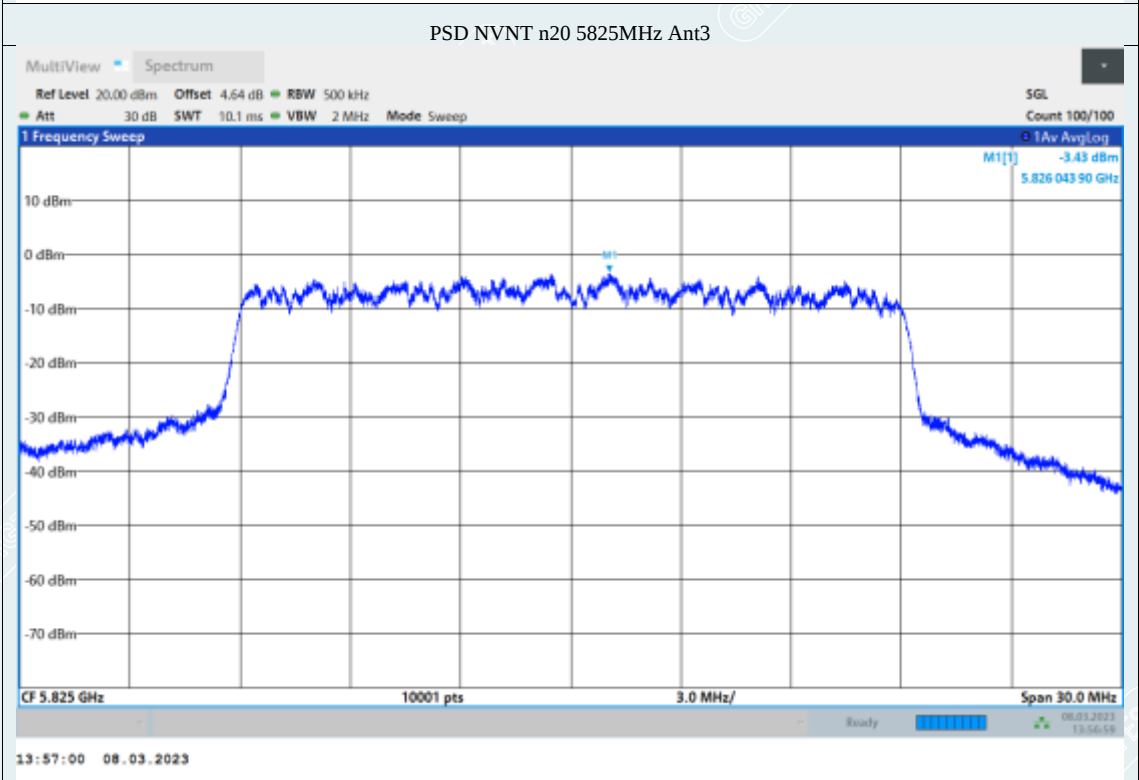
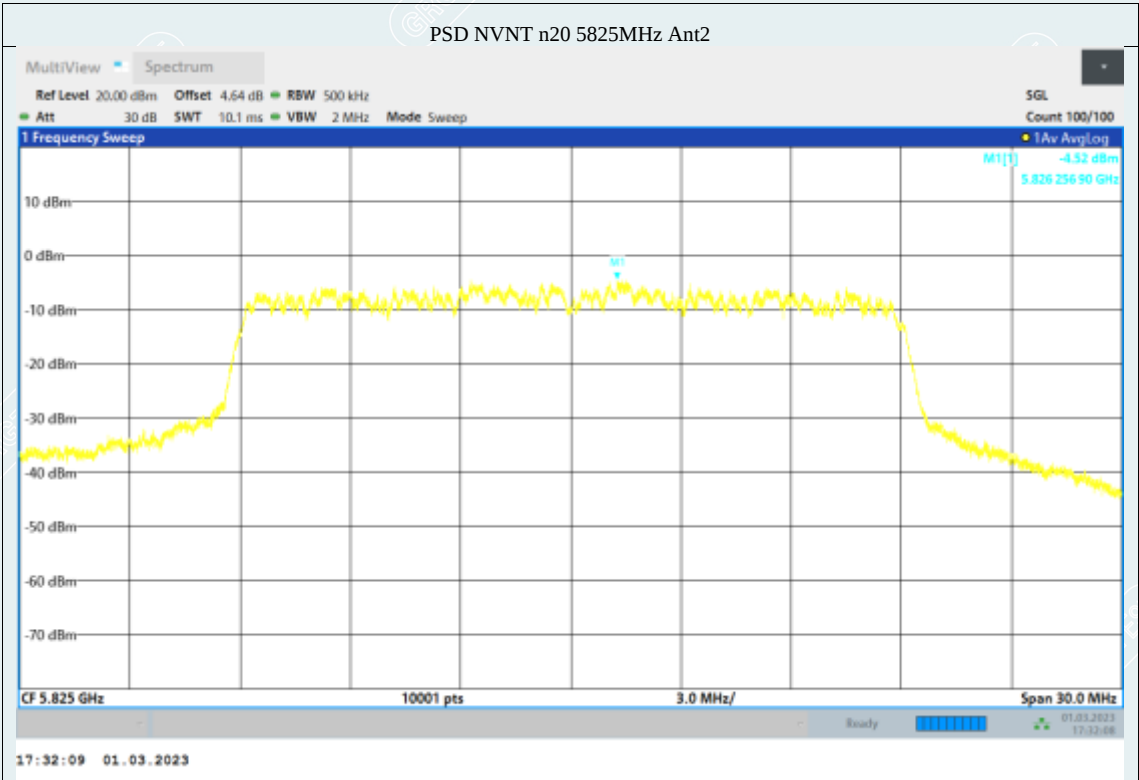


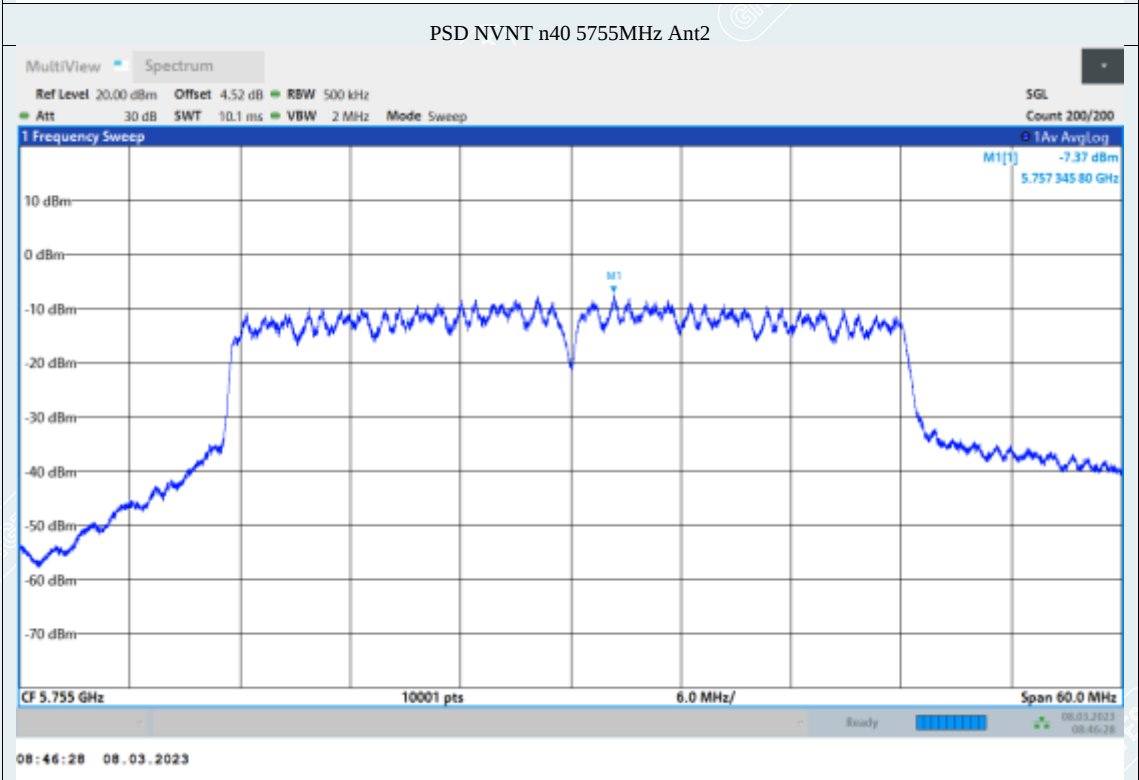
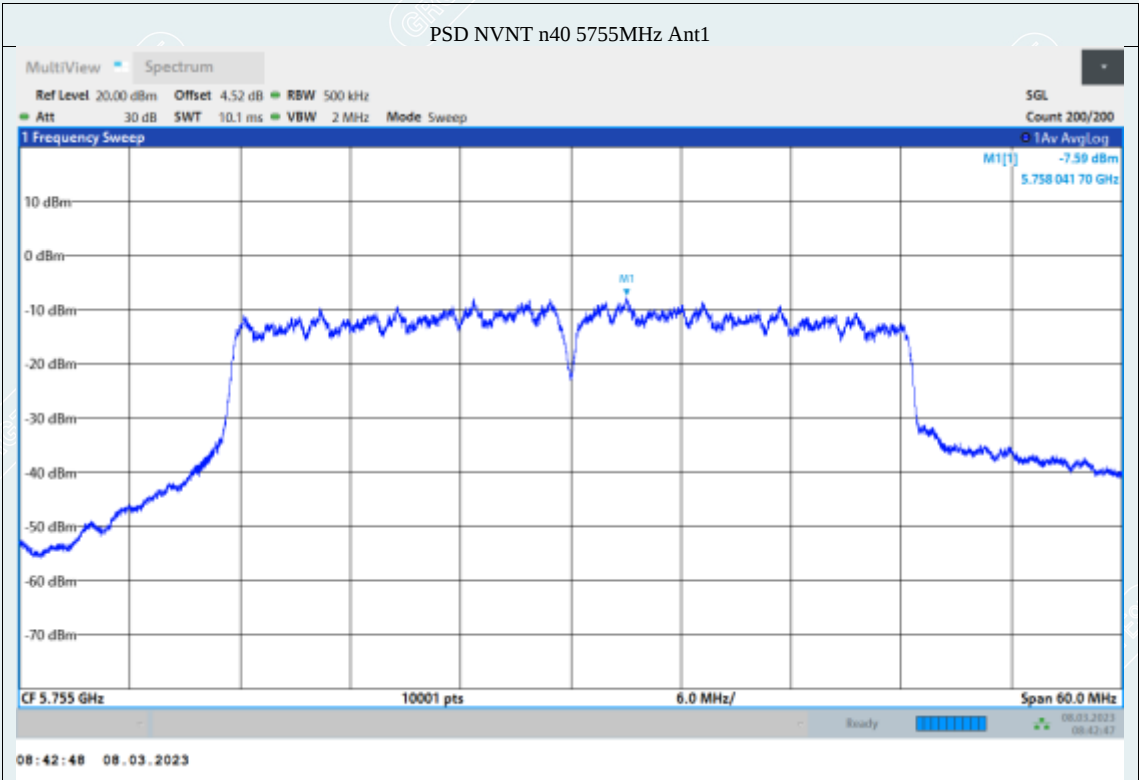


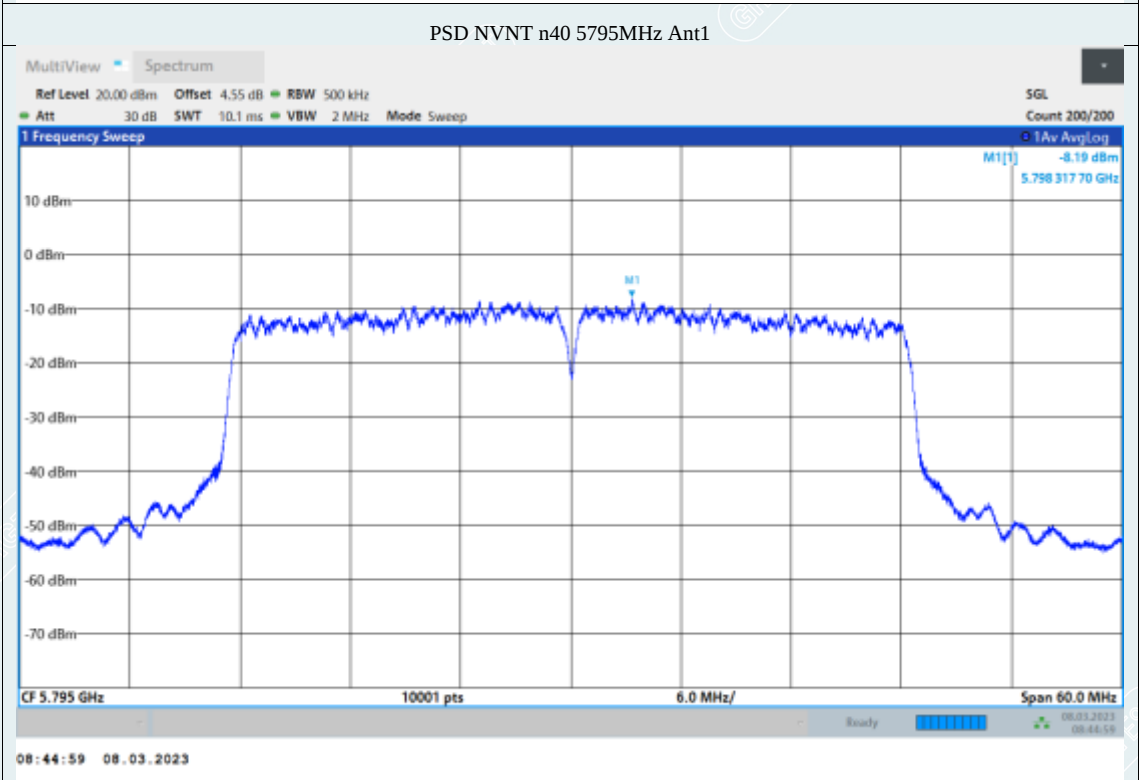
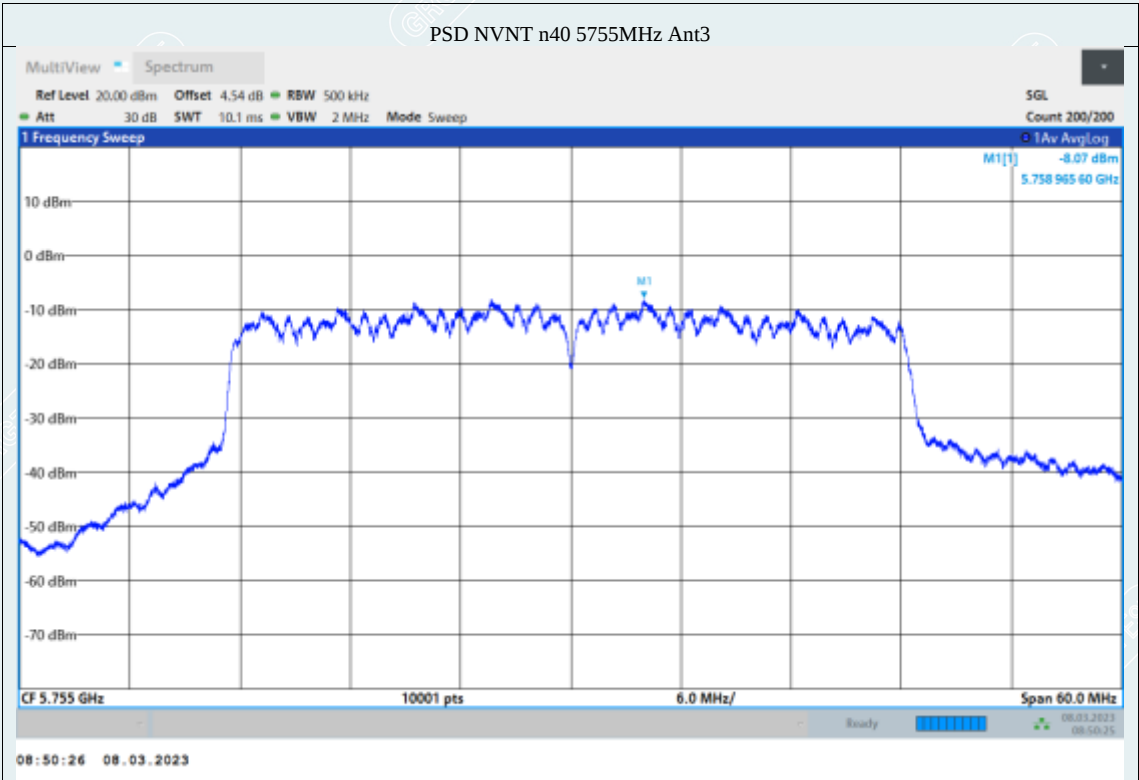


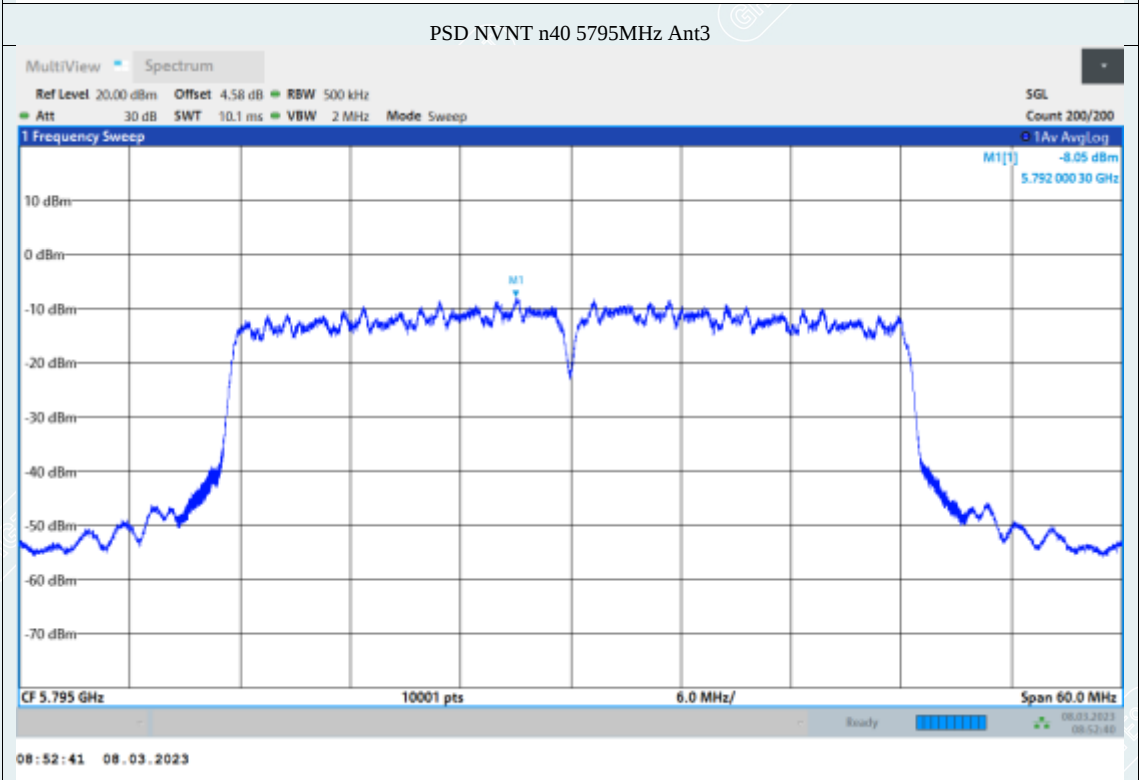
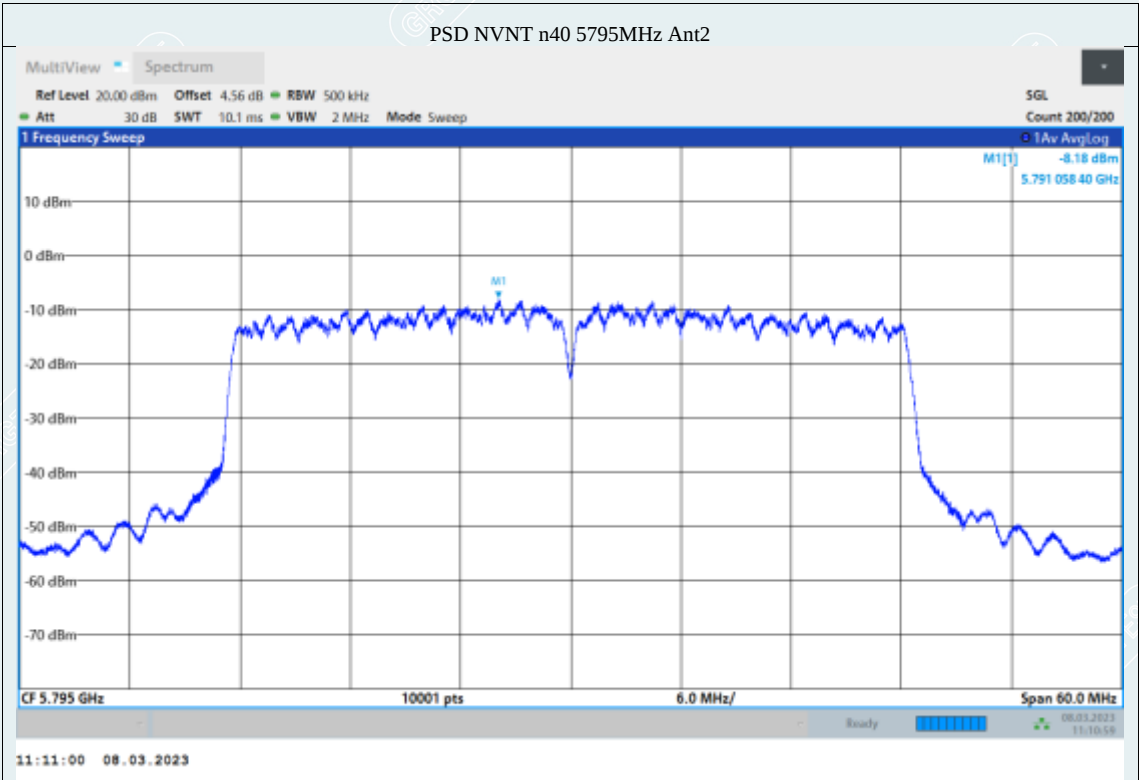


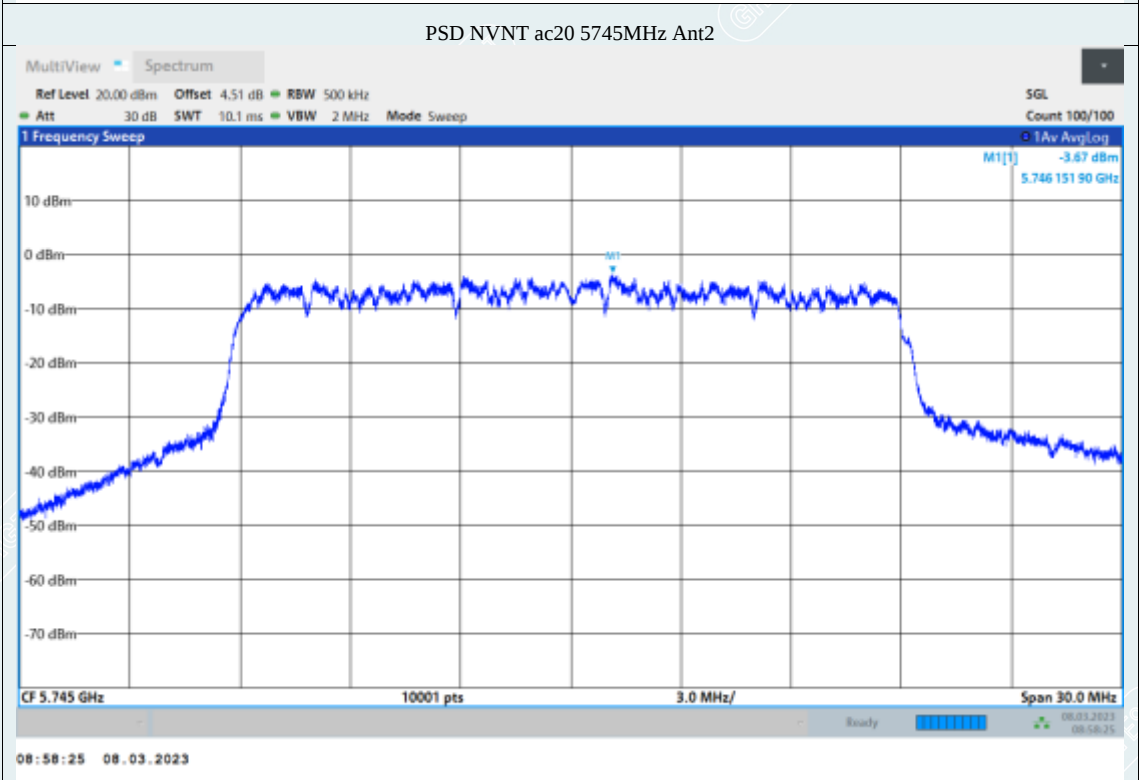
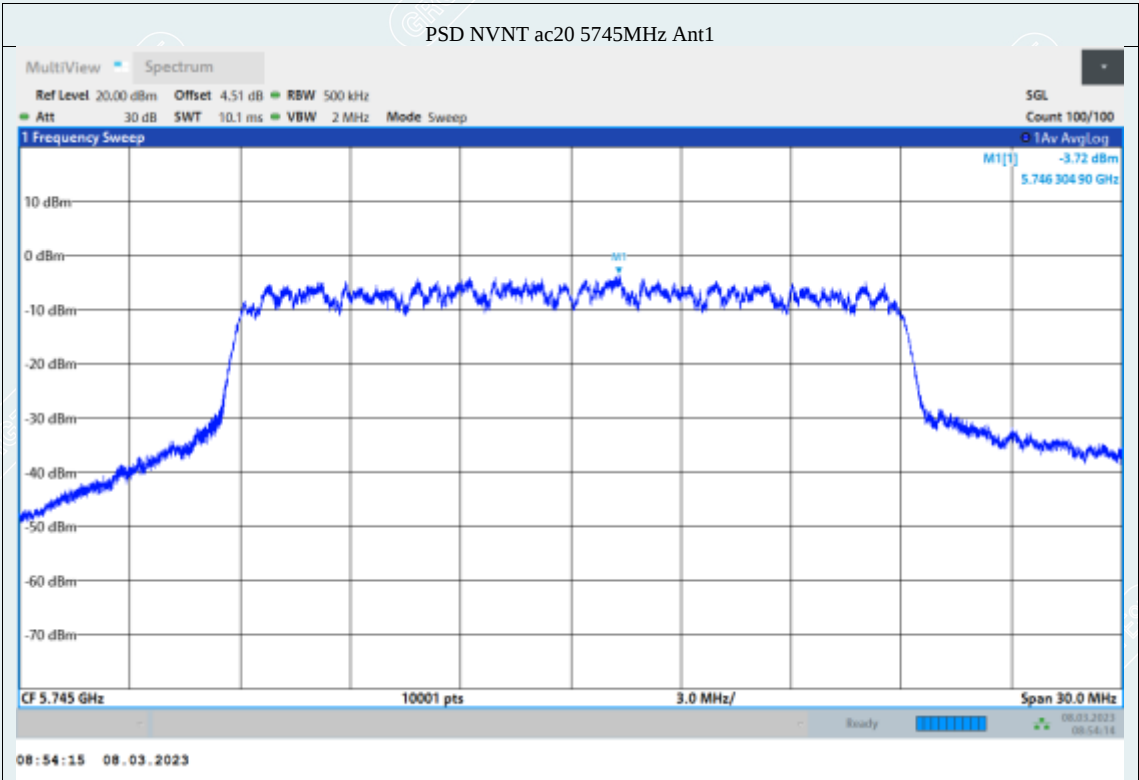


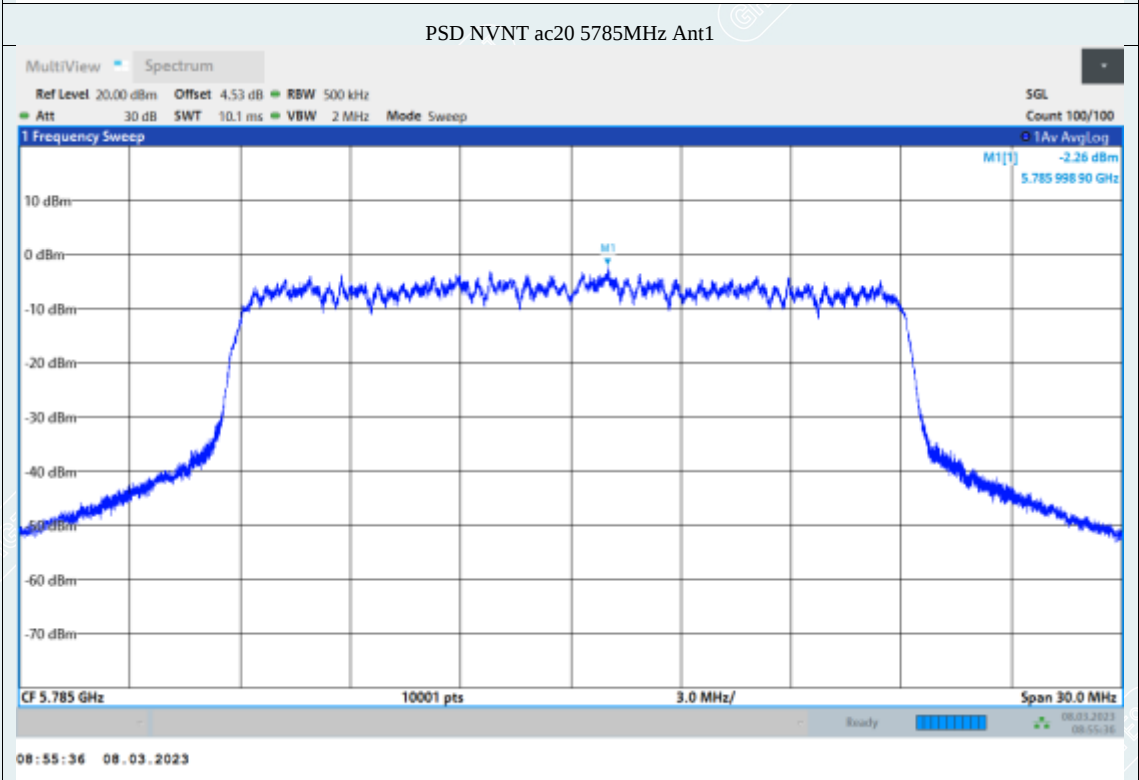
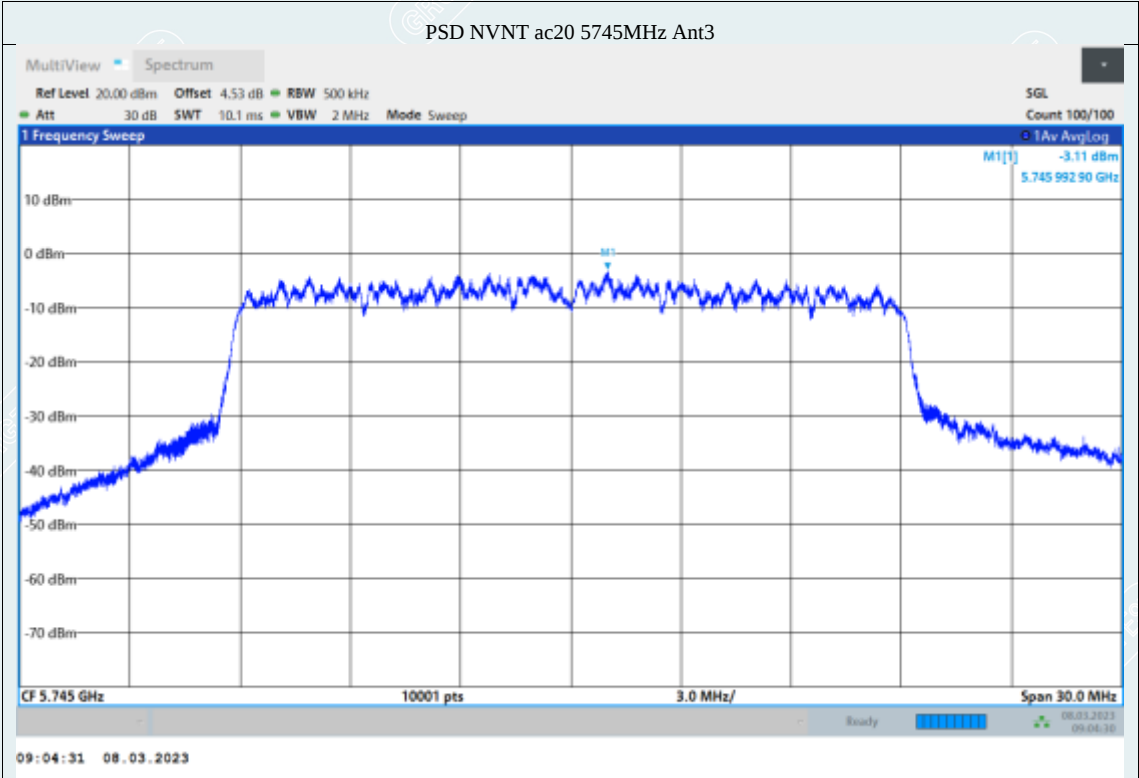


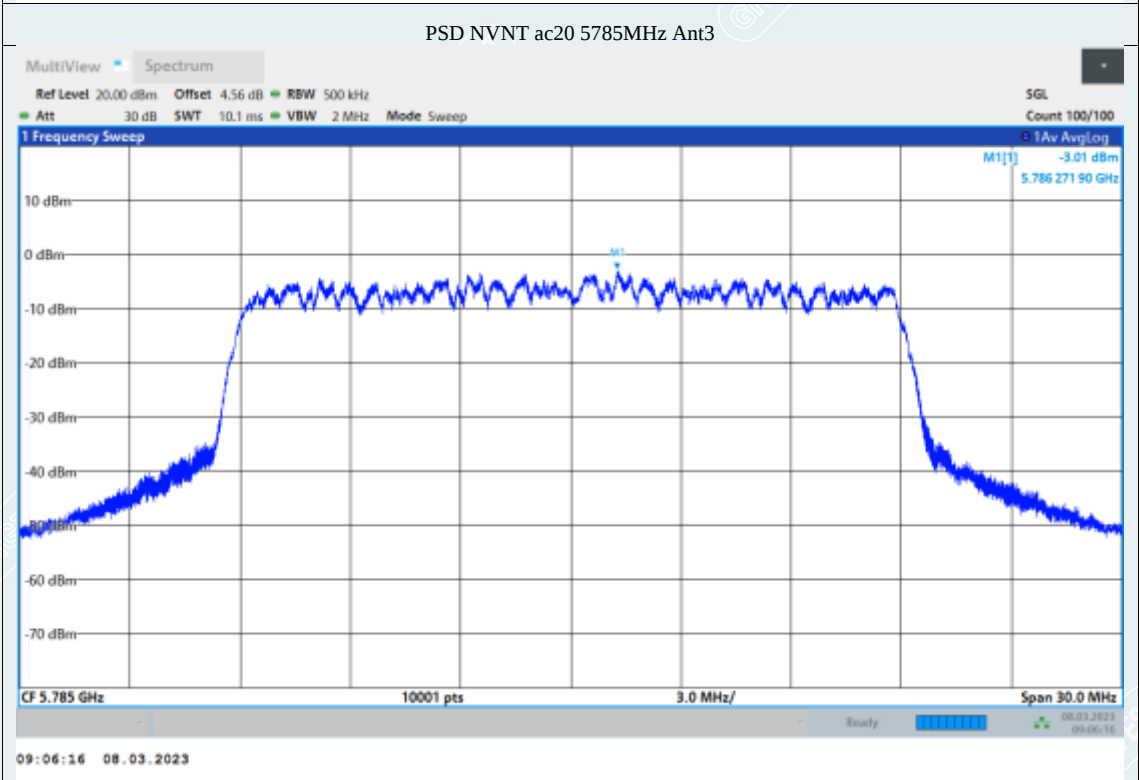
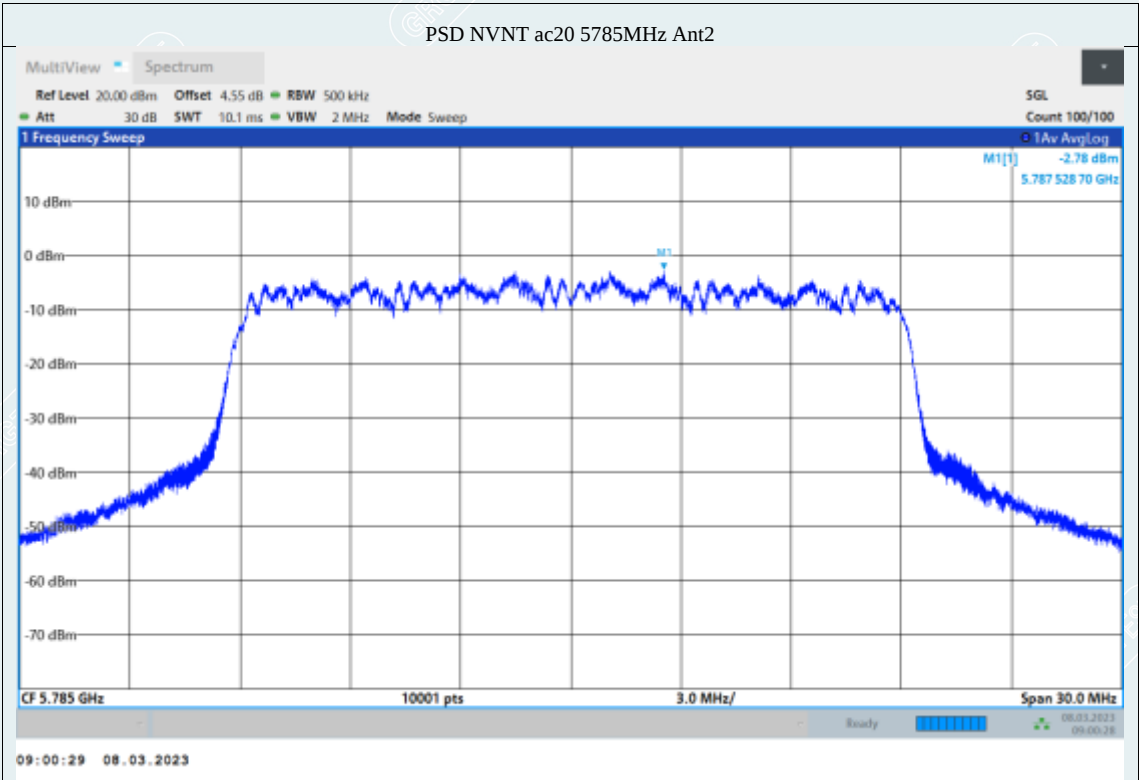


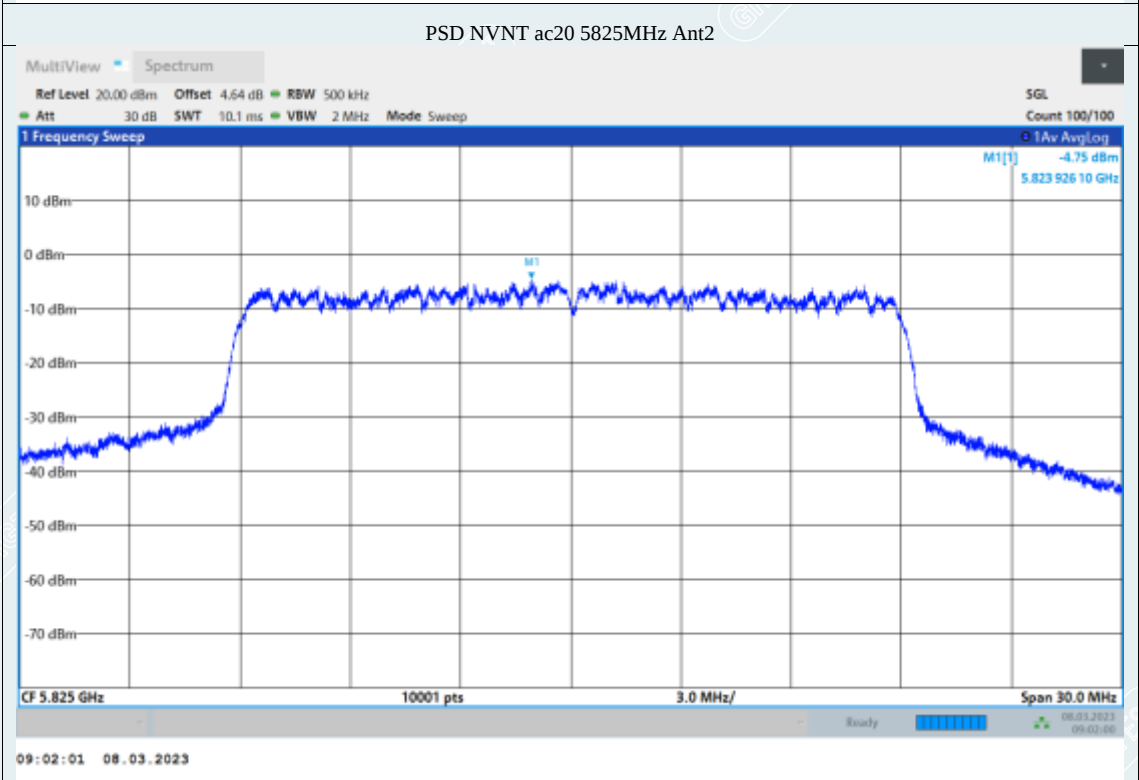
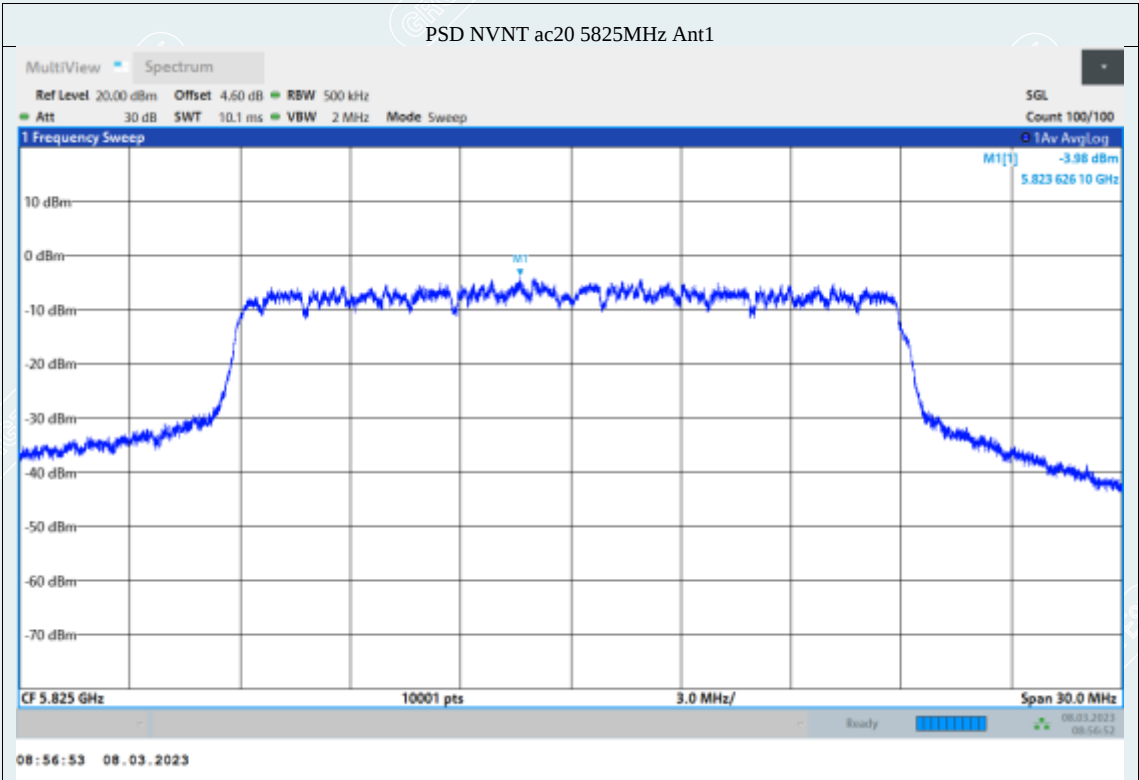


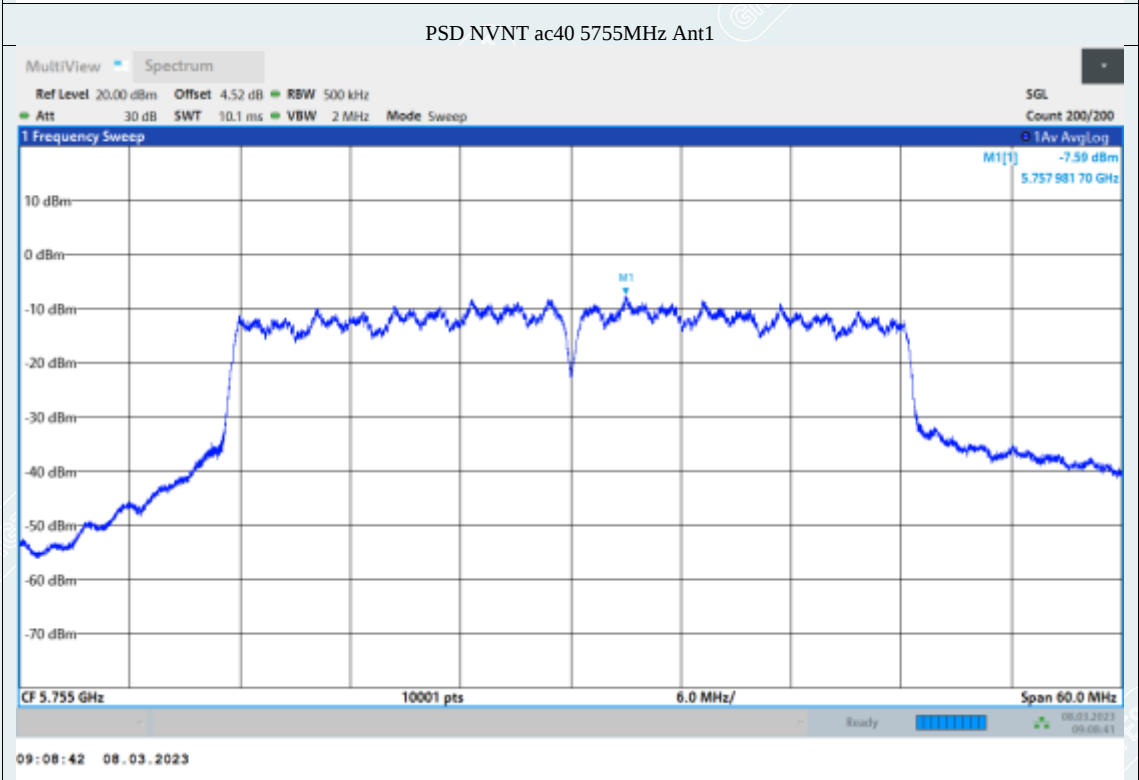
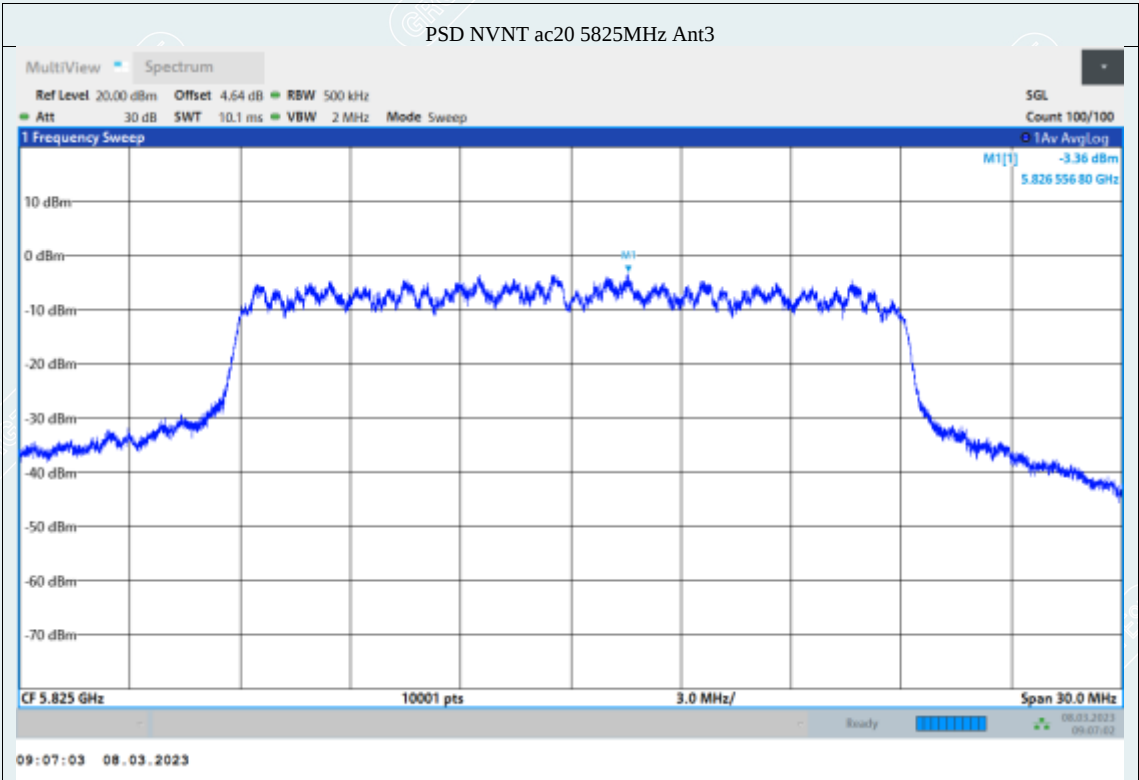


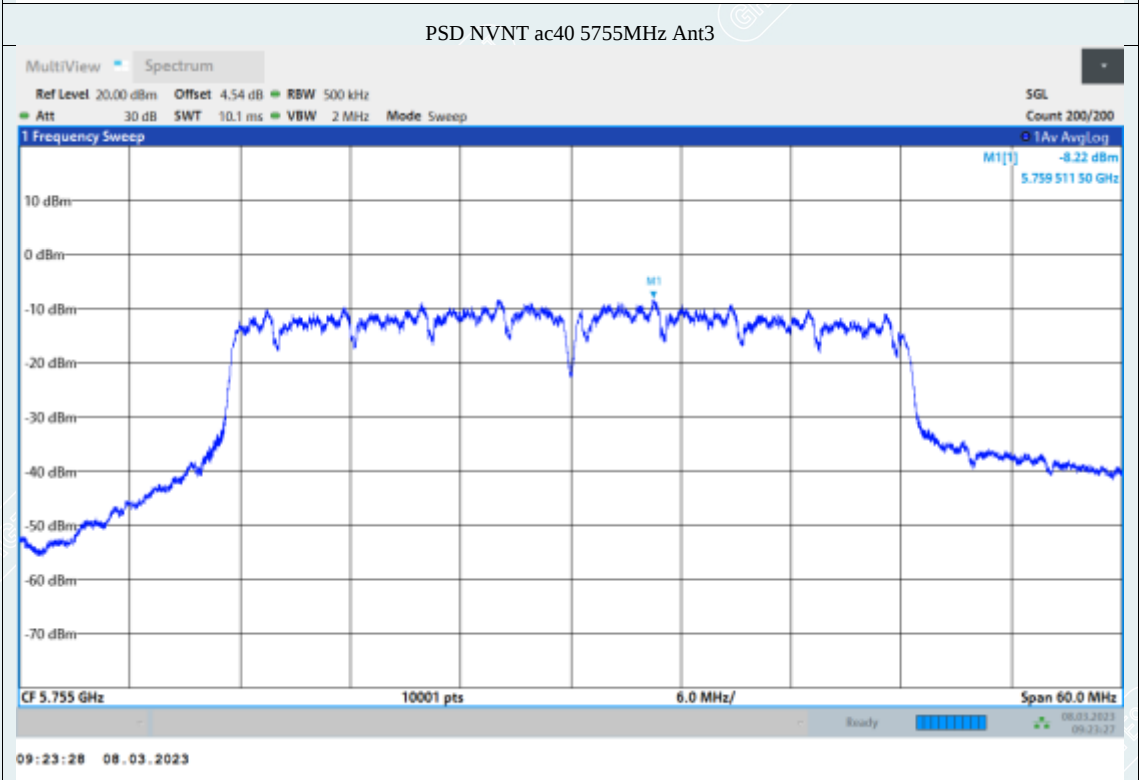
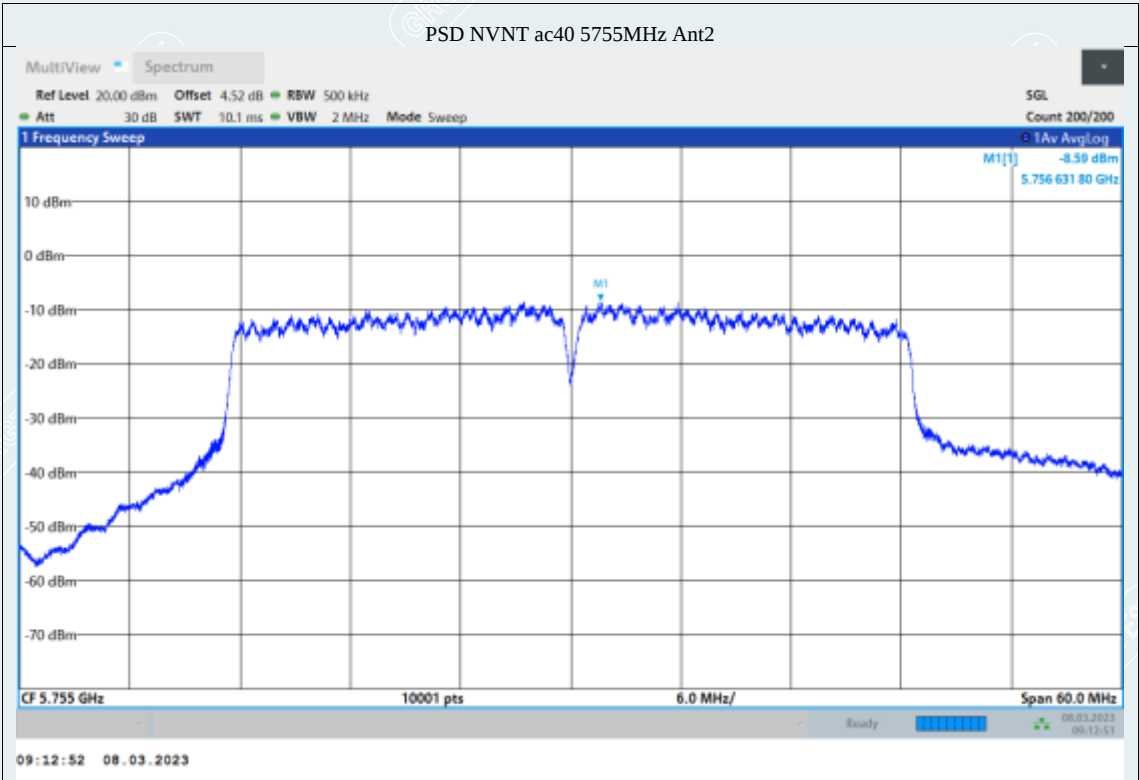


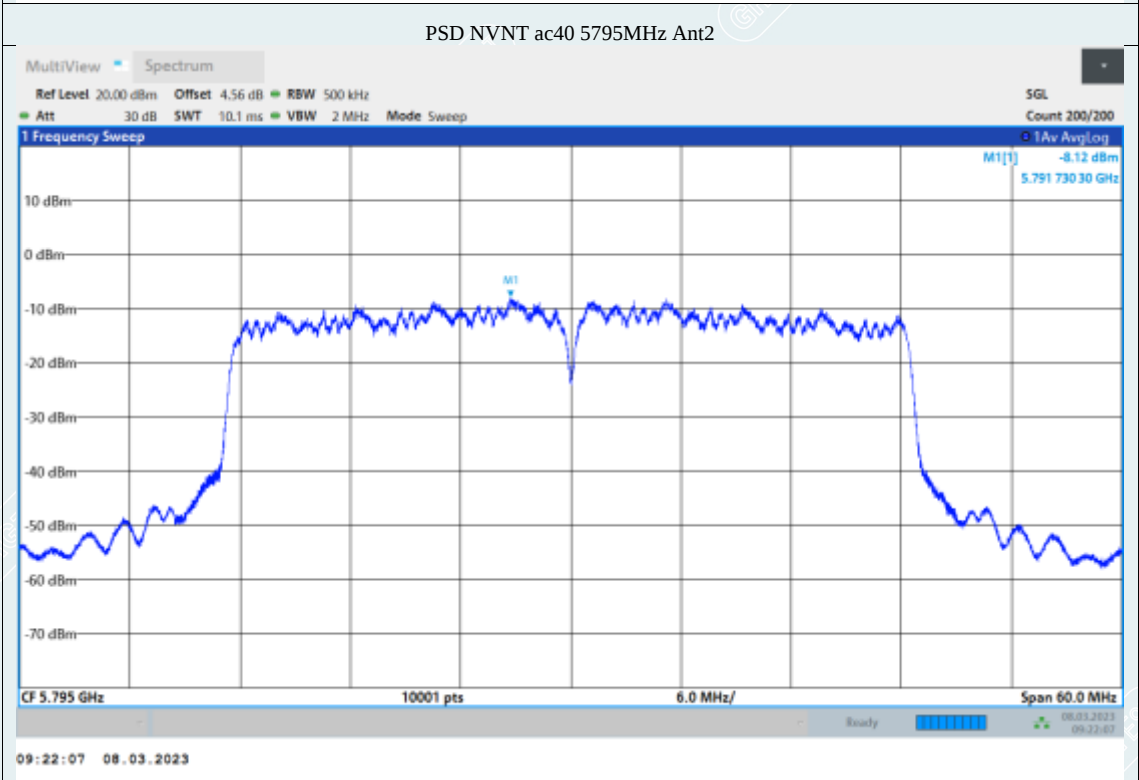
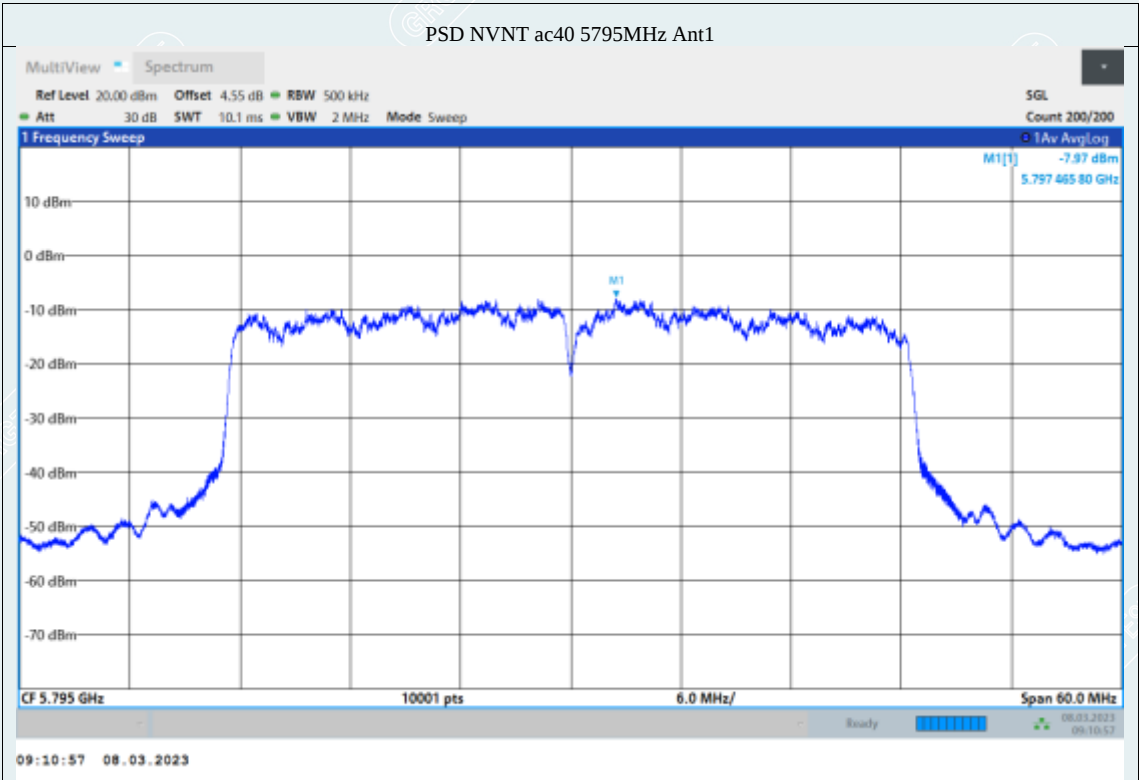


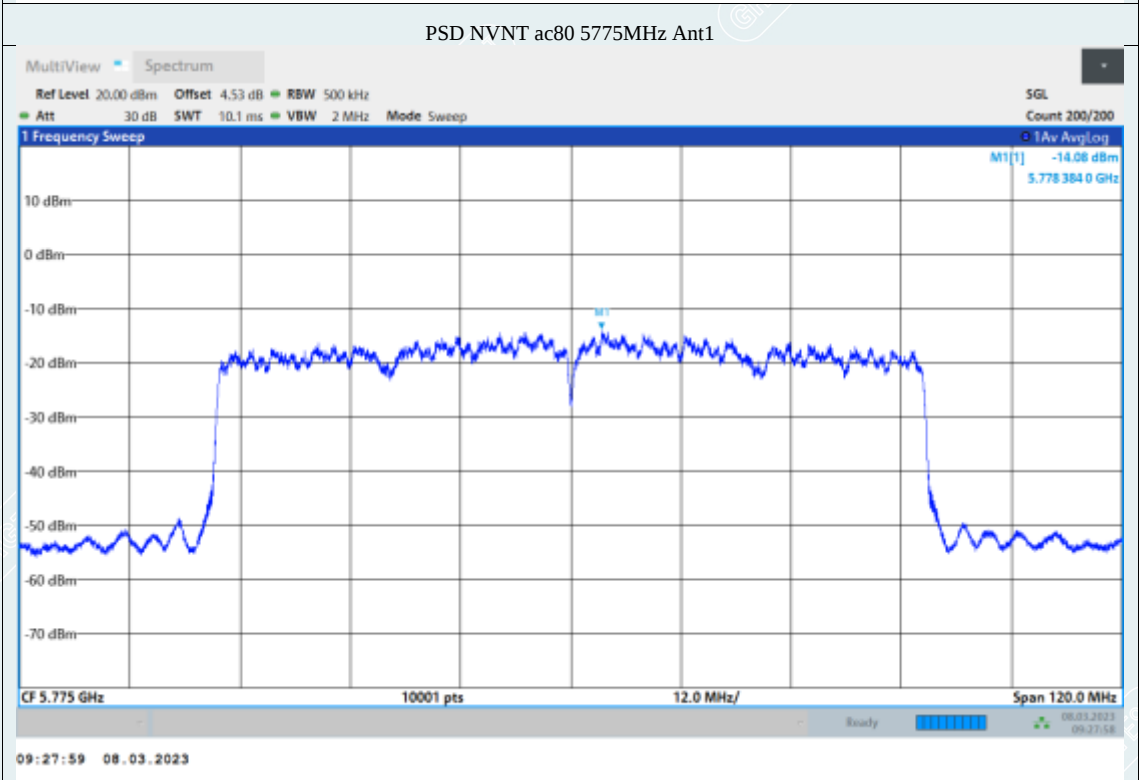
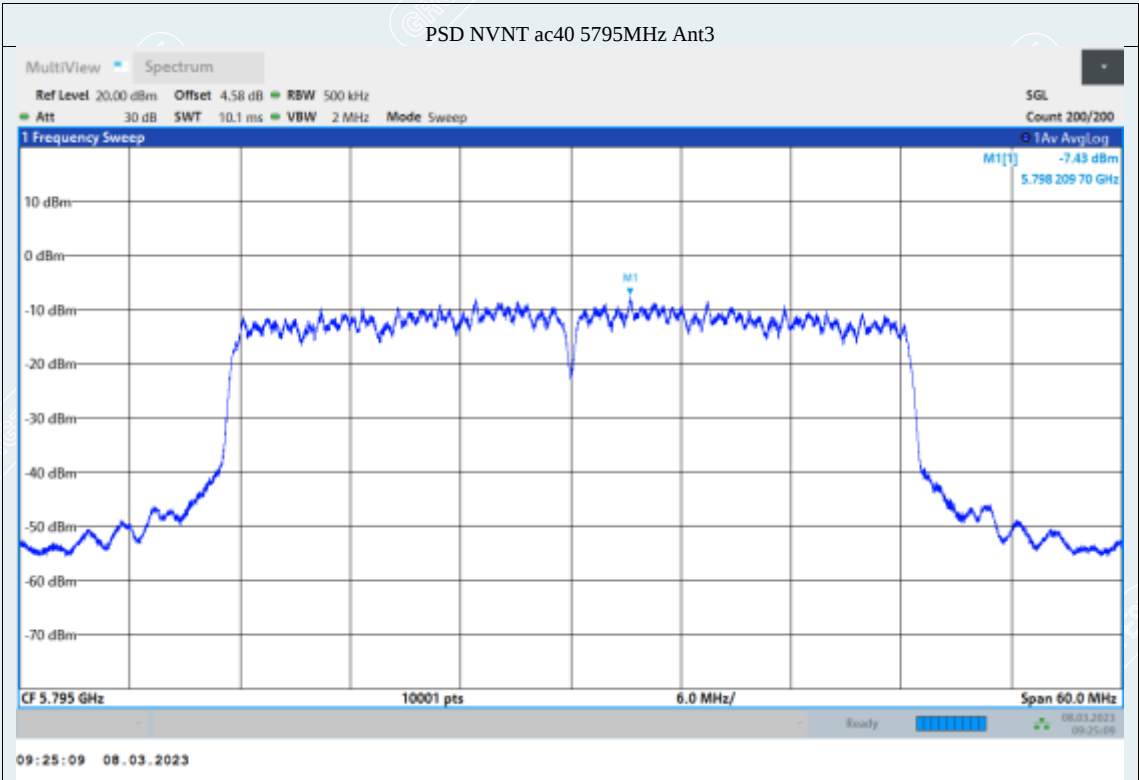


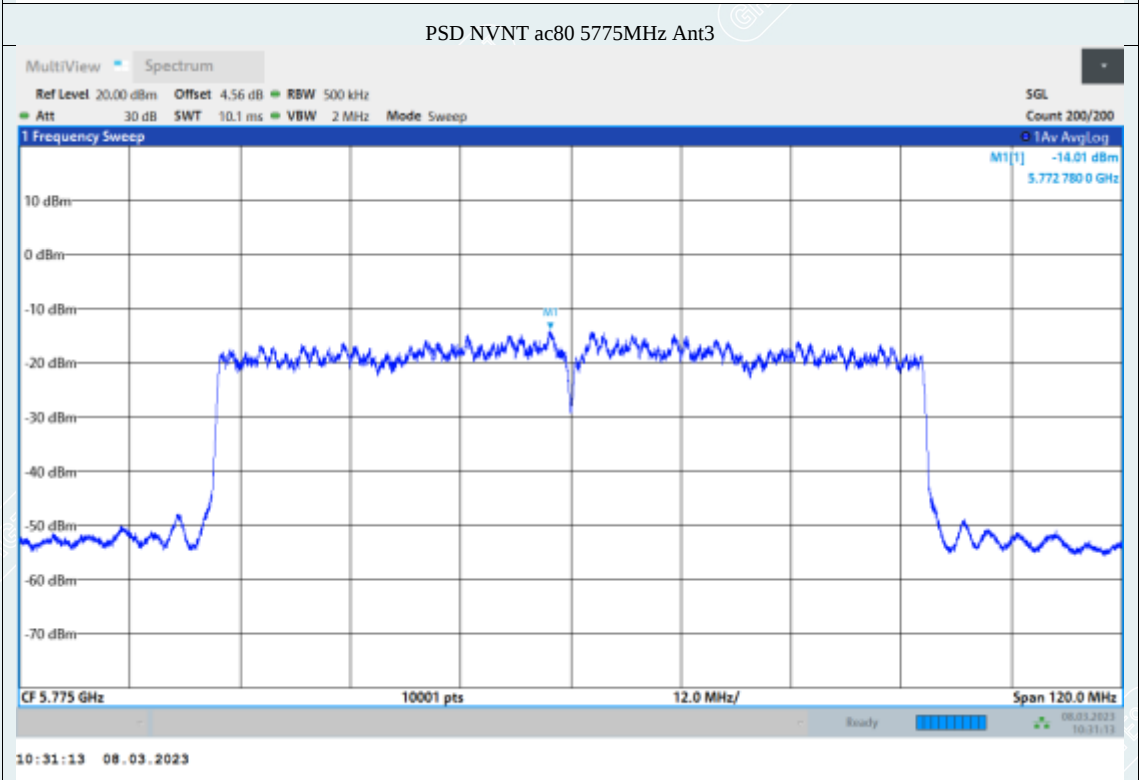
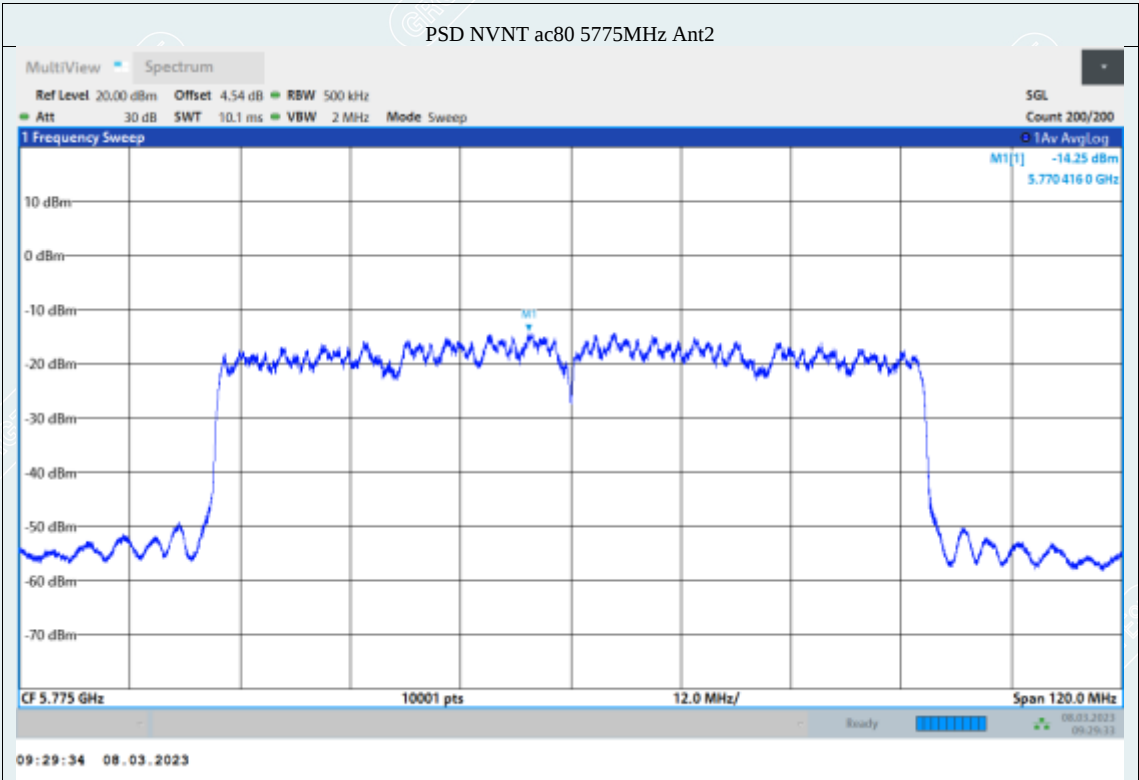


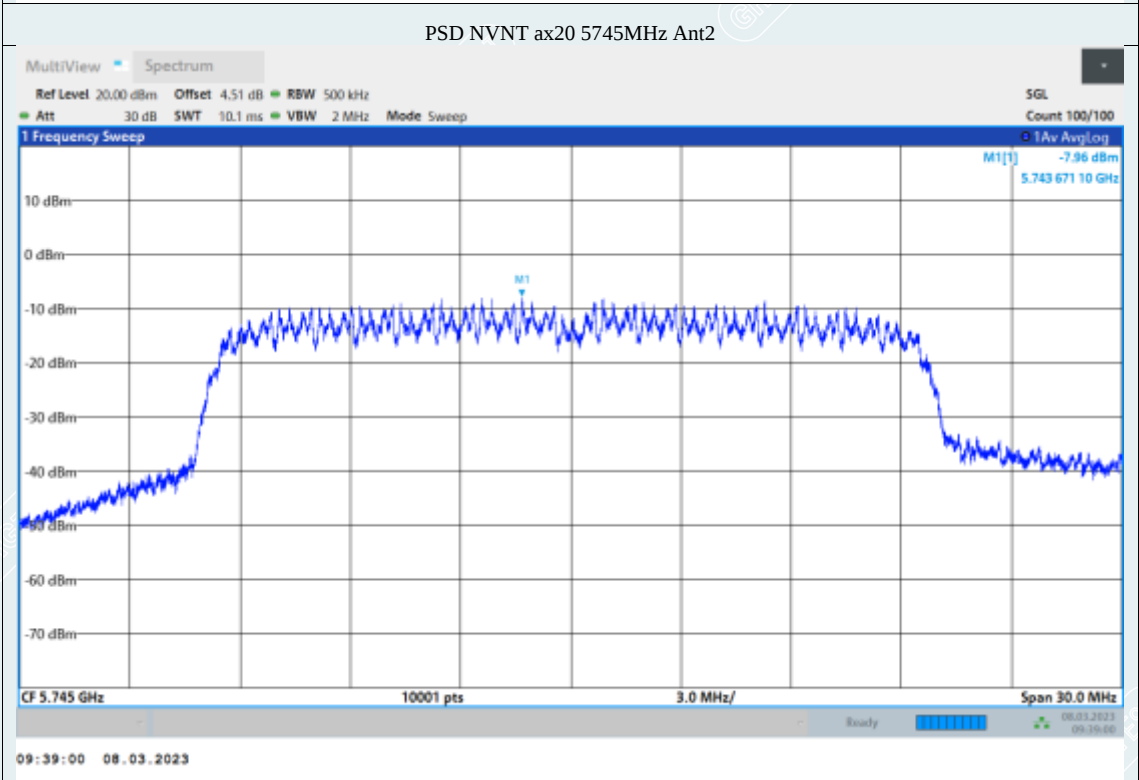
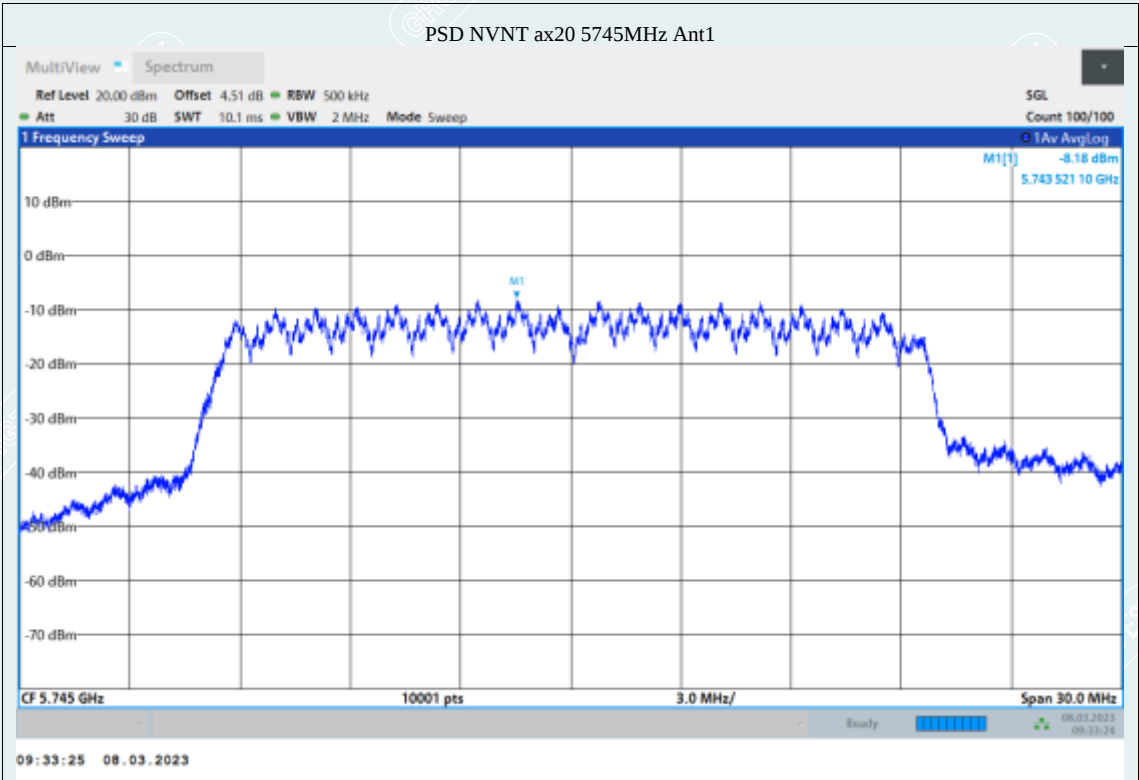


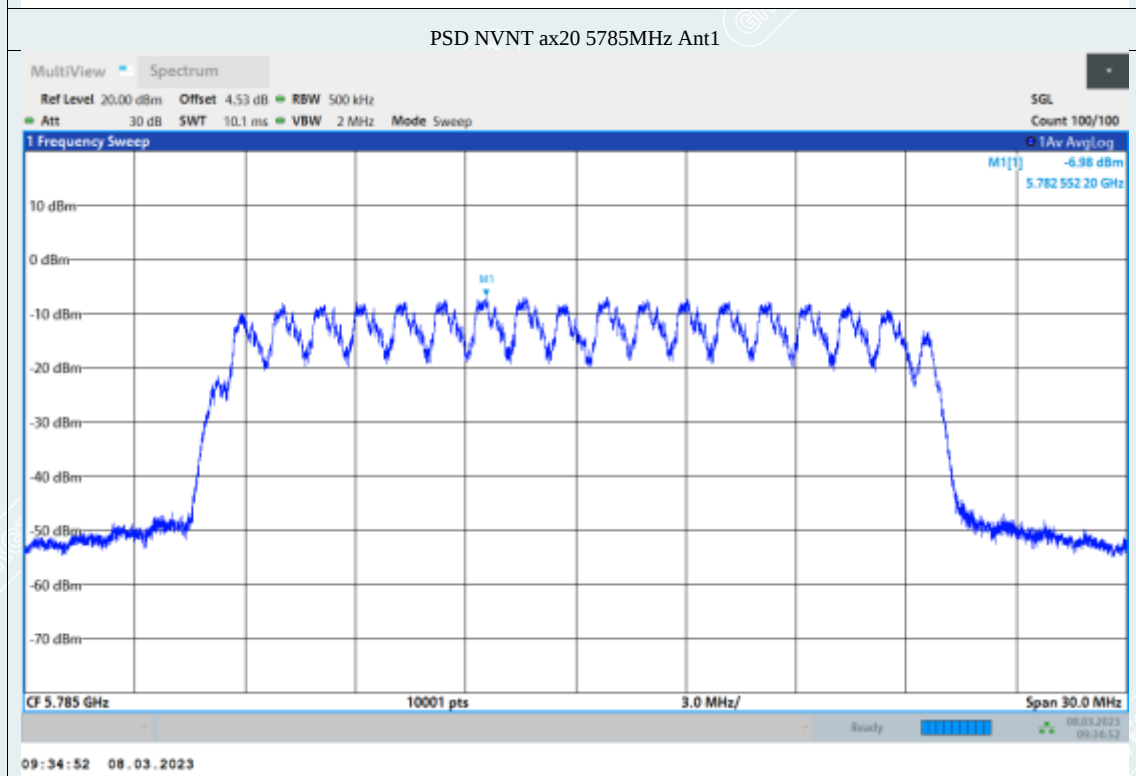
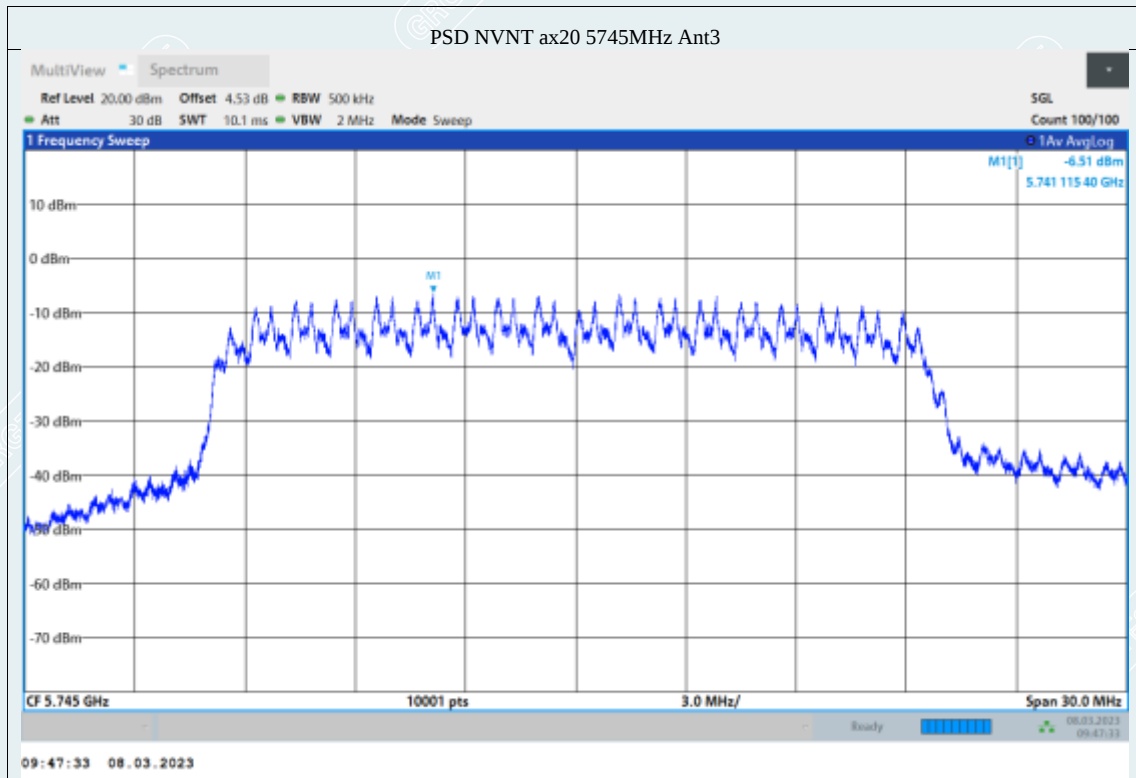


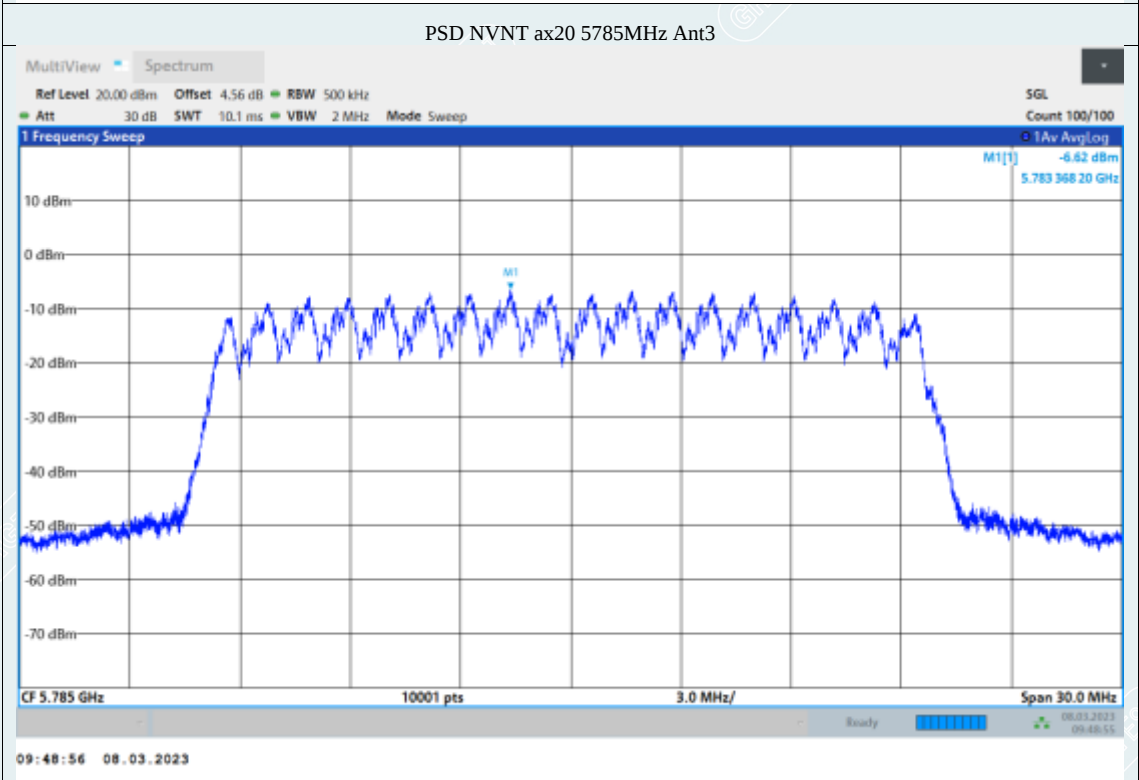
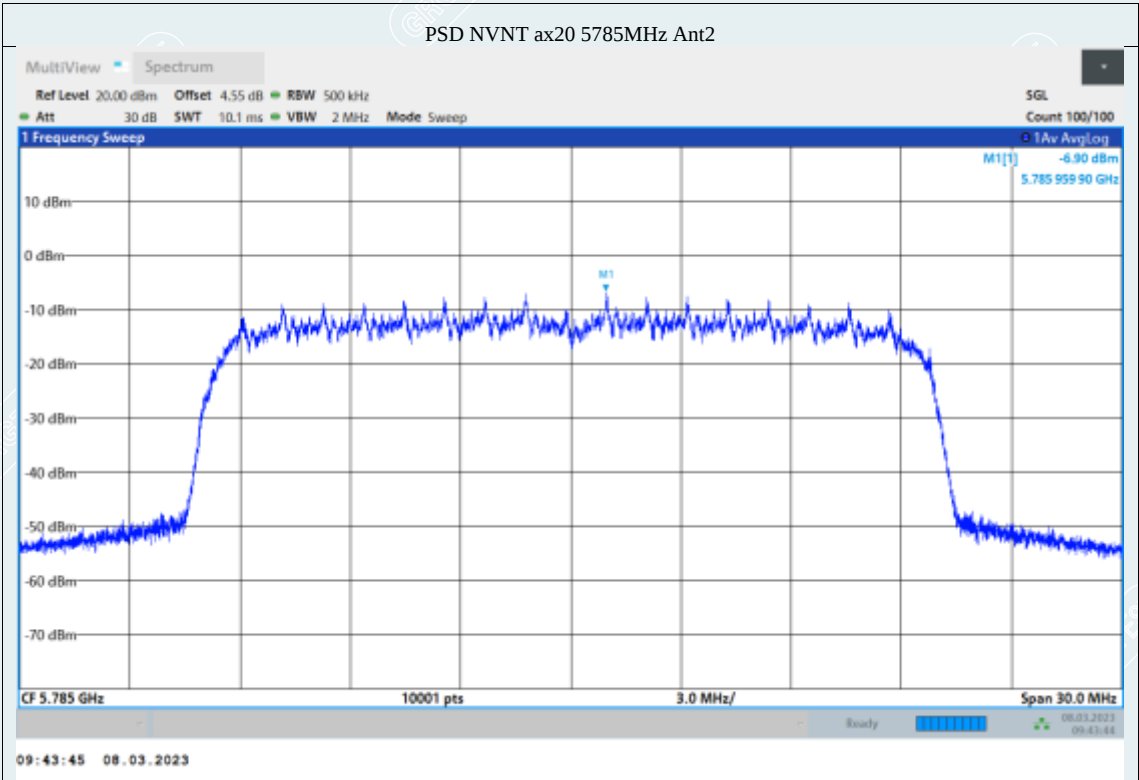


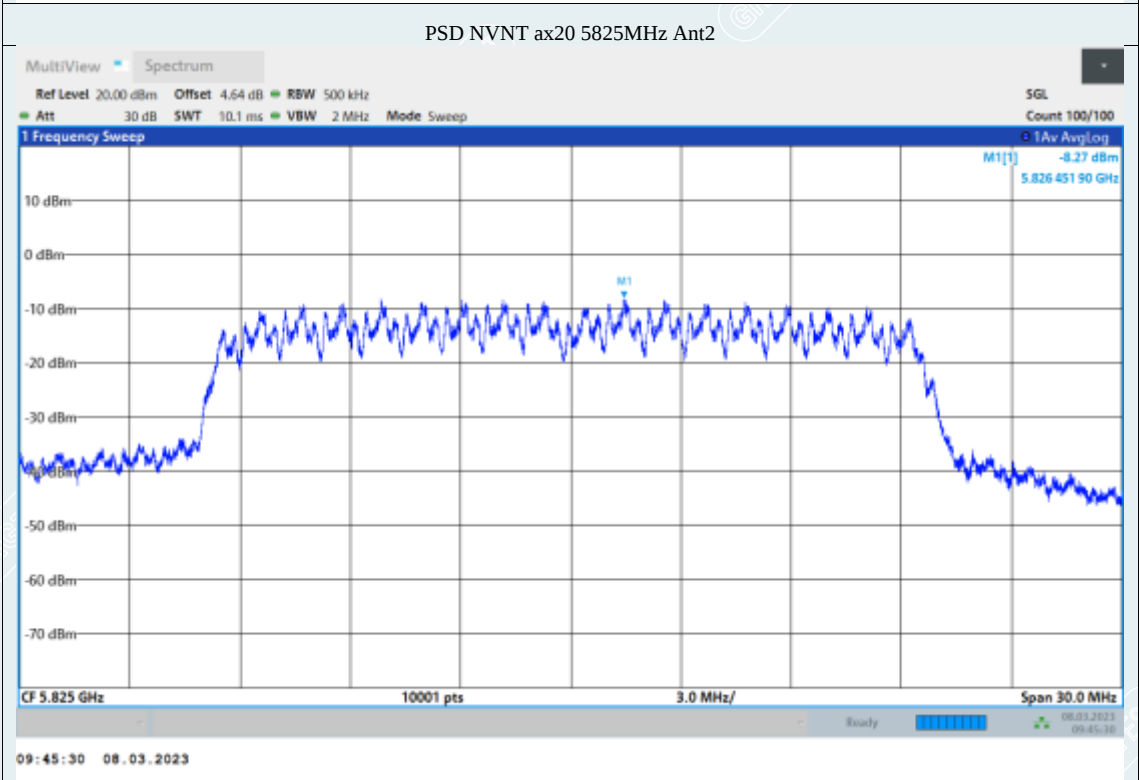
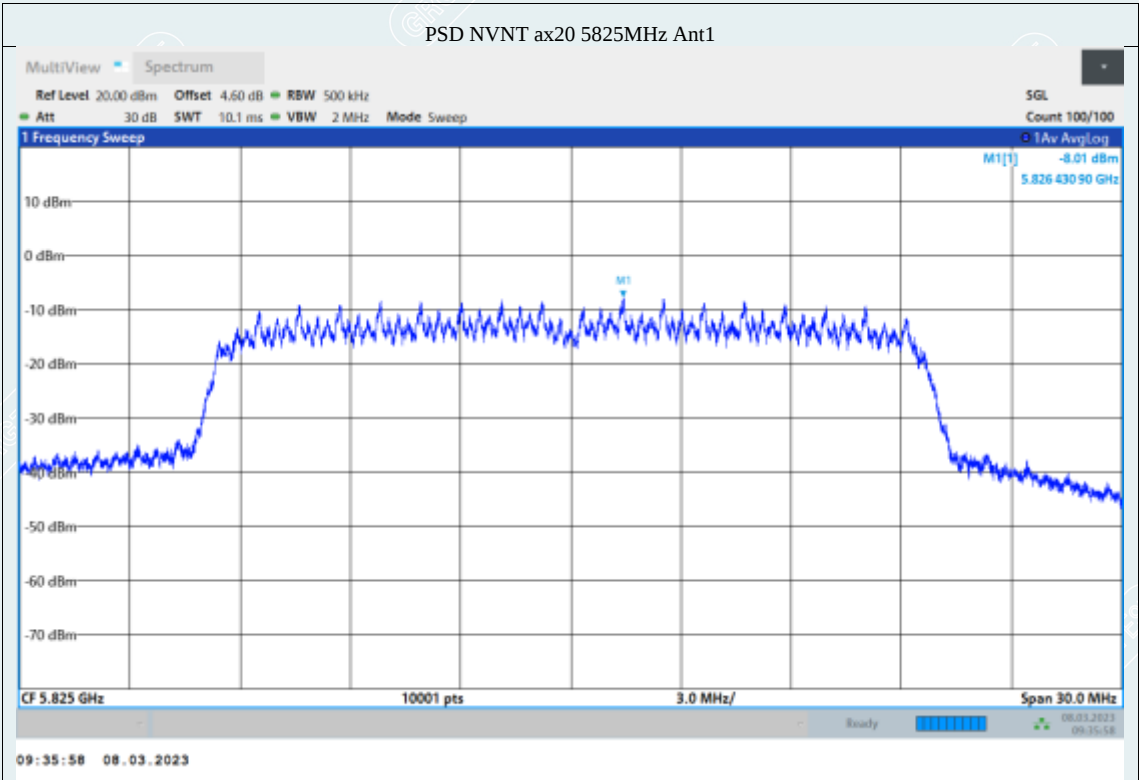


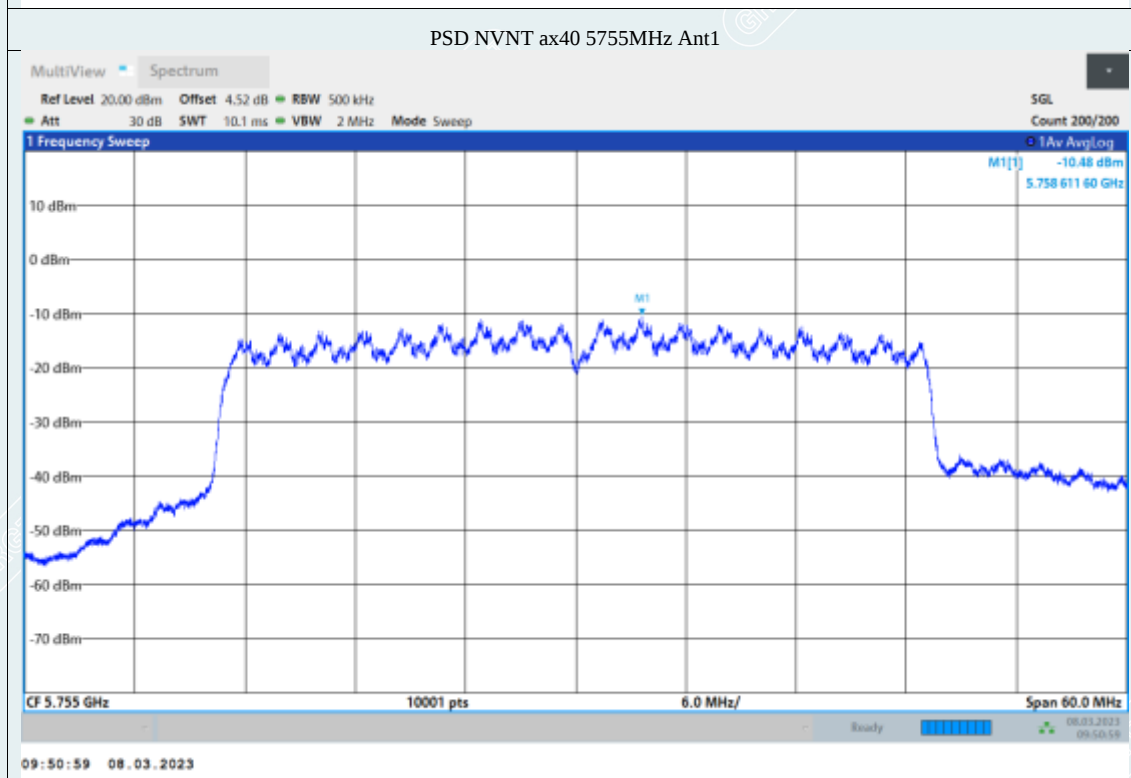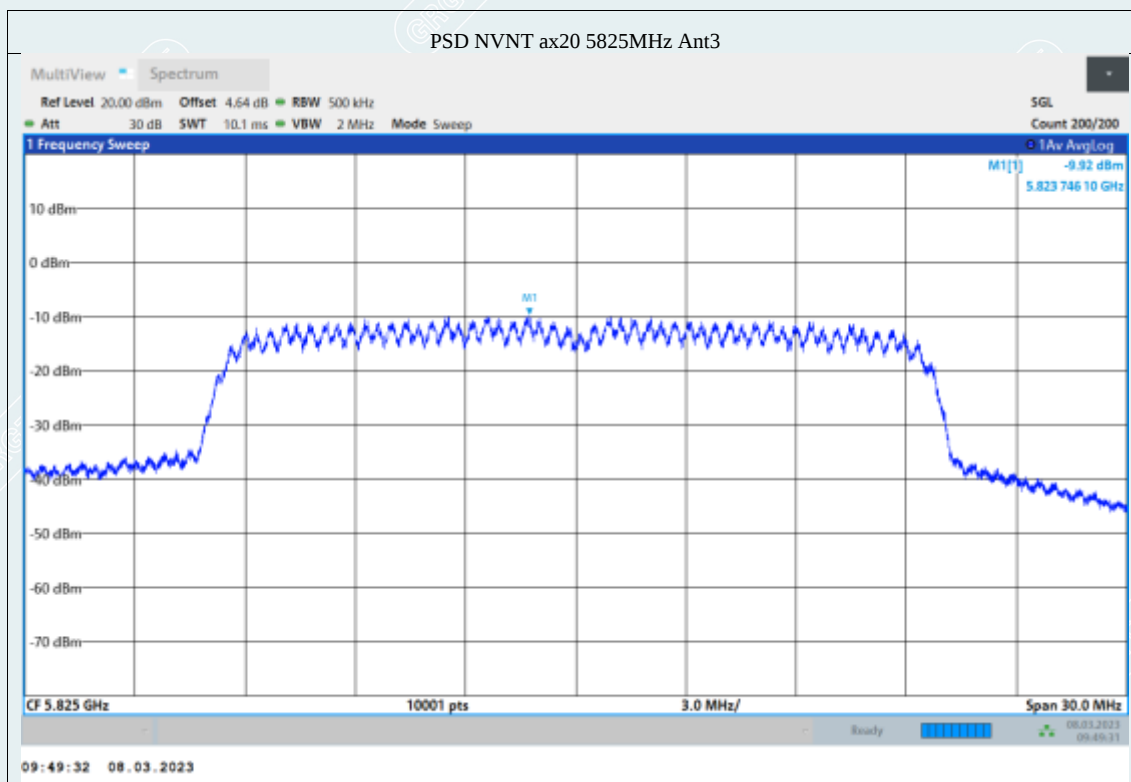

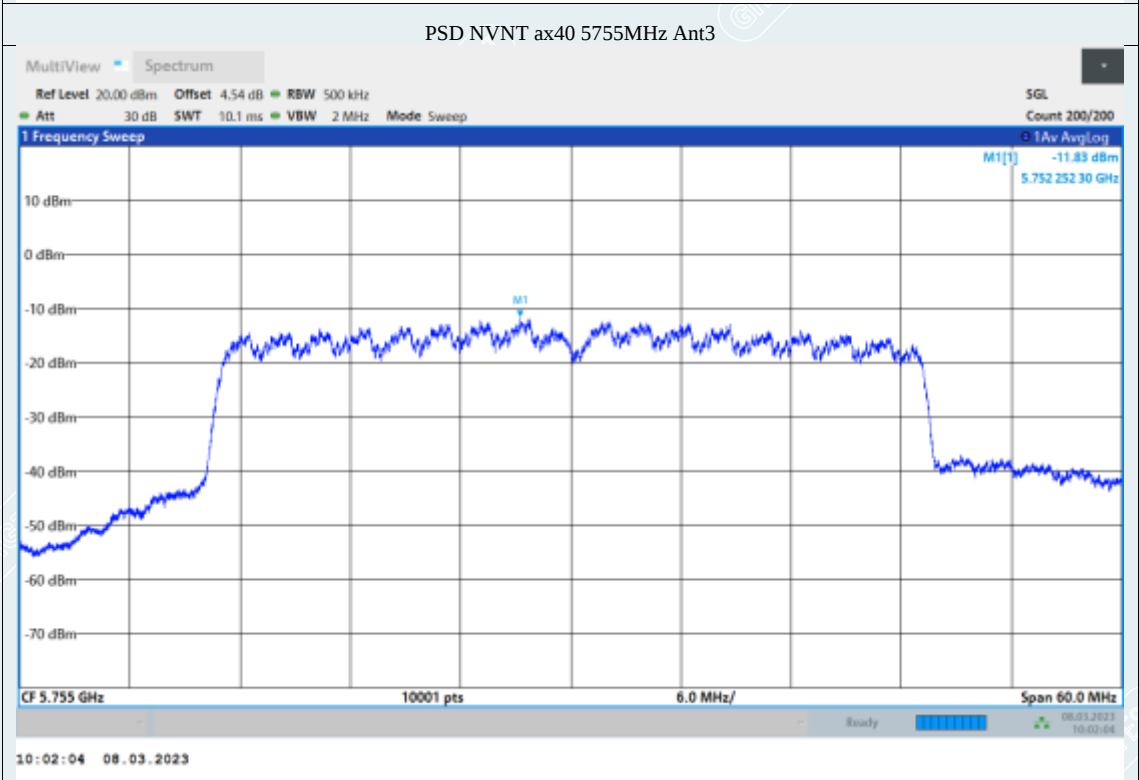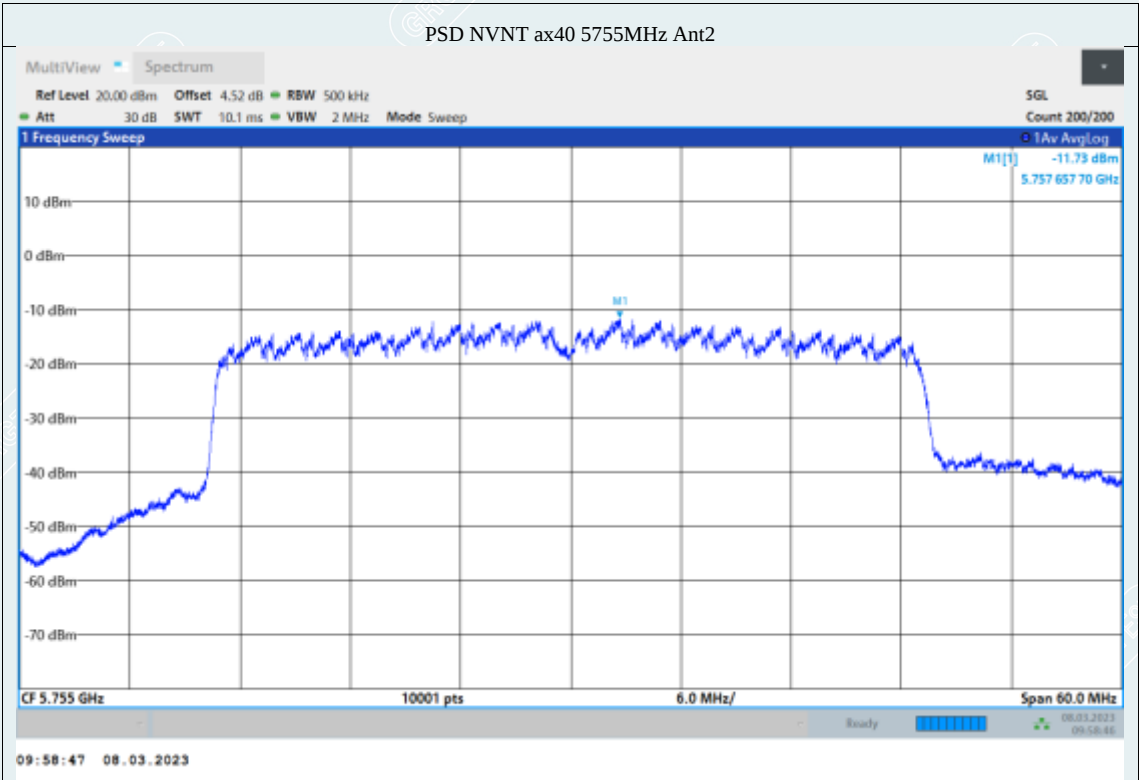

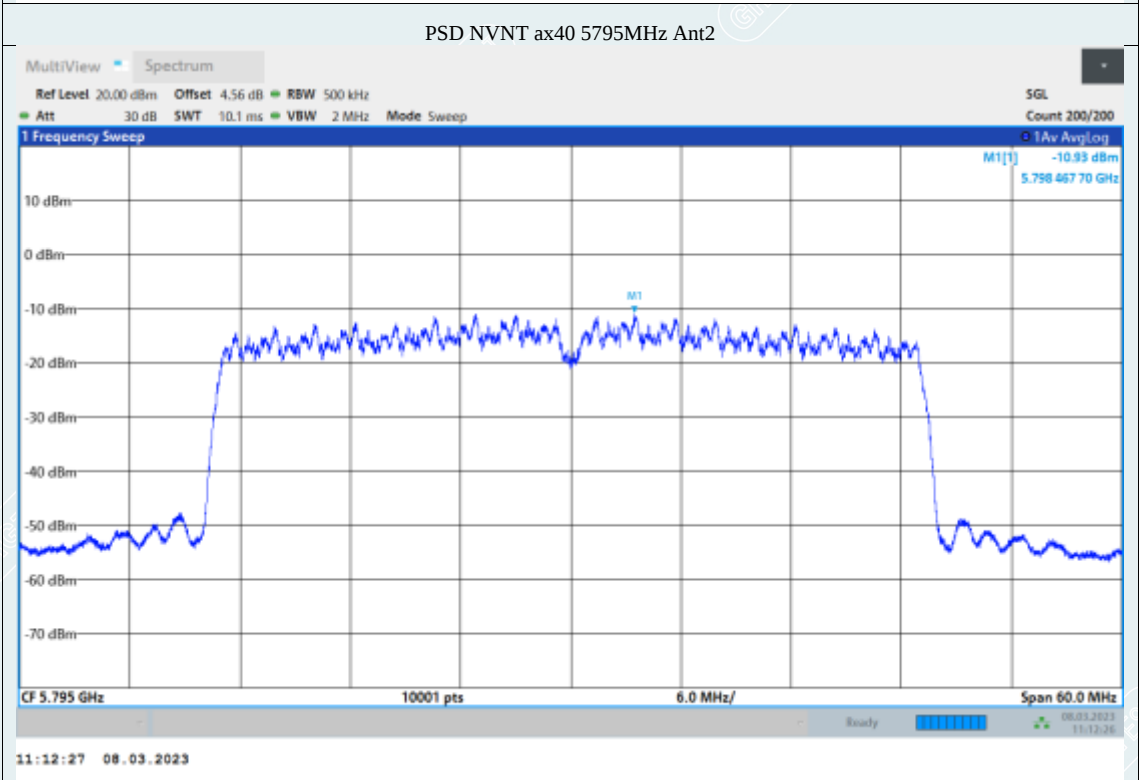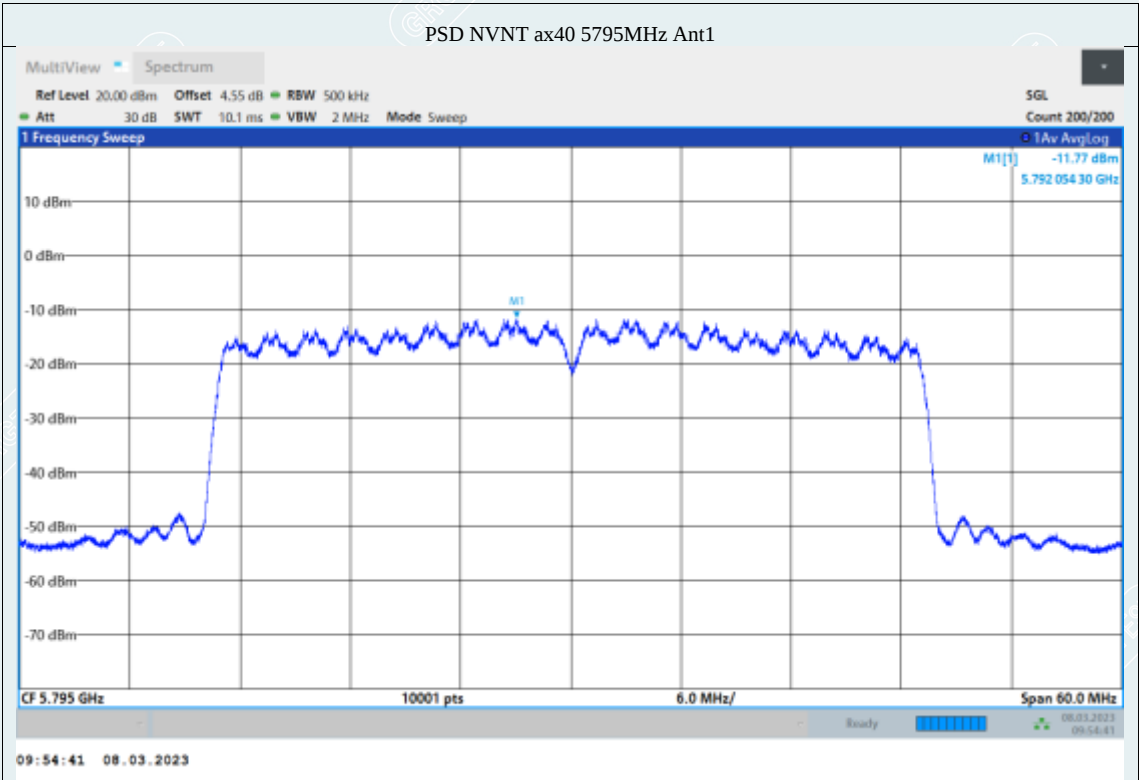

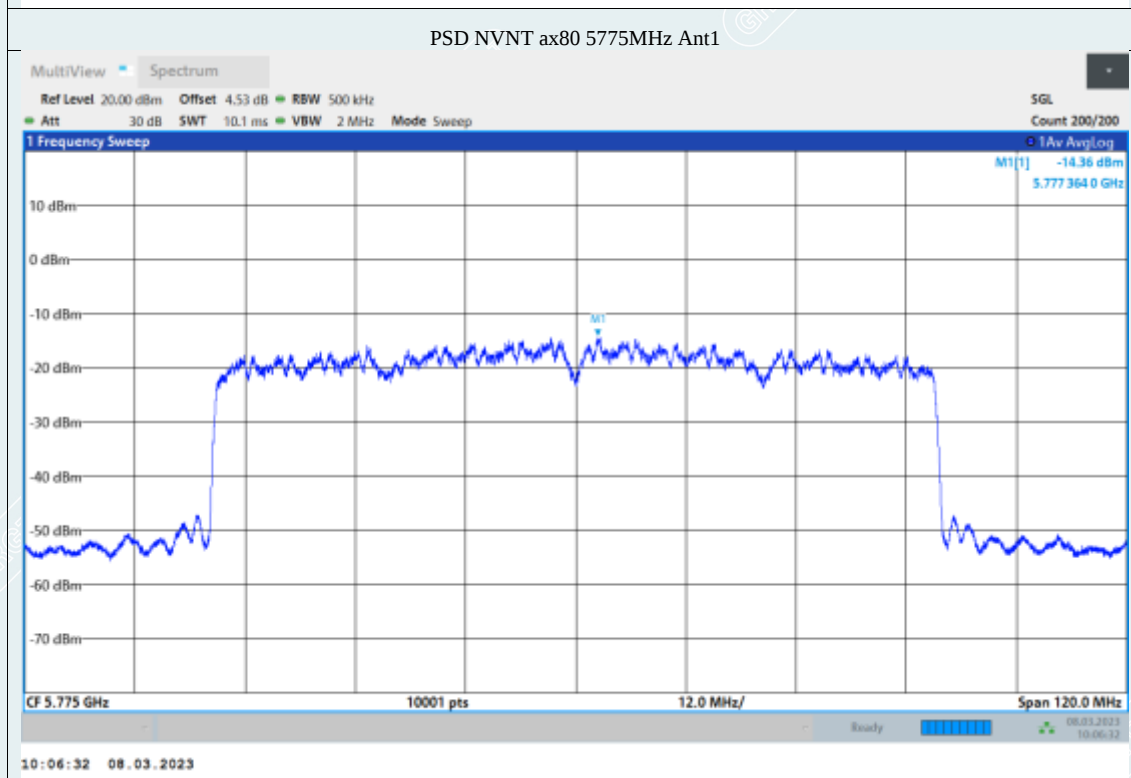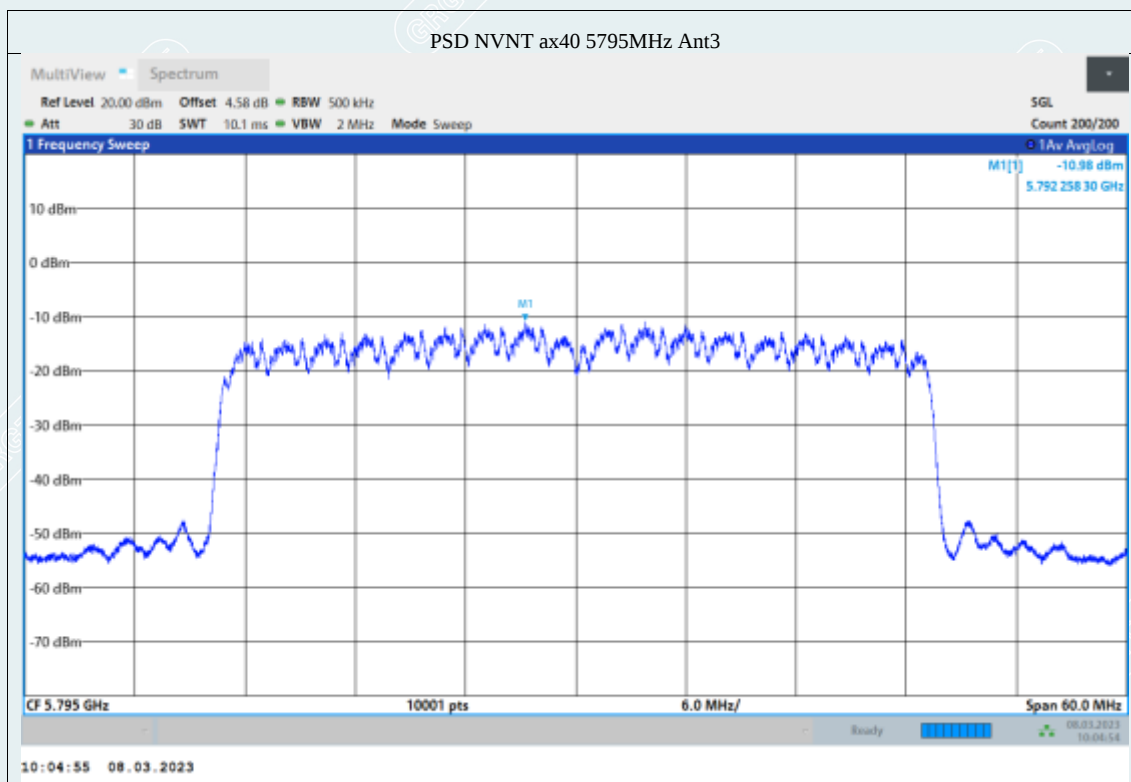

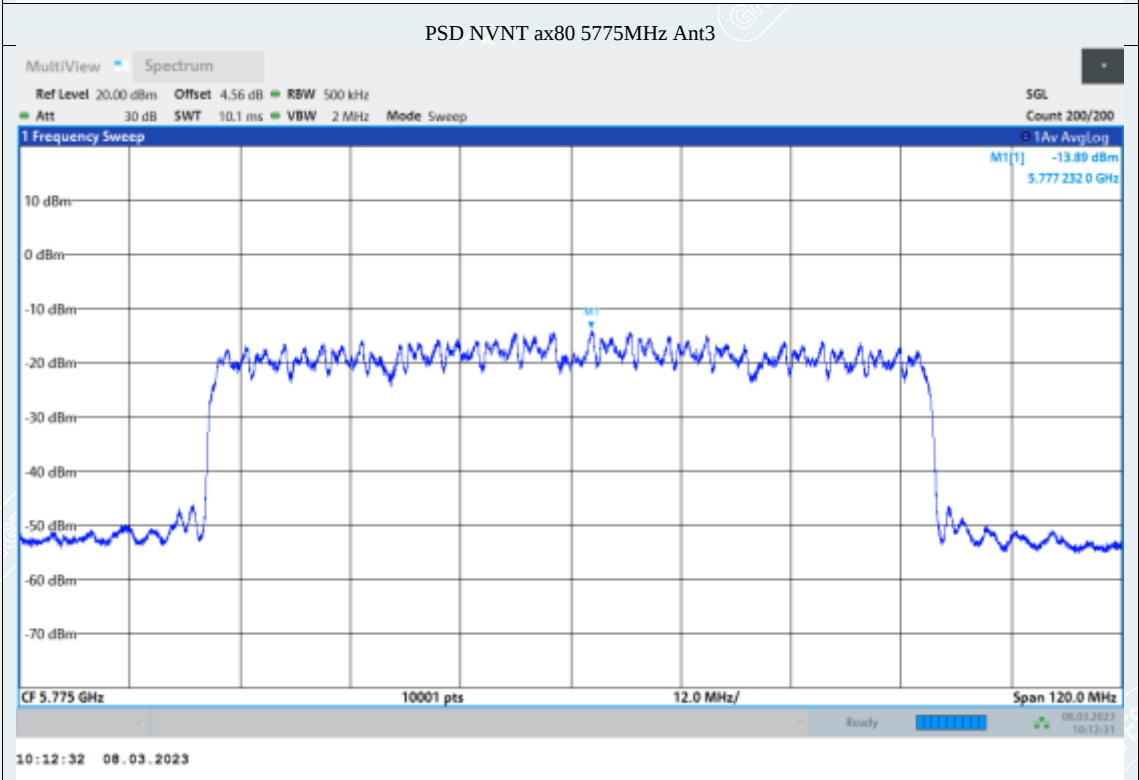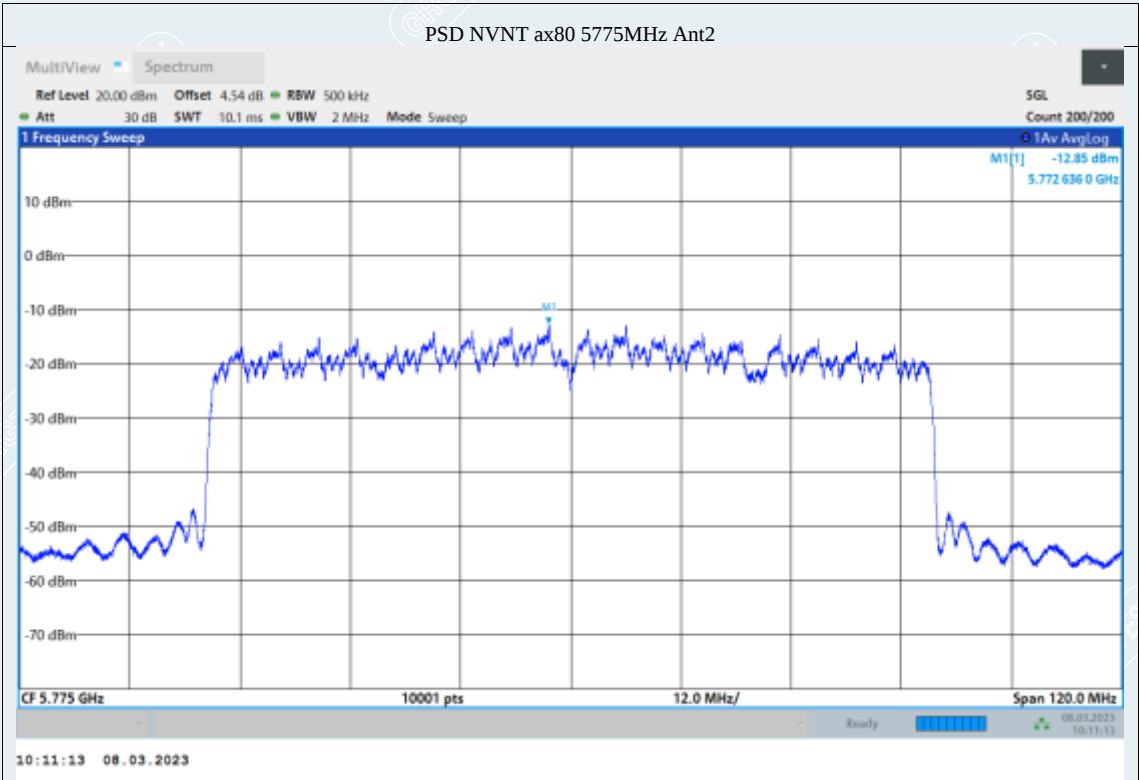

Note:

U-NII-1 :

Note1: This EUT supports MIMO 3X3, any transmit signals are correlated with each other,
So Directional gain $=10\log[(10^{3.26/20}+10^{3.26/20}+10^{3.58/20})^2/3]$ dBi, that is Directional gain (dBi)= 8.14
Note2: Antenna gain is greater than 6, Power Density Limit=17-(8.14-6)=14.86dBm/MHz

U-NII-2A :

Note1: This EUT supports MIMO 3X3, any transmit signals are correlated with each other,
So Directional gain $=10\log[(10^{3.2/20}+10^{3.2/20}+10^{3.36/20})^2/3]$ dBi, that is Directional gain (dBi)= 8.02
Note2: Antenna gain is greater than 6, Power Density Limit=11-(8.02-6)=8.98dBm/MHz

U-NII-2C :

Note1: This EUT supports MIMO 3X3, any transmit signals are correlated with each other,
So Directional gain $=10\log[(10^{3.26/20}+10^{3.26/20}+10^{3.25/20})^2/3]$ dBi, that is Directional gain (dBi)= 8.03
Note2: Antenna gain is greater than 6, Power Density Limit=11-(8.03-6)=8.97dBm/MHz

U-NII-3:

Note1: This EUT supports MIMO 3X3, any transmit signals are correlated with each other,
So Directional gain $=10\log[(10^{3.75/20}+10^{3.75/20}+10^{3.88/20})^2/3]$ dBi, that is Directional gain (dBi)= 8.56
Note2: Antenna gain is greater than 6, Power Density Limit=30-(8.56-6)=27.44dBm/500kHz

----- The following blanks -----

11. FREQUENCY STABILITY

11.1. LIMITS

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

11.2. TEST PROCEDURES

(1) Frequency stability with respect to ambient temperature

- a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in §ANSI C63.10-2013(5.6).
- b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.


- c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in §ANSI C63.10-2013(5.6).
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

(2) Frequency stability when varying supply voltage

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

- b) Tune the EUT to one of the number of frequencies required in §ANSI C63.10-2013(5.6). Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in §ANSI C63.10-2013(5.6).
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in §ANSI C63.10-2013(5.13).

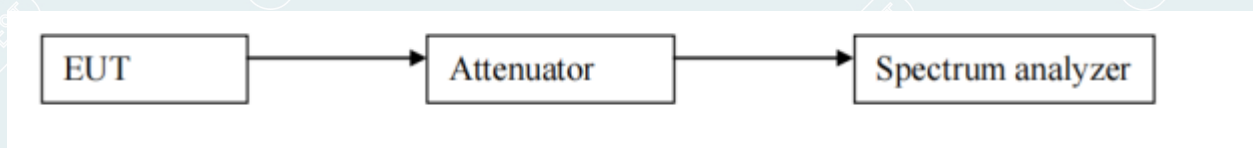11.3. TEST SETUP

----- The following blanks -----

11.4. TEST RESULTS

Tested By	Qin Tingting	Tested Date	2023/02/28~2023/03/08
Environmental Conditions	20.9°C/47%RH/101.1kPa	Test Voltage	AC120V/60Hz

Band U-NII-1:

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)
NVNT	a	5180	Ant1	5180.02	20000	3.86
NVNT	a	5180	Ant2	5180.02	20000	3.86
NVNT	a	5180	Ant3	5180.02	20000	3.86
NVNT	a	5200	Ant1	5200.02	20000	3.85
NVNT	a	5200	Ant2	5200.02	20000	3.85
NVNT	a	5200	Ant3	5200.02	20000	3.85
NVNT	a	5240	Ant1	5240.04	40000	7.63
NVNT	a	5240	Ant2	5240.02	20000	3.82
NVNT	a	5240	Ant3	5240	0	0
NVLT	a	5180	Ant1	5180.04	40000	7.72
NVLT	a	5180	Ant2	5180.02	20000	3.86
NVLT	a	5180	Ant3	5179.98	-20000	-3.86
NVLT	a	5200	Ant1	5200.02	20000	3.85
NVLT	a	5200	Ant3	5200.02	20000	3.85
NVLT	a	5200	Ant3	5200	0	0
NVLT	a	5240	Ant1	5240.04	40000	7.63
NVLT	a	5240	Ant2	5240	0	0
NVLT	a	5240	Ant3	5240.02	20000	3.82
NVHT	a	5180	Ant1	5180.02	20000	3.86
NVHT	a	5180	Ant2	5180	0	0
NVHT	a	5180	Ant3	5179.98	-20000	-3.86
NVHT	a	5200	Ant1	5200	0	0
NVHT	a	5200	Ant3	5200.02	20000	3.85
NVHT	a	5200	Ant3	5200	0	0
NVHT	a	5240	Ant1	5240.02	20000	3.82
NVHT	a	5240	Ant2	5240.06	60000	11.45
NVHT	a	5240	Ant3	5240.02	20000	3.82
LVNT	a	5180	Ant1	5180	0	0
LVNT	a	5180	Ant2	5180.02	20000	3.86
LVNT	a	5180	Ant3	5180.02	20000	3.86
LVNT	a	5200	Ant1	5200.02	20000	3.85
LVNT	a	5200	Ant3	5200.02	20000	3.85
LVNT	a	5200	Ant3	5200	0	0
LVNT	a	5240	Ant1	5240.02	20000	3.82

LVNT	a	5240	Ant2	5240.02	20000	3.82
LVNT	a	5240	Ant3	5240	0	0
HVNT	a	5180	Ant1	5180	0	0
HVNT	a	5180	Ant2	5180	0	0
HVNT	a	5180	Ant3	5180	0	0
HVNT	a	5200	Ant1	5200.02	20000	3.85
HVNT	a	5200	Ant2	5200	0	0
HVNT	a	5200	Ant3	5200	0	0
HVNT	a	5240	Ant1	5240	0	0
HVNT	a	5240	Ant2	5240	0	0
HVNT	a	5240	Ant3	5240.02	20000	3.82

Band U-NII-2A:

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)
NVNT	a	5260	Ant1	5260.02	20000	3.8
NVNT	a	5260	Ant2	5260.02	20000	3.8
NVNT	a	5260	Ant3	5260	0	0
NVNT	a	5280	Ant1	5280	0	0
NVNT	a	5280	Ant2	5280	0	0
NVNT	a	5280	Ant3	5280	0	0
NVNT	a	5320	Ant1	5320	0	0
NVNT	a	5320	Ant2	5320	0	0
NVNT	a	5320	Ant3	5320.02	20000	3.76
NVLT	a	5260	Ant1	5260.02	20000	3.8
NVLT	a	5260	Ant2	5260.02	20000	3.8
NVLT	a	5260	Ant3	5260.02	20000	3.8
NVLT	a	5280	Ant1	5280.04	40000	7.58
NVLT	a	5280	Ant2	5280.02	20000	3.79
NVLT	a	5280	Ant3	5280	0	0
NVLT	a	5320	Ant1	5319.98	-20000	-3.76
NVLT	a	5320	Ant2	5320.02	20000	3.76
NVLT	a	5320	Ant3	5320.02	20000	3.76
NVHT	a	5260	Ant1	5260	0	0
NVHT	a	5260	Ant2	5260	0	0
NVHT	a	5260	Ant3	5260.02	20000	3.8
NVHT	a	5280	Ant1	5280.02	20000	3.79
NVHT	a	5280	Ant2	5280	0	0
NVHT	a	5280	Ant3	5280.02	20000	3.79
NVHT	a	5320	Ant1	5320	0	0
NVHT	a	5320	Ant2	5320	0	0
NVHT	a	5320	Ant3	5320	0	0
LVNT	a	5260	Ant1	5260	0	0

LVNT	a	5260	Ant2	5260.02	20000	3.8
LVNT	a	5260	Ant3	5260	0	0
LVNT	a	5280	Ant1	5280	0	0
LVNT	a	5280	Ant2	5280	0	0
LVNT	a	5280	Ant3	5280	0	0
LVNT	a	5320	Ant1	5320	0	0
LVNT	a	5320	Ant2	5320.02	20000	3.76
LVNT	a	5320	Ant3	5320.02	20000	3.76
HVNT	a	5260	Ant1	5260.02	20000	3.8
HVNT	a	5260	Ant2	5260	0	0
HVNT	a	5260	Ant3	5260.02	20000	3.8
HVNT	a	5280	Ant1	5280	0	0
HVNT	a	5280	Ant2	5280.02	20000	3.79
HVNT	a	5280	Ant3	5280.02	20000	3.79
HVNT	a	5320	Ant1	5320.02	20000	3.76
HVNT	a	5320	Ant2	5320.02	20000	3.76
HVNT	a	5320	Ant3	5320	0	0

Band U-NII-2C:

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)
NVNT	a	5500	Ant1	5500	0	0
NVNT	a	5500	Ant2	5500	0	0
NVNT	a	5500	Ant3	5500.02	20000	3.64
NVNT	a	5600	Ant1	5600.02	20000	3.57
NVNT	a	5600	Ant2	5600	0	0
NVNT	a	5600	Ant3	5600.02	20000	3.57
NVNT	a	5700	Ant1	5700.02	20000	3.51
NVNT	a	5700	Ant2	5700	0	0
NVNT	a	5700	Ant3	5700	0	0
NVLT	a	5500	Ant1	5500	0	0
NVLT	a	5500	Ant2	5500.02	20000	3.64
NVLT	a	5500	Ant3	5500	0	0
NVLT	a	5600	Ant1	5600	0	0
NVLT	a	5600	Ant2	5600.02	20000	3.57
NVLT	a	5600	Ant3	5600.02	20000	3.57
NVLT	a	5700	Ant1	5700	0	0
NVLT	a	5700	Ant2	5700	0	0
NVLT	a	5700	Ant3	5699.98	-20000	-3.51
NVHT	a	5500	Ant1	5500.02	20000	3.64
NVHT	a	5500	Ant2	5500	0	0
NVHT	a	5500	Ant3	5500	0	0
NVHT	a	5600	Ant1	5599.98	-20000	-3.57

NVHT	a	5600	Ant2	5600	0	0
NVHT	a	5600	Ant3	5600	0	0
NVHT	a	5700	Ant1	5700.02	20000	3.51
NVHT	a	5700	Ant2	5700.04	40000	7.02
NVHT	a	5700	Ant3	5700.02	20000	3.51
LVNT	a	5500	Ant1	5499.98	-20000	-3.64
LVNT	a	5500	Ant2	5500	0	0
LVNT	a	5500	Ant3	5500	0	0
LVNT	a	5600	Ant1	5600.02	20000	3.57
LVNT	a	5600	Ant2	5600	0	0
LVNT	a	5600	Ant3	5600	0	0
LVNT	a	5700	Ant1	5700	0	0
LVNT	a	5700	Ant2	5700	0	0
LVNT	a	5700	Ant3	5699.98	-20000	-3.51
HVNT	a	5500	Ant1	5500.02	20000	3.64
HVNT	a	5500	Ant2	5500.02	20000	3.64
HVNT	a	5500	Ant3	5500	0	0
HVNT	a	5600	Ant1	5599.98	-20000	-3.57
HVNT	a	5600	Ant2	5600	0	0
HVNT	a	5600	Ant3	5600	0	0
HVNT	a	5700	Ant1	5700	0	0
HVNT	a	5700	Ant2	5700.02	20000	3.51
HVNT	a	5700	Ant3	5700	0	0

Band U-NII-3:

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)
NVNT	a	5745	Ant1	5744.98	-20000	-3.48
NVNT	a	5745	Ant2	5745.02	20000	3.48
NVNT	a	5745	Ant3	5744.98	-20000	-3.48
NVNT	a	5785	Ant1	5785.02	20000	3.46
NVNT	a	5785	Ant2	5785	0	0
NVNT	a	5785	Ant3	5785.02	20000	3.46
NVNT	a	5825	Ant1	5825	0	0
NVNT	a	5825	Ant2	5825	0	0
NVNT	a	5825	Ant3	5825.02	20000	3.43
NVLT	a	5745	Ant1	5745	0	0
NVLT	a	5745	Ant2	5745.02	20000	3.48
NVLT	a	5745	Ant3	5745	0	0
NVLT	a	5785	Ant1	5785.02	20000	3.46
NVLT	a	5785	Ant2	5785.04	40000	6.91
NVLT	a	5785	Ant3	5785.02	20000	3.46
NVLT	a	5825	Ant1	5825	0	0

NVLT	a	5825	Ant2	5825	0	0
NVLT	a	5825	Ant3	5825.02	20000	3.43
NVHT	a	5745	Ant1	5745.02	20000	3.48
NVHT	a	5745	Ant2	5744.98	-20000	-3.48
NVHT	a	5745	Ant3	5745	0	0
NVHT	a	5785	Ant1	5785.02	20000	3.46
NVHT	a	5785	Ant2	5785	0	0
NVHT	a	5785	Ant3	5785.02	20000	3.46
NVHT	a	5825	Ant1	5825.02	20000	3.43
NVHT	a	5825	Ant2	5825.02	20000	3.43
NVHT	a	5825	Ant3	5825	0	0
LVNT	a	5745	Ant1	5745.02	20000	3.48
LVNT	a	5745	Ant2	5745.02	20000	3.48
LVNT	a	5745	Ant3	5745	0	0
LVNT	a	5785	Ant1	5785.02	20000	3.46
LVNT	a	5785	Ant2	5785	0	0
LVNT	a	5785	Ant3	5785	0	0
LVNT	a	5825	Ant1	5825.02	20000	3.43
LVNT	a	5825	Ant2	5825	0	0
LVNT	a	5825	Ant3	5825	0	0
HVNT	a	5745	Ant1	5745.02	20000	3.48
HVNT	a	5745	Ant2	5745	0	0
HVNT	a	5745	Ant3	5745	0	0
HVNT	a	5785	Ant1	5785.02	20000	3.46
HVNT	a	5785	Ant2	5785.02	20000	3.46
HVNT	a	5785	Ant3	5785.02	20000	3.46
HVNT	a	5825	Ant1	5825.02	20000	3.43
HVNT	a	5825	Ant2	5825	0	0
HVNT	a	5825	Ant3	5825.02	20000	3.43

Note: 1. This report records the worst case of temperature change test observation time 0/2/5/10min.

2. Test Voltage-NV: AC120V/60Hz, Test Voltage-LV: AC102V/60Hz, Test Voltage-HV: AC138V/60Hz.

3. Temperature Range: -5℃~45℃, Temperature-NT: 24℃.

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E202212085403-02-1 Test setup photo.

----- End of Report -----