



## Appendix B

### RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Optical Network Unit

Test Model: HG323DAC

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Li Huan





## B.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	19.846	$\geq 0.5$	Pass
NVNT	a	5200	Ant0	19.766	$\geq 0.5$	Pass
NVNT	a	5240	Ant0	19.667	$\geq 0.5$	Pass
NVNT	n20	5180	Ant0	20.23	$\geq 0.5$	Pass
NVNT	n20	5200	Ant0	19.829	$\geq 0.5$	Pass
NVNT	n20	5240	Ant0	20.19	$\geq 0.5$	Pass
NVNT	n40	5190	Ant0	40.599	$\geq 0.5$	Pass
NVNT	n40	5230	Ant0	40.674	$\geq 0.5$	Pass
NVNT	ac20	5180	Ant0	19.928	$\geq 0.5$	Pass
NVNT	ac20	5200	Ant0	19.847	$\geq 0.5$	Pass
NVNT	ac20	5240	Ant0	20.041	$\geq 0.5$	Pass
NVNT	ac40	5190	Ant0	40.635	$\geq 0.5$	Pass
NVNT	ac40	5230	Ant0	40.481	$\geq 0.5$	Pass
NVNT	ac80	5210	Ant0	80.165	$\geq 0.5$	Pass






Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

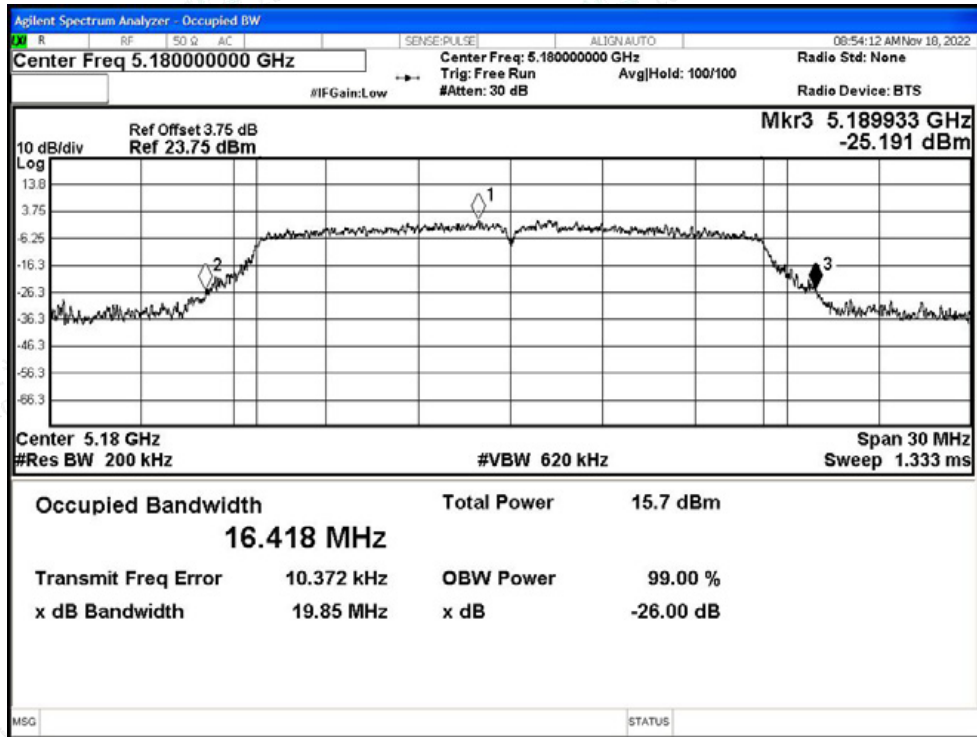


-26dB Bandwidth NVNT a 5200MHz Ant0

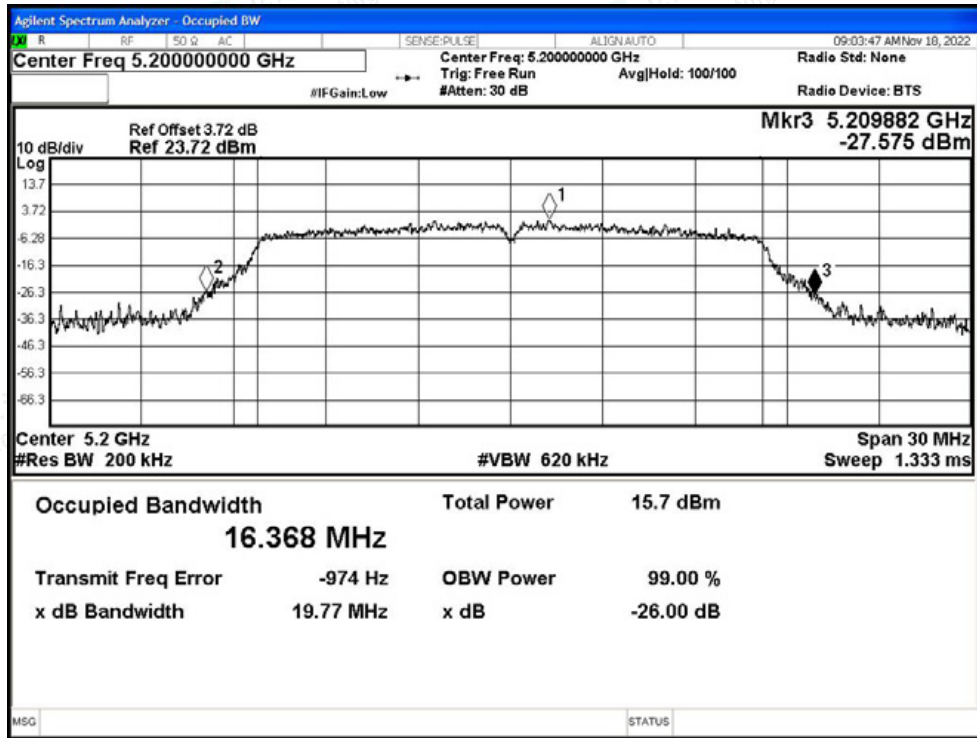



-26dB Bandwidth NVNT a 5240MHz Ant0

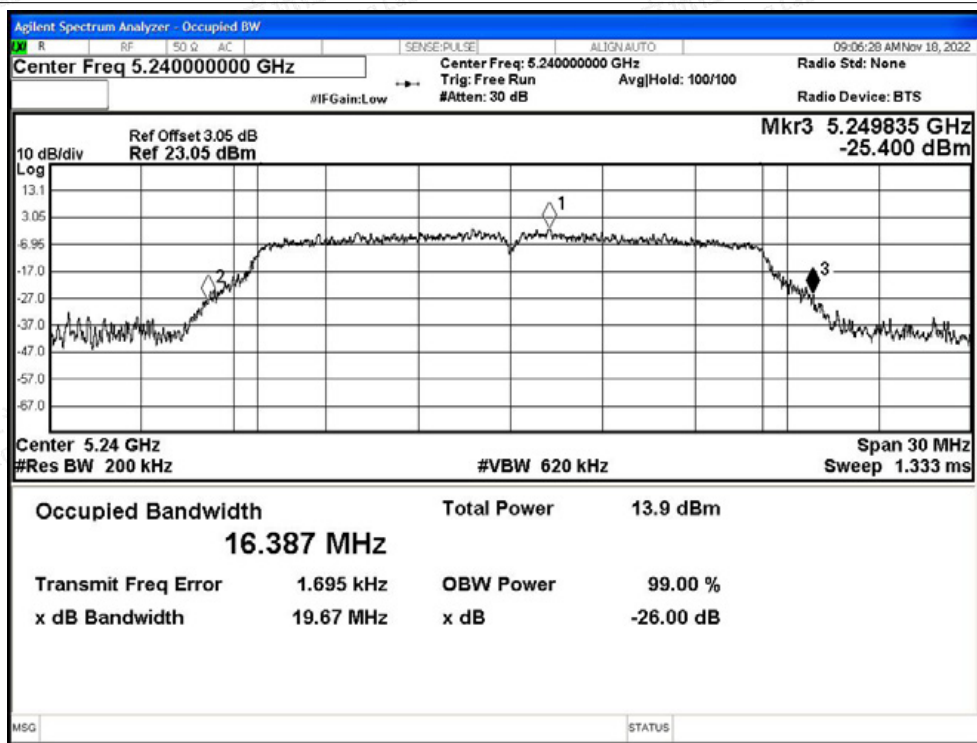


-26dB Bandwidth NVNT n20 5180MHz Ant0






-26dB Bandwidth NVNT n20 5200MHz Ant0

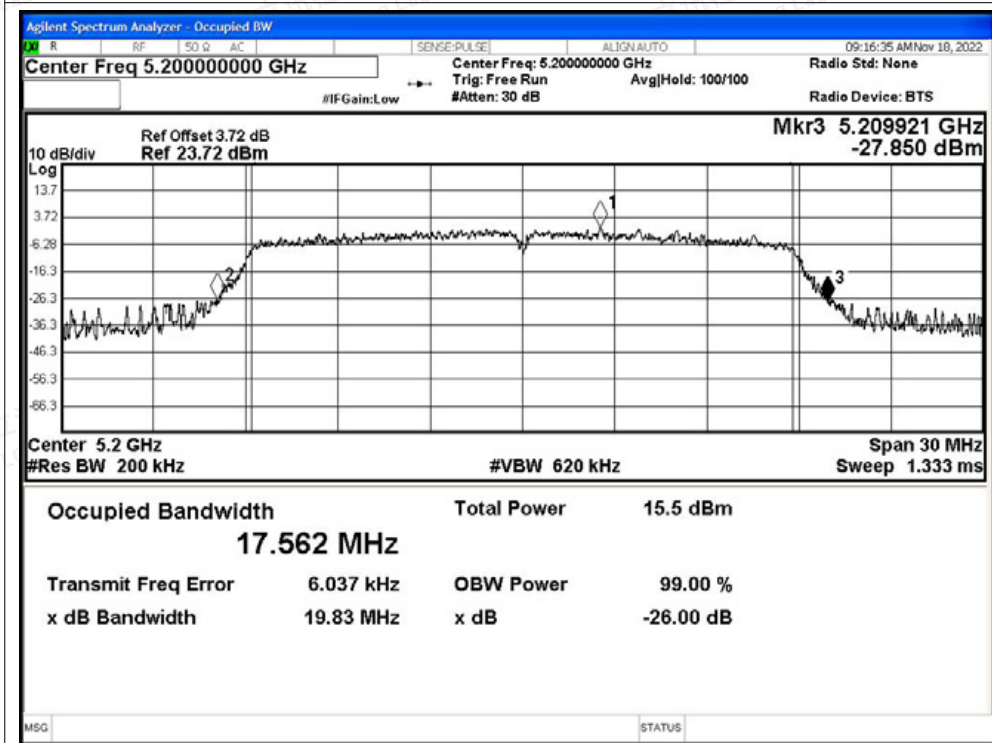


-26dB Bandwidth NVNT n20 5240MHz Ant0

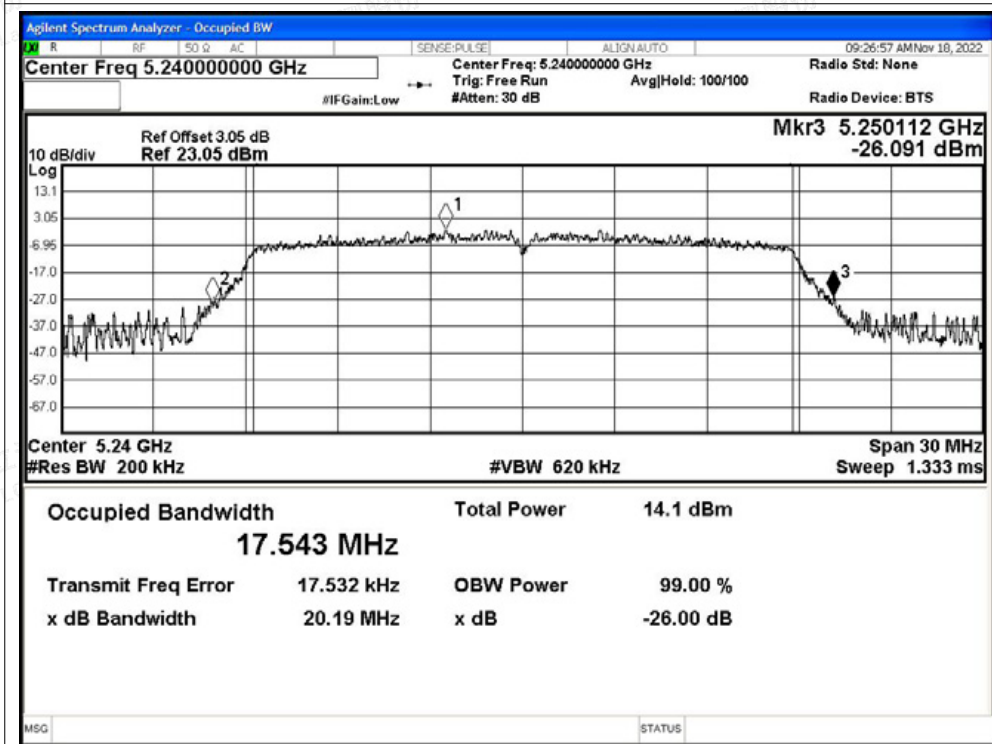




-26dB Bandwidth NVNT n40 5190MHz Ant0

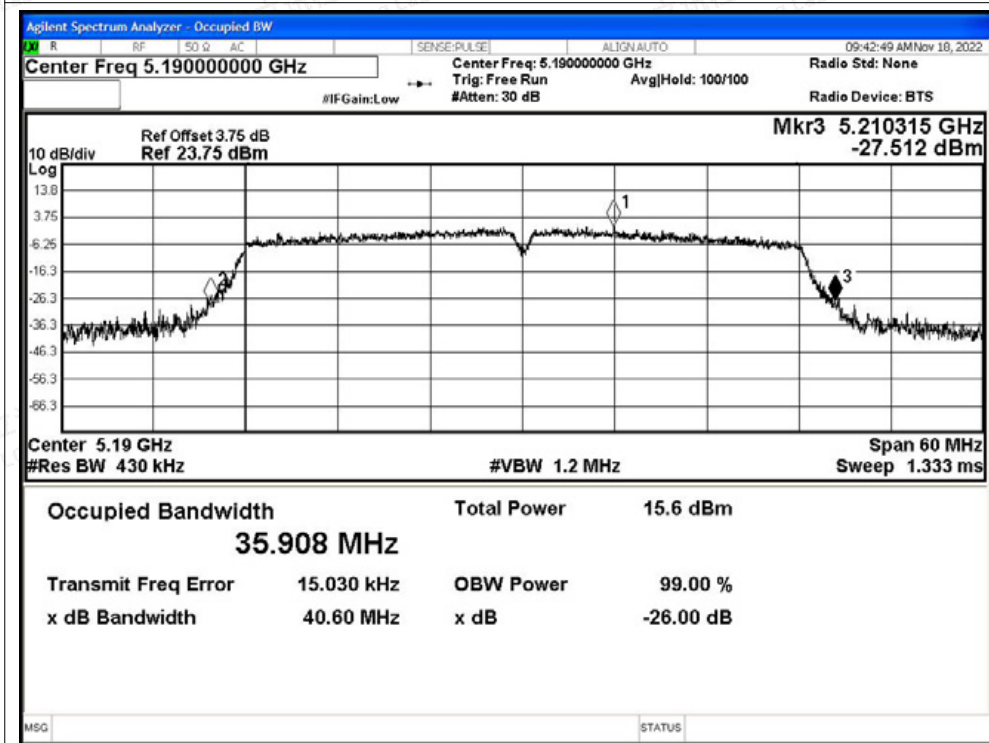


-26dB Bandwidth NVNT n40 5230MHz Ant0

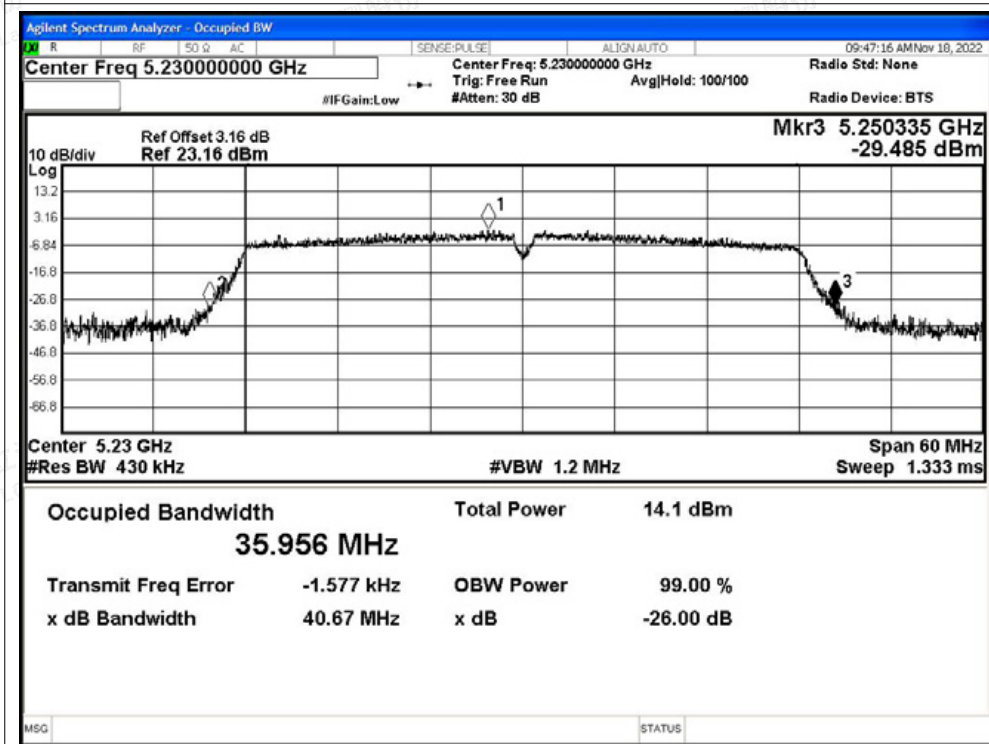




-26dB Bandwidth NVNT ac20 5180MHz Ant0

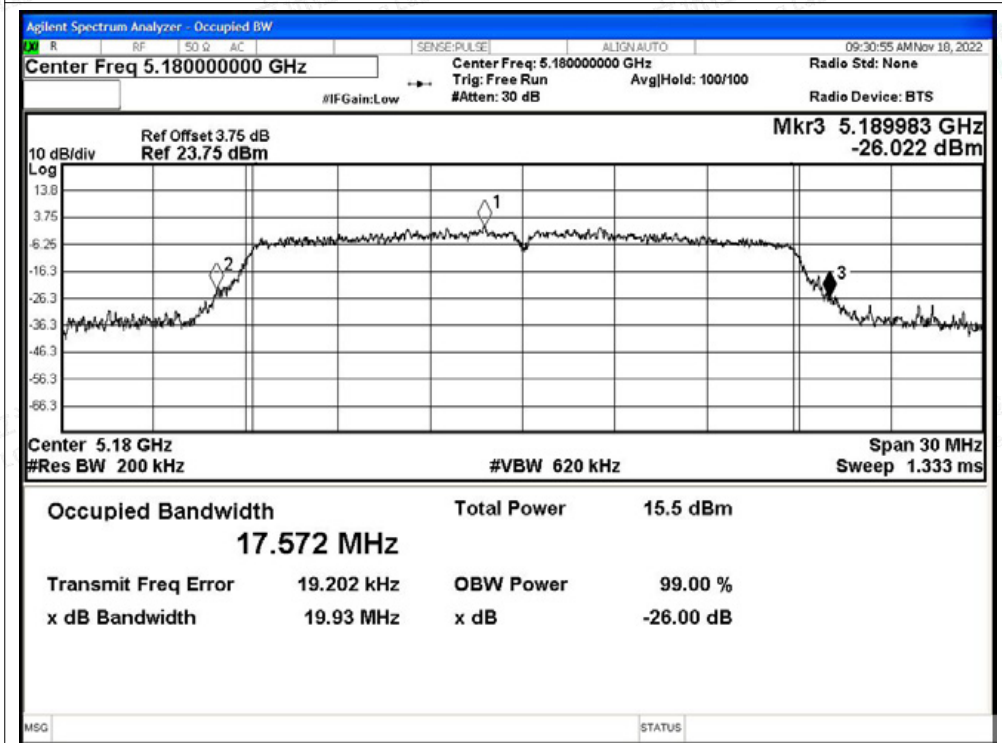


-26dB Bandwidth NVNT ac20 5200MHz Ant0

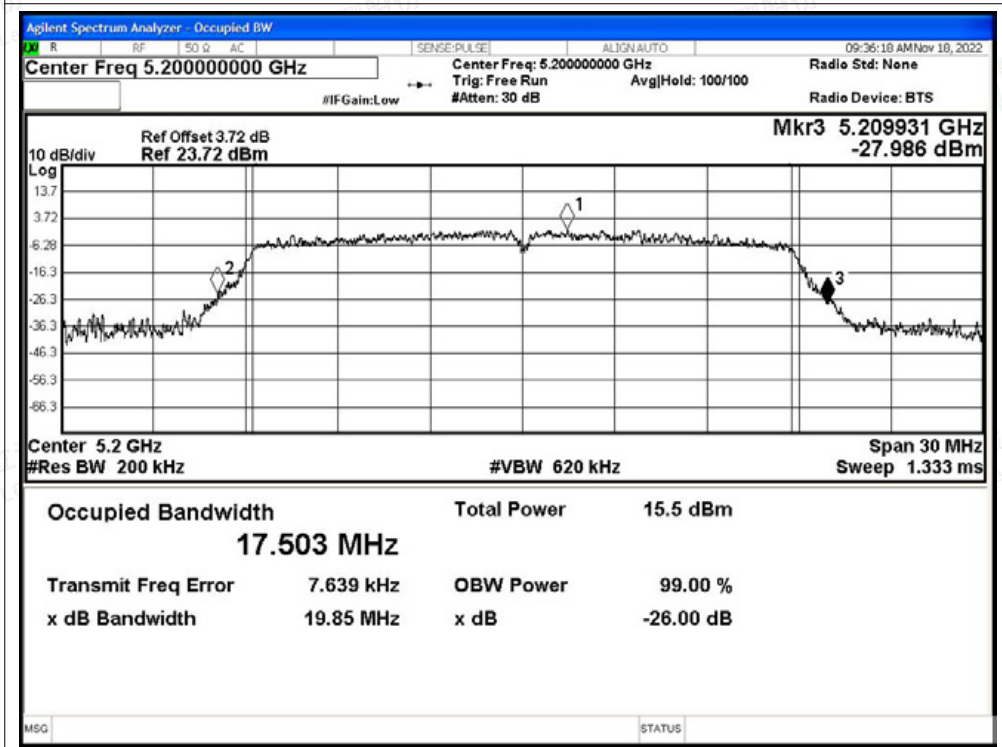




-26dB Bandwidth NVNT ac20 5240MHz Ant0

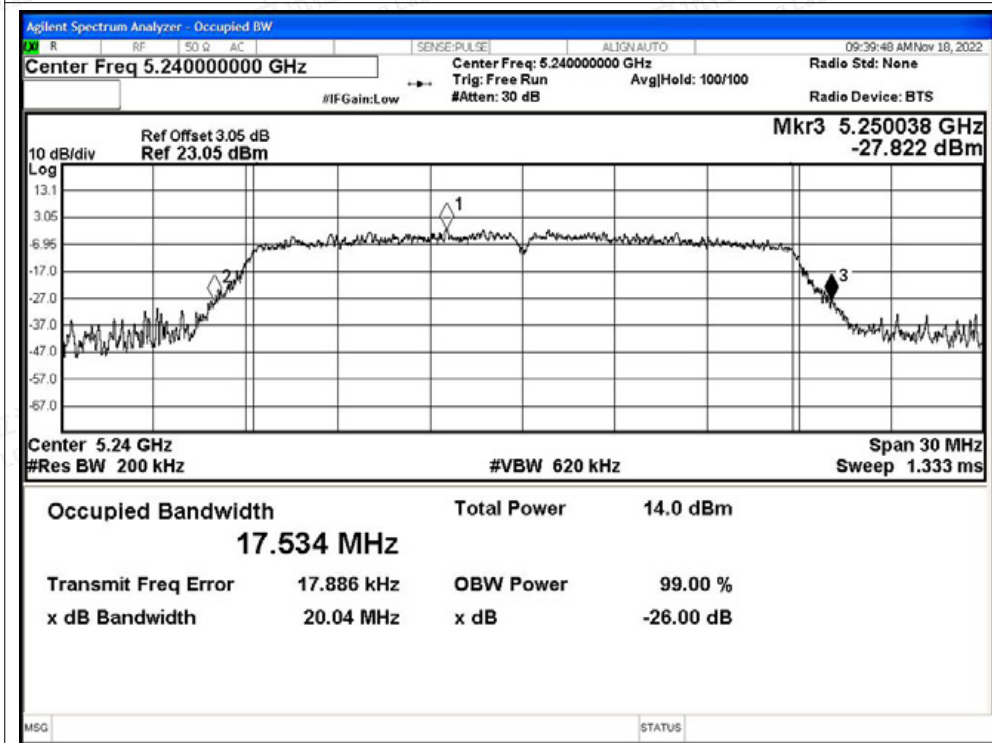


-26dB Bandwidth NVNT ac40 5190MHz Ant0

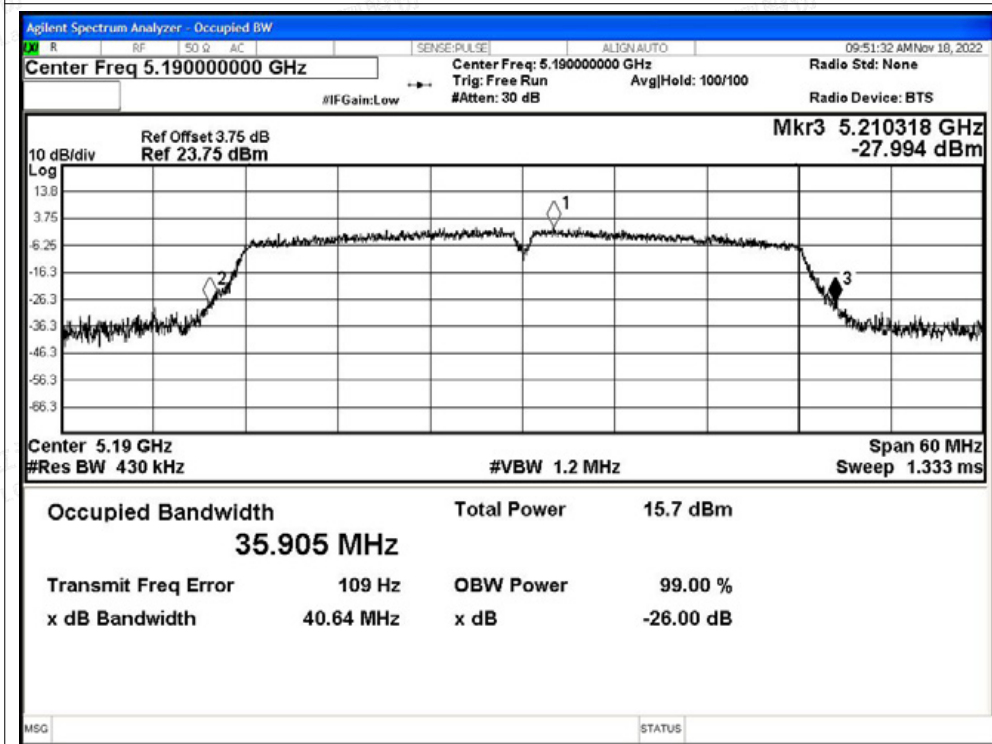






-26dB Bandwidth NVNT ac40 5230MHz Ant0

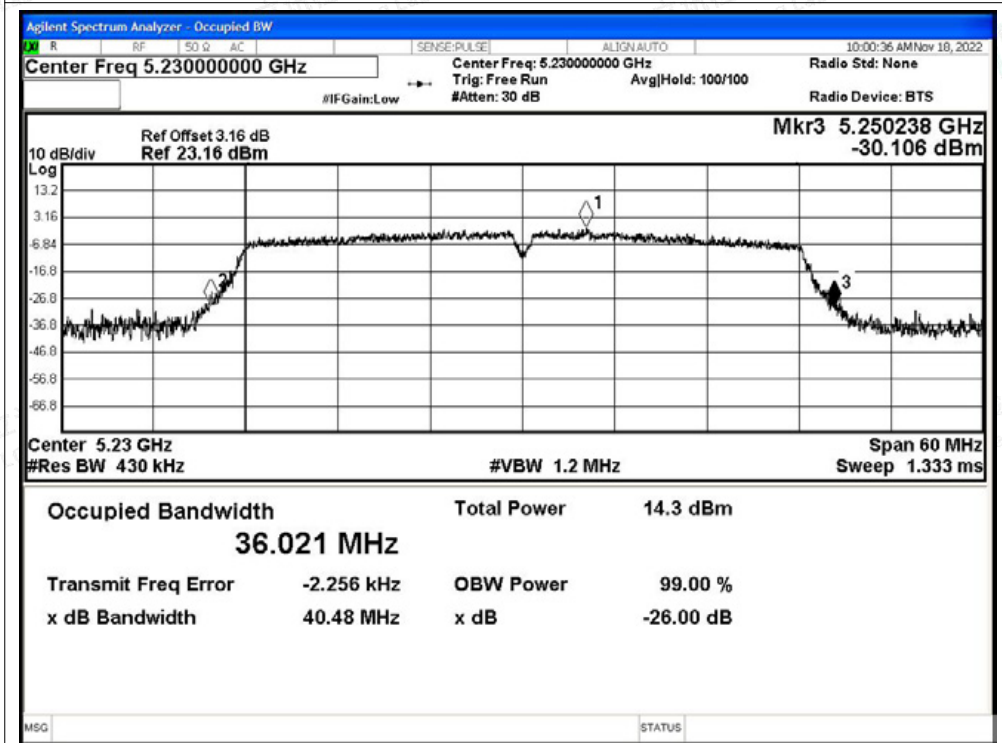

-26dB Bandwidth NVNT ac80 5210MHz Ant0

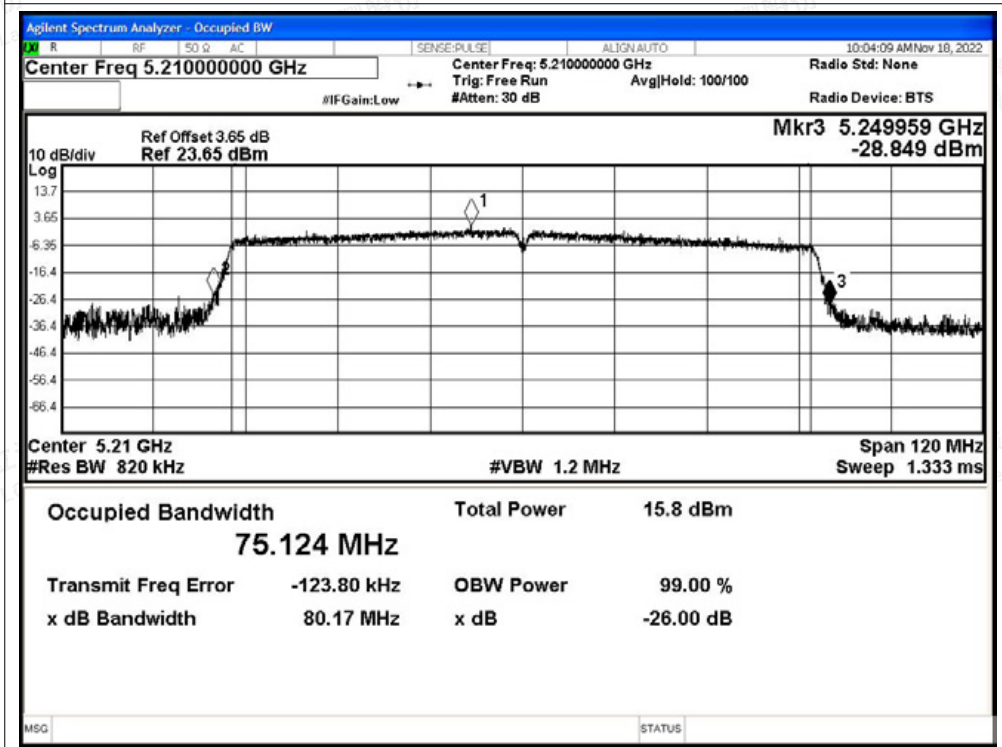



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	19.864	>=0.5	Pass
NVNT	a	5200	Ant1	19.653	>=0.5	Pass
NVNT	a	5240	Ant1	19.378	>=0.5	Pass
NVNT	n20	5180	Ant1	20.209	>=0.5	Pass
NVNT	n20	5200	Ant1	20.202	>=0.5	Pass
NVNT	n20	5240	Ant1	19.999	>=0.5	Pass
NVNT	n40	5190	Ant1	40.178	>=0.5	Pass
NVNT	n40	5230	Ant1	40.481	>=0.5	Pass
NVNT	ac20	5180	Ant1	20.144	>=0.5	Pass
NVNT	ac20	5200	Ant1	19.908	>=0.5	Pass
NVNT	ac20	5240	Ant1	20.218	>=0.5	Pass
NVNT	ac40	5190	Ant1	40.057	>=0.5	Pass
NVNT	ac40	5230	Ant1	40.614	>=0.5	Pass
NVNT	ac80	5210	Ant1	80.052	>=0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

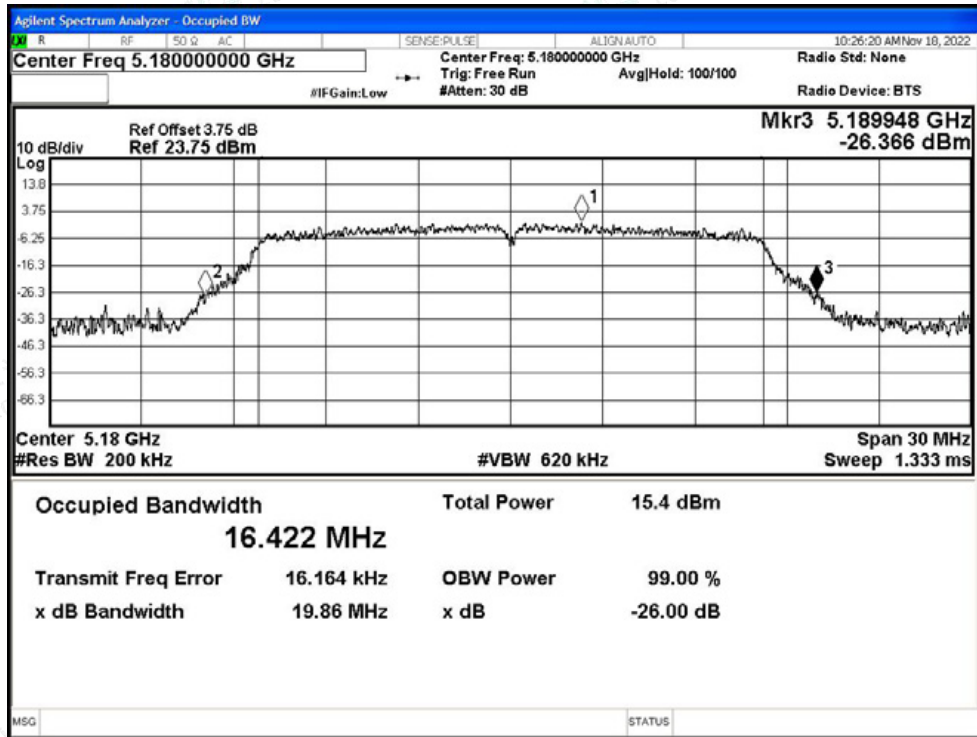


-26dB Bandwidth NVNT a 5200MHz Ant1

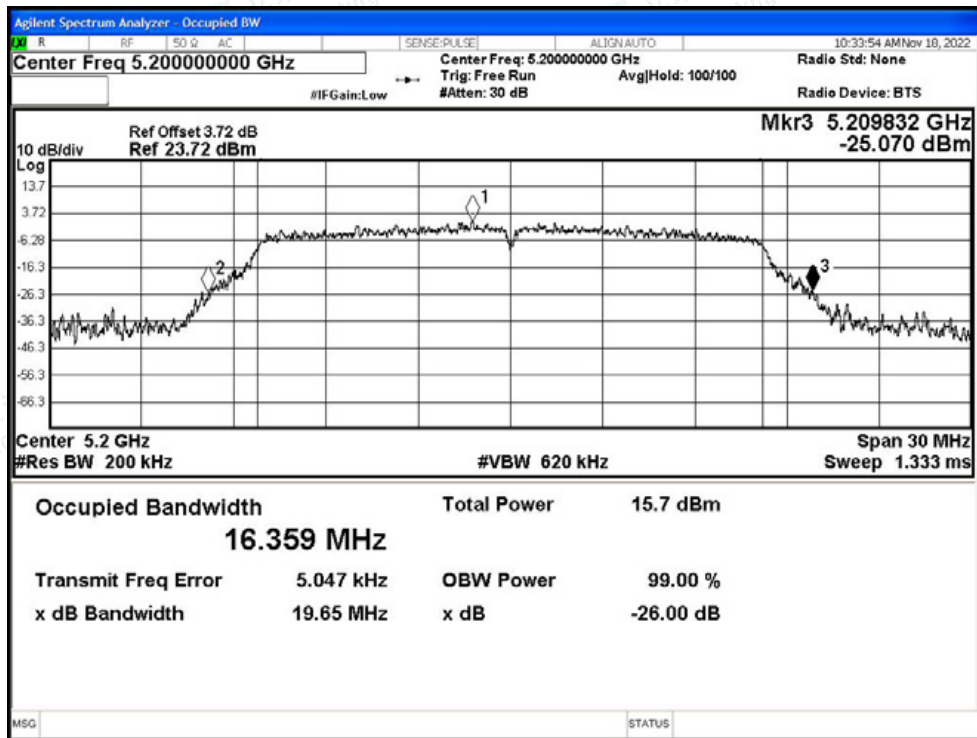




-26dB Bandwidth NVNT a 5240MHz Ant1

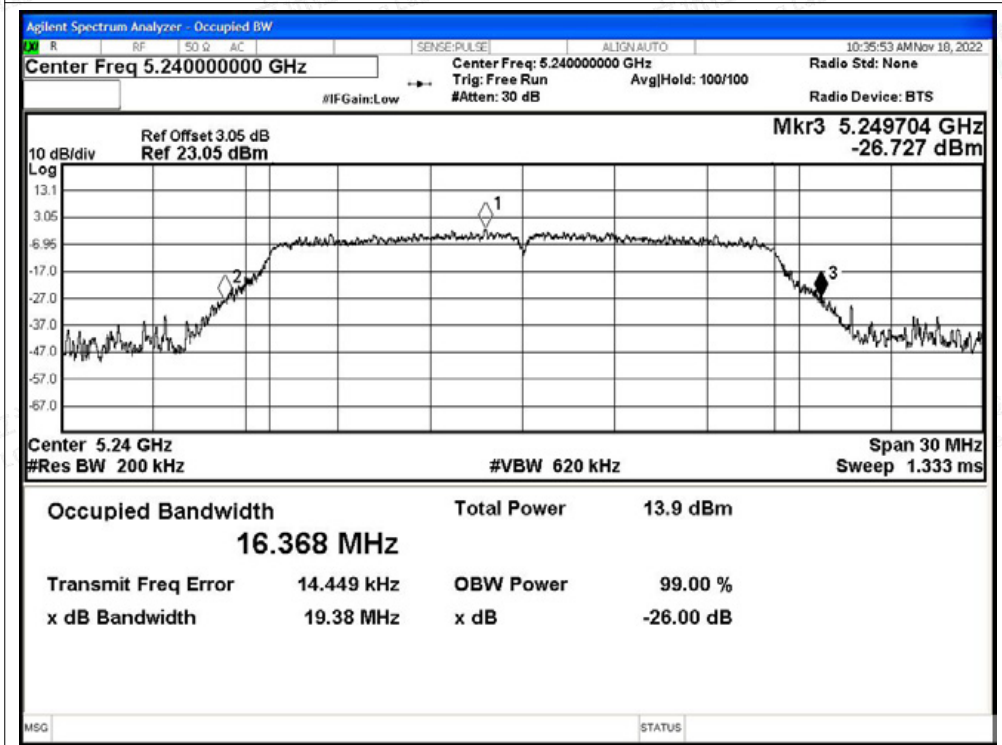


-26dB Bandwidth NVNT n20 5180MHz Ant1

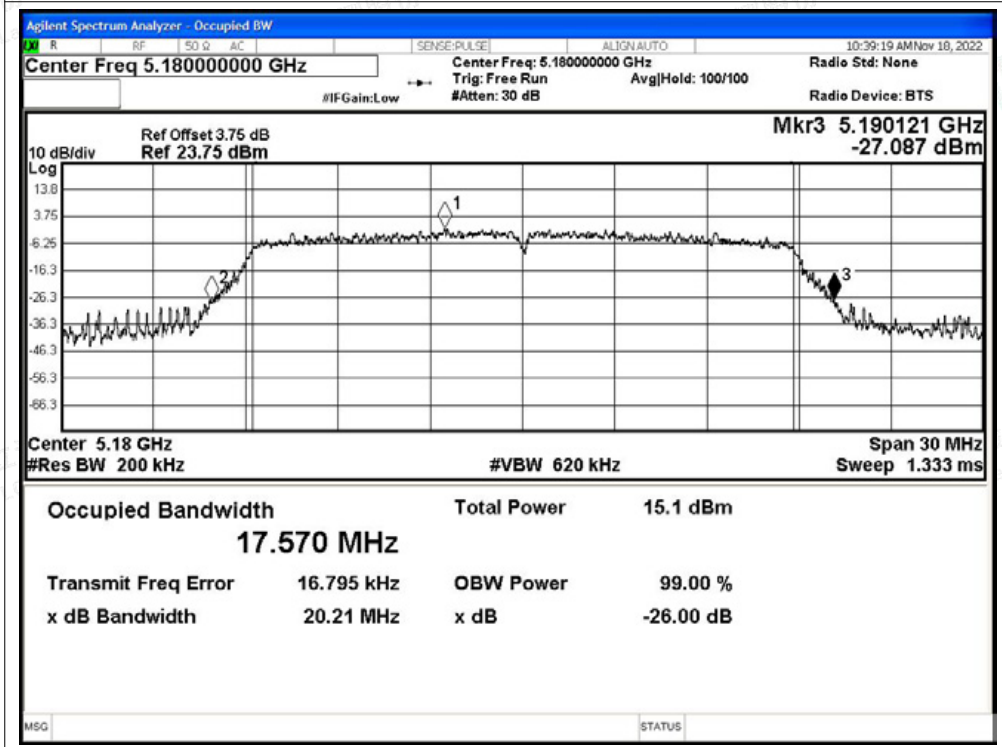




-26dB Bandwidth NVNT n20 5200MHz Ant1

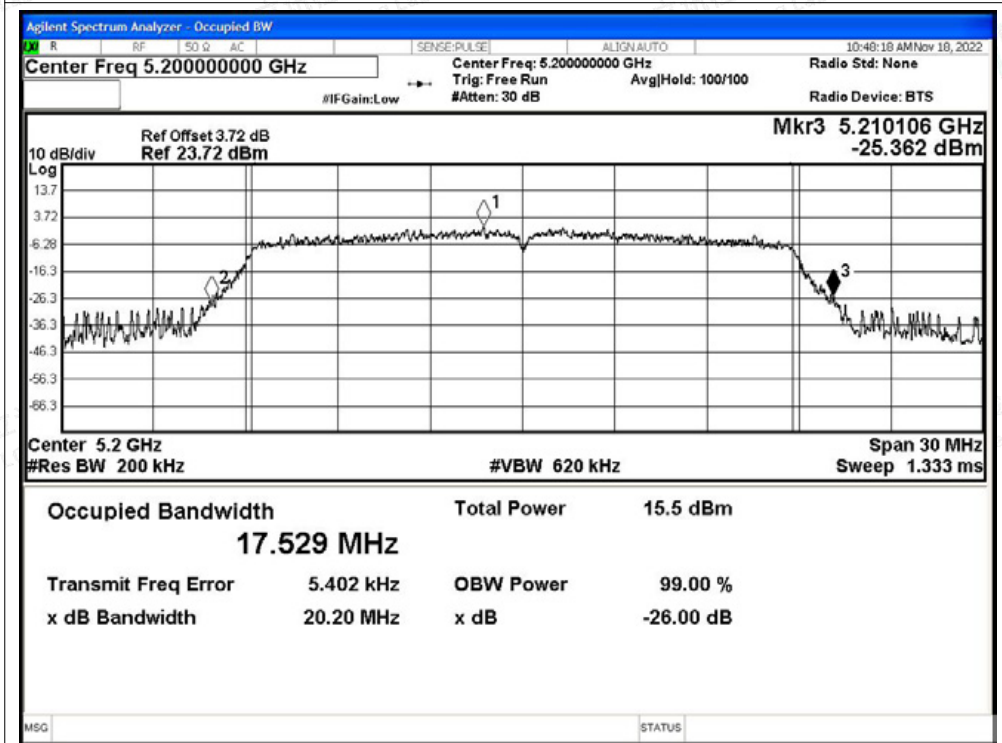


-26dB Bandwidth NVNT n20 5240MHz Ant1

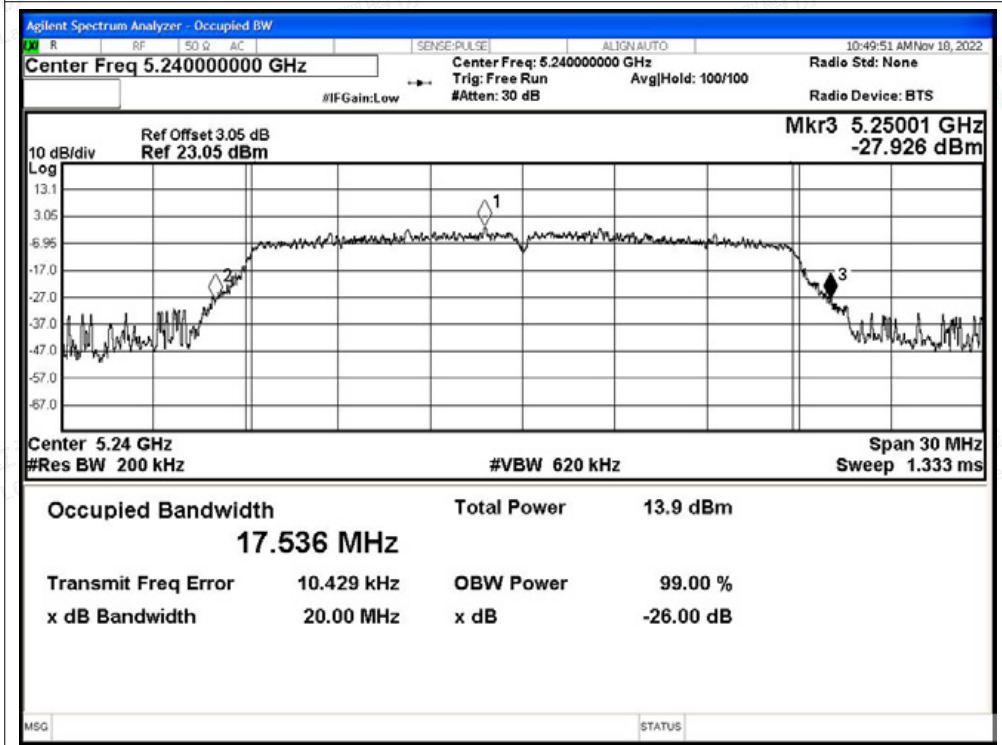




-26dB Bandwidth NVNT n40 5190MHz Ant1

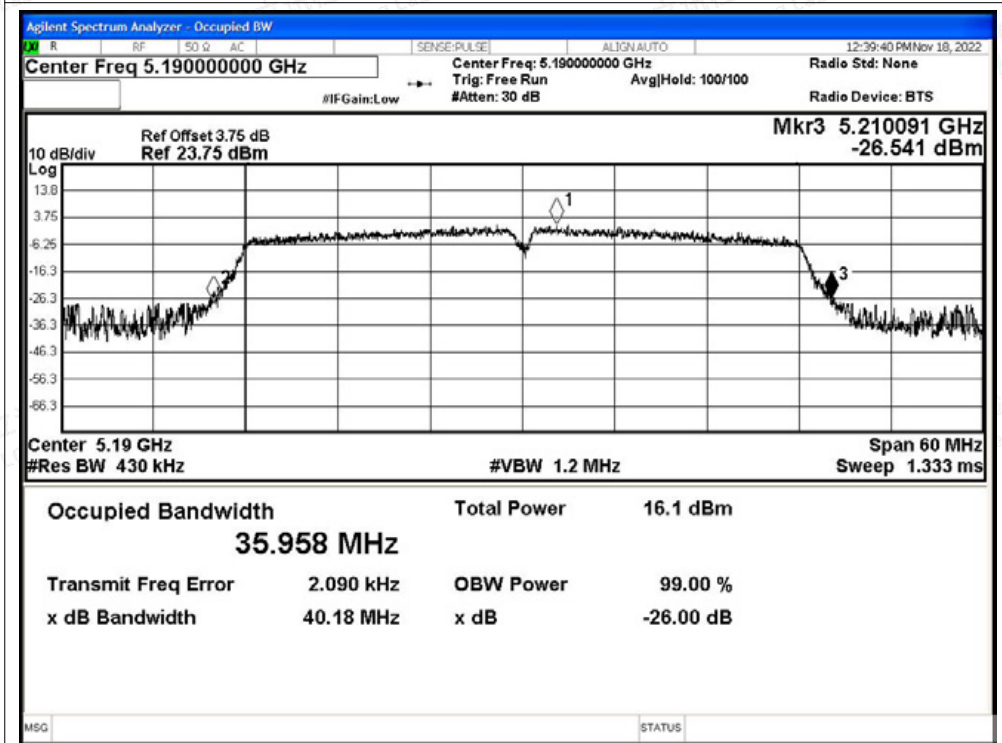


-26dB Bandwidth NVNT n40 5230MHz Ant1

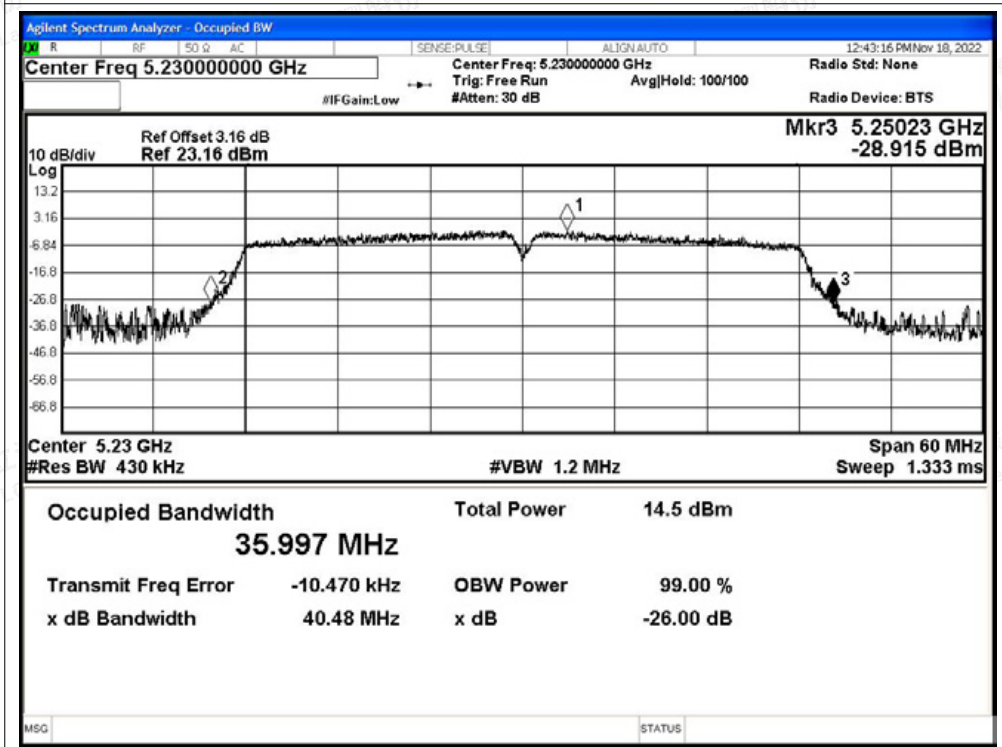




-26dB Bandwidth NVNT ac20 5180MHz Ant1

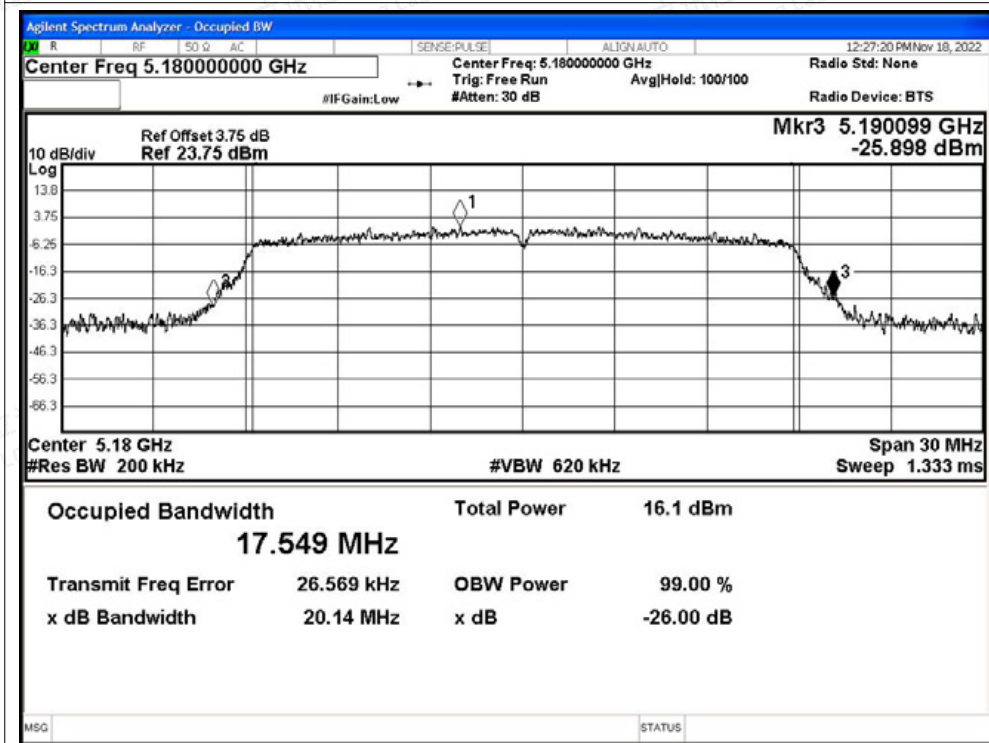


-26dB Bandwidth NVNT ac20 5200MHz Ant1

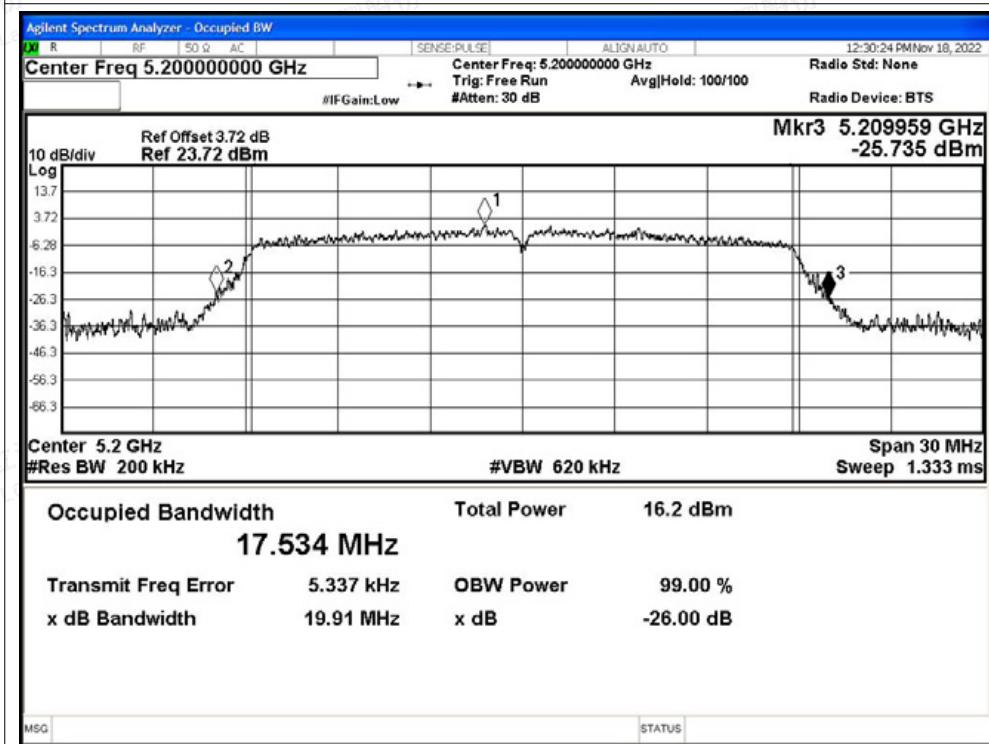




-26dB Bandwidth NVNT ac20 5240MHz Ant1

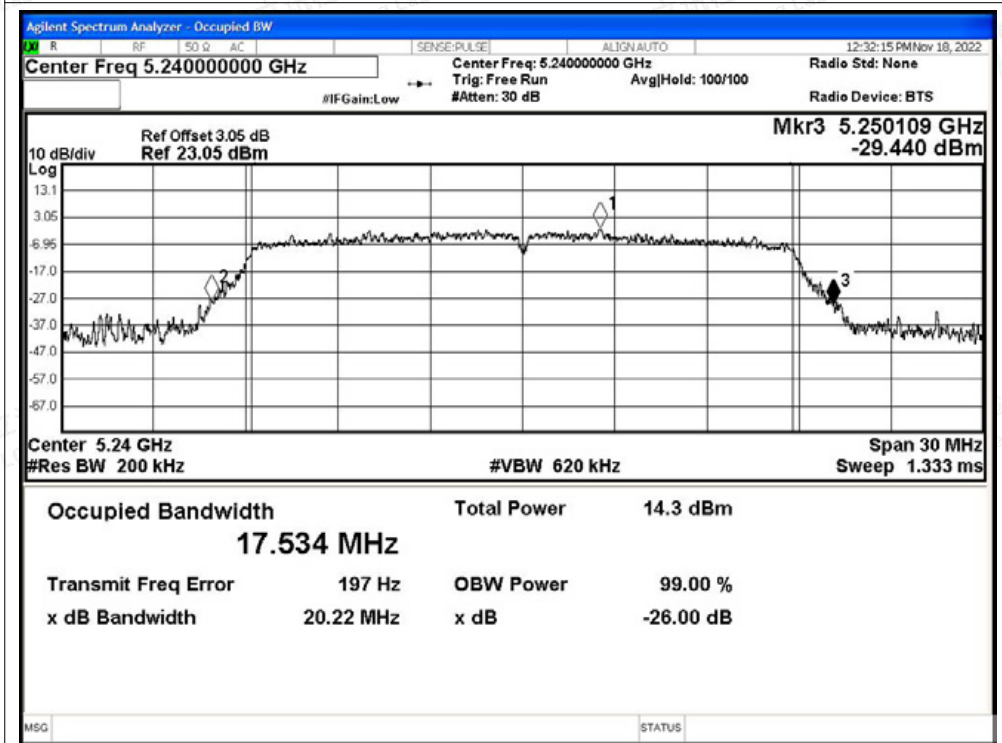


-26dB Bandwidth NVNT ac40 5190MHz Ant1

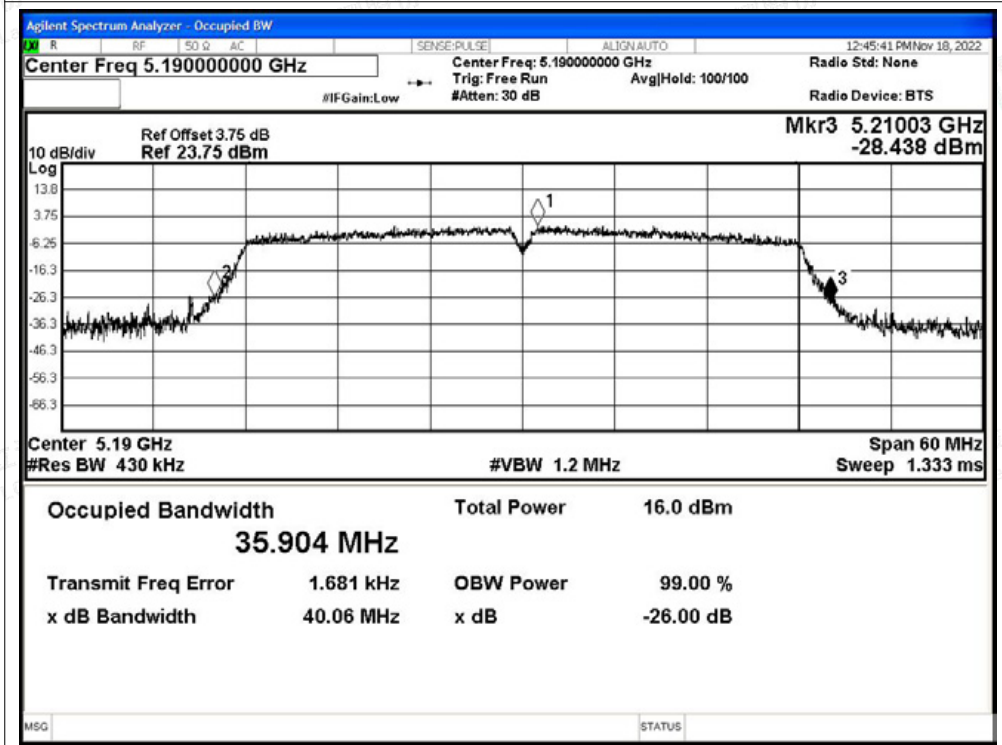






-26dB Bandwidth NVNT ac40 5230MHz Ant1

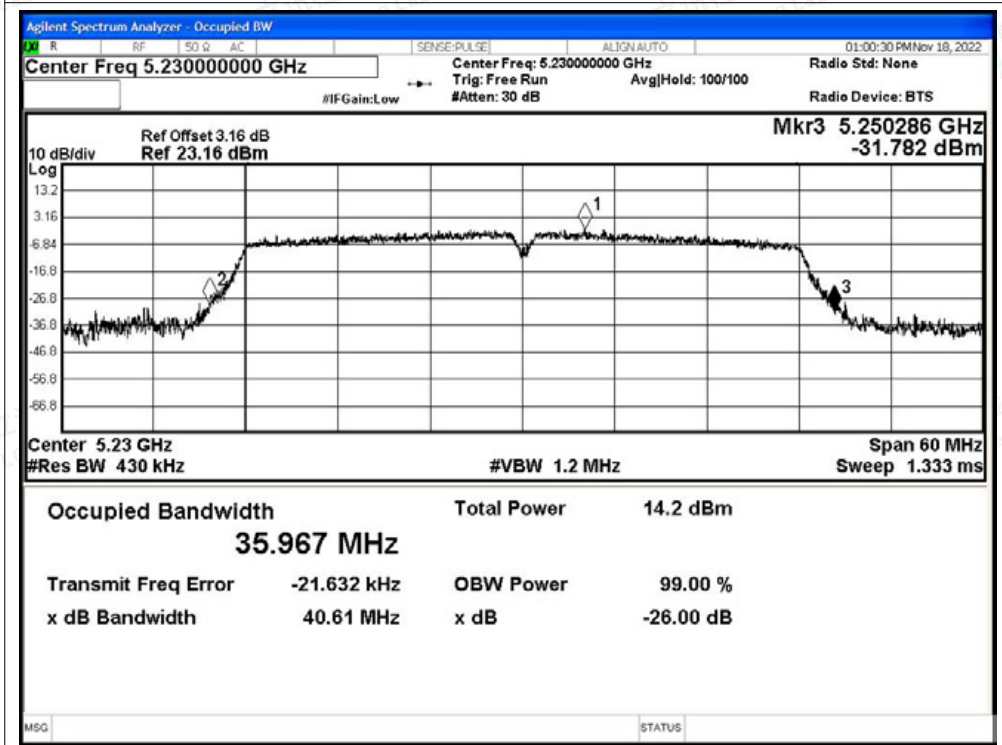

-26dB Bandwidth NVNT ac80 5210MHz Ant1

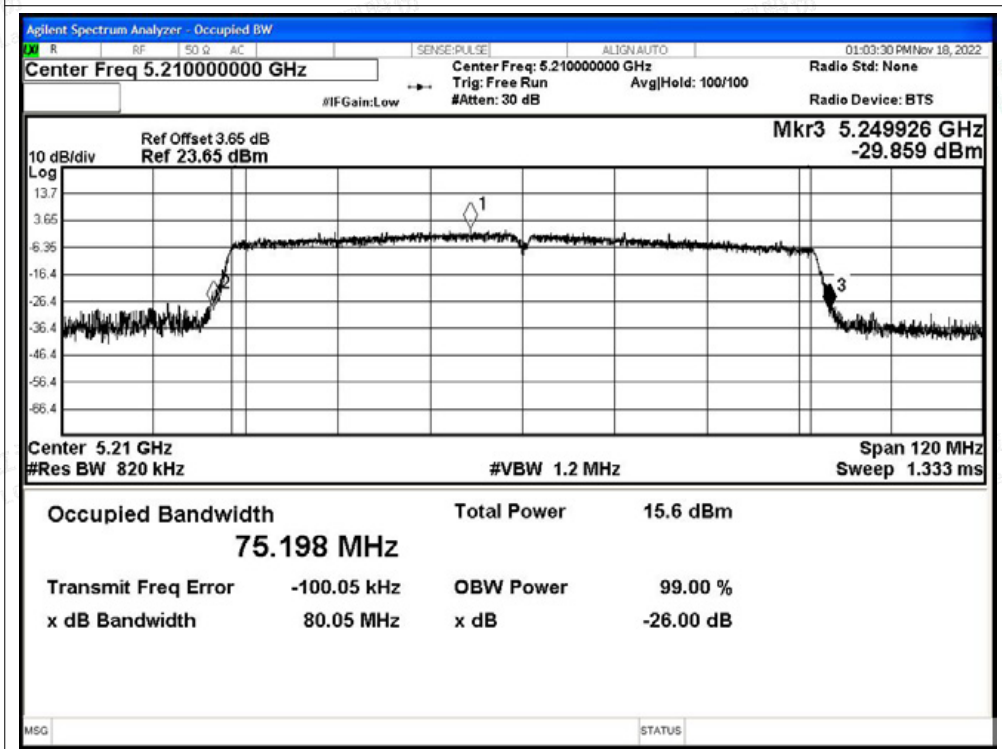



## B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	10.17	0.14	10.31	24	Pass
NVNT	a	5200	Ant0	9.83	0.13	9.96	24	Pass
NVNT	a	5240	Ant0	8.13	0.13	8.26	24	Pass
NVNT	n20	5180	Ant0	9.73	0.15	9.88	24	Pass
NVNT	n20	5200	Ant0	9.85	0.15	10	24	Pass
NVNT	n20	5240	Ant0	8.48	0.15	8.63	24	Pass
NVNT	n40	5190	Ant0	9.61	0.28	9.89	24	Pass
NVNT	n40	5230	Ant0	8.25	0.28	8.53	24	Pass
NVNT	ac20	5180	Ant0	9.74	0.15	9.89	24	Pass
NVNT	ac20	5200	Ant0	9.76	0.14	9.9	24	Pass
NVNT	ac20	5240	Ant0	8.32	0.14	8.46	24	Pass
NVNT	ac40	5190	Ant0	9.77	0.28	10.05	24	Pass
NVNT	ac40	5230	Ant0	8.42	0.28	8.7	24	Pass
NVNT	ac80	5210	Ant0	8.89	0.54	9.43	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	9.81	0.13	9.94	24	Pass
NVNT	a	5200	Ant1	9.82	0.13	9.95	24	Pass
NVNT	a	5240	Ant1	8.13	0.13	8.26	24	Pass
NVNT	n20	5180	Ant1	9.54	0.15	9.69	24	Pass
NVNT	n20	5200	Ant1	9.69	0.15	9.84	24	Pass
NVNT	n20	5240	Ant1	8.27	0.15	8.42	24	Pass
NVNT	n40	5190	Ant1	10.05	0.29	10.34	24	Pass
NVNT	n40	5230	Ant1	8.58	0.28	8.86	24	Pass
NVNT	ac20	5180	Ant1	10.28	0.14	10.42	24	Pass
NVNT	ac20	5200	Ant1	10.55	0.14	10.69	24	Pass
NVNT	ac20	5240	Ant1	8.64	0.14	8.78	24	Pass
NVNT	ac40	5190	Ant1	10.13	0.28	10.41	24	Pass
NVNT	ac40	5230	Ant1	8.3	0.28	8.58	24	Pass
NVNT	ac80	5210	Ant1	8.86	0.55	9.41	24	Pass





MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5180	9.88	9.69	12.80	21.99	Pass
NVNT	n20	5200	10	9.84	12.93	21.99	Pass
NVNT	n20	5240	8.63	8.42	11.54	21.99	Pass
NVNT	n40	5190	9.89	10.34	13.13	21.99	Pass
NVNT	n40	5230	8.53	8.86	11.71	21.99	Pass
NVNT	ac20	5180	9.89	10.42	13.17	21.99	Pass
NVNT	ac20	5200	9.9	10.69	13.32	21.99	Pass
NVNT	ac20	5240	8.46	8.78	11.63	21.99	Pass
NVNT	ac40	5190	10.05	10.41	13.24	21.99	Pass
NVNT	ac40	5230	8.7	8.58	11.65	21.99	Pass
NVNT	ac80	5210	9.43	9.41	12.43	21.99	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity



### B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	-1.61	0.14	-1.47	11.00	Pass
NVNT	a	5200	Ant0	-1.87	0.13	-1.74	11.00	Pass
NVNT	a	5240	Ant0	-3.97	0.13	-3.84	11.00	Pass
NVNT	n20	5180	Ant0	-2.61	0.15	-2.46	11.00	Pass
NVNT	n20	5200	Ant0	-2.38	0.15	-2.23	11.00	Pass
NVNT	n20	5240	Ant0	-4.17	0.15	-4.02	11.00	Pass
NVNT	n40	5190	Ant0	-6.63	0.28	-6.35	11.00	Pass
NVNT	n40	5230	Ant0	-9.02	0.28	-8.74	11.00	Pass
NVNT	ac20	5180	Ant0	-2.65	0.15	-2.5	11.00	Pass
NVNT	ac20	5200	Ant0	-2.49	0.14	-2.35	11.00	Pass
NVNT	ac20	5240	Ant0	-4.58	0.14	-4.44	11.00	Pass
NVNT	ac40	5190	Ant0	-6.76	0.28	-6.48	11.00	Pass
NVNT	ac40	5230	Ant0	-7.96	0.28	-7.68	11.00	Pass
NVNT	ac80	5210	Ant0	-11.33	0.54	-10.79	11.00	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-2.15	0.13	-2.02	11.00	Pass
NVNT	a	5200	Ant1	-1.27	0.13	-1.14	11.00	Pass
NVNT	a	5240	Ant1	-3.39	0.13	-3.26	11.00	Pass
NVNT	n20	5180	Ant1	-3.15	0.15	-3.00	11.00	Pass
NVNT	n20	5200	Ant1	-2.76	0.15	-2.61	11.00	Pass
NVNT	n20	5240	Ant1	-3.87	0.15	-3.72	11.00	Pass
NVNT	n40	5190	Ant1	-6.26	0.29	-5.97	11.00	Pass
NVNT	n40	5230	Ant1	-8.59	0.28	-8.31	11.00	Pass
NVNT	ac20	5180	Ant1	-2.33	0.14	-2.19	11.00	Pass
NVNT	ac20	5200	Ant1	-2.06	0.14	-1.92	11.00	Pass
NVNT	ac20	5240	Ant1	-4.31	0.14	-4.17	11.00	Pass
NVNT	ac40	5190	Ant1	-5.63	0.28	-5.35	11.00	Pass
NVNT	ac40	5230	Ant1	-7.32	0.28	-7.04	11.00	Pass
NVNT	ac80	5210	Ant1	-12.01	0.55	-11.46	11.00	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5180	-2.46	-3.00	0.29	8.99	Pass
NVNT	n20	5200	-2.23	-2.61	0.59	8.99	Pass
NVNT	n20	5240	-4.02	-3.72	-0.86	8.99	Pass
NVNT	n40	5190	-6.35	-5.97	-3.15	8.99	Pass
NVNT	n40	5230	-8.74	-8.31	-5.51	8.99	Pass
NVNT	ac20	5180	-2.5	-2.19	0.67	8.99	Pass
NVNT	ac20	5200	-2.35	-1.92	0.88	8.99	Pass
NVNT	ac20	5240	-4.44	-4.17	-1.29	8.99	Pass
NVNT	ac40	5190	-6.48	-5.35	-2.87	8.99	Pass
NVNT	ac40	5230	-7.68	-7.04	-4.34	8.99	Pass
NVNT	ac80	5210	-10.79	-11.46	-8.10	8.99	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant0

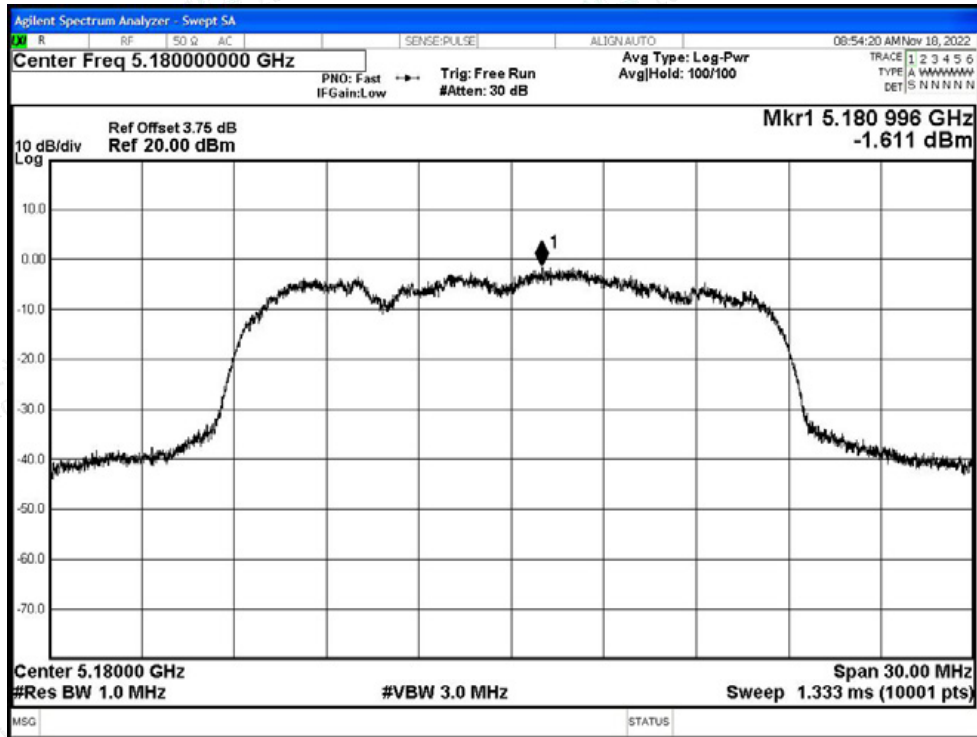


PSD NVNT a 5200MHz Ant0

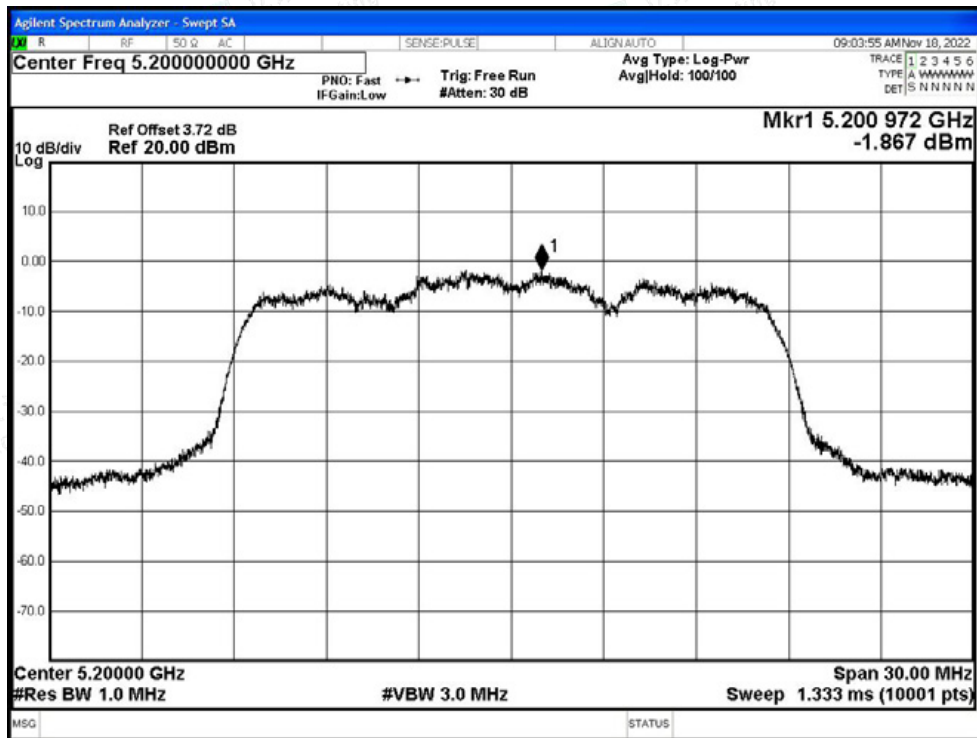




PSD NVNT a 5240MHz Ant0

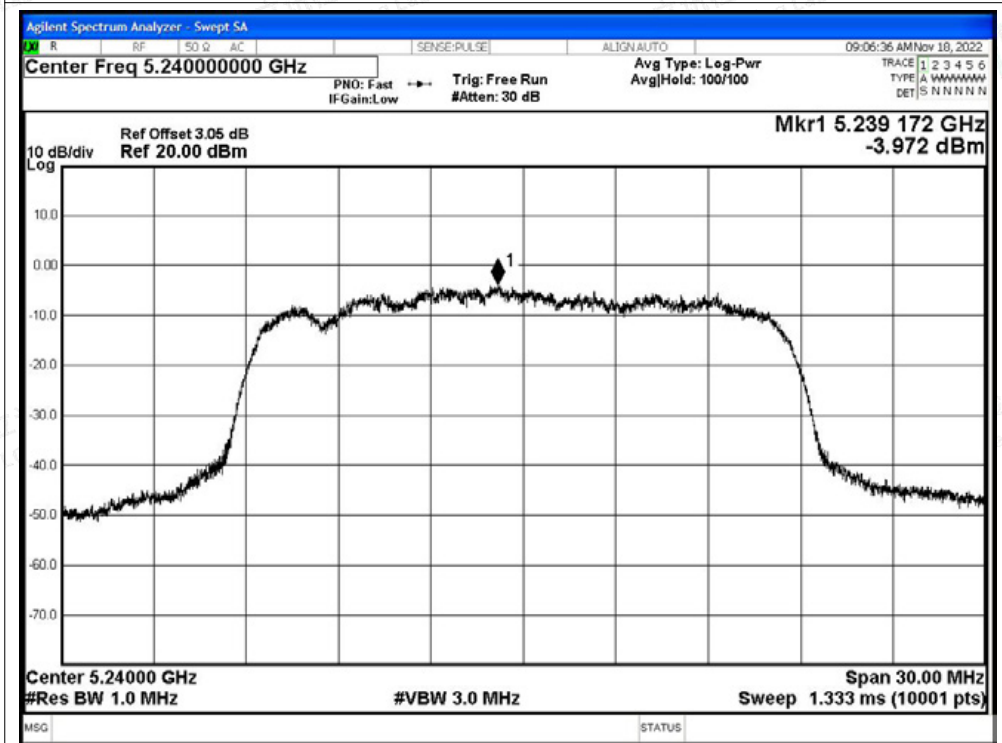


PSD NVNT n20 5180MHz Ant0

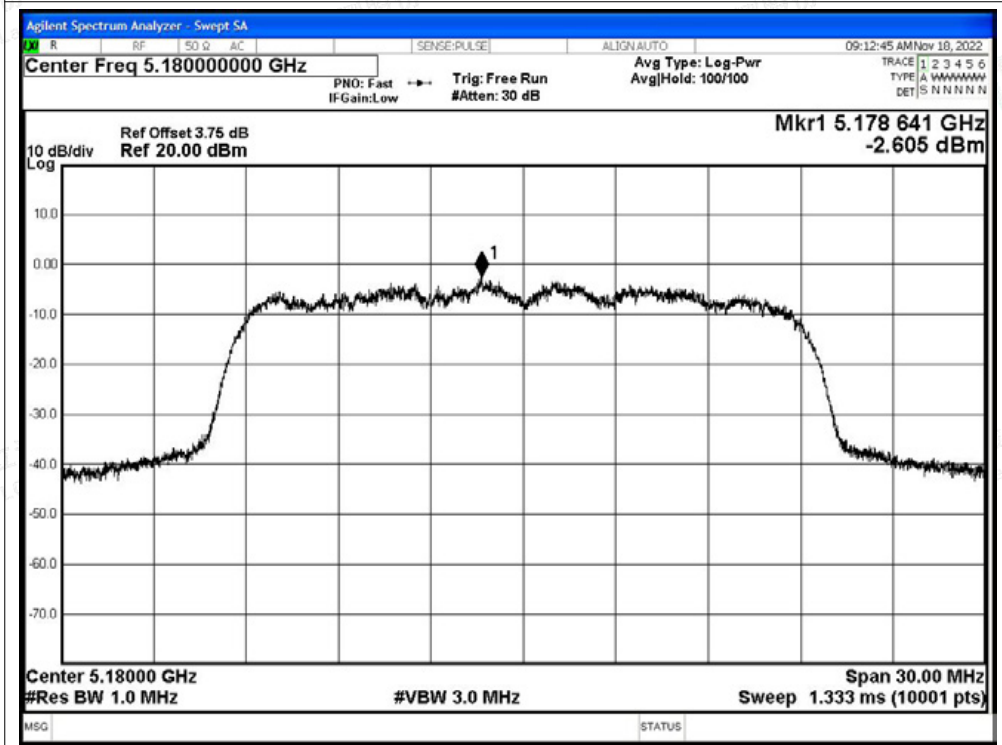




PSD NVNT n20 5200MHz Ant0

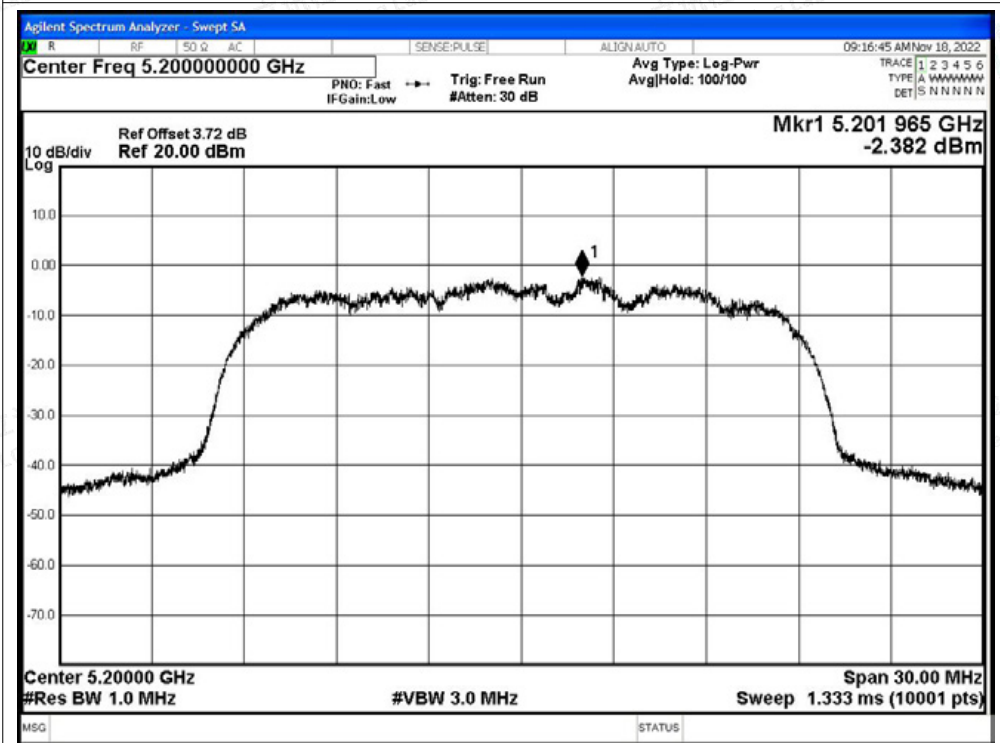


PSD NVNT n20 5240MHz Ant0

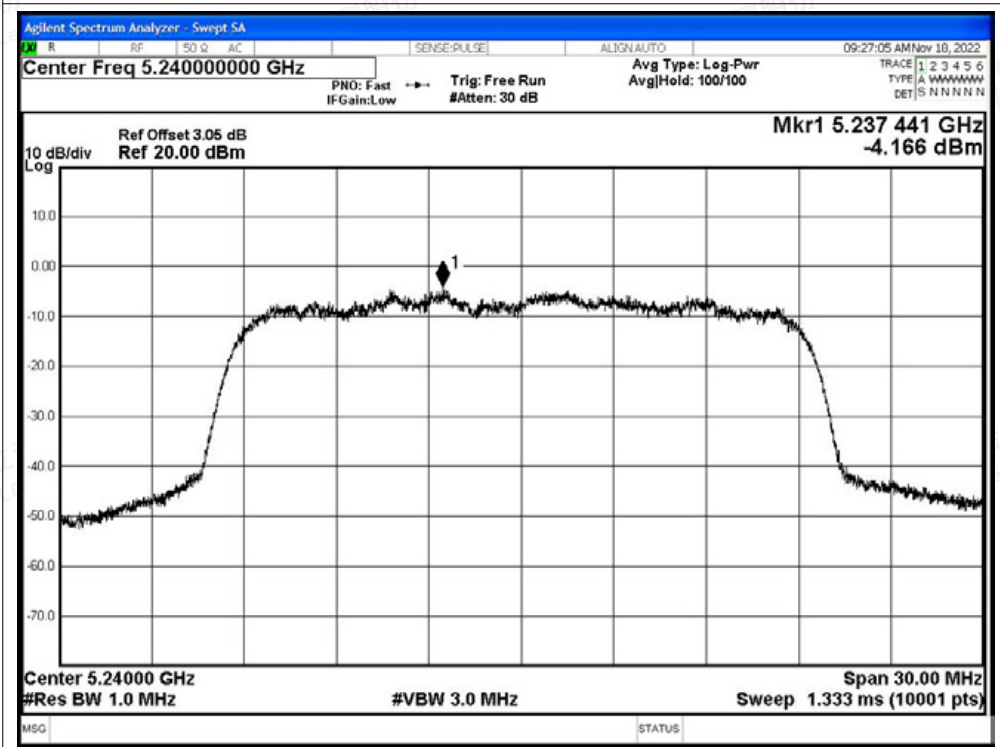






PSD NVNT n40 5190MHz Ant0

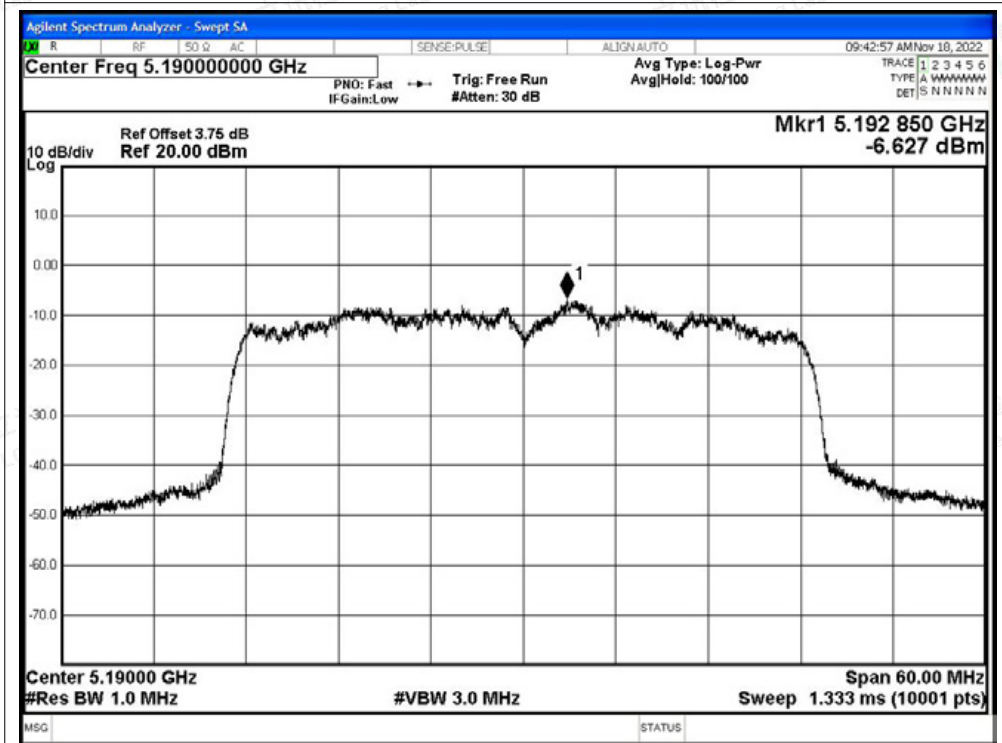


PSD NVNT n40 5230MHz Ant0

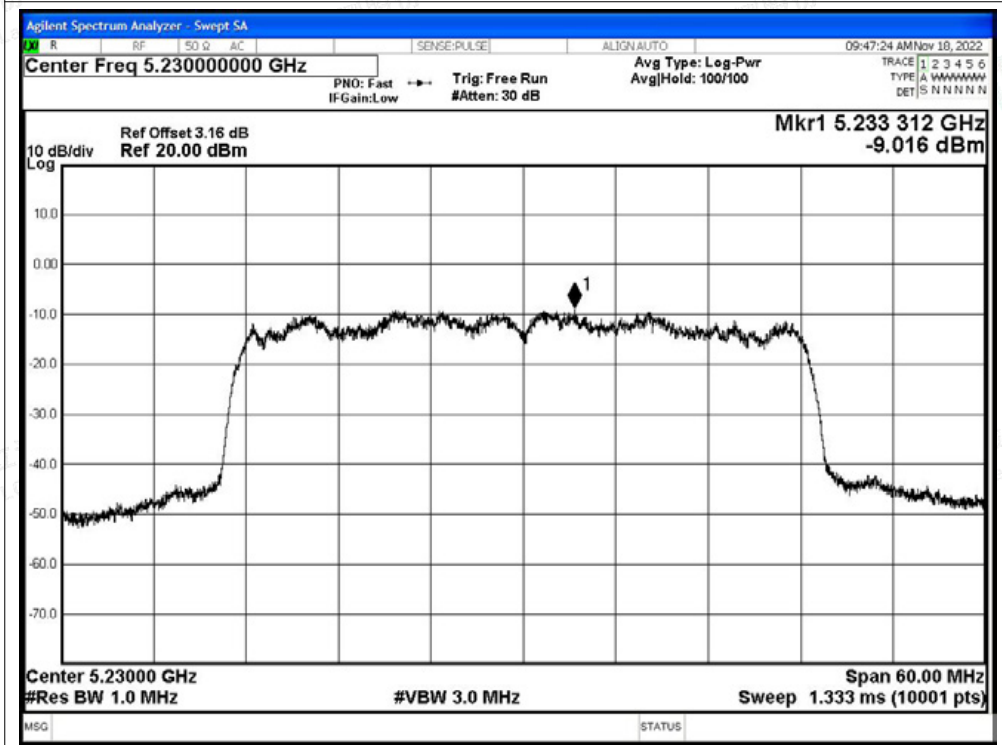




PSD NVNT ac20 5180MHz Ant0

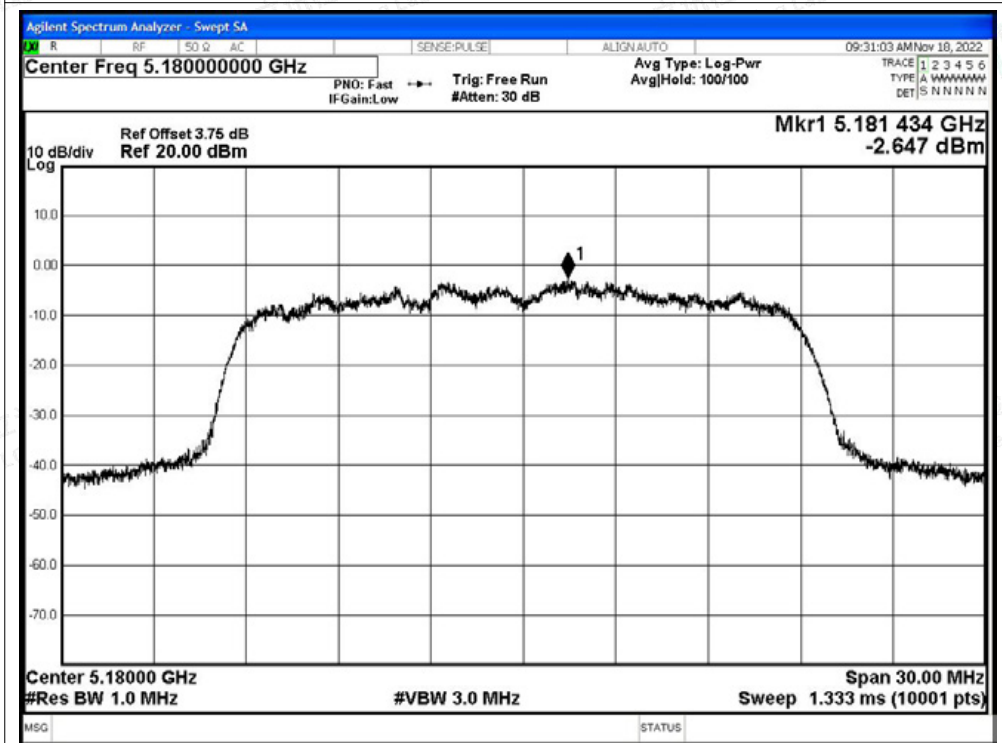


PSD NVNT ac20 5200MHz Ant0

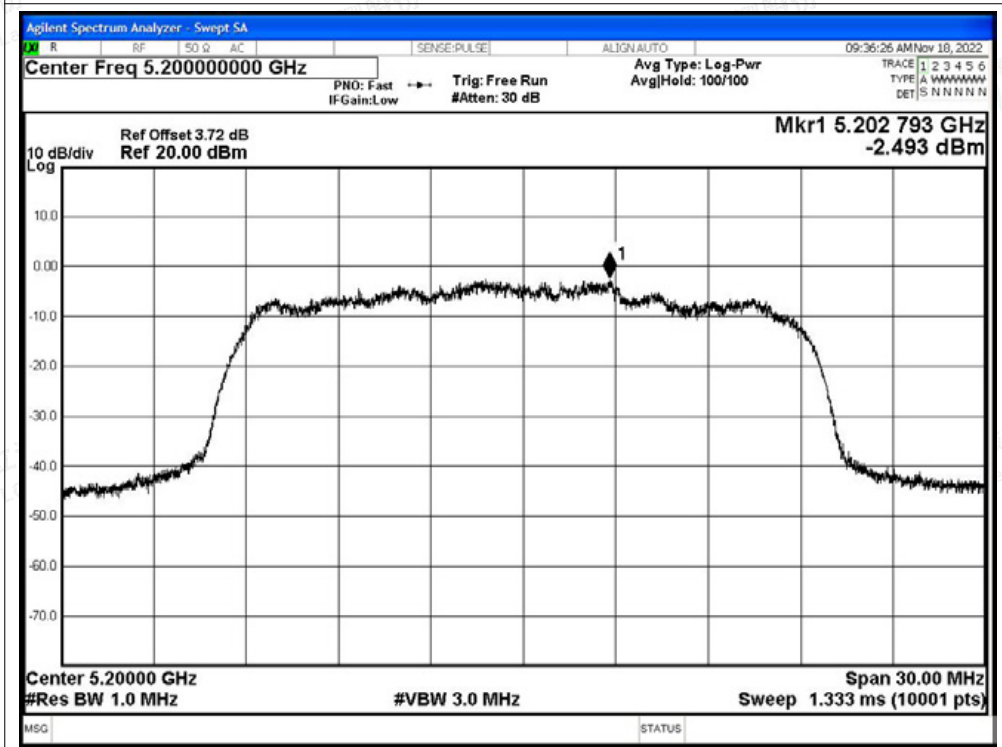




PSD NVNT ac20 5240MHz Ant0

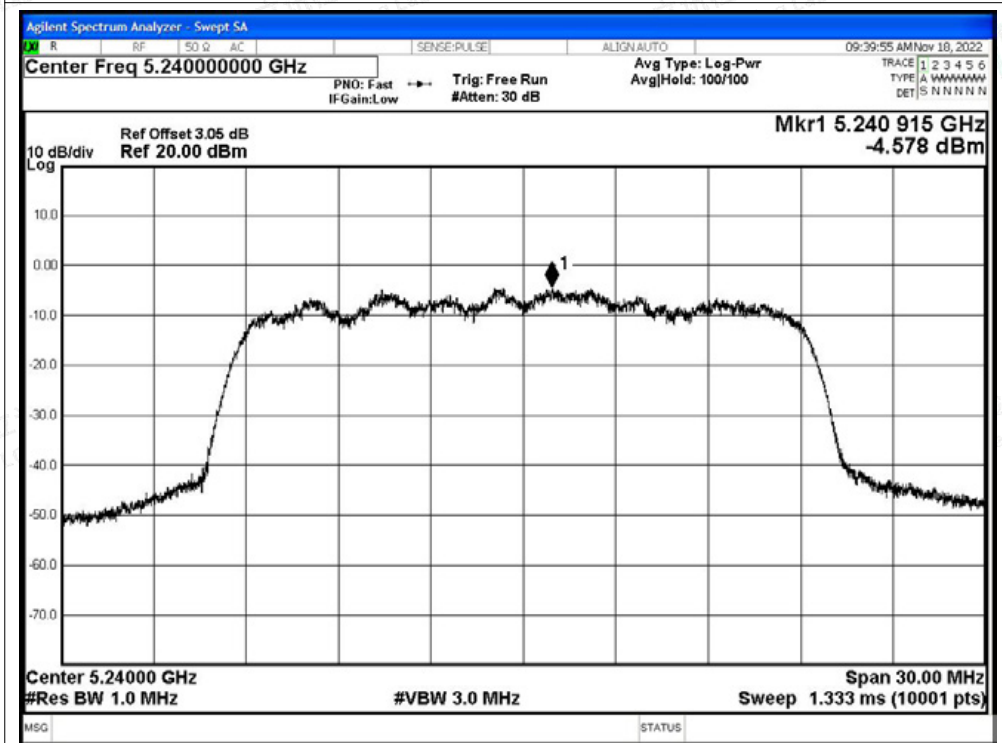


PSD NVNT ac40 5190MHz Ant0

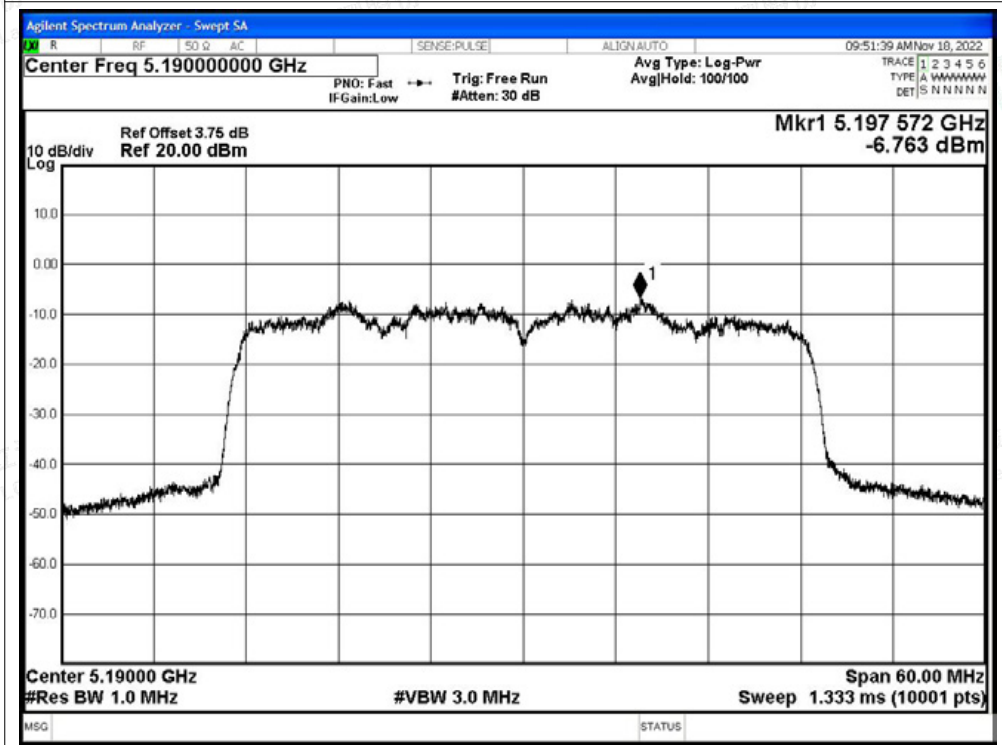




PSD NVNT ac40 5230MHz Ant0

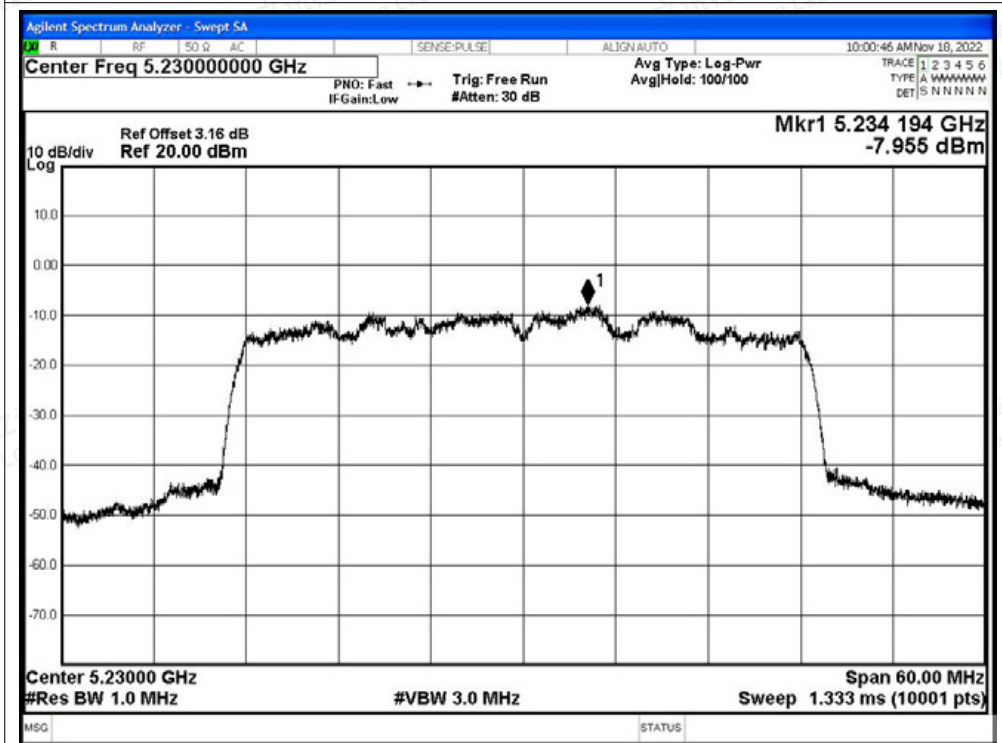


PSD NVNT ac80 5210MHz Ant0

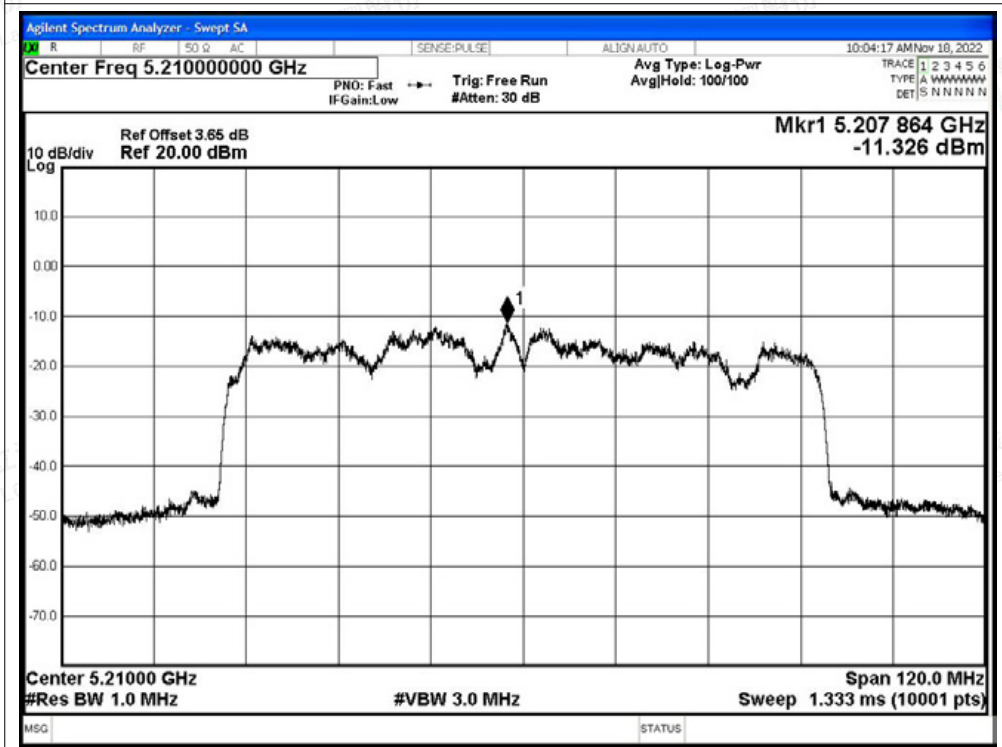




Test Graphs

PSD NVNT a 5180MHz Ant1

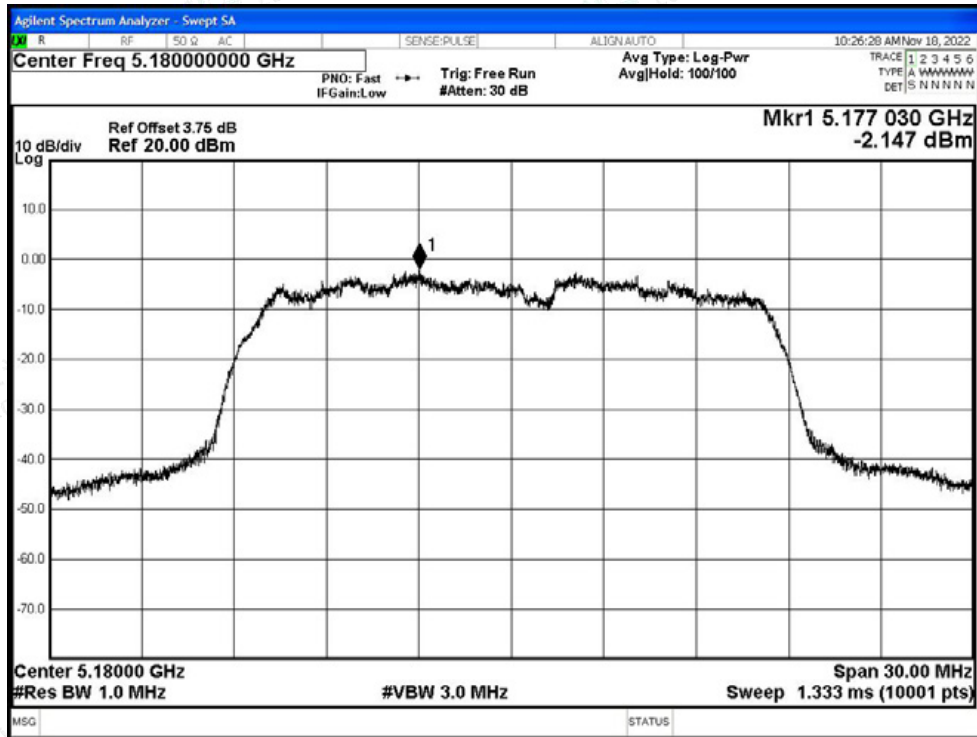


PSD NVNT a 5200MHz Ant1

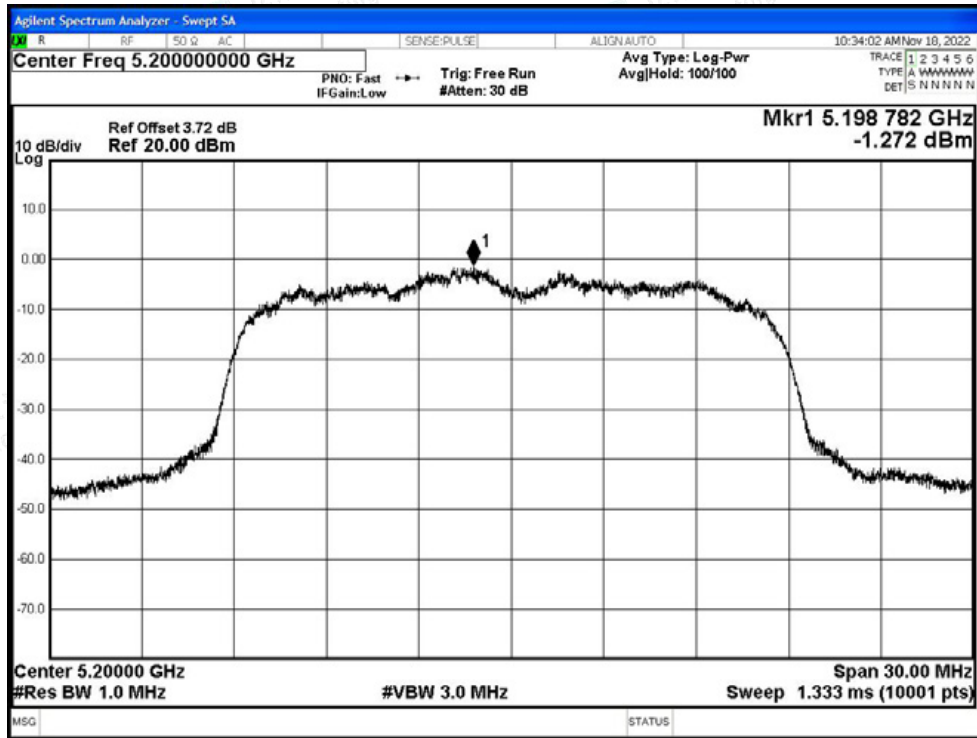




PSD NVNT a 5240MHz Ant1

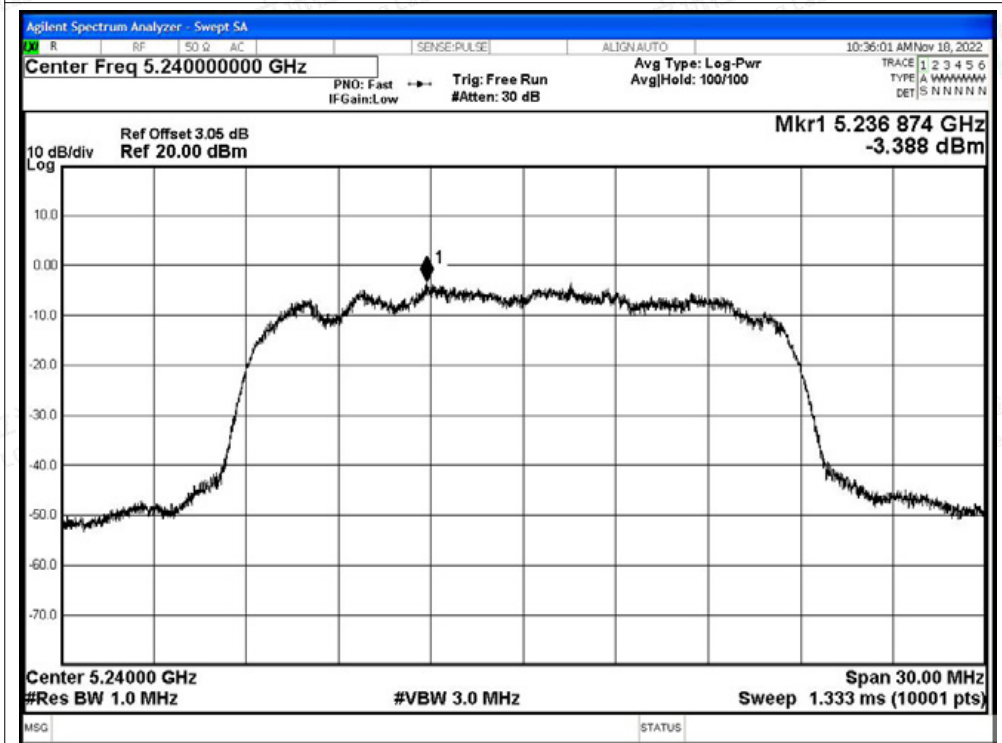


PSD NVNT n20 5180MHz Ant1

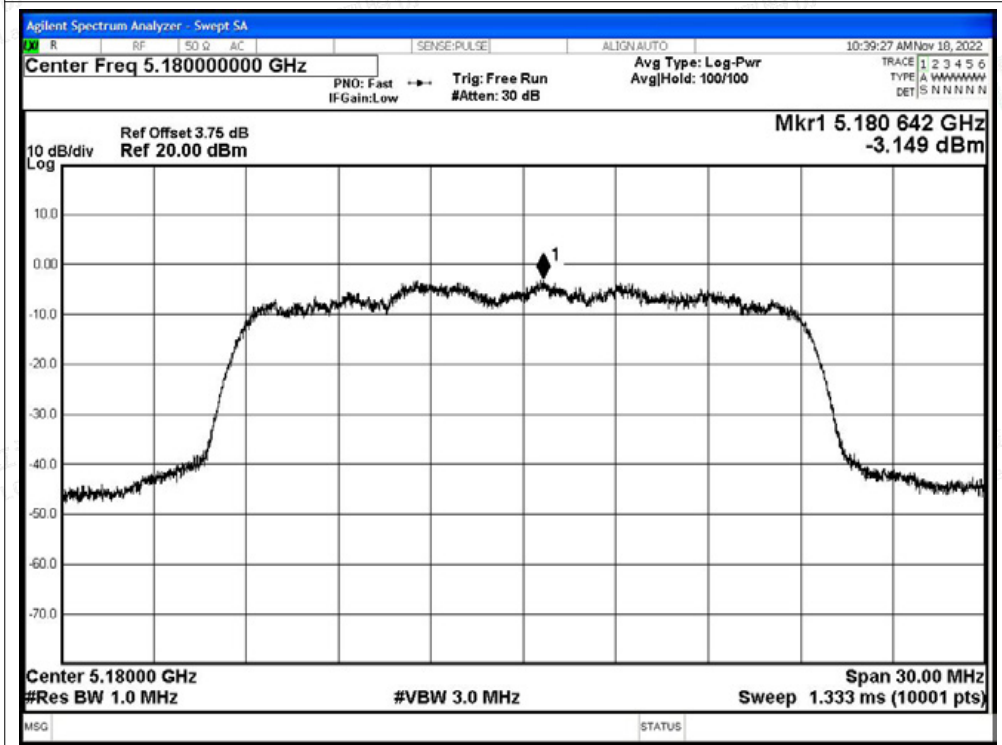




PSD NVNT n20 5200MHz Ant1

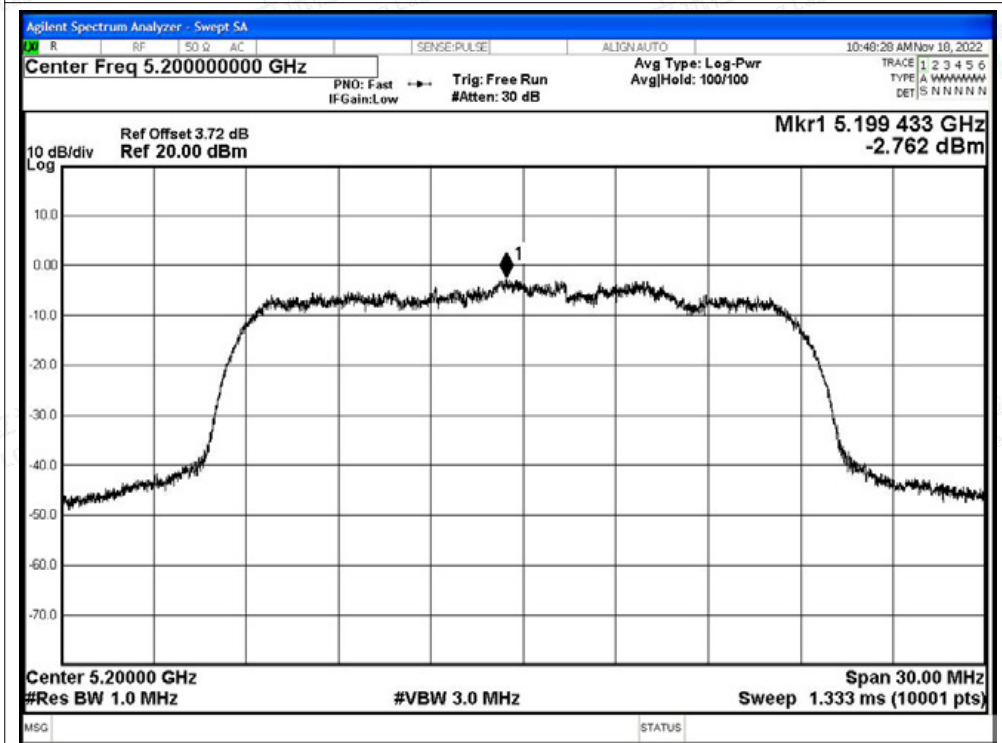


PSD NVNT n20 5240MHz Ant1

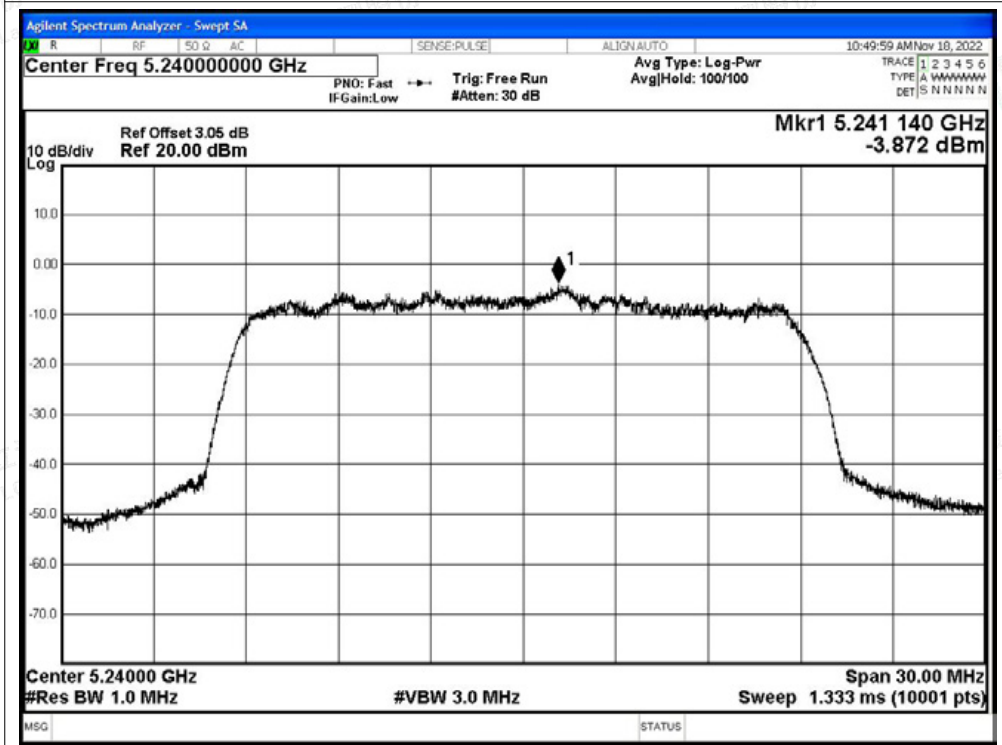




PSD NVNT n40 5190MHz Ant1

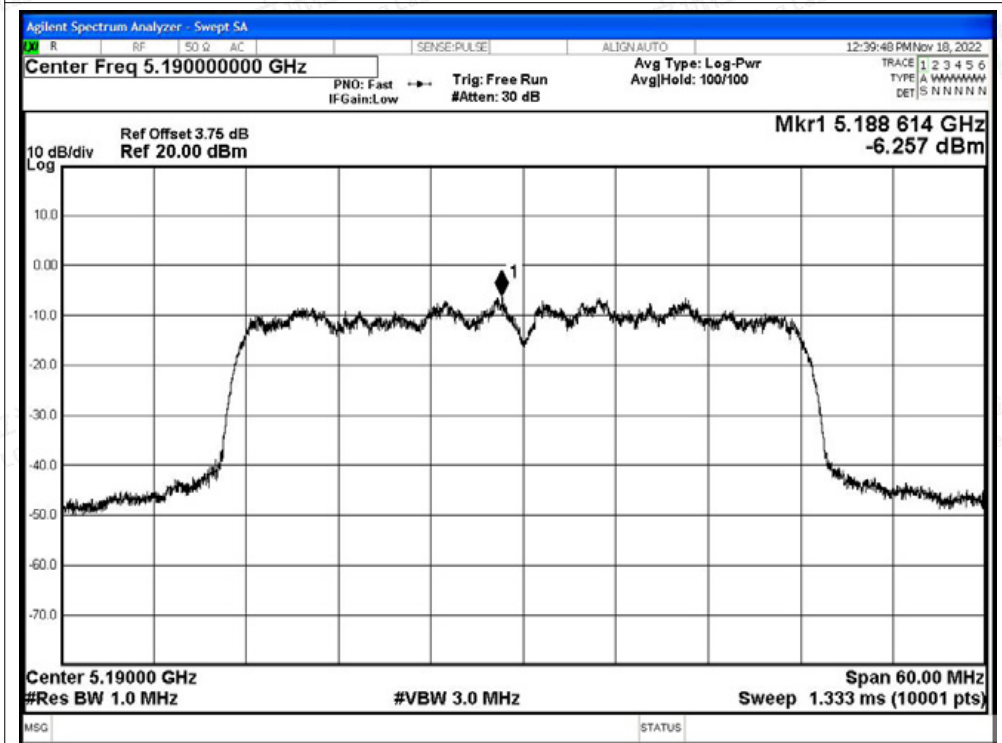


PSD NVNT n40 5230MHz Ant1

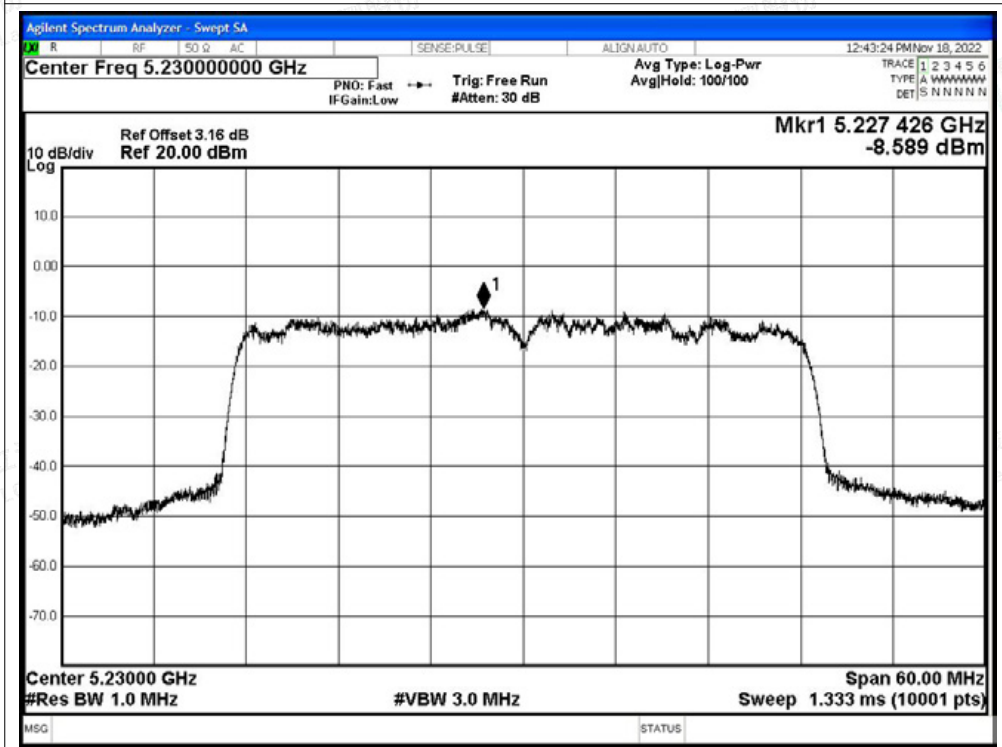





PSD NVNT ac20 5180MHz Ant1

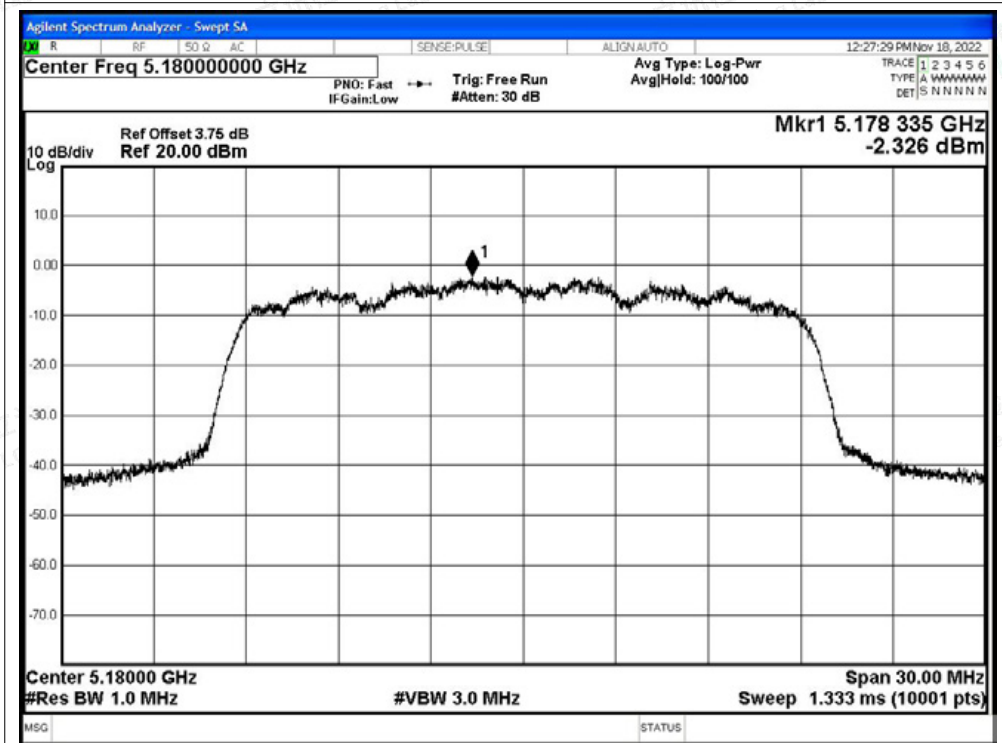

PSD NVNT ac20 5200MHz Ant1

