

## Annex C. Conducted Test Results

### Maximum Conducted Output Power Measurement

| Test Mode       |           | Mode 2: IEEE 802.11a Continuous TX mode |       |             |
|-----------------|-----------|-----------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                   |       | Limit (dBm) |
|                 |           | (dBm)                                   | (W)   |             |
| 5180.0          | 6 M       | 19.66                                   | 0.092 | ≤ 30.00     |
| 5200.0          |           | 19.89                                   | 0.097 | ≤ 30.00     |
| 5220.0          |           | 19.81                                   | 0.096 | ≤ 30.00     |
| 5240.0          |           | 20.31                                   | 0.107 | ≤ 30.00     |
| 5745.0          |           | 20.51                                   | 0.112 | ≤ 30.00     |
| 5765.0          |           | 19.85                                   | 0.097 | ≤ 30.00     |
| 5785.0          |           | 19.89                                   | 0.097 | ≤ 30.00     |
| 5805.0          |           | 19.75                                   | 0.094 | ≤ 30.00     |
| 5825.0          |           | 19.69                                   | 0.093 | ≤ 30.00     |
| Frequency (MHz) | Data Rate | ANT-1                                   |       | Limit (dBm) |
|                 |           | (dBm)                                   | (W)   |             |
| 5180.0          | 6 M       | 19.62                                   | 0.092 | ≤ 30.00     |
| 5200.0          |           | 19.61                                   | 0.091 | ≤ 30.00     |
| 5220.0          |           | 19.57                                   | 0.091 | ≤ 30.00     |
| 5240.0          |           | 19.73                                   | 0.094 | ≤ 30.00     |
| 5745.0          |           | 20.83                                   | 0.121 | ≤ 30.00     |
| 5765.0          |           | 20.17                                   | 0.104 | ≤ 30.00     |
| 5785.0          |           | 20.21                                   | 0.105 | ≤ 30.00     |
| 5805.0          |           | 20.05                                   | 0.101 | ≤ 30.00     |
| 5825.0          |           | 19.93                                   | 0.098 | ≤ 30.00     |
| Frequency (MHz) | Data Rate | ANT-0+1                                 |       | Limit (dBm) |
|                 |           | (dBm)                                   | (W)   |             |
| 5180.0          | 6 M       | 22.65                                   | 0.184 | ≤ 30.00     |
| 5200.0          |           | 22.76                                   | 0.189 | ≤ 30.00     |
| 5220.0          |           | 22.70                                   | 0.186 | ≤ 30.00     |
| 5240.0          |           | 23.04                                   | 0.201 | ≤ 30.00     |
| 5745.0          |           | 23.68                                   | 0.234 | ≤ 30.00     |
| 5765.0          |           | 23.02                                   | 0.201 | ≤ 30.00     |
| 5785.0          |           | 23.06                                   | 0.202 | ≤ 30.00     |
| 5805.0          |           | 22.91                                   | 0.196 | ≤ 30.00     |
| 5825.0          |           | 22.82                                   | 0.192 | ≤ 30.00     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 3: IEEE 802.11an 20 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 19.49                                           | 0.089 | ≤ 28.11     |
| 5200.0          |           | 19.69                                           | 0.093 | ≤ 28.11     |
| 5220.0          |           | 19.55                                           | 0.090 | ≤ 28.11     |
| 5240.0          |           | 19.95                                           | 0.099 | ≤ 28.11     |
| 5745.0          |           | 20.39                                           | 0.109 | ≤ 28.59     |
| 5765.0          |           | 19.54                                           | 0.090 | ≤ 28.59     |
| 5785.0          |           | 19.57                                           | 0.091 | ≤ 28.59     |
| 5805.0          |           | 19.59                                           | 0.091 | ≤ 28.59     |
| 5825.0          |           | 19.48                                           | 0.089 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 19.33                                           | 0.086 | ≤ 28.11     |
| 5200.0          |           | 19.30                                           | 0.085 | ≤ 28.11     |
| 5220.0          |           | 19.25                                           | 0.084 | ≤ 28.11     |
| 5240.0          |           | 19.46                                           | 0.088 | ≤ 28.11     |
| 5745.0          |           | 20.41                                           | 0.110 | ≤ 28.59     |
| 5765.0          |           | 20.13                                           | 0.103 | ≤ 28.59     |
| 5785.0          |           | 20.14                                           | 0.103 | ≤ 28.59     |
| 5805.0          |           | 20.07                                           | 0.102 | ≤ 28.59     |
| 5825.0          |           | 19.98                                           | 0.100 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 22.42                                           | 0.175 | ≤ 28.11     |
| 5200.0          |           | 22.51                                           | 0.178 | ≤ 28.11     |
| 5220.0          |           | 22.41                                           | 0.174 | ≤ 28.11     |
| 5240.0          |           | 22.72                                           | 0.187 | ≤ 28.11     |
| 5745.0          |           | 23.41                                           | 0.219 | ≤ 28.59     |
| 5765.0          |           | 22.86                                           | 0.193 | ≤ 28.59     |
| 5785.0          |           | 22.87                                           | 0.194 | ≤ 28.59     |
| 5805.0          |           | 22.85                                           | 0.193 | ≤ 28.59     |
| 5825.0          |           | 22.75                                           | 0.188 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 4: IEEE 802.11an 40 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 18.35                                           | 0.068 | ≤ 28.11     |
| 5230.0          |           | 20.07                                           | 0.102 | ≤ 28.11     |
| 5755.0          |           | 20.43                                           | 0.110 | ≤ 28.59     |
| 5795.0          |           | 20.00                                           | 0.100 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 18.04                                           | 0.064 | ≤ 28.11     |
| 5230.0          |           | 20.01                                           | 0.100 | ≤ 28.11     |
| 5755.0          |           | 20.60                                           | 0.115 | ≤ 28.59     |
| 5795.0          |           | 20.22                                           | 0.105 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 21.21                                           | 0.132 | ≤ 28.11     |
| 5230.0          |           | 23.05                                           | 0.202 | ≤ 28.11     |
| 5755.0          |           | 23.53                                           | 0.225 | ≤ 28.59     |
| 5795.0          |           | 23.12                                           | 0.205 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 19.51                                           | 0.089 | ≤ 28.11     |
| 5200.0          |           | 19.70                                           | 0.093 | ≤ 28.11     |
| 5220.0          |           | 19.65                                           | 0.092 | ≤ 28.11     |
| 5240.0          |           | 20.02                                           | 0.100 | ≤ 28.11     |
| 5745.0          |           | 20.41                                           | 0.110 | ≤ 28.59     |
| 5765.0          |           | 19.66                                           | 0.092 | ≤ 28.59     |
| 5785.0          |           | 19.71                                           | 0.094 | ≤ 28.59     |
| 5805.0          |           | 19.62                                           | 0.092 | ≤ 28.59     |
| 5825.0          |           | 19.52                                           | 0.090 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 19.41                                           | 0.087 | ≤ 28.11     |
| 5200.0          |           | 19.44                                           | 0.088 | ≤ 28.11     |
| 5220.0          |           | 19.40                                           | 0.087 | ≤ 28.11     |
| 5240.0          |           | 19.53                                           | 0.090 | ≤ 28.11     |
| 5745.0          |           | 20.51                                           | 0.112 | ≤ 28.59     |
| 5765.0          |           | 20.21                                           | 0.105 | ≤ 28.59     |
| 5785.0          |           | 20.27                                           | 0.106 | ≤ 28.59     |
| 5805.0          |           | 20.20                                           | 0.105 | ≤ 28.59     |
| 5825.0          |           | 20.12                                           | 0.103 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 22.47                                           | 0.177 | ≤ 28.11     |
| 5200.0          |           | 22.58                                           | 0.181 | ≤ 28.11     |
| 5220.0          |           | 22.54                                           | 0.179 | ≤ 28.11     |
| 5240.0          |           | 22.79                                           | 0.190 | ≤ 28.11     |
| 5745.0          |           | 23.47                                           | 0.222 | ≤ 28.59     |
| 5765.0          |           | 22.95                                           | 0.197 | ≤ 28.59     |
| 5785.0          |           | 23.01                                           | 0.200 | ≤ 28.59     |
| 5805.0          |           | 22.93                                           | 0.196 | ≤ 28.59     |
| 5825.0          |           | 22.84                                           | 0.192 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 18.48                                           | 0.070 | ≤ 28.11     |
| 5230.0          |           | 20.16                                           | 0.104 | ≤ 28.11     |
| 5755.0          |           | 20.49                                           | 0.112 | ≤ 28.59     |
| 5795.0          |           | 20.03                                           | 0.101 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 18.17                                           | 0.066 | ≤ 28.11     |
| 5230.0          |           | 20.07                                           | 0.102 | ≤ 28.11     |
| 5755.0          |           | 20.63                                           | 0.116 | ≤ 28.59     |
| 5795.0          |           | 20.31                                           | 0.107 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 21.34                                           | 0.136 | ≤ 28.11     |
| 5230.0          |           | 23.13                                           | 0.205 | ≤ 28.11     |
| 5755.0          |           | 23.57                                           | 0.228 | ≤ 28.59     |
| 5795.0          |           | 23.18                                           | 0.208 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5210.0          | 58.5 M    | 18.17                                           | 0.066 | ≤ 28.11     |
| 5775.0          |           | 19.73                                           | 0.094 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5210.0          | 58.5 M    | 17.52                                           | 0.056 | ≤ 28.11     |
| 5775.0          |           | 19.94                                           | 0.099 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5210.0          | 58.5 M    | 20.87                                           | 0.122 | ≤ 28.11     |
| 5775.0          |           | 22.85                                           | 0.193 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | MCS 0     | 19.43                                           | 0.088 | ≤ 28.11     |
| 5200.0          |           | 19.44                                           | 0.088 | ≤ 28.11     |
| 5220.0          |           | 19.39                                           | 0.087 | ≤ 28.11     |
| 5240.0          |           | 19.94                                           | 0.099 | ≤ 28.11     |
| 5745.0          |           | 20.02                                           | 0.100 | ≤ 28.59     |
| 5765.0          |           | 19.41                                           | 0.087 | ≤ 28.59     |
| 5785.0          |           | 19.49                                           | 0.089 | ≤ 28.59     |
| 5805.0          |           | 19.38                                           | 0.087 | ≤ 28.59     |
| 5825.0          |           | 19.52                                           | 0.090 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | MCS 0     | 19.25                                           | 0.084 | ≤ 28.11     |
| 5200.0          |           | 19.31                                           | 0.085 | ≤ 28.11     |
| 5220.0          |           | 19.22                                           | 0.084 | ≤ 28.11     |
| 5240.0          |           | 19.42                                           | 0.087 | ≤ 28.11     |
| 5745.0          |           | 20.39                                           | 0.109 | ≤ 28.59     |
| 5765.0          |           | 19.93                                           | 0.098 | ≤ 28.59     |
| 5785.0          |           | 20.01                                           | 0.100 | ≤ 28.59     |
| 5805.0          |           | 19.85                                           | 0.097 | ≤ 28.59     |
| 5825.0          |           | 19.72                                           | 0.094 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | MCS 0     | 22.35                                           | 0.172 | ≤ 28.11     |
| 5200.0          |           | 22.39                                           | 0.173 | ≤ 28.11     |
| 5220.0          |           | 22.32                                           | 0.170 | ≤ 28.11     |
| 5240.0          |           | 22.70                                           | 0.186 | ≤ 28.11     |
| 5745.0          |           | 23.22                                           | 0.210 | ≤ 28.59     |
| 5765.0          |           | 22.69                                           | 0.186 | ≤ 28.59     |
| 5785.0          |           | 22.77                                           | 0.189 | ≤ 28.59     |
| 5805.0          |           | 22.63                                           | 0.183 | ≤ 28.59     |
| 5825.0          |           | 22.63                                           | 0.183 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | MCS 0     | 18.45                                           | 0.070 | ≤ 28.11     |
| 5230.0          |           | 19.83                                           | 0.096 | ≤ 28.11     |
| 5755.0          |           | 20.28                                           | 0.107 | ≤ 28.59     |
| 5795.0          |           | 19.81                                           | 0.096 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | MCS 0     | 18.23                                           | 0.067 | ≤ 28.11     |
| 5230.0          |           | 19.71                                           | 0.094 | ≤ 28.11     |
| 5755.0          |           | 20.41                                           | 0.110 | ≤ 28.59     |
| 5795.0          |           | 20.12                                           | 0.103 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | MCS 0     | 21.35                                           | 0.137 | ≤ 28.11     |
| 5230.0          |           | 22.78                                           | 0.190 | ≤ 28.11     |
| 5755.0          |           | 23.36                                           | 0.217 | ≤ 28.59     |
| 5795.0          |           | 22.98                                           | 0.199 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |       |             |
|-----------------|-----------|--------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                            |       | Limit (dBm) |
|                 |           | (dBm)                                            | (W)   |             |
| 5210.0          | MCS 0     | 18.41                                            | 0.069 | ≤ 28.11     |
| 5775.0          |           | 19.51                                            | 0.089 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                            |       | Limit (dBm) |
|                 |           | (dBm)                                            | (W)   |             |
| 5210.0          | MCS 0     | 17.83                                            | 0.061 | ≤ 28.11     |
| 5775.0          |           | 19.84                                            | 0.096 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                          |       | Limit (dBm) |
|                 |           | (dBm)                                            | (W)   |             |
| 5210.0          | MCS 0     | 21.14                                            | 0.130 | ≤ 28.11     |
| 5775.0          |           | 22.69                                            | 0.186 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

## Beamforming on

| Test Mode       |           | Mode 3: IEEE 802.11an 20 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 16.20                                           | 0.042 | ≤ 28.11     |
| 5200.0          |           | 16.42                                           | 0.044 | ≤ 28.11     |
| 5220.0          |           | 16.36                                           | 0.043 | ≤ 28.11     |
| 5240.0          |           | 16.90                                           | 0.049 | ≤ 28.11     |
| 5745.0          |           | 16.89                                           | 0.049 | ≤ 28.59     |
| 5765.0          |           | 15.98                                           | 0.040 | ≤ 28.59     |
| 5785.0          |           | 16.20                                           | 0.042 | ≤ 28.59     |
| 5805.0          |           | 16.10                                           | 0.041 | ≤ 28.59     |
| 5825.0          |           | 15.92                                           | 0.039 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 15.86                                           | 0.039 | ≤ 28.11     |
| 5200.0          |           | 15.95                                           | 0.039 | ≤ 28.11     |
| 5220.0          |           | 15.91                                           | 0.039 | ≤ 28.11     |
| 5240.0          |           | 16.16                                           | 0.041 | ≤ 28.11     |
| 5745.0          |           | 17.01                                           | 0.050 | ≤ 28.59     |
| 5765.0          |           | 16.72                                           | 0.047 | ≤ 28.59     |
| 5785.0          |           | 16.73                                           | 0.047 | ≤ 28.59     |
| 5805.0          |           | 16.56                                           | 0.045 | ≤ 28.59     |
| 5825.0          |           | 16.39                                           | 0.044 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 19.04                                           | 0.080 | ≤ 28.11     |
| 5200.0          |           | 19.20                                           | 0.083 | ≤ 28.11     |
| 5220.0          |           | 19.15                                           | 0.082 | ≤ 28.11     |
| 5240.0          |           | 19.56                                           | 0.090 | ≤ 28.11     |
| 5745.0          |           | 19.96                                           | 0.099 | ≤ 28.59     |
| 5765.0          |           | 19.38                                           | 0.087 | ≤ 28.59     |
| 5785.0          |           | 19.48                                           | 0.089 | ≤ 28.59     |
| 5805.0          |           | 19.35                                           | 0.086 | ≤ 28.59     |
| 5825.0          |           | 19.17                                           | 0.083 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.



| Test Mode       |           | Mode 4: IEEE 802.11an 40 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 15.10                                           | 0.032 | ≤ 28.11     |
| 5230.0          |           | 16.98                                           | 0.050 | ≤ 28.11     |
| 5755.0          |           | 16.97                                           | 0.050 | ≤ 28.59     |
| 5795.0          |           | 16.64                                           | 0.046 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 14.57                                           | 0.029 | ≤ 28.11     |
| 5230.0          |           | 16.62                                           | 0.046 | ≤ 28.11     |
| 5755.0          |           | 17.46                                           | 0.056 | ≤ 28.59     |
| 5795.0          |           | 17.16                                           | 0.052 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 17.85                                           | 0.061 | ≤ 28.11     |
| 5230.0          |           | 19.81                                           | 0.096 | ≤ 28.11     |
| 5755.0          |           | 20.23                                           | 0.105 | ≤ 28.59     |
| 5795.0          |           | 19.92                                           | 0.098 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 16.32                                           | 0.043 | ≤ 28.11     |
| 5200.0          |           | 16.47                                           | 0.044 | ≤ 28.11     |
| 5220.0          |           | 16.40                                           | 0.044 | ≤ 28.11     |
| 5240.0          |           | 16.93                                           | 0.049 | ≤ 28.11     |
| 5745.0          |           | 16.89                                           | 0.049 | ≤ 28.59     |
| 5765.0          |           | 16.12                                           | 0.041 | ≤ 28.59     |
| 5785.0          |           | 16.29                                           | 0.043 | ≤ 28.59     |
| 5805.0          |           | 16.11                                           | 0.041 | ≤ 28.59     |
| 5825.0          |           | 16.01                                           | 0.040 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 15.93                                           | 0.039 | ≤ 28.11     |
| 5200.0          |           | 16.03                                           | 0.040 | ≤ 28.11     |
| 5220.0          |           | 15.96                                           | 0.039 | ≤ 28.11     |
| 5240.0          |           | 16.21                                           | 0.042 | ≤ 28.11     |
| 5745.0          |           | 17.12                                           | 0.052 | ≤ 28.59     |
| 5765.0          |           | 16.75                                           | 0.047 | ≤ 28.59     |
| 5785.0          |           | 16.85                                           | 0.048 | ≤ 28.59     |
| 5805.0          |           | 16.70                                           | 0.047 | ≤ 28.59     |
| 5825.0          |           | 16.51                                           | 0.045 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | 13 M      | 19.14                                           | 0.082 | ≤ 28.11     |
| 5200.0          |           | 19.27                                           | 0.084 | ≤ 28.11     |
| 5220.0          |           | 19.20                                           | 0.083 | ≤ 28.11     |
| 5240.0          |           | 19.60                                           | 0.091 | ≤ 28.11     |
| 5745.0          |           | 20.02                                           | 0.100 | ≤ 28.59     |
| 5765.0          |           | 19.46                                           | 0.088 | ≤ 28.59     |
| 5785.0          |           | 19.59                                           | 0.091 | ≤ 28.59     |
| 5805.0          |           | 19.43                                           | 0.088 | ≤ 28.59     |
| 5825.0          |           | 19.28                                           | 0.085 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 15.12                                           | 0.033 | ≤ 28.11     |
| 5230.0          |           | 17.02                                           | 0.050 | ≤ 28.11     |
| 5755.0          |           | 17.07                                           | 0.051 | ≤ 28.59     |
| 5795.0          |           | 16.65                                           | 0.046 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 14.58                                           | 0.029 | ≤ 28.11     |
| 5230.0          |           | 16.72                                           | 0.047 | ≤ 28.11     |
| 5755.0          |           | 17.53                                           | 0.057 | ≤ 28.59     |
| 5795.0          |           | 17.28                                           | 0.053 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | 27 M      | 17.87                                           | 0.061 | ≤ 28.11     |
| 5230.0          |           | 19.88                                           | 0.097 | ≤ 28.11     |
| 5755.0          |           | 20.32                                           | 0.108 | ≤ 28.59     |
| 5795.0          |           | 19.99                                           | 0.100 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5210.0          | 58.6 M    | 14.62                                           | 0.029 | ≤ 28.11     |
| 5775.0          |           | 16.10                                           | 0.041 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5210.0          | 58.6 M    | 13.97                                           | 0.025 | ≤ 28.11     |
| 5775.0          |           | 16.86                                           | 0.049 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5210.0          | 58.6 M    | 17.32                                           | 0.054 | ≤ 28.11     |
| 5775.0          |           | 19.51                                           | 0.089 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | MCS 0     | 16.22                                           | 0.042 | ≤ 28.11     |
| 5200.0          |           | 16.37                                           | 0.043 | ≤ 28.11     |
| 5220.0          |           | 16.22                                           | 0.042 | ≤ 28.11     |
| 5240.0          |           | 16.82                                           | 0.048 | ≤ 28.11     |
| 5745.0          |           | 16.73                                           | 0.047 | ≤ 28.59     |
| 5765.0          |           | 16.08                                           | 0.041 | ≤ 28.59     |
| 5785.0          |           | 16.14                                           | 0.041 | ≤ 28.59     |
| 5805.0          |           | 15.92                                           | 0.039 | ≤ 28.59     |
| 5825.0          |           | 15.84                                           | 0.038 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | MCS 0     | 15.74                                           | 0.037 | ≤ 28.11     |
| 5200.0          |           | 15.81                                           | 0.038 | ≤ 28.11     |
| 5220.0          |           | 15.75                                           | 0.038 | ≤ 28.11     |
| 5240.0          |           | 15.93                                           | 0.039 | ≤ 28.11     |
| 5745.0          |           | 17.02                                           | 0.050 | ≤ 28.59     |
| 5765.0          |           | 16.58                                           | 0.045 | ≤ 28.59     |
| 5785.0          |           | 16.62                                           | 0.046 | ≤ 28.59     |
| 5805.0          |           | 16.45                                           | 0.044 | ≤ 28.59     |
| 5825.0          |           | 16.49                                           | 0.045 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5180.0          | MCS 0     | 19.00                                           | 0.079 | ≤ 28.11     |
| 5200.0          |           | 19.11                                           | 0.081 | ≤ 28.11     |
| 5220.0          |           | 19.00                                           | 0.079 | ≤ 28.11     |
| 5240.0          |           | 19.41                                           | 0.087 | ≤ 28.11     |
| 5745.0          |           | 19.89                                           | 0.097 | ≤ 28.59     |
| 5765.0          |           | 19.35                                           | 0.086 | ≤ 28.59     |
| 5785.0          |           | 19.40                                           | 0.087 | ≤ 28.59     |
| 5805.0          |           | 19.20                                           | 0.083 | ≤ 28.59     |
| 5825.0          |           | 19.19                                           | 0.083 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |       |             |
|-----------------|-----------|-------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | MCS 0     | 15.24                                           | 0.033 | ≤ 28.11     |
| 5230.0          |           | 16.79                                           | 0.048 | ≤ 28.11     |
| 5755.0          |           | 16.90                                           | 0.049 | ≤ 28.59     |
| 5795.0          |           | 16.48                                           | 0.044 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                           |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | MCS 0     | 14.77                                           | 0.030 | ≤ 28.11     |
| 5230.0          |           | 16.35                                           | 0.043 | ≤ 28.11     |
| 5755.0          |           | 17.37                                           | 0.055 | ≤ 28.59     |
| 5795.0          |           | 17.08                                           | 0.051 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                         |       | Limit (dBm) |
|                 |           | (dBm)                                           | (W)   |             |
| 5190.0          | MCS 0     | 18.02                                           | 0.063 | ≤ 28.11     |
| 5230.0          |           | 19.59                                           | 0.091 | ≤ 28.11     |
| 5755.0          |           | 20.15                                           | 0.104 | ≤ 28.59     |
| 5795.0          |           | 19.80                                           | 0.096 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

| Test Mode       |           | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |       |             |
|-----------------|-----------|--------------------------------------------------|-------|-------------|
| Frequency (MHz) | Data Rate | ANT-0                                            |       | Limit (dBm) |
|                 |           | (dBm)                                            | (W)   |             |
| 5210.0          | MCS 0     | 15.04                                            | 0.032 | ≤ 28.11     |
| 5775.0          |           | 15.97                                            | 0.040 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-1                                            |       | Limit (dBm) |
|                 |           | (dBm)                                            | (W)   |             |
| 5210.0          | MCS 0     | 14.31                                            | 0.027 | ≤ 28.11     |
| 5775.0          |           | 16.73                                            | 0.047 | ≤ 28.59     |
| Frequency (MHz) | Data Rate | ANT-0+1                                          |       | Limit (dBm) |
|                 |           | (dBm)                                            | (W)   |             |
| 5210.0          | MCS 0     | 17.70                                            | 0.059 | ≤ 28.11     |
| 5775.0          |           | 19.38                                            | 0.087 | ≤ 28.59     |

Note: The relevant measured result has the offset with cable loss already.

### 26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

| Test Mode       | Mode 2: IEEE 802.11a Continuous TX mode |                               |
|-----------------|-----------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                   | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                   |                               |
| 5180.0          | 21.170                                  | 16.772                        |
| 5200.0          | 20.880                                  | 16.695                        |
| 5240.0          | 22.840                                  | 16.823                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                   | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                   |                               |
| 5180.0          | 20.350                                  | 16.645                        |
| 5200.0          | 20.550                                  | 16.598                        |
| 5240.0          | 20.250                                  | 16.658                        |

| Test Mode       | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5180.0          | 21.820                                          | 17.831                        |
| 5200.0          | 21.460                                          | 17.884                        |
| 5240.0          | 22.510                                          | 17.904                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5180.0          | 21.630                                          | 17.808                        |
| 5200.0          | 21.590                                          | 17.869                        |
| 5240.0          | 20.940                                          | 17.770                        |

Note: The 99 % occupied bandwidth not crossed 5250 MHz.

| Test Mode       | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5190.0          | 41.820                                          | 36.228                        |
| 5230.0          | 45.370                                          | 36.435                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5190.0          | 40.960                                          | 36.275                        |
| 5230.0          | 41.470                                          | 36.383                        |

| Test Mode       | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5210.0          | 81.890                                          | 75.451                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5210.0          | 81.170                                          | 75.449                        |

| Test Mode       | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5180.0          | 21.390                                          | 19.077                        |
| 5200.0          | 21.830                                          | 19.059                        |
| 5240.0          | 21.350                                          | 19.086                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5180.0          | 22.410                                          | 19.035                        |
| 5200.0          | 22.270                                          | 19.089                        |
| 5240.0          | 21.440                                          | 19.063                        |

Note: The 99 % occupied bandwidth not crossed 5250 MHz.

| Test Mode       | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5190.0          | 42.130                                          | 37.884                        |
| 5230.0          | 44.240                                          | 38.095                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5190.0          | 41.800                                          | 37.893                        |
| 5230.0          | 42.070                                          | 38.062                        |

| Test Mode       | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |                               |
|-----------------|--------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                            | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                            |                               |
| 5210.0          | 82.200                                           | 77.144                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                            | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                            |                               |
| 5210.0          | 81.980                                           | 77.038                        |

Note: The 99 % occupied bandwidth not crossed 5250 MHz.



|                |
|----------------|
| Beamforming on |
|----------------|

| Test Mode       | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5180.0          | 21.340                                          | 17.830                        |
| 5200.0          | 21.400                                          | 17.836                        |
| 5240.0          | 21.390                                          | 17.842                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5180.0          | 21.910                                          | 17.838                        |
| 5200.0          | 21.550                                          | 17.798                        |
| 5240.0          | 21.420                                          | 17.821                        |

| Test Mode       | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5190.0          | 41.230                                          | 36.207                        |
| 5230.0          | 40.830                                          | 36.229                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5190.0          | 41.040                                          | 36.314                        |
| 5230.0          | 40.640                                          | 36.238                        |

| Test Mode       | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5210.0          | 81.270                                          | 75.361                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5210.0          | 81.280                                          | 75.476                        |


Note: The 99 % occupied bandwidth not crossed 5250 MHz.

| Test Mode       | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5180.0          | 21.860                                          | 19.053                        |
| 5200.0          | 21.630                                          | 19.038                        |
| 5240.0          | 21.690                                          | 19.107                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5180.0          | 21.990                                          | 19.029                        |
| 5200.0          | 21.830                                          | 19.000                        |
| 5240.0          | 21.470                                          | 19.058                        |


| Test Mode       | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |                               |
|-----------------|-------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                           |                               |
| 5190.0          | 41.600                                          | 37.884                        |
| 5230.0          | 41.220                                          | 37.823                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                           | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                           |                               |
| 5190.0          | 42.110                                          | 37.886                        |
| 5230.0          | 41.890                                          | 37.902                        |

| Test Mode       | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |                               |
|-----------------|--------------------------------------------------|-------------------------------|
| Frequency (MHz) | 26 dB Bandwidth (MHz)                            | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-0                                            |                               |
| 5210.0          | 81.830                                           | 77.080                        |
| Frequency (MHz) | 26 dB Bandwidth (MHz)                            | 99 % Occupied Bandwidth (MHz) |
|                 | ANT-1                                            |                               |
| 5210.0          | 82.070                                           | 77.078                        |

Note: The 99 % occupied bandwidth not crossed 5250 MHz.






## Mode 2: IEEE 802.11a Continuous TX mode\_ANT-0

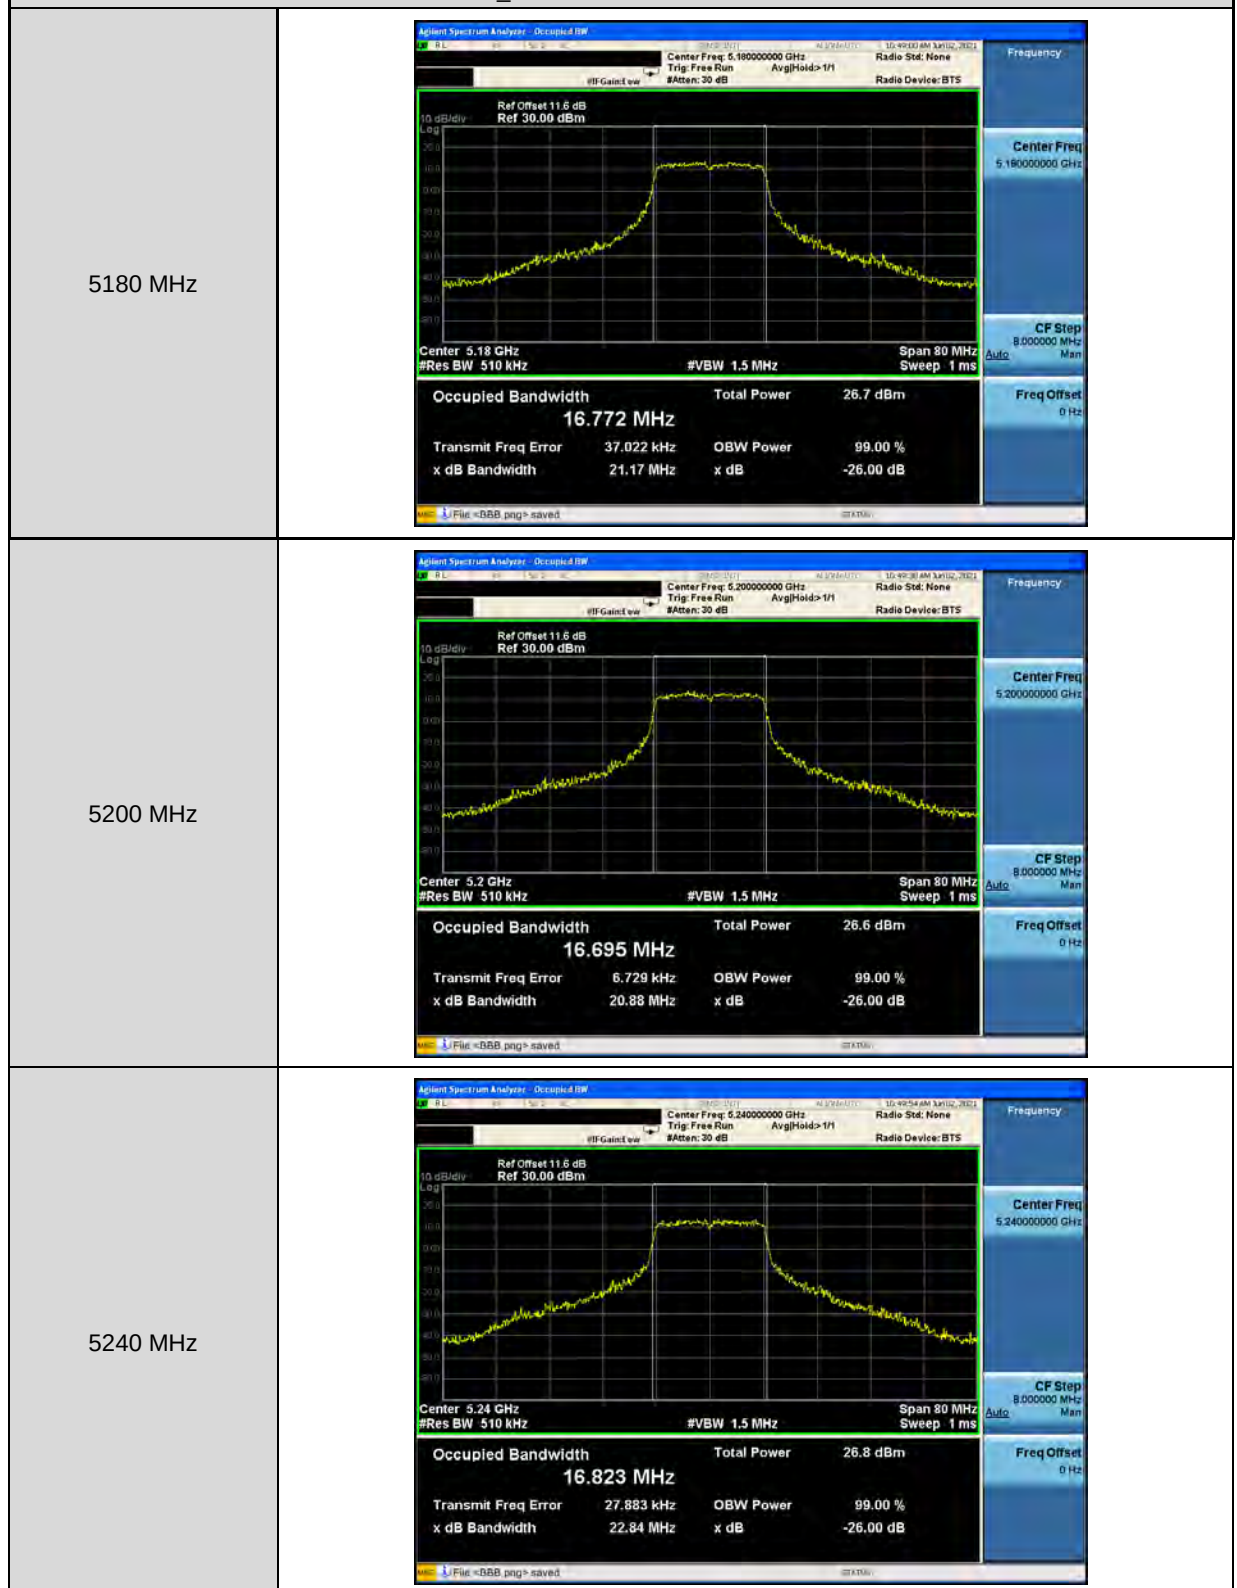




Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode\_ ANT-0
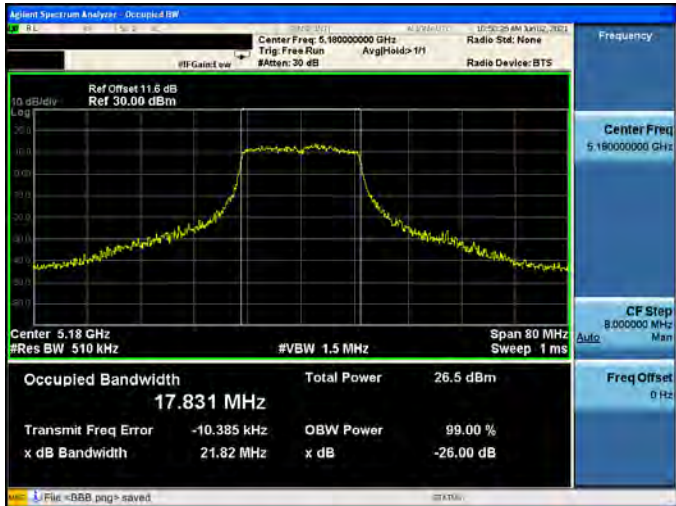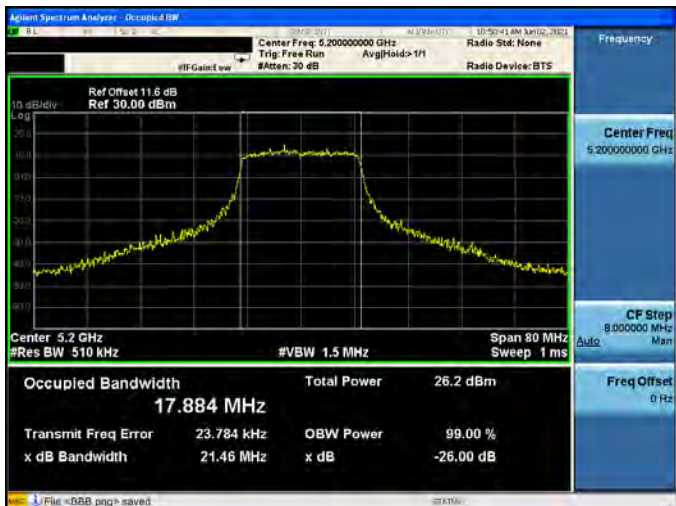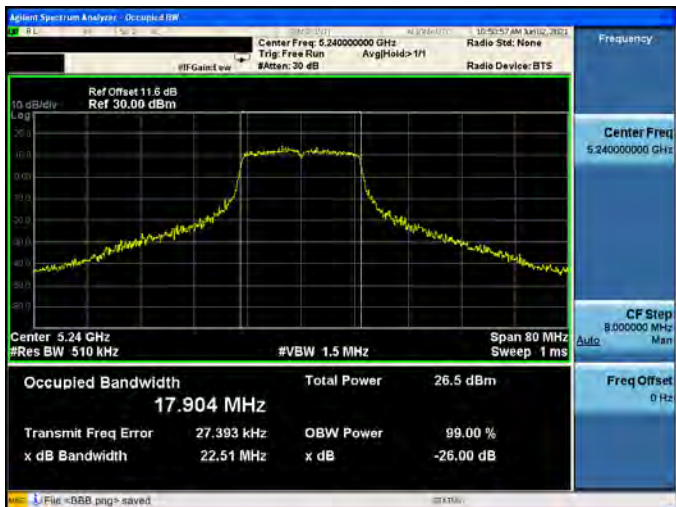
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5180 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.180000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.18 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 17.831 MHz<br/>Total Power 26.5 dBm<br/>Transmit Freq Error -10.385 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.82 MHz<br/>x dB -26.00 dB</p> <p>File &lt;SBB.png&gt; saved</p>  |
| 5200 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.200000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.2 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 17.884 MHz<br/>Total Power 26.2 dBm<br/>Transmit Freq Error 23.784 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.46 MHz<br/>x dB -26.00 dB</p> <p>File &lt;SBB.png&gt; saved</p>   |
| 5240 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.240000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.24 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 17.904 MHz<br/>Total Power 26.5 dBm<br/>Transmit Freq Error 27.393 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 22.51 MHz<br/>x dB -26.00 dB</p> <p>File &lt;SBB.png&gt; saved</p> |



Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode\_ ANT-0

5190 MHz

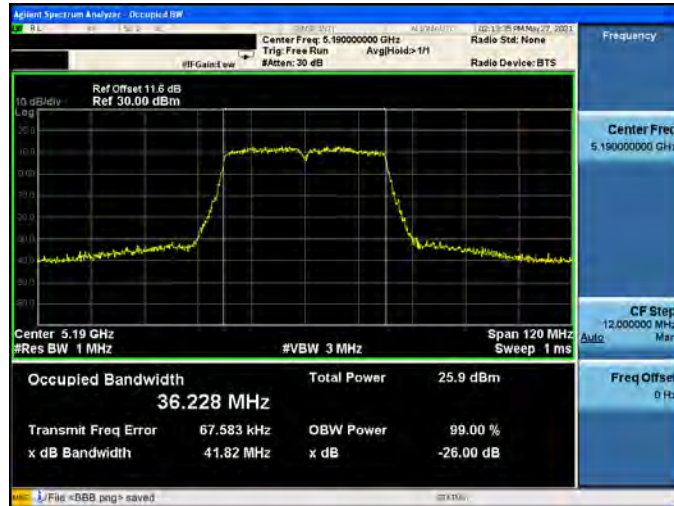

5230 MHz





Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode\_ ANT-0

5210 MHz






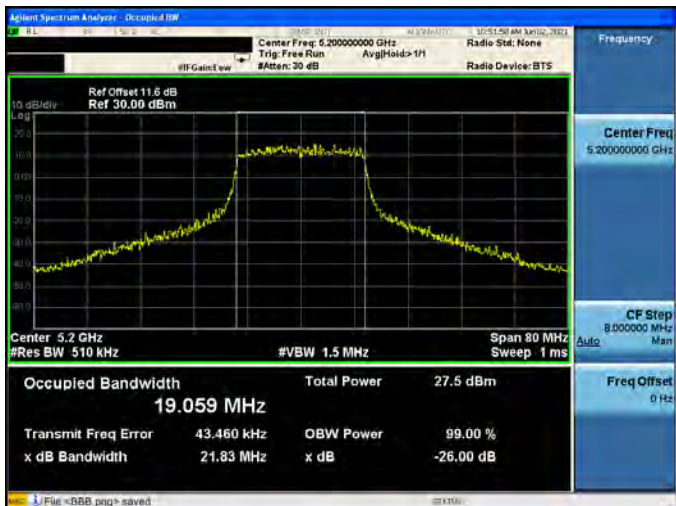
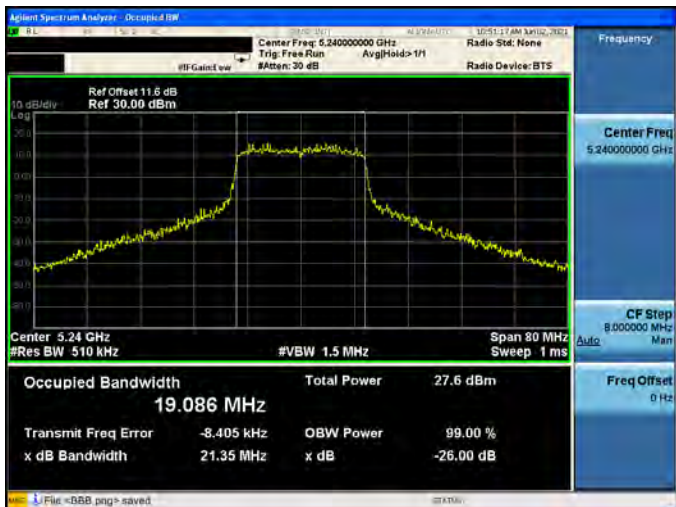


| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode_ ANT-0 |                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5180 MHz                                               |  <p>Center 5.18 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 19.077 MHz<br/>Total Power 27.2 dBm<br/>Transmit Freq Error -13.620 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.39 MHz<br/>x dB -26.00 dB</p>  |
| 5200 MHz                                               |  <p>Center 5.2 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 19.059 MHz<br/>Total Power 27.5 dBm<br/>Transmit Freq Error 43.460 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.83 MHz<br/>x dB -26.00 dB</p>   |
| 5240 MHz                                               |  <p>Center 5.24 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 19.086 MHz<br/>Total Power 27.6 dBm<br/>Transmit Freq Error -8.405 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.35 MHz<br/>x dB -26.00 dB</p> |

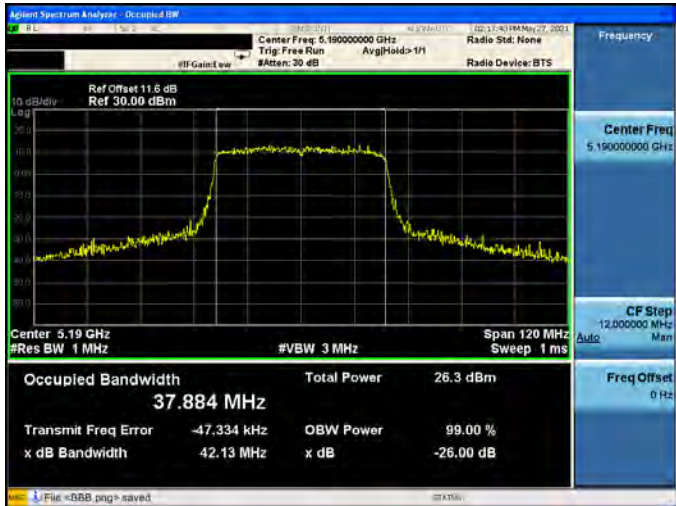

| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-0  |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5190 MHz                                                |    |
| 5230 MHz                                                |   |
| Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode_ ANT-0 |                                                                                      |
| 5210 MHz                                                |  |


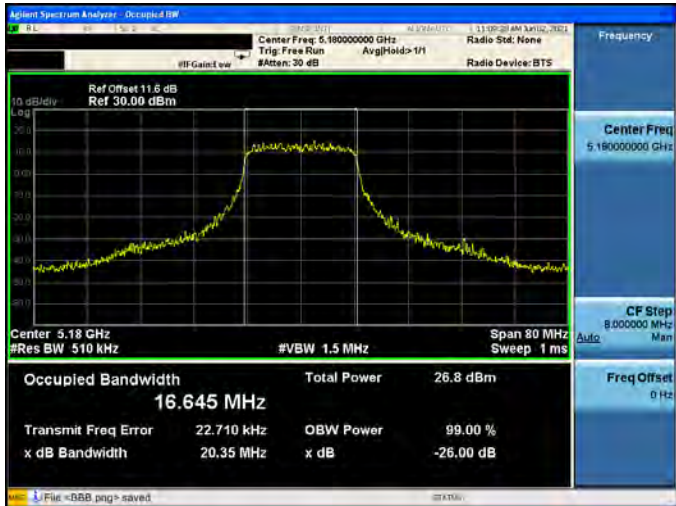
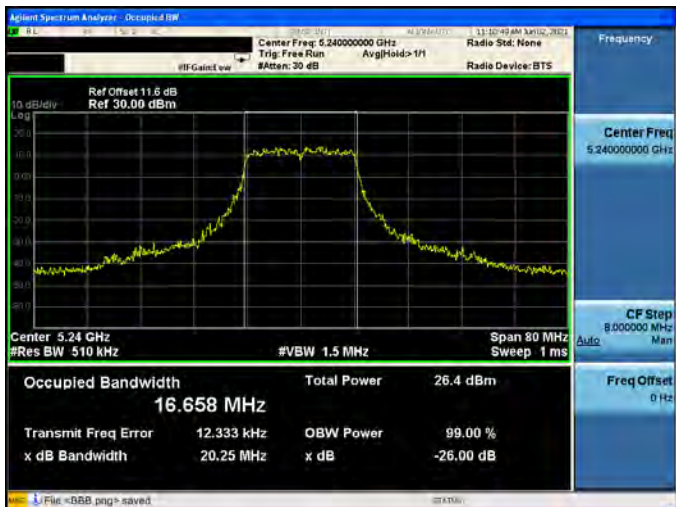


| Mode 2: IEEE 802.11a Continuous TX mode_ ANT-1 |                                                                                      |
|------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                       |    |
| 5200 MHz                                       |   |
| 5240 MHz                                       |  |






Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode\_ ANT-1
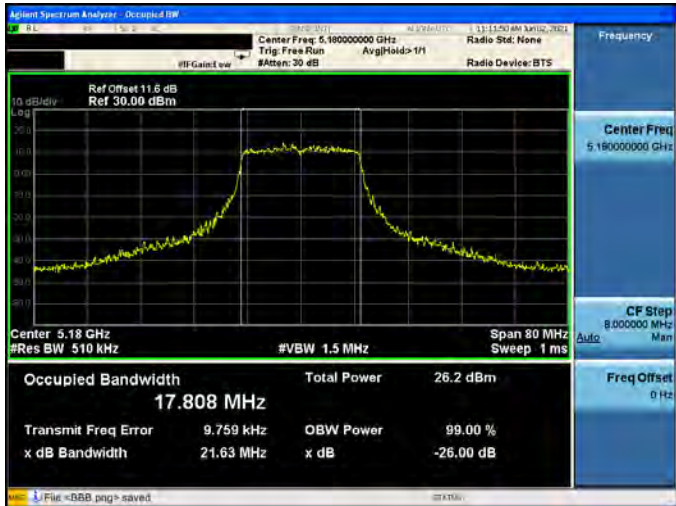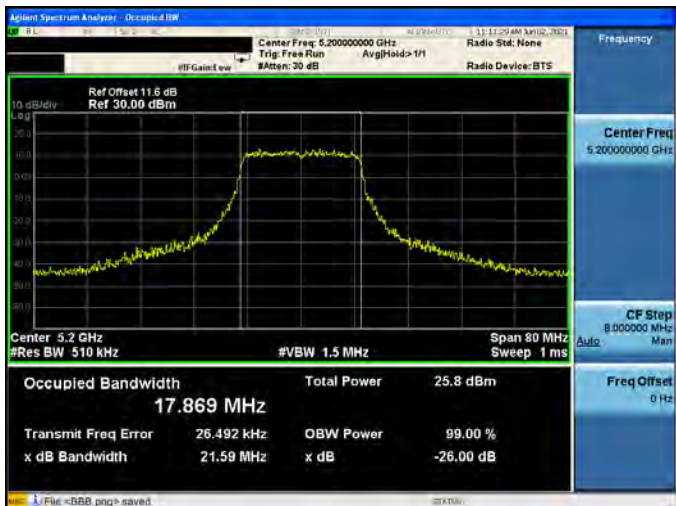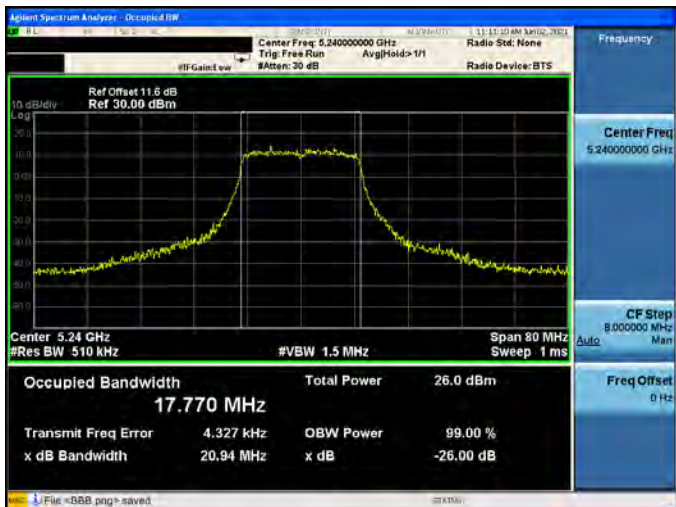
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5180 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.180000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.18 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 17.808 MHz<br/>Total Power 26.2 dBm<br/>Transmit Freq Error 9.759 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.63 MHz<br/>x dB -26.00 dB</p> <p>File &lt;SBB.png&gt; saved</p>   |
| 5200 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.200000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.2 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 17.869 MHz<br/>Total Power 25.8 dBm<br/>Transmit Freq Error 26.492 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 21.59 MHz<br/>x dB -26.00 dB</p> <p>File &lt;SBB.png&gt; saved</p>  |
| 5240 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.240000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.24 GHz<br/>#Res BW 510 kHz<br/>#VBW 1.5 MHz<br/>Span 80 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 17.770 MHz<br/>Total Power 26.0 dBm<br/>Transmit Freq Error 4.327 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 20.94 MHz<br/>x dB -26.00 dB</p> <p>File &lt;SBB.png&gt; saved</p> |




Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode\_ ANT-1

5190 MHz

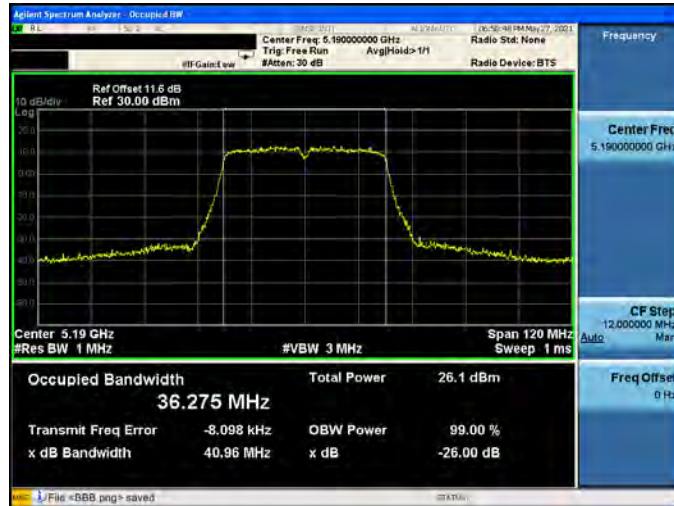


5230 MHz

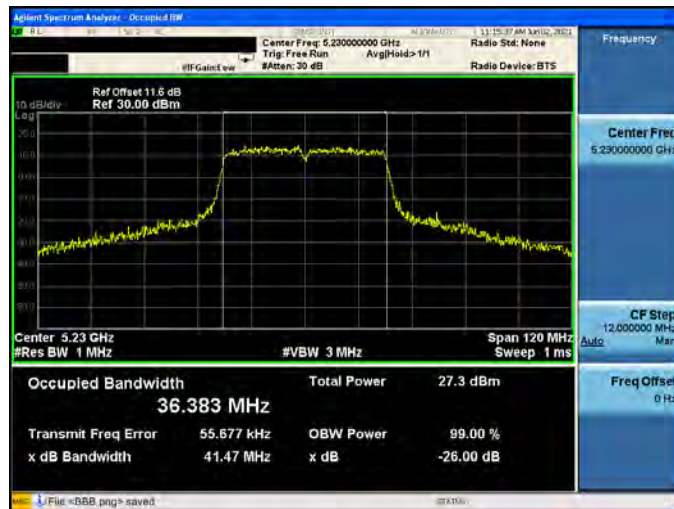

Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode\_ ANT-1

5210 MHz




Page 407 of 503





Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode\_ ANT-1

5190 MHz

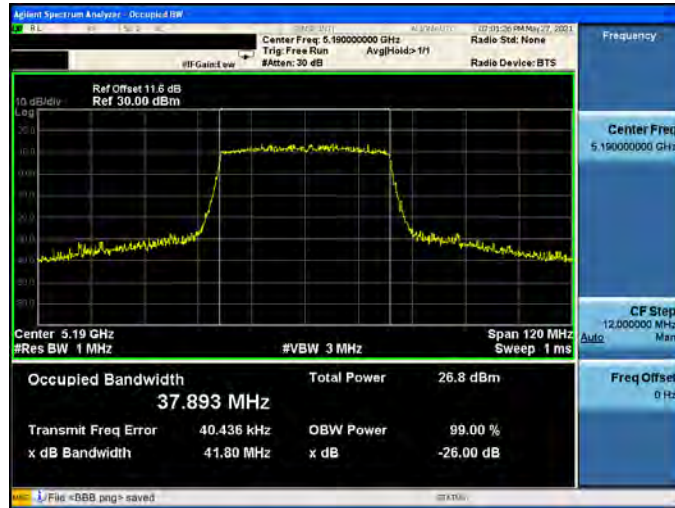

5230 MHz



Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode\_ ANT-1

5210 MHz







Beamforming on

Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode\_ ANT-0


5180 MHz

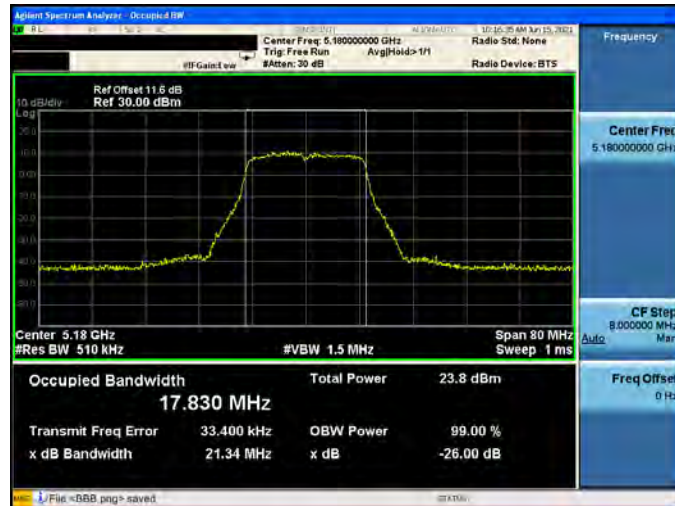

5200 MHz

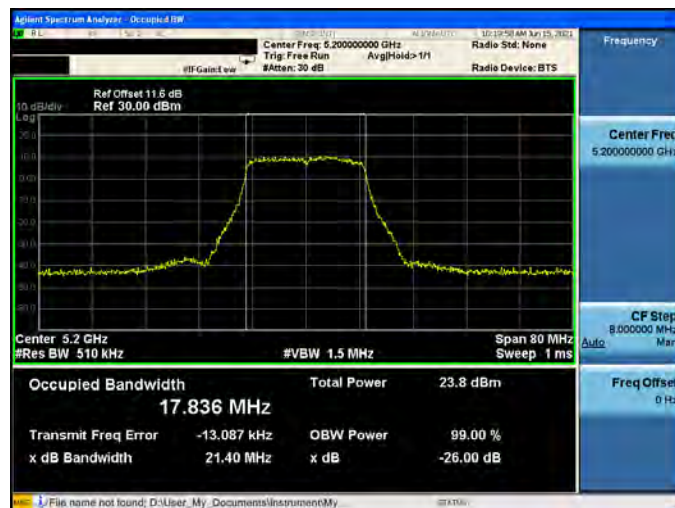


5240 MHz

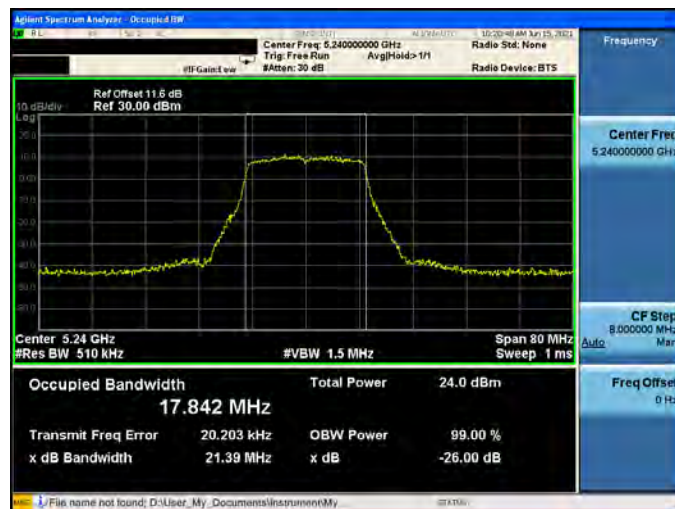




Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode\_ ANT-0


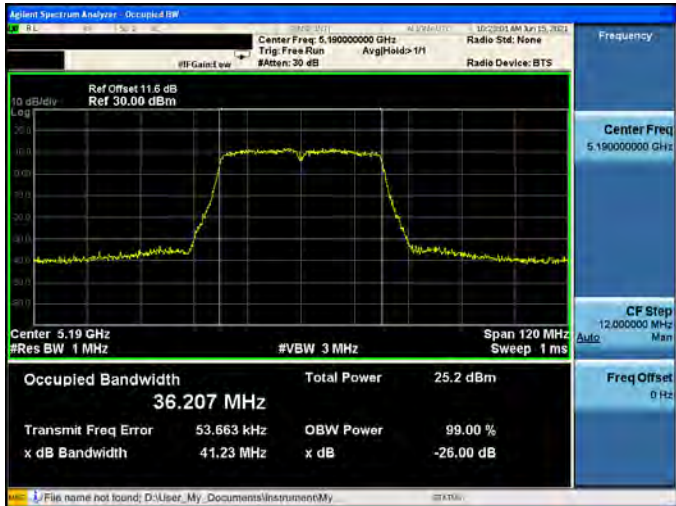
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5190 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.190000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.19 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 120 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 36.207 MHz<br/>Total Power 25.2 dBm<br/>Transmit Freq Error 53.663 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 41.23 MHz<br/>x dB -26.00 dB</p> <p>Frequency 5.19000000 GHz<br/>CF Step 12.000000 MHz<br/>Auto Man<br/>Freq Offset 0 Hz</p> <p>File name not found; D:\User_My_Documents\InstrumentMy...</p> |
| 5230 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.230000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.23 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 120 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 36.229 MHz<br/>Total Power 25.2 dBm<br/>Transmit Freq Error 27.180 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 40.83 MHz<br/>x dB -26.00 dB</p> <p>Frequency 5.23000000 GHz<br/>CF Step 12.000000 MHz<br/>Auto Man<br/>Freq Offset 0 Hz</p> <p>File &lt;555.png&gt; saved</p>                               |

Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode\_ ANT-0
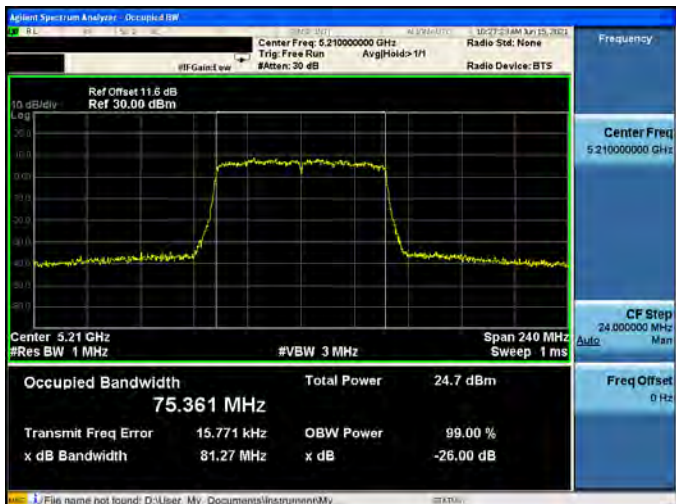
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5210 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.210000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.21 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 240 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 75.361 MHz<br/>Total Power 24.7 dBm<br/>Transmit Freq Error 15.771 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 81.27 MHz<br/>x dB -26.00 dB</p> <p>Frequency 5.21000000 GHz<br/>CF Step 24.000000 MHz<br/>Auto Man<br/>Freq Offset 0 Hz</p> <p>File name not found; D:\User_My_Documents\InstrumentMy...</p> |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|




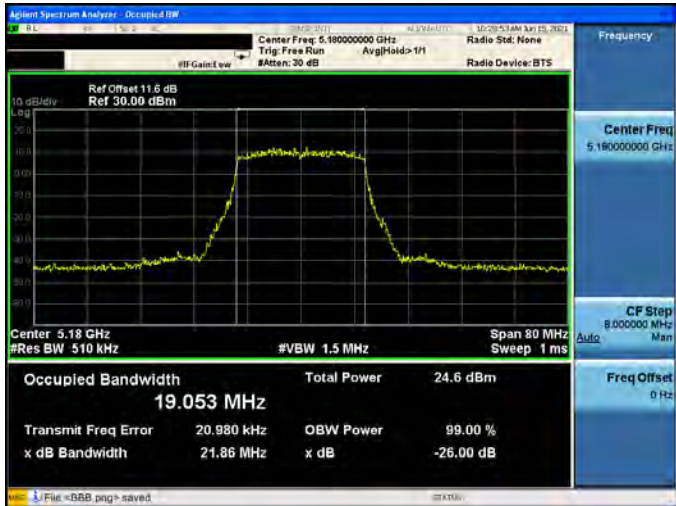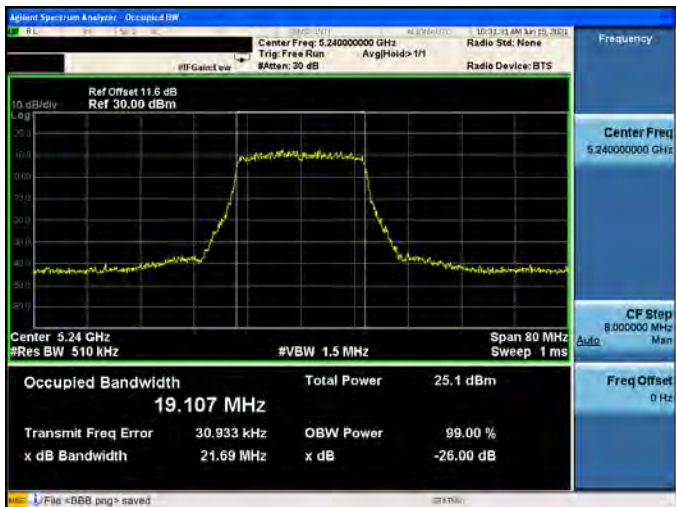




| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode_ ANT-0 |                                                                                      |
|--------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                               |    |
| 5200 MHz                                               |   |
| 5240 MHz                                               |  |




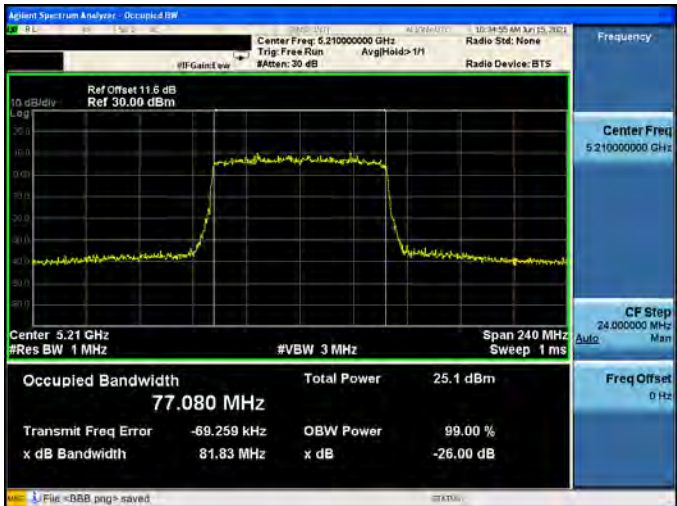


| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-0  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5190 MHz                                                |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.19000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.19 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 120 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth: 37.884 MHz<br/>Total Power: 25.2 dBm<br/>Transmit Freq Error: 67.407 kHz<br/>OBW Power: 99.00 %<br/>x dB Bandwidth: 41.60 MHz<br/>x dB: -26.00 dB</p> <p>File &lt;DBB.png&gt; saved</p>    |
| 5230 MHz                                                |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.23000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.23 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 120 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth: 37.823 MHz<br/>Total Power: 25.4 dBm<br/>Transmit Freq Error: -47.756 kHz<br/>OBW Power: 99.00 %<br/>x dB Bandwidth: 41.22 MHz<br/>x dB: -26.00 dB</p> <p>File &lt;DBB.png&gt; saved</p>  |
| Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode_ ANT-0 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5210 MHz                                                |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.21000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.21 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 240 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth: 77.080 MHz<br/>Total Power: 25.1 dBm<br/>Transmit Freq Error: -69.259 kHz<br/>OBW Power: 99.00 %<br/>x dB Bandwidth: 81.83 MHz<br/>x dB: -26.00 dB</p> <p>File &lt;DBB.png&gt; saved</p> |

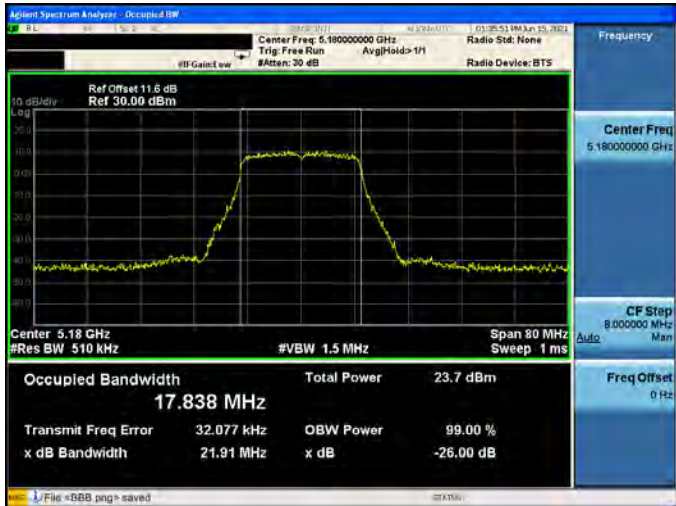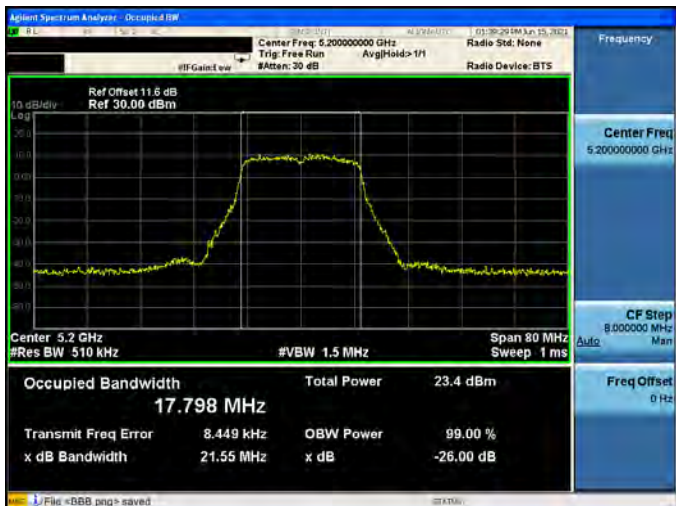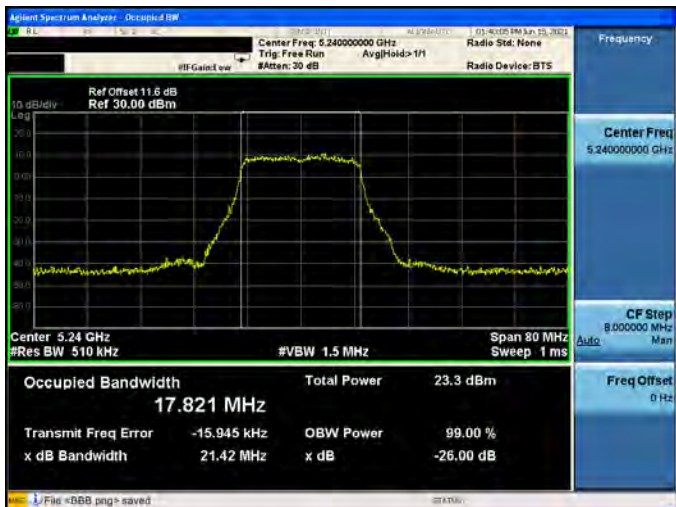

| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode_ ANT-1 |                                                                                      |
|--------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                               |    |
| 5200 MHz                                               |   |
| 5240 MHz                                               |  |


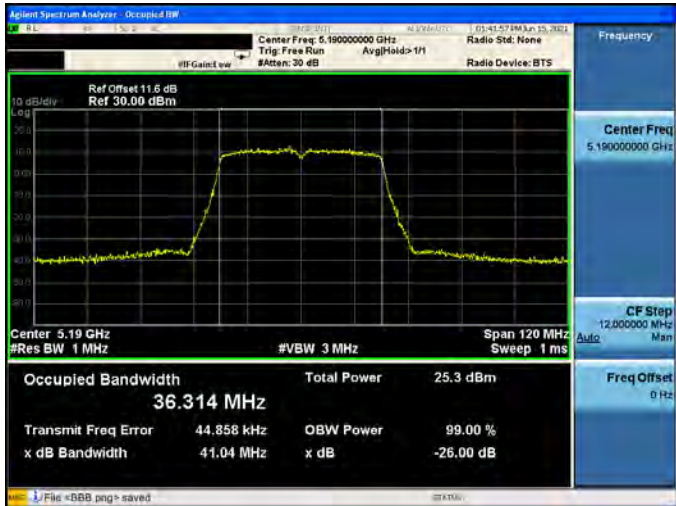
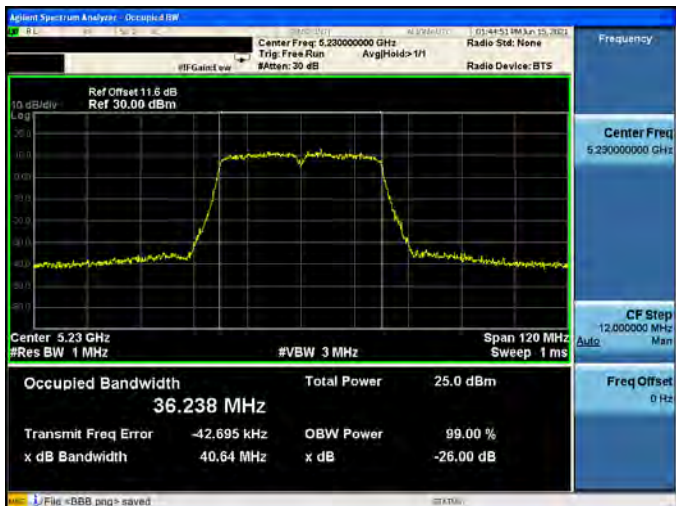


| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-1 |                                                                                      |
|--------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5190 MHz                                               |    |
| 5230 MHz                                               |   |
| Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode_ ANT-1 |                                                                                      |
| 5210 MHz                                               |  |






Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode\_ ANT-1
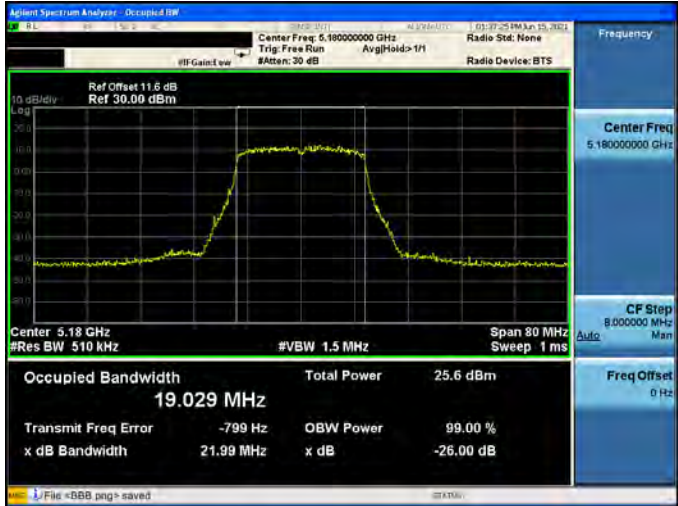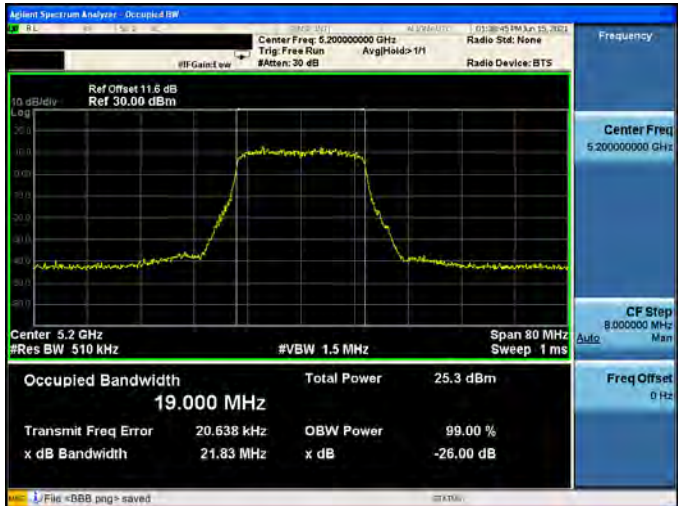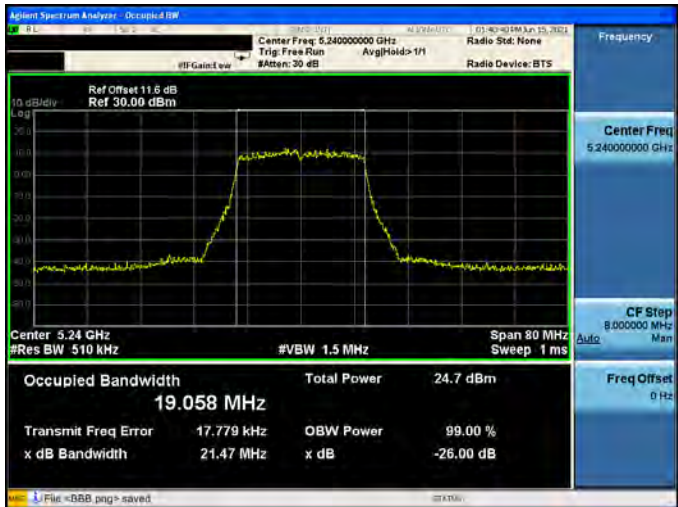
|          |                                                                                      |
|----------|--------------------------------------------------------------------------------------|
| 5180 MHz |    |
| 5200 MHz |   |
| 5240 MHz |  |



Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode\_ ANT-1
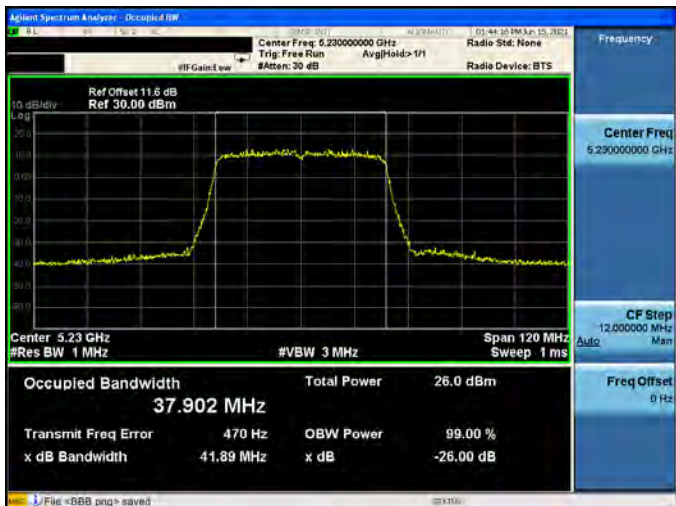
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5190 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.190000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.19 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 120 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 37.886 MHz<br/>Total Power 25.0 dBm<br/>Transmit Freq Error 9.126 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 42.11 MHz<br/>x dB -26.00 dB</p> <p>File &lt;DBB.png&gt; saved</p> |
| 5230 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.230000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.23 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 120 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 37.902 MHz<br/>Total Power 26.0 dBm<br/>Transmit Freq Error 470 Hz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 41.89 MHz<br/>x dB -26.00 dB</p> <p>File &lt;DBB.png&gt; saved</p>   |

Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode\_ ANT-1

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5210 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.210000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.5 dB<br/>Ref 30.00 dBm</p> <p>Center 5.21 GHz<br/>#Res BW 1 MHz<br/>#VBW 3 MHz<br/>Span 240 MHz<br/>Sweep 1 ms</p> <p>Occupied Bandwidth 77.078 MHz<br/>Total Power 24.4 dBm<br/>Transmit Freq Error 52.802 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 82.07 MHz<br/>x dB -26.00 dB</p> <p>File &lt;DBB.png&gt; saved</p> |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



#### 6 dB RF Bandwidth Measurement

| Test Mode       | Mode 2: IEEE 802.11a Continuous TX mode |             |             |
|-----------------|-----------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                             | ANT-1 (kHz) | Limit (kHz) |
| 5745.0          | 16140                                   | 16350       | $\geq 500$  |
| 5785.0          | 16330                                   | 16330       | $\geq 500$  |
| 5825.0          | 15590                                   | 16370       | $\geq 500$  |

| Test Mode       | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5745.0          | 17370                                           | 16330       | $\geq 500$  |
| 5785.0          | 17300                                           | 17250       | $\geq 500$  |
| 5825.0          | 17530                                           | 16670       | $\geq 500$  |

| Test Mode       | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5755.0          | 35510                                           | 36410       | $\geq 500$  |
| 5795.0          | 36090                                           | 36370       | $\geq 500$  |

| Test Mode       | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5775.0          | 74950                                           | 75390       | $\geq 500$  |





| Test Mode       | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5745.0          | 17580                                           | 18640       | $\geq 500$  |
| 5785.0          | 19050                                           | 18530       | $\geq 500$  |
| 5825.0          | 18310                                           | 18180       | $\geq 500$  |

| Test Mode       | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5755.0          | 38170                                           | 37820       | $\geq 500$  |
| 5795.0          | 38090                                           | 37490       | $\geq 500$  |

| Test Mode       | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |             |             |
|-----------------|--------------------------------------------------|-------------|-------------|
| Frequency (MHz) | ANT-0 (kHz)                                      | ANT-1 (kHz) | Limit (kHz) |
| 5775.0          | 73730                                            | 76190       | $\geq 500$  |



|                |
|----------------|
| Beamforming on |
|----------------|

|                 |                                                 |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Test Mode       | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |             |             |
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5745.0          | 17590                                           | 17600       | ≥ 500       |
| 5785.0          | 17670                                           | 17590       | ≥ 500       |
| 5825.0          | 17630                                           | 15640       | ≥ 500       |

|                 |                                                 |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Test Mode       | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |             |             |
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5755.0          | 36150                                           | 36000       | ≥ 500       |
| 5795.0          | 36360                                           | 36060       | ≥ 500       |

|                 |                                                 |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Test Mode       | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |             |             |
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5775.0          | 75440                                           | 74610       | ≥ 500       |

|                 |                                                 |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Test Mode       | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |             |             |
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5745.0          | 19060                                           | 18620       | ≥ 500       |
| 5785.0          | 18720                                           | 18070       | ≥ 500       |
| 5825.0          | 17270                                           | 18340       | ≥ 500       |



|                 |                                                 |             |             |
|-----------------|-------------------------------------------------|-------------|-------------|
| Test Mode       | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |             |             |
| Frequency (MHz) | ANT-0 (kHz)                                     | ANT-1 (kHz) | Limit (kHz) |
| 5755.0          | 38090                                           | 37720       | ≥ 500       |
| 5795.0          | 38100                                           | 37430       | ≥ 500       |

|                 |                                                  |             |             |
|-----------------|--------------------------------------------------|-------------|-------------|
| Test Mode       | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |             |             |
| Frequency (MHz) | ANT-0 (kHz)                                      | ANT-1 (kHz) | Limit (kHz) |
| 5775.0          | 76540                                            | 76060       | ≥ 500       |



■ Test Graphs

Mode 2: IEEE 802.11a Continuous TX mode\_ANT-0
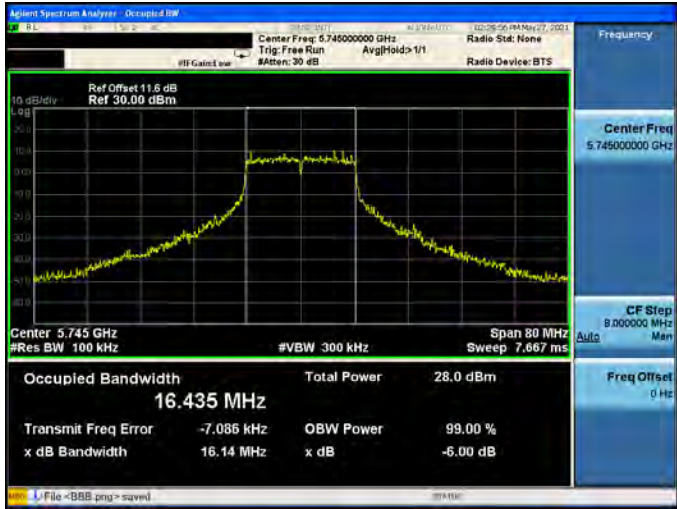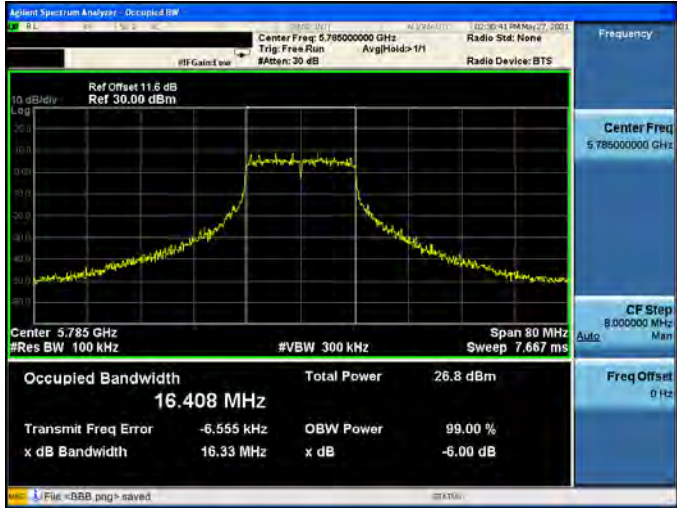
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.74500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 16.435 MHz<br/>Total Power 28.0 dBm<br/>Transmit Freq Error -7.086 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 16.14 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>  |
| 5785 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.78500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 16.408 MHz<br/>Total Power 26.8 dBm<br/>Transmit Freq Error -6.555 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 16.33 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p> |
| 5825 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.82500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 16.430 MHz<br/>Total Power 26.2 dBm<br/>Transmit Freq Error 5.266 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 15.59 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p> |



|                                                       |                                                                                      |
|-------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-0 |                                                                                      |
| 5745 MHz                                              |    |
| 5785 MHz                                              |   |
| 5825 MHz                                              |  |



Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode\_ANT-0

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5755 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.755000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.755 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 36.275 MHz<br/>Total Power 28.1 dBm<br/>Transmit Freq Error -24.230 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 35.51 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B55.png&gt; saved</p>  |
| 5795 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.795000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.795 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 36.276 MHz<br/>Total Power 27.3 dBm<br/>Transmit Freq Error -25.238 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 36.09 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B56.png&gt; saved</p> |



Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode\_ANT-0

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5775 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.775000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.775 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 240 MHz<br/>Sweep 23 ms</p> <p>Occupied Bandwidth 75.700 MHz<br/>Total Power 27.4 dBm<br/>Transmit Freq Error -80.929 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 74.95 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B58.png&gt; saved</p> |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|






Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode\_ANT-0

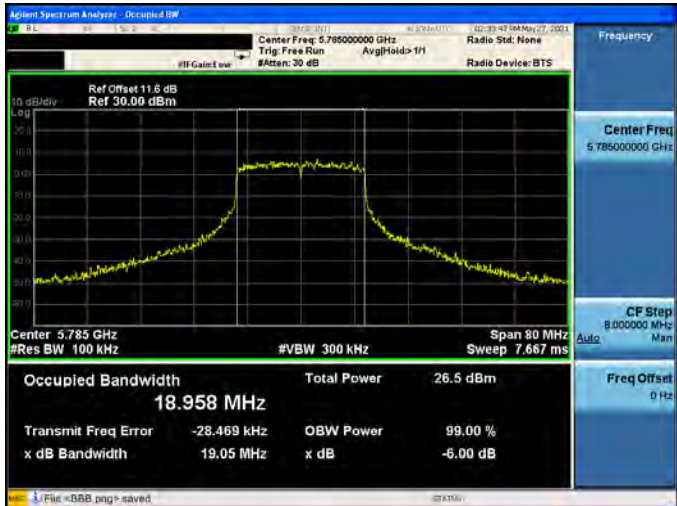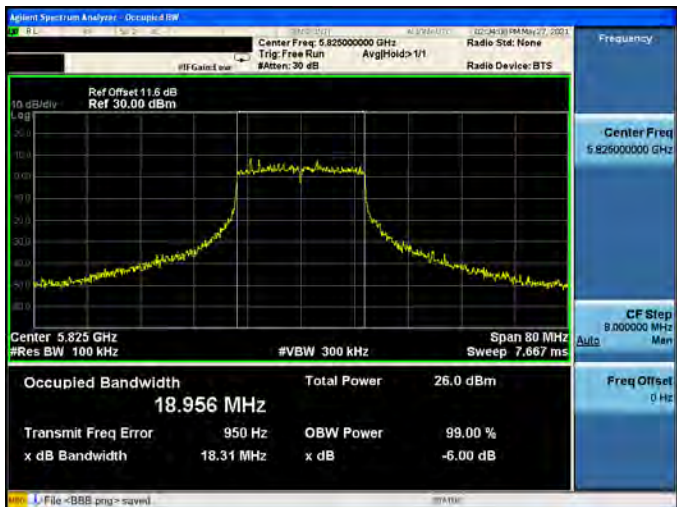
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.745000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 18.947 MHz<br/>Total Power 27.8 dBm<br/>Transmit Freq Error -7.743 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 17.58 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B88.png&gt; saved</p>   |
| 5785 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.785000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 18.958 MHz<br/>Total Power 26.5 dBm<br/>Transmit Freq Error -28.469 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 19.05 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B88.png&gt; saved</p> |
| 5825 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.825000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 18.956 MHz<br/>Total Power 26.0 dBm<br/>Transmit Freq Error 950 Hz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 18.31 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B88.png&gt; saved</p>     |



Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode\_ANT-0
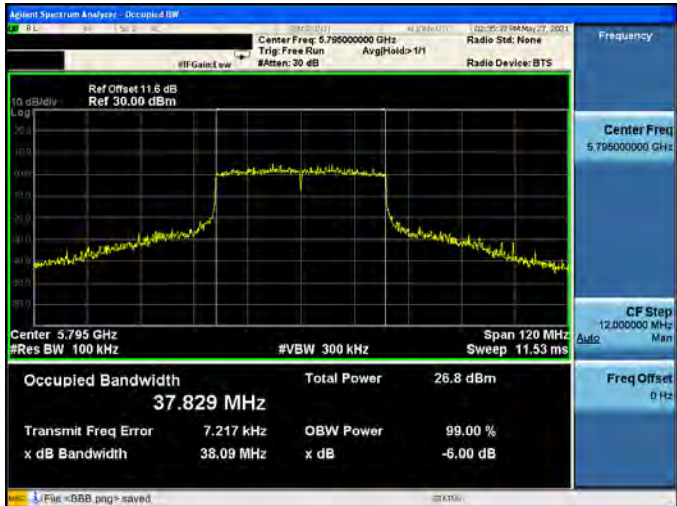
|          |                                                                                                                                                                                                                                                                                                                                                                            |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5755 MHz |  <p>Center Freq: 5.755 GHz<br/>#Res BW: 100 kHz<br/>#VBW: 300 kHz<br/>Span: 120 MHz<br/>Sweep: 11.53 ms</p> <p>Occupied Bandwidth: 37.939 MHz<br/>Total Power: 27.9 dBm<br/>Transmit Freq Error: -17.721 kHz<br/>OBW Power: 99.00 %<br/>x dB Bandwidth: 38.17 MHz<br/>x dB: -6.00 dB</p> |
| 5795 MHz |  <p>Center Freq: 5.795 GHz<br/>#Res BW: 100 kHz<br/>#VBW: 300 kHz<br/>Span: 120 MHz<br/>Sweep: 11.53 ms</p> <p>Occupied Bandwidth: 37.829 MHz<br/>Total Power: 26.8 dBm<br/>Transmit Freq Error: 7.217 kHz<br/>OBW Power: 99.00 %<br/>x dB Bandwidth: 38.09 MHz<br/>x dB: -6.00 dB</p>  |

Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode\_ANT-0
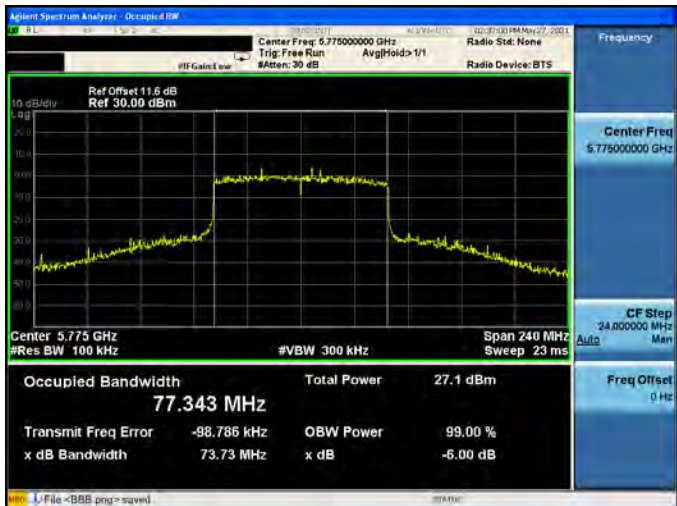
|          |                                                                                                                                                                                                                                                                                                                                                                           |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5775 MHz |  <p>Center Freq: 5.775 GHz<br/>#Res BW: 100 kHz<br/>#VBW: 300 kHz<br/>Span: 240 MHz<br/>Sweep: 23 ms</p> <p>Occupied Bandwidth: 77.343 MHz<br/>Total Power: 27.1 dBm<br/>Transmit Freq Error: -98.786 kHz<br/>OBW Power: 99.00 %<br/>x dB Bandwidth: 73.73 MHz<br/>x dB: -6.00 dB</p> |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



| Mode 2: IEEE 802.11a Continuous TX mode_ANT-1 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz                                      |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.74500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 16.523 MHz<br/>Total Power 28.6 dBm<br/>Transmit Freq Error -673 Hz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 16.35 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\Instrument\My...</p>      |
| 5785 MHz                                      |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.78500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 16.568 MHz<br/>Total Power 28.0 dBm<br/>Transmit Freq Error -6.555 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 16.33 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B&amp;B.png&gt; saved</p>                              |
| 5825 MHz                                      |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.82500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 16.549 MHz<br/>Total Power 27.1 dBm<br/>Transmit Freq Error -6.335 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 16.37 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\Instrument\My...</p> |





|                                                       |                                                                                      |
|-------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-1 |                                                                                      |
| 5745 MHz                                              |    |
| 5785 MHz                                              |   |
| 5825 MHz                                              |  |



Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode\_ANT-1

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5755 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.755000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.755 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 36.710 MHz<br/>Total Power 28.5 dBm<br/>Transmit Freq Error -64.545 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 36.41 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B66.png&gt; saved</p>  |
| 5795 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.795000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.795 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 36.822 MHz<br/>Total Power 28.4 dBm<br/>Transmit Freq Error -115.59 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 36.37 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B66.png&gt; saved</p> |

Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode\_ANT-1

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5775 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.775000000 GHz<br/>Trig: Free Run<br/>Ave/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.775 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 240 MHz<br/>Sweep 23 ms</p> <p>Occupied Bandwidth 76.200 MHz<br/>Total Power 28.2 dBm<br/>Transmit Freq Error -117.26 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 75.39 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\Instrument\My...</p> |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|





Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode\_ANT-1

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.74500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 19.008 MHz<br/>Total Power 27.7 dBm<br/>Transmit Freq Error -25.136 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 18.64 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>                                 |
| 5785 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.78500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 18.951 MHz<br/>Total Power 28.1 dBm<br/>Transmit Freq Error -11.722 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 18.53 MHz<br/>x dB -6.00 dB</p> <p>File name not found; D:\User_My_Documents\InstrumentMy...</p> |
| 5825 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.82500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth 18.965 MHz<br/>Total Power 27.6 dBm<br/>Transmit Freq Error -21.897 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 18.18 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>                               |



Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode\_ANT-1

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5755 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.755000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.755 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 38.251 MHz<br/>Total Power 28.6 dBm<br/>Transmit Freq Error -29.228 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 37.82 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B88.png&gt; saved</p>  |
| 5795 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.795000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.795 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 38.326 MHz<br/>Total Power 28.2 dBm<br/>Transmit Freq Error -16.751 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 37.49 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B88.png&gt; saved</p> |

Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode\_ANT-1


|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5775 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.775000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.775 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 240 MHz<br/>Sweep 23 ms</p> <p>Occupied Bandwidth 77.734 MHz<br/>Total Power 28.0 dBm<br/>Transmit Freq Error -76.725 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 76.19 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B88.png&gt; saved</p> |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|




Beamforming on

Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode\_ANT-0


5745 MHz

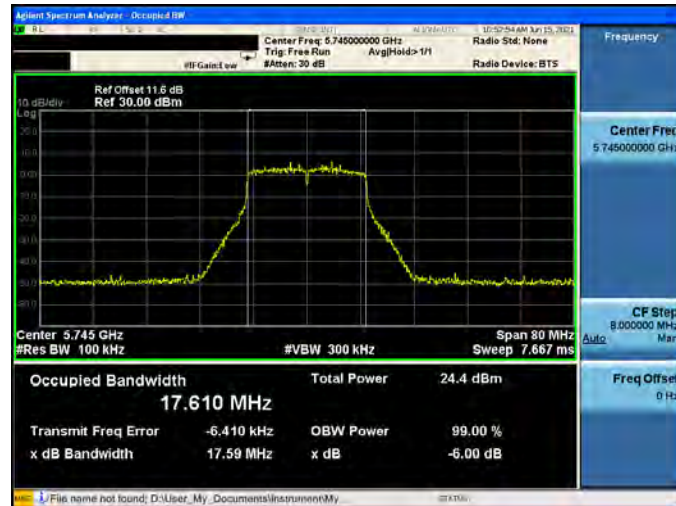

5785 MHz

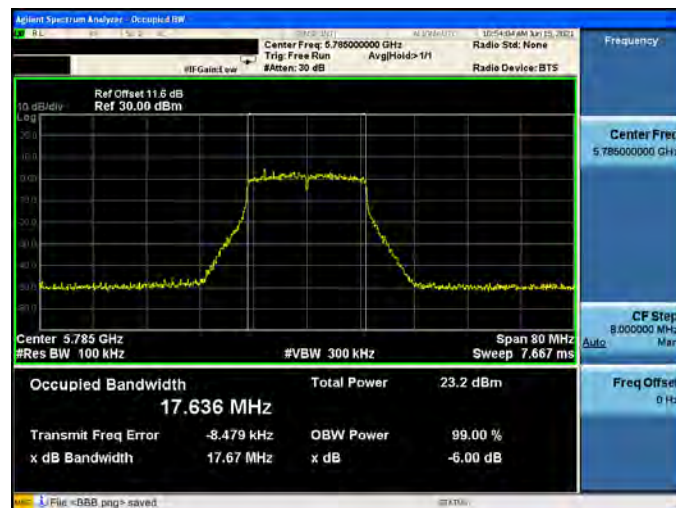


5825 MHz

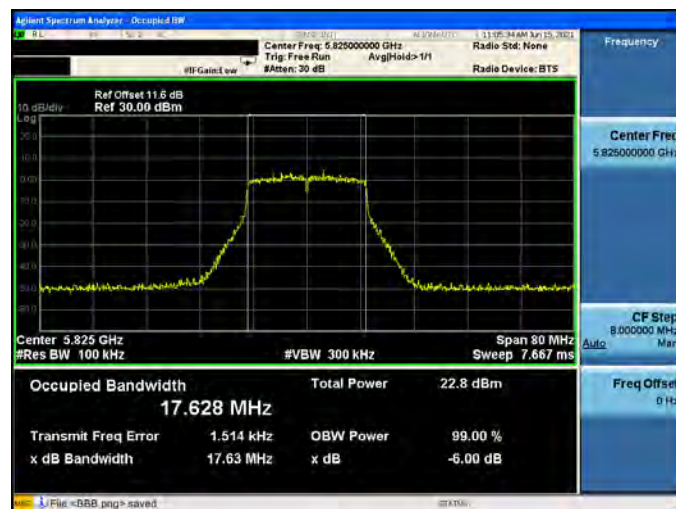




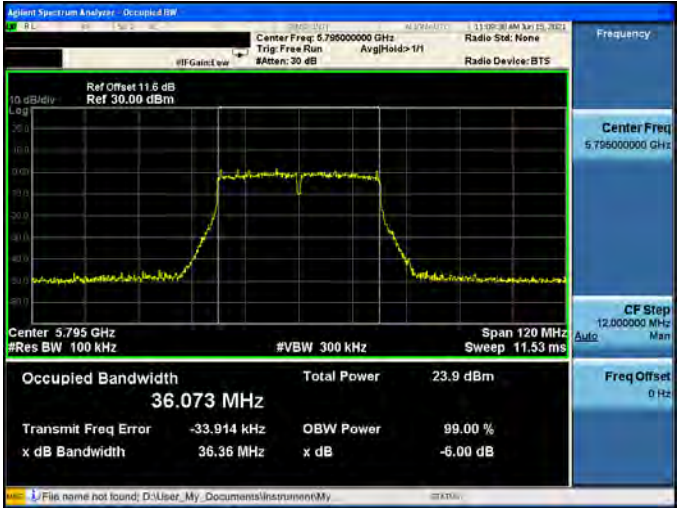

| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-0 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5755 MHz                                              |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.755000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.755 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 36.110 MHz<br/>Total Power 24.7 dBm<br/>Transmit Freq Error -54.039 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 36.15 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\Instrument\My...</p>  |
| 5795 MHz                                              |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.795000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.795 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 36.073 MHz<br/>Total Power 23.9 dBm<br/>Transmit Freq Error -33.914 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 36.36 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\Instrument\My...</p> |
| Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-0 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 5775 MHz                                              |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.775000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.775 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 240 MHz<br/>Sweep 23 ms</p> <p>Occupied Bandwidth 75.445 MHz<br/>Total Power 23.9 dBm<br/>Transmit Freq Error -39.948 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 75.44 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved.</p>                                  |

Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode\_ANT-0
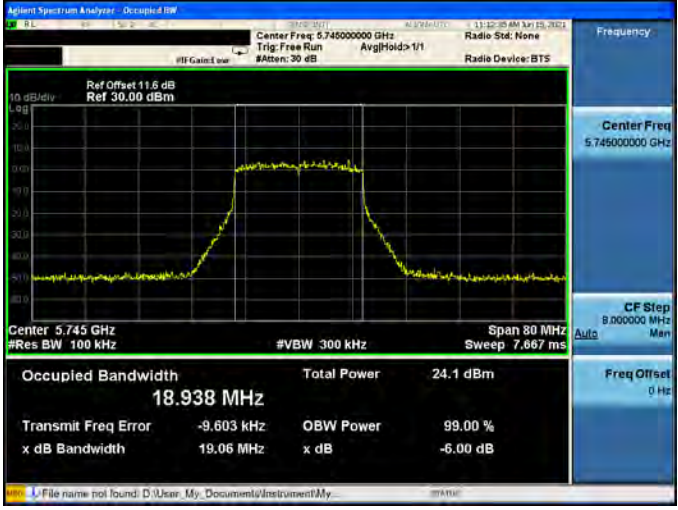
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.74500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth <b>18.938 MHz</b><br/>Total Power 24.1 dBm<br/>Transmit Freq Error -9.603 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 19.06 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\Instrument\My...</p> |
| 5785 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.78500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth <b>18.937 MHz</b><br/>Total Power 23.2 dBm<br/>Transmit Freq Error -13.978 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 18.72 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B5B.png&gt; saved</p>                               |
| 5825 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.82500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth <b>18.907 MHz</b><br/>Total Power 23.2 dBm<br/>Transmit Freq Error -18.763 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 17.27 MHz<br/>x dB -6.00 dB</p> <p>File &lt;B5B.png&gt; saved</p>                              |






Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode\_ANT-0



|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5755 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.755000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.755 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 37.809 MHz<br/>Total Power 24.3 dBm<br/>Transmit Freq Error -54.664 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 38.09 MHz<br/>x dB -6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>                                 |
| 5795 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.795000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.795 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 120 MHz<br/>Sweep 11.53 ms</p> <p>Occupied Bandwidth 37.812 MHz<br/>Total Power 23.5 dBm<br/>Transmit Freq Error -41.836 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 38.10 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\InstrumentMy...</p> |

Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode\_ANT-0
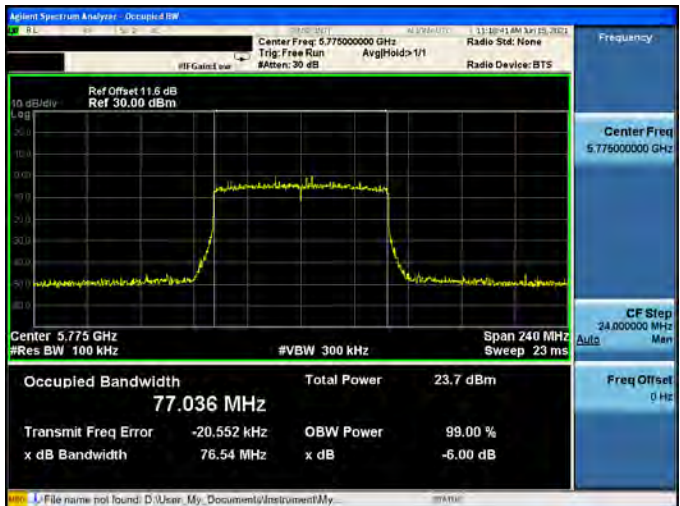
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5775 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.775000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.775 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 240 MHz<br/>Sweep 23 ms</p> <p>Occupied Bandwidth 77.036 MHz<br/>Total Power 23.7 dBm<br/>Transmit Freq Error -20.552 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 76.54 MHz<br/>x dB -6.00 dB</p> <p>File name not found: D:\User_My_Documents\InstrumentMy...</p> |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|





Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode\_ANT-1

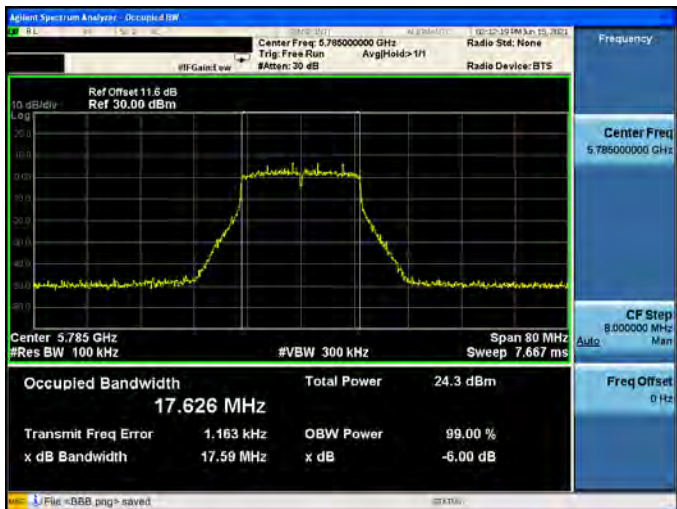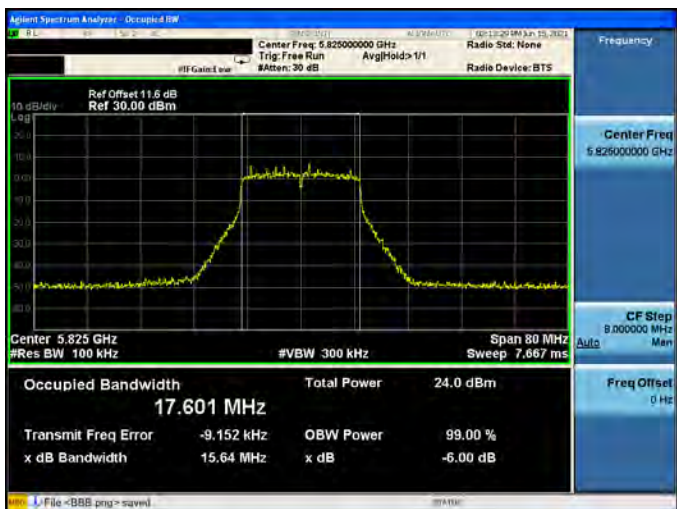
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.745000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth<br/>17.622 MHz</p> <p>Total Power<br/>25.1 dBm</p> <p>Transmit Freq Error<br/>-2.472 kHz</p> <p>OBW Power<br/>99.00 %</p> <p>x dB Bandwidth<br/>17.60 MHz</p> <p>x dB<br/>-6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>   |
| 5785 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.785000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth<br/>17.626 MHz</p> <p>Total Power<br/>24.3 dBm</p> <p>Transmit Freq Error<br/>1.163 kHz</p> <p>OBW Power<br/>99.00 %</p> <p>x dB Bandwidth<br/>17.59 MHz</p> <p>x dB<br/>-6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>   |
| 5825 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.825000000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth<br/>17.601 MHz</p> <p>Total Power<br/>24.0 dBm</p> <p>Transmit Freq Error<br/>-9.152 kHz</p> <p>OBW Power<br/>99.00 %</p> <p>x dB Bandwidth<br/>15.64 MHz</p> <p>x dB<br/>-6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p> |



Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode\_ANT-1
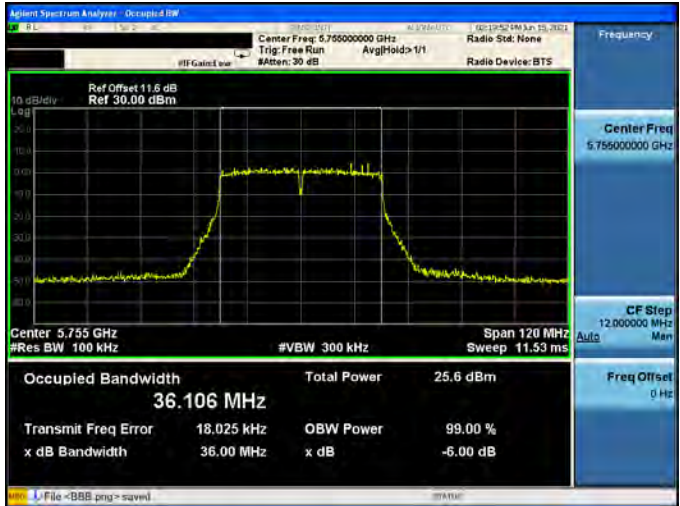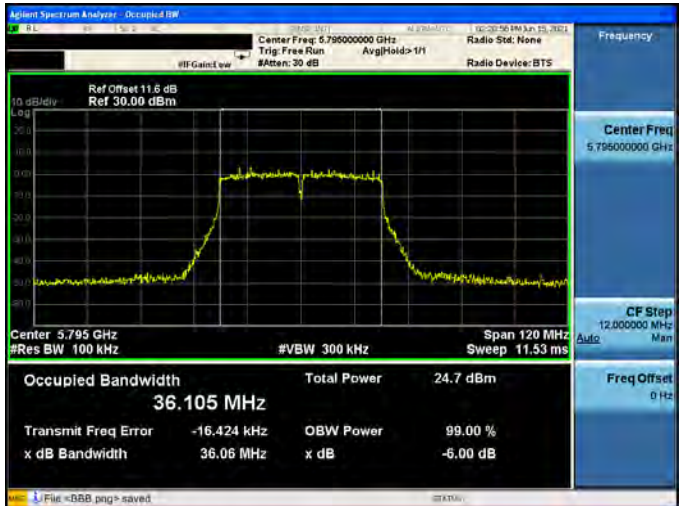
|          |                                                                                     |
|----------|-------------------------------------------------------------------------------------|
| 5755 MHz |   |
| 5795 MHz |  |

Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode\_ANT-1
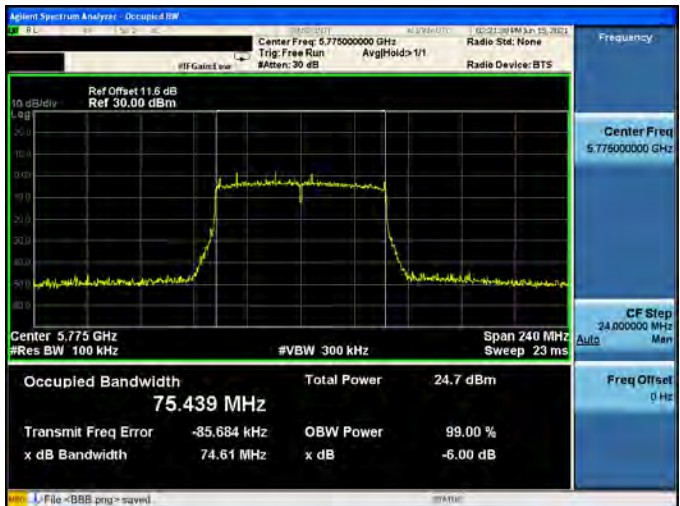
|          |                                                                                      |
|----------|--------------------------------------------------------------------------------------|
| 5775 MHz |  |
|----------|--------------------------------------------------------------------------------------|






Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode\_ANT-1

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5745 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.74500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.745 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth<br/><b>18.928 MHz</b></p> <p>Total Power<br/>24.8 dBm</p> <p>Transmit Freq Error<br/>-8.089 kHz</p> <p>OBW Power<br/>99.00 %</p> <p>x dB Bandwidth<br/>18.62 MHz</p> <p>x dB<br/>-6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p>  |
| 5785 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.78500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.785 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth<br/><b>18.936 MHz</b></p> <p>Total Power<br/>24.7 dBm</p> <p>Transmit Freq Error<br/>-5.656 kHz</p> <p>OBW Power<br/>99.00 %</p> <p>x dB Bandwidth<br/>18.07 MHz</p> <p>x dB<br/>-6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p> |
| 5825 MHz |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.82500000 GHz<br/>Trig: Free Run<br/>Avg/Hold: 1/1<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 11.6 dB<br/>Ref 30.00 dBm</p> <p>Center 5.825 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 80 MHz<br/>Sweep 7.667 ms</p> <p>Occupied Bandwidth<br/><b>18.937 MHz</b></p> <p>Total Power<br/>23.2 dBm</p> <p>Transmit Freq Error<br/>5.948 kHz</p> <p>OBW Power<br/>99.00 %</p> <p>x dB Bandwidth<br/>18.34 MHz</p> <p>x dB<br/>-6.00 dB</p> <p>File &lt;BBS.png&gt; saved</p> |



Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode\_ANT-1
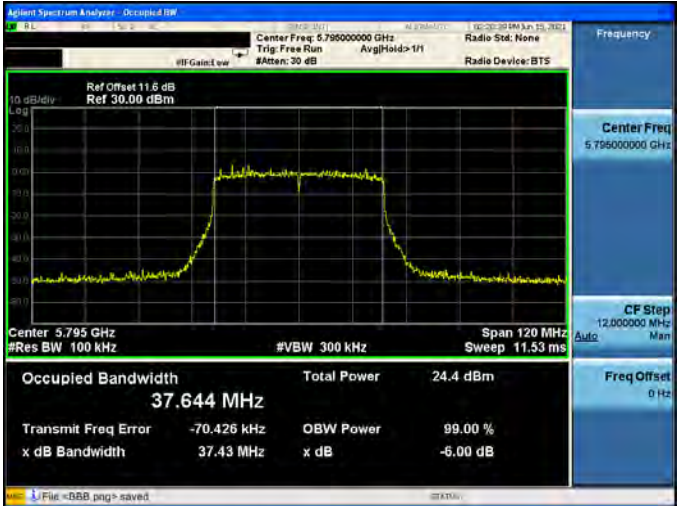
|          |                                                                                     |
|----------|-------------------------------------------------------------------------------------|
| 5755 MHz |   |
| 5795 MHz |  |

Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode\_ANT-1

|          |                                                                                      |
|----------|--------------------------------------------------------------------------------------|
| 5775 MHz |  |
|----------|--------------------------------------------------------------------------------------|



### Maximum Power Spectral Density Measurement

|                        |                                         |                  |                      |                 |
|------------------------|-----------------------------------------|------------------|----------------------|-----------------|
| Test Mode              | Mode 2: IEEE 802.11a Continuous TX mode |                  |                      |                 |
| Power spectral density |                                         |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                   |                  |                      |                 |
|                        | Measurement (dBm/MHz)                   | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 8.883                                   | 0.170            | 9.053                | ≤ 15.11         |
| 5200                   | 8.841                                   | 0.170            | 9.011                |                 |
| 5240                   | 9.158                                   | 0.170            | 9.328                |                 |
| Frequency (MHz)        | ANT-1                                   |                  |                      |                 |
|                        | Measurement (dBm/MHz)                   | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 8.648                                   | 0.170            | 8.818                | ≤ 15.11         |
| 5200                   | 8.463                                   | 0.170            | 8.633                |                 |
| 5240                   | 8.391                                   | 0.170            | 8.561                |                 |
| Frequency (MHz)        | ANT-0+1                                 |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                    |                  |                      |                 |
| 5180                   | 11.948                                  |                  |                      | ≤ 15.11         |
| 5200                   | 11.837                                  |                  |                      |                 |
| 5240                   | 11.972                                  |                  |                      |                 |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                         |                     |                             |                        |
|------------------------|-----------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 2: IEEE 802.11a Continuous TX mode |                     |                             |                        |
| Power spectral density |                                         |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                   |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)            | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | 0.876                                   | 0.170               | 8.036                       | ≤ 28.59                |
| 5785                   | -0.334                                  | 0.170               | 6.826                       |                        |
| 5825                   | -0.455                                  | 0.170               | 6.705                       |                        |
| Frequency<br>(MHz)     | ANT-1                                   |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)            | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | 1.673                                   | 0.170               | 8.833                       | ≤ 28.59                |
| 5785                   | 0.054                                   | 0.170               | 7.214                       |                        |
| 5825                   | -0.123                                  | 0.170               | 7.037                       |                        |
| Frequency<br>(MHz)     | ANT-0+1                                 |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)             |                     |                             |                        |
| 5745                   | 11.463                                  |                     |                             | ≤ 28.59                |
| 5785                   | 10.035                                  |                     |                             |                        |
| 5825                   | 9.885                                   |                     |                             |                        |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

|                        |                                                 |                  |                      |                 |
|------------------------|-------------------------------------------------|------------------|----------------------|-----------------|
| Test Mode              | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |                  |                      |                 |
| Power spectral density |                                                 |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 8.633                                           | 0.163            | 8.796                | ≤ 15.11         |
| 5200                   | 8.454                                           | 0.163            | 8.617                |                 |
| 5240                   | 8.379                                           | 0.163            | 8.542                |                 |
| Frequency (MHz)        | ANT-1                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 7.757                                           | 0.163            | 7.920                | ≤ 15.11         |
| 5200                   | 7.580                                           | 0.163            | 7.743                |                 |
| 5240                   | 8.020                                           | 0.163            | 8.183                |                 |
| Frequency (MHz)        | ANT-0+1                                         |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                            |                  |                      |                 |
| 5180                   | 11.391                                          |                  |                      | ≤ 15.11         |
| 5200                   | 11.213                                          |                  |                      |                 |
| 5240                   | 11.377                                          |                  |                      |                 |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                                 |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |                     |                             |                        |
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | 0.305                                           | 0.163               | 7.458                       | ≤ 28.59                |
| 5785                   | -0.999                                          | 0.163               | 6.154                       |                        |
| 5825                   | -1.460                                          | 0.163               | 5.693                       |                        |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | 0.288                                           | 0.163               | 7.441                       | ≤ 28.59                |
| 5785                   | -0.122                                          | 0.163               | 7.031                       |                        |
| 5825                   | -0.710                                          | 0.163               | 6.443                       |                        |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5745                   | 10.460                                          |                     |                             | ≤ 28.59                |
| 5785                   | 9.625                                           |                     |                             |                        |
| 5825                   | 9.095                                           |                     |                             |                        |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)



|                        |                                                 |                     |                         |                    |
|------------------------|-------------------------------------------------|---------------------|-------------------------|--------------------|
| Test Mode              | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |                     |                         |                    |
| Power spectral density |                                                 |                     |                         |                    |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5190                   | 4.050                                           | 0.232               | 4.282                   | ≤ 15.11            |
| 5230                   | 6.320                                           | 0.232               | 6.552                   |                    |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5190                   | 3.835                                           | 0.232               | 4.067                   | ≤ 15.11            |
| 5230                   | 5.492                                           | 0.232               | 5.724                   |                    |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                         | Limit<br>(dBm/MHz) |
|                        | Calculated<br>(dBm/MHz)                         |                     |                         |                    |
| 5190                   | 7.186                                           |                     |                         | ≤ 15.11            |
| 5230                   | 9.168                                           |                     |                         |                    |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                                 |                  |                          |                     |
|------------------------|-------------------------------------------------|------------------|--------------------------|---------------------|
| Test Mode              | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |                  |                          |                     |
| Power spectral density |                                                 |                  |                          |                     |
| Frequency (MHz)        | ANT-0                                           |                  |                          |                     |
|                        | Measurement (dBm/100 kHz)                       | Duty Factor (dB) | Calculated (dBm/500 kHz) | Limit (dBm/500 kHz) |
| 5755                   | -2.681                                          | 0.232            | 4.541                    | ≤ 28.59             |
| 5795                   | -3.513                                          | 0.232            | 3.709                    |                     |
| Frequency (MHz)        | ANT-1                                           |                  |                          |                     |
|                        | Measurement (dBm/100 kHz)                       | Duty Factor (dB) | Calculated (dBm/500 kHz) | Limit (dBm/500 kHz) |
| 5755                   | -2.447                                          | 0.232            | 4.775                    | ≤ 28.59             |
| 5795                   | -3.211                                          | 0.232            | 4.011                    |                     |
| Frequency (MHz)        | ANT-0+1                                         |                  |                          | Limit (dBm/500 kHz) |
|                        | Calculated (dBm/500 kHz)                        |                  |                          |                     |
| 5755                   | 7.670                                           |                  |                          | ≤ 28.59             |
| 5795                   | 6.873                                           |                  |                          |                     |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

| Test Mode              | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |                  |                      |                 |
|------------------------|-------------------------------------------------|------------------|----------------------|-----------------|
| Power spectral density |                                                 |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5210                   | 0.862                                           | 0.152            | 1.014                | ≤ 15.11         |
| Frequency (MHz)        | ANT-1                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5210                   | 0.278                                           | 0.152            | 0.430                | ≤ 15.11         |
| Frequency (MHz)        | ANT-0+1                                         |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                            |                  |                      |                 |
| 5210                   | 3.743                                           |                  |                      | ≤ 15.11         |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

| Test Mode              | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -6.668                                          | 0.152               | 0.474                       | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -6.434                                          | 0.152               | 0.708                       | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5775                   | 3.603                                           |                     |                             | ≤ 28.59                |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

|                        |                                                 |                     |                         |                    |
|------------------------|-------------------------------------------------|---------------------|-------------------------|--------------------|
| Test Mode              | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |                     |                         |                    |
| Power spectral density |                                                 |                     |                         |                    |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5180                   | 8.094                                           | 0.152               | 8.246                   | ≤ 15.11            |
| 5200                   | 8.022                                           | 0.152               | 8.174                   |                    |
| 5240                   | 8.388                                           | 0.152               | 8.540                   |                    |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5180                   | 7.697                                           | 0.152               | 7.849                   | ≤ 15.11            |
| 5200                   | 7.520                                           | 0.152               | 7.672                   |                    |
| 5240                   | 7.280                                           | 0.152               | 7.432                   |                    |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                         | Limit<br>(dBm/MHz) |
|                        | Calculated<br>(dBm/MHz)                         |                     |                         |                    |
| 5180                   | 11.062                                          |                     |                         | ≤ 15.11            |
| 5200                   | 10.940                                          |                     |                         |                    |
| 5240                   | 11.031                                          |                     |                         |                    |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.



|                        |                                                 |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |                     |                             |                        |
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | -1.021                                          | 0.152               | 6.120                       | ≤ 28.59                |
| 5785                   | -2.280                                          | 0.152               | 4.861                       |                        |
| 5825                   | -2.660                                          | 0.152               | 4.481                       |                        |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | -0.720                                          | 0.152               | 6.421                       | ≤ 28.59                |
| 5785                   | -1.640                                          | 0.152               | 5.501                       |                        |
| 5825                   | -1.844                                          | 0.152               | 5.297                       |                        |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5745                   | 9.284                                           |                     |                             | ≤ 28.59                |
| 5785                   | 8.203                                           |                     |                             |                        |
| 5825                   | 7.919                                           |                     |                             |                        |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)



|                        |                                                 |                     |                         |                    |
|------------------------|-------------------------------------------------|---------------------|-------------------------|--------------------|
| Test Mode              | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |                     |                         |                    |
| Power spectral density |                                                 |                     |                         |                    |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5190                   | 4.611                                           | 0.163               | 4.774                   | ≤ 15.11            |
| 5230                   | 5.805                                           | 0.163               | 5.968                   |                    |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5190                   | 3.844                                           | 0.163               | 4.007                   | ≤ 15.11            |
| 5230                   | 5.412                                           | 0.163               | 5.575                   |                    |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                         | Limit<br>(dBm/MHz) |
|                        | Calculated<br>(dBm/MHz)                         |                     |                         |                    |
| 5190                   | 7.418                                           |                     |                         | ≤ 15.11            |
| 5230                   | 8.786                                           |                     |                         |                    |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                                 |                  |                          |                     |
|------------------------|-------------------------------------------------|------------------|--------------------------|---------------------|
| Test Mode              | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |                  |                          |                     |
| Power spectral density |                                                 |                  |                          |                     |
| Frequency (MHz)        | ANT-0                                           |                  |                          |                     |
|                        | Measurement (dBm/100 kHz)                       | Duty Factor (dB) | Calculated (dBm/500 kHz) | Limit (dBm/500 kHz) |
| 5755                   | -3.802                                          | 0.163            | 3.351                    | ≤ 28.59             |
| 5795                   | -4.862                                          | 0.163            | 2.291                    |                     |
| Frequency (MHz)        | ANT-1                                           |                  |                          |                     |
|                        | Measurement (dBm/100 kHz)                       | Duty Factor (dB) | Calculated (dBm/500 kHz) | Limit (dBm/500 kHz) |
| 5755                   | -3.634                                          | 0.163            | 3.519                    | ≤ 28.59             |
| 5795                   | -4.583                                          | 0.163            | 2.570                    |                     |
| Frequency (MHz)        | ANT-0+1                                         |                  |                          | Limit (dBm/500 kHz) |
|                        | Calculated (dBm/500 kHz)                        |                  |                          |                     |
| 5755                   | 6.446                                           |                  |                          | ≤ 28.59             |
| 5795                   | 5.443                                           |                  |                          |                     |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

|                        |                                                  |                     |                         |                    |
|------------------------|--------------------------------------------------|---------------------|-------------------------|--------------------|
| Test Mode              | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |                     |                         |                    |
| Power spectral density |                                                  |                     |                         |                    |
| Frequency<br>(MHz)     | ANT-0                                            |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                         | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5210                   | 1.170                                            | 0.254               | 1.424                   | ≤ 15.11            |
| Frequency<br>(MHz)     | ANT-1                                            |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                         | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5210                   | 0.650                                            | 0.254               | 0.904                   | ≤ 15.11            |
| Frequency<br>(MHz)     | ANT-0+1                                          |                     |                         | Limit<br>(dBm/MHz) |
|                        | Calculated<br>(dBm/MHz)                          |                     |                         |                    |
| 5210                   | 4.182                                            |                     |                         | ≤ 15.11            |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

| Test Mode              | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |                     |                             |                        |
|------------------------|--------------------------------------------------|---------------------|-----------------------------|------------------------|
| Power spectral density |                                                  |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                            |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                     | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -7.818                                           | 0.254               | -0.574                      | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-1                                            |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                     | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -7.129                                           | 0.254               | 0.115                       | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-0+1                                          |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                      |                     |                             |                        |
| 5775                   | 2.794                                            |                     |                             | ≤ 28.59                |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

|                |
|----------------|
| Beamforming on |
|----------------|

|                        |                                                 |                  |                      |                 |
|------------------------|-------------------------------------------------|------------------|----------------------|-----------------|
| Test Mode              | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |                  |                      |                 |
| Power spectral density |                                                 |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 5.107                                           | 0.163            | 5.270                | ≤ 15.11         |
| 5200                   | 5.288                                           | 0.163            | 5.451                |                 |
| 5240                   | 5.204                                           | 0.163            | 5.367                |                 |
| Frequency (MHz)        | ANT-1                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 4.487                                           | 0.163            | 4.650                | ≤ 15.11         |
| 5200                   | 4.239                                           | 0.163            | 4.402                |                 |
| 5240                   | 4.612                                           | 0.163            | 4.775                |                 |
| Frequency (MHz)        | ANT-0+1                                         |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                            |                  |                      |                 |
| 5180                   | 7.982                                           |                  |                      | ≤ 15.11         |
| 5200                   | 7.969                                           |                  |                      |                 |
| 5240                   | 8.092                                           |                  |                      |                 |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.



|                        |                                                 |                  |                          |                     |
|------------------------|-------------------------------------------------|------------------|--------------------------|---------------------|
| Test Mode              | Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode |                  |                          |                     |
| Power spectral density |                                                 |                  |                          |                     |
| Frequency (MHz)        | ANT-0                                           |                  |                          |                     |
|                        | Measurement (dBm/100 kHz)                       | Duty Factor (dB) | Calculated (dBm/500 kHz) | Limit (dBm/500 kHz) |
| 5745                   | -3.103                                          | 0.163            | 4.050                    | ≤ 28.59             |
| 5785                   | -4.249                                          | 0.163            | 2.904                    |                     |
| 5825                   | -4.965                                          | 0.163            | 2.188                    |                     |
| Frequency (MHz)        | ANT-1                                           |                  |                          |                     |
|                        | Measurement (dBm/100 kHz)                       | Duty Factor (dB) | Calculated (dBm/500 kHz) | Limit (dBm/500 kHz) |
| 5745                   | -3.053                                          | 0.163            | 4.100                    | ≤ 28.59             |
| 5785                   | -3.332                                          | 0.163            | 3.821                    |                     |
| 5825                   | -4.056                                          | 0.163            | 3.097                    |                     |
| Frequency (MHz)        | ANT-0+1                                         |                  |                          | Limit (dBm/500 kHz) |
|                        | Calculated (dBm/500 kHz)                        |                  |                          |                     |
| 5745                   | 7.086                                           |                  |                          | ≤ 28.59             |
| 5785                   | 6.397                                           |                  |                          |                     |
| 5825                   | 5.677                                           |                  |                          |                     |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)



|                        |                                                 |                     |                         |                    |
|------------------------|-------------------------------------------------|---------------------|-------------------------|--------------------|
| Test Mode              | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |                     |                         |                    |
| Power spectral density |                                                 |                     |                         |                    |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5190                   | 0.643                                           | 0.232               | 0.875                   | ≤ 15.11            |
| 5230                   | 3.004                                           | 0.232               | 3.236                   |                    |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                         |                    |
|                        | Measurement<br>(dBm/MHz)                        | Duty Factor<br>(dB) | Calculated<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
| 5190                   | 0.341                                           | 0.232               | 0.573                   | ≤ 15.11            |
| 5230                   | 2.028                                           | 0.232               | 2.260                   |                    |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                         | Limit<br>(dBm/MHz) |
|                        | Calculated<br>(dBm/MHz)                         |                     |                         |                    |
| 5190                   | 3.737                                           |                     |                         | ≤ 15.11            |
| 5230                   | 5.786                                           |                     |                         |                    |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                                 |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode |                     |                             |                        |
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5755                   | -5.936                                          | 0.232               | 1.286                       | ≤ 28.59                |
| 5795                   | -6.959                                          | 0.232               | 0.263                       |                        |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5755                   | -5.628                                          | 0.232               | 1.594                       | ≤ 28.59                |
| 5795                   | -6.434                                          | 0.232               | 0.788                       |                        |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5755                   | 4.453                                           |                     |                             | ≤ 28.59                |
| 5795                   | 3.544                                           |                     |                             |                        |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

|                        |                                                 |                  |                      |                 |
|------------------------|-------------------------------------------------|------------------|----------------------|-----------------|
| Test Mode              | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |                  |                      |                 |
| Power spectral density |                                                 |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5210                   | -2.523                                          | 0.152            | -2.371               | ≤ 15.11         |
| Frequency (MHz)        | ANT-1                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5210                   | -3.076                                          | 0.152            | -2.924               | ≤ 15.11         |
| Frequency (MHz)        | ANT-0+1                                         |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                            |                  |                      |                 |
| 5210                   | 0.372                                           |                  |                      | ≤ 15.11         |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                                 |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode |                     |                             |                        |
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -10.002                                         | 0.152               | -2.860                      | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -9.527                                          | 0.152               | -2.385                      | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5775                   | 0.394                                           |                     |                             | ≤ 28.59                |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

|                        |                                                 |                  |                      |                 |
|------------------------|-------------------------------------------------|------------------|----------------------|-----------------|
| Test Mode              | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |                  |                      |                 |
| Power spectral density |                                                 |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 4.774                                           | 0.152            | 4.926                | ≤ 15.11         |
| 5200                   | 4.637                                           | 0.152            | 4.789                |                 |
| 5240                   | 5.087                                           | 0.152            | 5.239                |                 |
| Frequency (MHz)        | ANT-1                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5180                   | 4.353                                           | 0.152            | 4.505                | ≤ 15.11         |
| 5200                   | 4.106                                           | 0.152            | 4.258                |                 |
| 5240                   | 4.042                                           | 0.152            | 4.194                |                 |
| Frequency (MHz)        | ANT-0+1                                         |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                            |                  |                      |                 |
| 5180                   | 7.730                                           |                  |                      | ≤ 15.11         |
| 5200                   | 7.541                                           |                  |                      |                 |
| 5240                   | 7.758                                           |                  |                      |                 |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.



|                        |                                                 |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode |                     |                             |                        |
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | -4.277                                          | 0.152               | 2.864                       | ≤ 28.59                |
| 5785                   | -5.404                                          | 0.152               | 1.737                       |                        |
| 5825                   | -6.123                                          | 0.152               | 1.018                       |                        |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5745                   | -4.045                                          | 0.152               | 3.096                       | ≤ 28.59                |
| 5785                   | -4.967                                          | 0.152               | 2.174                       |                        |
| 5825                   | -5.383                                          | 0.152               | 1.758                       |                        |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5745                   | 5.992                                           |                     |                             | ≤ 28.59                |
| 5785                   | 4.972                                           |                     |                             |                        |
| 5825                   | 4.414                                           |                     |                             |                        |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)





|                        |                                                 |                  |                      |                 |
|------------------------|-------------------------------------------------|------------------|----------------------|-----------------|
| Test Mode              | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |                  |                      |                 |
| Power spectral density |                                                 |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5190                   | 1.290                                           | 0.163            | 1.453                | ≤ 15.11         |
| 5230                   | 2.676                                           | 0.163            | 2.839                |                 |
| Frequency (MHz)        | ANT-1                                           |                  |                      |                 |
|                        | Measurement (dBm/MHz)                           | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5190                   | 0.513                                           | 0.163            | 0.676                | ≤ 15.11         |
| 5230                   | 2.072                                           | 0.163            | 2.235                |                 |
| Frequency (MHz)        | ANT-0+1                                         |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                            |                  |                      |                 |
| 5190                   | 4.092                                           |                  |                      | ≤ 15.11         |
| 5230                   | 5.558                                           |                  |                      |                 |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

|                        |                                                 |                     |                             |                        |
|------------------------|-------------------------------------------------|---------------------|-----------------------------|------------------------|
| Test Mode              | Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode |                     |                             |                        |
| Power spectral density |                                                 |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5755                   | -7.357                                          | 0.163               | -0.204                      | ≤ 28.59                |
| 5795                   | -8.223                                          | 0.163               | -1.070                      |                        |
| Frequency<br>(MHz)     | ANT-1                                           |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                    | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5755                   | -6.929                                          | 0.163               | 0.224                       | ≤ 28.59                |
| 5795                   | -7.666                                          | 0.163               | -0.513                      |                        |
| Frequency<br>(MHz)     | ANT-0+1                                         |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                     |                     |                             |                        |
| 5755                   | 3.025                                           |                     |                             | ≤ 28.59                |
| 5795                   | 2.227                                           |                     |                             |                        |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)

| Test Mode              | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |                  |                      |                 |
|------------------------|--------------------------------------------------|------------------|----------------------|-----------------|
| Power spectral density |                                                  |                  |                      |                 |
| Frequency (MHz)        | ANT-0                                            |                  |                      |                 |
|                        | Measurement (dBm/MHz)                            | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5210                   | -2.259                                           | 0.254            | -2.005               | ≤ 15.11         |
| Frequency (MHz)        | ANT-1                                            |                  |                      |                 |
|                        | Measurement (dBm/MHz)                            | Duty Factor (dB) | Calculated (dBm/MHz) | Limit (dBm/MHz) |
| 5210                   | -2.866                                           | 0.254            | -2.612               | ≤ 15.11         |
| Frequency (MHz)        | ANT-0+1                                          |                  |                      | Limit (dBm/MHz) |
|                        | Calculated (dBm/MHz)                             |                  |                      |                 |
| 5210                   | 0.713                                            |                  |                      | ≤ 15.11         |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

| Test Mode              | Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode |                     |                             |                        |
|------------------------|--------------------------------------------------|---------------------|-----------------------------|------------------------|
| Power spectral density |                                                  |                     |                             |                        |
| Frequency<br>(MHz)     | ANT-0                                            |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                     | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -11.153                                          | 0.254               | -3.909                      | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-1                                            |                     |                             |                        |
|                        | Measurement<br>(dBm/100 kHz)                     | Duty Factor<br>(dB) | Calculated<br>(dBm/500 kHz) | Limit<br>(dBm/500 kHz) |
| 5775                   | -10.421                                          | 0.254               | -3.177                      | ≤ 28.59                |
| Frequency<br>(MHz)     | ANT-0+1                                          |                     |                             | Limit<br>(dBm/500 kHz) |
|                        | Calculated<br>(dBm/500 kHz)                      |                     |                             |                        |
| 5775                   | -0.517                                           |                     |                             | ≤ 28.59                |

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10\*Log(500 k/100 k)





■ Test Graphs

|                                                |                                                                                      |
|------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 2: IEEE 802.11a Continuous TX mode_ ANT-0 |    |
| 5180 MHz                                       |   |
| 5200 MHz                                       |  |
| 5240 MHz                                       |                                                                                      |



Mode 2: IEEE 802.11a Continuous TX mode\_ ANT-0

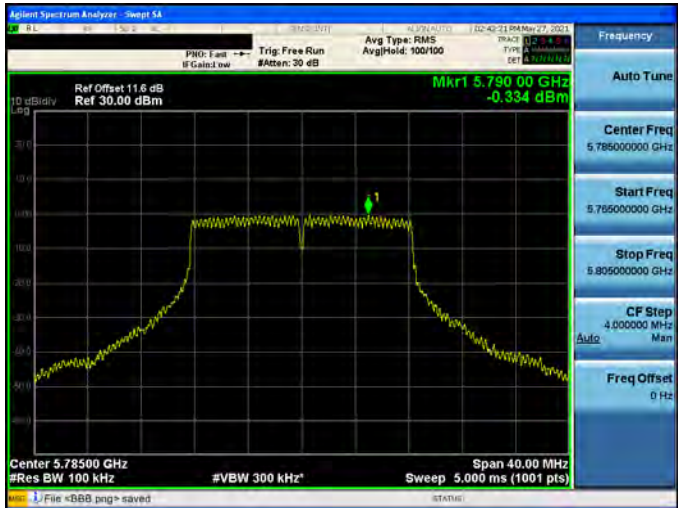
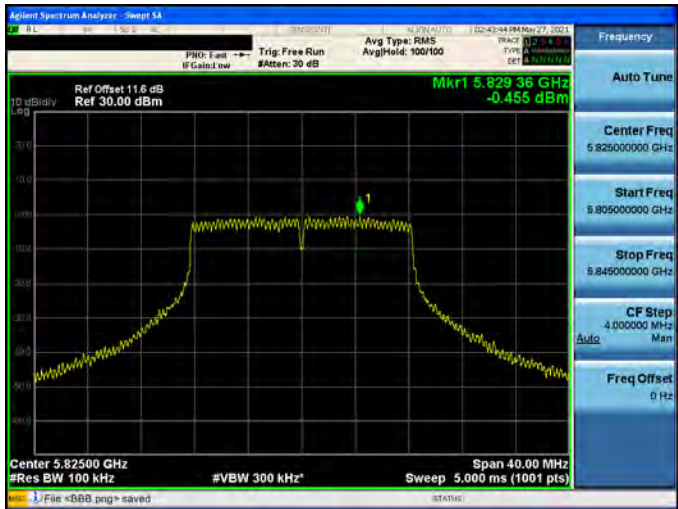
|          |                                                                                      |
|----------|--------------------------------------------------------------------------------------|
| 5745 MHz |    |
| 5785 MHz |   |
| 5825 MHz |  |



| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-0 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                                |    |
| 5200 MHz                                                |   |
| 5240 MHz                                                |  |



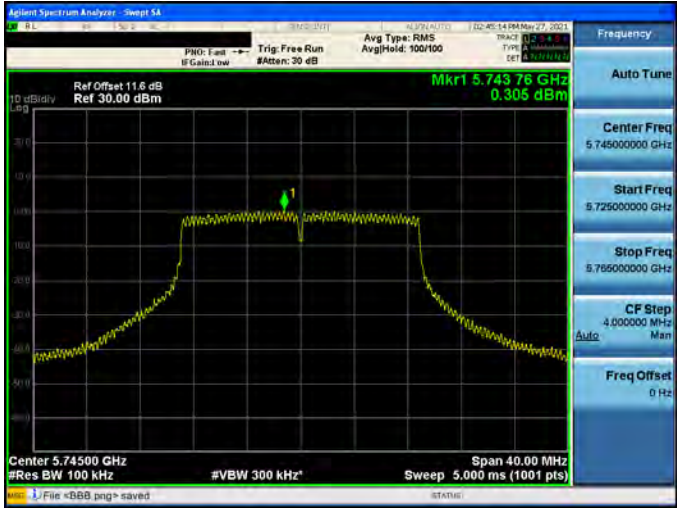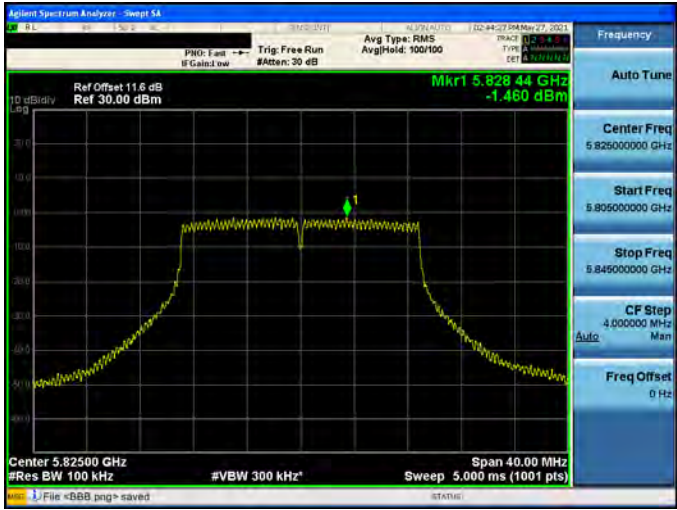

|                                                         |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-0 |                                                                                      |
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |





|                                                        |  |
|--------------------------------------------------------|--|
| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-0 |  |
| 5755 MHz                                               |  |
| 5795 MHz                                               |  |



Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-0

5210 MHz



Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-0

5775 MHz







|                                                         |  |
|---------------------------------------------------------|--|
| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-0 |  |
| 5180 MHz                                                |  |
| 5200 MHz                                                |  |
| 5240 MHz                                                |  |



| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-0 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |





| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-0 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5190 MHz                                               |   |
| 5230 MHz                                               |  |



| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-0 |  |
|--------------------------------------------------------|--|
| 5755 MHz                                               |  |
| 5795 MHz                                               |  |



Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-0

5210 MHz



Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-0

5775 MHz






|                                                |                                                                                      |
|------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 2: IEEE 802.11a Continuous TX mode_ ANT-1 |                                                                                      |
| 5180 MHz                                       |    |
| 5200 MHz                                       |   |
| 5240 MHz                                       |  |



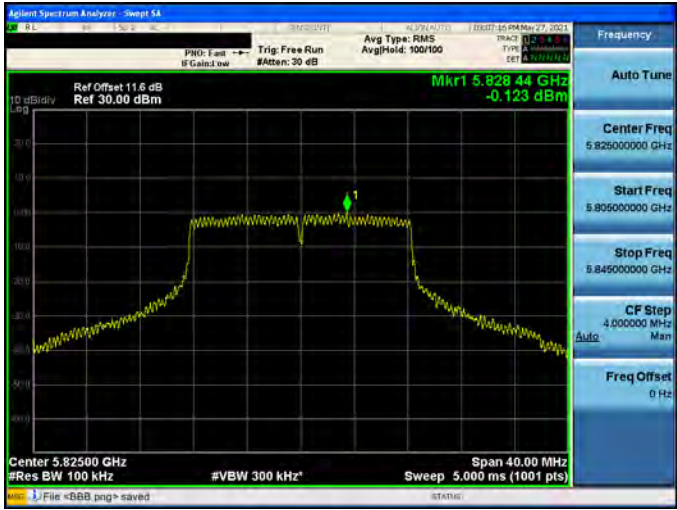


| Mode 2: IEEE 802.11a Continuous TX mode_ ANT-1 |                                                                                      |
|------------------------------------------------|--------------------------------------------------------------------------------------|
| 5745 MHz                                       |    |
| 5785 MHz                                       |   |
| 5825 MHz                                       |  |





| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                                |    |
| 5200 MHz                                                |   |
| 5240 MHz                                                |  |

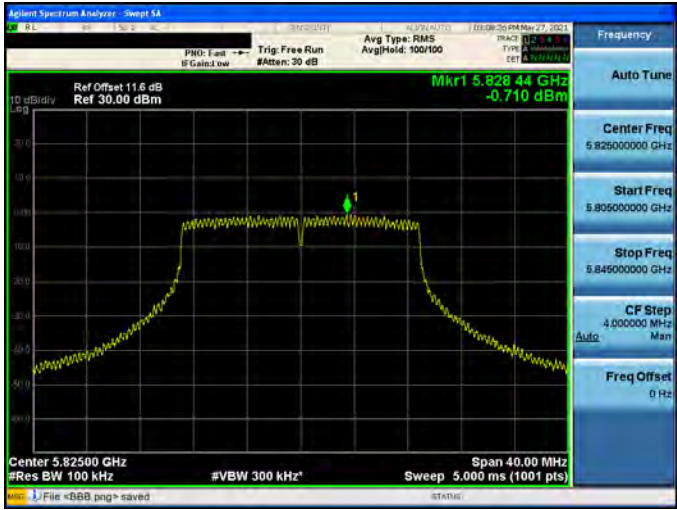

|                                                         |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |



| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-1 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5190 MHz                                               |   |
| 5230 MHz                                               |  |



| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-1 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5755 MHz                                               |   |
| 5795 MHz                                               |  |






Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-1

5210 MHz




Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-1

5775 MHz

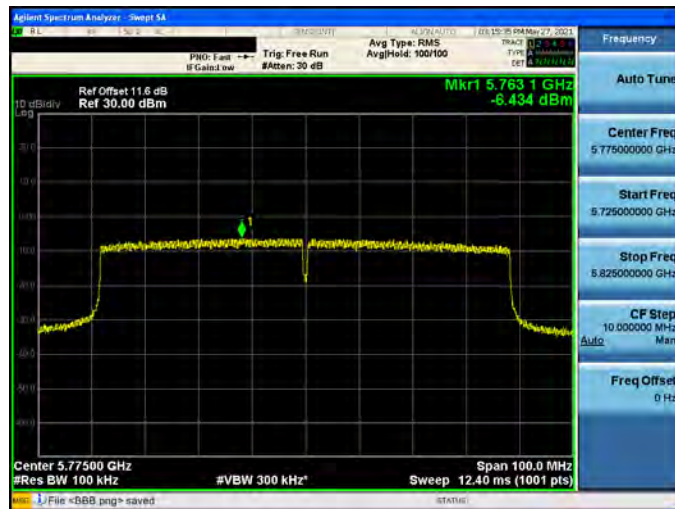



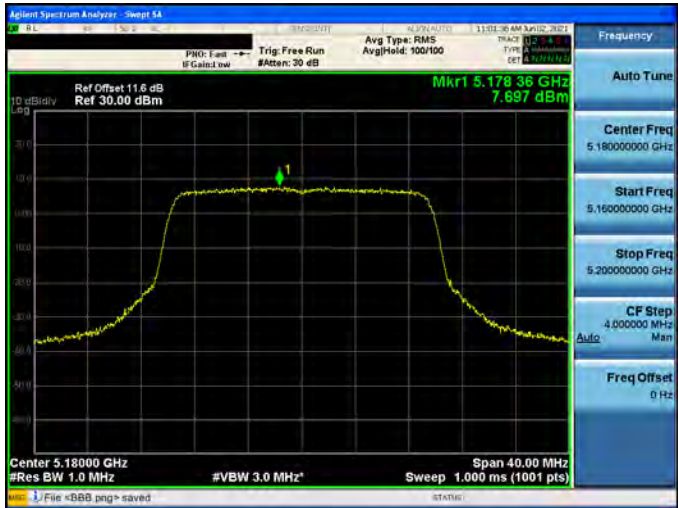


| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                                |    |
| 5200 MHz                                                |   |
| 5240 MHz                                                |  |



|                                                         |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |



|                                                        |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-1 |                                                                                     |
| 5190 MHz                                               |   |
| 5230 MHz                                               |  |

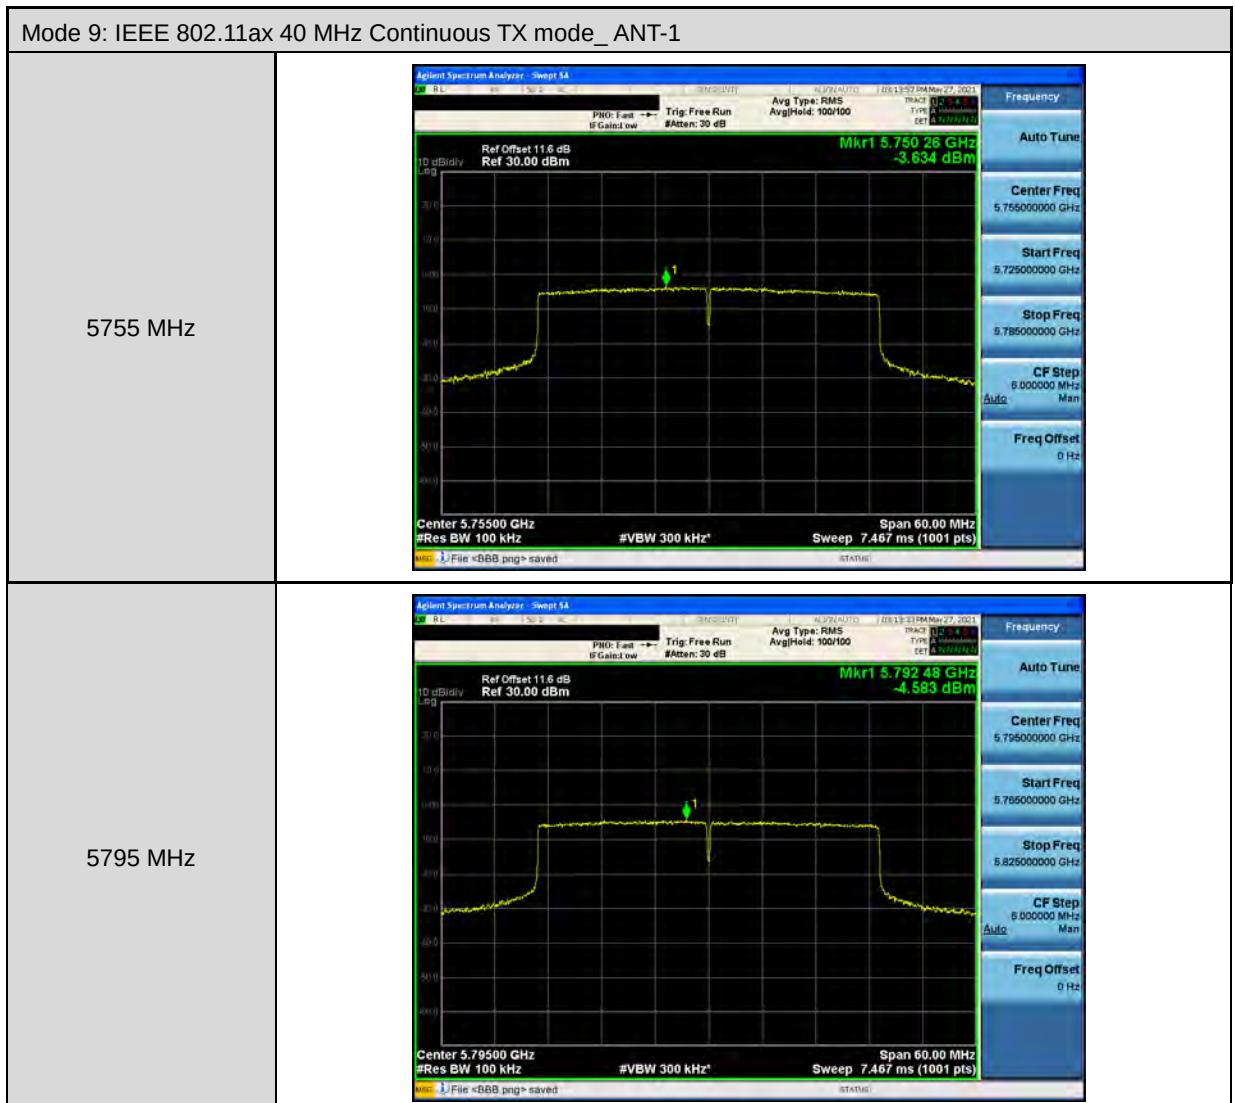





Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-1

5210 MHz



Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-1

5775 MHz








Beamforming on

Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode \_ ANT-0

|          |                                                                                      |
|----------|--------------------------------------------------------------------------------------|
| 5180 MHz |    |
| 5200 MHz |   |
| 5240 MHz |  |

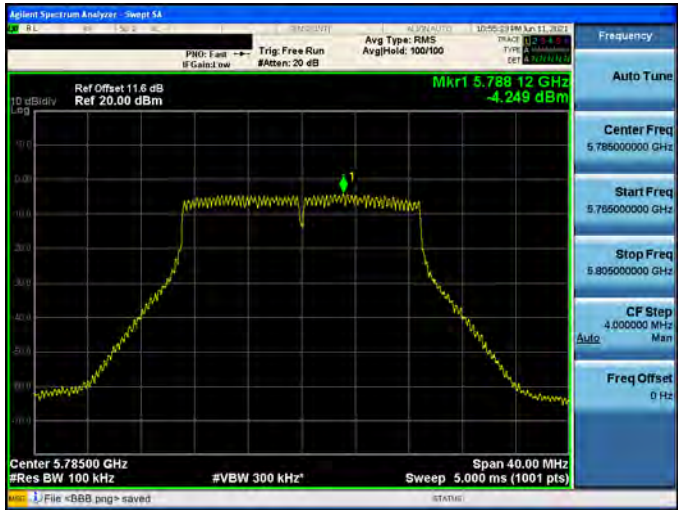

|                                                         |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-0 |                                                                                      |
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |



| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-0 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5190 MHz                                               |   |
| 5230 MHz                                               |  |



| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-0 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5755 MHz                                               |   |
| 5795 MHz                                               |  |





Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-0

5210 MHz



Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-0

5775 MHz







| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-0 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                                |    |
| 5200 MHz                                                |   |
| 5240 MHz                                                |  |



| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-0 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |



| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-0 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5190 MHz                                               |   |
| 5230 MHz                                               |  |



| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-0 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5755 MHz                                               |   |
| 5795 MHz                                               |  |





Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-0

5210 MHz



Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-0

5775 MHz







|                                                         |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
| 5180 MHz                                                |    |
| 5200 MHz                                                |   |
| 5240 MHz                                                |  |



| Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |



|                                                        |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-1 |                                                                                     |
| 5190 MHz                                               |   |
| 5230 MHz                                               |  |



| Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode_ ANT-1 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5755 MHz                                               |   |
| 5795 MHz                                               |  |






Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-1



Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode \_ ANT-1

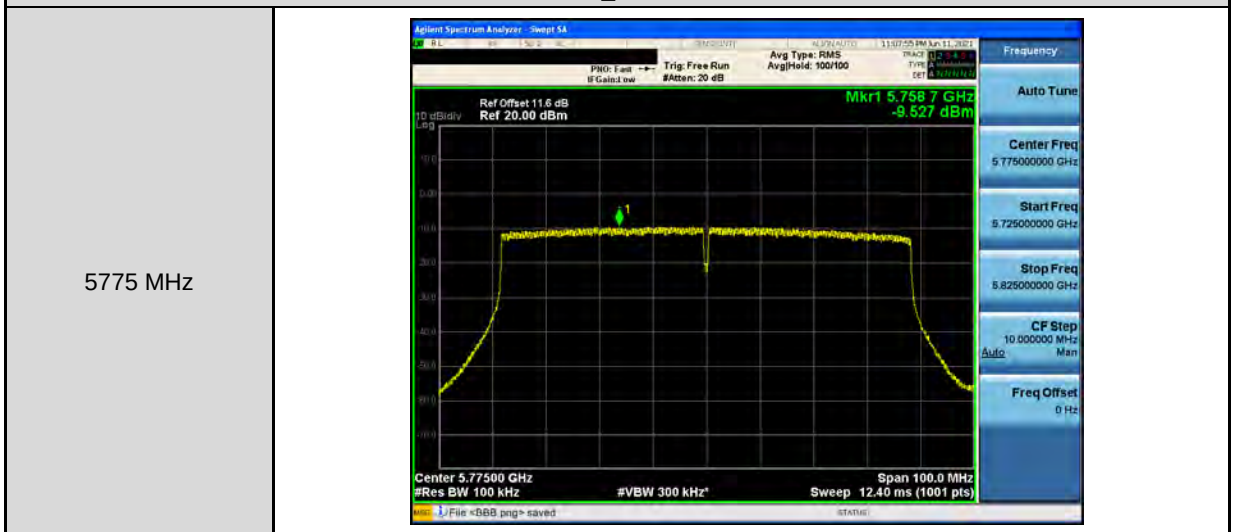





| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5180 MHz                                                |    |
| 5200 MHz                                                |   |
| 5240 MHz                                                |  |



| Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode _ ANT-1 |                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------|
| 5745 MHz                                                |    |
| 5785 MHz                                                |   |
| 5825 MHz                                                |  |



| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-1 |  |
|--------------------------------------------------------|--|
| 5190 MHz                                               |  |
| 5230 MHz                                               |  |



| Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode_ ANT-1 |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 5755 MHz                                               |   |
| 5795 MHz                                               |  |





Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-1

5210 MHz



Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode \_ ANT-1

5775 MHz



---END---