

## Appendix B

### RF Test Data for BT V4.0(BDR/EDR) (Conducted Measurement)


**Product Name: HyFlip**  
**Trade Mark: Hyundai**  
**Test Model: HTLF14INC4Z1SSG**

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.2 ° C  |
| Relative Humidity: | 53.6%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Jenny Wu  |
| Supervised by:     | Li Huan   |


#### B.1 Duty Cycle

| Test Mode | Test Channel | Ant  | Duty Cycle[%] | Verdict |
|-----------|--------------|------|---------------|---------|
| BT LE     | 2440         | Ant1 | 100           | PASS    |

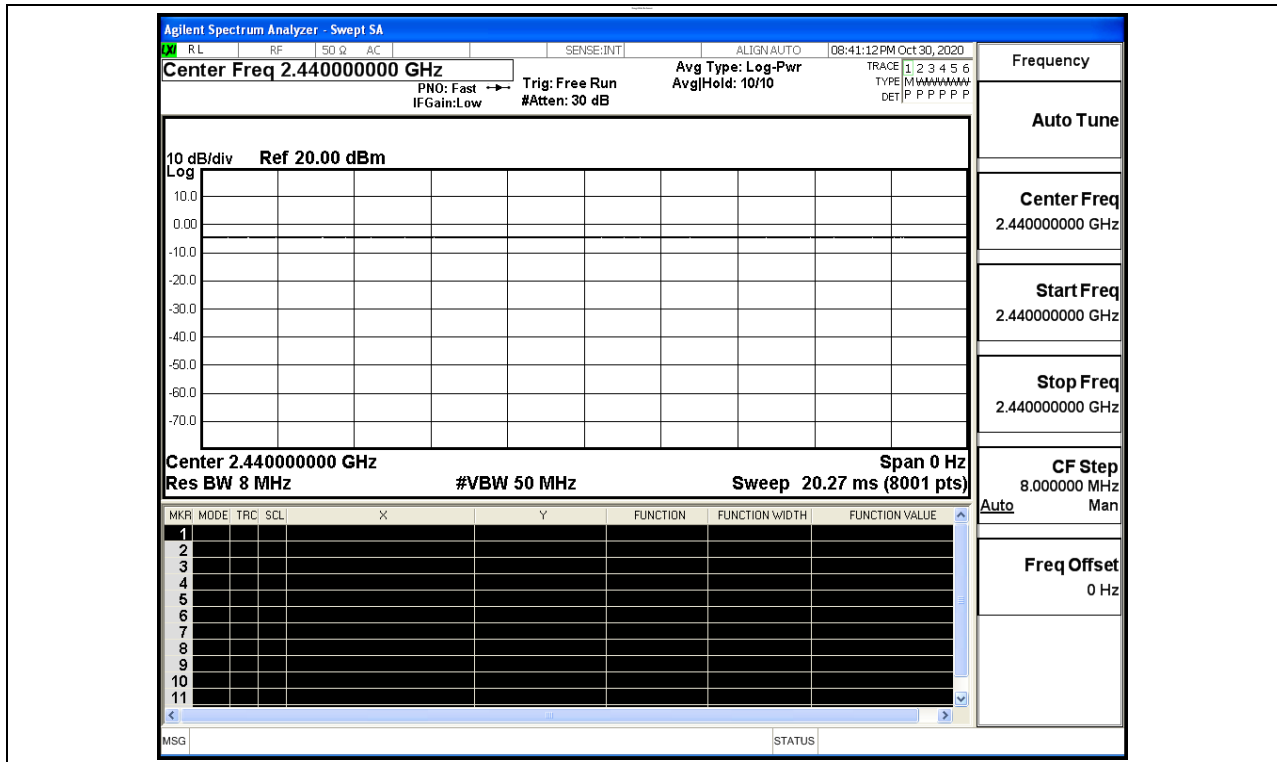


### B.2 Maximum Conducted Peak Output Power

| Mode  | Channel | Conduct Peak Power[dBm] | Limit [dBm] | Verdict |
|-------|---------|-------------------------|-------------|---------|
| BT LE | LCH     | 3.054                   | 30          | PASS    |
| BT LE | MCH     | 3.486                   | 30          | PASS    |
| BT LE | HCH     | 2.954                   | 30          | PASS    |

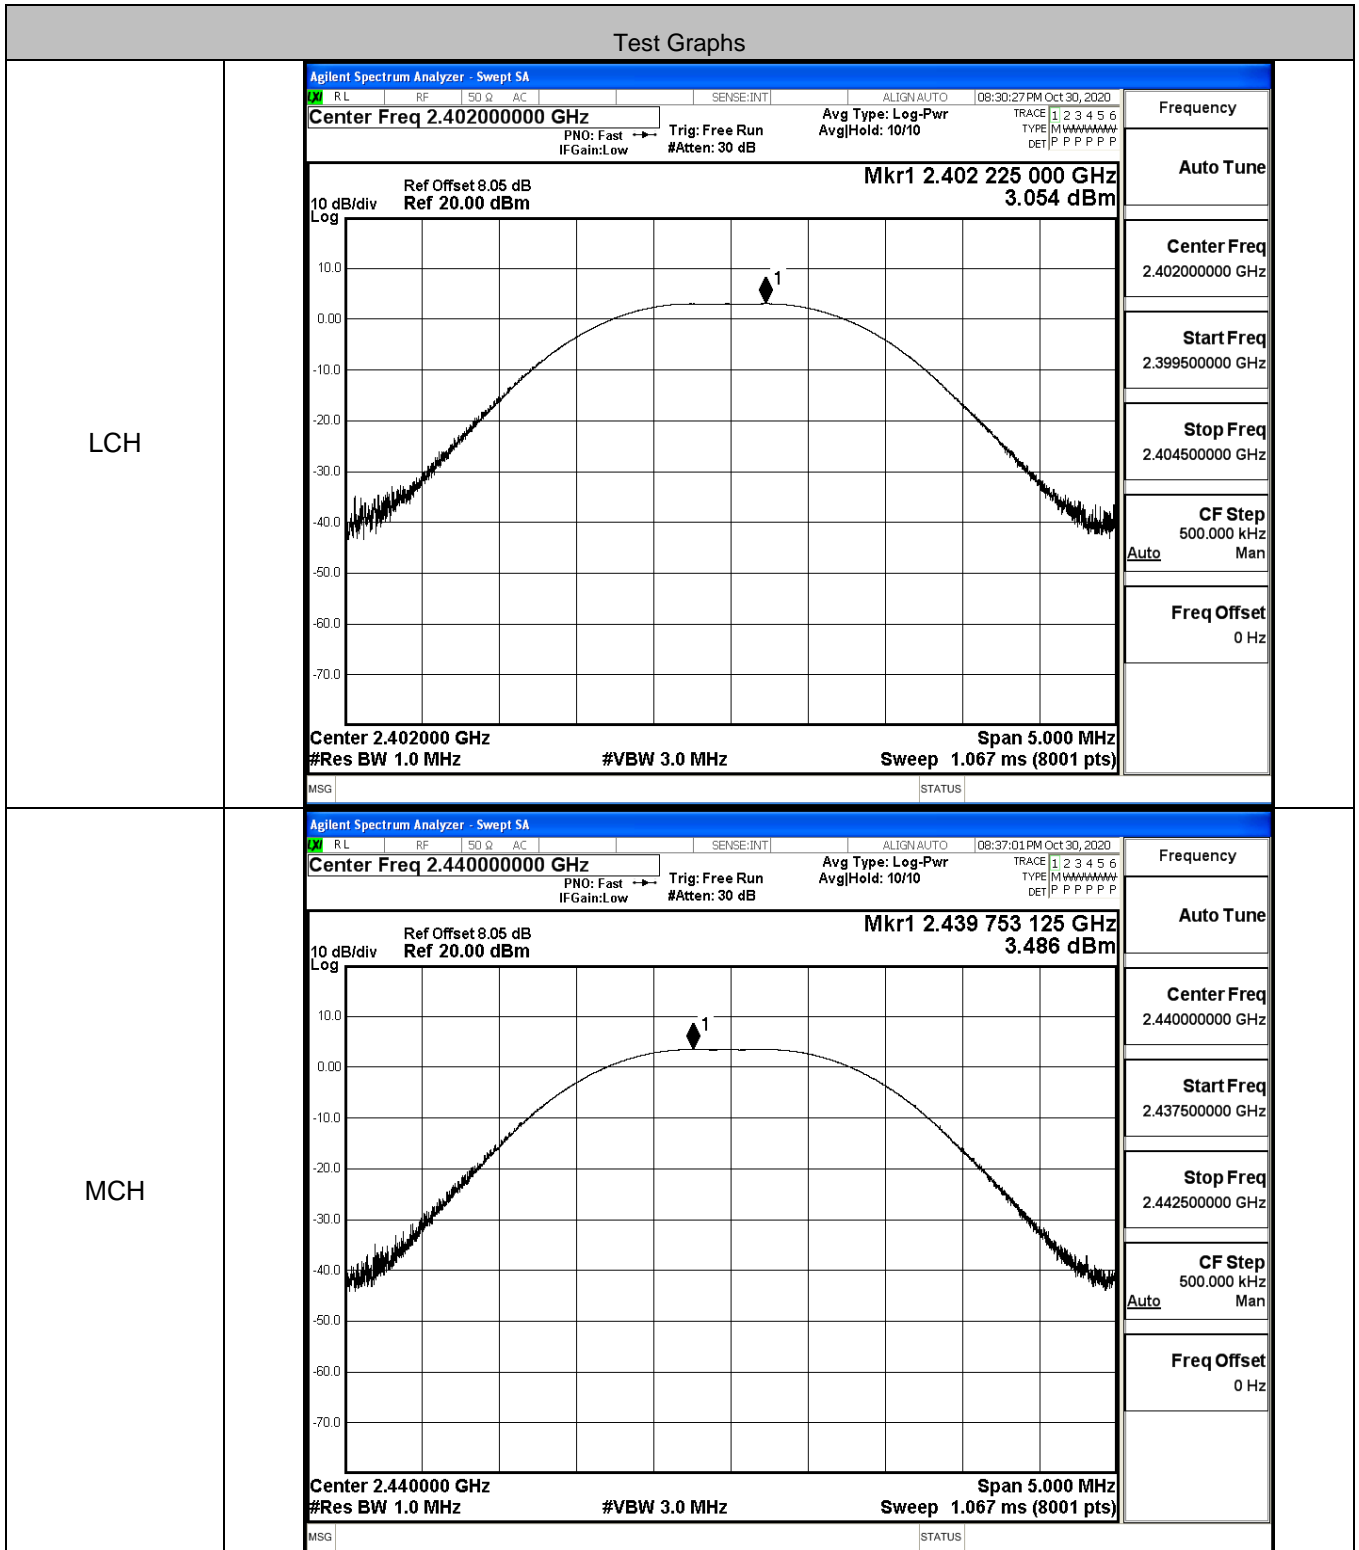



HCH

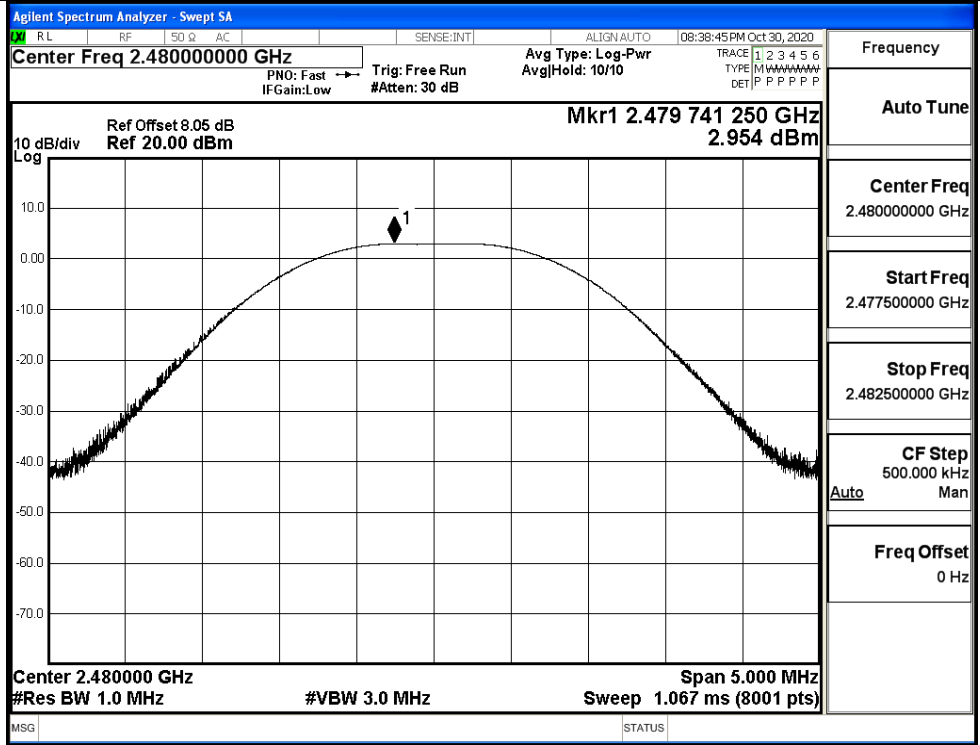

### B.3 Maximum Power Spectral Density

| Mode  | Channel | PSD [dBm/3KHz] | Limit [dBm/3KHz] | Verdict |
|-------|---------|----------------|------------------|---------|
| BT LE | LCH     | -11.883        | 8                | PASS    |
| BT LE | MCH     | -12.452        | 8                | PASS    |
| BT LE | HCH     | -12.881        | 8                | PASS    |



#### Test Graphs

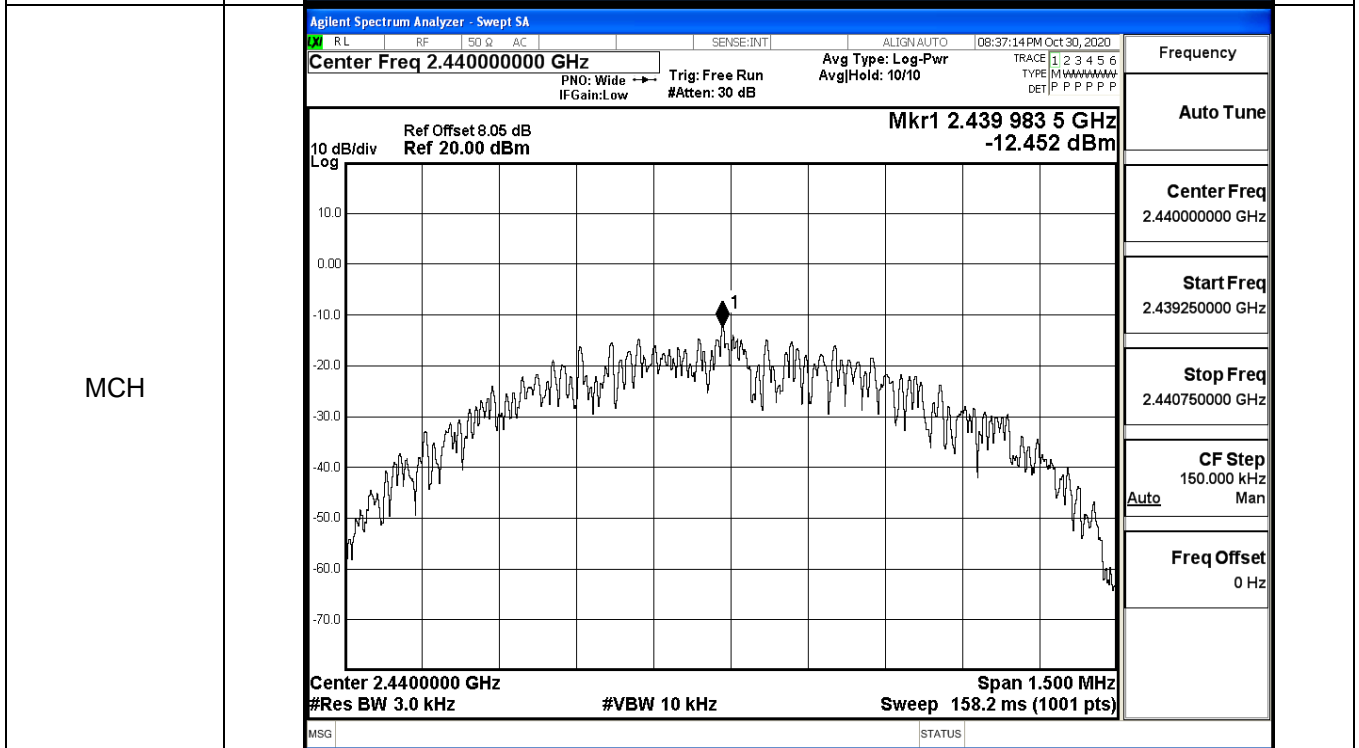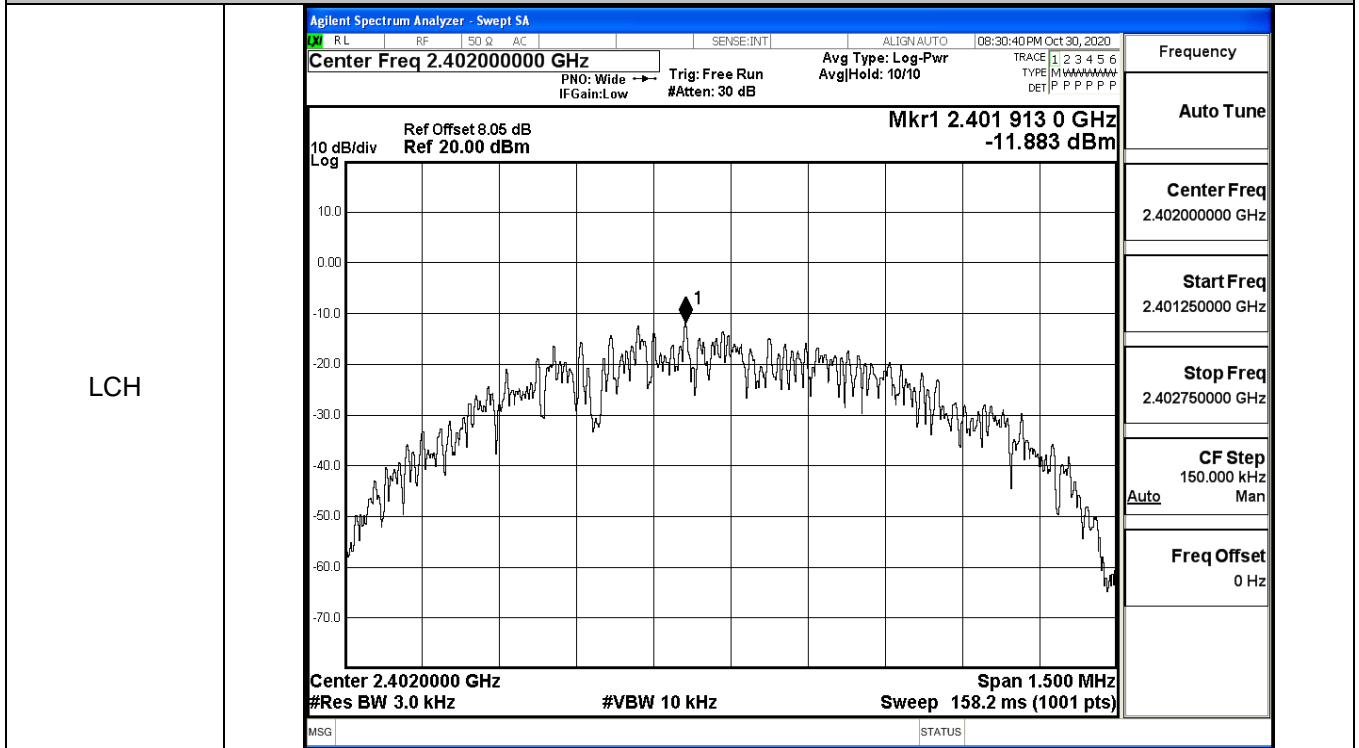




**B.4 6dB Bandwidth**


| Mode  | Channel | 6dB Bandwidth [MHz] | Limit [MHz] | Verdict |
|-------|---------|---------------------|-------------|---------|
| BT LE | LCH     | 0.6504              | ≥0.5        | PASS    |
| BT LE | MCH     | 0.6472              | ≥0.5        | PASS    |
| BT LE | HCH     | 0.6450              | ≥0.5        | PASS    |
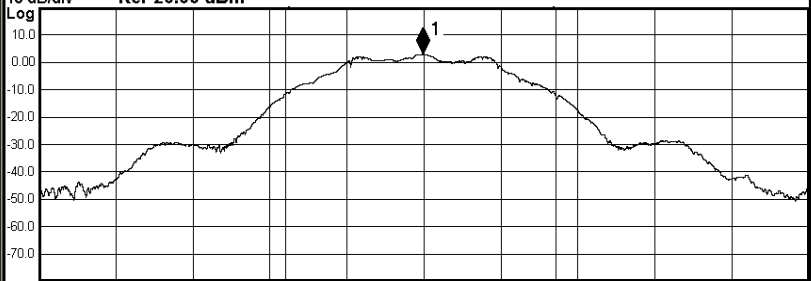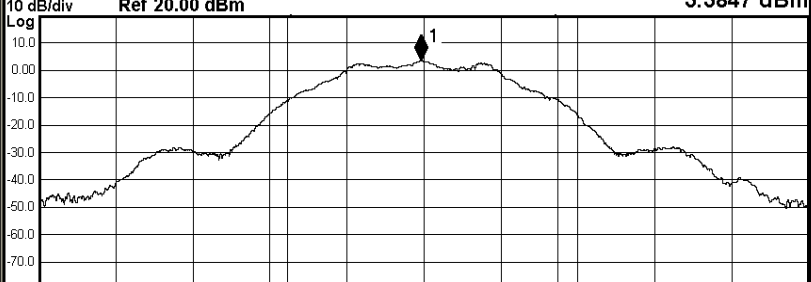
| Test Graphs         |  |                    |             |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
|---------------------|--|--------------------|-------------|----------|--|-------------------|--|--|--|---------------------|------------|-----------|---------|----------------|-----------|------|----------|
| LCH                 | <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 08:30:16 PM Oct 30, 2020</p> <p style="margin: 0;">Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None<br/>                     Trig: Free Run AvgHold: 1/1<br/>                     #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div<br/>                         Log<br/>                         Ref Offset 8.05 dB<br/>                         Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4019951 GHz<br/>                         2.9278 dBm                     </div> </div>  <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.402 GHz<br/>#Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz<br/>Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">9.38 dBm</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>1.0437 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-9.785 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>650.4 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>      | Occupied Bandwidth | Total Power | 9.38 dBm |  | <b>1.0437 MHz</b> |  |  |  | Transmit Freq Error | -9.785 kHz | OBW Power | 99.00 % | x dB Bandwidth | 650.4 kHz | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power  | 9.38 dBm           |             |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| <b>1.0437 MHz</b>   |  |                    |             |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| Transmit Freq Error | -9.785 kHz   | OBW Power          | 99.00 %     |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| x dB Bandwidth      | 650.4 kHz  | x dB               | -6.00 dB    |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| MCH                 | <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 08:34:59 PM Oct 30, 2020</p> <p style="margin: 0;">Center Freq: 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None<br/>                     Trig: Free Run AvgHold: &gt;1/1<br/>                     #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div<br/>                         Log<br/>                         Ref Offset 8.05 dB<br/>                         Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4399888 GHz<br/>                         3.3847 dBm                     </div> </div>  <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.44 GHz<br/>#Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz<br/>Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">9.84 dBm</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>1.0516 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-4.112 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>647.2 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div> | Occupied Bandwidth | Total Power | 9.84 dBm |  | <b>1.0516 MHz</b> |  |  |  | Transmit Freq Error | -4.112 kHz | OBW Power | 99.00 % | x dB Bandwidth | 647.2 kHz | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power  | 9.84 dBm           |             |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| <b>1.0516 MHz</b>   |  |                    |             |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| Transmit Freq Error | -4.112 kHz   | OBW Power          | 99.00 %     |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
| x dB Bandwidth      | 647.2 kHz  | x dB               | -6.00 dB    |          |  |                   |  |  |  |                     |            |           |         |                |           |      |          |
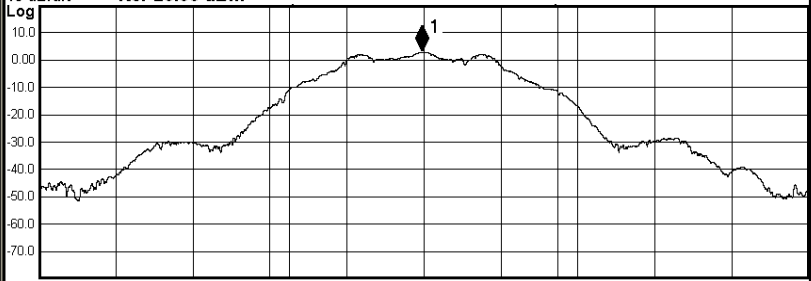
|   |  |   |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|---|--|---|--------------------------------------|------------------------------------|------------|--|--|---------------------|---------|-----------|----------------|-----------|------|--|--|---------|--|--|----------|---------------------|
| HCH   | Agilent Spectrum Analyzer - Occupied BW  | RL RF 50 Ω AC SENSE:INT ALIGN: AUTO 08:38:34 PM Oct 30, 2020                              | Frequency                            |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|   | Center Freq 2.480000000 GHz  | Center Freq: 2.480000000 GHz<br>Trig: Free Run AvgHold: 1/1<br>#IFGain: Low #Atten: 30 dB | Radio Std: None<br>Radio Device: BTS |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|   | 10 dB/div<br>Log   | Ref Offset 8.05 dB<br>Ref 20.00 dBm   | Mkr1 2.4799914 GHz<br>2.8561 dBm     |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|   |  <p>The plot shows a signal spectrum with a peak at 2.4799914 GHz. The y-axis is logarithmic, ranging from -70.0 dBm to 10.0 dBm. The x-axis represents frequency. A marker '1' is placed at the peak of the signal.</p> |   | Center Freq<br>2.480000000 GHz       |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|   | Center 2.48 GHz<br>#Res BW 100 kHz   | #VBW 300 kHz  | Span 3 MHz<br>Sweep 1.067 ms         | CF Step<br>300.000 kHz<br>Auto Man |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
| <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">9.20 dBm</td> </tr> <tr> <td style="text-align: center; font-weight: bold;">1.0407 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-206 Hz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>645.0 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> |  | Occupied Bandwidth  | Total Power                          | 9.20 dBm                           | 1.0407 MHz |  |  | Transmit Freq Error | -206 Hz | OBW Power | x dB Bandwidth | 645.0 kHz | x dB |  |  | 99.00 % |  |  | -6.00 dB | Freq Offset<br>0 Hz |
| Occupied Bandwidth  | Total Power  | 9.20 dBm  |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
| 1.0407 MHz  |  |   |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
| Transmit Freq Error   | -206 Hz  | OBW Power   |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
| x dB Bandwidth  | 645.0 kHz  | x dB  |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|   |  | 99.00 %   |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
|   |  | -6.00 dB  |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |
| MSG   |  | STATUS  |                                      |                                    |            |  |  |                     |         |           |                |           |      |  |  |         |  |  |          |                     |

### B.5 RF Conducted Spurious Emissions


| Mode  | Channel | Pref [dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-------|---------|------------|------------------|-------------|---------|
| BT LE | LCH     | 2.934      | -37.320          | -17.066     | PASS    |
| BT LE | MCH     | 3.424      | -37.100          | -16.576     | PASS    |
| BT LE | HCH     | 2.813      | -36.271          | -17.187     | PASS    |

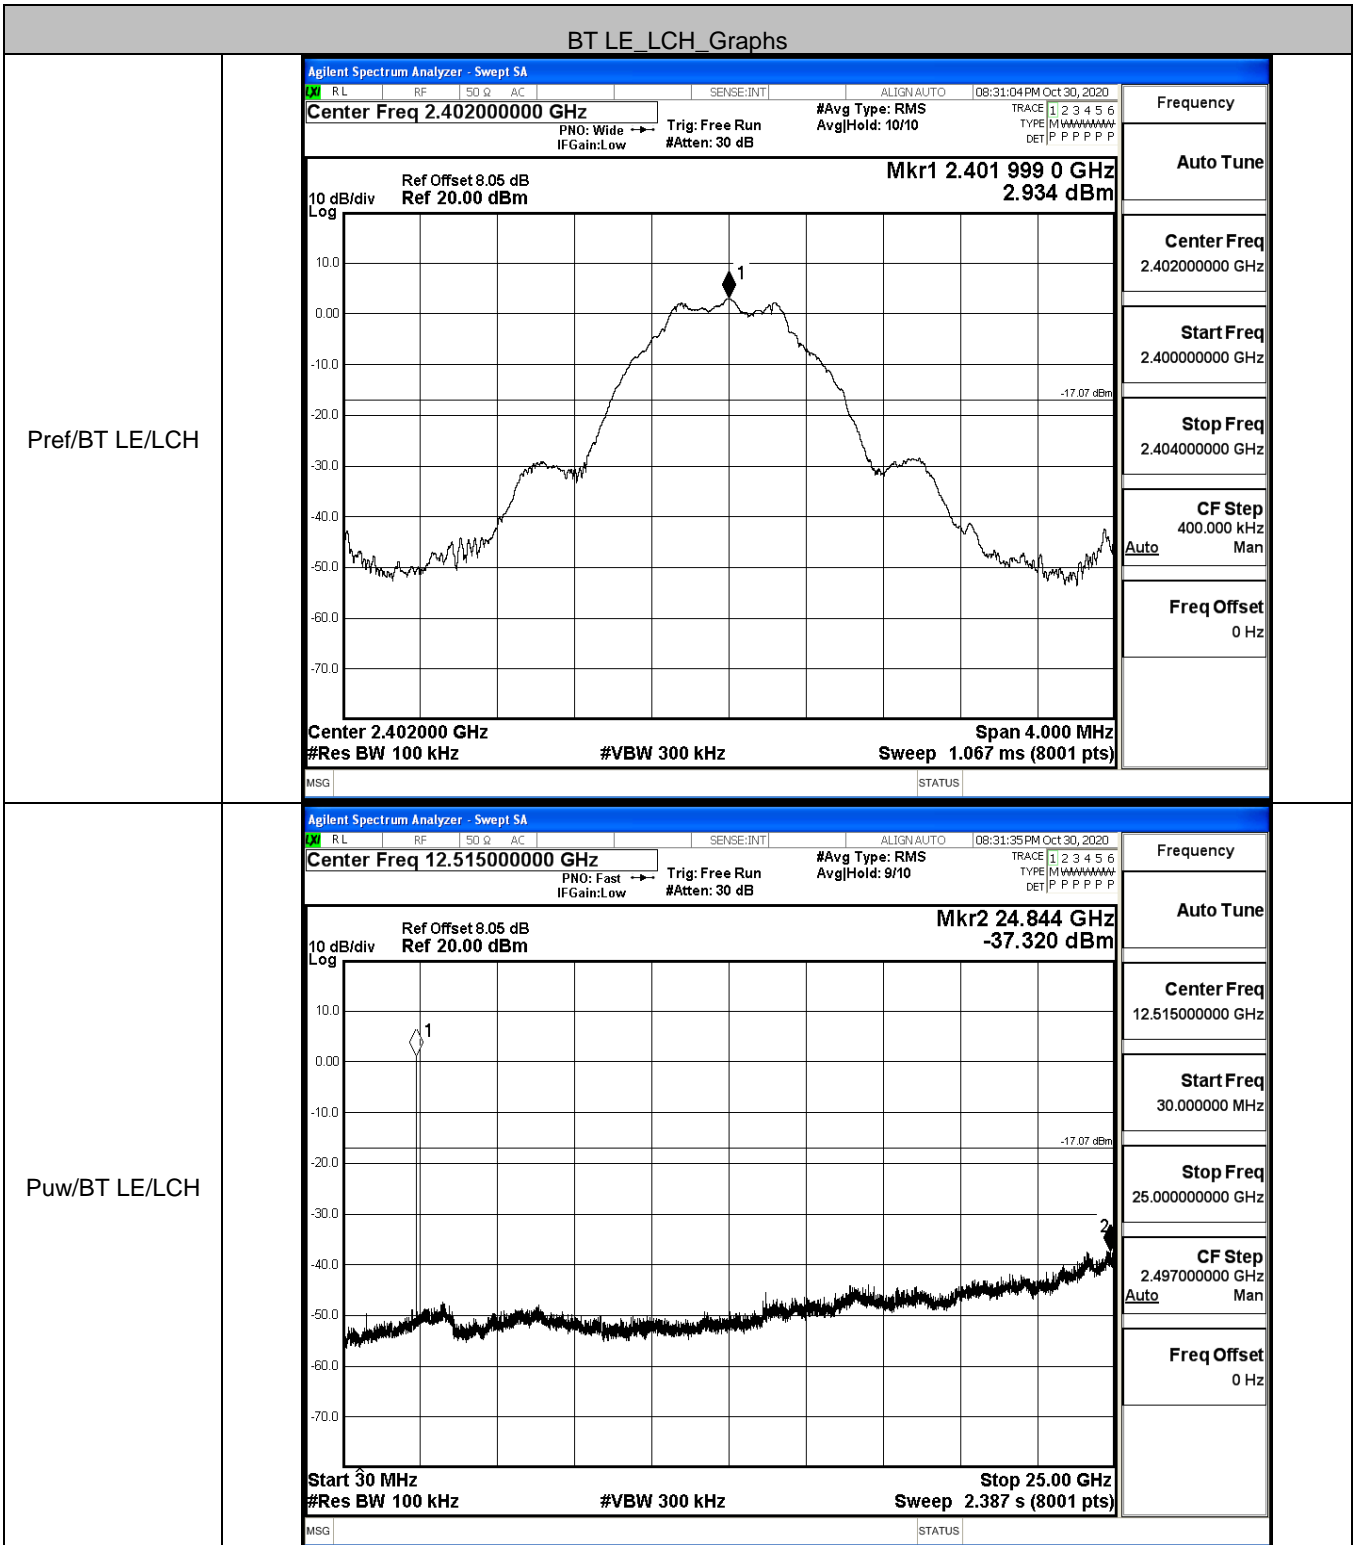




BT LE\_MCH\_Graphs

Pref/BT LE/MCH

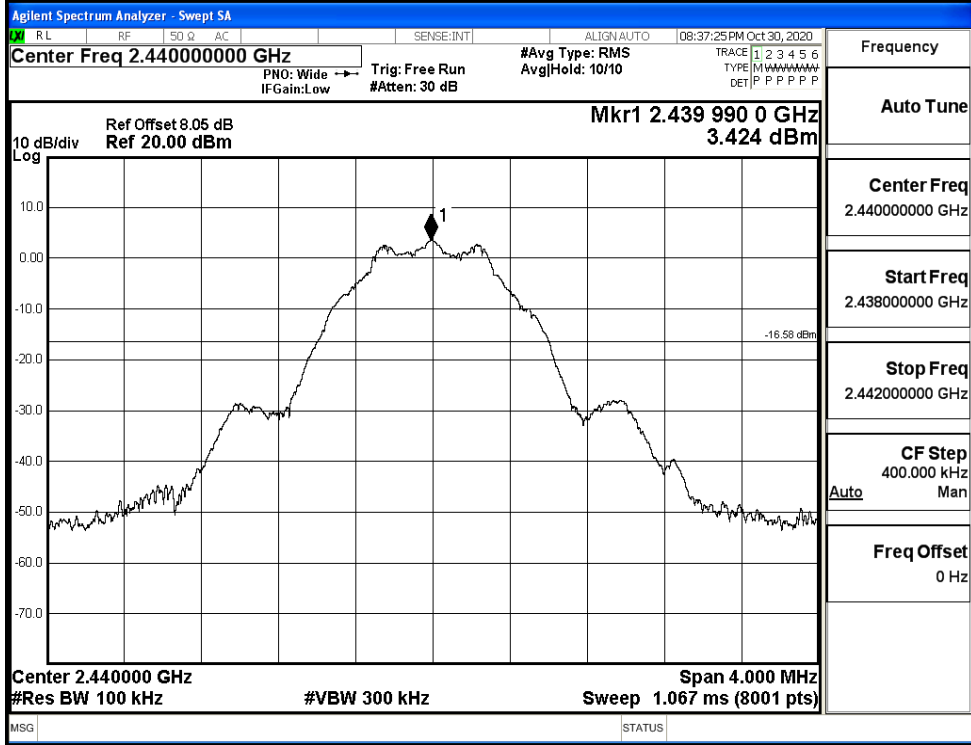


Puw/BT LE/MCH

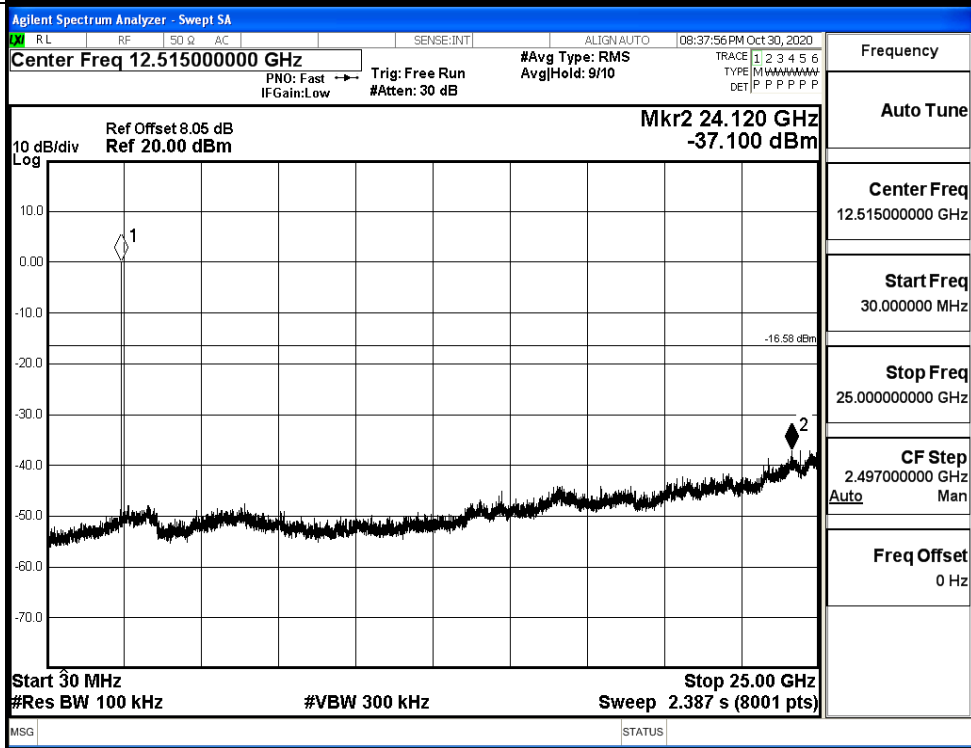


BT LE\_HCH\_Graphs

Pref/BT LE/HCH

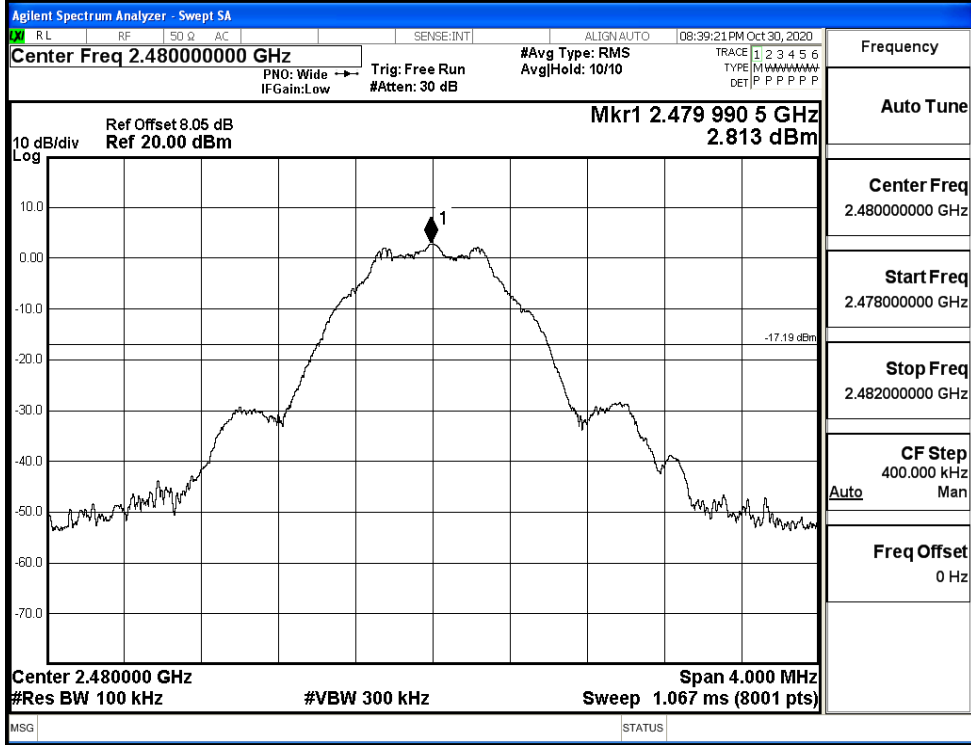

Puw/BT LE/HCH

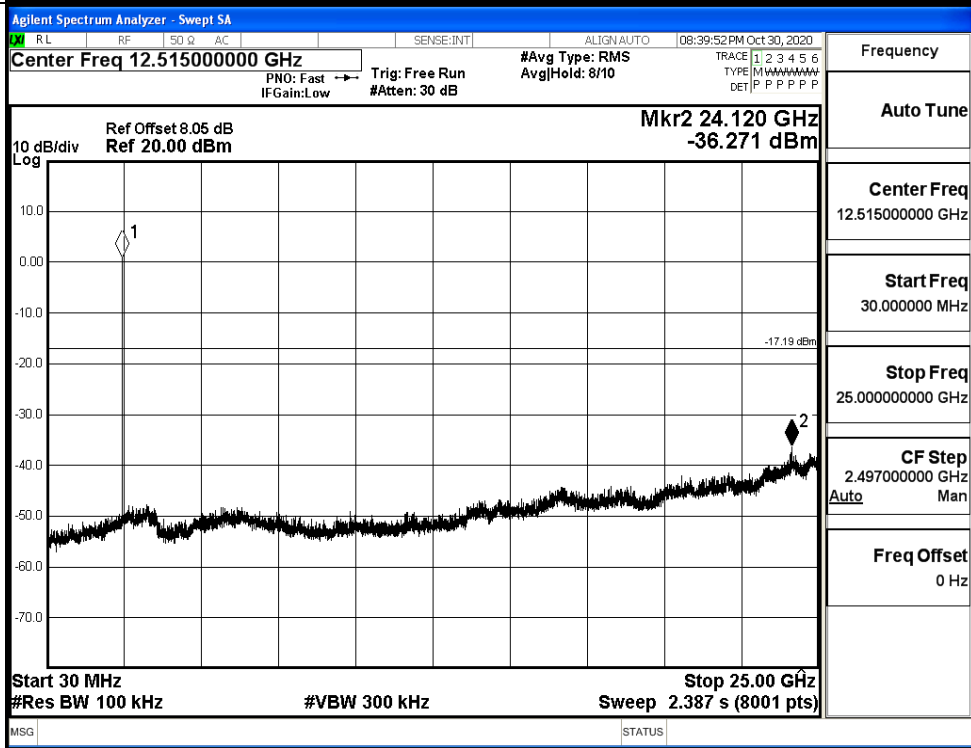

### B.6 Band-edge for RF Conducted Emissions

| Mode  | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|-------|---------|--------------------|--------------------------|-------------|---------|
| BT LE | LCH     | 3.138              | -50.159                  | -16.86      | PASS    |
| BT LE | HCH     | 2.985              | -38.406                  | -17.02      | PASS    |


Test Graphs

| LCH | <p>Agilent Spectrum Analyzer - Swept SA<br/>                 Center Freq 2.35700000 GHz<br/>                 Ref Offset 8.05 dB, Ref 20.00 dBm<br/>                 Mkr4 2.344 416 GHz, -50.159 dBm<br/>                 Start 2.31000 GHz, Stop 2.40400 GHz<br/>                 #Res BW 100 kHz, #VBW 300 kHz, Sweep 9.067 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 003 GHz</td><td>3.138 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-43.875 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-53.252 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.344 416 GHz</td><td>-50.159 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>               | MKR | MODE | TRC              | SCL         | X        | Y              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | f |  | 2.402 003 GHz    | 3.138 dBm |  |  |  | 2 | N | f |  | 2.400 000 GHz    | -43.875 dBm |  |  |  | 3 | N | f |  | 2.390 000 GHz    | -53.252 dBm |  |  |  | 4 | N | f |  | 2.344 416 GHz    | -50.159 dBm |  |  |  | Frequency<br>Auto Tune<br>Center Freq<br>2.35700000 GHz<br>Start Freq<br>2.31000000 GHz<br>Stop Freq<br>2.40400000 GHz<br>CF Step<br>9.400000 MHz<br>Freq Offset<br>0 Hz |
|-----|--|-----|------|------------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|--|------------------|-----------|--|--|--|---|---|---|--|------------------|-------------|--|--|--|---|---|---|--|------------------|-------------|--|--|--|---|---|---|--|------------------|-------------|--|--|--|--|
| MKR | MODE   | TRC | SCL  | X                | Y           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 1   | N  | f   |      | 2.402 003 GHz    | 3.138 dBm   |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 2   | N  | f   |      | 2.400 000 GHz    | -43.875 dBm |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 3   | N  | f   |      | 2.390 000 GHz    | -53.252 dBm |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 4   | N  | f   |      | 2.344 416 GHz    | -50.159 dBm |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| HCH | <p>Agilent Spectrum Analyzer - Swept SA<br/>                 Center Freq 2.48900000 GHz<br/>                 Ref Offset 8.05 dB, Ref 20.00 dBm<br/>                 Mkr1 2.479 996 50 GHz, -2.985 dBm<br/>                 Start 2.47800 GHz, Stop 2.50000 GHz<br/>                 #Res BW 100 kHz, #VBW 300 kHz, Sweep 2.133 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.479 996 50 GHz</td><td>2.985 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-51.825 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-52.985 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.485 001 50 GHz</td><td>-38.406 dBm</td><td></td><td></td><td></td></tr> </tbody> </table> | MKR | MODE | TRC              | SCL         | X        | Y              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | f |  | 2.479 996 50 GHz | 2.985 dBm |  |  |  | 2 | N | f |  | 2.483 500 00 GHz | -51.825 dBm |  |  |  | 3 | N | f |  | 2.500 000 00 GHz | -52.985 dBm |  |  |  | 4 | N | f |  | 2.485 001 50 GHz | -38.406 dBm |  |  |  | Frequency<br>Auto Tune<br>Center Freq<br>2.48900000 GHz<br>Start Freq<br>2.47800000 GHz<br>Stop Freq<br>2.50000000 GHz<br>CF Step<br>2.200000 MHz<br>Freq Offset<br>0 Hz |
| MKR | MODE   | TRC | SCL  | X                | Y           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 1   | N  | f   |      | 2.479 996 50 GHz | 2.985 dBm   |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 2   | N  | f   |      | 2.483 500 00 GHz | -51.825 dBm |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 3   | N  | f   |      | 2.500 000 00 GHz | -52.985 dBm |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |
| 4   | N  | f   |      | 2.485 001 50 GHz | -38.406 dBm |          |                |                |                |                |   |   |   |  |                  |           |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |   |   |   |  |                  |             |  |  |  |  |


### B.7 Restrict-band band-edge measurements

| Test Mode | Test Channel | Ant  | Freq.  | Power [dBm] | Gain | Ground Factor | E [dBuV/m] | Detector | Limit [dBuV/m] | Verdi |
|-----------|--------------|------|--------|-------------|------|---------------|------------|----------|----------------|-------|
| BT LE     | 2402         | Ant1 | 2310.0 | -43.97      | 2.05 | 0             | 53.34      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2310.0 | -53.28      | 2.05 | 0             | 44.03      | AV       | 54             | PASS  |
|           |              | Ant1 | 2390.0 | -42.79      | 2.05 | 0             | 54.52      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2390.0 | -52.78      | 2.05 | 0             | 44.53      | AV       | 54             | PASS  |
|           | 2480         | Ant1 | 2483.5 | -40.81      | 2.05 | 0             | 56.5       | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2483.5 | -52.42      | 2.05 | 0             | 44.89      | AV       | 54             | PASS  |
|           |              | Ant1 | 2500.0 | -43.09      | 2.05 | 0             | 54.22      | PEAK     | 74             | PASS  |
|           |              | Ant1 | 2500.0 | -52.31      | 2.05 | 0             | 45         | AV       | 54             | PASS  |


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

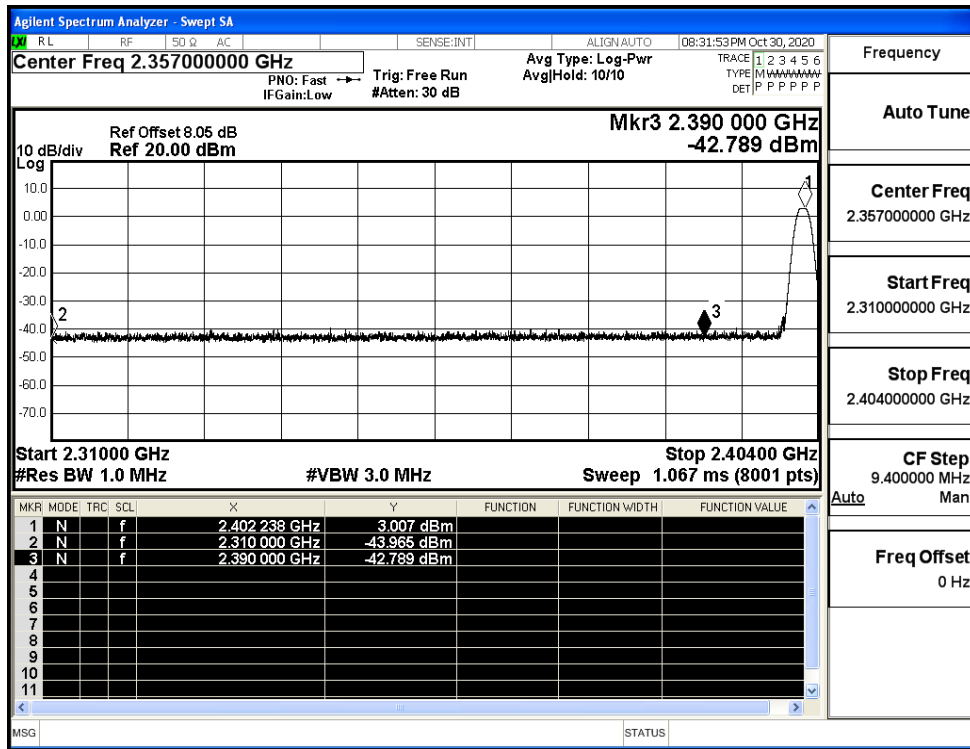

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

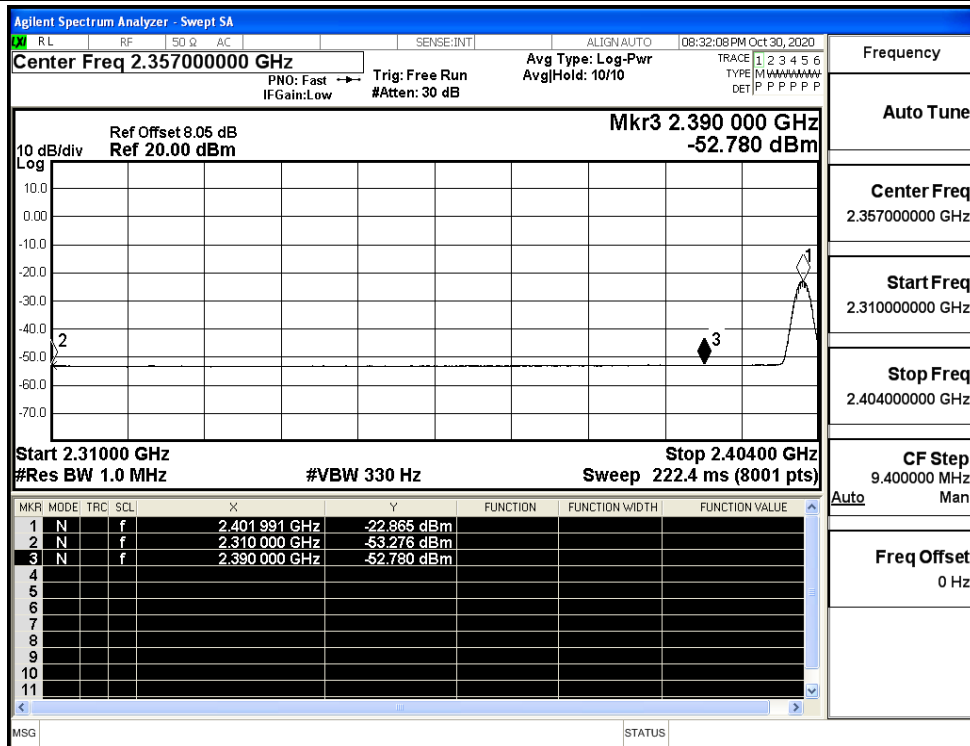

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

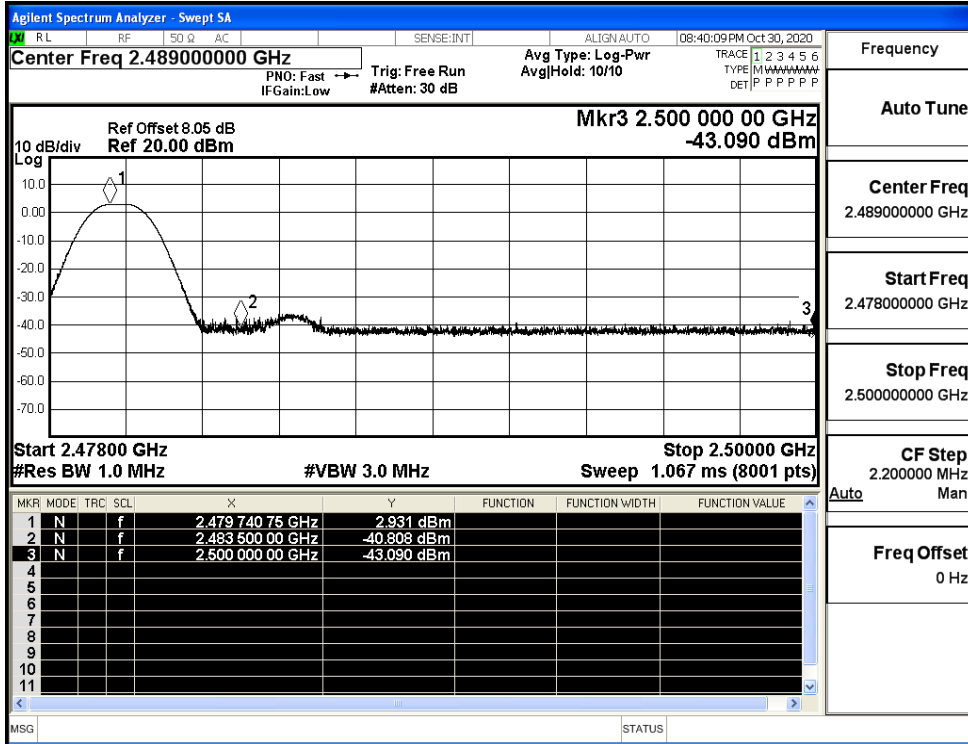

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

