

# USB+Bluetooth 2 mode Keyboard



Item: GK84/GK84S/AK84/AK84S/SK84/SK84S

GK84/AK84/SK84: USB Wired Model

GK84S/AK84S/SK84S: USB+Bluetooth Dual Model

Better for MAC

SKYLONG®

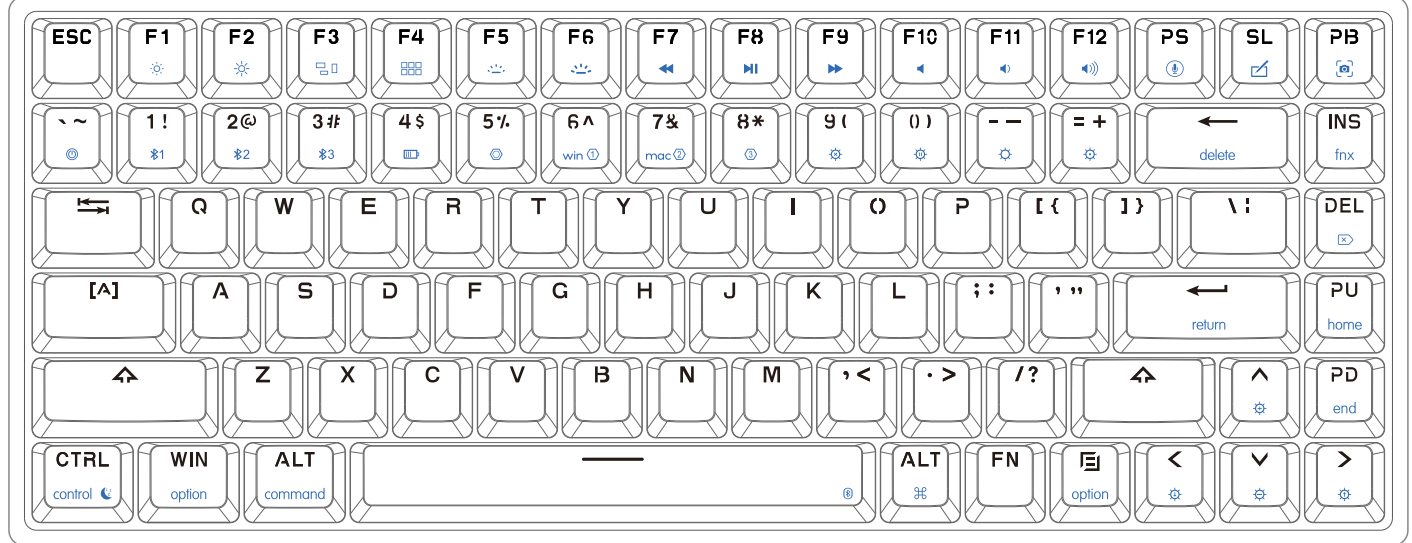

Bluetooth condition: #1, #2, #3 one of blue led is flashing, the keyboard is connecting the BT equipment.  
fn tips: fn+space ON/OFF the BT mode, link to USB mode.

\* Symbol in PBT Keycap is for reference, please subject to the real keyboard, press fn with function keys.

## fn function description (Double-click FN to light FN's white LED, FN function is held, click FN again to escape from holding status).

### Define mode

Key	Function
Standard mode	Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended. (Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + " x " function can be also modified, except the backlight, bluetooth and system: control. The FN button can not be moved, but user can define your own FN1/FN2/FN3 at any key on the keyboard in the custom mode).
FN + 5% Driver mode	FN + 5% is the driver mode layer. " 5% " lights white LED, some special function ( For example: You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer ) and backlights can be set in this mode. You must keep the driver running and the keyboard connect with the driver. Press FN + 5% again, back to standard mode.
FN + 6^ Onboard mode1 Layer1 / Fn1 WIN mode	FN + 6^, onboard mode layer 1. " 6^ " lights white LED, no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard. The reference setting: WIN mode setting to realize the habitual operation of win users
FN + 7& Onboard mode2 Layer2 / Fn2 MAC OS mode	FN + 7&, onboard mode layer 2. " 7& " lights white LED. The reference Setting: keyboard of MAC OS, the "control.option.command" key will be in the original position, user can modify the Settings by the driver, download and save to the keyboard, no need to run and connect the driver when use the Mac's function settings. Press FN + 7& again, back to the standard mode.
FN + 8* Onboard mode3 Layer3 / Fn3	FN + 8*, onboard mode layer 3. " 8* " lights white LED. The reference Setting: Some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the key FN3 in layer1&layer2. All Settings in this mode can be modified and saved to the keyboard. Press FN+8* again, back to the standard mode.

### Backlight settings (Can not modify )

Key	Function
FN + 0)	Light effect pause/play
FN + 9(	Backlight ON/OFF
FN + ~	Backlight mode 1-5 (Can modify)
FN + =+	Backlight mode 6-9
FN + ↓	Backlight brightness -
FN + ↑	Backlight brightness +
FN + ←	Backlight Effect Speed -
FN + →	Backlight Effect Speed +

### Bluetooth settings (Only for bluetooth mode, can not modify)

Key	Function
FN + Space	Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + !1	Long press: The red&green LED of 11 keycap will flash. The #1 bluetooth equipment can be paired. Press: The keyboard will connect the #1 BT equipment or disconnect.
FN + 2@	Long press: The red&green LED of 2@keycap will flash. The #2 bluetooth equipment can be paired. Press: The keyboard will connect the #2 BT equipment or disconnect.
FN + 3#	Long press: The red&green LED of 3# keycap will flash. The #3 bluetooth equipment can be paired. Press: The keyboard will connect the #3 BT equipment or disconnect.

Note: If the Bluetooth pairing timed out or failed, please re-pair. If the bluetooth pairing is successful on the equipment, but the keyboard cannot work still, Please delete this keyboard in the Bluetooth list, Turn off bluetooth of your PC or Mobile, restart the keyboard, and re-pair.

### System Control (Cannot modify)

FN + @	Mechanical dual model series long press for 3 seconds to on/off the keyboard.
⊙	Long press the ⊙ label at the bottom of the Optical dual model keyboard for 3 seconds to turn on/off keyboard, wired version doesn't have this function.
FN + 4\$	Turn off/on the charging indicator, low voltage alarm, the wired version does not have this function.
FN + control	Keyboard's sleep time setting, white LED on: never sleep. 1:5minutes, 2:10minutes.....9:45minutes to sleep.

### Fn function (Reference Settings, can be modified by driver)

Key	Mac mode function	Win mode function
F1	Screen brightness - for Mac	F1
F2	Screen brightness + for Mac	F2
F3	□ for Mac	F3
F4	⌘ for Mac	F4
F5	Screen brightness - for Mac	F5
F6	Screen brightness + for Mac	F6
F7	◀ Previous	F7
F8	⏮ Play/Pause	F8
F9	▶ Next	F9
F10	⏸ Mute	F10
F11	◀ Volume -	F11
F12	▶ Volume +	F12
F13 (PS)	ⓞ One click call Siri for Mac	PS
F14 (SL)	✍ One click call handwriting for Mac	SL
F15 (PB)	📷 Screenshot for Mac	PB
FN + pgup	home	home
FN + pgdn	end	end
FN + Win	🔒 Lock/Unlock Win key	🔒 Lock/Unlock Win key

Dongguan Jizhi Electronic Technology Co., Ltd.

## Federal Communications Commission Notice

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.