


USB+Bluetooth 2 mode Keyboard

Item: SK61S

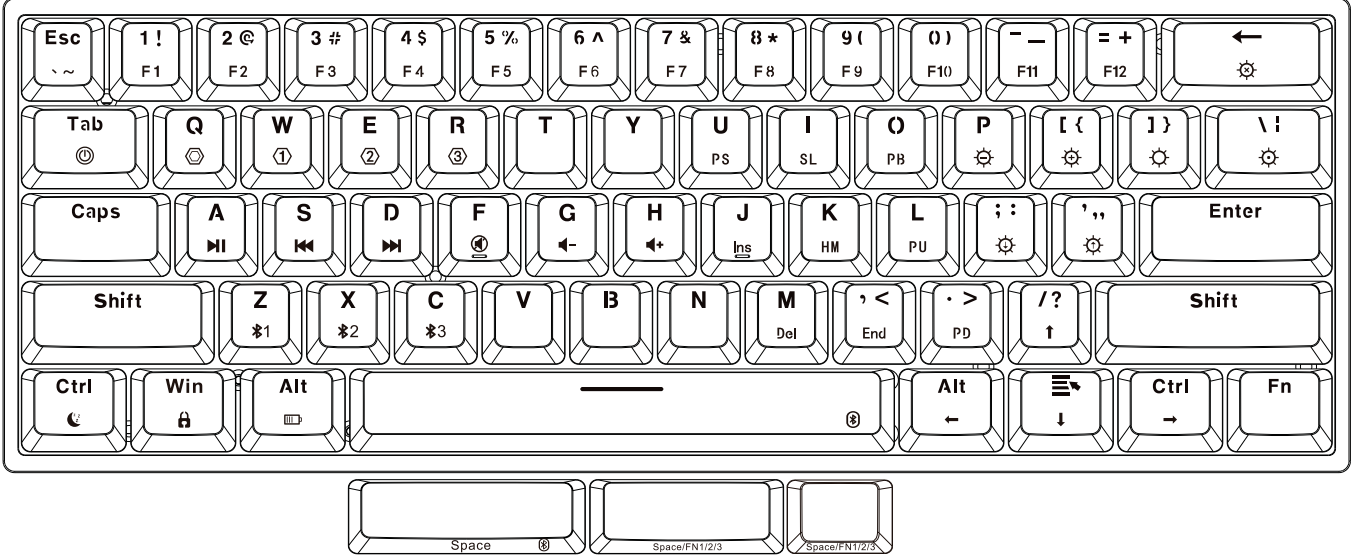

★ NOTE: Press Fn with the function keys.

★ One of the blue LED is flashing, The keyboard is connecting the BT equipment. + Bluetooth ON/OFF switch, Link to USB mode.

FN function description (Double-click FN to light FN's white LED, FN function is held, click FN again to escape from holding status).

Backlight settings (Can not modify)

Key	Function
FN +	Backlight ON/OFF
FN + P	Backlight brightness -
FN + {	Backlight brightness +
FN +]	Backlight mode 1-5 (Can modify)
FN + \	Backlight mode 6-9
FN + :	Backlight Effect Speed -
FN + *	Backlight Effect Speed +

BT&System settings (BT model only, can not modify)

Key	Function
FN + Space	Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + Z	Long press: The red&green LED of Z keycap will flash. The #1 Bluetooth equipment can be paired. Press: The keyboard will connect the #1 BT equipment or disconnect.
FN + X	Long press: The red&green LED of X keycap will flash. The #2 Bluetooth equipment can be paired. Press: The keyboard will connect the #2 BT equipment or disconnect.
FN + C	Long press: The red&green LED of C keycap will flash. The #3 Bluetooth equipment can be paired. Press: The keyboard will connect the #3 BT equipment or disconnect.
Note: If the bluetooth pairing is timed out or failed, please re-pair. If the bluetooth pairing is successful on the equipment, but the keyboard can not work still, please delete the keyboard in the bluetooth list of the equipment and pair again.	
FN + Tab	GK BT model series long press for 3 seconds to on/off the keyboard
	SK BT model series long press the key in the label under the keyboard for 3 seconds to on/off the keyboard
FN + Win	Clock/Unlock Win key
FN + L - Alt	Low voltage&charging status indicator Logo LED&back side LED
FN + L - Ctrl	Keyboard's sleep time setting, white LED on/never sleep, 1:5minutes, 2:10minutes,.....9:45minutes to sleep.

FN + function (Standard mode settings)

Key	Function	Key	Function
FN + 1	F1	FN + 7	F7
FN + 2	F2	FN + 8	F8
FN + 3	F3	FN + 9	F9
FN + 4	F4	FN + 0	F10
FN + 5	F5	FN + -	F11
FN + 6	F6	FN + +	F12
FN + U	PS	FN + J	Ins
FN + I	SL	FN + K	HM
FN + O	PB	FN + L	PU
FN + <	End	FN + M	Del
FN + >	PD	FN + Esc	⌵
FN + Shift + Esc	~		

Arrow key (Standard mode settings)

Key	Function	Key	Function
FN + Menu	↓	FN + ?	↑
FN + R - Alt	←	FN + R - Ctrl	→

Media key (Standard mode settings)

Key	Function	Key	Function
FN + A	⏮ Play/Pause	FN + F	🔇 Mute
FN + S	⏪ Previous	FN + G	🔊 Volume-
FN + D	⏩ Next	FN + H	🔊 Volume+

Define mode

Key	Function
Standard mode	Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended. (Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + " x " function can be also modified except the backlight, bluetooth and system control. The FN button can not be moved, but user can define your own FN1/FN2/FN3 at any key on the keyboard in the custom mode).
FN + Q Driver mode	FN + Q is the driver mode layer. " Q " lights white LED, some special function (For example: You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer) and backlights can be set in this mode. You must keep the driver running and the keyboard connect with the driver, Press FN + Q again, back to standard mode.
FN + W Onboard mode Layer1 / Fn1	FN + W, onboard mode layer 1. " W " lights white LED, no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard. The reference Setting: the multifunctional reuse Settings of the space bar, click for the regular space function, Space + other key combination to achieve the onboard mode layer3 call function. Press FN + W again, back to the standard mode.
FN + E Onboard mode2 Layer2 / Fn2 MAC OS mode	FN + E, onboard mode layer 2. " E " lights white LED. The reference Setting: keyboard of MAC OS, the "control option, command " key will be in the original position, user can modify the Settings by the driver; download and save to the keyboard, no need to run and connect the driver when use the Mac's function settings. Press FN + E again, back to the standard mode.
FN + R Onboard mode3 Layer3 / Fn3	FN + R, onboard mode layer 3. " R " lights white LED. The reference Setting: Some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the key FN3 in layer1. Press FN + R again, back to the standard mode.

More function and LED backlight settings, please download or update the driver from the following website: <http://www.jikeingzhi.com/downloadlist?driverID=41>

Dongguan Jizhi Electronic Technology Co., Ltd.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any Changes expressly or modifications not approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.