


AUT Report

Product Model: Archer R5

Manufacturer: BIG FIELD GLOBAL PTE. LTD

Test Date: 2023.08.17

Tested By: Yu Sunli 



BIG FIELD GLOBAL PTE. LTD.
7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987,

Index

1. Antenna Distribution	3
2. Electrical Characteristics	4
3. Gain and Radiation Pattern	5
3.1 Measurement Procedure	5
3.2 Test Setup	6
3.3 S Parameter Test Data	7
3.4 Antenna Peak Gain	9
3.5 Antenna Radiation Pattern.....	9

1. Antenna Distribution

Archer R5

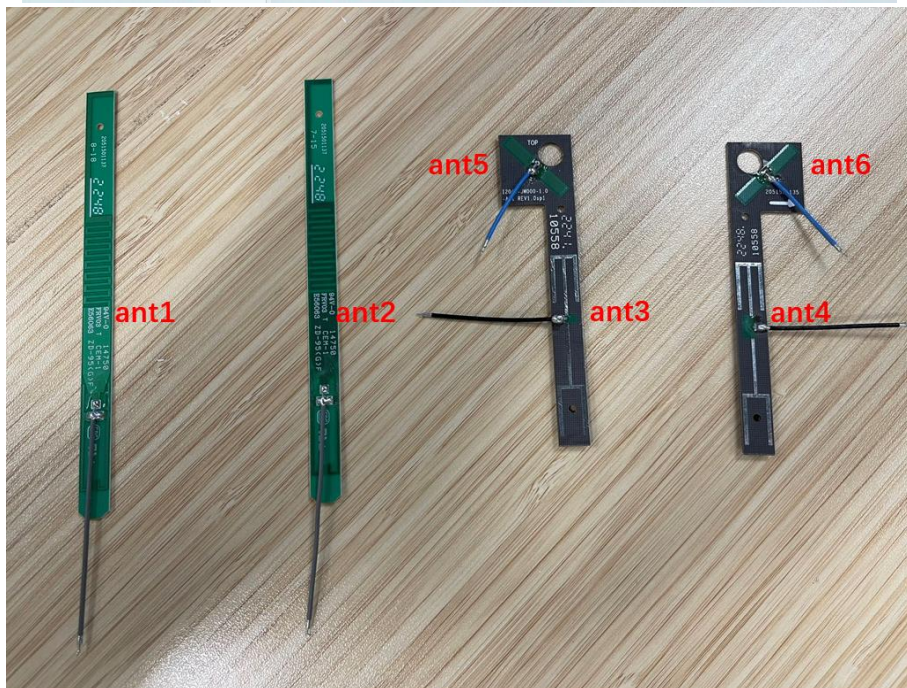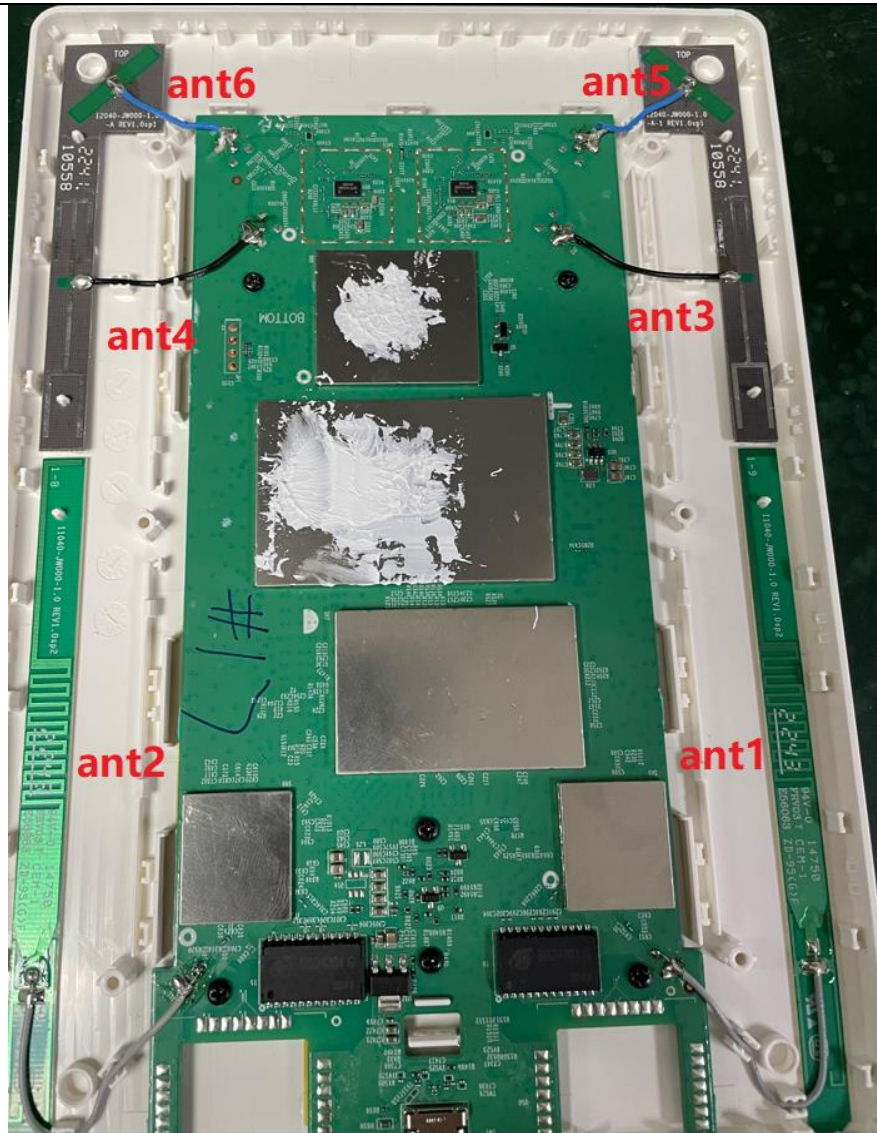

2. Electrical Characteristics

Ant1	
Frequency	2400~2500MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.00dBi@2400~2500MHz
Radiation pattern	Omni-Directional
P/N	3101505749

Ant2	
Frequency	2400~2500MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.00dBi@2400~2500MHz
Radiation pattern	Omni-Directional
P/N	3101505749

Ant3	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.50dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101505751

Ant4	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.50dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101505750

Ant5	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.50dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101505751

Ant6	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.50dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101505750

3. Gain and Radiation Pattern

3.1 Measurement Procedure

This measurement experiment adopted an antenna near-field measurement system, and the diagram of the measurement system was shown in Figure 3-1. The excitation signal was generated by the Keysight E5071C (300kHz-20GHz). Under the control of the central computer, the probe rotated in the θ direction, and the EUT rotated in the ϕ direction with the turntable. The probe sampling frame received and collected signals in the near-field range of the EUT. The software system which was controlled by the central computer completed the processing, output and display of the test data.

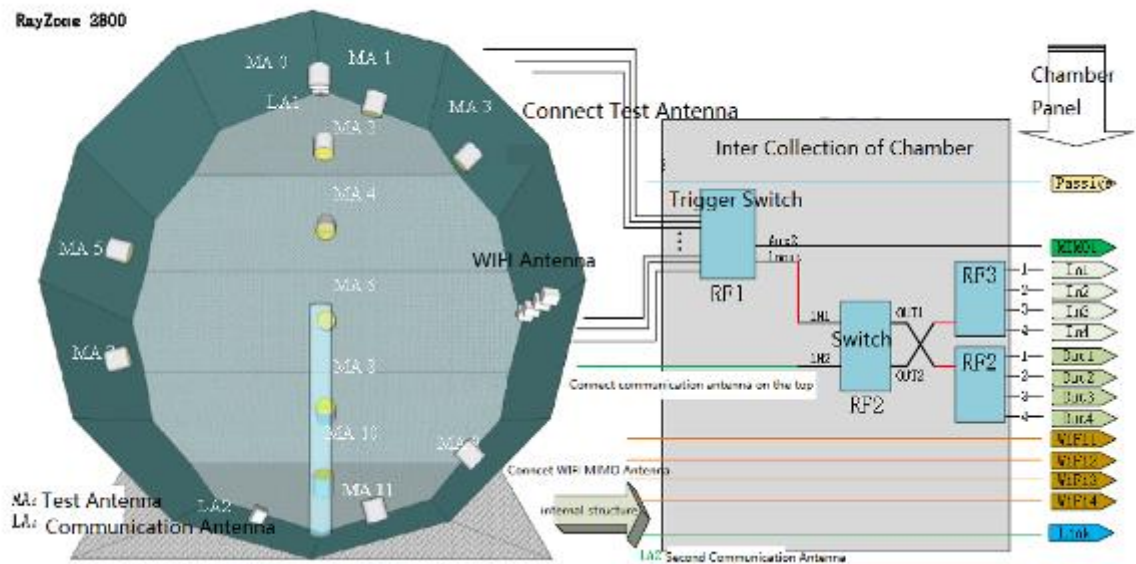


Figure 3-1

The test site was a full anechoic chamber with a size of 3.0m×3.1m×2.97m, which was built by GTS Rayzone2800. All six surfaces of the anechoic chamber were pasted with absorbing materials. And the chamber was calibrated by the authoritative third-party lab every year. The antenna anechoic chamber measurement system adopted a 13-probe multi-probe system. The probe antennas were evenly distributed on the spherical surface surrounding the EUT, and their operating frequency was 600MHz~8.5GHz.

During the measurement, the probe antennas were rotated in the θ direction under the control of the probe holder to sample the near-field data at the θ angle. At the same time, the EUT rotated with the turntable in the ϕ direction to sample the near field data at the ϕ angle. The sampling accuracy was 15°. The system diagram was shown in Figure 3-2. From the sampling results, the EUT's near-field test data of θ component, ϕ component and total component could be obtained.

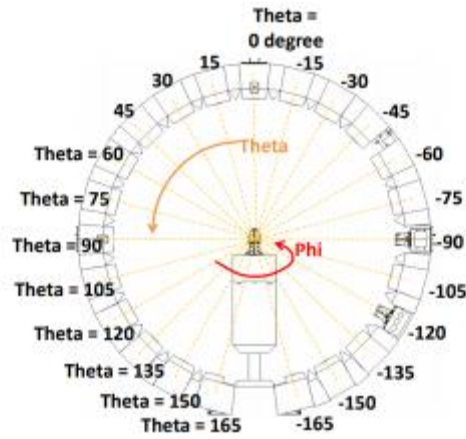


Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY5347043 5	12months	2024/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2024/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

3.2 Test Setup

The test setup was shown in Figure 3-3, 3-4:



Figure 3-3




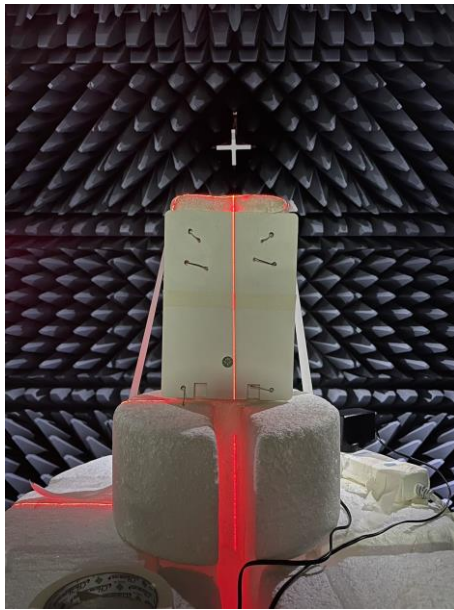


Figure 3-4


3.3 S Parameter Test Data

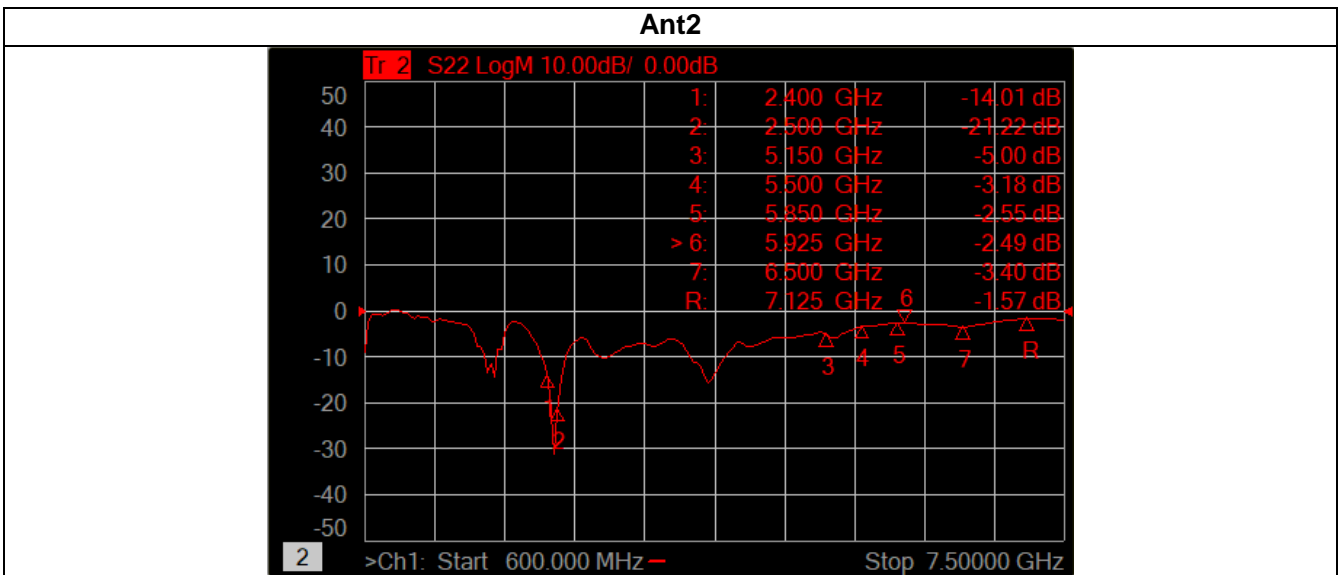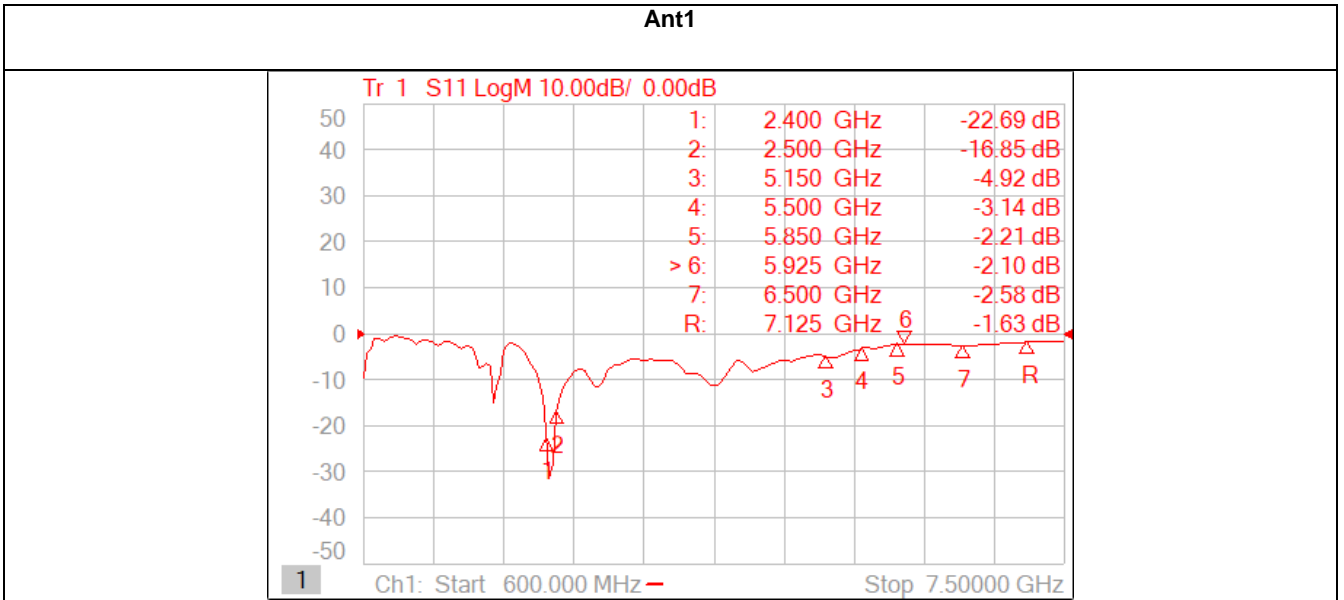


Ant3

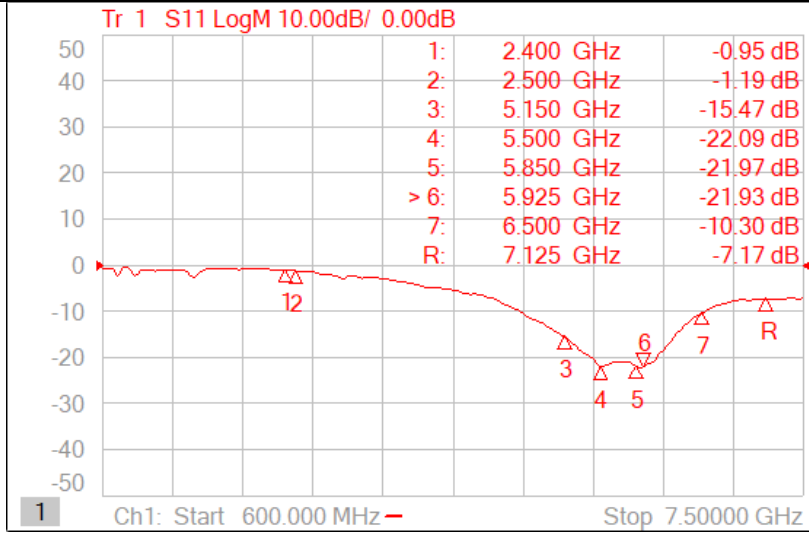


Ant4

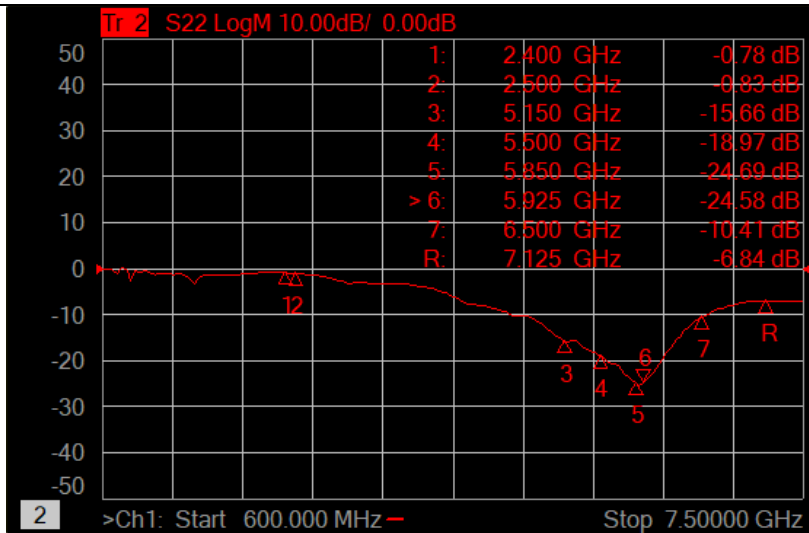

Ant5

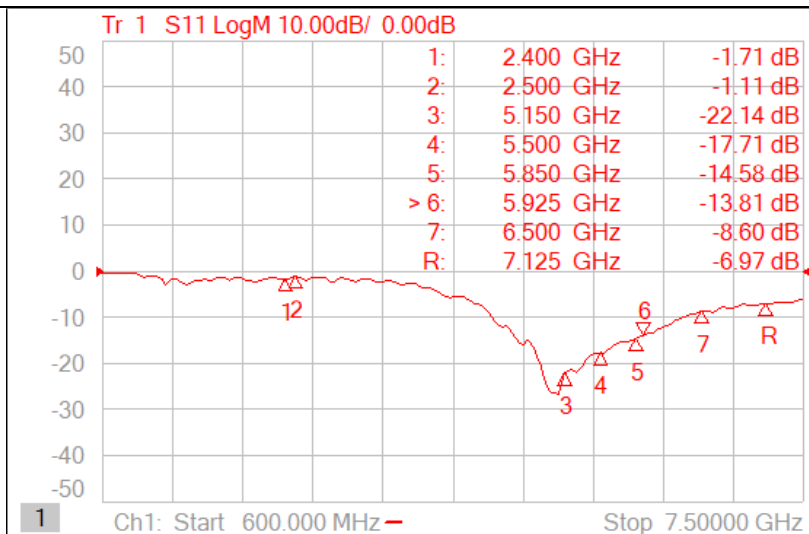

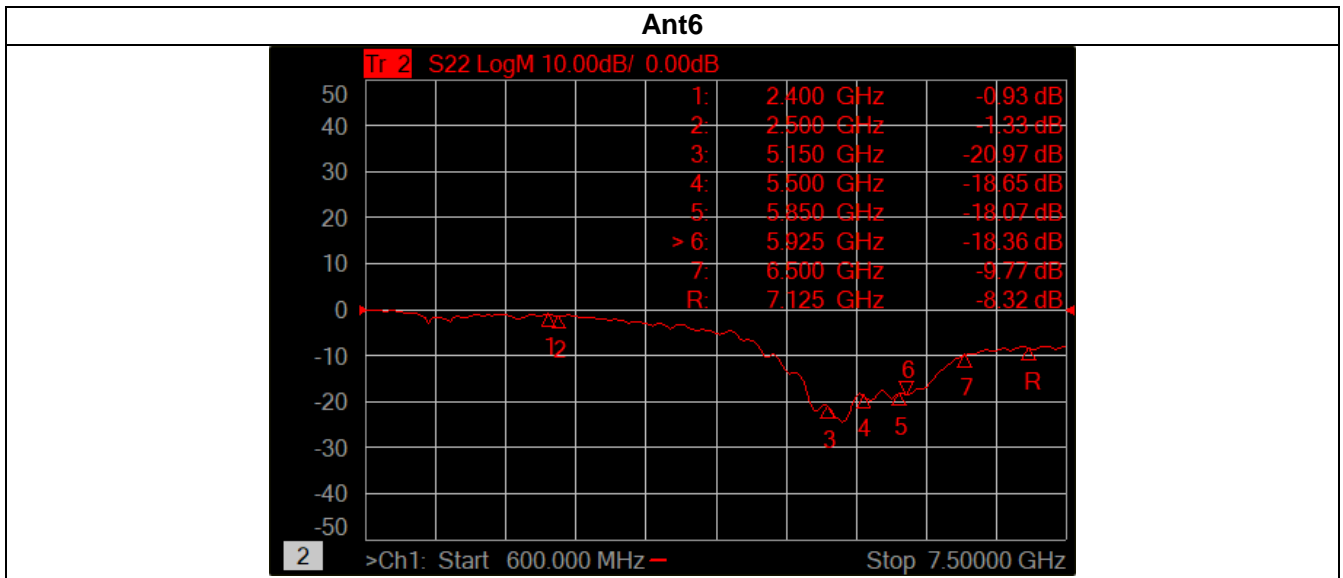

3.4 Antenna Peak Gain





Frequency(GHz)	2.45	2.48	2.50
Ant1 MaxGain(dBi)	1.76	2.00	1.92
Ant2 MaxGain(dBi)	1.60	1.80	2.00
Ant1 Polarization/ Φ ($^\circ$)/ θ ($^\circ$)	Theta/165/105	Theta/165/105	Theta/165/105
Ant2 Polarization/ Φ ($^\circ$)/ θ ($^\circ$)	Theta/240/120	Theta/15/105	Theta/15/105
Max Gain(dBi)	1.76	2.0	2.00

Frequency(GHz)	5.25	5.35	5.60	5.85
Ant3 MaxGain(dBi)	1.25	1.62	2.35	2.50
Ant4 MaxGain(dBi)	1.27	1.66	2.50	2.41
Ant3 Polarization/ Φ ($^\circ$)/ θ ($^\circ$)	Theta/105/90	Theta/285/90	Theta/270/90	Theta/90/90
Ant4 Polarization/ Φ ($^\circ$)/ θ ($^\circ$)	Theta/270/105	Theta/270/90	Theta/270/90	Theta/75/90
Max Gain(dBi)	1.27	1.66	2.50	2.50



Frequency(GHz)	5.20	5.35	5.45	5.80
Ant5 MaxGain(dBi)	2.05	1.09	2.15	2.50
Ant6 MaxGain(dBi)	1.19	1.56	2.50	1.82
Ant5 Polarization/ Φ ($^\circ$)/ θ ($^\circ$)	Theta/270/105	Theta/255/45	Theta/270/45	Theta/270/60
Ant6 Polarization/ Φ ($^\circ$)/ θ ($^\circ$)	Theta/270/105	Theta/270/45	Theta/270/45	Theta/0/60
Max Gain(dBi)	2.05	1.56	2.50	2.50

3.5 Antenna Radiation Pattern

Ant1

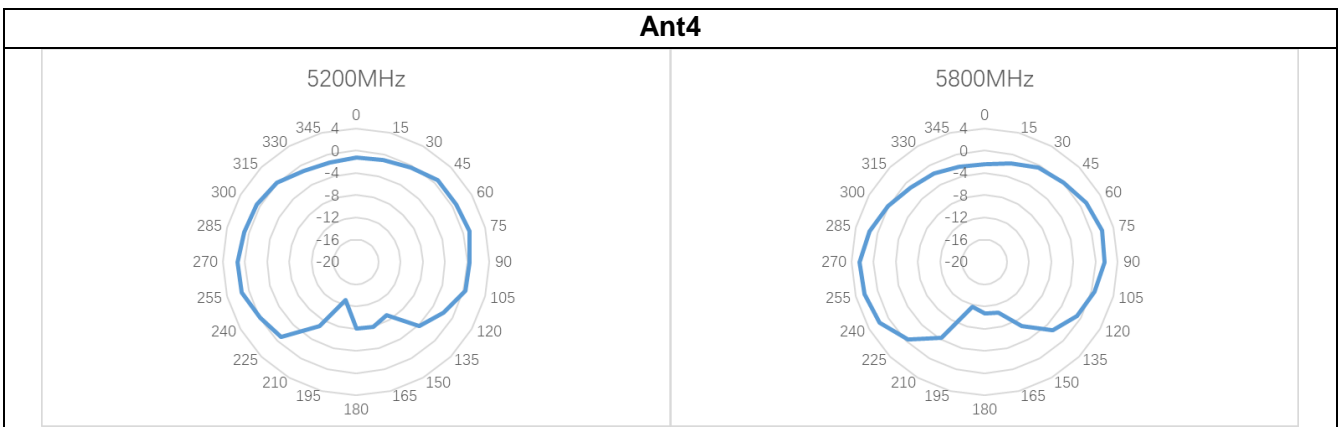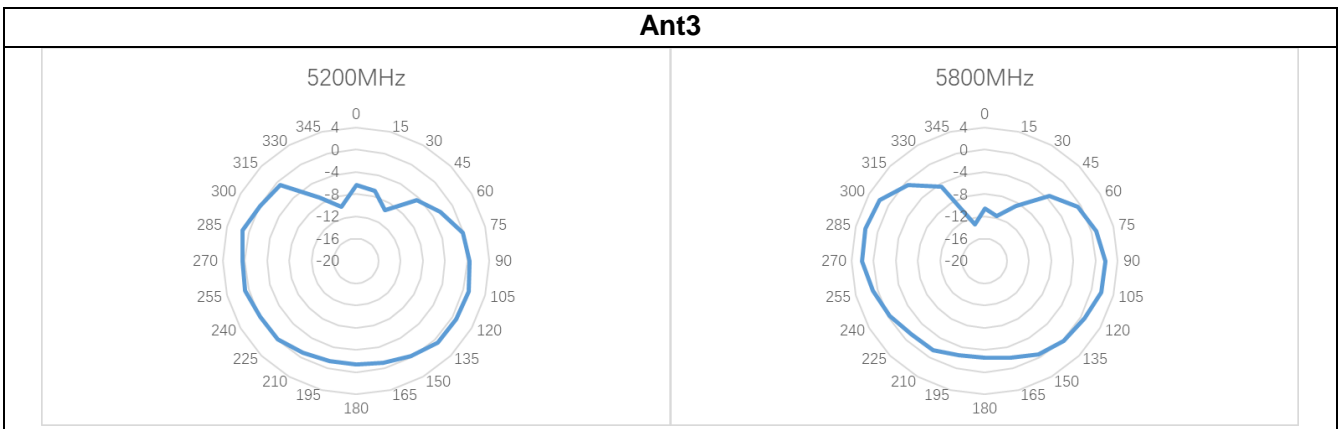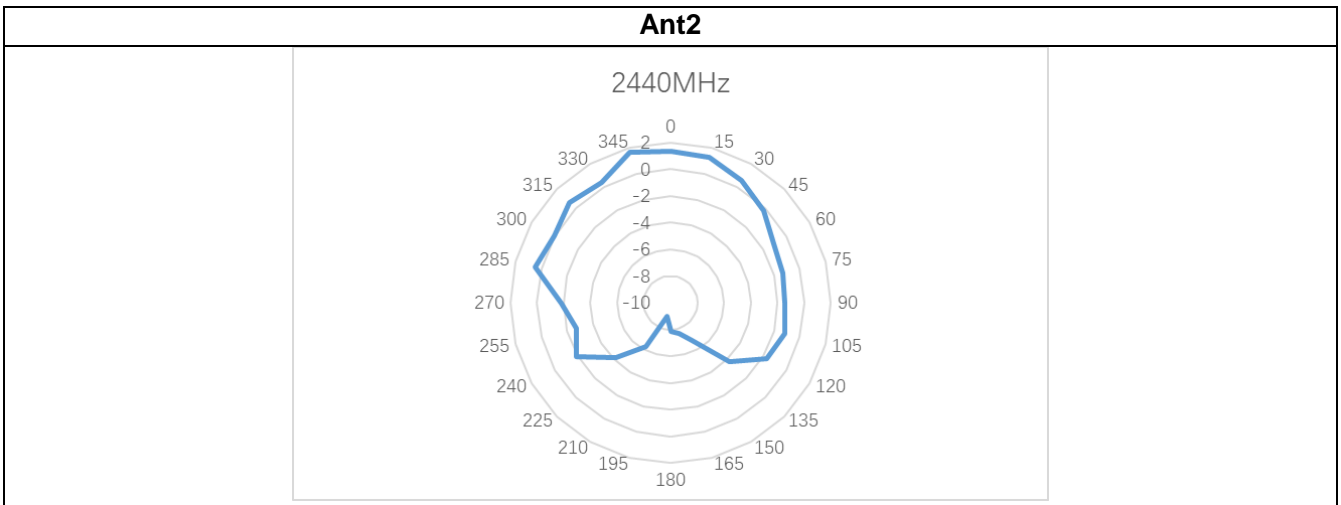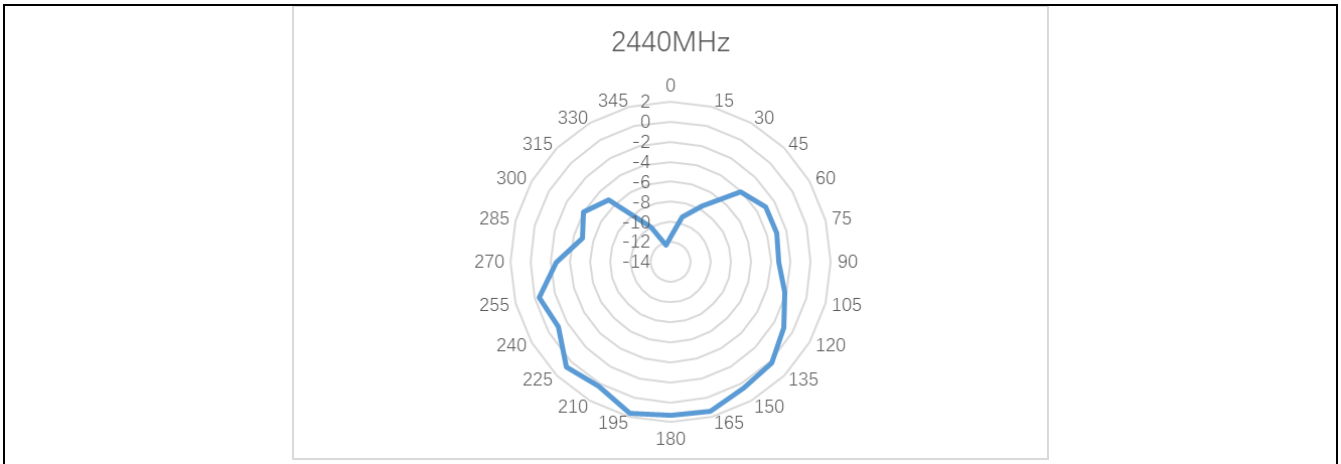

Ant5

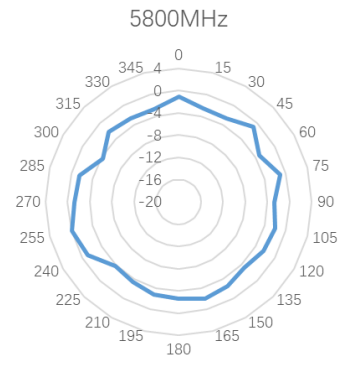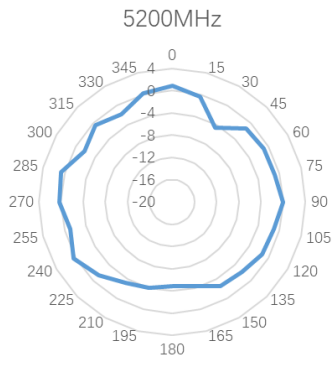

Ant6

