



8802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

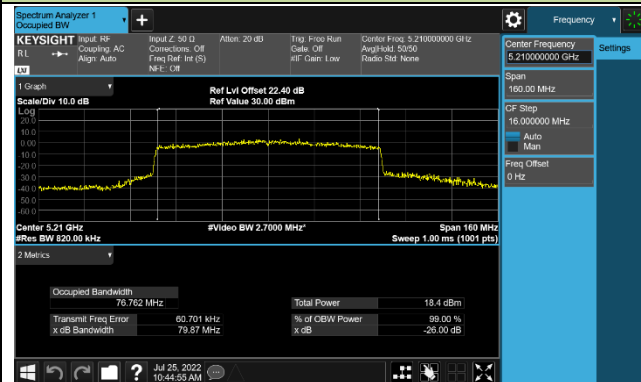


Channel 58 (5290MHz)

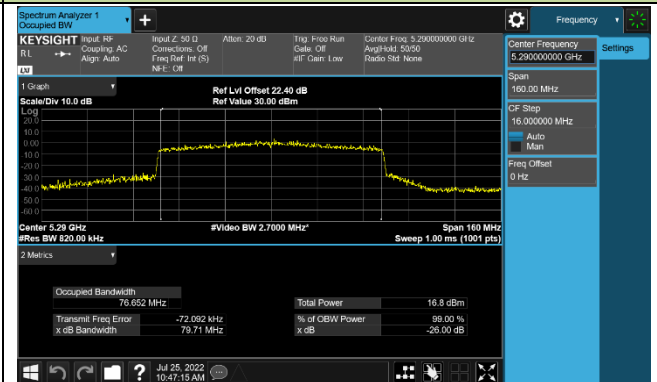


Channel 106 (5530MHz)

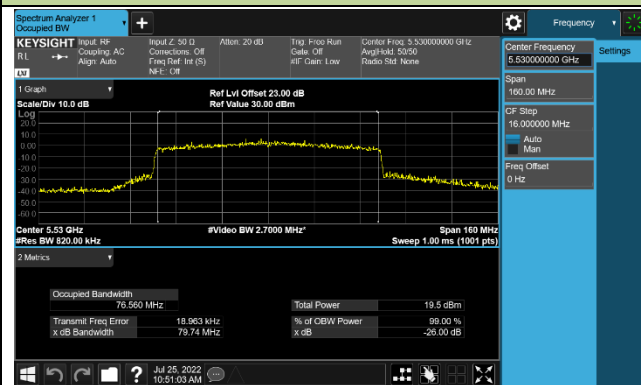


Channel 122 (5610MHz)

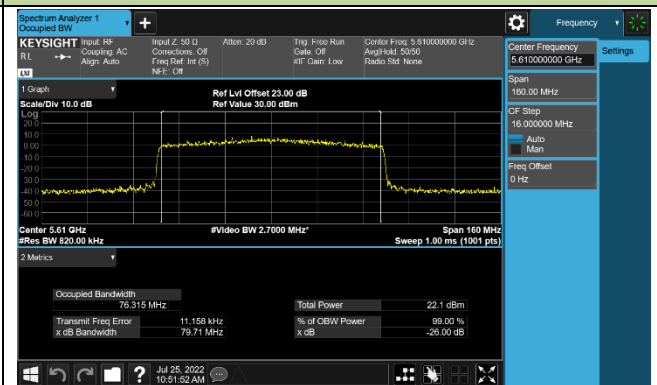

Channel 138 (5690MHz)

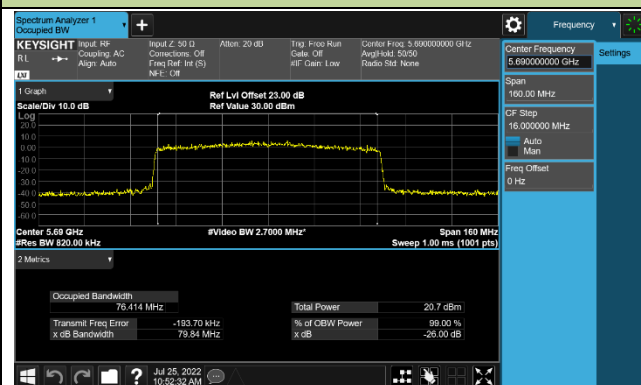


Channel 155 (5775MHz)

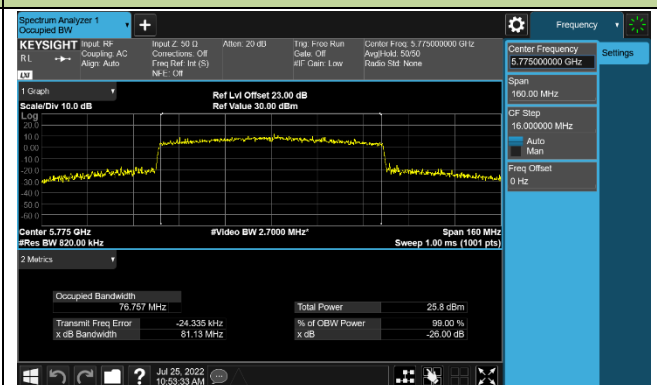


802.11ax-HE160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

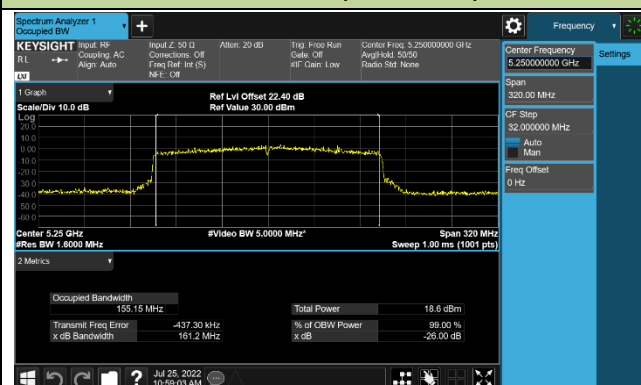

Channel 114 (5570MHz)

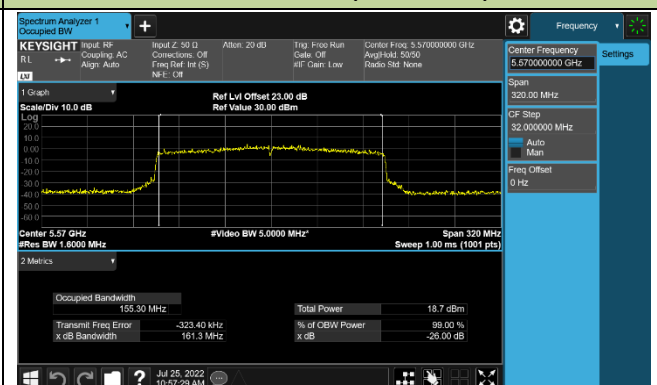

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01- Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

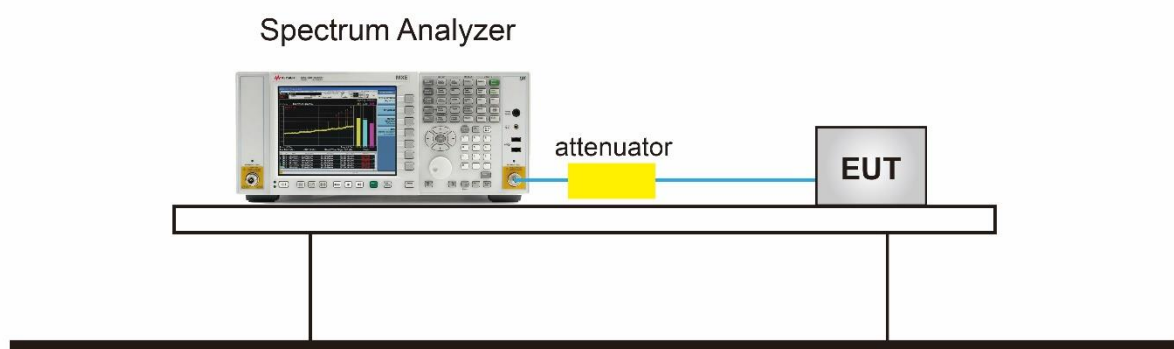


7.3.5.TestResult

Product	AX6000 8-Stream Wi-Fi 6 Router	Test Engineer	Jay
Test Site	SR5	Test Date	2022/7/25


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0						
802.11a	6Mbps	149	5745	14.03	≥ 0.5	Pass
802.11a	6Mbps	157	5785	14.51	≥ 0.5	Pass
802.11a	6Mbps	165	5825	15.42	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	15.96	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	13.18	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.55	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	30.15	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	31.35	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	73.86	≥ 0.5	Pass
802.11ax-HE20	MCS0	149	5745	15.08	≥ 0.5	Pass
802.11ax-HE20	MCS0	157	5785	18.12	≥ 0.5	Pass
802.11ax-HE20	MCS0	165	5825	17.27	≥ 0.5	Pass
802.11ax-HE40	MCS0	151	5755	31.31	≥ 0.5	Pass
802.11ax-HE40	MCS0	159	5795	31.34	≥ 0.5	Pass
802.11ax-HE80	MCS0	155	5775	73.87	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

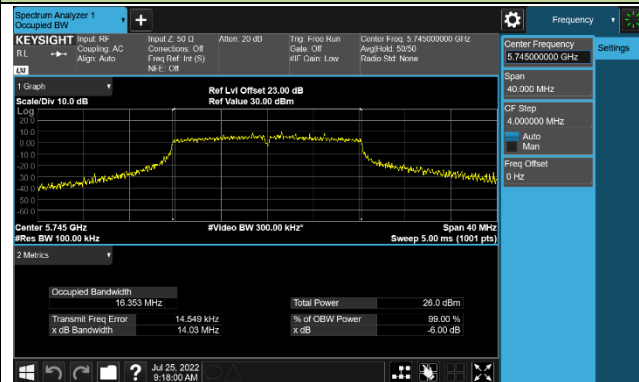

Channel 157 (5785MHz)

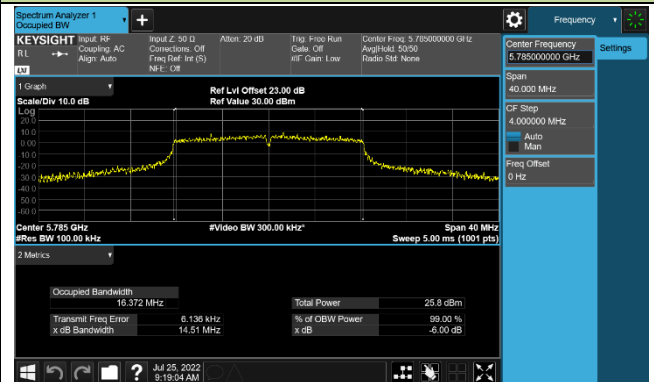


Channel 165 (5825MHz)

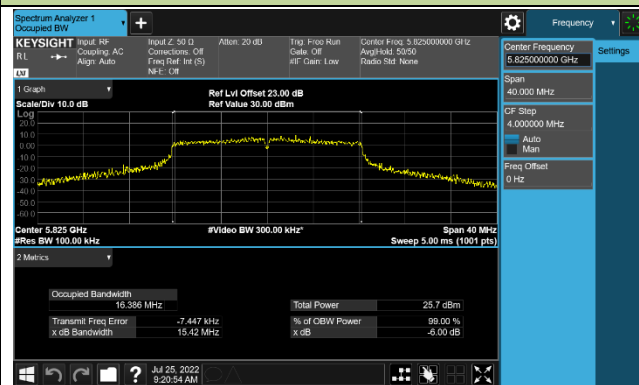


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

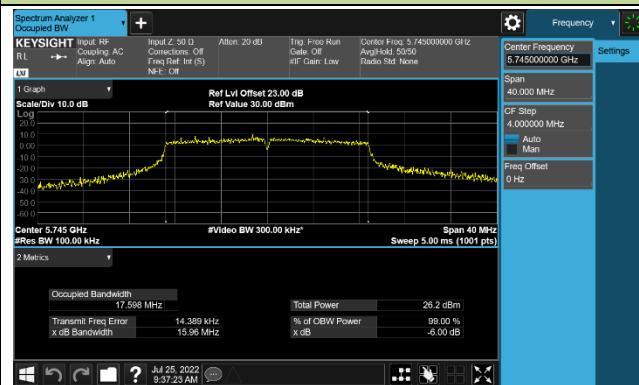

Channel 157 (5785MHz)

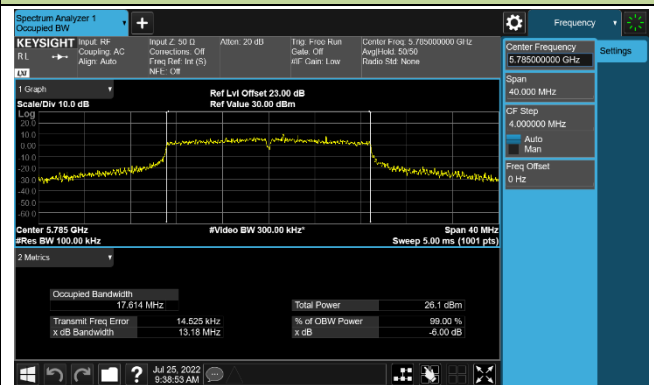


Channel 165 (5825MHz)

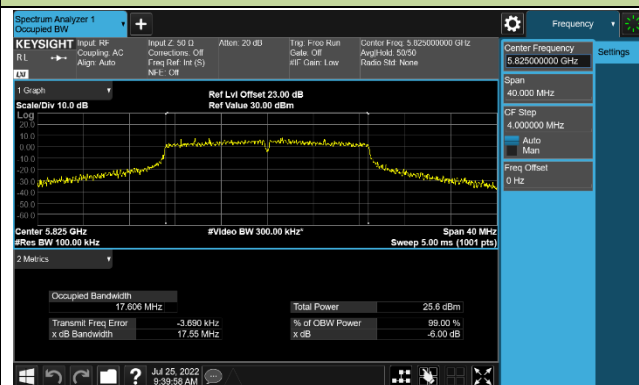


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

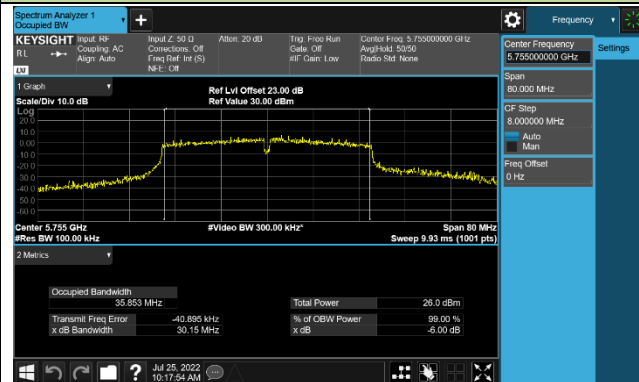


Channel 159 (5795MHz)

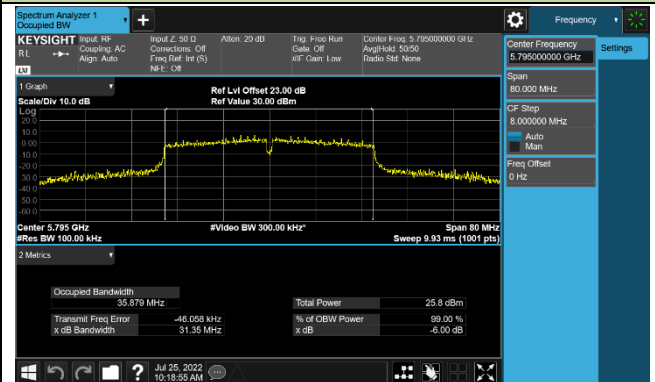


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

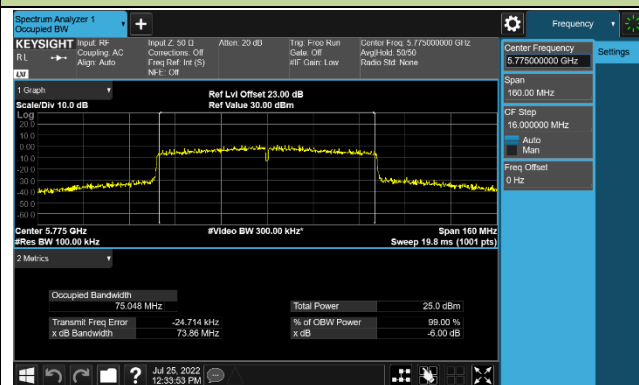


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

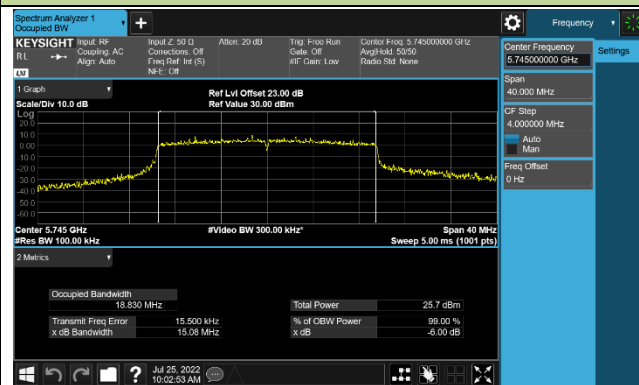

Channel 157 (5785MHz)

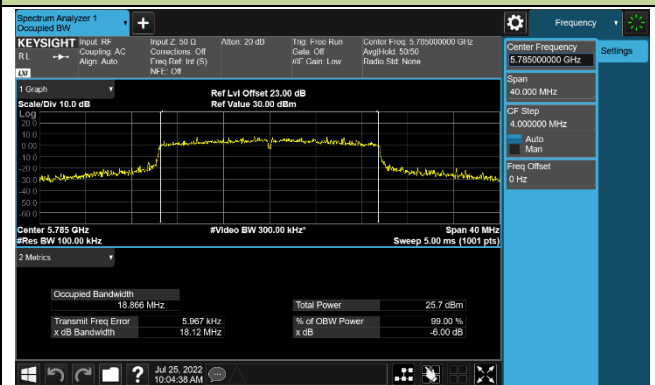


Channel 165 (5825MHz)

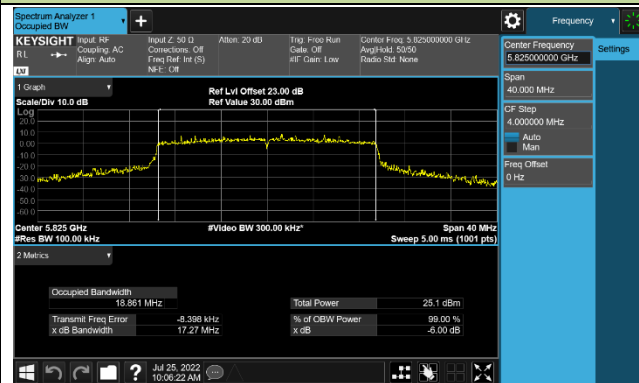


802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

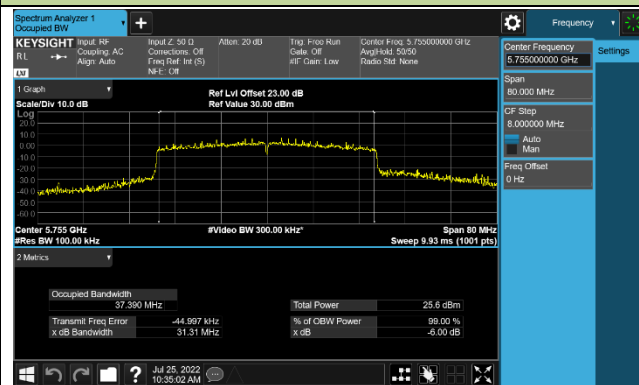


Channel 159 (5795MHz)

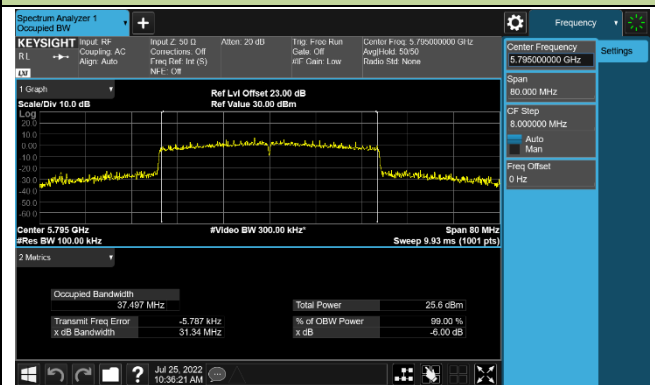

802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

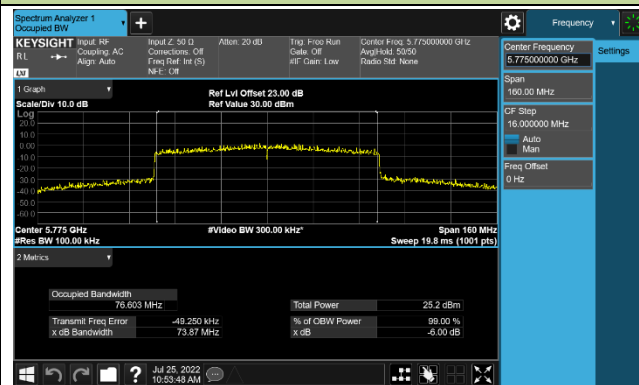

7.4. Output Power Measurement

7.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033D02v02r01- Section E)3)b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.4.4. Test Setup

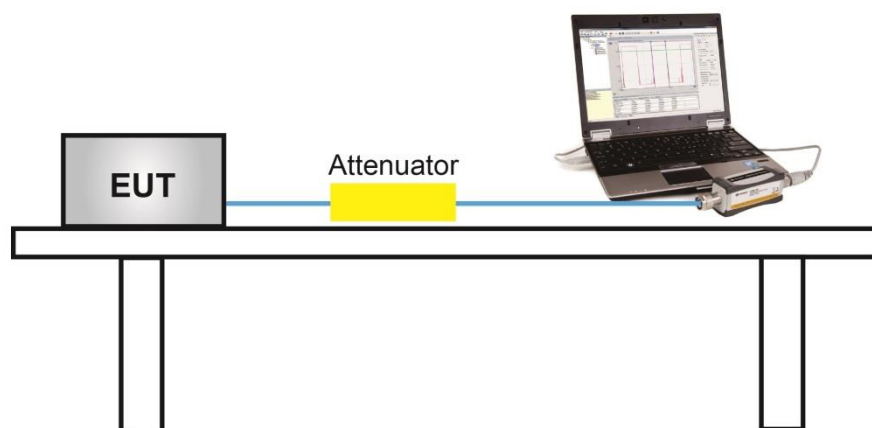

7.4.5. Test Result

Product	AX6000 8-Stream Wi-Fi 6 Router	Test Engineer	Jay
Test Site	SR5	Test Date	2022/7/7~2022/7/28
Test Mode	CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	19.24	19.17	18.92	18.74	25.04	≤ 30.00	Pass
11a	6Mbps	44	5220	19.36	19.22	19.15	18.77	25.15	≤ 30.00	Pass
11a	6Mbps	48	5240	18.73	17.93	18.60	18.11	24.38	≤ 30.00	Pass
11a	6Mbps	52	5260	11.84	12.38	12.16	12.60	18.27	≤ 23.98	Pass
11a	6Mbps	60	5300	12.29	11.80	12.42	12.43	18.26	≤ 23.98	Pass
11a	6Mbps	64	5320	12.56	12.40	12.43	12.25	18.43	≤ 23.98	Pass
11a	6Mbps	100	5500	12.90	11.65	12.58	12.13	18.36	≤ 23.98	Pass
11a	6Mbps	116	5580	13.20	12.30	12.70	12.48	18.70	≤ 23.98	Pass
11a	6Mbps	140	5700	11.73	11.67	12.39	12.06	17.99	≤ 23.98	Pass
11a	6Mbps	144	5720	11.15	11.88	11.94	11.65	17.69	≤ 22.80	Pass
11a	6Mbps	149	5745	23.19	24.05	23.51	23.60	29.62	≤ 30.00	Pass
11a	6Mbps	157	5785	23.12	23.88	23.65	23.48	29.56	≤ 30.00	Pass
11a	6Mbps	165	5825	23.49	23.73	23.60	23.66	29.64	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	19.16	19.18	18.84	18.46	24.94	≤ 30.00	Pass
11ac-VHT20	MCS0	40	5220	19.30	19.00	19.05	18.70	25.04	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	19.01	19.26	19.11	18.62	25.03	≤ 30.00	Pass
11ac-VHT20	MCS0	52	5260	13.06	12.65	12.88	13.03	18.93	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	13.20	12.98	13.01	12.89	19.04	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	13.16	12.85	12.99	12.82	18.98	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	12.38	11.94	12.58	12.35	18.34	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	12.40	11.88	12.79	12.37	18.39	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	12.84	12.99	12.92	12.83	18.92	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	11.56	11.31	12.13	11.92	17.76	≤ 22.81	Pass
11ac-VHT20	MCS0	149	5745	23.63	24.12	23.88	23.82	29.89	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	23.48	24.20	23.98	23.90	29.92	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	23.22	23.85	23.58	23.75	29.63	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT40	MCS0	38	5190	19.78	19.65	19.45	19.13	25.53	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	20.67	21.54	21.33	20.82	27.13	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	15.92	15.83	15.62	15.68	21.78	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	15.38	15.23	15.26	15.14	21.27	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	15.69	15.17	15.20	14.80	21.25	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	14.94	15.23	15.28	15.05	21.15	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	15.07	14.95	14.76	14.50	20.85	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	15.11	15.37	15.13	14.84	21.14	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	23.74	23.49	23.73	23.58	29.66	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	23.68	24.35	23.59	23.80	29.89	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	16.66	16.73	16.40	16.20	22.52	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	15.72	15.19	15.10	15.55	21.42	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	16.80	17.11	16.98	17.15	23.03	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	17.92	17.84	18.26	17.33	23.87	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.52	17.72	17.74	17.38	23.61	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	23.58	23.81	23.12	23.34	29.49	≤ 30.00	Pass
11ac-VHT160	MCS0	50	5250	15.32	15.56	15.33	15.03	21.33	≤ 23.98	Pass
11ac-VHT160	MCS0	114	5570	15.66	15.13	15.42	15.00	21.33	≤ 23.98	Pass
11ax-HE20	MCS0	36	5180	18.71	18.56	18.54	18.16	24.52	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	18.46	18.33	18.63	18.21	24.43	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	18.19	18.63	18.62	18.06	24.40	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	12.25	12.34	12.48	12.75	18.48	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	12.72	12.66	12.43	12.57	18.62	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	12.64	12.58	12.47	12.23	18.50	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	12.60	12.08	12.22	12.07	18.27	≤ 23.98	Pass
11ax-HE20	MCS0	116	5580	12.57	11.71	12.33	12.10	18.21	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	12.53	12.61	12.70	12.31	18.56	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	11.68	11.60	11.63	11.43	17.61	≤ 22.86	Pass
11ax-HE20	MCS0	149	5745	23.66	23.85	23.78	23.18	29.65	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	23.48	24.26	23.79	23.69	29.84	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	23.59	23.60	23.58	23.51	29.59	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	18.26	18.25	17.94	17.68	24.06	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	21.65	21.76	21.55	21.02	27.52	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	15.57	15.38	15.35	15.33	21.43	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	15.23	14.75	14.98	14.73	20.95	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	15.23	14.59	14.50	14.48	20.73	≤ 23.98	Pass
11ax-HE40	MCS0	110	5550	15.38	14.97	14.77	14.73	20.99	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	15.44	15.18	14.92	14.68	21.08	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	15.40	15.60	15.38	15.06	21.38	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	23.66	23.83	23.33	23.11	29.51	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	23.59	23.98	23.43	23.42	29.63	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	17.57	17.45	17.33	17.10	23.39	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	15.01	15.02	15.01	15.07	21.05	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	16.94	16.78	16.40	16.70	22.73	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	17.74	17.96	18.06	17.60	23.86	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	17.60	17.88	17.98	17.56	23.78	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	23.88	23.38	23.11	23.55	29.51	≤ 30.00	Pass
11ax-HE160	MCS0	50	5250	16.19	16.50	16.28	16.03	22.27	≤ 23.98	Pass
11ax-HE160	MCS0	114	5570	16.75	16.20	16.50	16.63	22.55	≤ 23.98	Pass

Note 1:

The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2:

For 5250- 5350MHz and 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 dBm.

For 5150 - 5250MHz and 5725 - 5850MHz Bands: Average Power Limit (dBm) = 30 dBm.

For 11a_Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2)$ = 22.80 dBm.

For 11ac-VHT20_Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2)$ = 22.81 dBm.

For 11ax-HE20_Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2)$ = 22.86 dBm.

Product	AX6000 8-Stream Wi-Fi 6 Router	Test Engineer	Jay
Test Site	SR5	Test Date	2022/7/7~2022/7/27
Test Mode	Beamforming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT20	MCS0	36	5180	19.16	19.18	18.84	18.46	24.94	≤ 26.98	Pass
11ac-VHT20	MCS0	40	5220	19.30	19.00	19.05	18.70	25.04	≤ 26.98	Pass
11ac-VHT20	MCS0	48	5240	19.01	19.26	19.11	18.62	25.03	≤ 26.98	Pass
11ac-VHT20	MCS0	52	5260	13.06	12.65	12.88	13.03	18.93	≤ 21.53	Pass
11ac-VHT20	MCS0	60	5300	13.20	12.98	13.01	12.89	19.04	≤ 21.53	Pass
11ac-VHT20	MCS0	64	5320	13.16	12.85	12.99	12.82	18.98	≤ 21.53	Pass
11ac-VHT20	MCS0	100	5500	12.38	11.94	12.58	12.35	18.34	≤ 21.07	Pass
11ac-VHT20	MCS0	116	5580	12.40	11.88	12.79	12.37	18.39	≤ 21.07	Pass
11ac-VHT20	MCS0	140	5700	12.84	12.99	12.92	12.83	18.92	≤ 21.07	Pass
11ac-VHT20	MCS0	144	5720	11.56	11.31	12.13	11.92	17.76	≤ 19.90	Pass
11ac-VHT20	MCS0	149	5745	20.85	20.93	20.49	19.96	26.59	≤ 27.02	Pass
11ac-VHT20	MCS0	157	5785	20.92	20.92	20.77	20.15	26.72	≤ 27.02	Pass
11ac-VHT20	MCS0	165	5825	20.72	20.78	20.67	20.55	26.70	≤ 27.02	Pass
11ac-VHT40	MCS0	38	5190	19.78	19.65	19.45	19.13	25.53	≤ 26.98	Pass
11ac-VHT40	MCS0	46	5230	20.72	21.00	20.93	20.18	26.74	≤ 26.98	Pass
11ac-VHT40	MCS0	54	5270	15.27	15.21	15.06	15.10	21.18	≤ 21.53	Pass
11ac-VHT40	MCS0	62	5310	15.38	15.23	15.26	15.14	21.27	≤ 21.53	Pass
11ac-VHT40	MCS0	102	5510	15.18	14.57	14.64	14.32	20.71	≤ 21.07	Pass
11ac-VHT40	MCS0	110	5550	15.46	14.86	14.73	14.50	20.92	≤ 21.07	Pass
11ac-VHT40	MCS0	134	5670	15.07	14.95	14.76	14.50	20.85	≤ 21.07	Pass
11ac-VHT40	MCS0	142	5710	14.58	14.60	14.44	14.10	20.46	≤ 21.07	Pass
11ac-VHT40	MCS0	151	5755	20.86	20.87	20.30	19.95	26.53	≤ 27.02	Pass
11ac-VHT40	MCS0	159	5795	20.10	21.12	20.76	20.28	26.60	≤ 27.02	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT80	MCS0	42	5210	13.68	13.02	13.38	13.08	19.32	≤ 26.98	Pass
11ac-VHT80	MCS0	58	5290	13.04	12.61	12.72	12.80	18.82	≤ 21.53	Pass
11ac-VHT80	MCS0	106	5530	15.04	15.02	14.98	14.78	20.98	≤ 21.07	Pass
11ac-VHT80	MCS0	122	5610	14.60	14.21	14.43	14.35	20.42	≤ 21.07	Pass
11ac-VHT80	MCS0	138	5690	14.65	15.33	14.78	14.45	20.84	≤ 21.07	Pass
11ac-VHT80	MCS0	155	5775	21.08	21.03	20.15	20.43	26.71	≤ 27.02	Pass
11ac-VHT160	MCS0	50	5250	13.80	13.66	13.49	13.11	19.54	≤ 21.53	Pass
11ac-VHT160	MCS0	114	5570	13.73	13.22	13.21	13.07	19.34	≤ 21.07	Pass
11ax-HE20	MCS0	36	5180	18.71	18.56	18.54	18.16	24.52	≤ 26.98	Pass
11ax-HE20	MCS0	40	5220	18.46	18.33	18.63	18.21	24.43	≤ 26.98	Pass
11ax-HE20	MCS0	48	5240	18.19	18.63	18.62	18.06	24.40	≤ 26.98	Pass
11ax-HE20	MCS0	52	5260	12.25	12.34	12.48	12.75	18.48	≤ 21.53	Pass
11ax-HE20	MCS0	60	5300	12.72	12.66	12.43	12.57	18.62	≤ 21.53	Pass
11ax-HE20	MCS0	64	5320	12.64	12.58	12.47	12.23	18.50	≤ 21.53	Pass
11ax-HE20	MCS0	100	5500	12.60	12.08	12.22	12.07	18.27	≤ 21.07	Pass
11ax-HE20	MCS0	116	5580	12.57	11.71	12.33	12.10	18.21	≤ 21.07	Pass
11ax-HE20	MCS0	140	5700	12.53	12.61	12.70	12.31	18.56	≤ 21.07	Pass
11ax-HE20	MCS0	144	5720	11.68	11.60	11.63	11.43	17.61	≤ 19.95	Pass
11ax-HE20	MCS0	149	5745	20.95	21.04	20.67	20.04	26.71	≤ 27.02	Pass
11ax-HE20	MCS0	157	5785	21.08	21.02	20.82	20.33	26.84	≤ 27.02	Pass
11ax-HE20	MCS0	165	5825	20.84	20.87	20.81	20.62	26.81	≤ 27.02	Pass
11ax-HE40	MCS0	38	5190	18.26	18.25	17.94	17.68	24.06	≤ 26.98	Pass
11ax-HE40	MCS0	46	5230	20.91	20.85	20.88	20.21	26.74	≤ 26.98	Pass
11ax-HE40	MCS0	54	5270	15.57	15.38	15.35	15.33	21.43	≤ 21.53	Pass
11ax-HE40	MCS0	62	5310	15.23	14.75	14.98	14.73	20.95	≤ 21.53	Pass
11ax-HE40	MCS0	102	5510	15.23	14.59	14.50	14.48	20.73	≤ 21.07	Pass
11ax-HE40	MCS0	110	5550	15.38	14.97	14.77	14.73	20.99	≤ 21.07	Pass
11ax-HE40	MCS0	134	5670	14.57	14.42	14.40	13.66	20.30	≤ 21.07	Pass
11ax-HE40	MCS0	142	5710	14.98	14.90	14.81	14.02	20.71	≤ 21.07	Pass
11ax-HE40	MCS0	151	5755	20.95	20.44	20.57	20.01	26.53	≤ 27.02	Pass
11ax-HE40	MCS0	159	5795	20.70	20.72	20.33	19.94	26.45	≤ 27.02	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ax-HE80	MCS0	42	5210	15.07	15.07	14.73	14.62	20.90	≤ 26.98	Pass
11ax-HE80	MCS0	58	5290	13.03	13.02	12.92	12.98	19.01	≤ 21.53	Pass
11ax-HE80	MCS0	106	5530	14.86	14.16	14.42	14.18	20.43	≤ 21.07	Pass
11ax-HE80	MCS0	122	5610	14.94	14.44	14.86	14.61	20.74	≤ 21.07	Pass
11ax-HE80	MCS0	138	5690	14.78	15.04	15.27	14.70	20.97	≤ 21.07	Pass
11ax-HE80	MCS0	155	5775	21.07	21.07	20.77	20.55	26.89	≤ 27.02	Pass
11ax-HE160	MCS0	50	5250	15.80	15.53	15.55	15.02	21.50	≤ 21.53	Pass
11ax-HE160	MCS0	114	5570	14.92	14.62	14.63	14.45	20.68	≤ 21.07	Pass

Note 1:

The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) = 30 - (9.02- 6) = 26.98dBm

For 5250 - 5350MHz Band: Average Power Limit (dBm) = 23.98 - (8.45- 6) = 21.53dBm.

For 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 - (8.91- 6) = 21.07dBm.

For 5725 - 5850MHz Band: Average Power Limit (dBm) = 30- (8.98- 6) = 27.02dBm.

For 11a_Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) - (8.91-6) = 19.89$ dBm.

For 11ac-VHT20_Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) - (8.91-6) = 19.90$ dBm.

For 11ax-HE20_Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) - (8.91-6) = 19.95$ dBm.

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

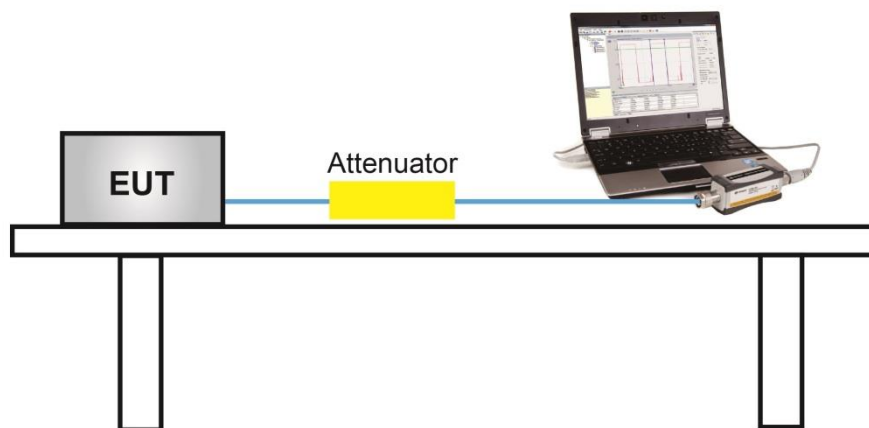

7.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01-SectionF

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 510 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

7.6.4. Test Setup

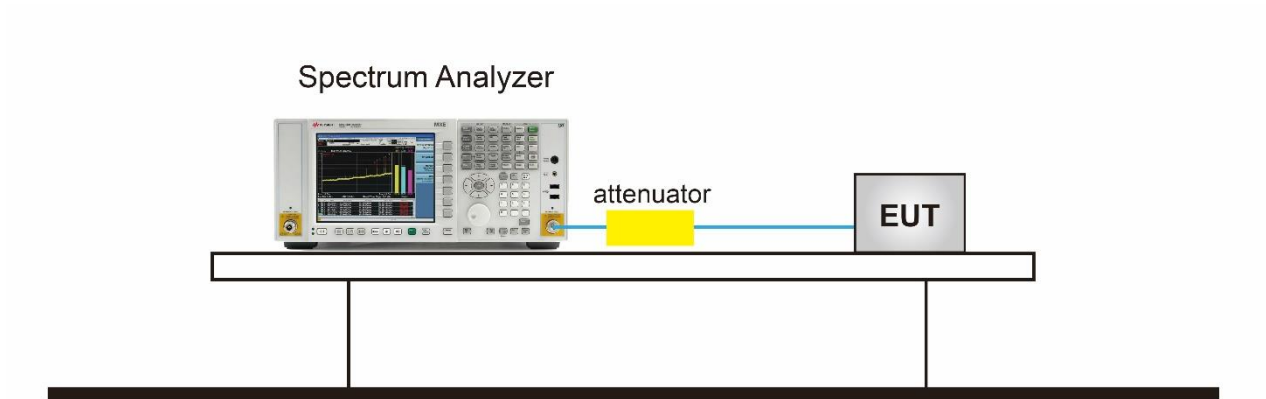

7.6.5.Test Result

Product	AX6000 8-Stream Wi-Fi 6 Router	Test Engineer	Jay
Test Site	SR5	Test Date	2022/7/7~2022/8/18
Mode	Power Spectral Density (U-NII- 1/-2a / -2c) CDD Mode		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
				Ant 0	Ant 1	Ant 2	Ant 3				
11a	6Mbps	36	5180	7.276	8.320	7.314	7.276	96.90	13.728	≤ 13.98	Pass
11a	6Mbps	44	5220	8.224	8.106	6.741	7.450	96.90	13.827	≤ 13.98	Pass
11a	6Mbps	48	5240	7.399	8.178	7.727	7.000	96.90	13.755	≤ 13.98	Pass
11a	6Mbps	52	5260	2.442	2.045	2.237	1.840	96.90	8.304	≤ 8.55	Pass
11a	6Mbps	60	5300	2.503	2.194	2.285	2.121	96.90	8.435	≤ 8.55	Pass
11a	6Mbps	64	5320	2.427	2.250	2.302	2.375	96.90	8.496	≤ 8.55	Pass
11a	6Mbps	100	5500	1.874	1.062	2.099	1.599	96.90	7.833	≤ 8.09	Pass
11a	6Mbps	116	5580	1.574	2.170	1.929	1.577	96.90	7.977	≤ 8.09	Pass
11a	6Mbps	140	5700	1.528	1.382	2.076	1.440	96.90	7.773	≤ 8.09	Pass
11a	6Mbps	144	5720	1.723	1.845	2.120	1.667	96.90	8.000	≤ 8.09	Pass
11ac-VHT20	MCS0	36	5180	7.883	7.906	7.491	7.336	96.06	13.856	≤ 13.98	Pass
11ac-VHT20	MCS0	40	5220	8.084	7.842	7.709	7.082	96.06	13.890	≤ 13.98	Pass
11ac-VHT20	MCS0	48	5240	7.471	8.038	7.535	7.124	96.06	13.750	≤ 13.98	Pass
11ac-VHT20	MCS0	52	5260	2.168	1.911	1.831	2.117	96.06	8.204	≤ 8.55	Pass
11ac-VHT20	MCS0	60	5300	2.681	2.063	2.020	2.225	96.06	8.450	≤ 8.55	Pass
11ac-VHT20	MCS0	64	5320	2.430	2.106	2.295	2.228	96.06	8.462	≤ 8.55	Pass
11ac-VHT20	MCS0	100	5500	1.876	1.586	1.929	1.302	96.06	7.876	≤ 8.09	Pass
11ac-VHT20	MCS0	116	5580	1.936	1.437	1.906	1.386	96.06	7.869	≤ 8.09	Pass
11ac-VHT20	MCS0	140	5700	1.861	1.578	2.067	1.583	96.06	7.972	≤ 8.09	Pass
11ac-VHT20	MCS0	144	5720	1.706	1.782	1.735	1.217	96.06	7.811	≤ 8.09	Pass
11ac-VHT40	MCS0	38	5190	5.544	5.769	5.453	4.938	91.69	11.834	≤ 13.98	Pass
11ac-VHT40	MCS0	46	5230	7.110	6.734	7.497	6.947	91.69	13.478	≤ 13.98	Pass
11ac-VHT40	MCS0	54	5270	1.907	1.921	2.303	2.210	91.69	8.486	≤ 8.55	Pass
11ac-VHT40	MCS0	62	5310	1.798	2.042	2.103	2.242	91.69	8.447	≤ 8.55	Pass
11ac-VHT40	MCS0	102	5510	1.910	0.398	1.734	1.414	91.69	7.799	≤ 8.09	Pass
11ac-VHT40	MCS0	110	5550	2.012	0.019	1.856	1.512	91.69	7.814	≤ 8.09	Pass
11ac-VHT40	MCS0	134	5670	1.562	1.594	1.440	0.760	91.69	7.749	≤ 8.09	Pass
11ac-VHT40	MCS0	142	5710	1.749	1.748	1.438	0.985	91.69	7.888	≤ 8.09	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
				Ant 0	Ant 1	Ant 2	Ant 3				
11ac-VHT80	MCS0	42	5210	0.016	-0.084	-0.477	-0.864	85.07	6.384	≤ 13.98	Pass
11ac-VHT80	MCS0	58	5290	-0.921	-1.216	-0.979	-1.457	85.07	5.585	≤ 8.55	Pass
11ac-VHT80	MCS0	106	5530	-0.066	0.028	-0.565	-0.828	85.07	6.379	≤ 8.09	Pass
11ac-VHT80	MCS0	122	5610	1.185	1.399	1.222	1.263	85.07	7.991	≤ 8.09	Pass
11ac-VHT80	MCS0	138	5690	0.928	0.852	1.201	0.612	85.07	7.626	≤ 8.09	Pass
11ac-VHT160	MCS0	50	5250	-4.085	-3.513	-3.941	-3.897	85.29	2.858	≤ 8.55	Pass
11ac-VHT160	MCS0	114	5570	-3.380	-4.325	-3.972	-4.355	85.29	2.722	≤ 8.09	Pass
11ax-HE20	MCS0	36	5180	6.600	7.683	6.897	6.715	84.72	13.736	≤ 13.98	Pass
11ax-HE20	MCS0	44	5220	6.902	7.346	7.095	6.754	84.72	13.771	≤ 13.98	Pass
11ax-HE20	MCS0	48	5240	6.750	6.920	7.378	6.815	84.72	13.714	≤ 13.98	Pass
11ax-HE20	MCS0	52	5260	2.045	1.489	1.617	1.607	84.72	8.435	≤ 8.55	Pass
11ax-HE20	MCS0	60	5300	1.902	1.371	1.610	1.538	84.72	8.350	≤ 8.55	Pass
11ax-HE20	MCS0	64	5320	1.842	1.018	1.983	1.494	84.72	8.341	≤ 8.55	Pass
11ax-HE20	MCS0	100	5500	1.708	0.803	1.158	0.904	84.72	7.898	≤ 8.09	Pass
11ax-HE20	MCS0	116	5580	1.711	0.523	0.876	1.007	84.72	7.792	≤ 8.09	Pass
11ax-HE20	MCS0	140	5700	1.412	0.937	1.207	0.758	84.72	7.826	≤ 8.09	Pass
11ax-HE20	MCS0	144	5720	1.455	1.103	1.291	0.948	84.72	7.944	≤ 8.09	Pass
11ax-HE40	MCS0	38	5190	3.854	4.280	4.033	3.245	84.86	10.603	≤ 13.98	Pass
11ax-HE40	MCS0	46	5230	7.110	7.379	7.235	6.477	84.86	13.797	≤ 13.98	Pass
11ax-HE40	MCS0	54	5270	1.462	1.613	1.414	1.662	84.86	8.273	≤ 8.55	Pass
11ax-HE40	MCS0	62	5310	1.438	1.404	1.342	1.196	84.86	8.080	≤ 8.55	Pass
11ax-HE40	MCS0	102	5510	1.160	0.550	0.858	0.561	84.86	7.523	≤ 8.09	Pass
11ax-HE40	MCS0	110	5550	1.583	0.995	1.197	0.874	84.86	7.904	≤ 8.09	Pass
11ax-HE40	MCS0	134	5670	1.389	0.684	1.167	0.901	84.86	7.777	≤ 8.09	Pass
11ax-HE40	MCS0	142	5710	1.443	1.194	1.304	0.947	84.86	7.959	≤ 8.09	Pass
11ax-HE80	MCS0	42	5210	0.555	0.352	0.594	0.182	85.07	7.147	≤ 13.98	Pass
11ax-HE80	MCS0	58	5290	-1.484	-1.331	-1.266	-1.647	85.07	5.293	≤ 8.55	Pass
11ax-HE80	MCS0	106	5530	-0.396	-0.356	-0.781	-0.984	85.07	6.102	≤ 8.09	Pass
11ax-HE80	MCS0	122	5610	1.117	0.700	1.305	1.402	85.07	7.862	≤ 8.09	Pass
11ax-HE80	MCS0	138	5690	0.772	1.279	0.939	0.867	85.07	7.691	≤ 8.09	Pass
11ax-HE160	MCS0	50	5250	-3.791	-2.615	-2.858	-3.064	85.29	3.651	≤ 8.55	Pass
11ax-HE160	MCS0	114	5570	-2.640	-2.878	-2.880	-2.804	85.29	3.912	≤ 8.09	Pass

Note 1: When EUT duty cycle < 98%,

the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty})$

Cycle)(dBm/MHz).

Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) = $17 - (9.02 - 6) = 13.98\text{dBm}$

For 5250 - 5350MHz Band: Average Power Limit (dBm) = $11 - (8.45 - 6) = 8.55\text{dBm}$.

For 5470 - 5725MHz Band: Average Power Limit (dBm) = $11 - (8.91 - 6) = 8.09\text{dBm}$.

Product	AX6000 8-Stream Wi-Fi 6 Router	Test Engineer	Jay
Test Site	SR5	Test Date	2022/7/7~2022/8/18
Mode	Power Spectral Density (U-NII- 3) CDD Mode		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/510KHz)				Duty Cycle (%)	Total PSD (dBm/510KHz)	PSD Limit (dBm/500 KHz)	Result
				Ant 0	Ant 1	Ant 2	Ant 3				
11a	6Mbps	149	5745	10.091	9.980	9.780	8.883	96.90	15.866	≤ 27.02	Pass
11a	6Mbps	157	5785	10.461	9.803	9.688	9.310	96.90	15.993	≤ 27.02	Pass
11a	6Mbps	165	5825	10.015	10.140	9.736	10.034	96.90	16.141	≤ 27.02	Pass
11ac-VHT20	MCS0	149	5745	10.072	9.782	9.426	9.277	96.06	15.846	≤ 27.02	Pass
11ac-VHT20	MCS0	157	5785	10.427	9.907	10.149	9.495	96.06	16.203	≤ 27.02	Pass
11ac-VHT20	MCS0	165	5825	9.685	9.867	9.734	9.546	96.06	15.905	≤ 27.02	Pass
11ac-VHT40	MCS0	157	5785	7.304	7.555	6.964	6.525	91.69	13.501	≤ 27.02	Pass
11ac-VHT40	MCS0	159	5795	7.554	7.935	7.155	7.100	91.69	13.847	≤ 27.02	Pass
11ac-VHT80	MCS0	155	5775	3.628	4.230	3.103	3.114	85.07	10.267	≤ 27.02	Pass
11ax-HE20	MCS0	149	5745	9.155	8.834	9.110	8.660	84.72	15.685	≤ 27.02	Pass
11ax-HE20	MCS0	157	5785	9.330	9.939	9.243	9.095	84.72	16.155	≤ 27.02	Pass
11ax-HE20	MCS0	165	5825	9.016	9.368	9.373	9.126	84.72	15.964	≤ 27.02	Pass
11ax-HE40	MCS0	151	5755	7.301	6.564	6.567	6.120	84.86	13.393	≤ 27.02	Pass
11ax-HE40	MCS0	159	5795	7.246	6.760	7.040	6.987	84.86	13.745	≤ 27.02	Pass
11ax-HE80	MCS0	155	5775	4.106	3.491	3.508	3.264	85.07	10.326	≤ 27.02	Pass

Note 1:

When EUT duty cycle < 98%,


the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})(\text{dBm}/510\text{kHz})$.

Note 2:


Note 2: PSD Limit (dBm/500kHz) = 30- (8.98- 6) = 27.02dBm/500kHz.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

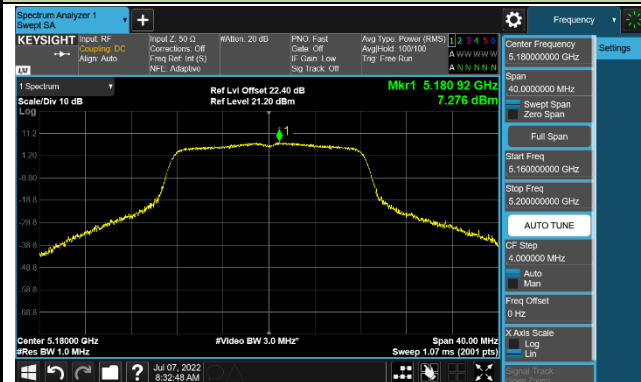


Channel 44 (5220MHz)

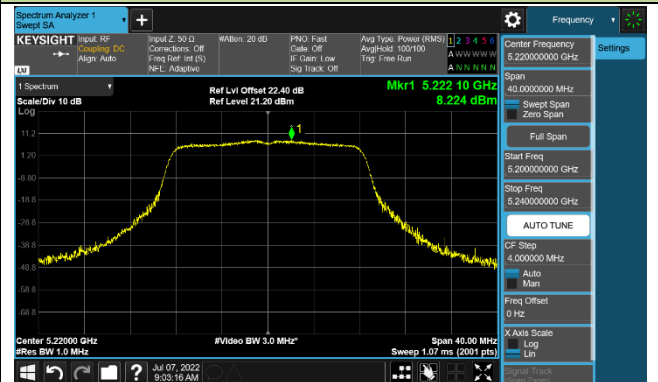

Channel 48 (5240MHz)

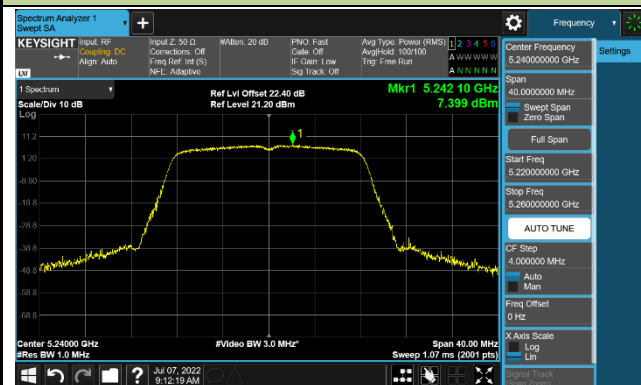

Channel 52 (5260MHz)

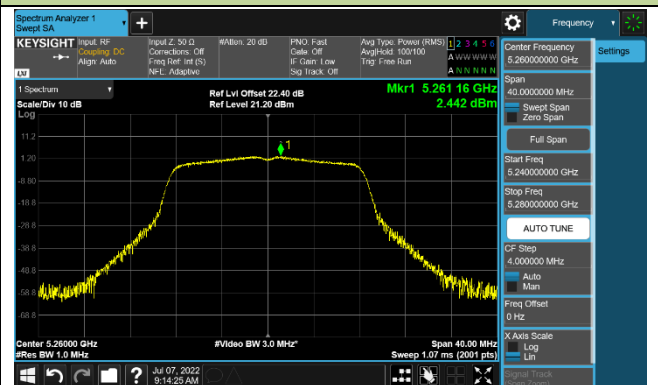

Channel 60 (5300MHz)




Channel 64 (5320MHz)




Channel 100 (5500MHz)




Channel 116 (5580MHz)

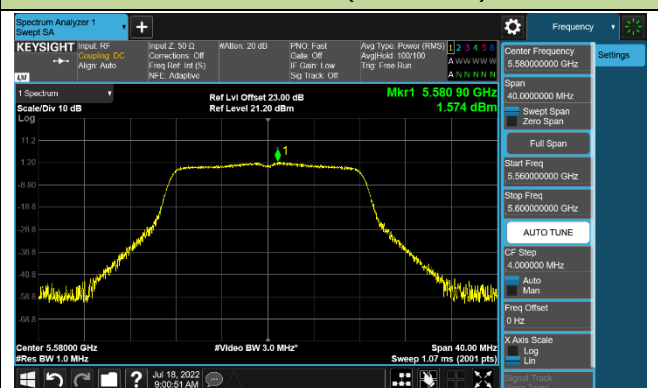

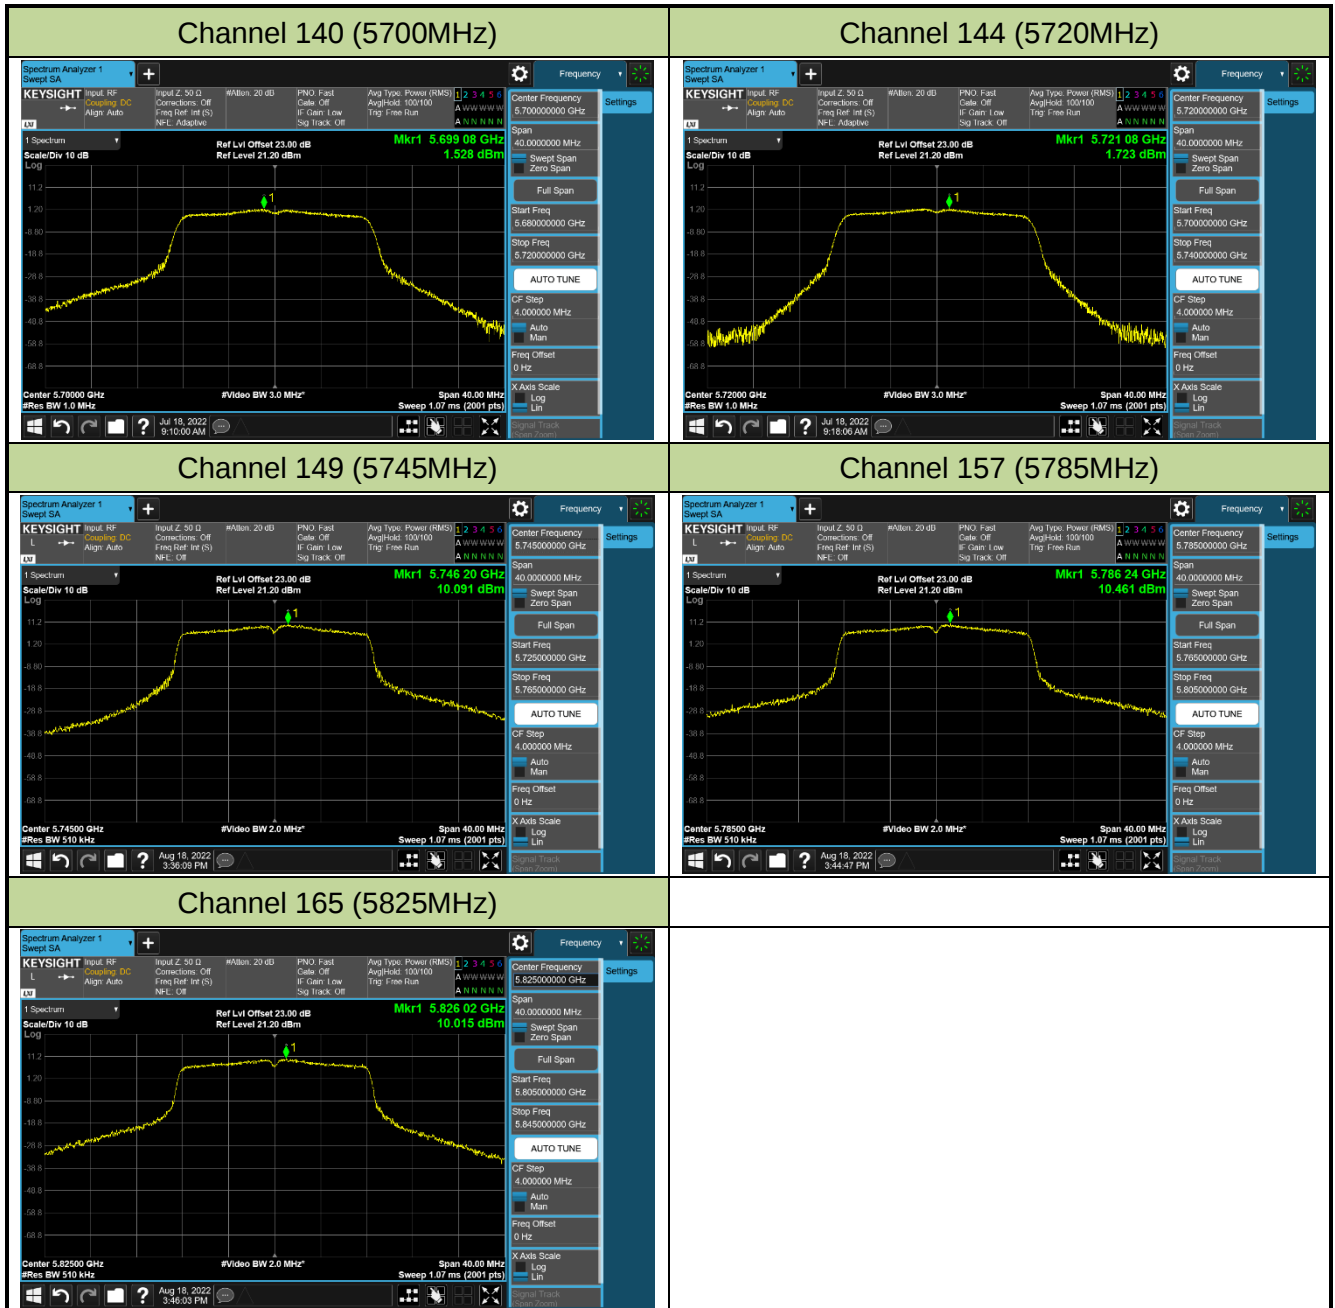


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

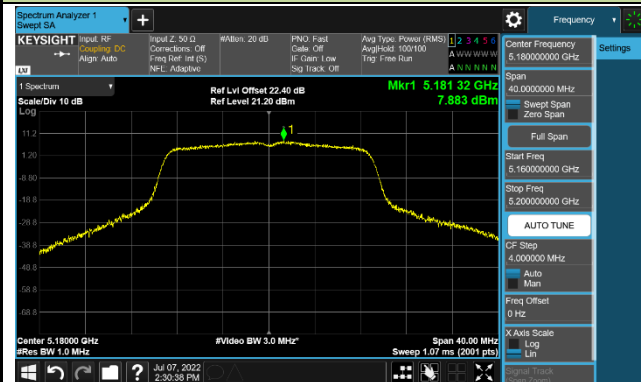


Channel 44 (5220MHz)

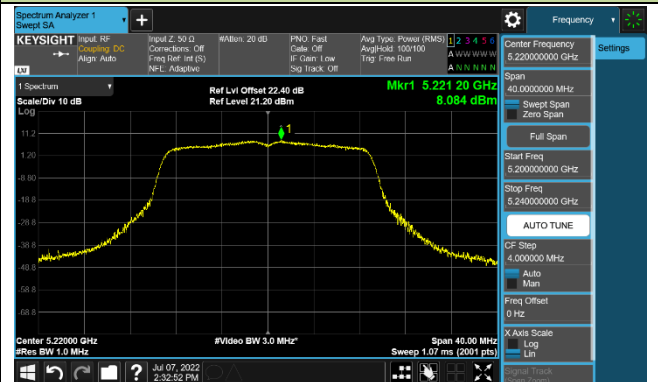


Channel 48 (5240MHz)

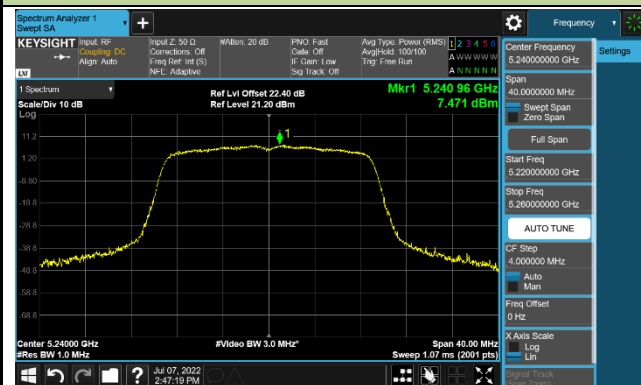

Channel 52 (5260MHz)

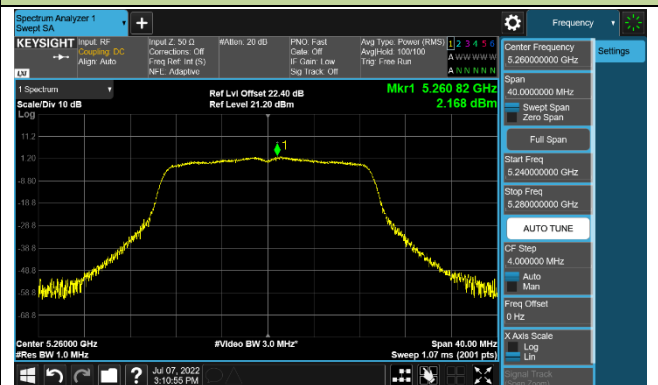


Channel 60 (5300MHz)

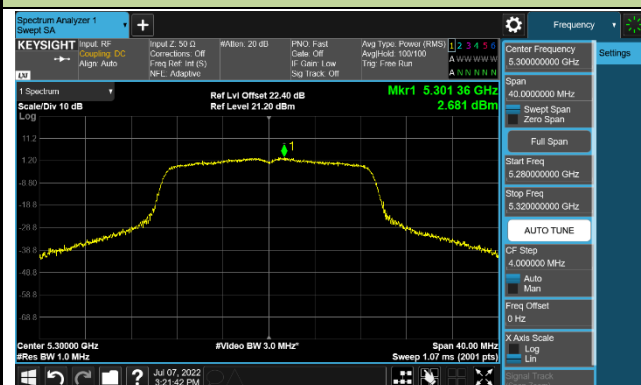


Channel 64 (5320MHz)




Channel 100 (5500MHz)

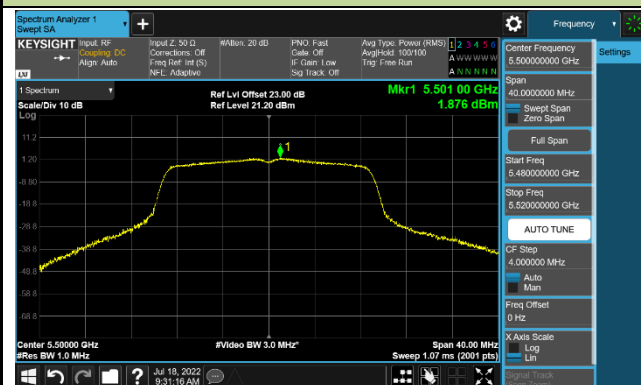


Channel 116 (5580MHz)

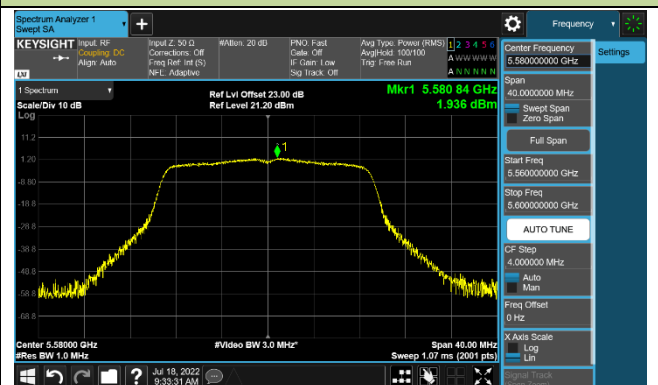

Channel 140 (5700MHz)

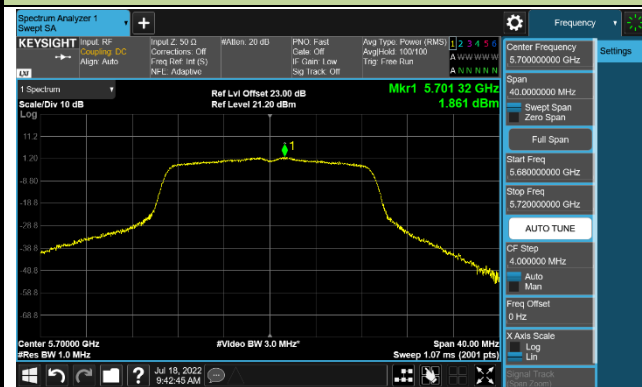


Channel 144 (5720MHz)

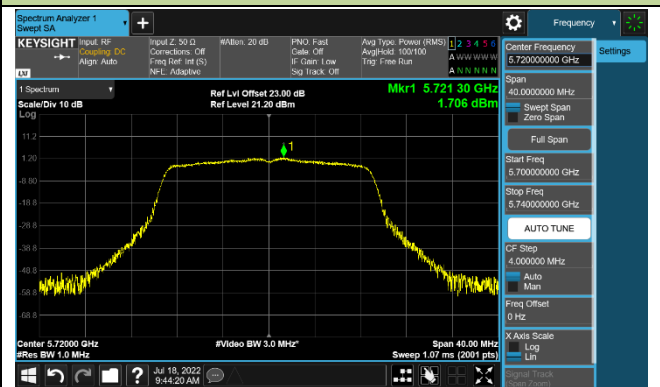


Channel 149 (5745MHz)



Channel 157 (5785MHz)

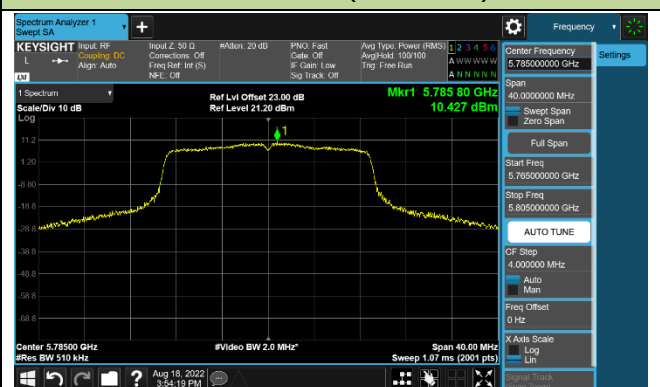


Channel 165 (5825MHz)

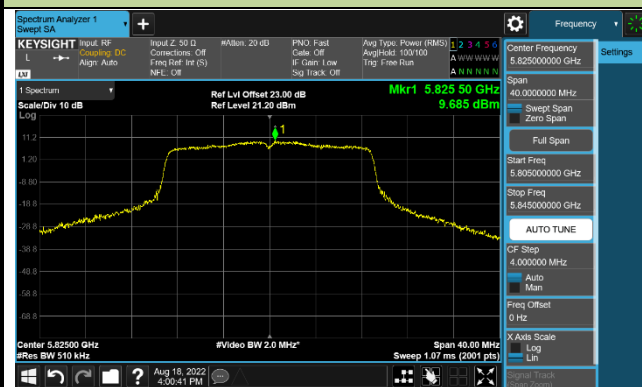


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

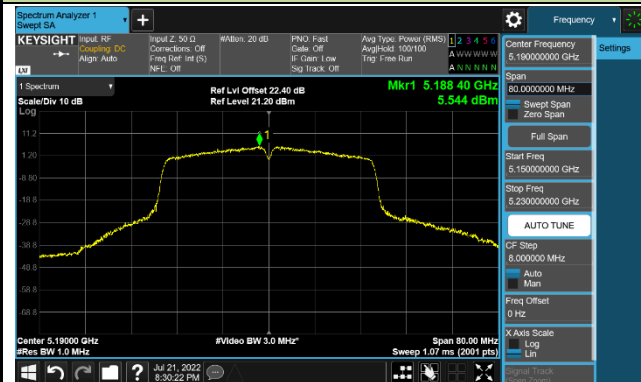

Channel 46 (5230MHz)

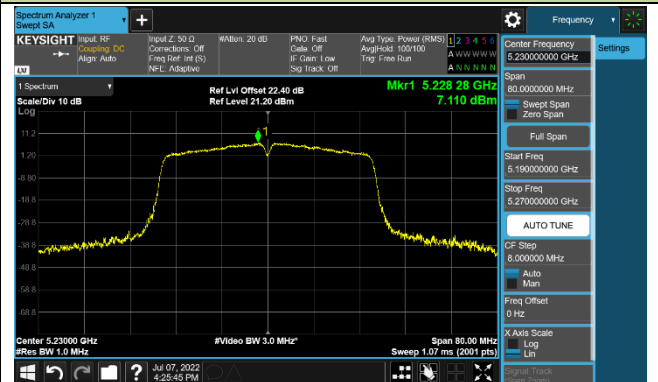


Channel 54 (5270MHz)

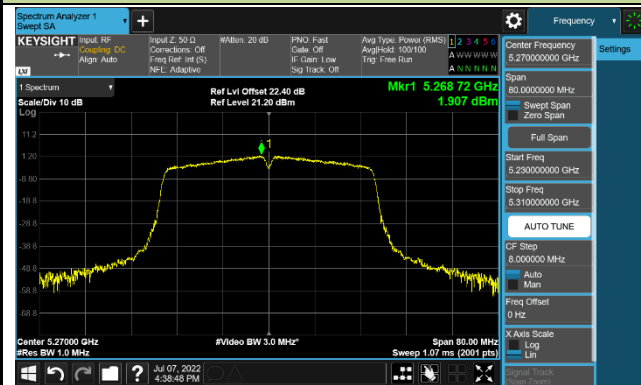


Channel 62 (5310MHz)




Channel 102 (5510MHz)

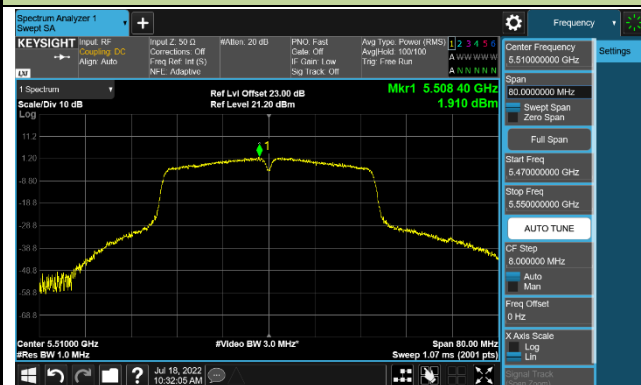


Channel 110 (5550MHz)

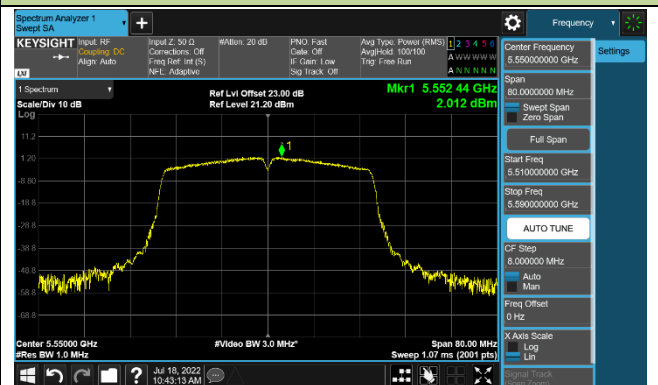


Channel 134 (5670MHz)

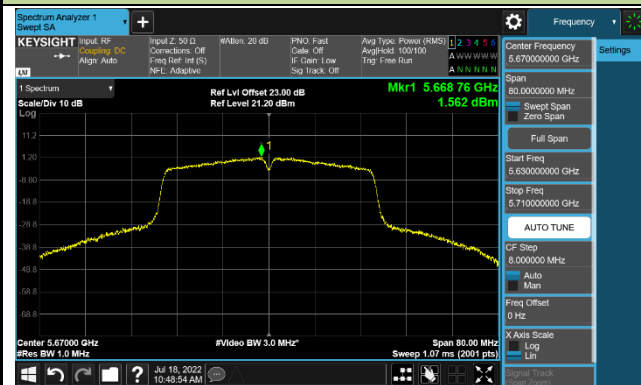

Channel 142 (5710MHz)

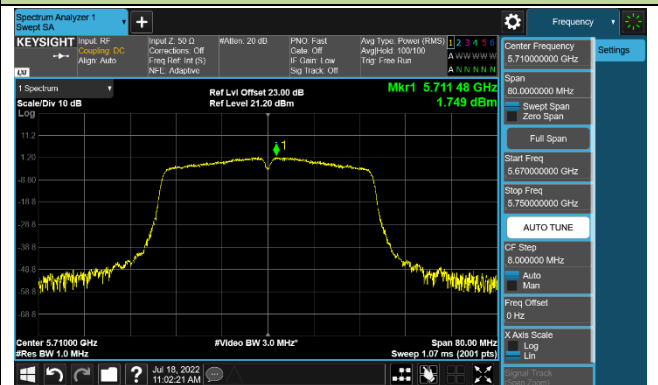

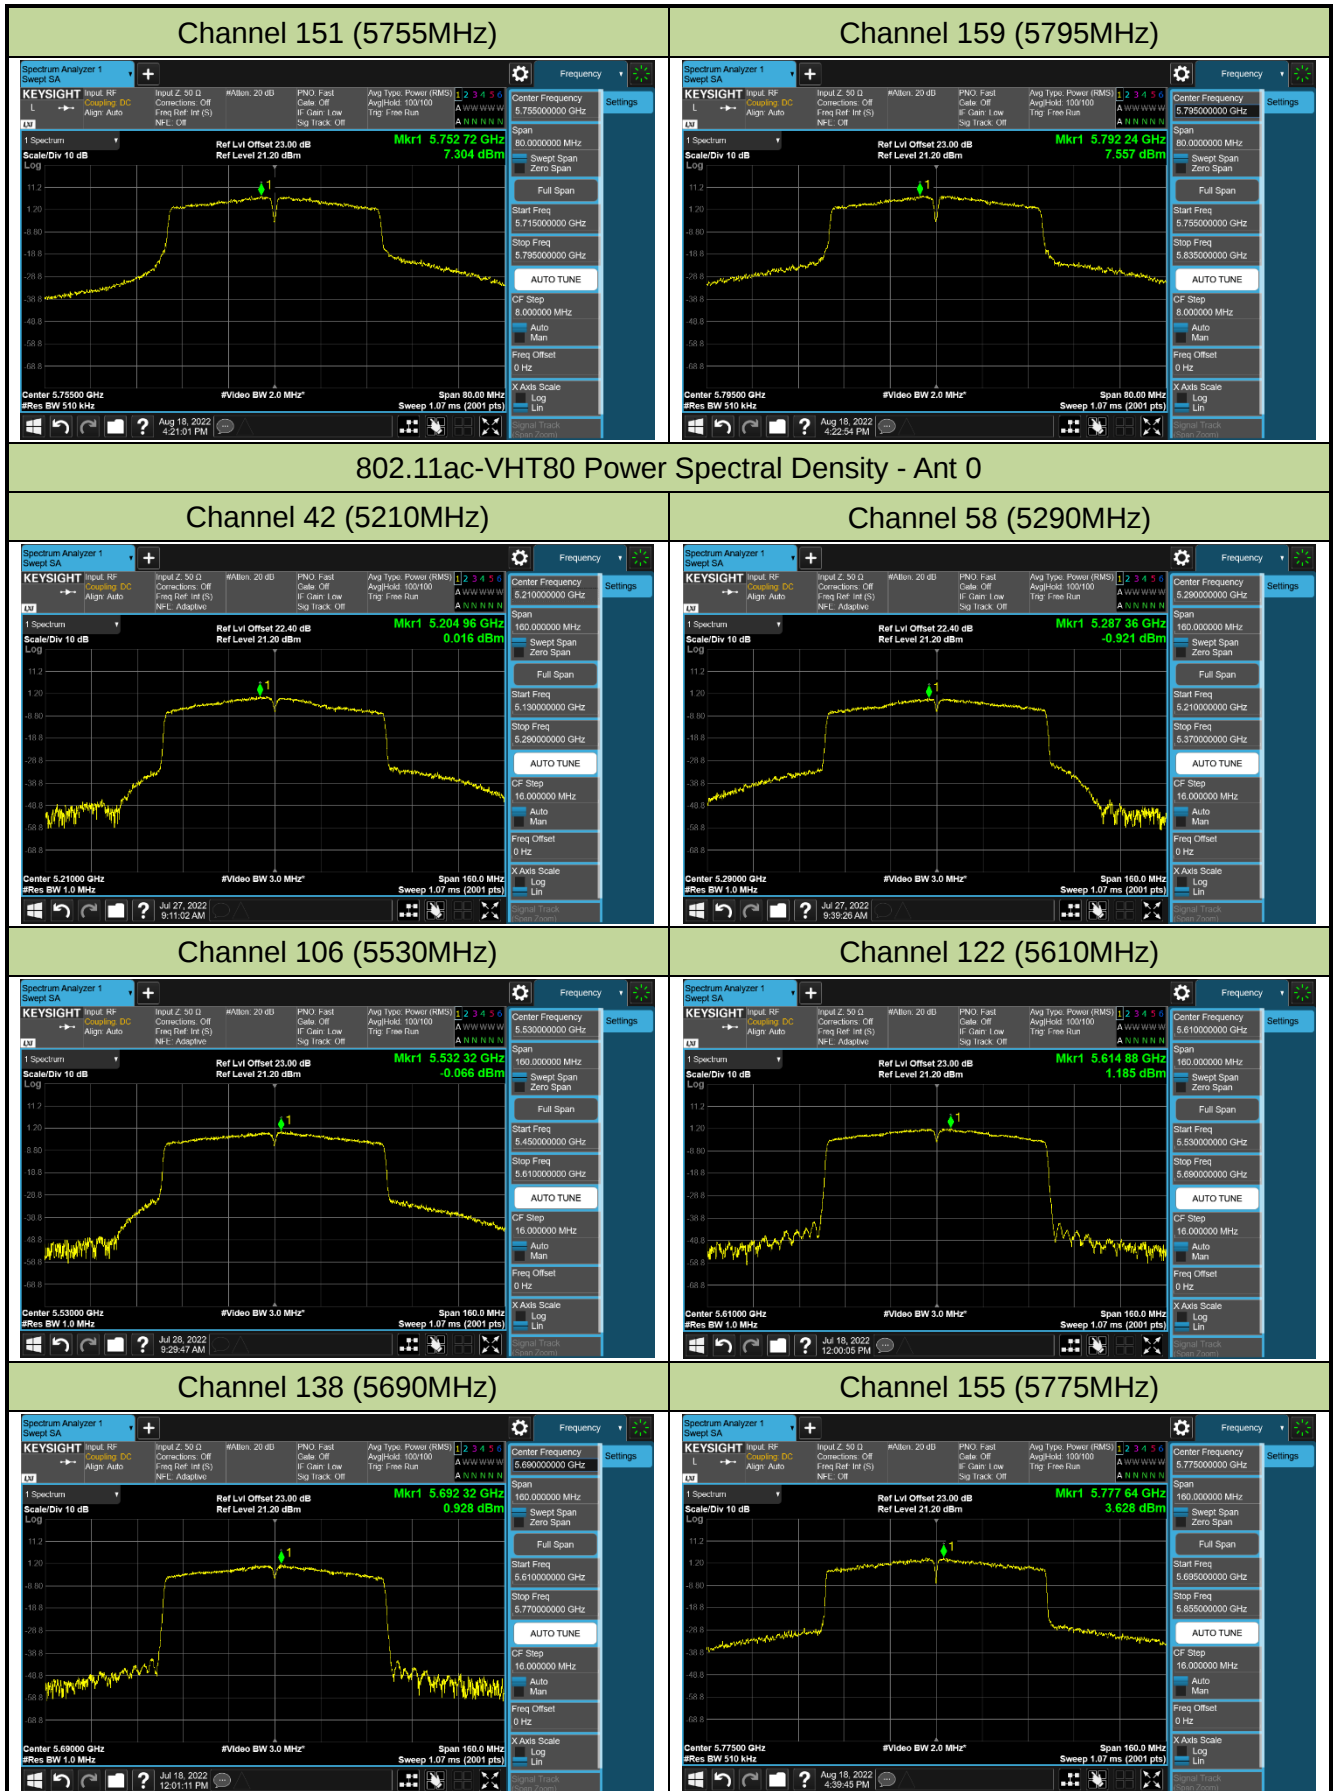


802.11ac-VHT160 Power Spectral Density - Ant 0

Channel 50 (5250MHz)




Channel 114 (5570MHz)

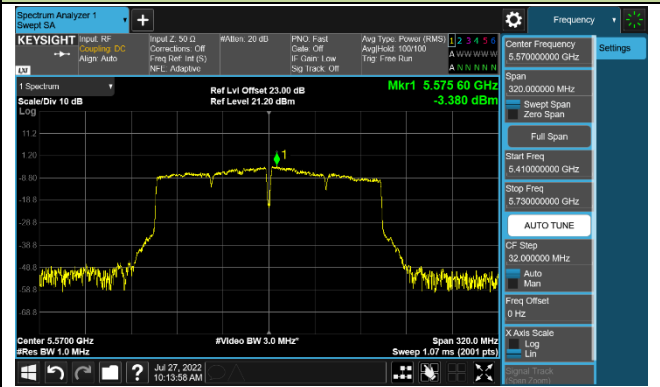


802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

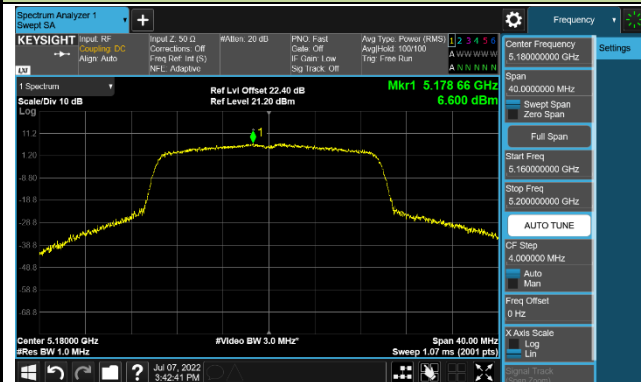


Channel 44 (5220MHz)

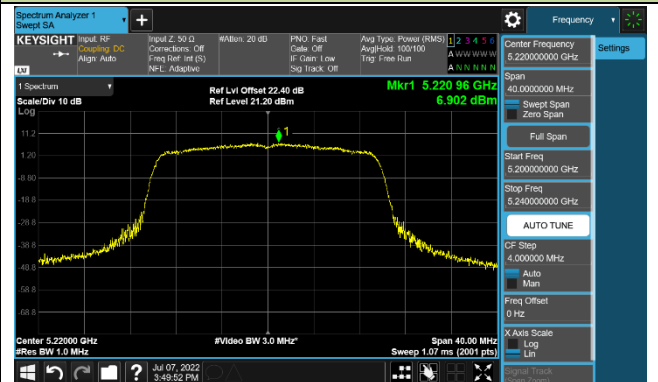


Channel 48 (5240MHz)

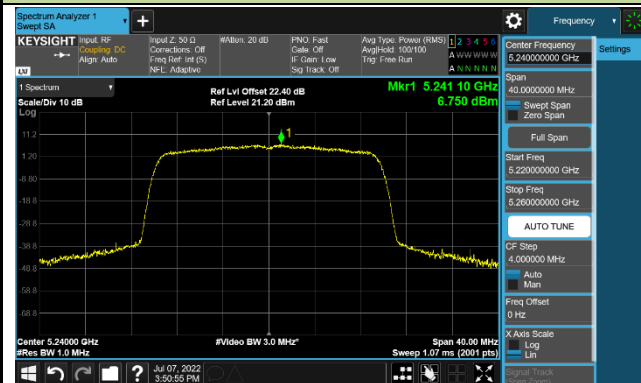

Channel 52 (5260MHz)

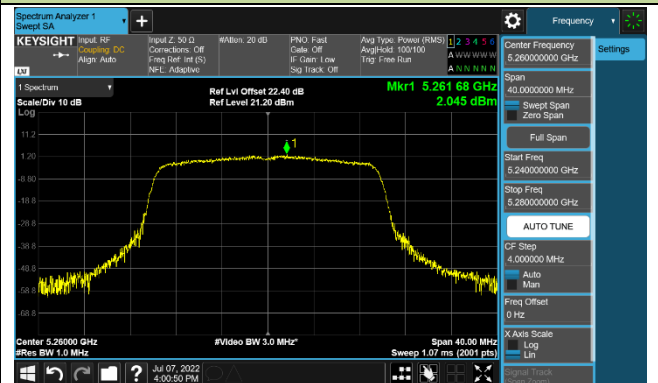

Channel 60 (5300MHz)

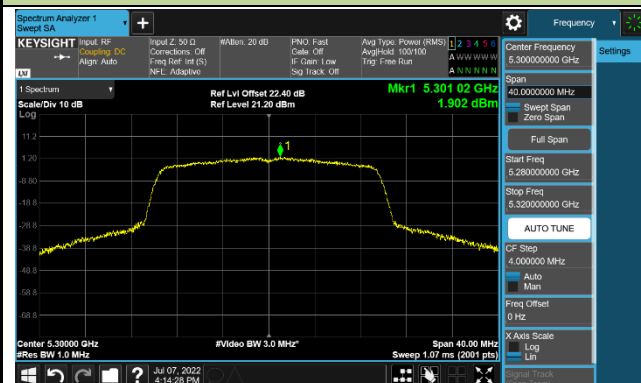

Channel 64 (5320MHz)



Channel 100 (5500MHz)



Channel 116 (5580MHz)



