

Antenna Specification

Product Model: Archer BE900(US)

Version: 1.0

Manufacturer: _____

Date: _____


Checked By: _____


TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre,
9 Science Museum Road, Tsim Sha Tsui,
Kowloon, Hong Kong
TEL: 00852-37585503
<http://www.tp-link.com/en>

Index

I. Antenna Distribution.....	3
II. Electrical Characteristics	4
III. Antenna Peak Gain.....	7
IV. Antenna Radiation Pattern	9

I. Antenna Distribution

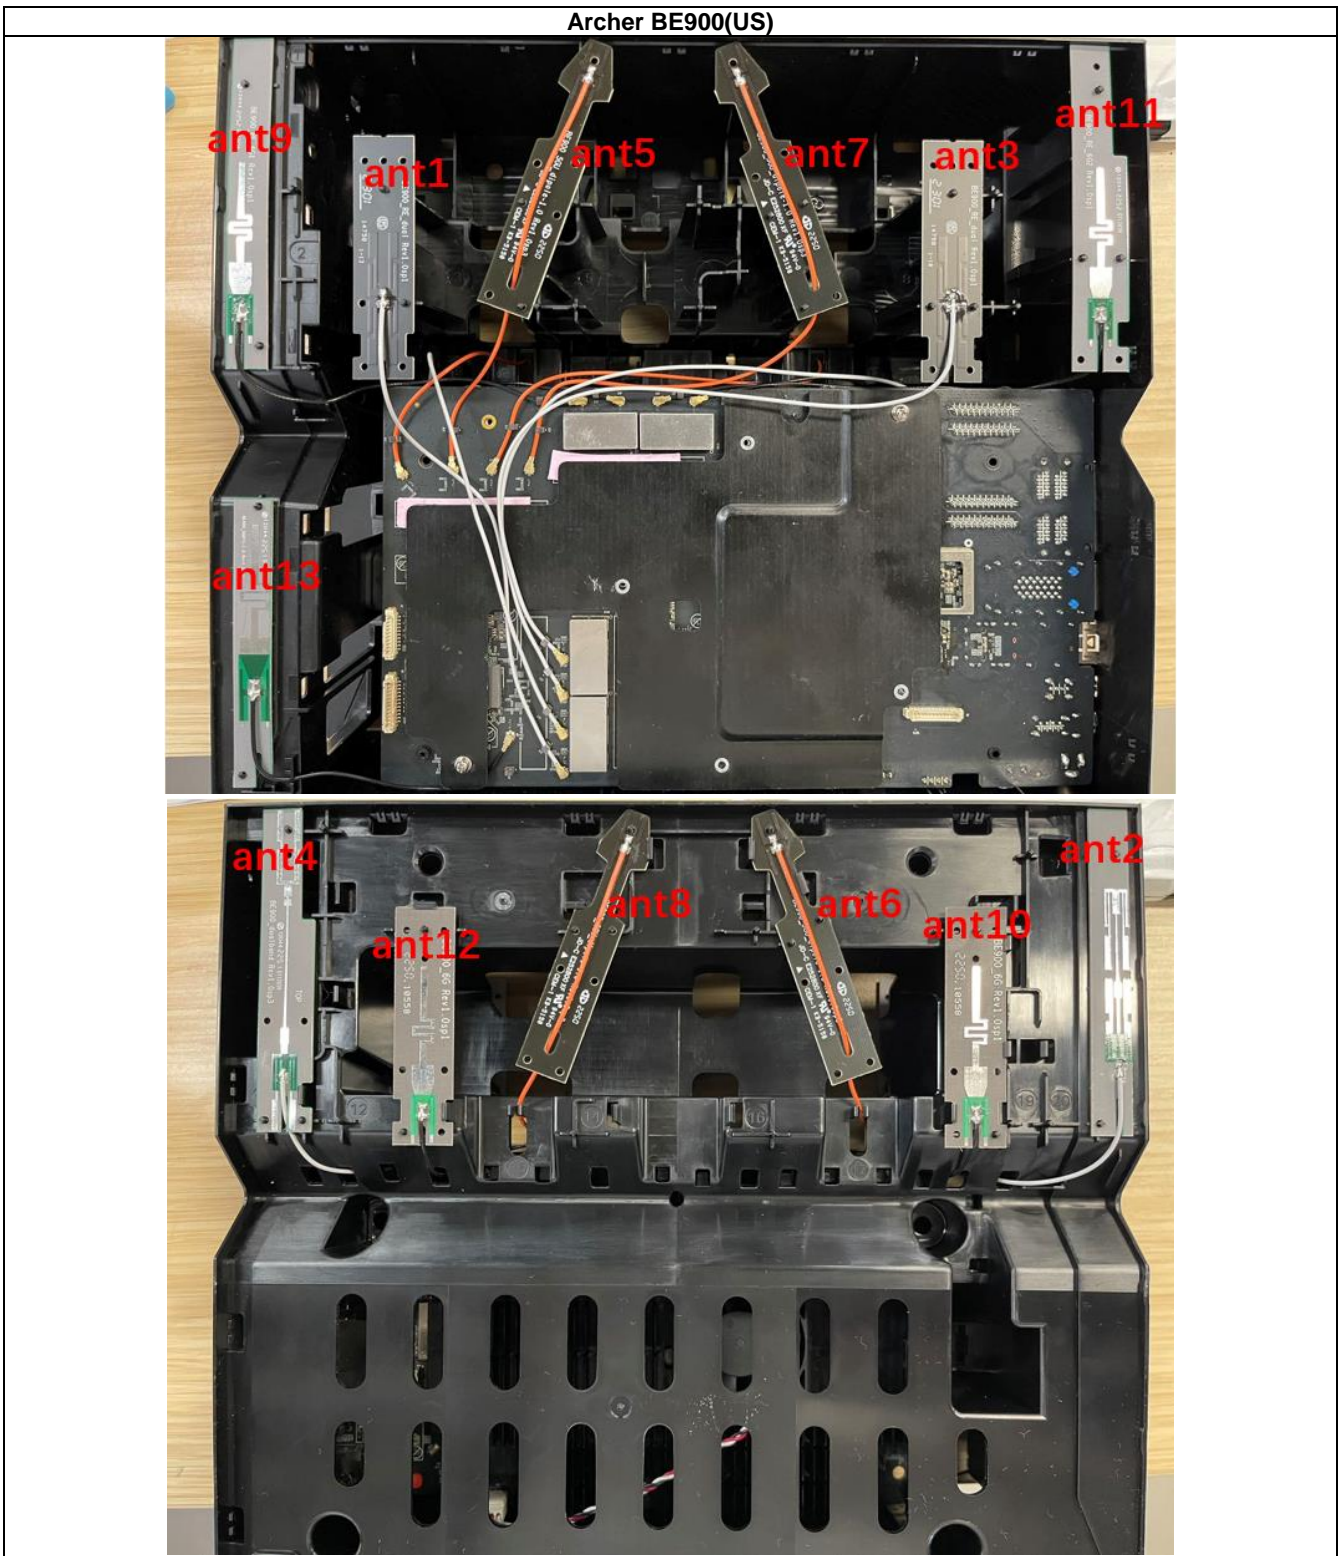

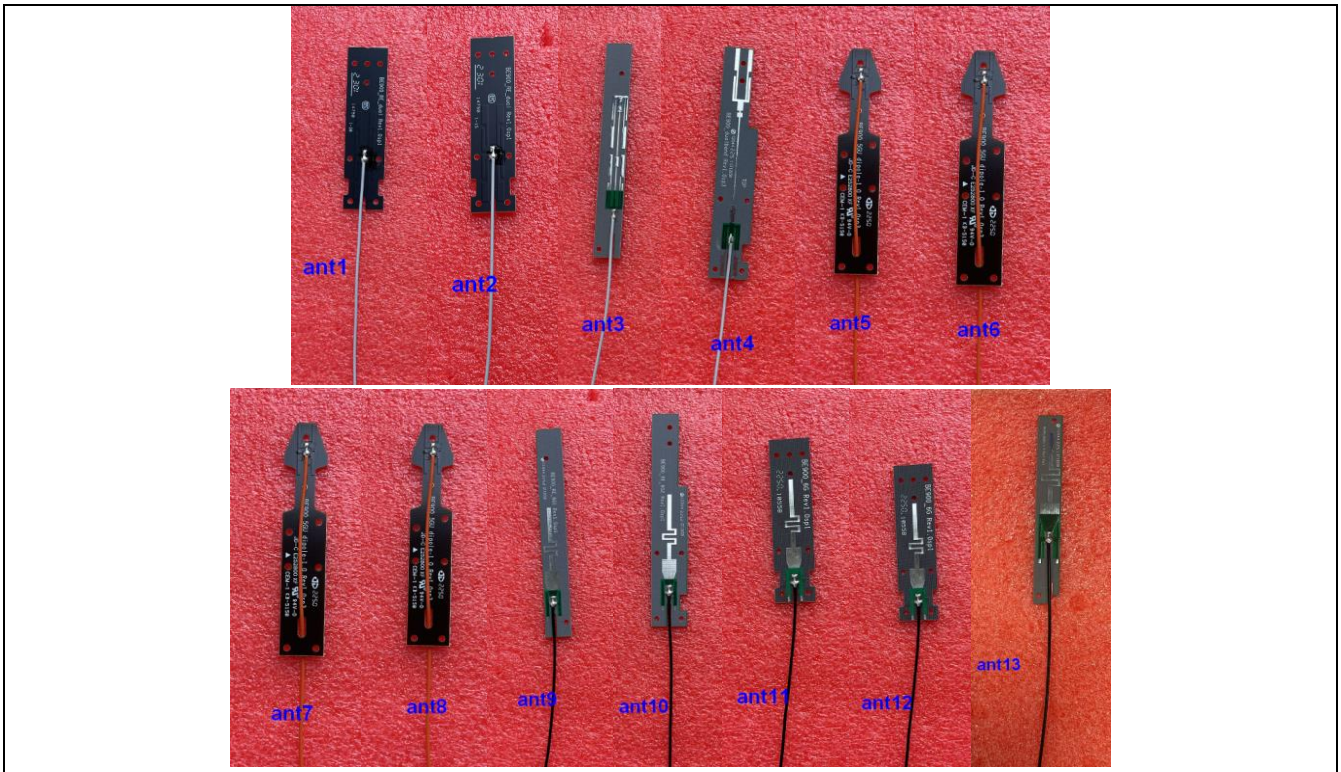

II. Electrical Characteristics

Ant1	
Frequency	2400~2500 & 5150~5450MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.91dBi@2400~2500MHz 3.08dBi@5150~5450MHz
Radiation pattern	Omni-Directional

Ant2	
Frequency	2400~2500 & 5150~5450MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.91dBi@2400~2500MHz 3.08dBi@5150~5450MHz
Radiation pattern	Omni-Directional

Ant3	
Frequency	2400~2500 & 5150~5450MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.91dBi@2400~2500MHz 3.08dBi@5150~5450MHz
Radiation pattern	Omni-Directional

Ant4	
Frequency	2400~2500 & 5150~5450MHz
Impedance	50Ohm
Antenna Type	Dipole

Antenna Gain	2.91dBi@2400~2500MHz 3.08dBi@5150~5450MHz
Radiation pattern	Omni-Directional

Ant5	
Frequency	5450~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.13dBi@5450~5850MHz
Radiation pattern	Omni-Directional

Ant6	
Frequency	5450~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.13dBi@5450~5850MHz
Radiation pattern	Omni-Directional

Ant7	
Frequency	5450~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.13dBi@5450~5850MHz
Radiation pattern	Omni-Directional

Ant8	
Frequency	5450~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.13dBi@5450~5850MHz
Radiation pattern	Omni-Directional

Ant9	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.10dBi@5925~7125MHz
Radiation pattern	Omni-Directional

Ant10	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.10dBi@5925~7125MHz
Radiation pattern	Omni-Directional

Ant11	
Frequency	5925~7125MHz
Impedance	50Ohm

Antenna Type	Dipole
Antenna Gain	3.10dBi@5925~7125MHz
Radiation pattern	Omni-Directional

Ant12	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.10dBi@5925~7125MHz
Radiation pattern	Omni-Directional

Ant13	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.00dBi@5150~5850MHz
Radiation pattern	Omni-Directional

III. Antenna Peak Gain

Ant1											
Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	1.71	2.19	2.20	2.01	1.68	1.67	1.59	1.75	2.91	2.78	2.86
Frequency(MHz)	5150	5200	5250	5300	5350						
Gain(dBi)	2.63	3.02	2.79	2.99	3.08						

Ant2											
Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	2.90	2.91	2.83	2.63	2.58	2.53	2.30	2.21	2.23	2.42	2.62
Frequency(MHz)	5150	5200	5250	5300	5350						
Gain(dBi)	3.02	2.78	3.08	2.93	2.90						

Ant3											
Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	1.26	1.75	2.13	2.49	2.91	2.90	2.74	2.13	1.71	2.06	2.39
Frequency(MHz)	5150	5200	5250	5300	5350						
Gain(dBi)	3.02	2.27	2.89	2.80	2.33						

Ant4											
Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	2.88	2.59	2.56	2.41	2.48	2.55	2.84	2.88	2.91	2.90	2.78
Frequency(MHz)	5150	5200	5250	5300	5350						
Gain(dBi)	2.99	2.64	2.54	2.26	3.02						

Ant5											
Frequency(MHz)	5450	5500	5550	5600	5650	5700	5750	5800	5850		
Gain(dBi)	2.42	2.65	3.13	2.70	2.42	2.78	2.89	2.27	2.97		

Ant6											
Frequency(MHz)	5450	5500	5550	5600	5650	5700	5750	5800	5850		
Gain(dBi)	0.26	1.98	2.00	2.25	0.51	-0.69	-0.37	0.79	0.26		

Ant7											
Frequency(MHz)	5450	5500	5550	5600	5650	5700	5750	5800	5850		
Gain(dBi)	2.73	2.90	2.85	2.99	2.81	3.00	2.49	2.27	2.79		

Ant8											
Frequency(MHz)	5450	5500	5550	5600	5650	5700	5750	5800	5850		
Gain(dBi)	1.42	0.92	1.33	1.27	1.04	1.62	1.39	1.78	2.45		

Ant9													
Frequency(MHz)	5925	5975	6025	6075	6125	6175	6225	6275	6325	6375	6425	6475	6525
Gain(dBi)	1.26	1.29	1.35	2.46	2.71	2.93	3.10	2.66	2.66	2.06	2.18	2.14	2.05
Frequency(MHz)	6575	6625	6675	6725	6775	6825	6875	6925	6975	7025	7075	7125	
Gain(dBi)	2.36	1.96	2.49	2.18	1.81	1.34	0.84	0.52	0.80	0.36	0.26	-0.14	





Ant10													
Frequency(MHz)	5925	5975	6025	6075	6125	6175	6225	6275	6325	6375	6425	6475	6525
Gain(dBi)	1.97	1.80	1.59	2.05	1.89	2.20	1.82	1.63	1.45	0.85	1.17	1.13	0.79
Frequency(MHz)	6575	6625	6675	6725	6775	6825	6875	6925	6975	7025	7075	7125	
Gain(dBi)	1.72	1.68	1.95	2.31	3.04	2.85	2.72	2.24	2.35	1.86	0.63	0.36	

Ant11													
Frequency(MHz)	5925	5975	6025	6075	6125	6175	6225	6275	6325	6375	6425	6475	6525
Gain(dBi)	3.00	1.89	1.21	1.39	1.96	2.38	2.23	2.16	2.12	1.74	1.97	1.90	1.34
Frequency(MHz)	6575	6625	6675	6725	6775	6825	6875	6925	6975	7025	7075	7125	
Gain(dBi)	1.60	2.25	1.96	1.19	1.29	0.93	0.06	1.02	2.00	1.40	0.67	0.73	

Ant12													
Frequency(MHz)	5925	5975	6025	6075	6125	6175	6225	6275	6325	6375	6425	6475	6525
Gain(dBi)	2.97	2.32	1.45	2.07	2.16	2.20	2.04	2.38	1.99	1.62	3.03	2.28	1.70
Frequency(MHz)	6575	6625	6675	6725	6775	6825	6875	6925	6975	7025	7075	7125	
Gain(dBi)	1.69	1.94	1.64	1.18	1.74	1.64	2.10	2.46	2.93	2.91	2.67	2.39	


Ant13											
Frequency(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650
Gain(dBi)	1.32	2.77	2.98	2.40	2.70	2.54	2.18	1.68	3.00	2.81	1.66
Frequency(MHz)	5700	5750	5800	5850							
Gain(dBi)	1.59	1.76	1.77	1.21							

IV. Antenna Radiation Pattern

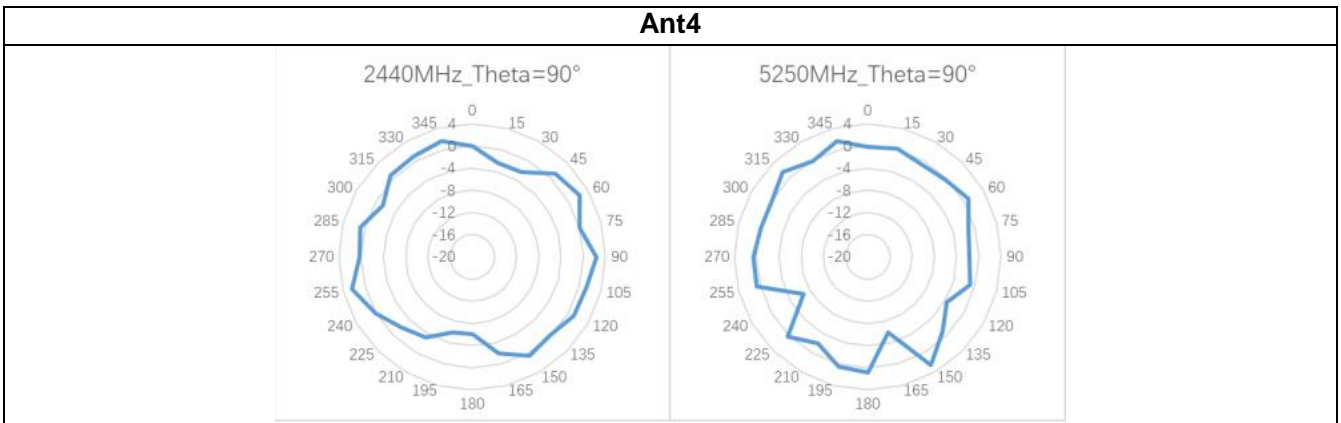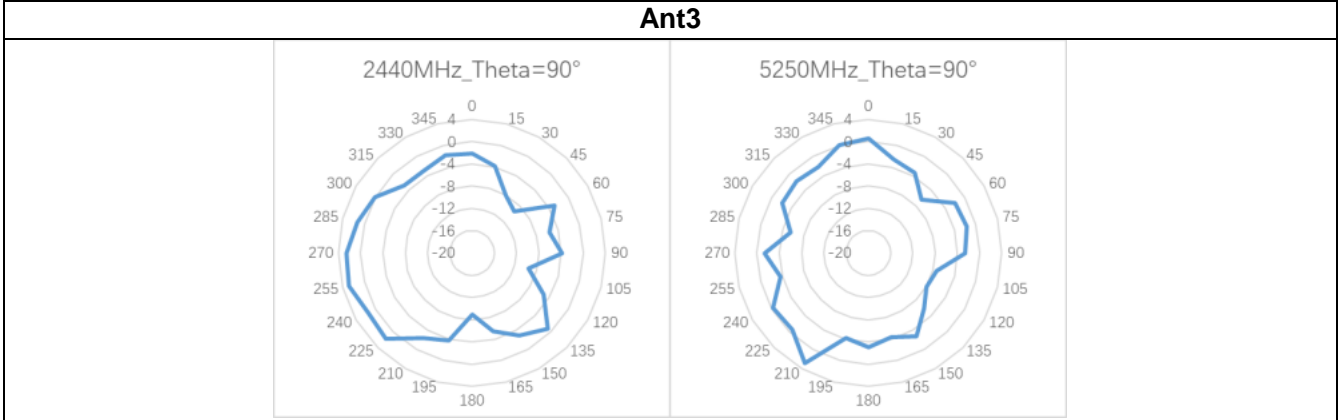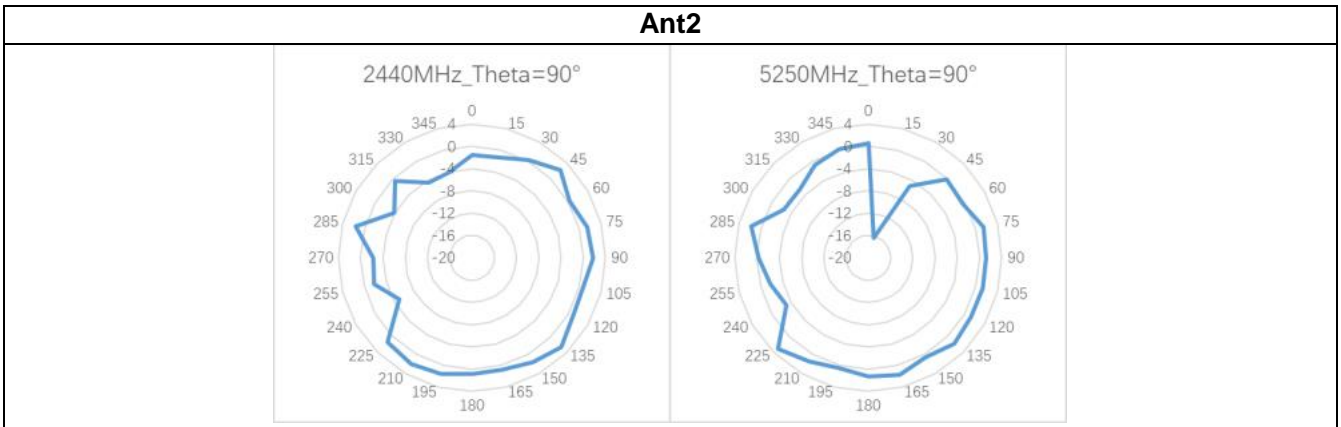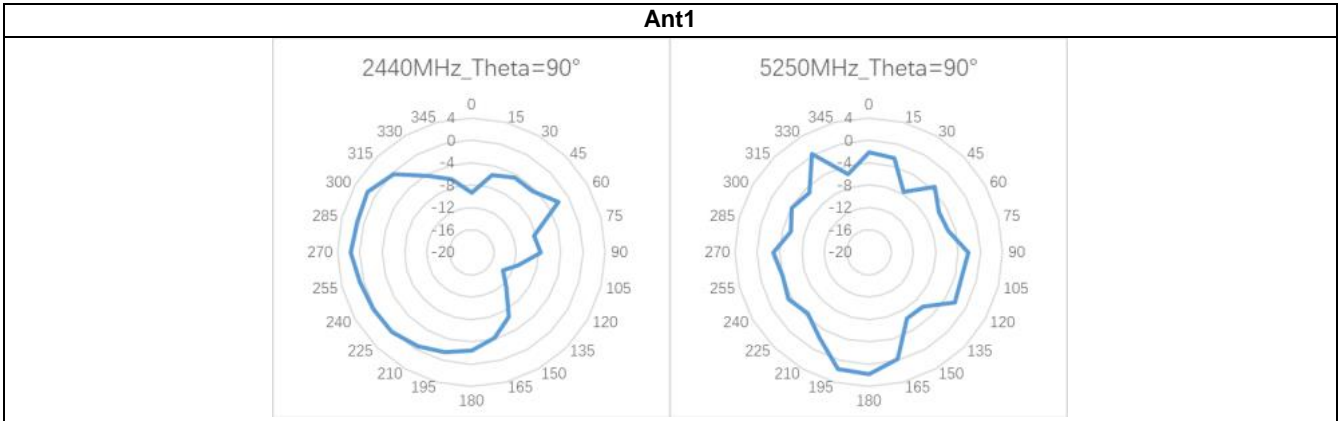


Ant5

5800MHz_Theta=90°

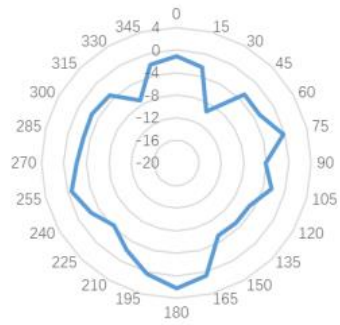


Ant6

5800MHz_Theta=90°

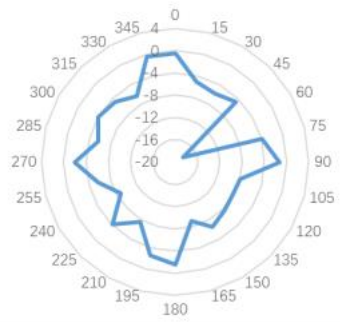


Ant7

5800MHz_Theta=90°

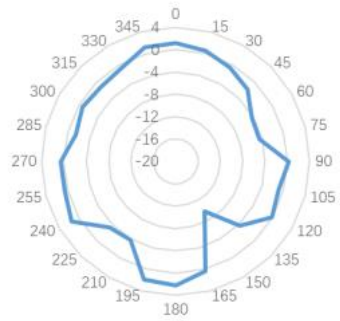


Ant8

5800MHz_Theta=90°

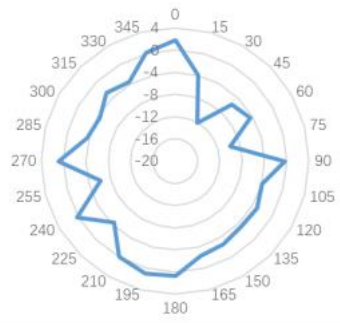


Ant9


6125MHz_Theta=90°

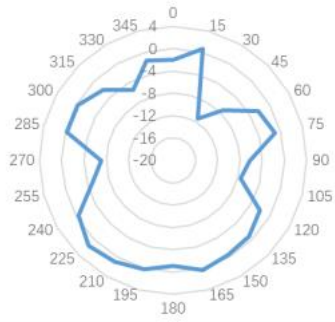

6525MHz_Theta=90°

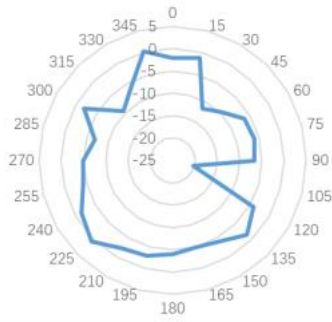


6925MHz_Theta=90°

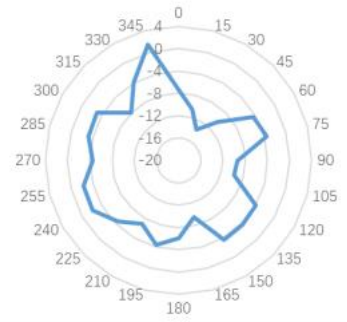


Ant10


6125MHz_Theta=90°

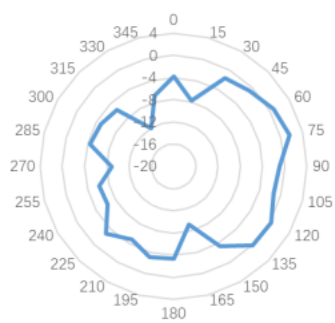

6525MHz_Theta=90°

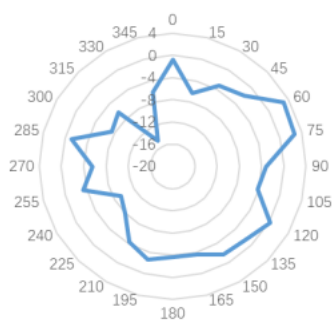


6925MHz_Theta=90°

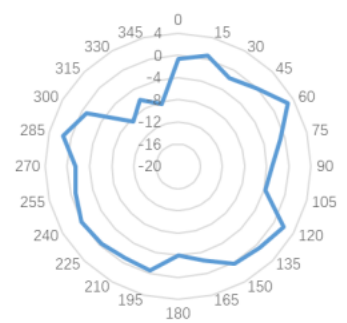


Ant11


6125MHz_Theta=90°

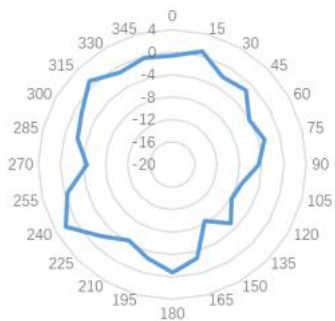

6525MHz_Theta=90°

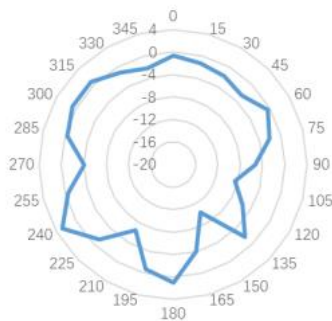


6925MHz_Theta=90°

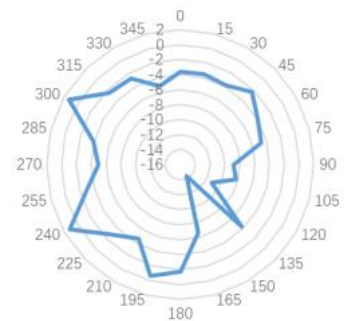


Ant12


6125MHz_Theta=90°

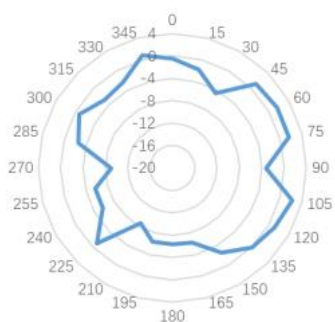

6525MHz_Theta=90°

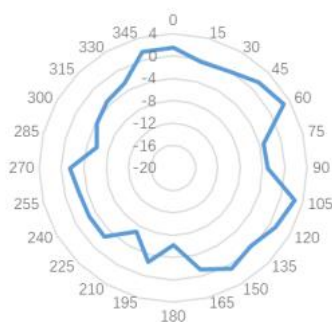


6925MHz_Theta=90°

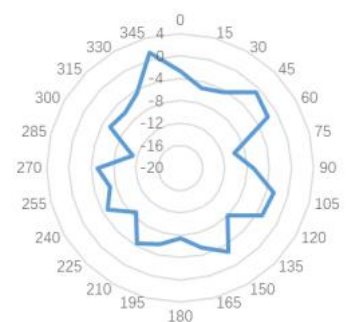

Ant13

5200MHz_Theta=90°

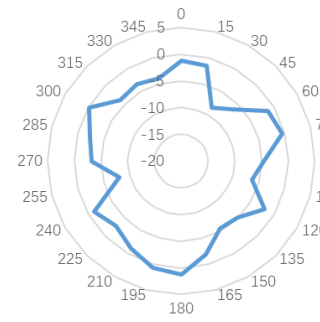

5800MHz_Theta=90°

