


# Quick Start Guide

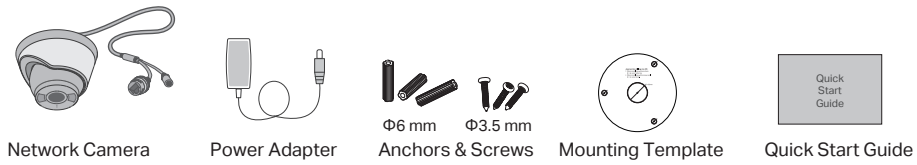


\*Images may differ from actual products.  
©2023 TP-Link 7106510179 REV2.0.0

## Appearance

- ① Camera Base
- ② Reset  
Press for 5 seconds to reset the camera to factory settings.
- ③ microSD Card Slot  
Insert a micro SD card for local storage. Initialize the SD card via VIGI app or other management tools before recording videos.
- ④ Built-in Microphone

### Status LED Indication

Status	Description
Solid red	Starting up
Blink red and green	Ready for setup
Blink green slowly	Connecting to Wi-Fi
Solid green	Connected to Wi-Fi
Blink red slowly	Wi-Fi connection lost
Blink red quickly	Camera resetting
Blink green quickly	Camera updating

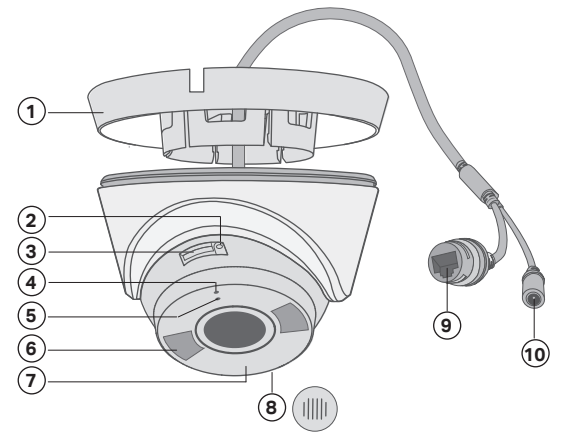


- ⑤ Status LED
- ⑥ White LED
- ⑦ IR LED
- ⑧ Speaker
- ⑨ RJ45 Network Interface
- ⑩ Power Supply Interface

## 1 Wall/Ceiling Mounting

### Option 1: Cable through the wall/ceiling


#### 1. Drill Holes

Stick the mounting template to the desired mounting place. Drill 3 screw holes and 1 cable hole according to the template.

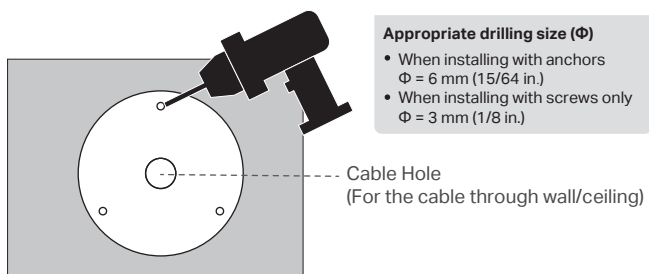


#### 2. Open the Camera Case

Align the notch of the camera body with any score on the camera base, and use a screwdriver to gently pry open the camera case.

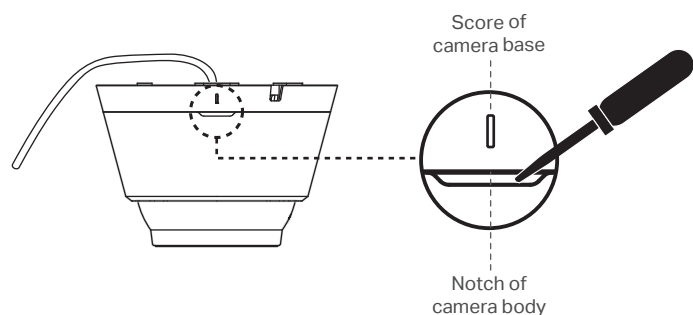


#### 3. Secure the Camera

Route the cable through the wall/ceiling. Insert anchors into the holes, use screws to affix the camera base, and attach the camera to it.

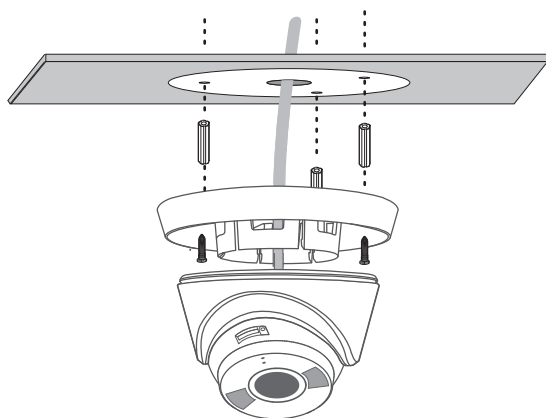

#### 4. Adjust the Surveillance Angle


Adjust the surveillance angle as needed. Make sure the lens is positioned above the IR LED for normal viewing.

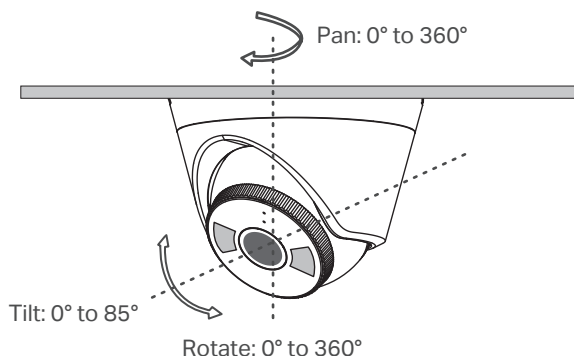

### Option 2: Cable through the side outlet


#### 1. Drill Holes

Stick the mounting template to the desired mounting place. Drill 3 screw holes according to the template.

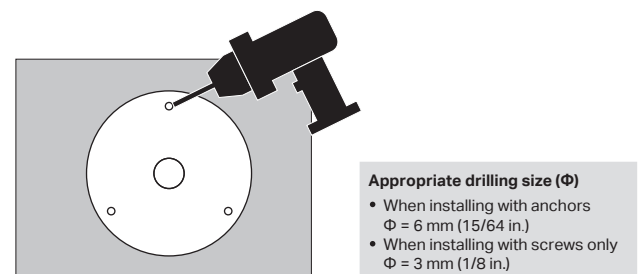


#### 2. Open the Camera Case

Align the notch of the camera body with any score on the camera base, and use a screwdriver to gently pry open the camera case.

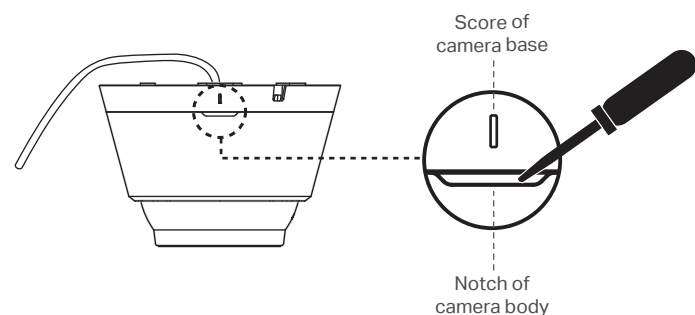


#### 3. Secure the Camera

Route the cable through the side outlet. Insert anchors into the holes, use screws to affix the camera base, and attach the camera to it.

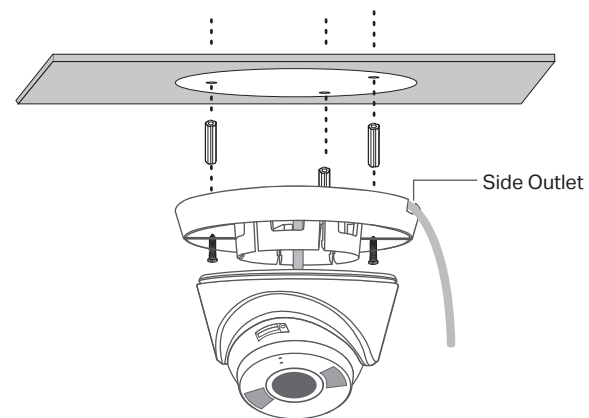


#### 4. Adjust the Surveillance Angle

Adjust the surveillance angle as needed. Make sure the lens is positioned above the IR LED for normal viewing.

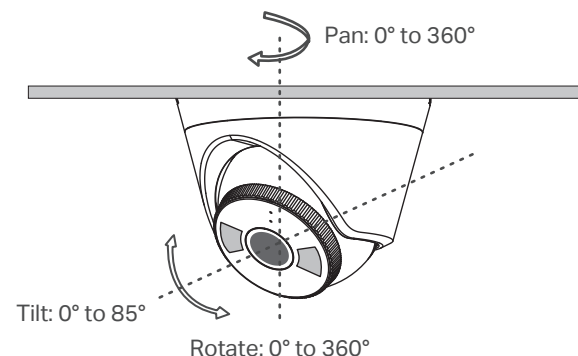

## 2 Set Up Camera

Here is a typical network topology. The camera works with an NVR for easier batch access and management.

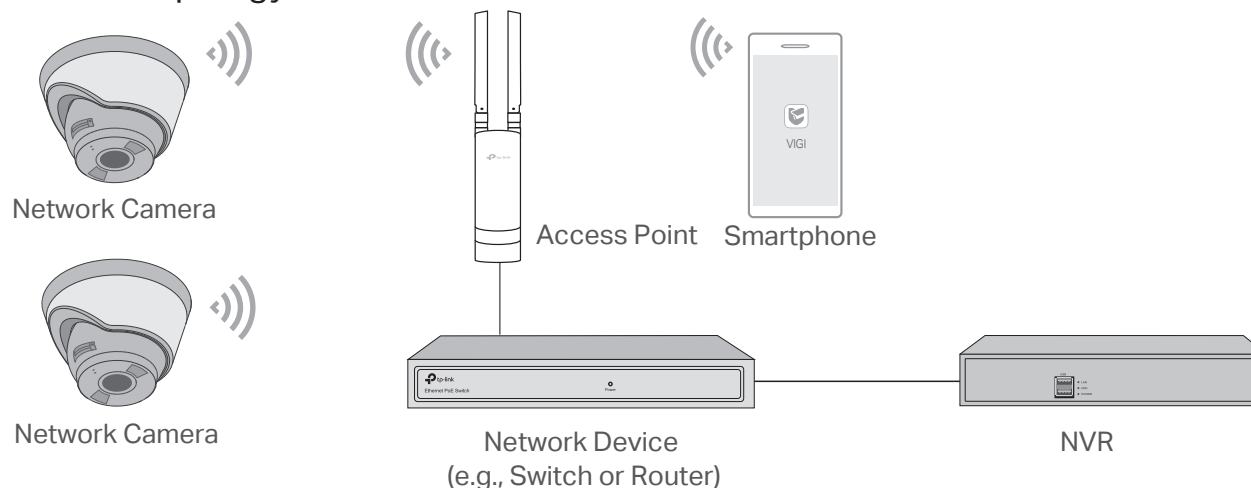

### Step 1. Download the TP-Link VIGI App

Get the TP-Link VIGI App from the Apple App Store or Google Play.



### Step 2. Power On the Camera

Connect your camera to the power source with the provided power adapter.

### Step 3. Set Up

1. Open the TP-Link VIGI app and log in with your TP-Link ID. If you don't have an account, sign up first.
  2. Tap the + button on the top right and follow the app instructions to activate and add your cameras.
- Note: If you want to use the NVR for easier batch access and management later, add the camera to the same network as the NVR.

😊 **Done!** You can now remotely view live video, manage cameras, and get instant alerts.

Note: For more detailed instructions, refer to the user guides at <https://www.tp-link.com/support/>

## More Management Methods

You can also access and manage your cameras via any of the methods below.

### Method 1: Use the camera with your VIGI NVR

Before you start, make sure the NVR is working properly.

1. Right click on the Live View screen and click **Add Camera**.
2. Select your camera and click + to add your camera directly. If you have disabled Plug and Play on your NVR, create a password or use a preset password for your camera.

**If you are using your cameras with other NVR brands, refer to the NVR's User Manual to add cameras.**

### Method 2: Via the VIGI Security Manager (Windows only)

View live video and modify camera settings on your computer.

1. Download the **VIGI Security Manager** on your computer at <https://www.tp-link.com/support/download/vigi-security-manager/>.
2. Install the **VIGI Security Manager** and open it.
3. Cameras on the same network as your computer can be automatically discovered. Go to **Settings > Discovered Devices**, click + **Add** to activate your discovered cameras by setting passwords, and follow the instructions to add your cameras.

### Method 3: Via a Web Browser

View live video and modify camera settings via a web browser.

1. Find the camera's IP address on your router's client page.
2. On your local computer, open a web browser and enter **https://camera's IP address** (<https://192.168.0.60> by default).
3. Select your Country/Region and Time Zone.
4. Set a password to activate the camera.

Done. You can view the live video on the Preview page, and go to the Settings page to change camera settings.

## Frequently Asked Questions (FAQ)

### Q1: What can I do if I fail to configure my camera?

- Check if the camera is powered on properly.
- Make sure you have a 2.4 GHz wireless network for camera connection.
- Make sure your camera and NVR/computer/Phone are in the same subnet. If not, use **TP-Link VIGI** app to add your camera to the same network wirelessly or connect your camera to the same network via an Ethernet cable.
- For other NVR brands, make sure you have activated the camera by setting a password via the **VIGI Security Manager, TP-Link VIGI app** or **web management page**.

### Q2: How do I reset the camera?

- Rotate the sphere and unfasten the two fixed screws to remove the cover. Long press the reset button until the Status LED starts blinking red quickly.

### Safety Information

- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Do not use damaged charger or USB cable to charge the device.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Keep the device away from water, fire, humidity or hot environments.
- The power adapter must be used indoors. Make sure that the temperature of the power adapter is within 0-40°C.



TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863. The original EU Declaration of Conformity may be found at <https://www.tp-link.com/en/support/ce/>

### Q3: What should I do if I forgot the password of the camera?

- You can reset the password of the camera via **VIGI NVR, VIGI Security Manager, VIGI app** or **web management page**. For more details, refer to their User Guides.
- You can reset the camera and activate it again. During the activation process, you can set a new password.

### Q4: What should I do if the SD card is not working properly?

- Make sure you are using a microSD card.
- Unplug the SD card and insert it again. Make sure you have inserted the SD card correctly.
- It's recommended to use a Class 10 micro SD card or higher, with storage from 8 GB to 256 GB.
- Make sure you have initialized the microSD card in **TP-Link VIGI** app.
- If the problem still persists, contact our technical support.

For more questions, please refer to <https://www.tp-link.com/support/faq/2850/>

For technical support and other information, please visit <https://www.tp-link.com/support/>, or simply scan the QR code.

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017. The original UK Declaration of Conformity may be found at <https://www.tp-link.com/support/ukca/>