




SpeedWedge 2.1R2

Thorsten Krauland

20.01.2021

1 Technical Data

Power supply	9 - 28V DC
Current consumption	typ. 80 mA @ 12V DC
Power consumption	< 1W
Frequency and Power	24.15 GHz to 24.25 Ghz at 12.7 dBm EIRP Contains FCC ID UXS-SMR3X3 Contains IC ID: 6902A-SMR3X3
Update rate	20 Hz
Speed range	typ. 0.8 km/h to 90 km/h The Range depends on the application and can differ from this values
Temperature range	Storage -40°C - 85°C Operation -20°C - 55°C
Environmental protection	IP6KX, IPX7, IPX9K entspr. ISO 20653
	  

2 Serial Interface RS232

Baud-Rate	19200
Parity	No Parity
Data bits	8
Stopp bits	1
Update rate	20 Hz

Output data sets are field separated.

Data set separator Line break <CR><LF>, resp. 0x0D 0x0A

Field separator Comma

Field 1 Data set identifier: \$PMSO

Field 2 Velocity in km/h

Field 3 Direction of velocity (1–Forward; -1–Backward; 0–no direction given)

Field 4 Internal value for diagnostic purposes

Field 5 Internal value for diagnostic purposes

Checksum Checksum is separated by * (asterix) and calculated according to NMEA 0183. Representaion as ASCII-HEX number. The checksum is the 8-bit exclusive of all characters in the message, including the commas between fields, but not including the \$ and asterisk delimiters.


\$PMSO,2.22,1,29966,0*2E
\$PMSO,2.50,1,31659,0*21
\$PMSO,3.19,1,56565,0*20
\$PMSO,3.84,1,87022,0*2E
\$PMSO,4.17,1,117585,0*13
\$PMSO,4.69,1,131921,0*1C
\$PMSO,4.84,1,129882,0*1E
\$PMSO,4.87,1,129739,0*12
\$PMSO,4.77,1,128083,0*1A

3 Pulse Output

The sensor generates a pulse- / frequency signal proportional to the velocity with $130 \frac{\text{Pulses}}{\text{m}}$ resp. $36.111 \frac{\text{Hz}}{\frac{\text{km}}{\text{h}}}$ according to DIN 9684 / ISO 11786. High and low level are driven to power supply level resp. GND.

4 Connection

Description	Pin Connector	Cable colour
Power supply +12V DC(< 200mA at 12V)	1	Brown
Power supply GND	2	White
Pulse Push/Pull	3	Blue
RS232 TX. Sensor Transmit Data	4	Black
RS232 RX. Sensor Receive Data	5	Grey



1:BN 4:BK
 2:WH 5:GY
 3:BU

Figure 1: Pin-Out M12 Connector male

5 Mounting

The sensor is to be mounted level to the ground facing forward under the vehicle with free view towards the ground. Distance to ground 100 mm to 700 mm. At larger distance the lowest measurable velocity is being increased.

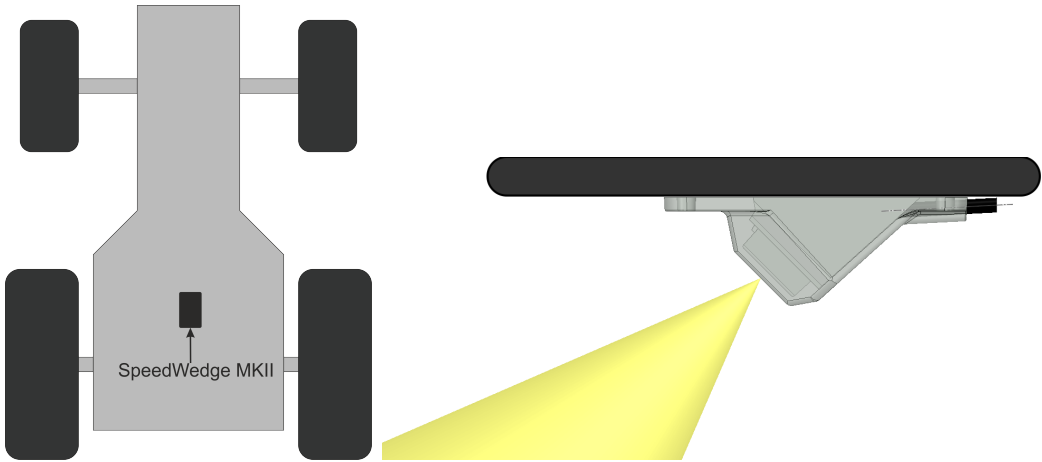


Figure 2: Required mounting position under Vehicle

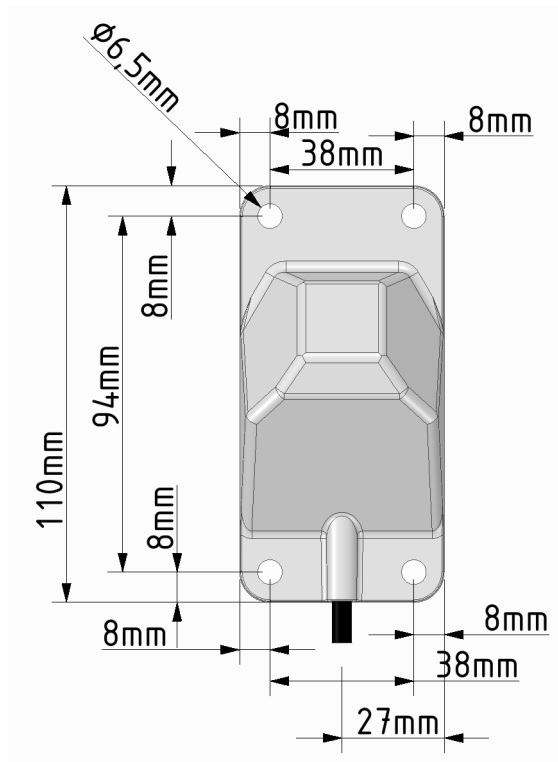


Figure 3: Dimensions SpeedWedge 2.1 - top view

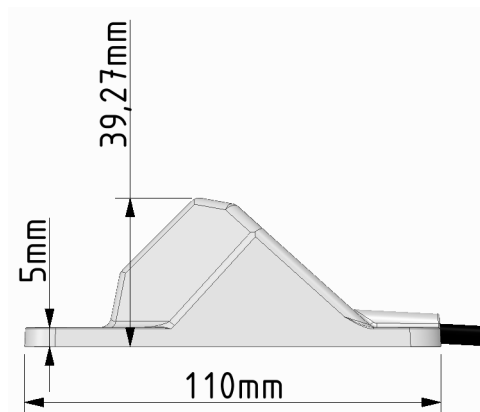


Figure 4: Dimensions SpeedWedge 2.1 - side view

6 Regulatory Statements

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.