

## 1 KEYWORDS

- *KG03*
- *Bluetooth*
- *Antenna*

## 2 INTRODUCTION

The antenna used on the KG03 reference design is described in this application note.

This application note describes the antenna dimensions, the RF performance and considerations for complying with regulatory limits when using this design.

## Size

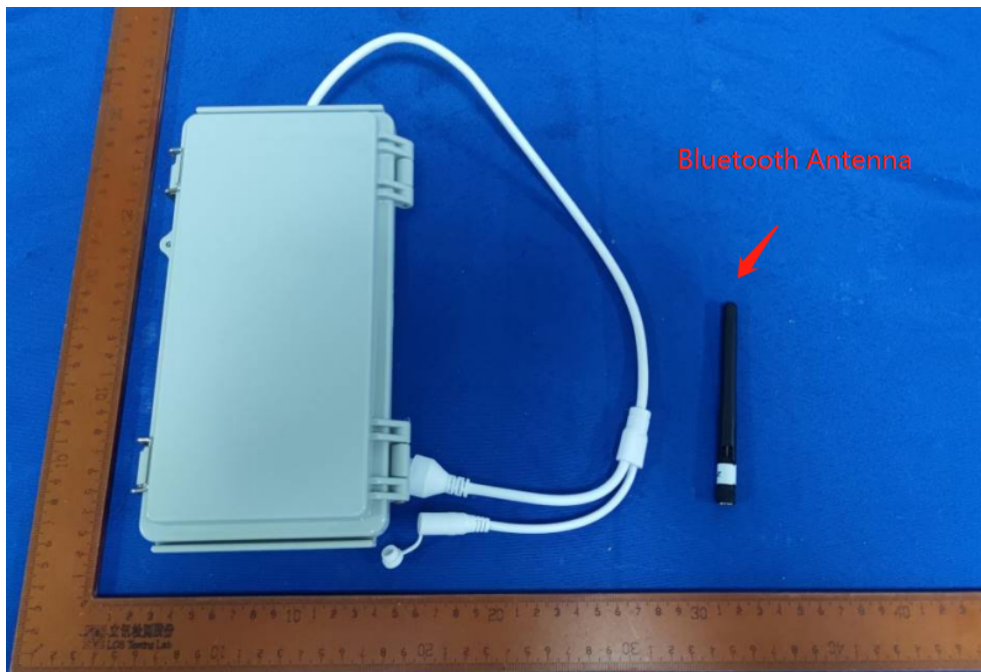


Figure 1: KG03

### 3 Testing Conditions

#### Antenna Electrical Characteristics

Parameters	Value
Frequency Range	2400~2500MHz
Antenna Description	External Antenna
VSWR	<2.0
Impedence	50 ohm
Gain	0dBi
Polarization	Single
Azimuth	Omni-directional

#### Product Testing Conditions

Parameters	Value
Working Temp	-30°C ~ +60°C

### 4 ANTENNA DESIGN

The antenna on the KG03 reference design is a meandered Inverted F Antenna (IFA). The IFA was designed to match an impedance of 50 ohm at 2.45 GHz. Thus no additional matching components are necessary.


#### 4.1 Design Goals

The reflection at the feed point of the antenna determines how much of the applied power is delivered to the antenna. A reflection of less than -10 dB across the 2.4 GHz ISM band, when connected to a 50 ohm source, was a design goal. Reflection of less than -10 dB, or VSWR less than 2, ensures that more than 90% of the available power is delivered to the antenna. Bandwidth is in this document defined as the frequency band where more than 90% of the available power is delivered to the antenna. Another design goal was to fit the size of the antenna on a KG03 and to obtain good performance also when the KG03 is connected to a computer.

#### 4.2 Simulation

IE3D from Zeland, which is an electromagnetic simulation tool, was used to design the antenna. The accuracy of the simulation is controlled by the mesh. An increase of the mesh increases the simulation time. Thus, for initial simulations mesh = 1 should be used. When a fairly good result is achieved a higher mesh should be used to obtain more accurate results. Comparison of simulation and measurement results shows that the measured reflection is between the result obtained with mesh = 5 and mesh = 1; see Figure 2 for details.


---

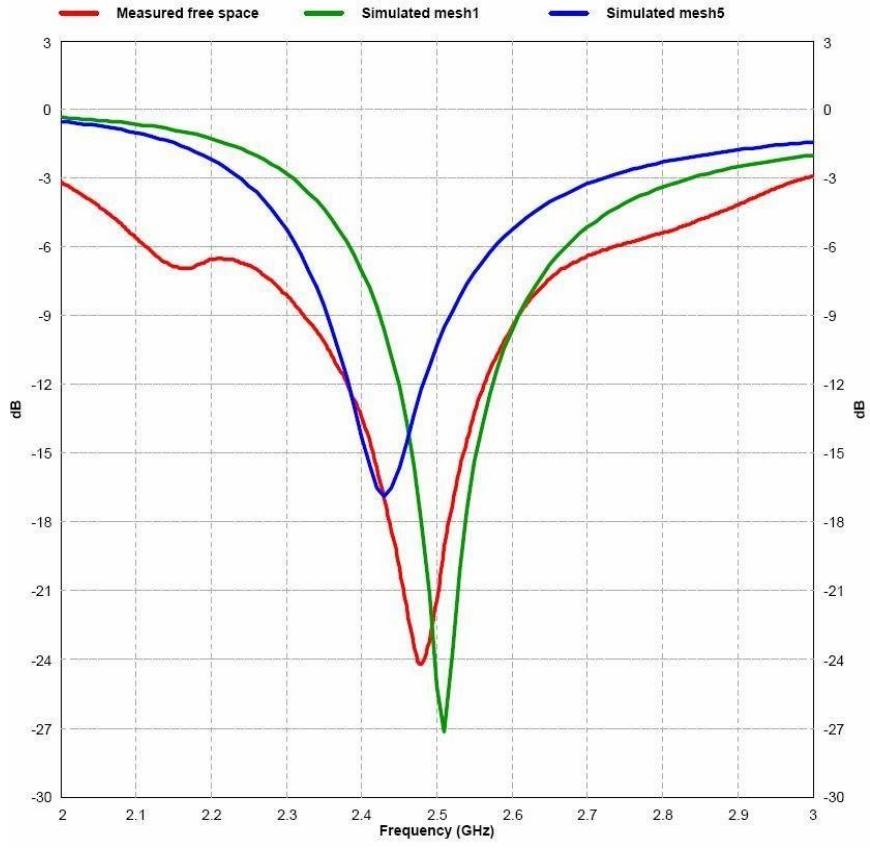


## 5 TEST RESULTS

### 5.1 Reflection

All the reflection measurements were performed with a network analyzer connected to a semi-rigid coax cable, which was soldered to the feed point of the antenna. Because of the small size antenna and the small ground plane this kind of measurements is heavily affected by the presence and placement of the coax cable. This influence can result in a small uncertainty in resonance frequency and measured reflection. Typically different placement of the semi-rigid coax cable could change the resonance frequency with 5 -10 MHz and the reflection with 3 - 4 dB.

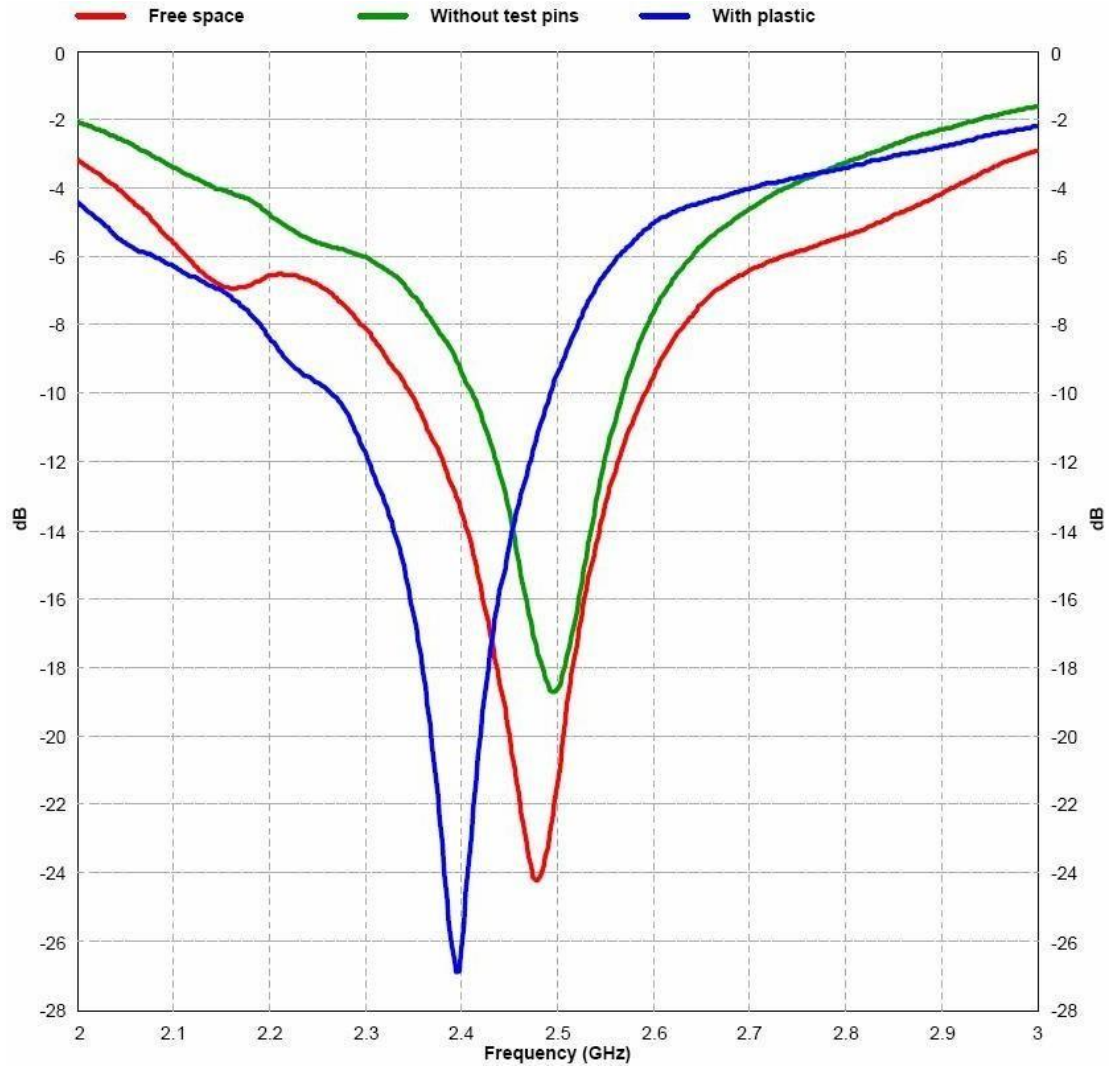

# Antenna 3D patterns

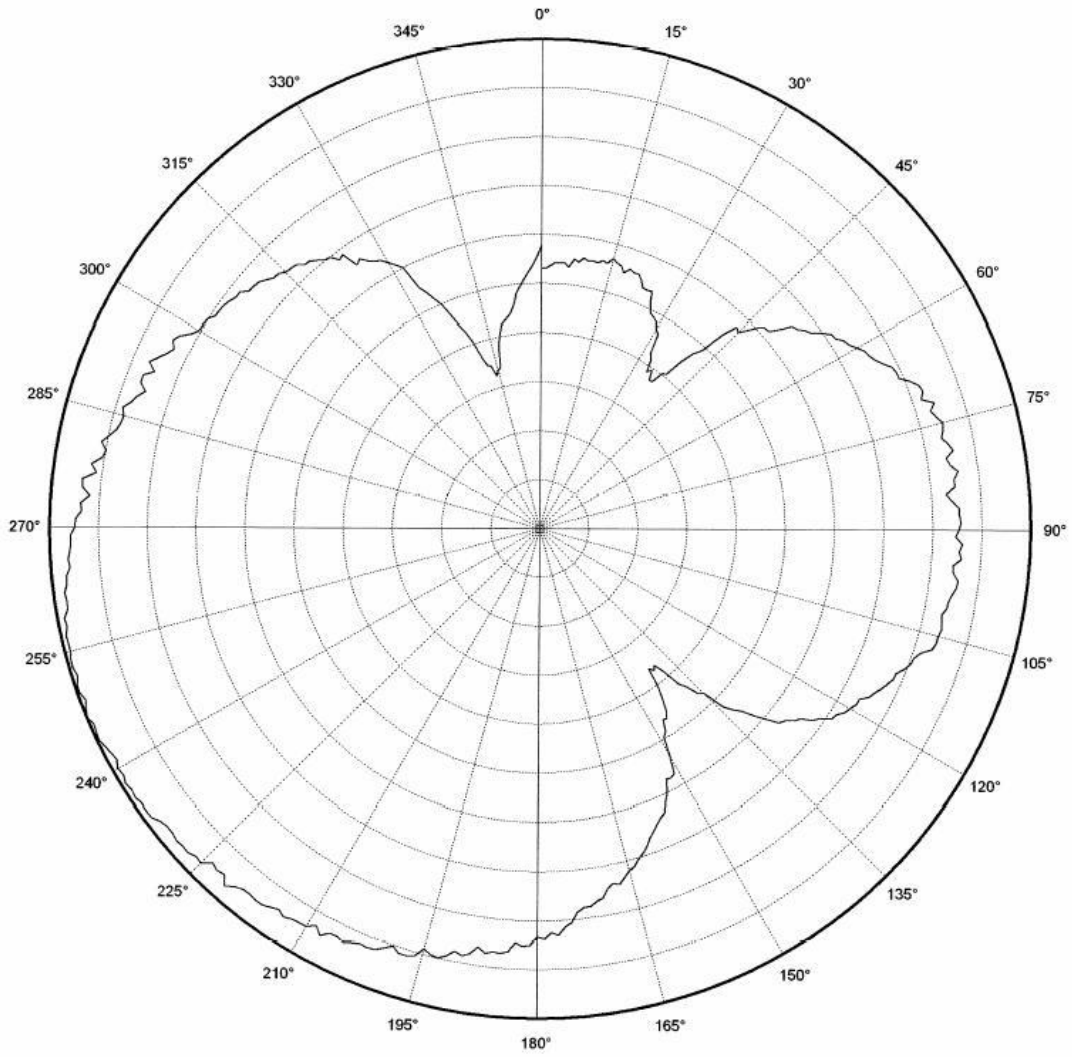


**Vertical Polarization**  
**usb XY**

**CF 2450.000 MHz**  
**4 dB/ div**  
**Ref Lev: -0.5dBi**

**Figure : XY Plane**



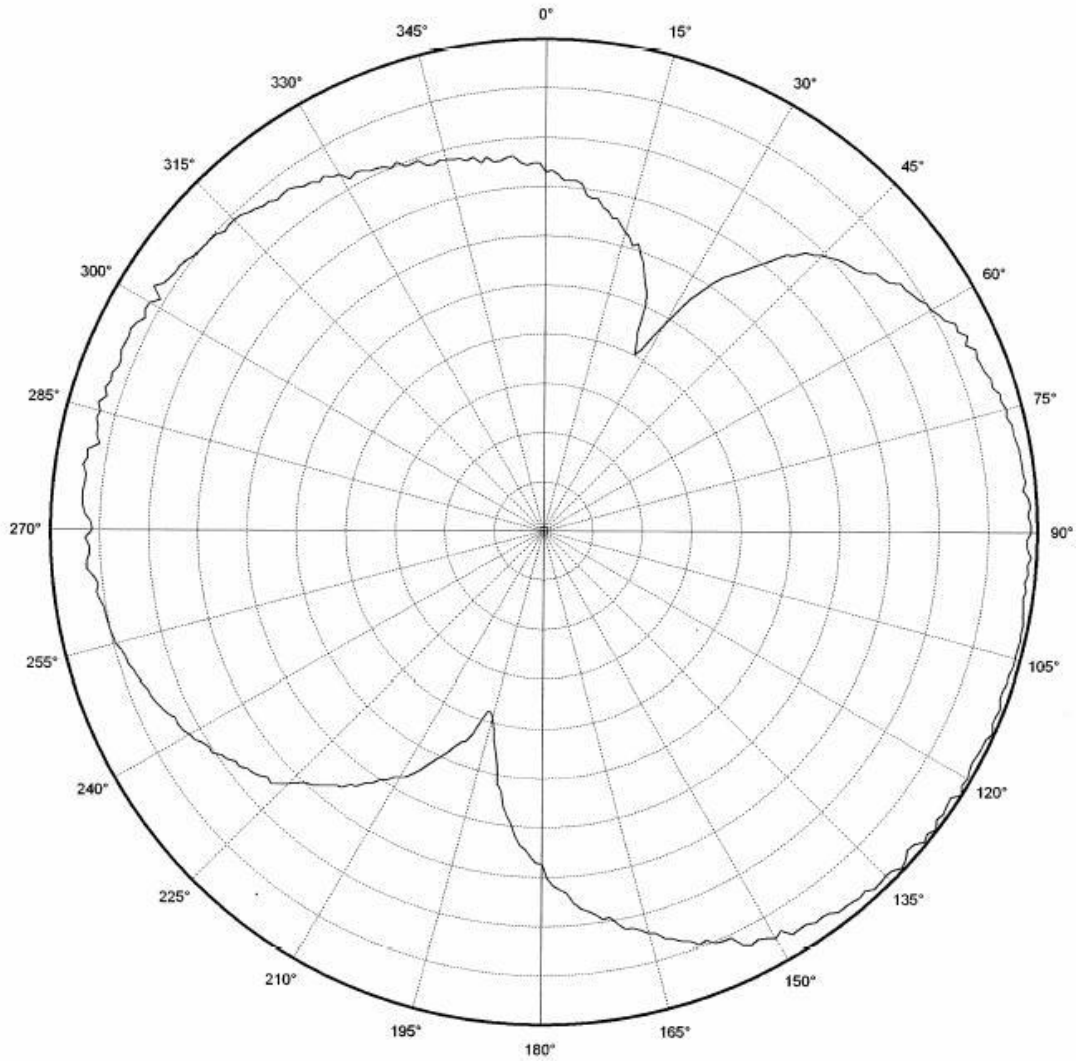

Horizontal Polarization

usb XY


CF 2450.000 MHz

5 dB/ div

Ref Lev: 0.0dBi

Figure :XY Plane



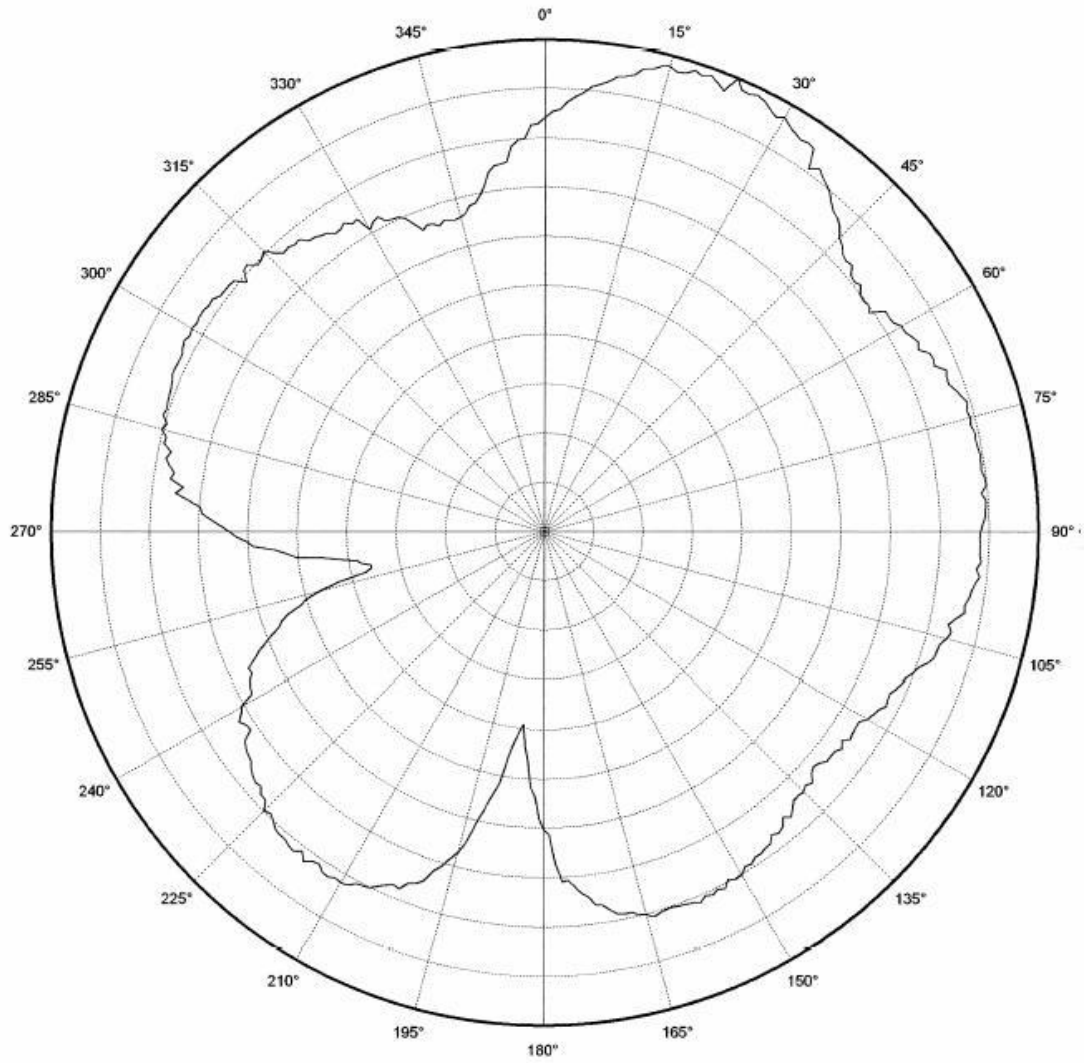

**Vertical Polarization**

**usb XZ**


**CF 2450.000 MHz**

**4 dB/ div**

**Ref Lev: -0.2dBi**

**Figure : XZ Plane**



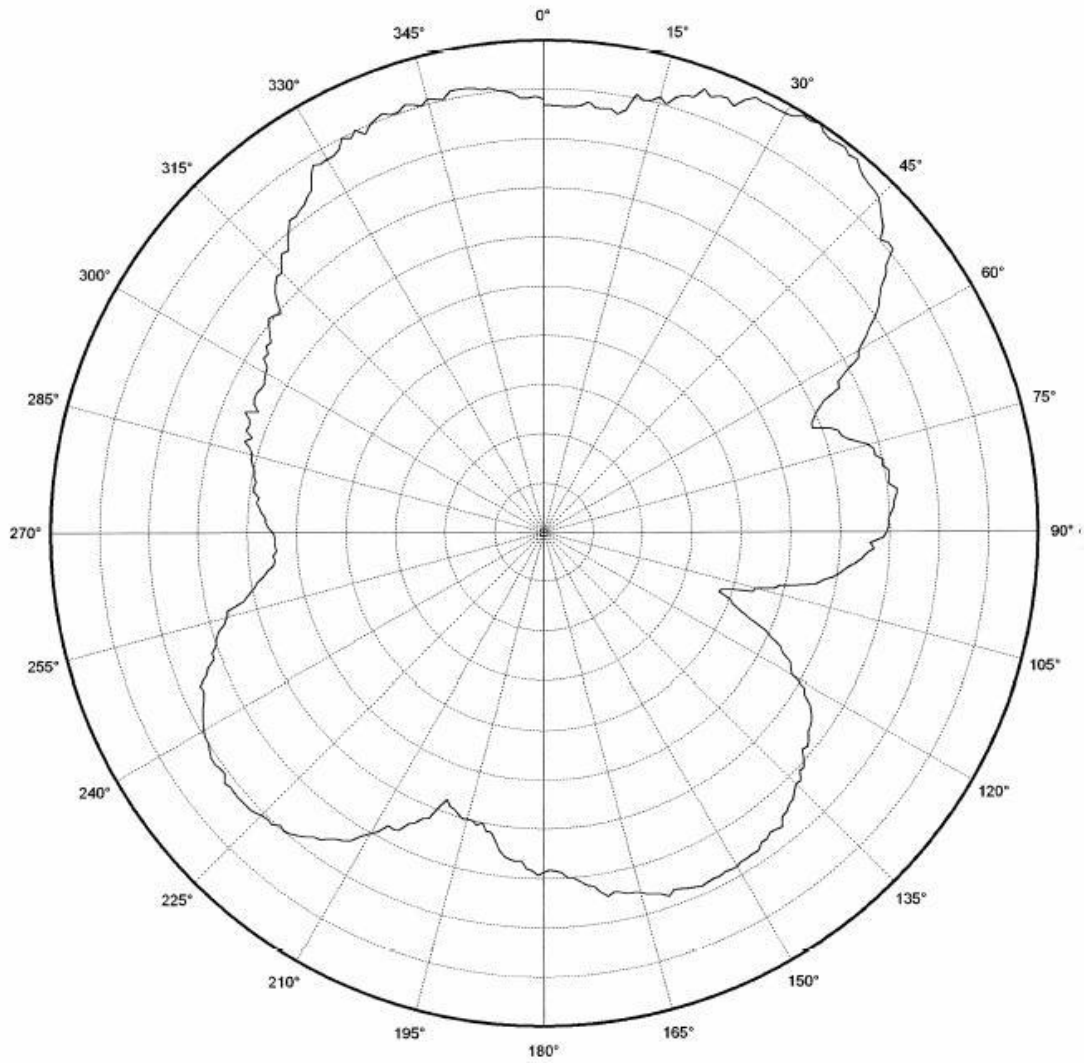

Horizontal Polarization

usb XZ


CF 2450.000 MHz

4 dB/ div

Ref Lev: -0.1dBi

Figure : XZ Plane



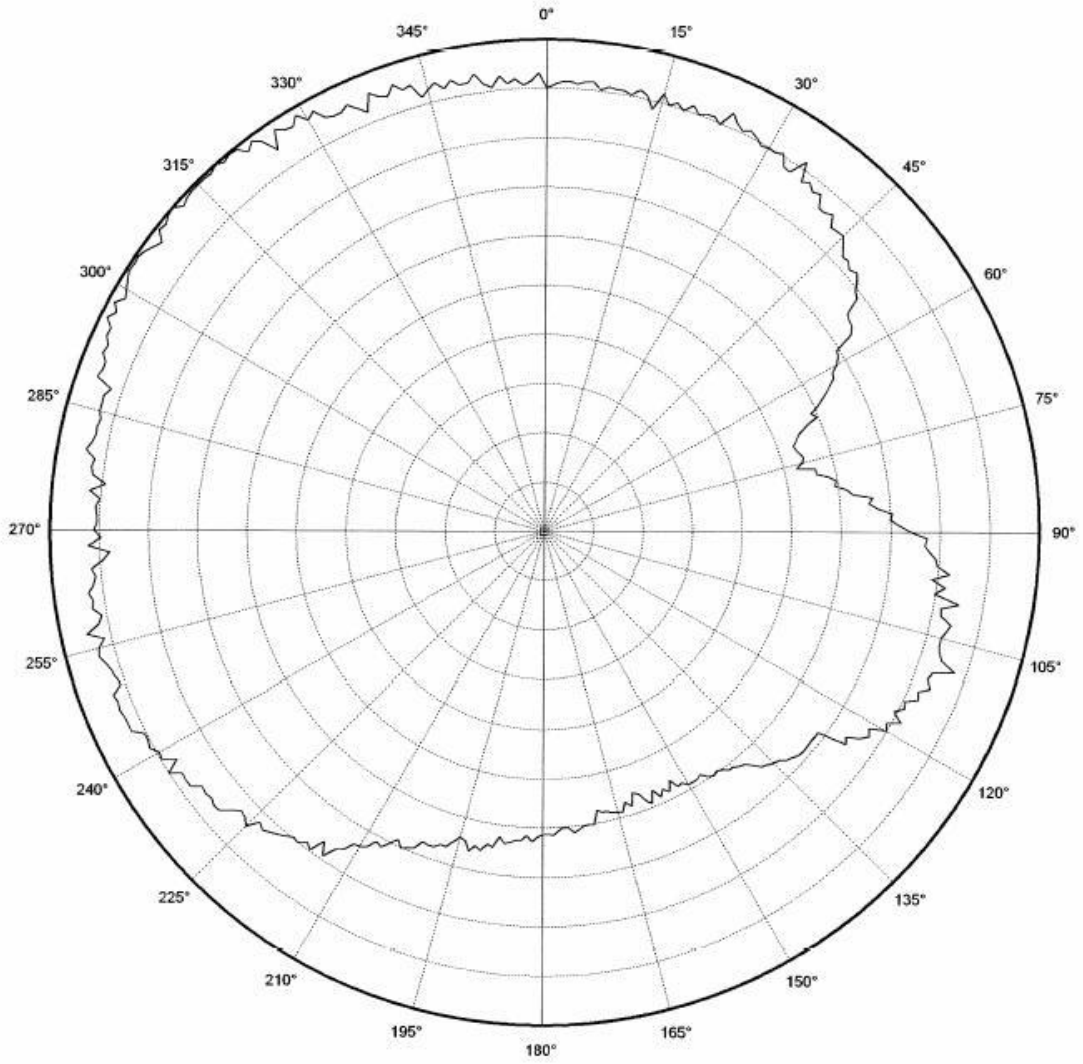

**Vertical Polarization**

**usb YZ**


**CF 2450.000 MHz**

**2 dB/ div**

**Ref Lev: -0.1dB**

**Figure : YZ Plane**



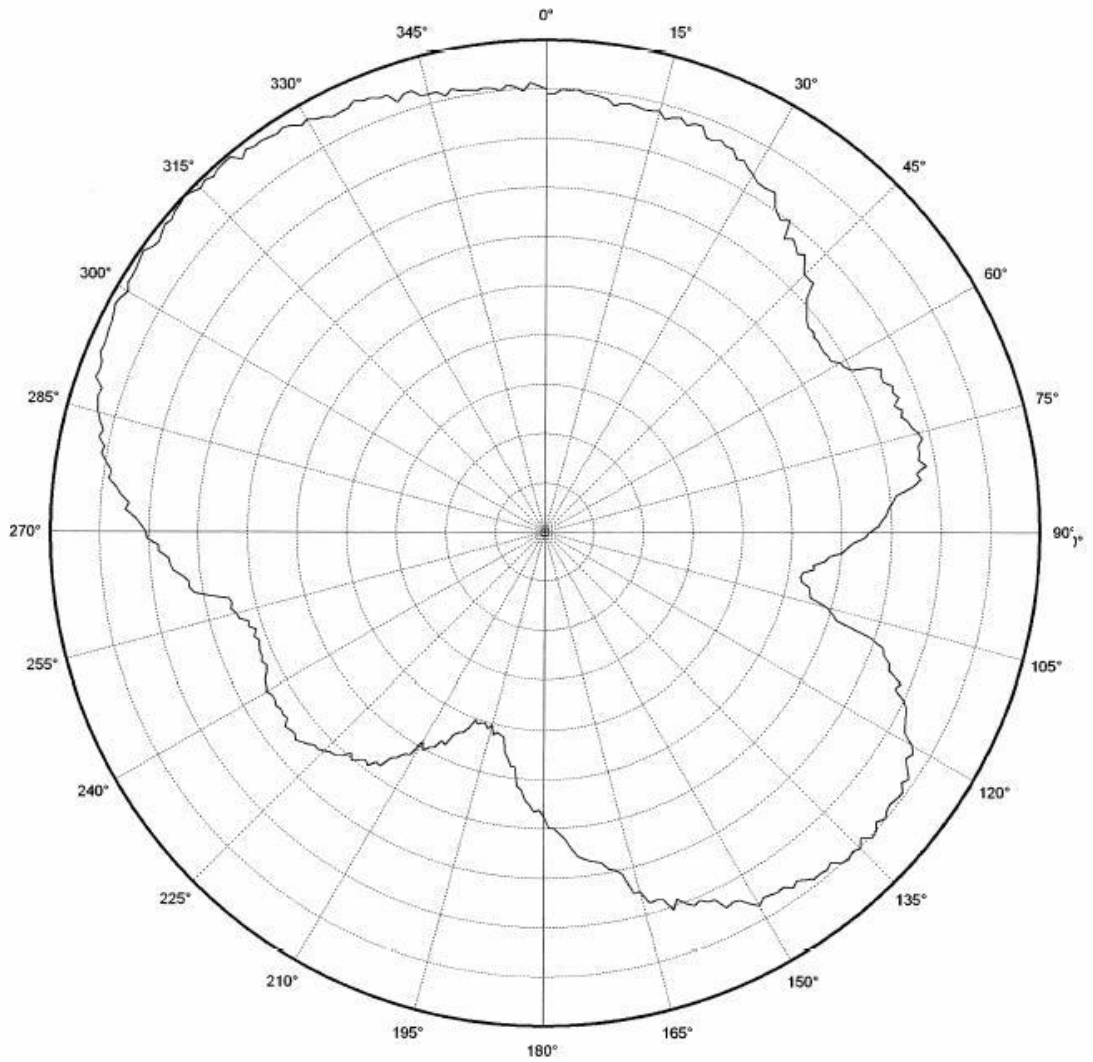

**Horizontal Polarization**

**usb YZ**


**CF 2450.000 MHz**

**3 dB/ div**

**Ref Lev: -1.2dBi**

**Figure YZ Plane**



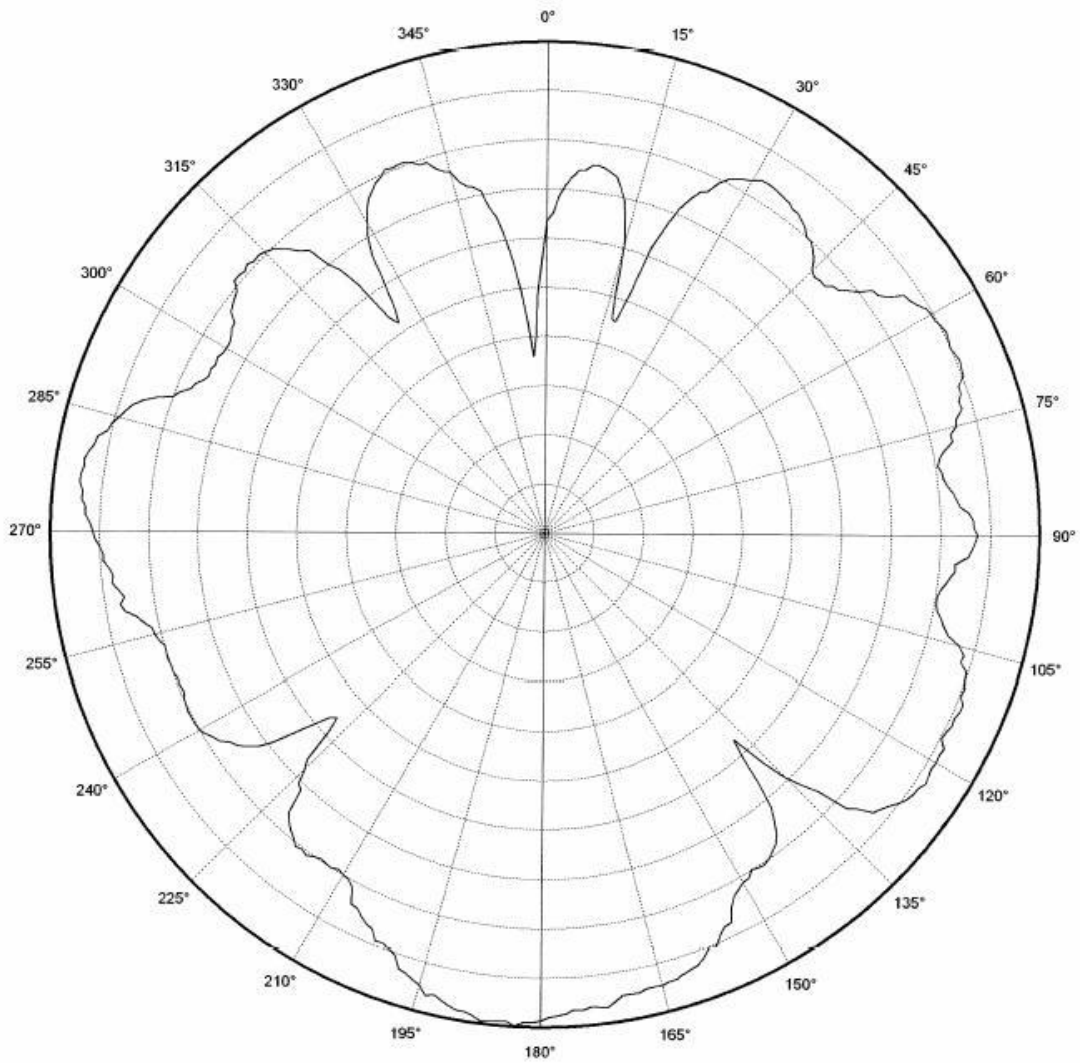


**Vertical Polarization**  
**Laptop USB XY**

**CF 2450.000 MHz**  
**5 dB/ div**  
**Ref Lev: -0.2dBi**

**Figure: Laptop XY Plane**

---

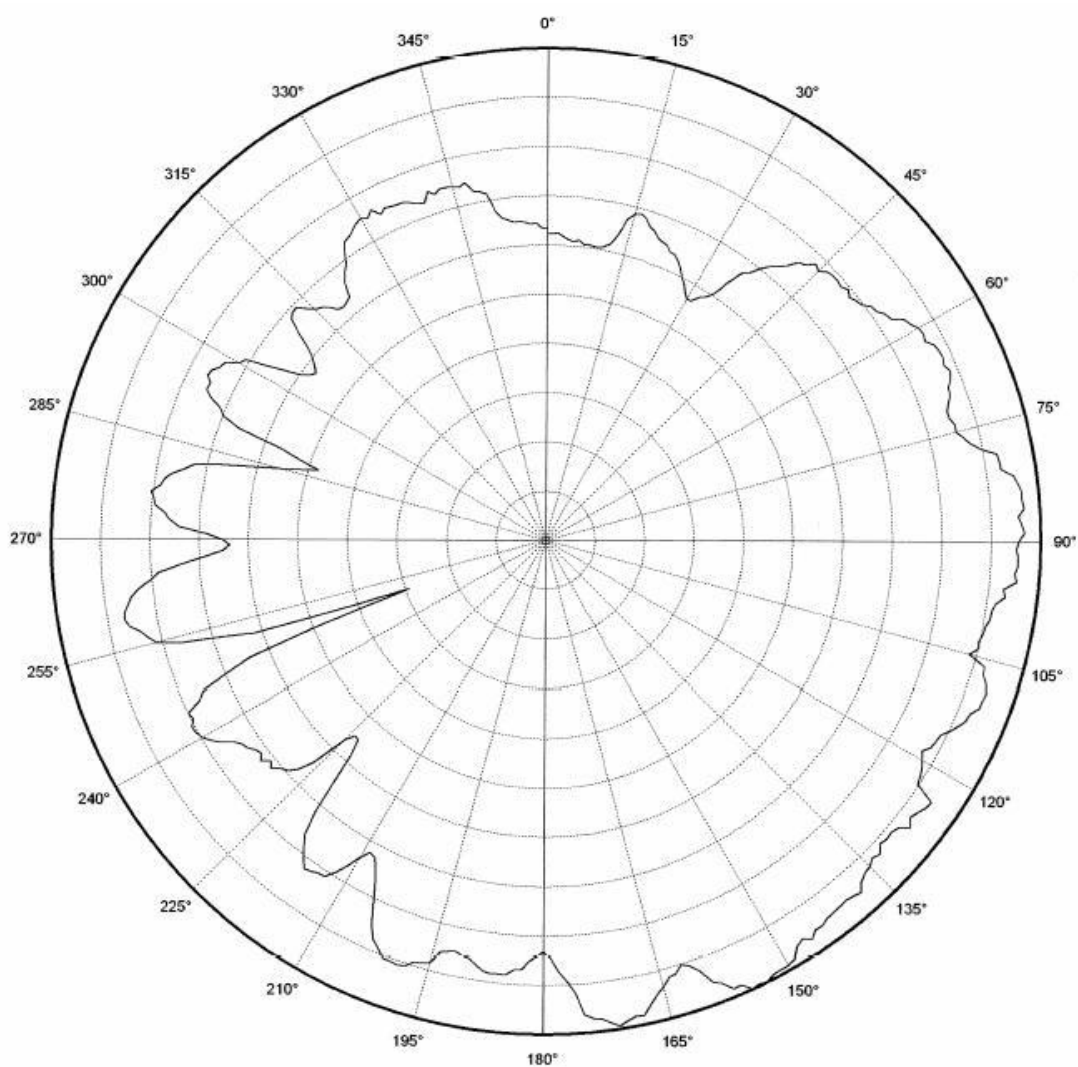

**Horizontal Polarization**  
**Laptop USB XY**

**CF 2450.000 MHz**  
**4 dB/ div**  
**Ref Lev: -0.3dBi**

**Figure: Laptop XY**