




- (1) * CD-3L ON ALL VARIABLE COMPONENTS. MAKE THE TWO VAC VARIABLE CAPACITORS REMOVABLE WITH THEIR CD-3L AND MOUNTING INSULATORS STILL ATTACHED ON A BRACKET WITH FLOORPAN.
- (2) ALL FIBERGLASS MOUNTING INSULATORS.
- (3) BOWL REMOVABLE WITH PLATE COVER FOR HOLE IN REXOLITE PANEL.
- (4) WEATHERPROOF & MILITARIZED BOX.
- (5) NO HARDWARE TO PROTRUDE FROM BOX BY MORE THAN 1" ON ALL SIDES.
- (6) SEE 24 DECEMBER 2003 SPECS FROM WOLF COACH.
- (7) CABINET TO BE NO LARGER THAN 89"W x 45-3/8"H x 54-1/8"D, WITH 15-3/8"W x 14-1/2"D CUTOUT IN TOP LEFT CORNER.

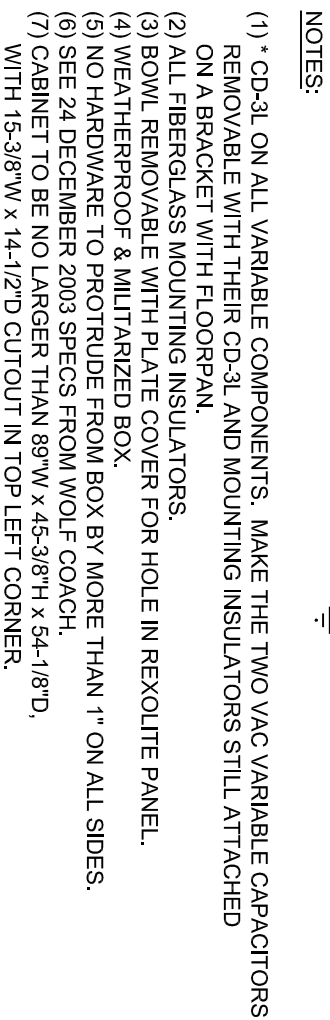

U.S. ARMY SOMS-B (V)¹
ALL-BAND, 10 KW ATU TO OPERATE WITH
KTL 50m FLARED UNIPOLE SYSTEM

REF DWG:	DRAWN:	DESIGNED:
	L. CARR	B. COX
REV:	CHECKED:	APPROVED:
DWG NO:	DATE:	SCALE:
A-5203-1	02/23/04	N.T.S.