




# 5.3G WIFI

## Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	81.18	0.91	6.67
NVNT	a	5280	Ant1	81.13	0.91	6.67
NVNT	a	5320	Ant1	81.19	0.9	6.67
NVNT	a	5260	Ant2	81.37	0.9	7.14
NVNT	a	5280	Ant2	81.35	0.9	6.67
NVNT	a	5320	Ant2	81.26	0.9	6.67
NVNT	n20	5260	Ant1	83.32	0.79	5.56
NVNT	n20	5280	Ant1	83.13	0.8	5.88
NVNT	n20	5320	Ant1	83.38	0.79	5.88
NVNT	n20	5260	Ant2	83.43	0.79	5.88
NVNT	n20	5280	Ant2	83.52	0.78	5.88
NVNT	n20	5320	Ant2	83.43	0.79	5.56
NVNT	n40	5270	Ant1	83.61	0.78	5.56
NVNT	n40	5310	Ant1	83.6	0.78	5.56
NVNT	n40	5270	Ant2	83.79	0.77	5.56
NVNT	n40	5310	Ant2	83.79	0.77	5.56
NVNT	ac20	5260	Ant1	82.48	0.84	5.88
NVNT	ac20	5280	Ant1	82.39	0.84	6.25
NVNT	ac20	5320	Ant1	82.44	0.84	6.25
NVNT	ac20	5260	Ant2	82.63	0.83	6.25
NVNT	ac20	5280	Ant2	82.6	0.83	6.25
NVNT	ac20	5320	Ant2	82.65	0.83	6.25
NVNT	ac40	5270	Ant1	81.79	0.87	6.25
NVNT	ac40	5310	Ant1	81.69	0.88	6.25
NVNT	ac40	5270	Ant2	81.88	0.87	6.67
NVNT	ac40	5310	Ant2	81.88	0.87	6.67
NVNT	ac80	5290	Ant1	82.36	0.84	5.88
NVNT	ac80	5290	Ant2	82.38	0.84	6.25



Test Graphs

Duty Cycle NVNT a 5260MHz Ant1


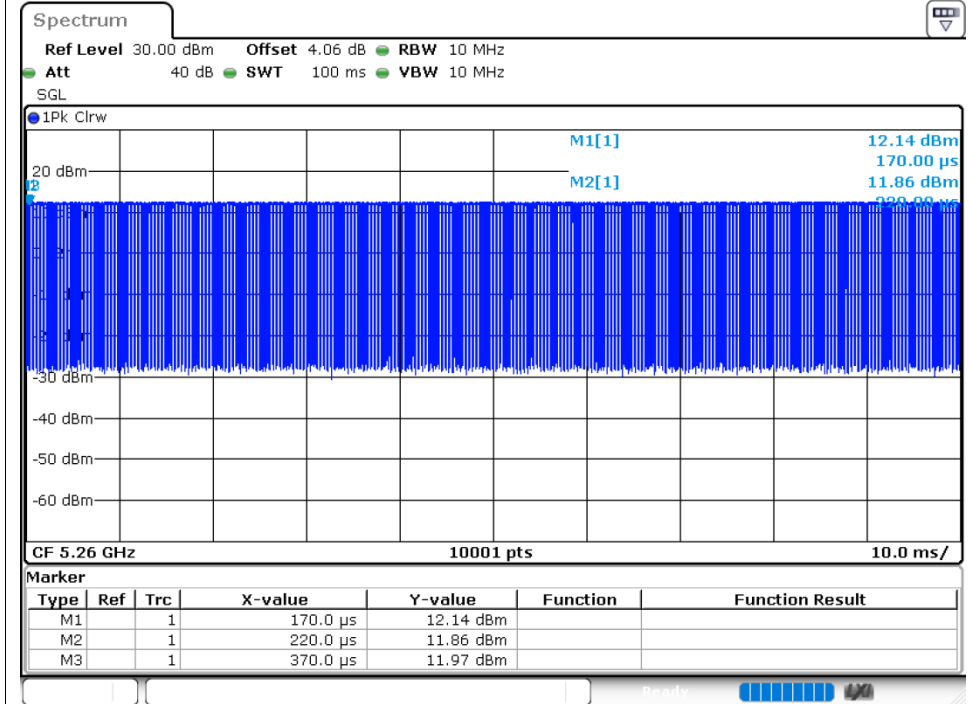




Duty Cycle NVNT a 5280MHz Ant1


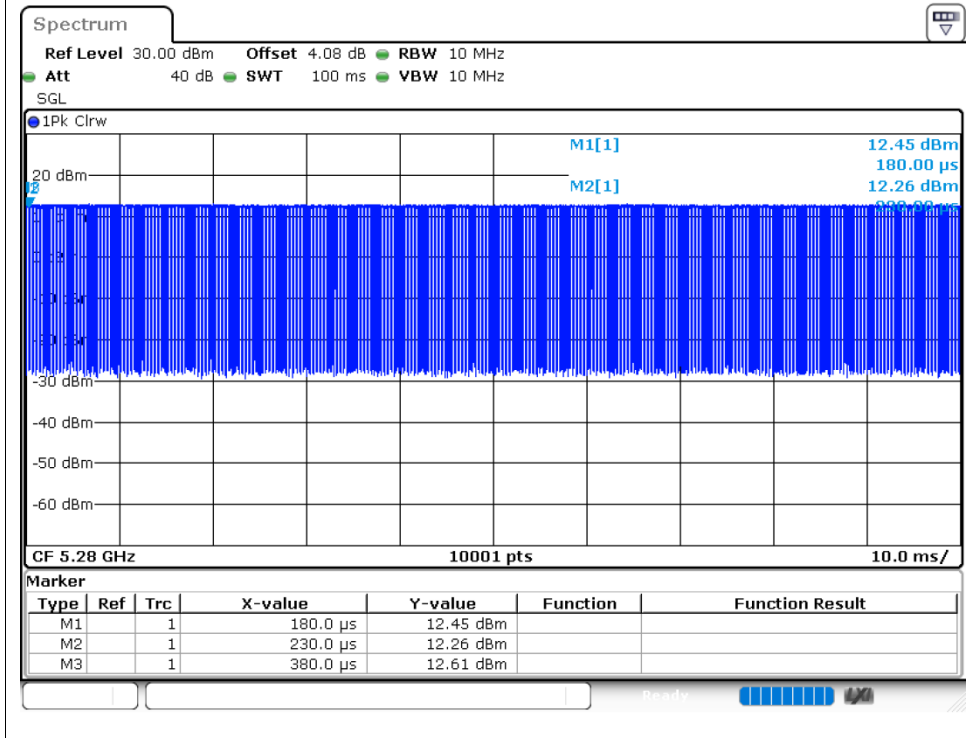


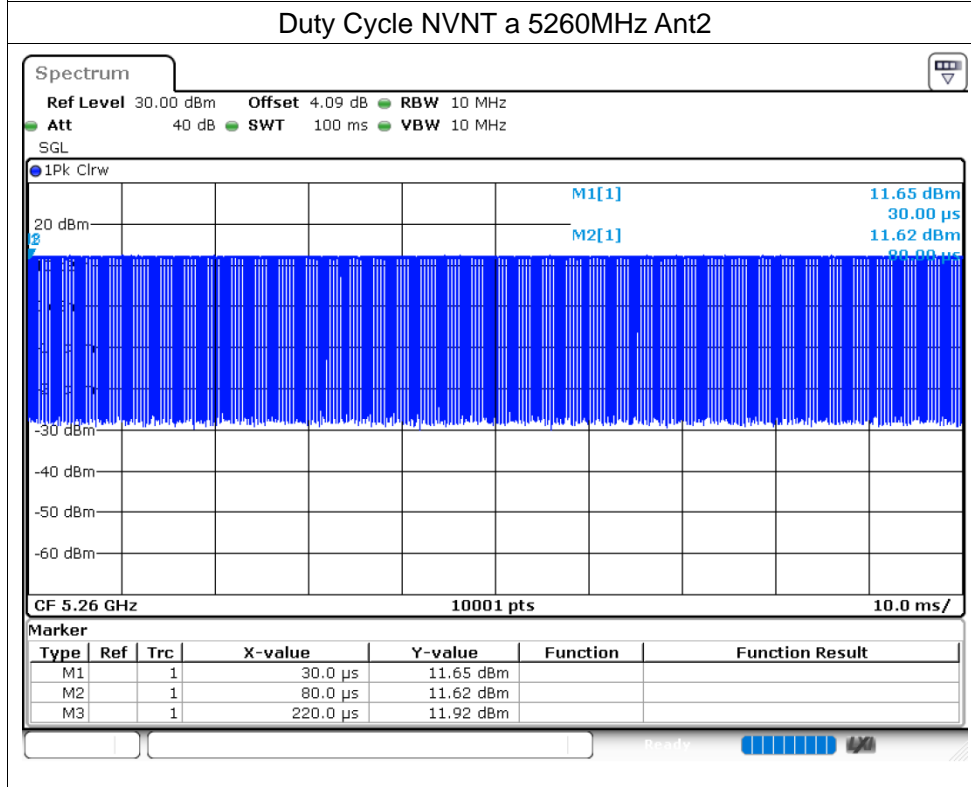
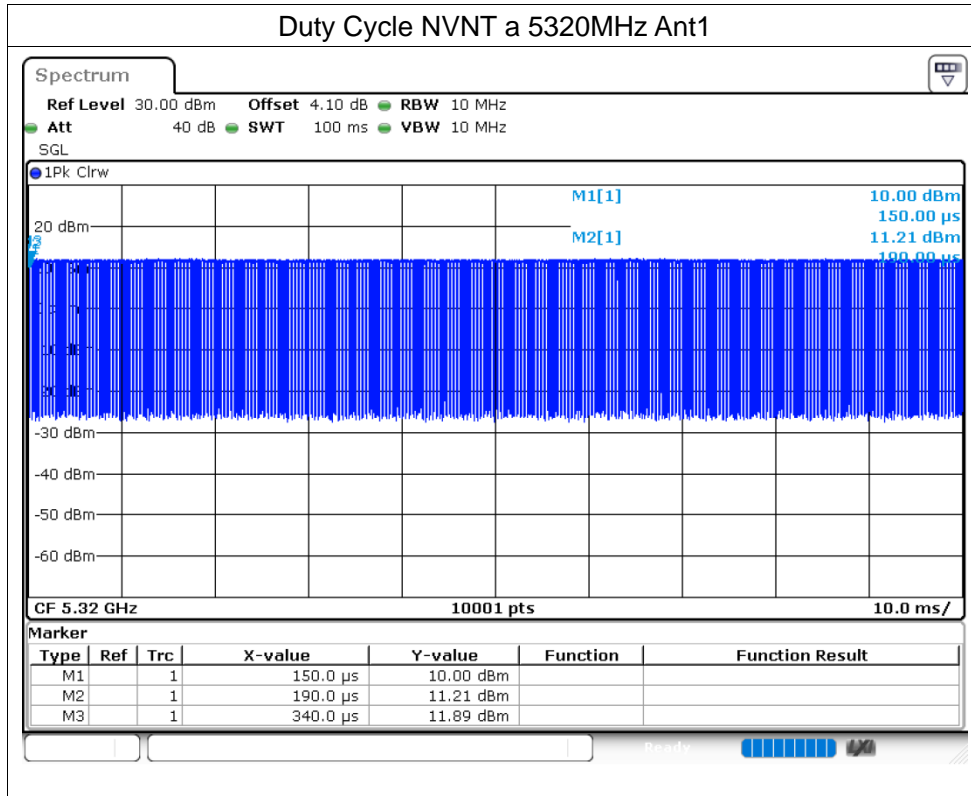




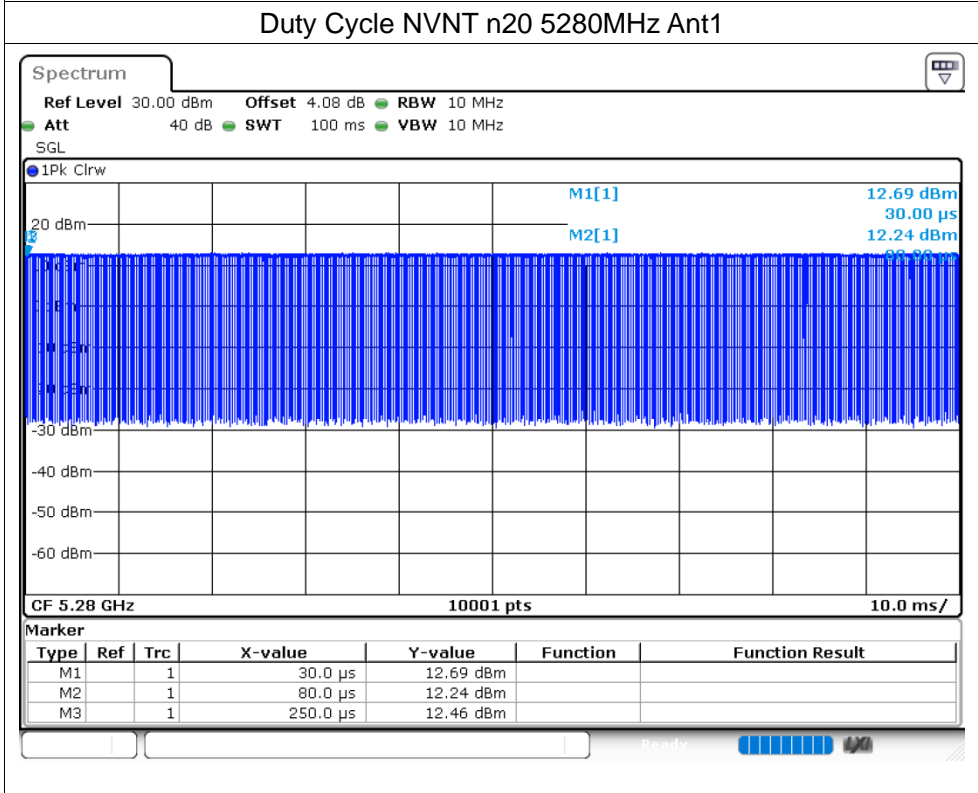
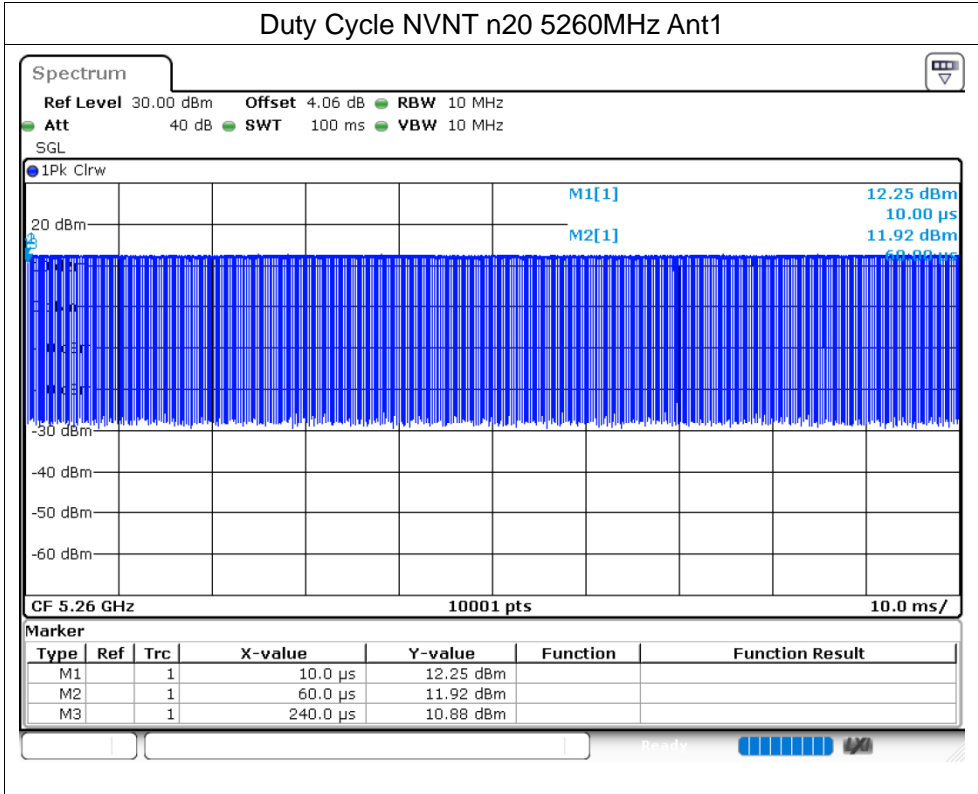


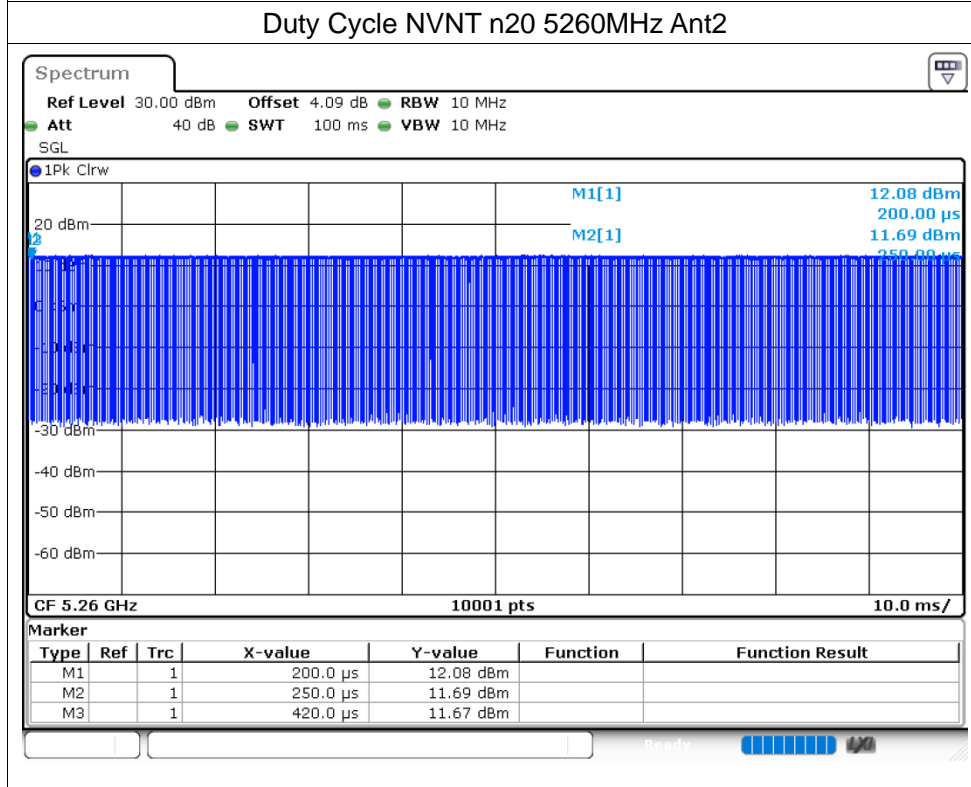
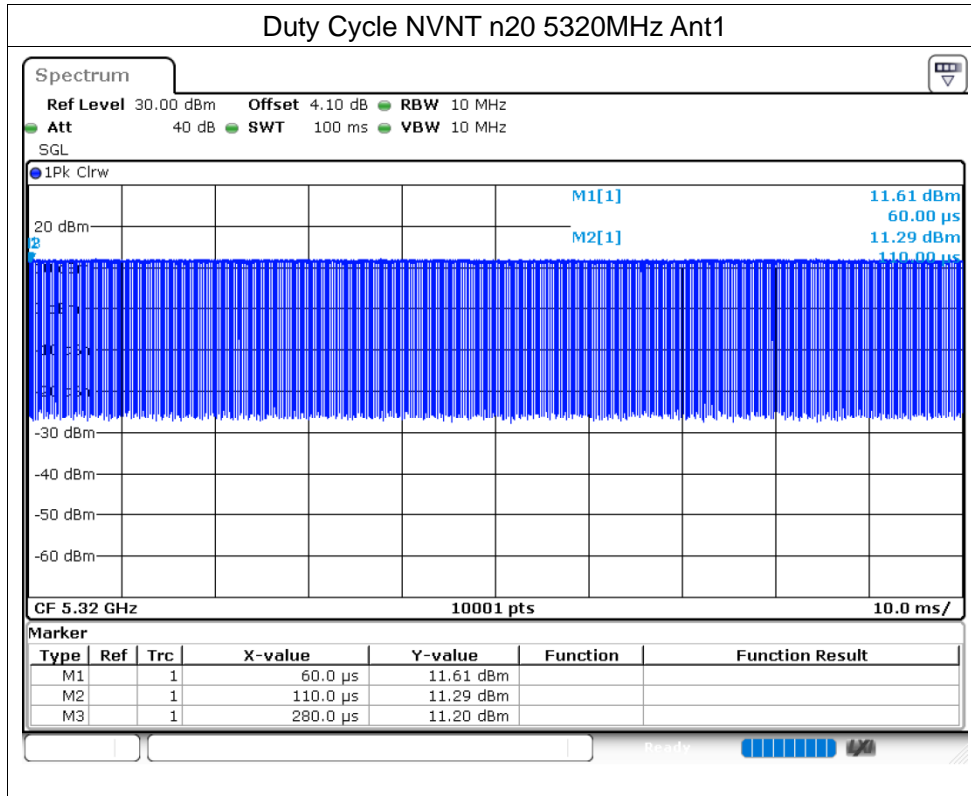


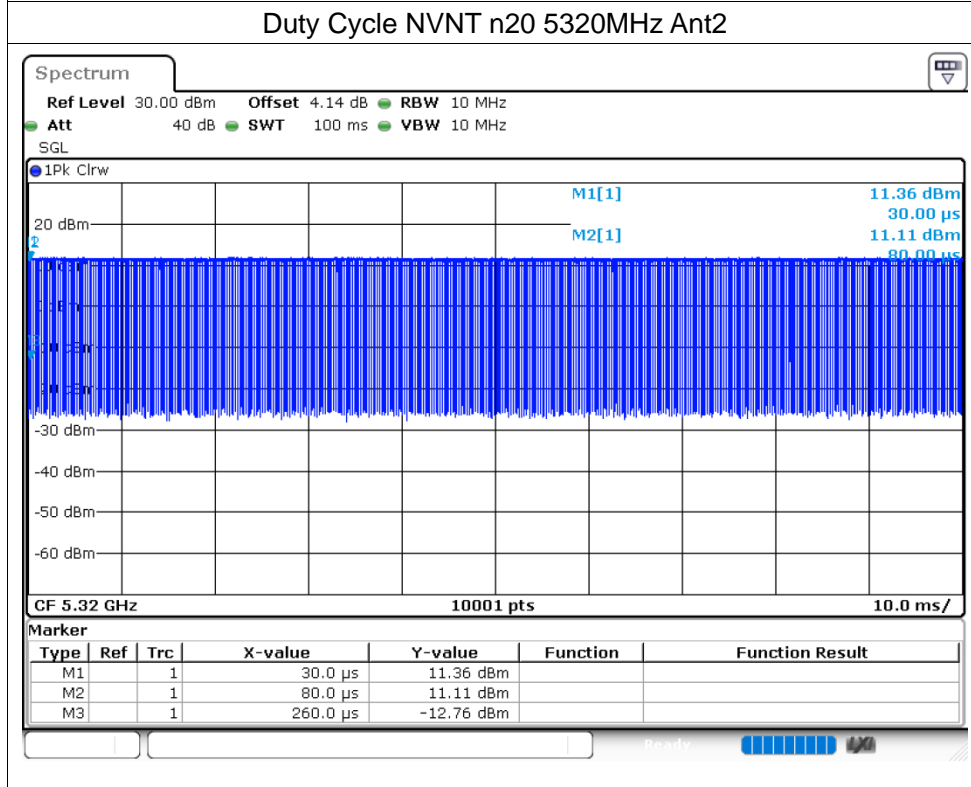
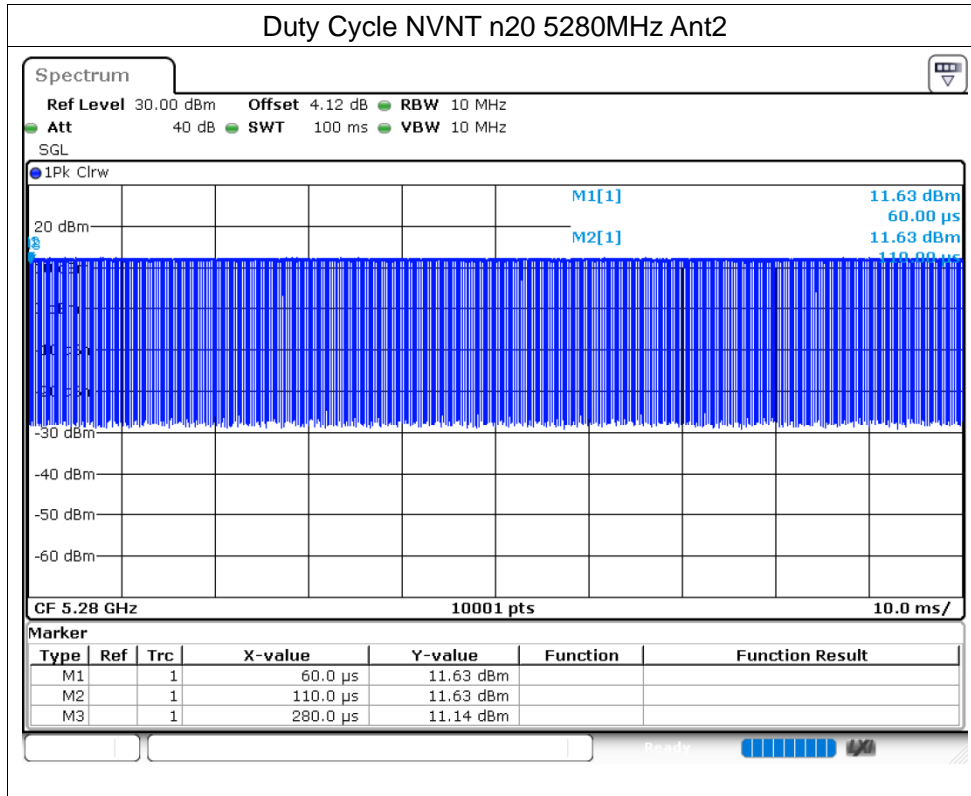


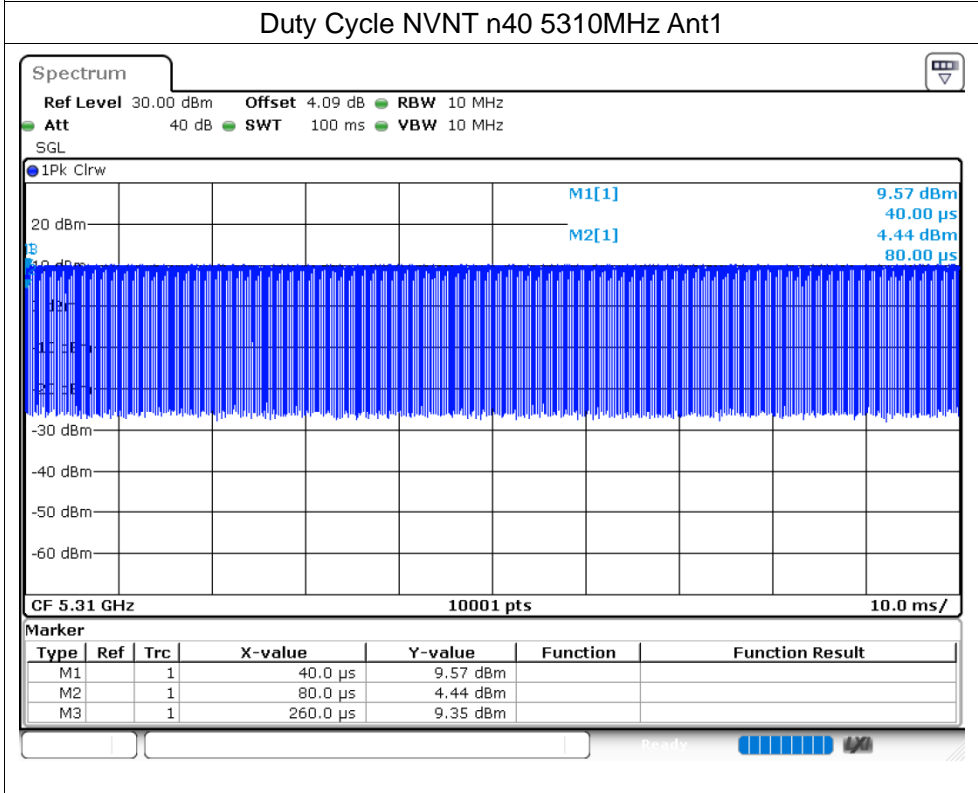
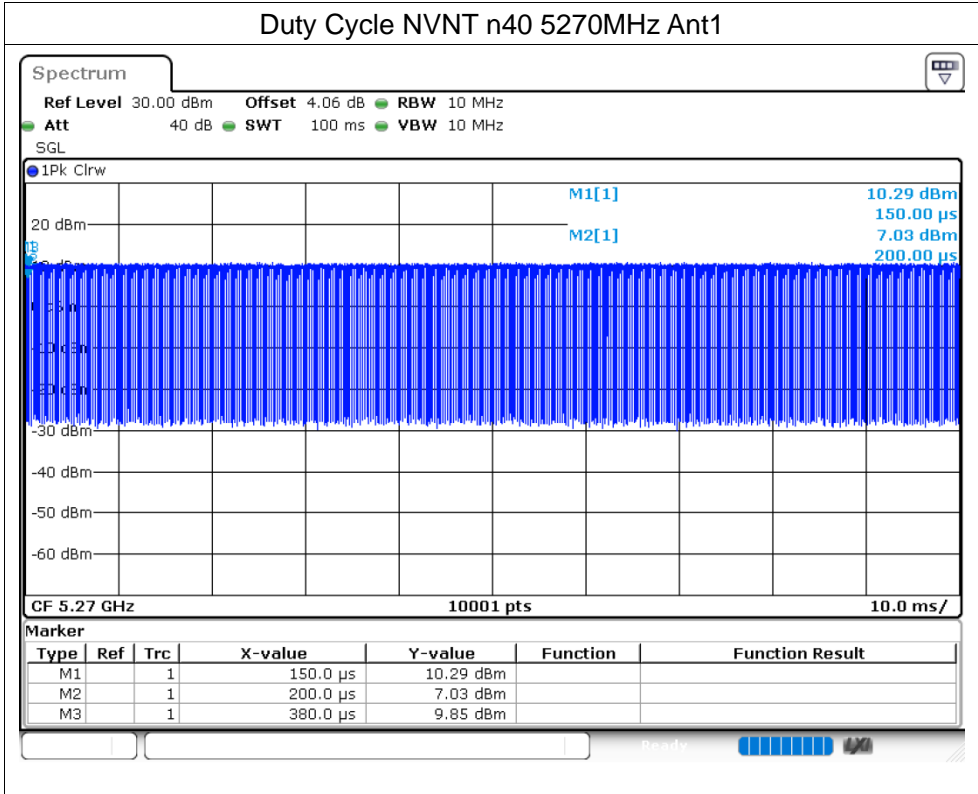






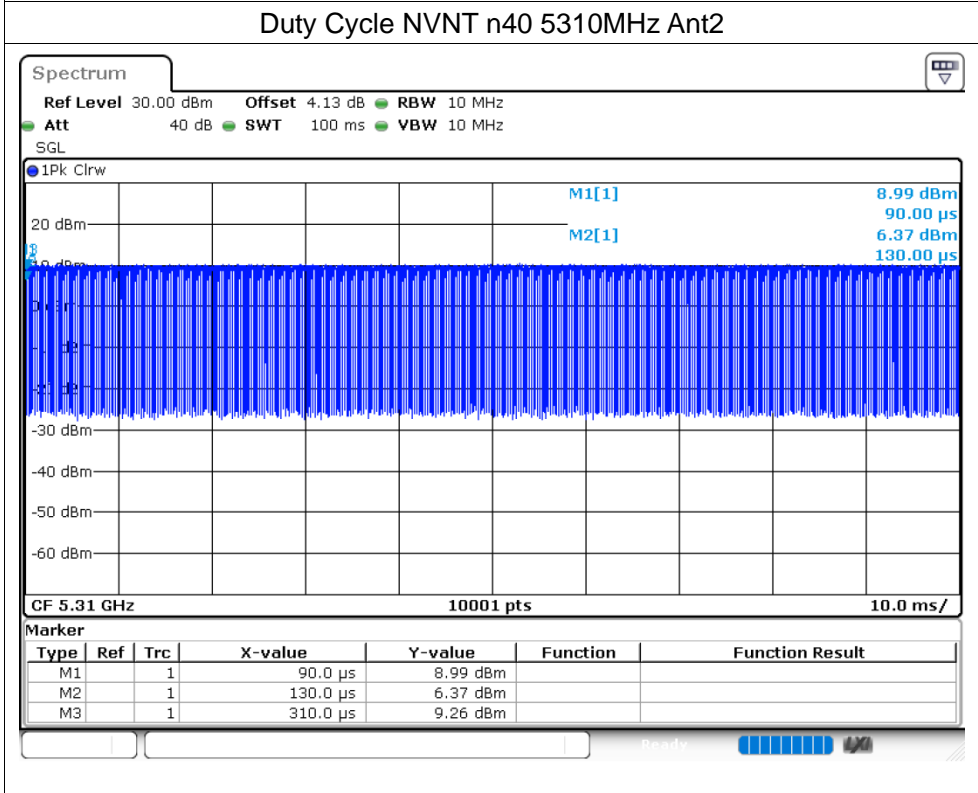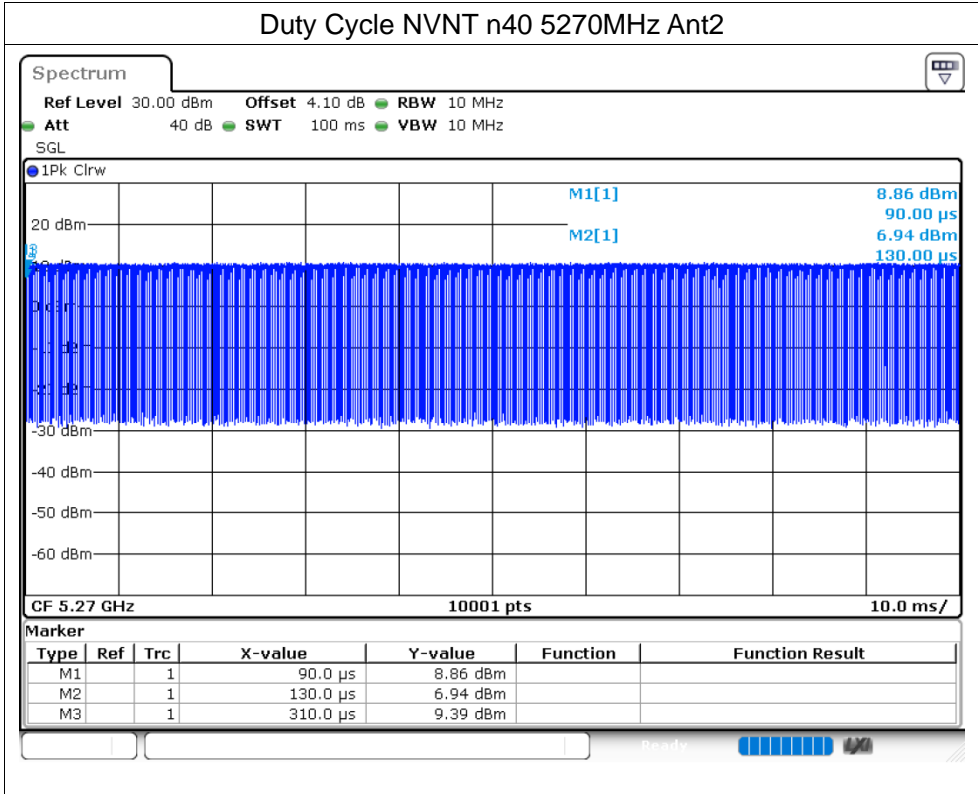


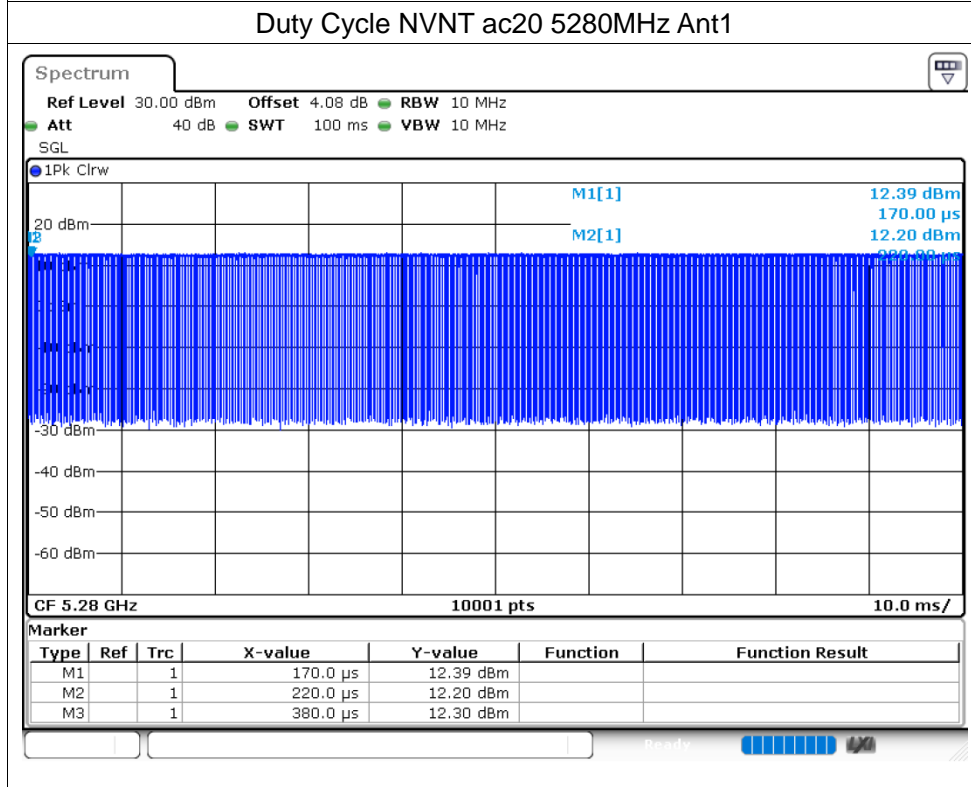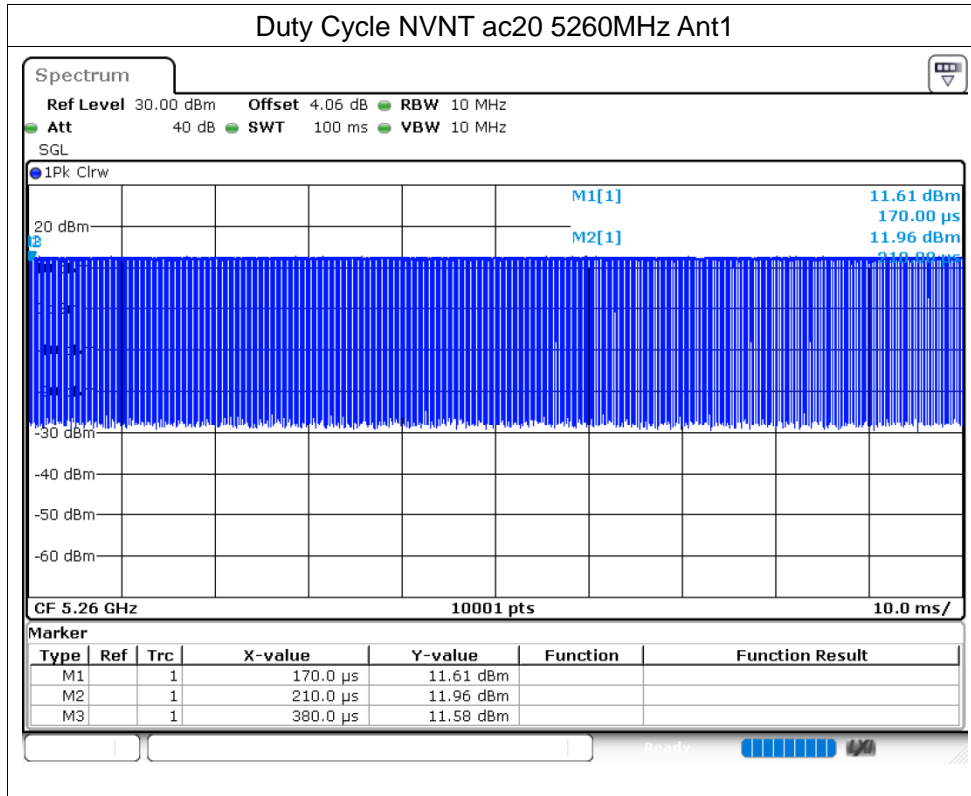


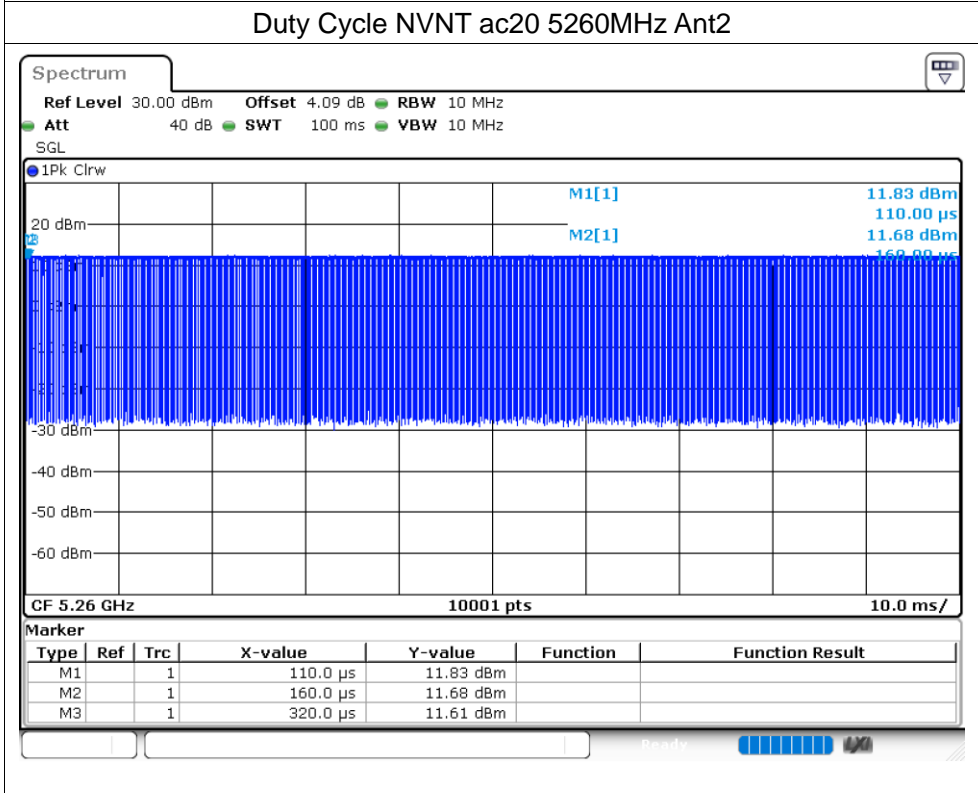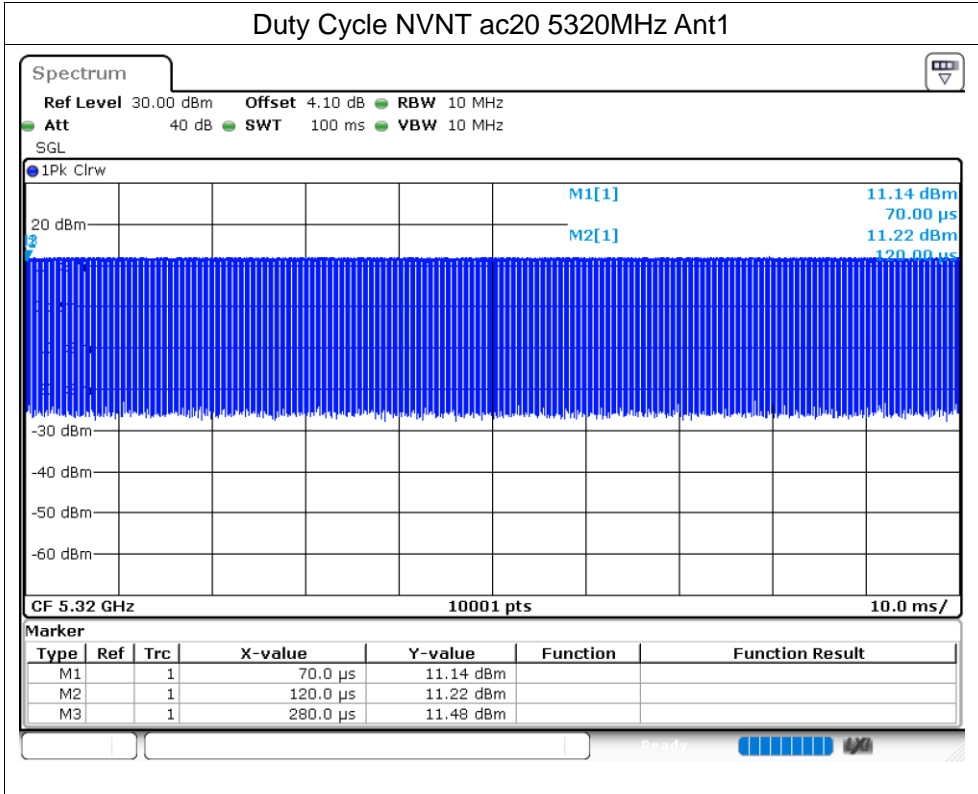

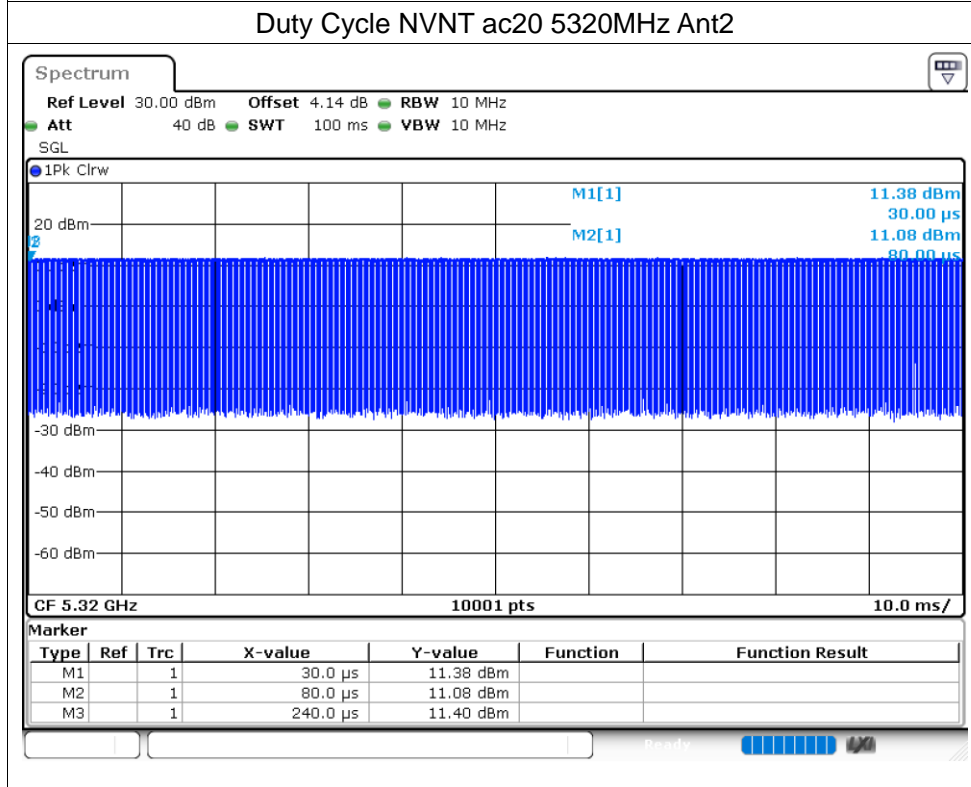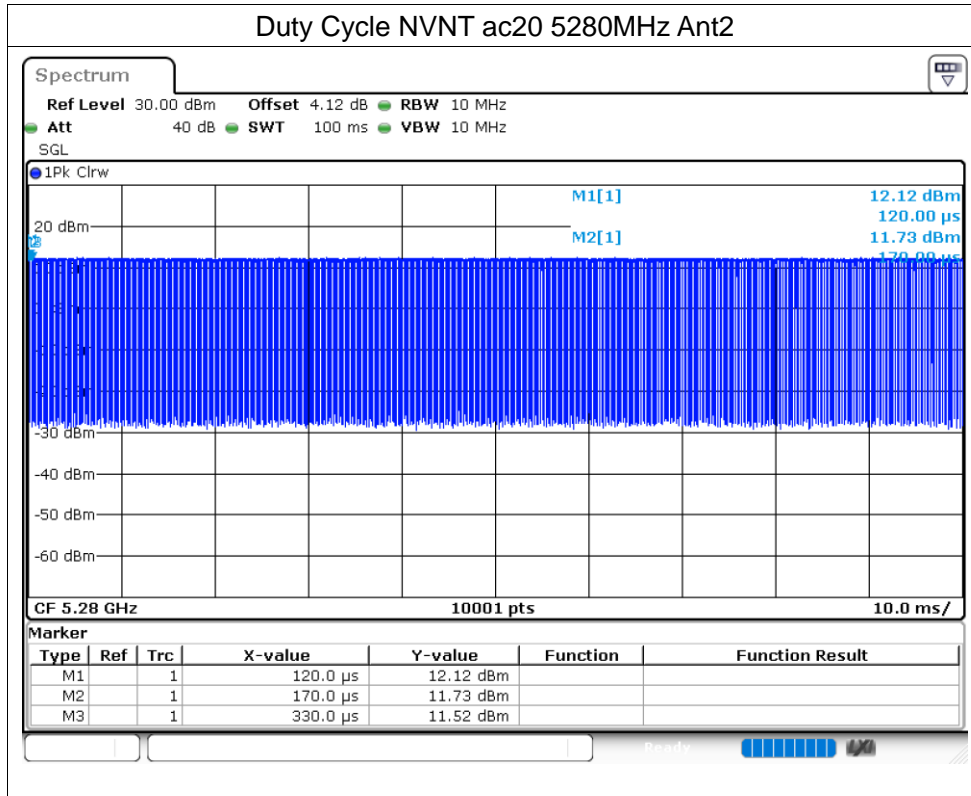

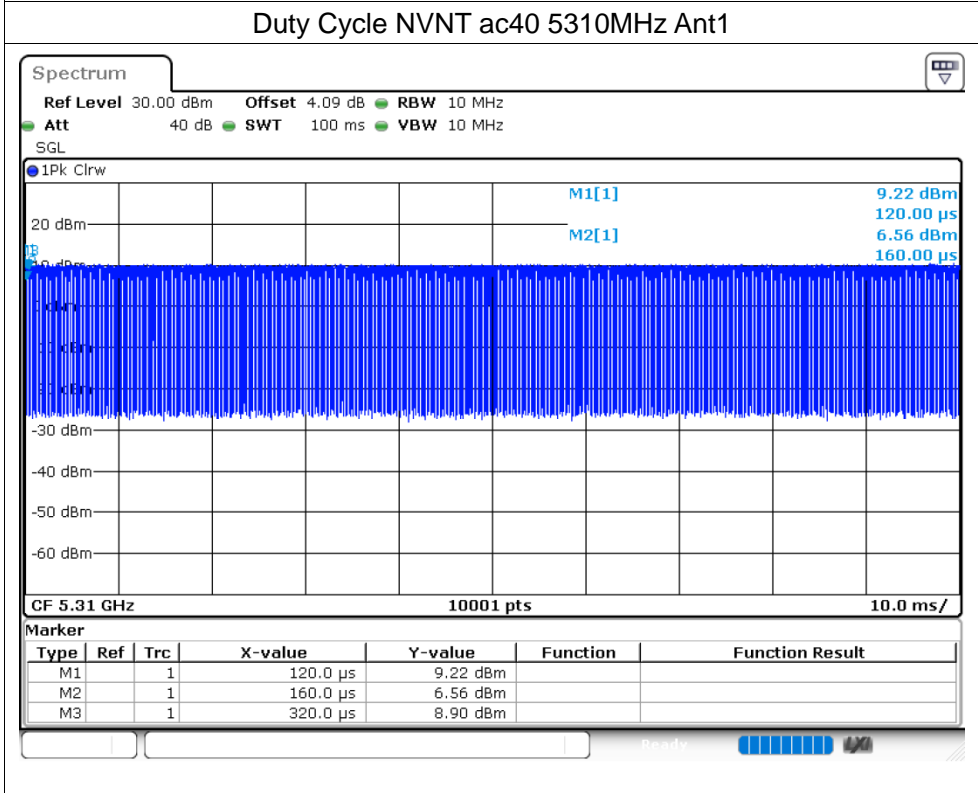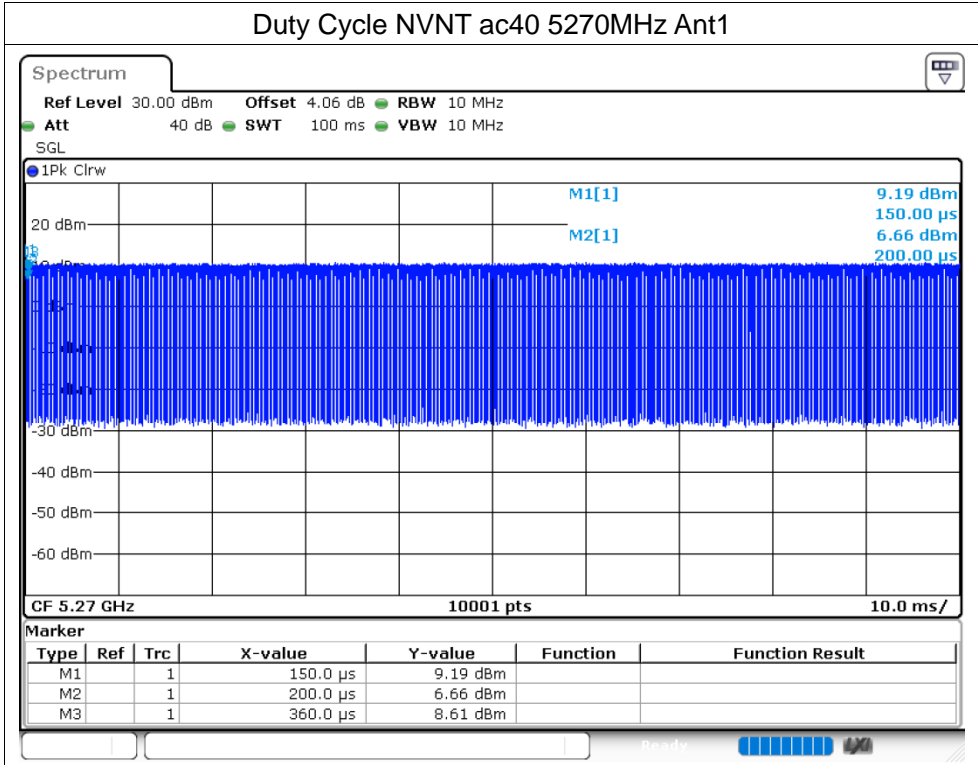

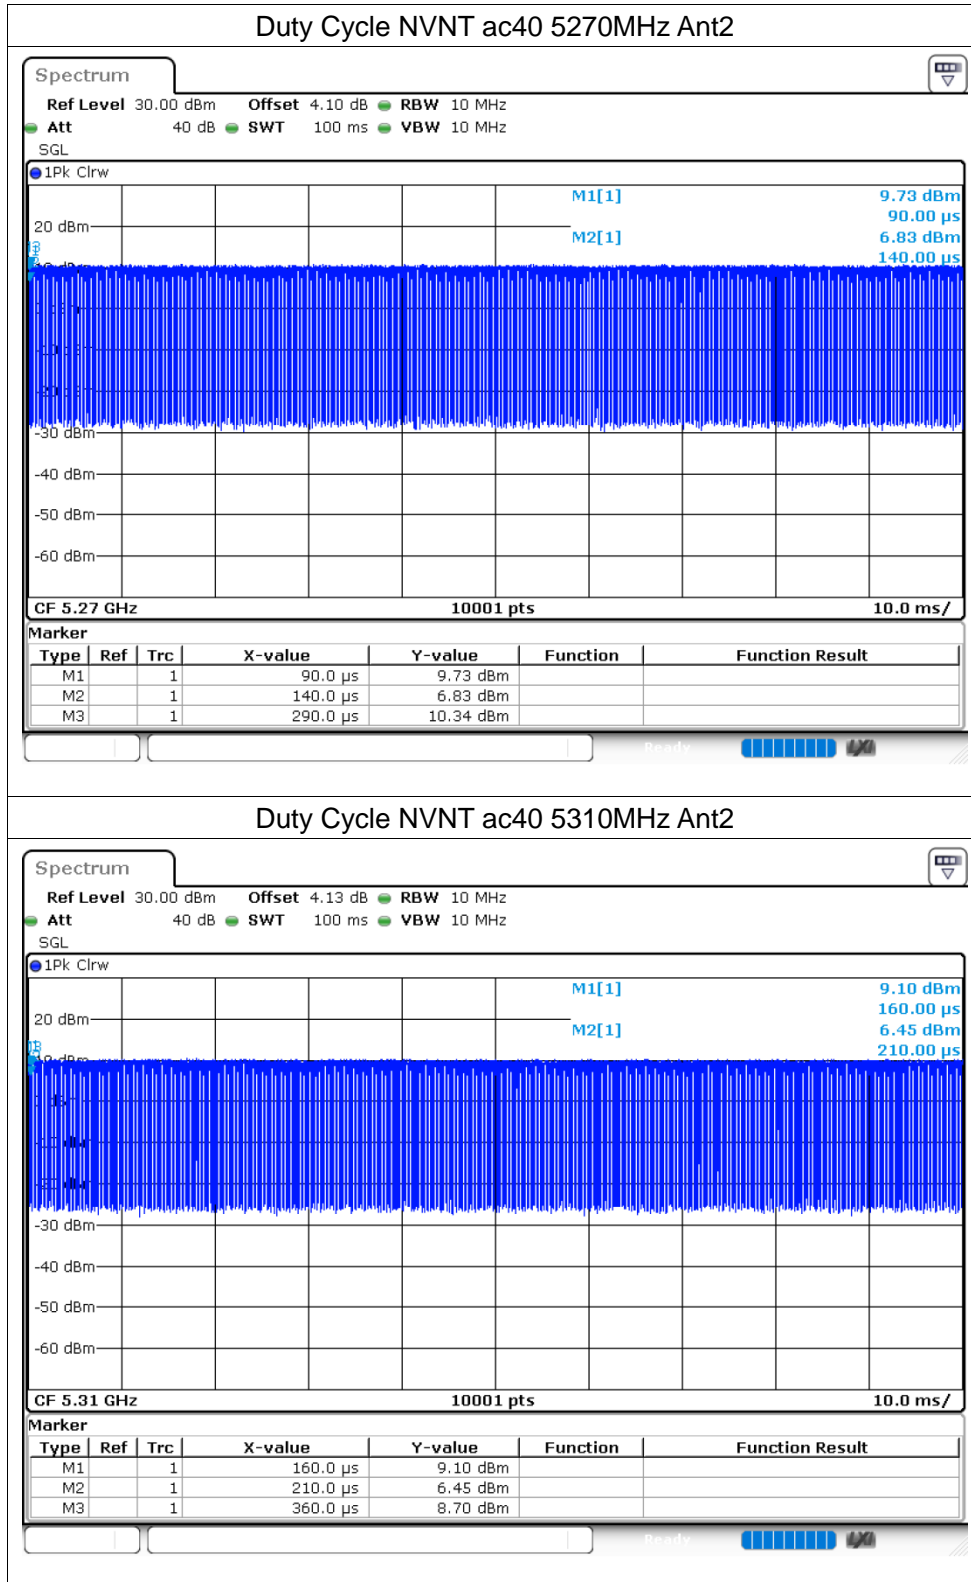

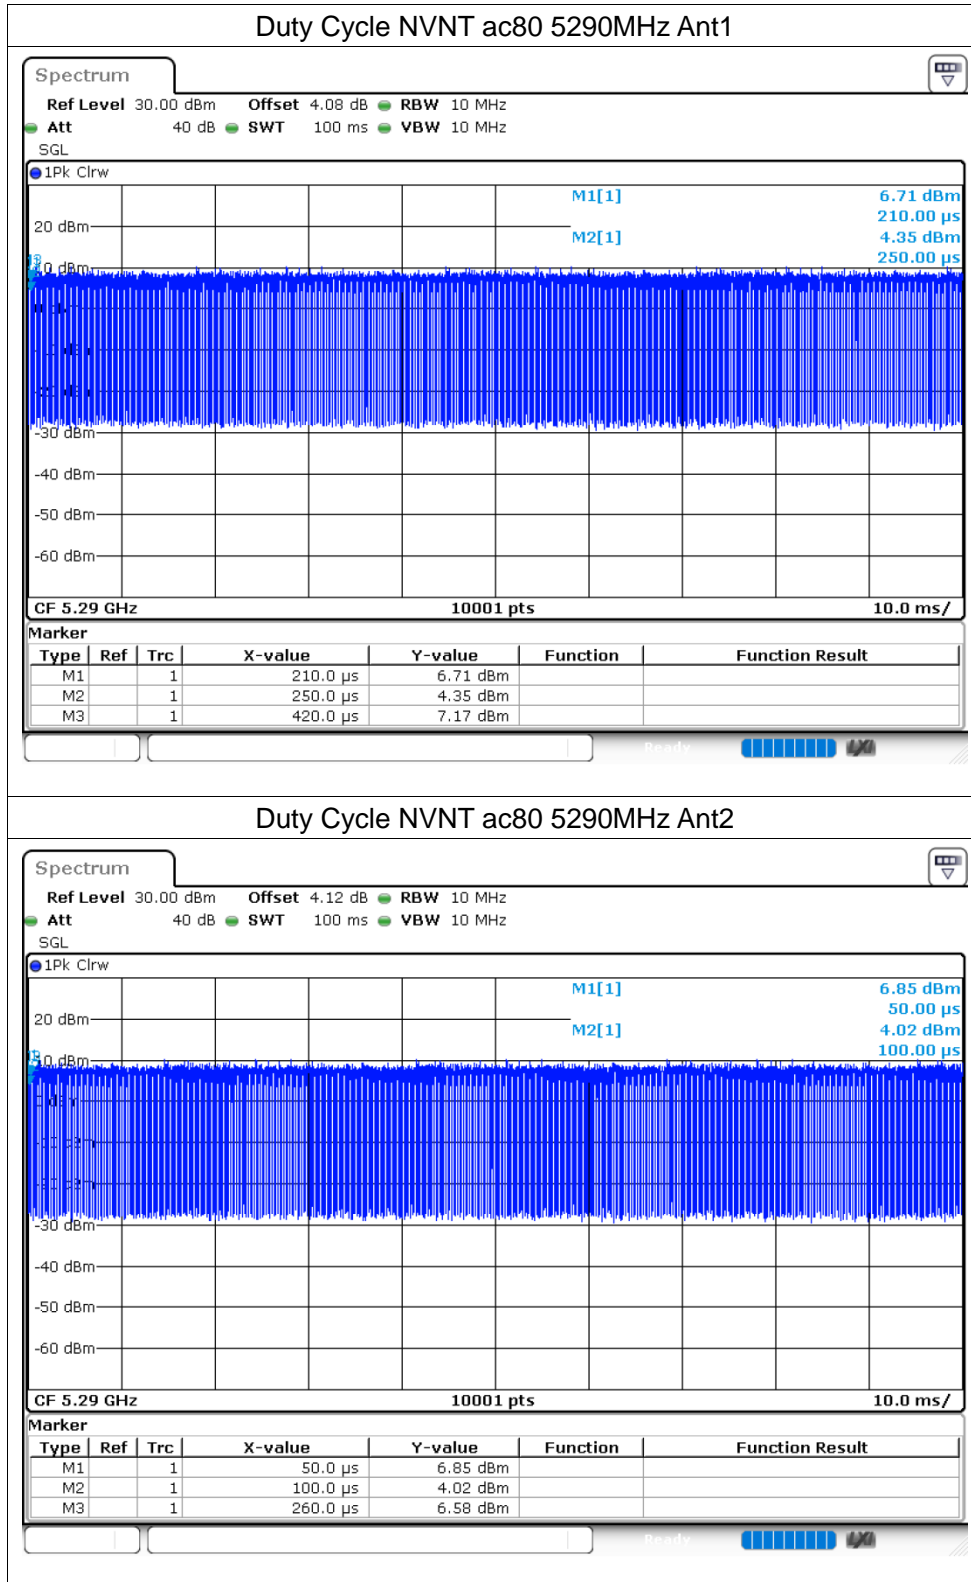

## Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	10.72	0	10.72	24	Pass
NVNT	a	5280	Ant1	10.81	0	10.81	24	Pass
NVNT	a	5320	Ant1	10.55	0	10.55	24	Pass
NVNT	a	5260	Ant2	10.39	0	10.39	24	Pass
NVNT	a	5280	Ant2	10.32	0	10.32	24	Pass
NVNT	a	5320	Ant2	10.12	0	10.12	24	Pass
NVNT	n20	5260	Ant1	10.57	0	10.57	24	Pass
NVNT	n20	5280	Ant1	10.78	0	10.78	24	Pass
NVNT	n20	5320	Ant1	10.54	0	10.54	24	Pass
NVNT	n20	5260	Ant2	10.34	0	10.34	24	Pass
NVNT	n20	5280	Ant2	10.26	0	10.26	24	Pass
NVNT	n20	5320	Ant2	10.14	0	10.14	24	Pass
NVNT	n40	5270	Ant1	10.3	0	10.3	24	Pass
NVNT	n40	5310	Ant1	10.47	0	10.47	24	Pass
NVNT	n40	5270	Ant2	10.28	0	10.28	24	Pass
NVNT	n40	5310	Ant2	10.06	0	10.06	24	Pass
NVNT	ac20	5260	Ant1	10.67	0	10.67	24	Pass
NVNT	ac20	5280	Ant1	10.81	0	10.81	24	Pass
NVNT	ac20	5320	Ant1	10.56	0	10.56	24	Pass
NVNT	ac20	5260	Ant2	10.32	0	10.32	24	Pass
NVNT	ac20	5280	Ant2	10.29	0	10.29	24	Pass
NVNT	ac20	5320	Ant2	10.06	0	10.06	24	Pass
NVNT	ac40	5270	Ant1	10.18	0	10.18	24	Pass
NVNT	ac40	5310	Ant1	10.4	0	10.4	24	Pass
NVNT	ac40	5270	Ant2	10.34	0	10.34	24	Pass
NVNT	ac40	5310	Ant2	10.17	0	10.17	24	Pass
NVNT	ac80	5290	Ant1	10.55	0	10.55	24	Pass
NVNT	ac80	5290	Ant2	10.53	0	10.53	24	Pass




## -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	23.076	Pass
NVNT	a	5280	Ant1	23.085	Pass
NVNT	a	5320	Ant1	22.89	Pass
NVNT	a	5260	Ant2	22.905	Pass
NVNT	a	5280	Ant2	22.536	Pass
NVNT	a	5320	Ant2	22.041	Pass
NVNT	n20	5260	Ant1	22.593	Pass
NVNT	n20	5280	Ant1	22.686	Pass
NVNT	n20	5320	Ant1	22.548	Pass
NVNT	n20	5260	Ant2	22.431	Pass
NVNT	n20	5280	Ant2	22.263	Pass
NVNT	n20	5320	Ant2	22.905	Pass
NVNT	n40	5270	Ant1	43.266	Pass
NVNT	n40	5310	Ant1	43.272	Pass
NVNT	n40	5270	Ant2	43.458	Pass
NVNT	n40	5310	Ant2	42.576	Pass
NVNT	ac20	5260	Ant1	23.1	Pass
NVNT	ac20	5280	Ant1	23.091	Pass
NVNT	ac20	5320	Ant1	23.751	Pass
NVNT	ac20	5260	Ant2	22.599	Pass
NVNT	ac20	5280	Ant2	22.998	Pass
NVNT	ac20	5320	Ant2	22.305	Pass
NVNT	ac40	5270	Ant1	43.236	Pass
NVNT	ac40	5310	Ant1	43.098	Pass
NVNT	ac40	5270	Ant2	42.726	Pass
NVNT	ac40	5310	Ant2	43.728	Pass
NVNT	ac80	5290	Ant1	85.596	Pass
NVNT	ac80	5290	Ant2	85.596	Pass

Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

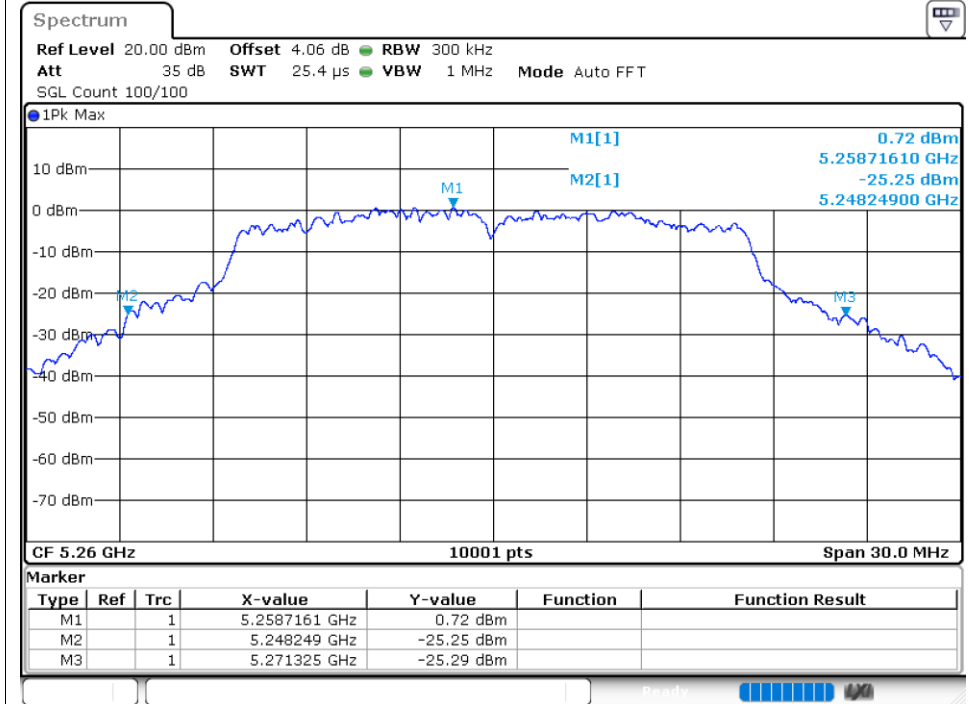

-26dB Bandwidth NVNT a 5280MHz Ant1

