



11ax80 (SU), U-NII-6, Low Channel

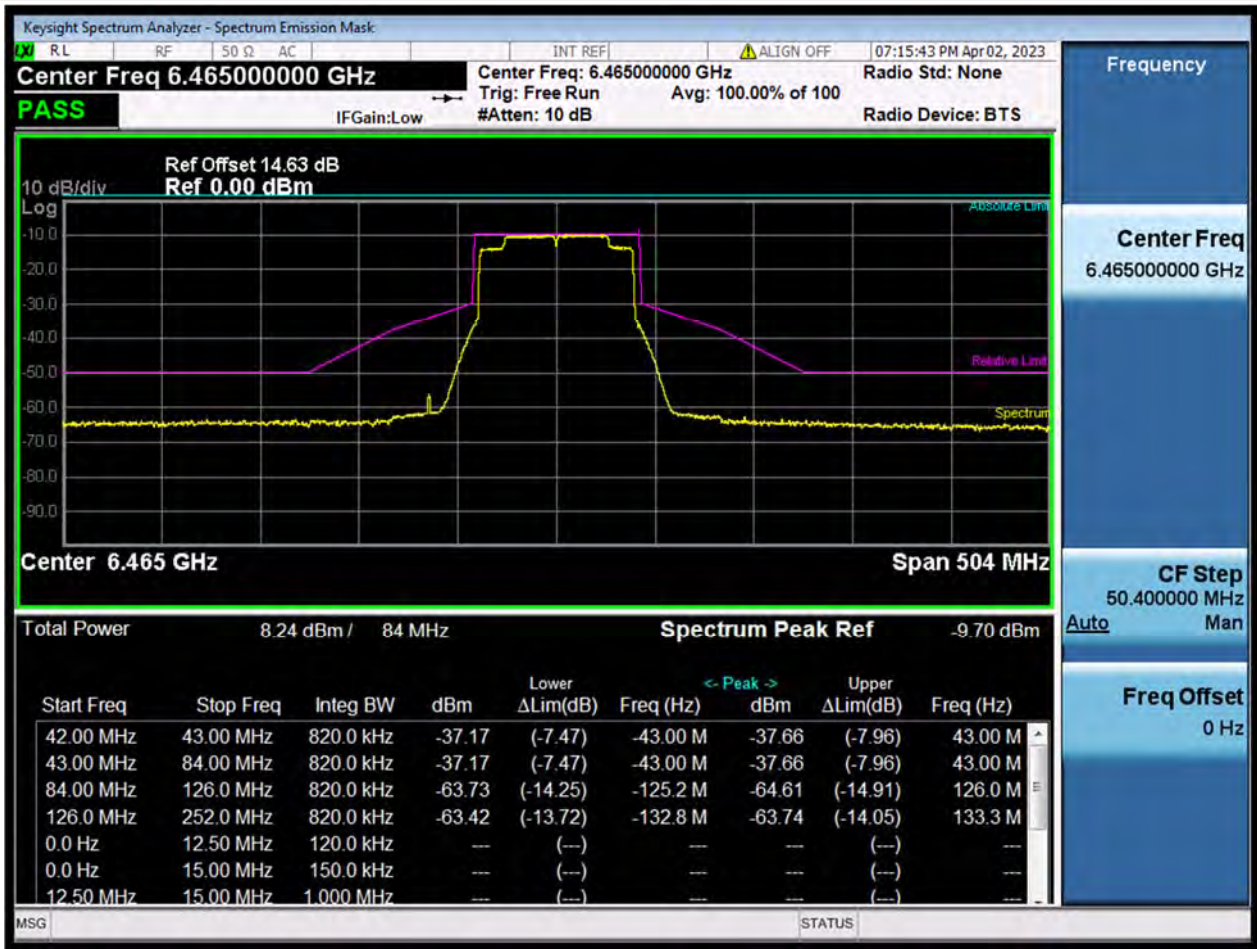


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-252	-126	0.8	-132.804	6332.196	-53.72	-63.42	-13.72	Pass
-126	-84	0.8	-125.244	6339.756	-54.04	-63.73	-14.25	Pass
-84	-43	0.8	-43	6422	-27.47	-37.17	-7.47	Pass
-43	-42	0.8	-43	6422	-27.47	-37.17	-7.47	Pass
42	43	0.8	43	6508	-27.96	-37.66	7.96	Pass
43	84	0.8	43	6508	-27.96	-37.66	7.96	Pass
84	126	0.8	126	6591	-54.91	-64.61	14.91	Pass
126	252	0.8	133.308	6598.308	-54.05	-63.74	14.05	Pass

11ax80 (SU), U-NII-6, High Channel

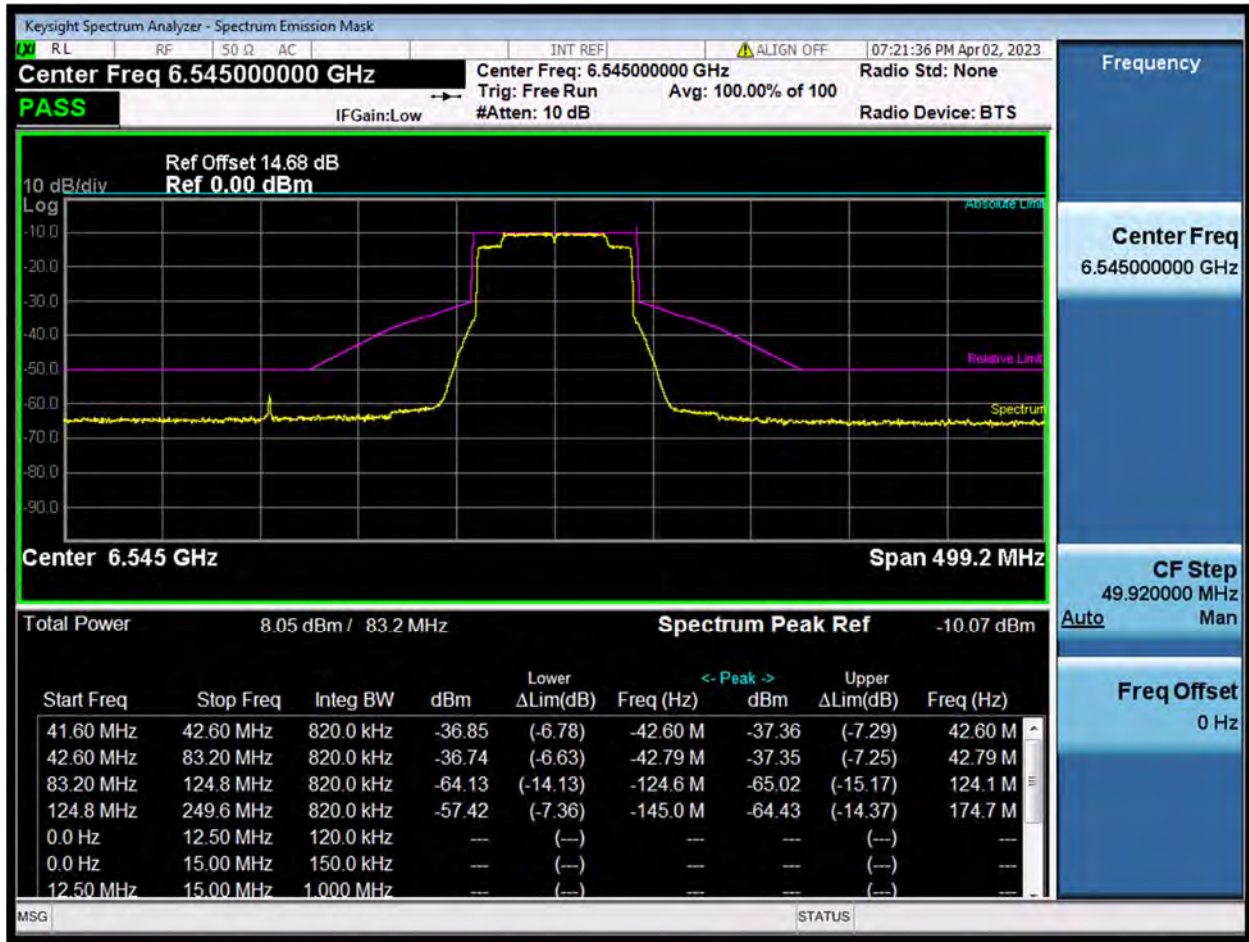


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-249.6	-124.8	0.8	-145.0176	6399.9824	-47.36	-57.42	-7.36	Pass
-124.8	-83.2	0.8	-124.5504	6420.4496	-54.06	-64.13	-14.13	Pass
-83.2	-42.6	0.8	-	6502.214993	-26.67	-36.74	-6.63	Pass
-42.6	-41.6	0.8	-42.6	6502.4	-26.78	-36.85	-6.78	Pass
41.6	42.6	0.8	42.6	6587.6	-27.29	-37.36	7.29	Pass
42.6	83.2	0.8	42.785007	6587.785007	-27.29	-37.35	7.25	Pass
83.2	124.8	0.8	124.0512	6669.0512	-54.95	-65.02	15.17	Pass
124.8	249.6	0.8	174.72	6719.72	-54.37	-64.43	14.37	Pass

11ax160 (SU), U-NII-6, Middle Channel

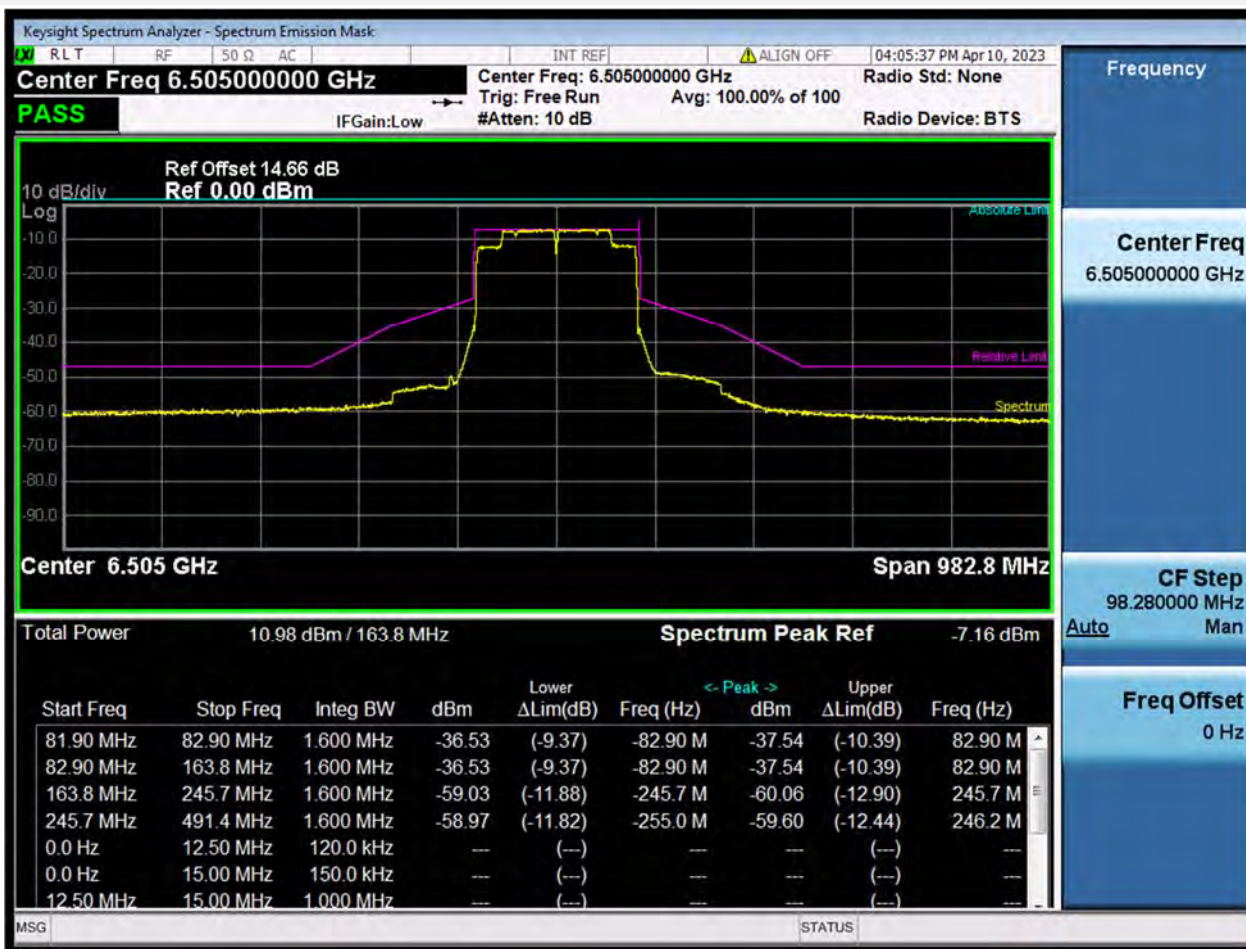


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-491.4	-245.7	1.6	-255.0366	6249.9634	-51.82	-58.97	-11.82	Pass
-245.7	-163.8	1.6	-245.7	6259.3	-51.88	-59.03	-11.88	Pass
-163.8	-82.9	1.6	-82.9	6422.1	-29.37	-36.53	-9.37	Pass
-82.9	-81.9	1.6	-82.9	6422.1	-29.37	-36.53	-9.37	Pass
81.9	82.9	1.6	82.9	6587.9	-30.39	-37.54	10.39	Pass
82.9	163.8	1.6	82.9	6587.9	-30.39	-37.54	10.39	Pass
163.8	245.7	1.6	245.7	6750.7	-52.9	-60.06	12.9	Pass
245.7	491.4	1.6	246.1914	6751.1914	-52.44	-59.6	12.44	Pass

11ax20 (SU), U-NII-7, Low Channel

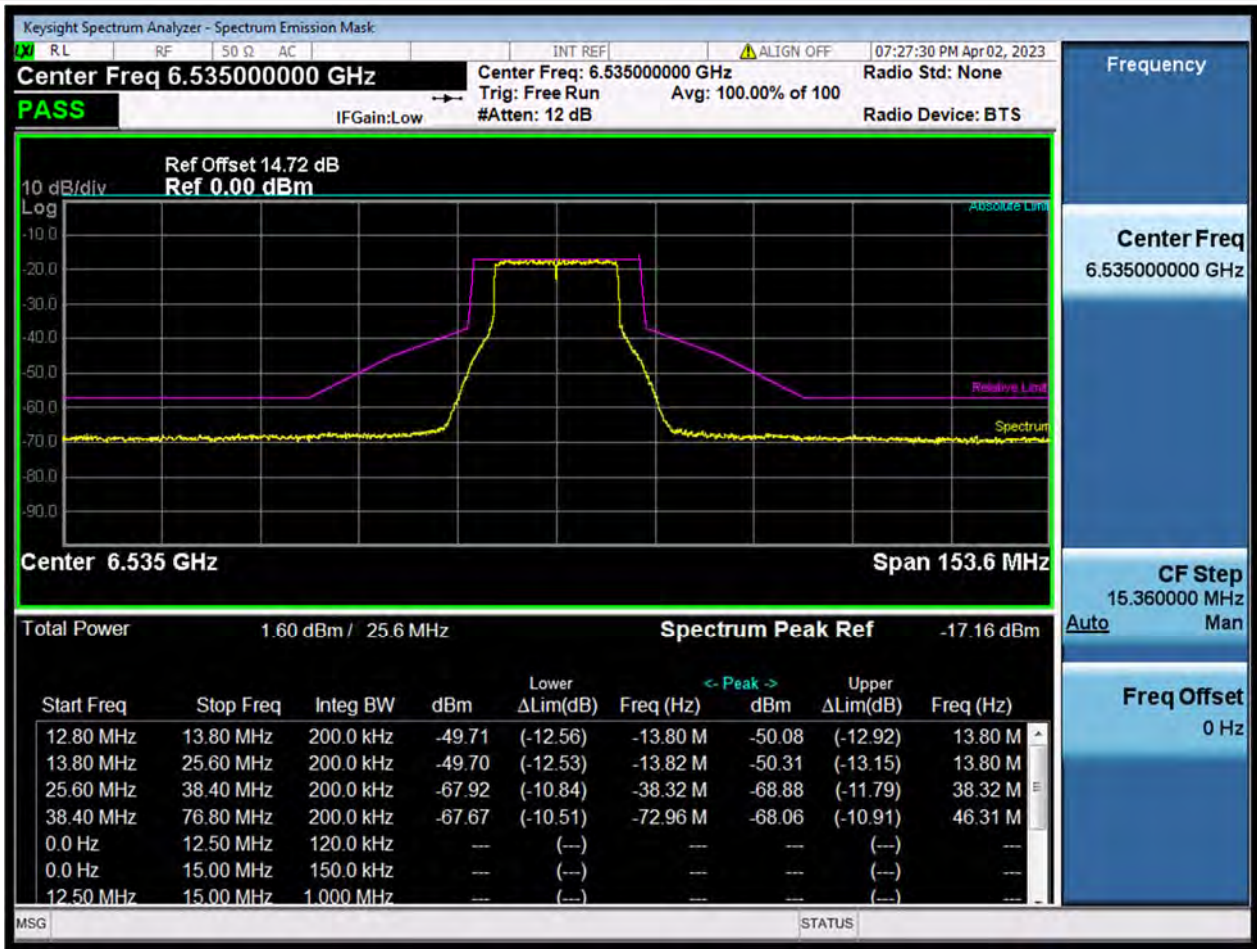


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.8	-38.4	0.2	-72.96	6462.04	-50.51	-67.67	-10.51	Pass
-38.4	-25.6	0.2	-38.3232	6496.6768	-50.76	-67.92	-10.84	Pass
-25.6	-13.8	0.2	-13.824	6521.176	-32.55	-49.7	-12.53	Pass
-13.8	-12.8	0.2	-13.8	6521.2	-32.56	-49.71	-12.56	Pass
12.8	13.8	0.2	13.8	6548.8	-32.92	-50.08	12.92	Pass
13.8	25.6	0.2	13.8	6548.8	-33.15	-50.31	13.15	Pass
25.6	38.4	0.2	38.3232	6573.3232	-51.72	-68.88	11.79	Pass
38.4	76.8	0.2	46.3104	6581.3104	-50.91	-68.06	10.91	Pass

11ax20 (SU), U-NII-7, Middle Channel

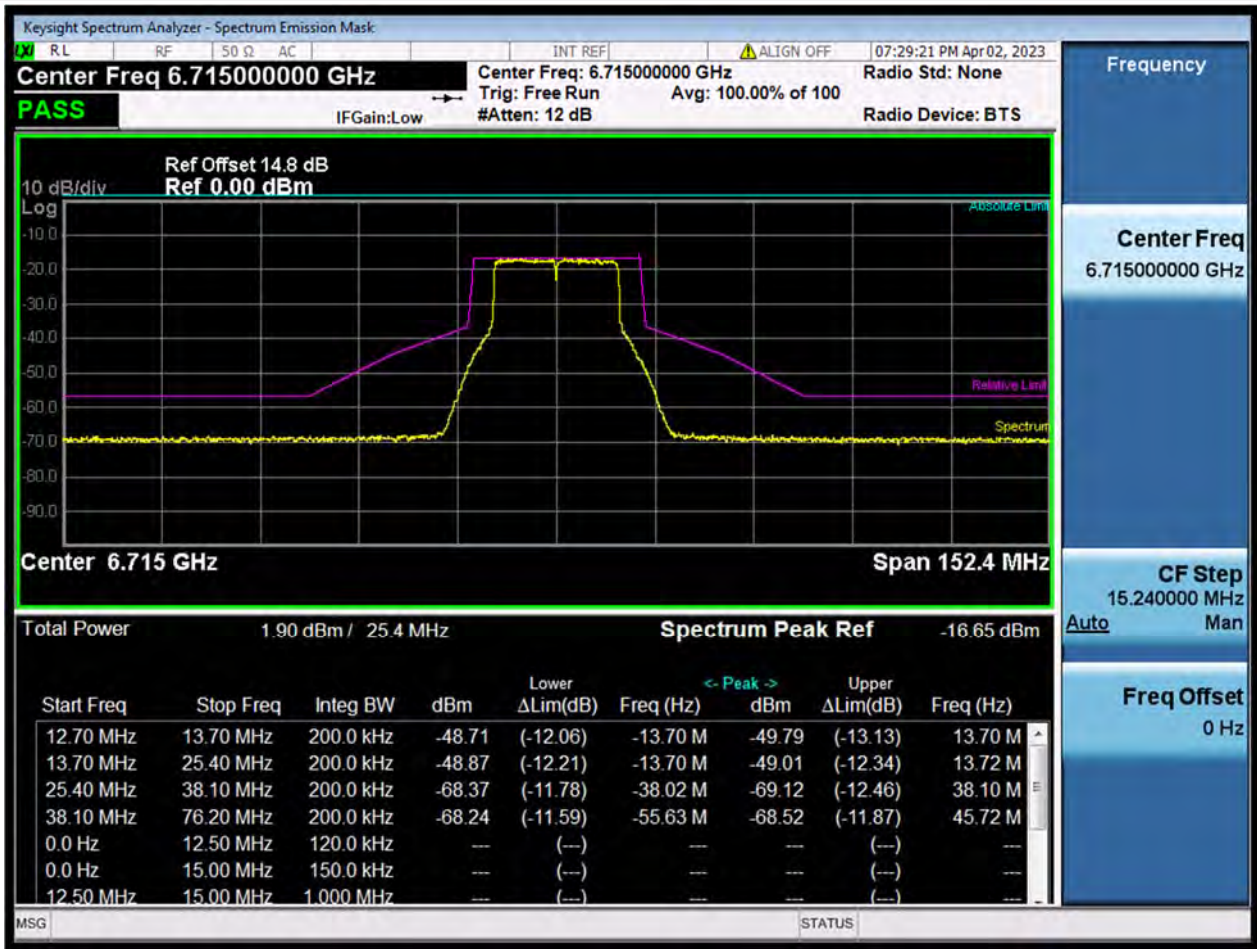


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.2	-38.1	0.2	-55.626	6659.374	-51.59	-68.24	-11.59	Pass
-38.1	-25.4	0.2	-38.0238	6676.9762	-51.71	-68.37	-11.78	Pass
-25.4	-13.7	0.2	-13.7	6701.3	-32.21	-48.87	-12.21	Pass
-13.7	-12.7	0.2	-13.7	6701.3	-32.06	-48.71	-12.06	Pass
12.7	13.7	0.2	13.7	6728.7	-33.13	-49.79	13.13	Pass
13.7	25.4	0.2	13.716	6728.716	-32.35	-49.01	12.34	Pass
25.4	38.1	0.2	38.1	6753.1	-52.46	-69.12	12.46	Pass
38.1	76.2	0.2	45.72	6760.72	-51.87	-68.52	11.87	Pass

11x20 (SU), U-NII-7, High Channel

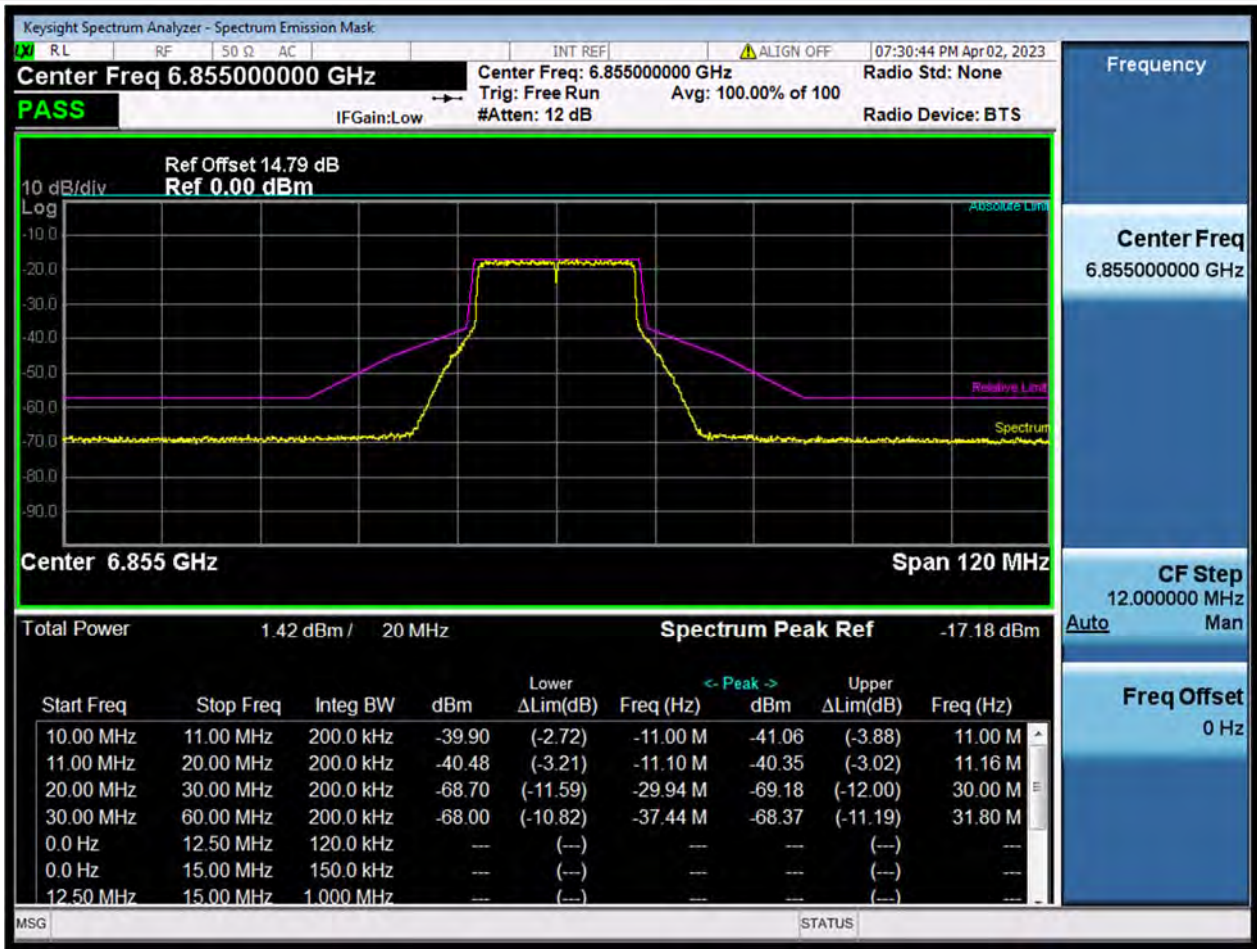

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-60	-30	0.2	-37.44	6817.56	-50.82	-68	-10.82	Pass
-30	-20	0.2	-29.94	6825.06	-51.52	-68.7	-11.59	Pass
-20	-11	0.2	-11.1	6843.9	-23.3	-40.48	-3.21	Pass
-11	-10	0.2	-11	6844	-22.72	-39.9	-2.72	Pass
10	11	0.2	11	6866	-23.88	-41.06	3.88	Pass
11	20	0.2	11.16	6866.16	-23.16	-40.35	3.02	Pass
20	30	0.2	30	6885	-52	-69.18	12	Pass
30	60	0.2	31.8	6886.8	-51.19	-68.37	11.19	Pass

11ax40 (SU), U-NII-7, Low Channel

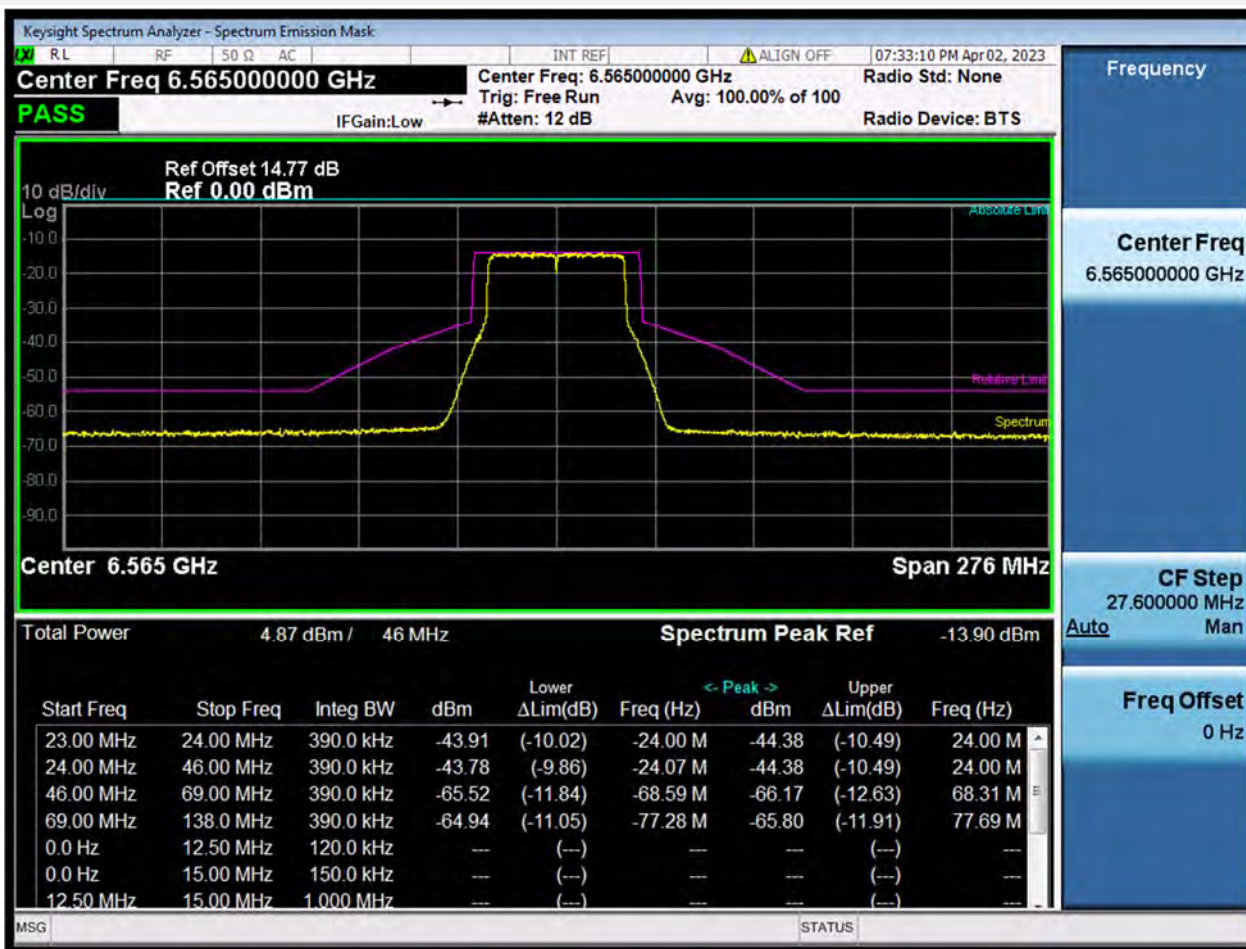


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138	-69	0.4	-77.28	6487.72	-51.05	-64.94	-11.05	Pass
-69	-46	0.4	-68.586	6496.414	-51.63	-65.52	-11.84	Pass
-46	-24	0.4	-	6540.9310 24.068966	-29.89	-43.78	-9.86	Pass
-24	-23	0.4	-24	6541	-30.02	-43.91	-10.02	Pass
23	24	0.4	24	6589	-30.49	-44.38	10.49	Pass
24	46	0.4	24	6589	-30.49	-44.38	10.49	Pass
46	69	0.4	68.31	6633.31	-52.27	-66.17	12.63	Pass
69	138	0.4	77.694	6642.694	-51.91	-65.8	11.91	Pass

11ax40 (SU), U-NII-7, Middle Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.9	-69.45	0.4	-108.8976	6616.1024	-51.56	-65.46	-11.56	Pass
-69.45	-46.3	0.4	-69.45	6655.55	-51.99	-65.89	-11.99	Pass
-46.3	-24.15	0.4	-24.15	6700.85	-30.07	-43.96	-10.07	Pass
-24.15	-23.15	0.4	-24.15	6700.85	-30.07	-43.96	-10.07	Pass
23.15	24.15	0.4	24.15	6749.15	-30.93	-44.83	10.93	Pass
24.15	46.3	0.4	24.15	6749.15	-30.93	-44.83	10.93	Pass
46.3	69.45	0.4	69.1722	6794.1722	-52.39	-66.29	12.54	Pass
69.45	138.9	0.4	88.2015	6813.2015	-51.88	-65.78	11.88	Pass

11ax40 (SU), U-NII-7, High Channel

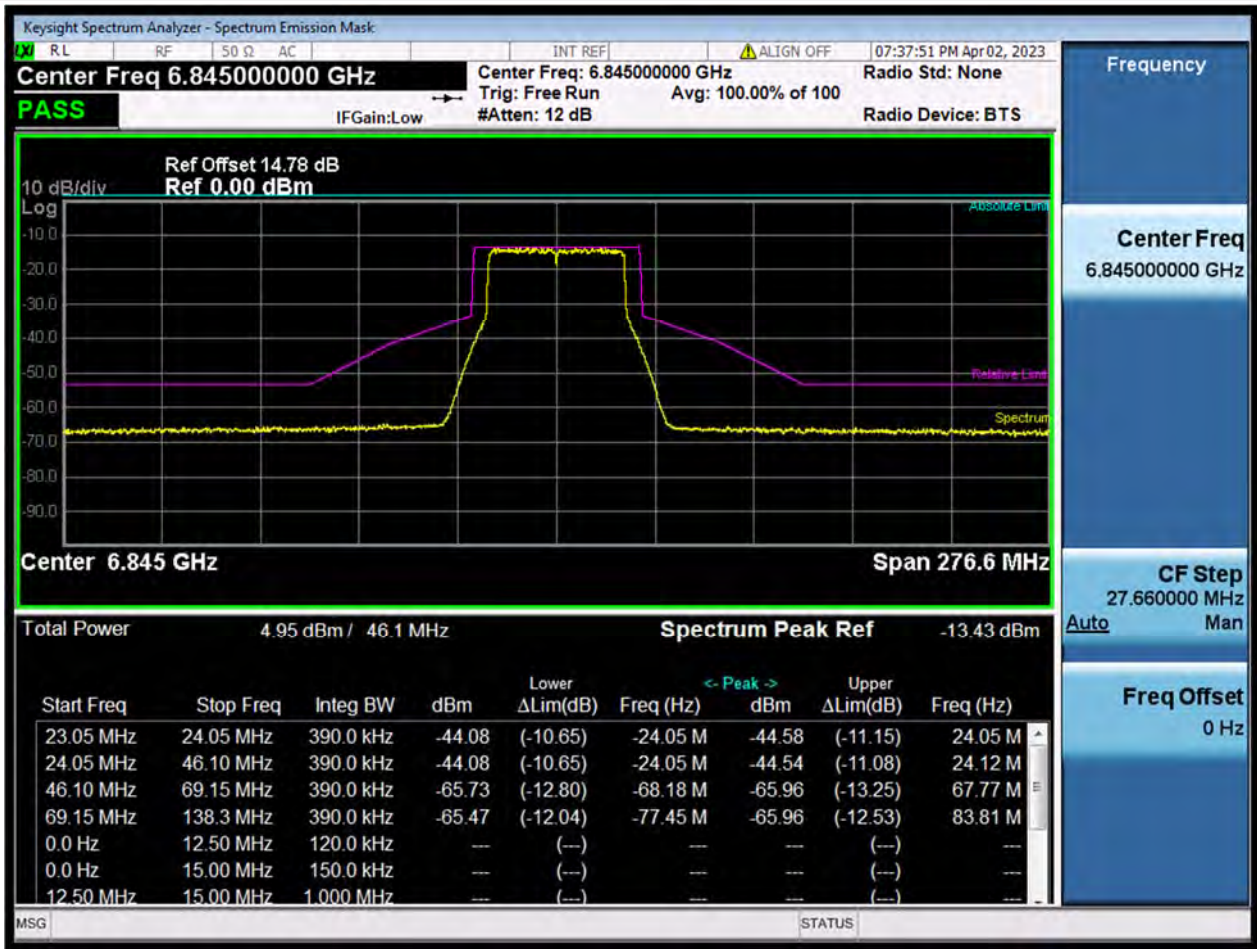


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.3	-69.15	0.4	-77.448	6767.552	-52.04	-65.47	-12.04	Pass
-69.15	-46.1	0.4	-68.1819	6776.8181	-52.3	-65.73	-12.8	Pass
-46.1	-24.05	0.4	-24.05	6820.95	-30.65	-44.08	-10.65	Pass
-24.05	-23.05	0.4	-24.05	6820.95	-30.65	-44.08	-10.65	Pass
23.05	24.05	0.4	24.05	6869.05	-31.15	-44.58	11.15	Pass
24.05	46.1	0.4	24.121289	6869.121289	-31.11	-44.54	11.08	Pass
46.1	69.15	0.4	67.767	6912.767	-52.53	-65.96	13.25	Pass
69.15	138.3	0.4	83.8098	6928.8098	-52.53	-65.96	12.53	Pass

11ax80 (SU), U-NII-7, Low Channel

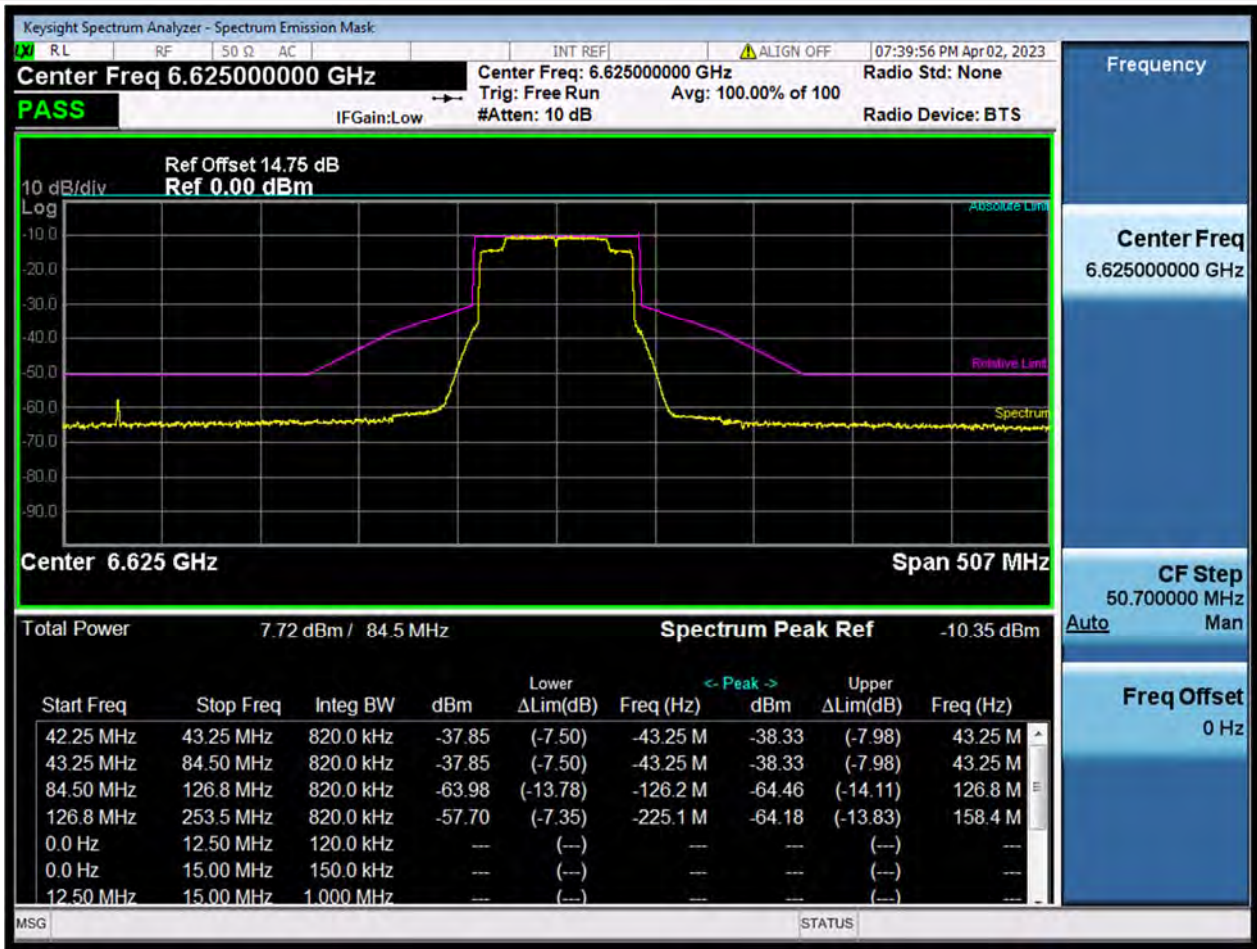


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-253.5	-126.75	0.8	-225.108	6399.892	-47.35	-57.7	-7.35	Pass
-126.75	-84.5	0.8	-126.243	6498.757	-53.64	-63.98	-13.78	Pass
-84.5	-43.25	0.8	-43.25	6581.75	-27.5	-37.85	-7.5	Pass
-43.25	-42.25	0.8	-43.25	6581.75	-27.5	-37.85	-7.5	Pass
42.25	43.25	0.8	43.25	6668.25	-27.98	-38.33	7.98	Pass
43.25	84.5	0.8	43.25	6668.25	-27.98	-38.33	7.98	Pass
84.5	126.75	0.8	126.75	6751.75	-54.11	-64.46	14.11	Pass
126.75	253.5	0.8	158.4375	6783.4375	-53.83	-64.18	13.83	Pass

11ax80 (SU), U-NII-7, Middle Channel

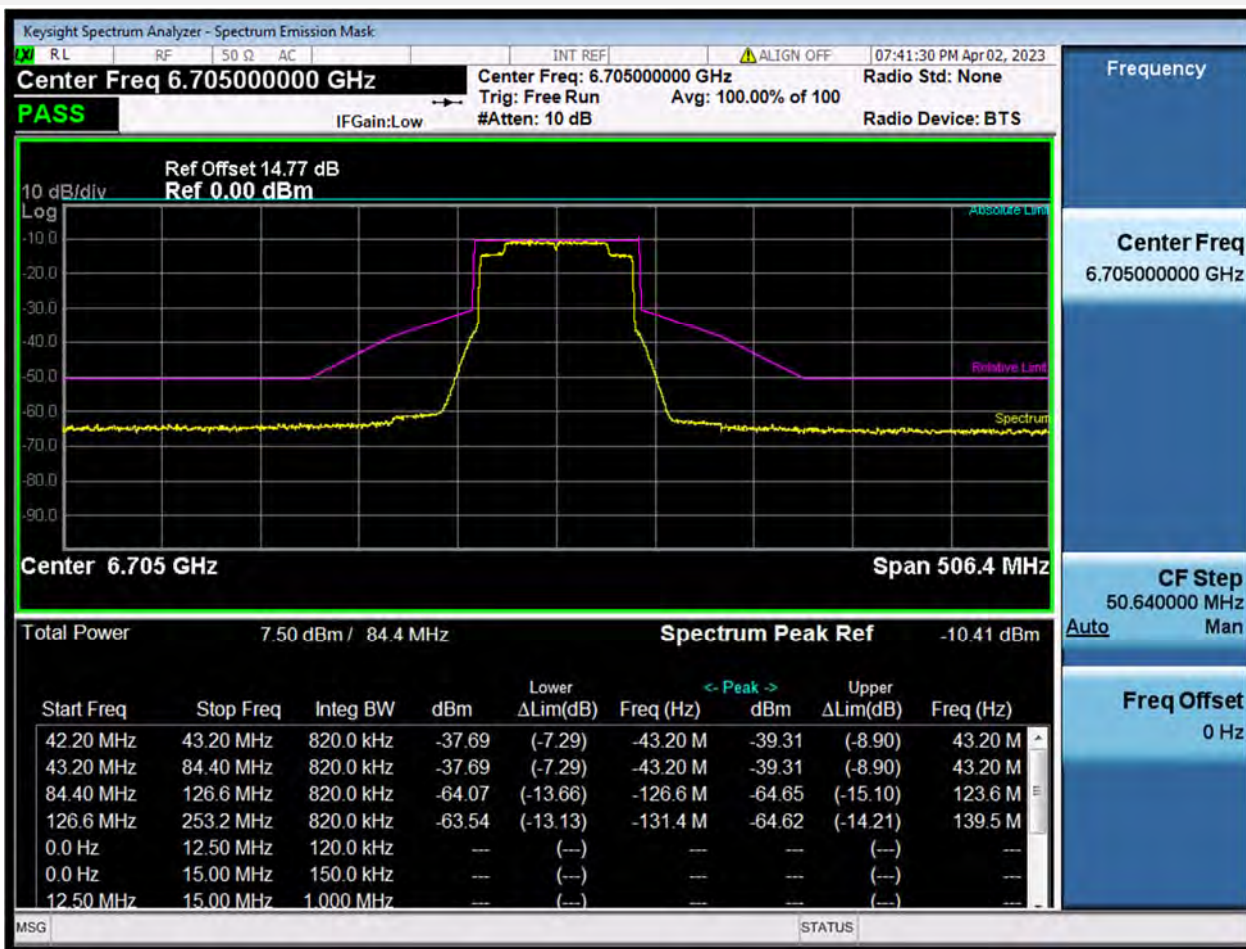


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-253.2	-126.6	0.8	-131.4108	6573.5892	-53.13	-63.54	-13.13	Pass
-126.6	-84.4	0.8	-126.6	6578.4	-53.66	-64.07	-13.66	Pass
-84.4	-43.2	0.8	-43.2	6661.8	-27.29	-37.69	-7.29	Pass
-43.2	-42.2	0.8	-43.2	6661.8	-27.29	-37.69	-7.29	Pass
42.2	43.2	0.8	43.2	6748.2	-28.9	-39.31	8.9	Pass
43.2	84.4	0.8	43.2	6748.2	-28.9	-39.31	8.9	Pass
84.4	126.6	0.8	123.5616	6828.5616	-54.24	-64.65	15.1	Pass
126.6	253.2	0.8	139.5132	6844.5132	-54.21	-64.62	14.21	Pass

11ax80 (SU), U-NII-7, High Channel

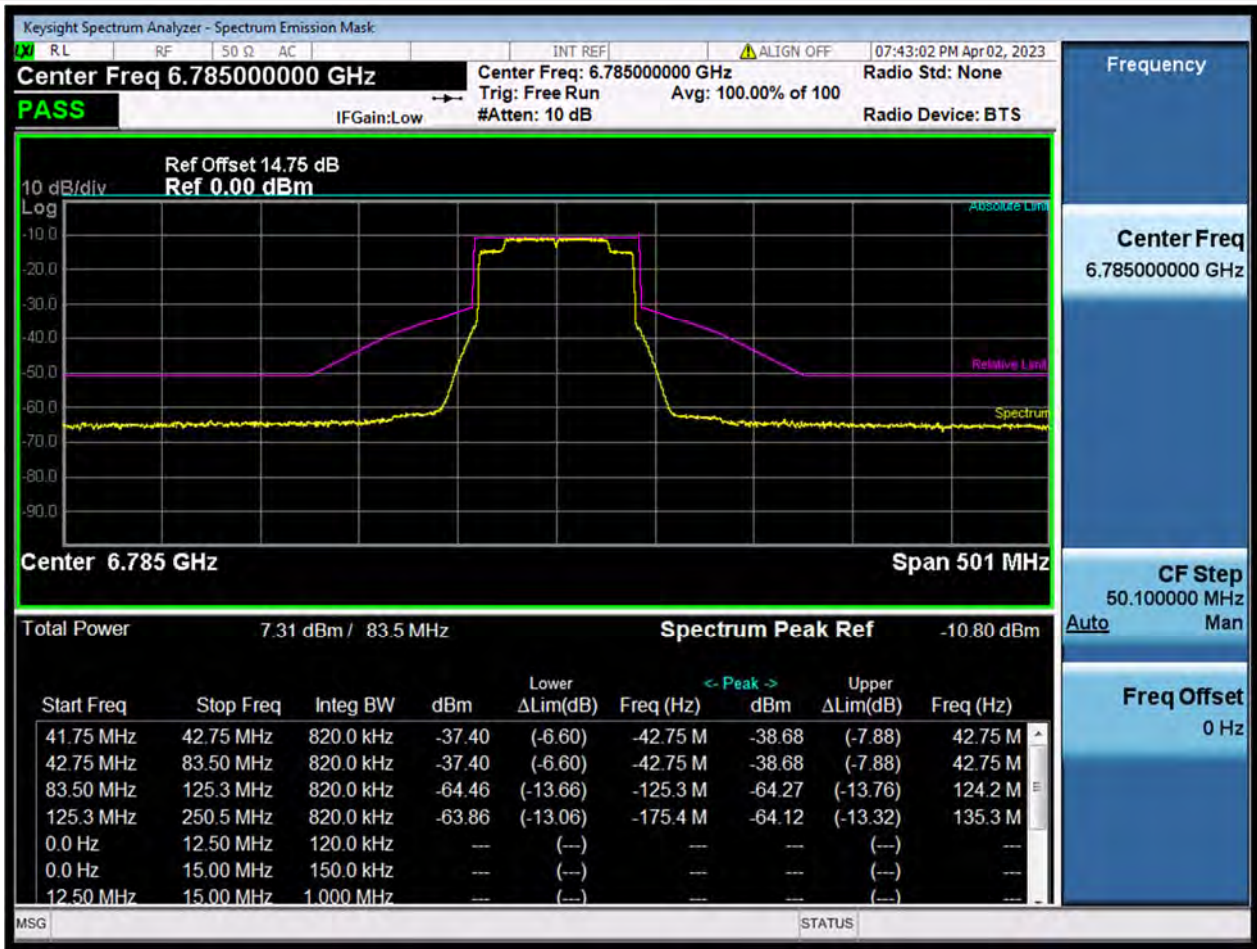


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-250.5	-125.25	0.8	-175.35	6609.65	-53.06	-63.86	-13.06	Pass
-125.25	-83.5	0.8	-125.25	6659.75	-53.66	-64.46	-13.66	Pass
-83.5	-42.75	0.8	-42.75	6742.25	-26.6	-37.4	-6.6	Pass
-42.75	-41.75	0.8	-42.75	6742.25	-26.6	-37.4	-6.6	Pass
41.75	42.75	0.8	42.75	6827.75	-27.88	-38.68	7.88	Pass
42.75	83.5	0.8	42.75	6827.75	-27.88	-38.68	7.88	Pass
83.5	125.25	0.8	124.248	6909.248	-53.47	-64.27	13.76	Pass
125.25	250.5	0.8	135.27	6920.27	-53.32	-64.12	13.32	Pass

11ax160 (SU), U-NII-7, Low Channel

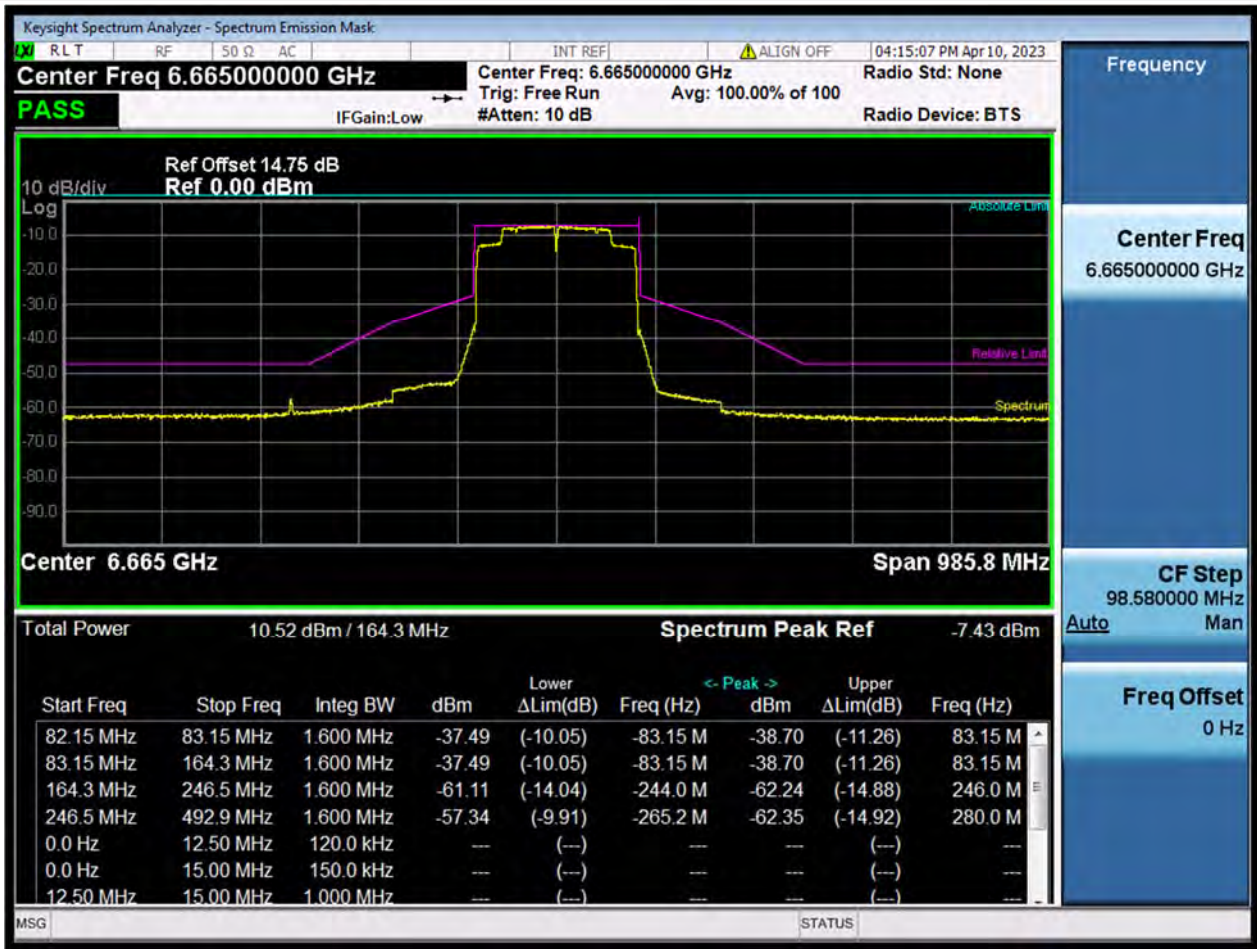


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.9	-246.45	1.6	-265.1802	6399.8198	-49.91	-57.34	-9.91	Pass
-246.45	-164.3	1.6	-243.9855	6421.0145	-53.68	-61.11	-14.04	Pass
-164.3	-83.15	1.6	-83.15	6581.85	-30.05	-37.49	-10.05	Pass
-83.15	-82.15	1.6	-83.15	6581.85	-30.05	-37.49	-10.05	Pass
82.15	83.15	1.6	83.15	6748.15	-31.26	-38.7	11.26	Pass
83.15	164.3	1.6	83.15	6748.15	-31.26	-38.7	11.26	Pass
164.3	246.45	1.6	245.9571	6910.9571	-54.8	-62.24	14.88	Pass
246.45	492.9	1.6	279.9672	6944.9672	-54.92	-62.35	14.92	Pass

11ax160 (SU), U-NII-7, High Channel

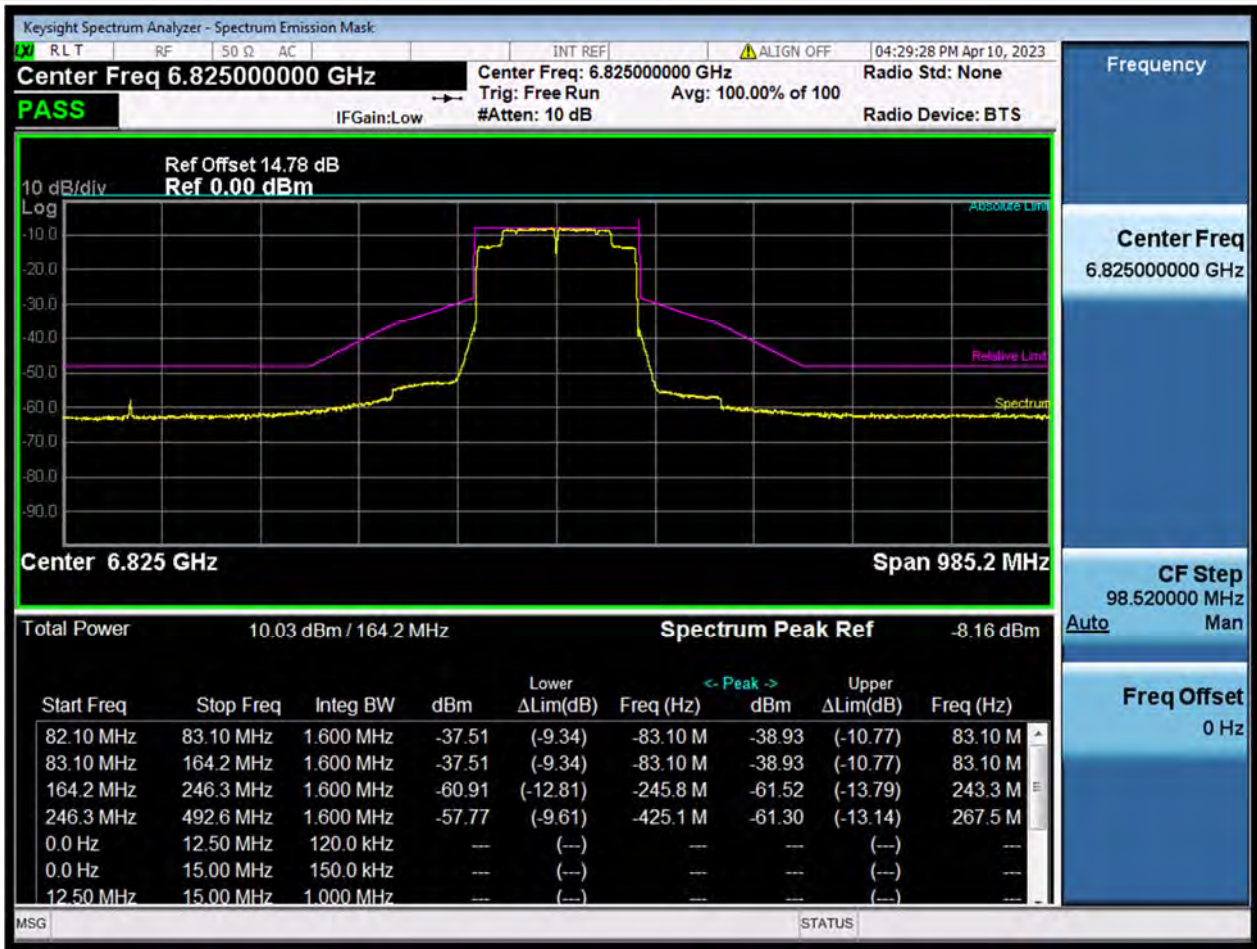


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.6	-246.3	1.6	-425.1138	6399.8862	-49.61	-57.77	-9.61	Pass
-246.3	-164.2	1.6	-245.8074	6579.1926	-52.74	-60.91	-12.81	Pass
-164.2	-83.1	1.6	-83.1	6741.9	-29.34	-37.51	-9.34	Pass
-83.1	-82.1	1.6	-83.1	6741.9	-29.34	-37.51	-9.34	Pass
82.1	83.1	1.6	83.1	6908.1	-30.77	-38.93	10.77	Pass
83.1	164.2	1.6	83.1	6908.1	-30.77	-38.93	10.77	Pass
164.2	246.3	1.6	243.3444	7068.3444	-53.36	-61.52	13.79	Pass
246.3	492.6	1.6	267.4818	7092.4818	-53.14	-61.3	13.14	Pass

11ax20 (SU), U-NII-8, Low Channel

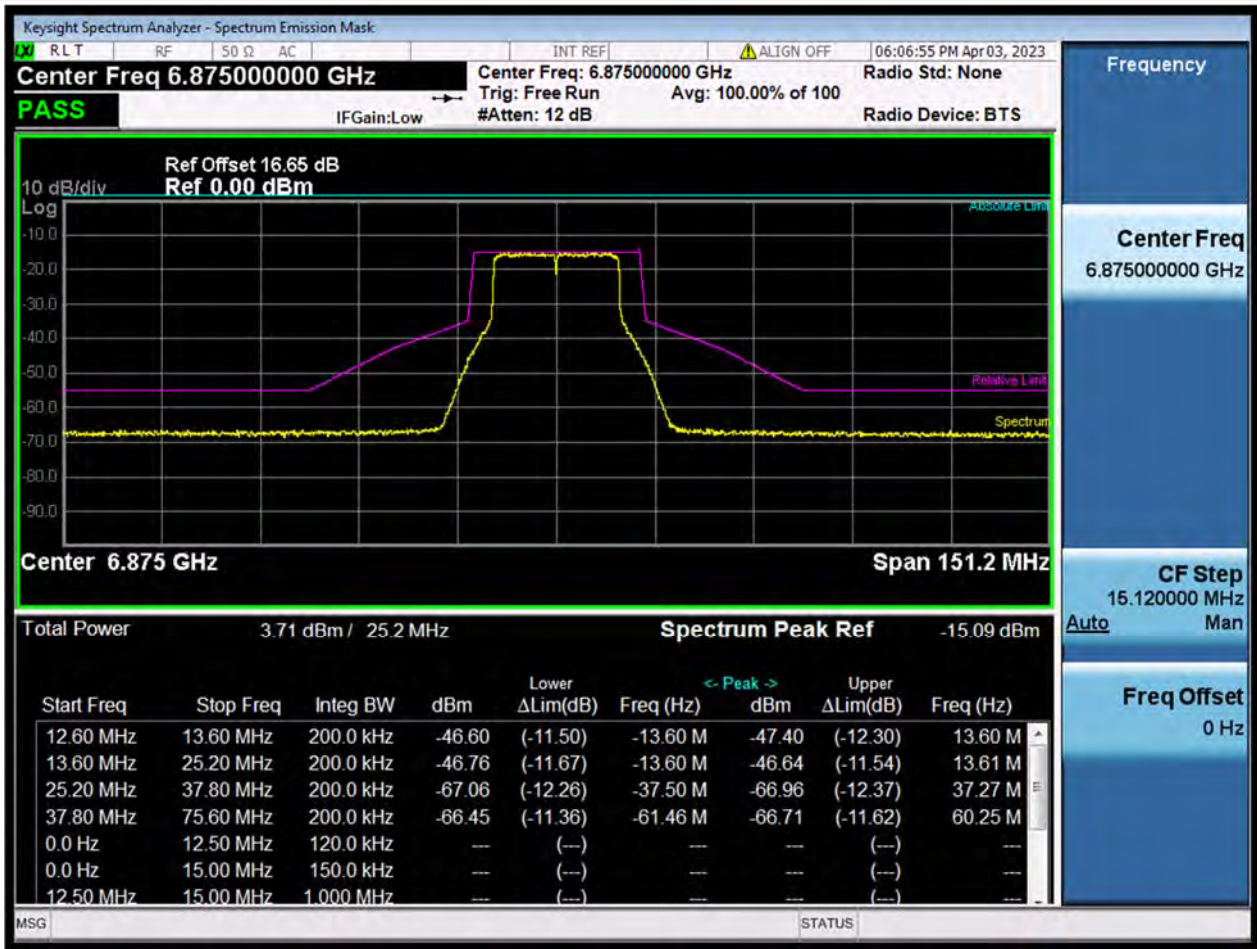


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.6	-37.8	0.2	-61.4628	6813.5372	-51.36	-66.45	-11.36	Pass
-37.8	-25.2	0.2	-37.4976	6837.5024	-51.97	-67.06	-12.26	Pass
-25.2	-13.6	0.2	-13.6	6861.4	-31.67	-46.76	-11.67	Pass
-13.6	-12.6	0.2	-13.6	6861.4	-31.5	-46.6	-11.5	Pass
12.6	13.6	0.2	13.6	6888.6	-32.3	-47.4	12.3	Pass
13.6	25.2	0.2	13.608	6888.608	-31.55	-46.64	11.54	Pass
25.2	37.8	0.2	37.2708	6912.2708	-51.86	-66.96	12.37	Pass
37.8	75.6	0.2	60.2532	6935.2532	-51.62	-66.71	11.62	Pass

11ax20 (SU), U-NII-8, Middle Channel

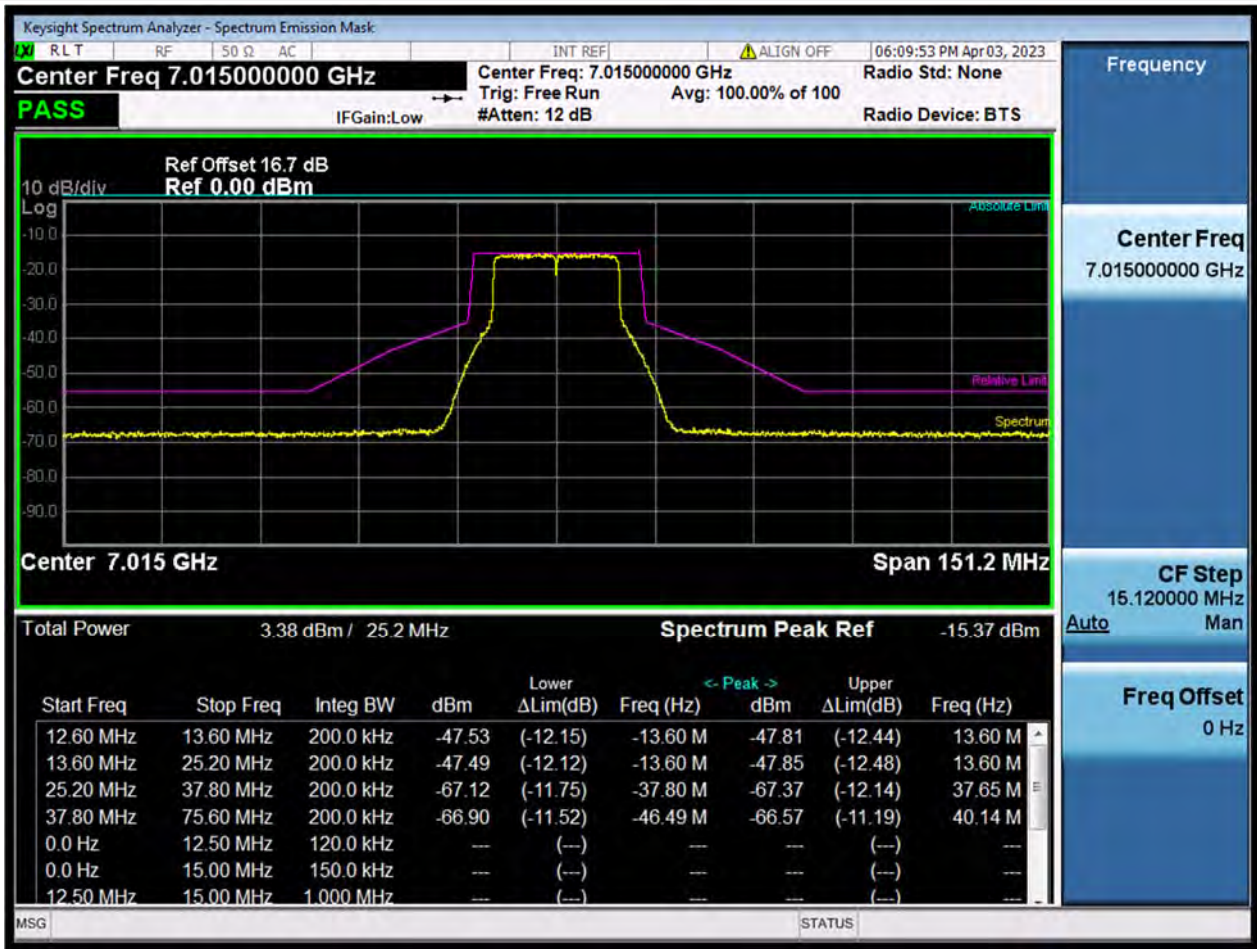


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.6	-37.8	0.2	-46.494	6968.506	-51.52	-66.9	-11.52	Pass
-37.8	-25.2	0.2	-37.8	6977.2	-51.75	-67.12	-11.75	Pass
-25.2	-13.6	0.2	-13.6	7001.4	-32.12	-47.49	-12.12	Pass
-13.6	-12.6	0.2	-13.6	7001.4	-32.15	-47.53	-12.15	Pass
12.6	13.6	0.2	13.6	7028.6	-32.44	-47.81	12.44	Pass
13.6	25.2	0.2	13.6	7028.6	-32.48	-47.85	12.48	Pass
25.2	37.8	0.2	37.6488	7052.6488	-52	-67.37	12.14	Pass
37.8	75.6	0.2	40.1436	7055.1436	-51.19	-66.57	11.19	Pass

11ax20 (SU), U-NII-8, Middle Channel

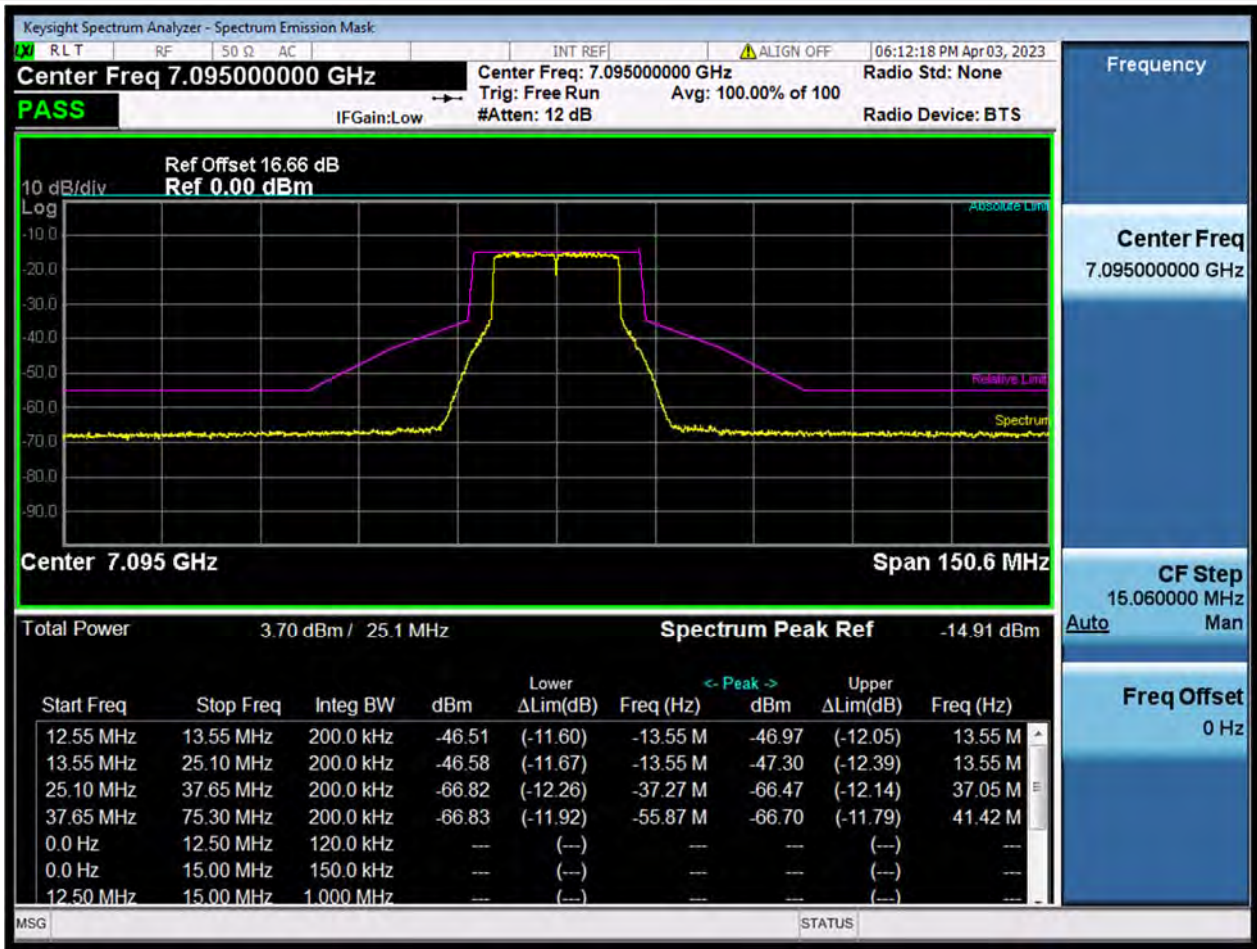


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.3	-37.65	0.2	-55.8726	7039.1274	-51.92	-66.83	-11.92	Pass
-37.65	-25.1	0.2	-37.2735	7057.7265	-51.9	-66.82	-12.26	Pass
-25.1	-13.55	0.2	-13.554	7081.446	-31.67	-46.58	-11.67	Pass
-13.55	-12.55	0.2	-13.55	7081.45	-31.6	-46.51	-11.6	Pass
12.55	13.55	0.2	13.55	7108.55	-32.05	-46.97	12.05	Pass
13.55	25.1	0.2	13.55	7108.55	-32.39	-47.3	12.39	Pass
25.1	37.65	0.2	37.0476	7132.0476	-51.56	-66.47	12.14	Pass
37.65	75.3	0.2	41.415	7136.415	-51.79	-66.7	11.79	Pass

11ax20 (SU), U-NII-8, High Channel

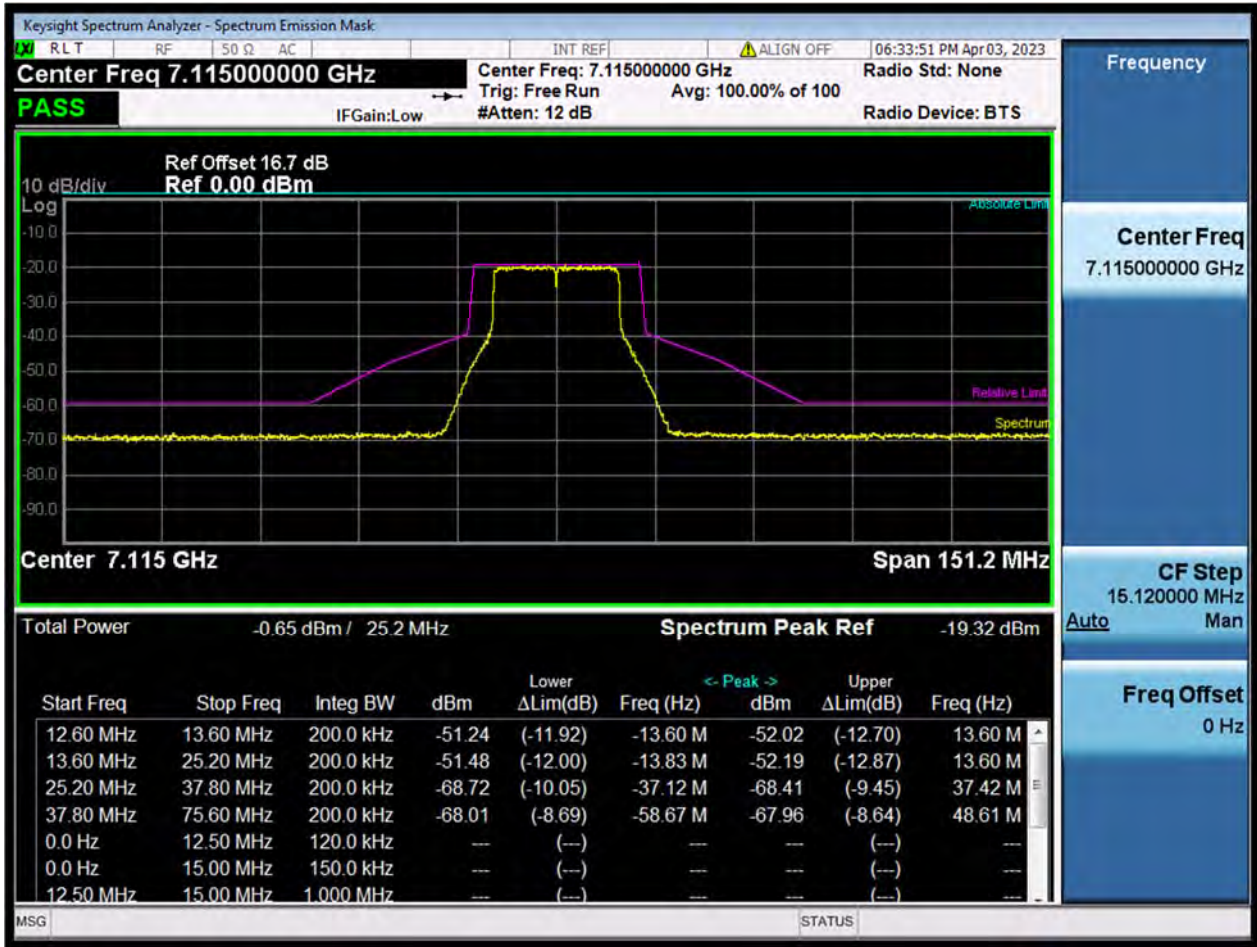


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.6	-37.8	0.2	-58.6656	7056.3344	-48.69	-68.01	-8.69	Pass
-37.8	-25.2	0.2	-37.1196	7077.8804	-49.4	-68.72	-10.05	Pass
-25.2	-13.6	0.2	-13.8348	7101.1652	-32.16	-51.48	-12	Pass
-13.6	-12.6	0.2	-13.6	7101.4	-31.92	-51.24	-11.92	Pass
12.6	13.6	0.2	13.6	7128.6	-32.7	-52.02	12.7	Pass
13.6	25.2	0.2	13.6	7128.6	-32.87	-52.19	12.87	Pass
25.2	37.8	0.2	37.422	7152.422	-49.09	-68.41	9.45	Pass
37.8	75.6	0.2	48.6108	7163.6108	-48.64	-67.96	8.64	Pass

11ax40 (SU), U-NII-8, Low Channel

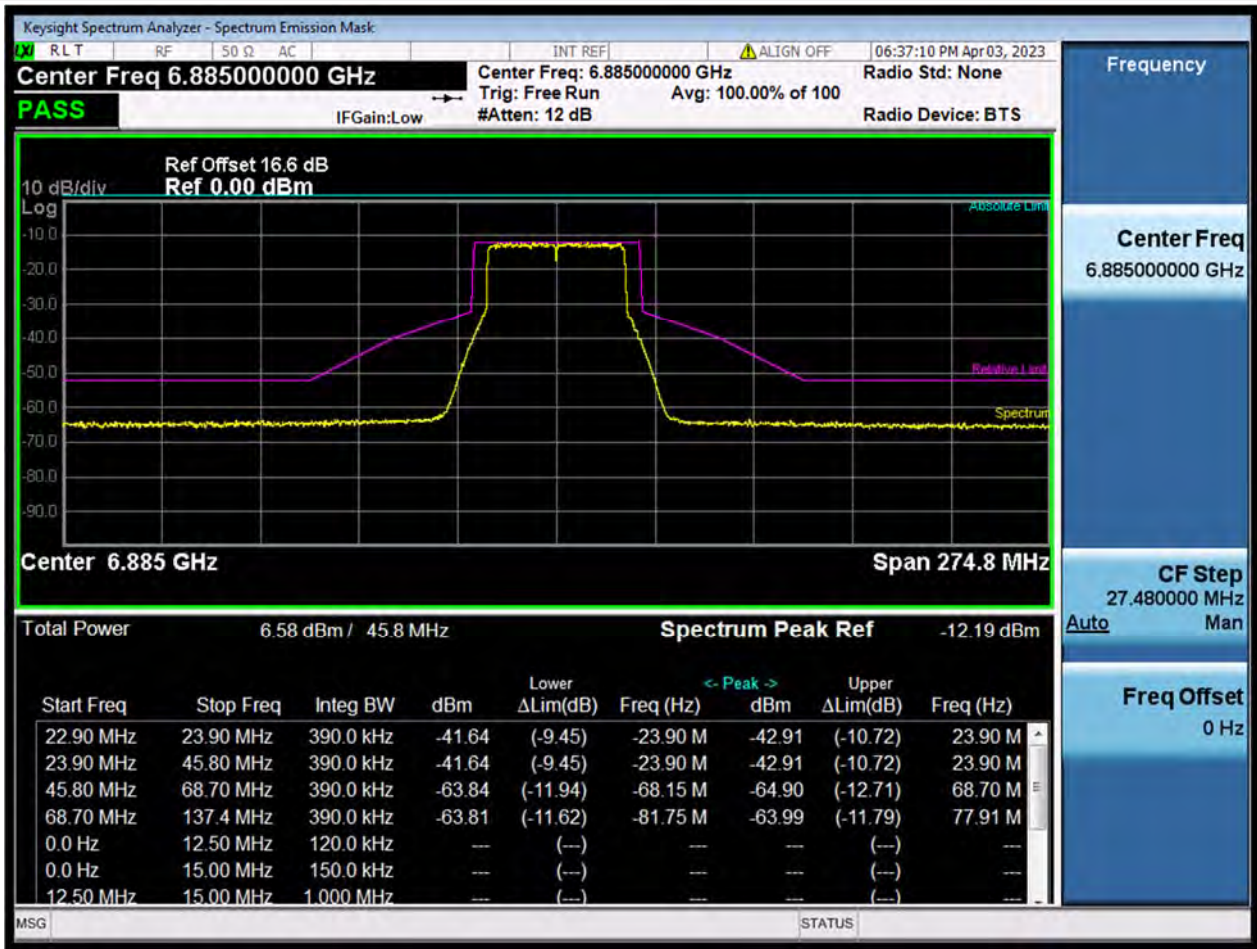


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-137.4	-68.7	0.4	-81.753	6803.247	-51.62	-63.81	-11.62	Pass
-68.7	-45.8	0.4	-68.1504	6816.8496	-51.65	-63.84	-11.94	Pass
-45.8	-23.9	0.4	-23.9	6861.1	-29.45	-41.64	-9.45	Pass
-23.9	-22.9	0.4	-23.9	6861.1	-29.45	-41.64	-9.45	Pass
22.9	23.9	0.4	23.9	6908.9	-30.72	-42.91	10.72	Pass
23.9	45.8	0.4	23.9	6908.9	-30.72	-42.91	10.72	Pass
45.8	68.7	0.4	68.7	6953.7	-52.71	-64.9	12.71	Pass
68.7	137.4	0.4	77.9058	6962.9058	-51.79	-63.99	11.79	Pass

11ax40 (SU), U-NII-8, Middle Channel

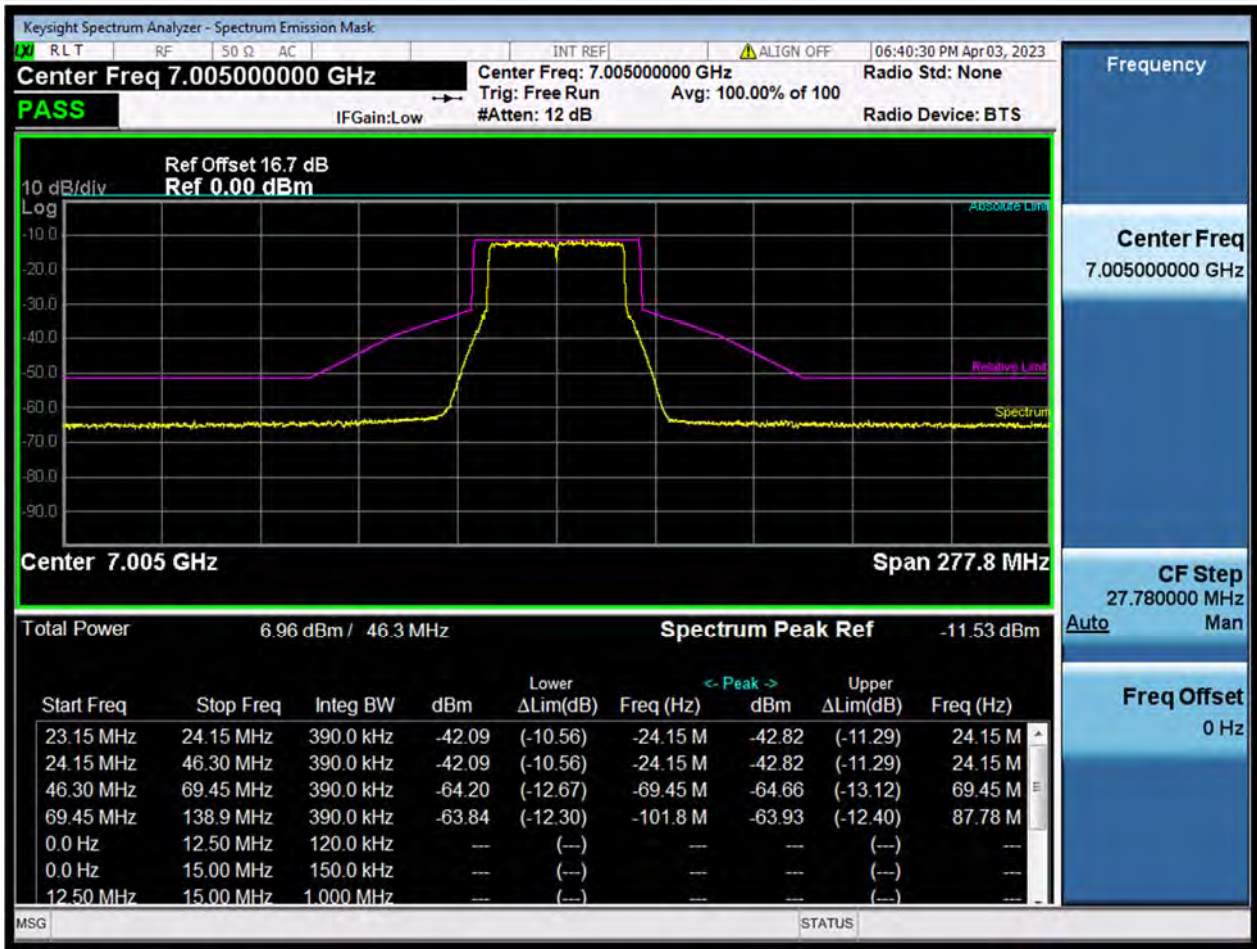


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.9	-69.45	0.4	-101.8137	6903.1863	-52.3	-63.84	-12.3	Pass
-69.45	-46.3	0.4	-69.45	6935.55	-52.67	-64.2	-12.67	Pass
-46.3	-24.15	0.4	-24.15	6980.85	-30.56	-42.09	-10.56	Pass
-24.15	-23.15	0.4	-24.15	6980.85	-30.56	-42.09	-10.56	Pass
23.15	24.15	0.4	24.15	7029.15	-31.29	-42.82	11.29	Pass
24.15	46.3	0.4	24.15	7029.15	-31.29	-42.82	11.29	Pass
46.3	69.45	0.4	69.45	7074.45	-53.12	-64.66	13.12	Pass
69.45	138.9	0.4	87.7848	7092.7848	-52.4	-63.93	12.4	Pass

11ax40 (SU), U-NII-8, High Channel

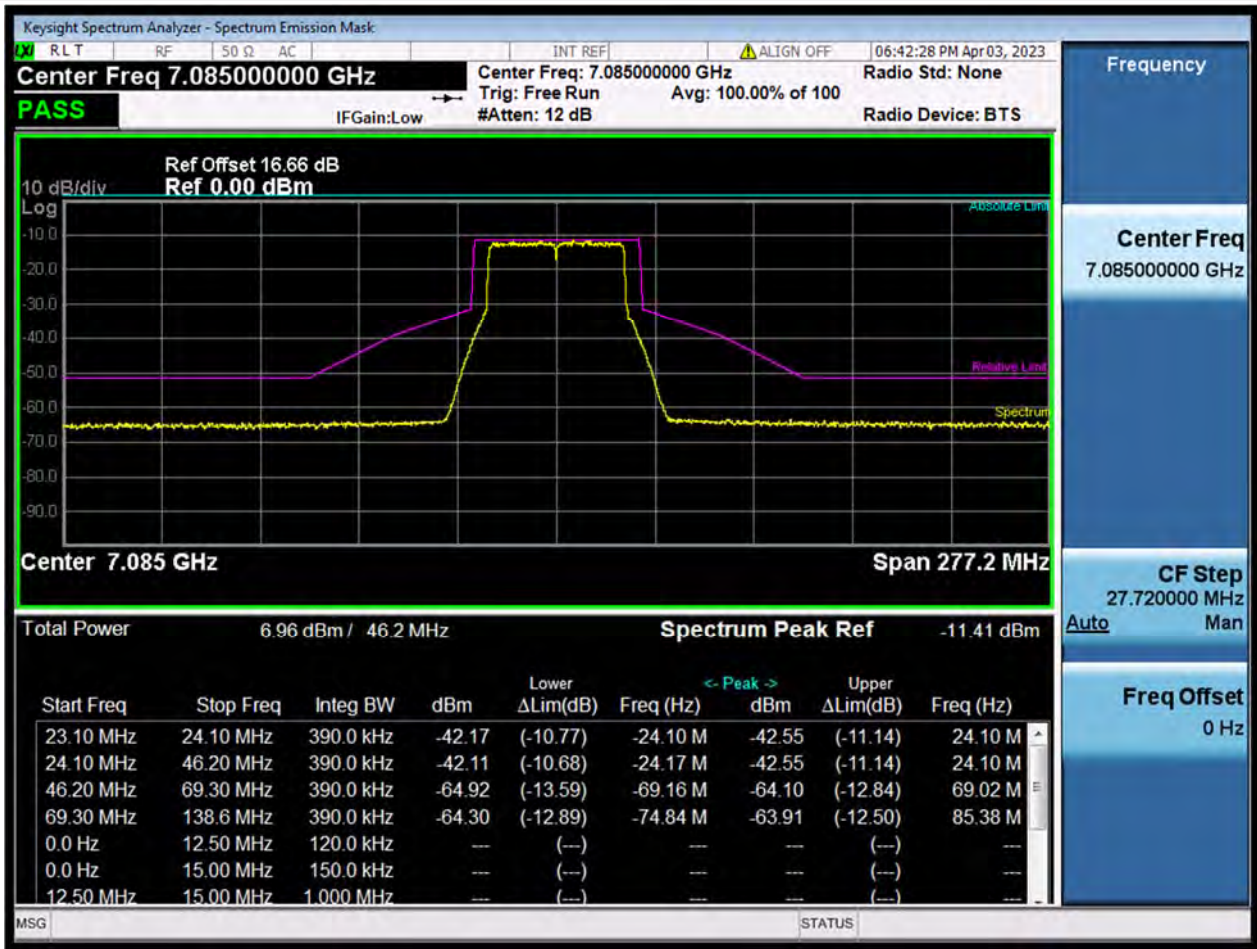


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.6	-69.3	0.4	-74.844	7010.156	-52.89	-64.3	-12.89	Pass
-69.3	-46.2	0.4	-69.1614	7015.8386	-53.52	-64.92	-13.59	Pass
-46.2	-24.1	0.4	-	7060.826387	-30.71	-42.11	-10.68	Pass
-24.1	-23.1	0.4	-24.1	7060.9	-30.77	-42.17	-10.77	Pass
23.1	24.1	0.4	24.1	7109.1	-31.14	-42.55	11.14	Pass
24.1	46.2	0.4	24.1	7109.1	-31.14	-42.55	11.14	Pass
46.2	69.3	0.4	69.0228	7154.0228	-52.7	-64.1	12.84	Pass
69.3	138.6	0.4	85.3776	7170.3776	-52.5	-63.91	12.5	Pass

11ax80 (SU), U-NII-8, Low Channel

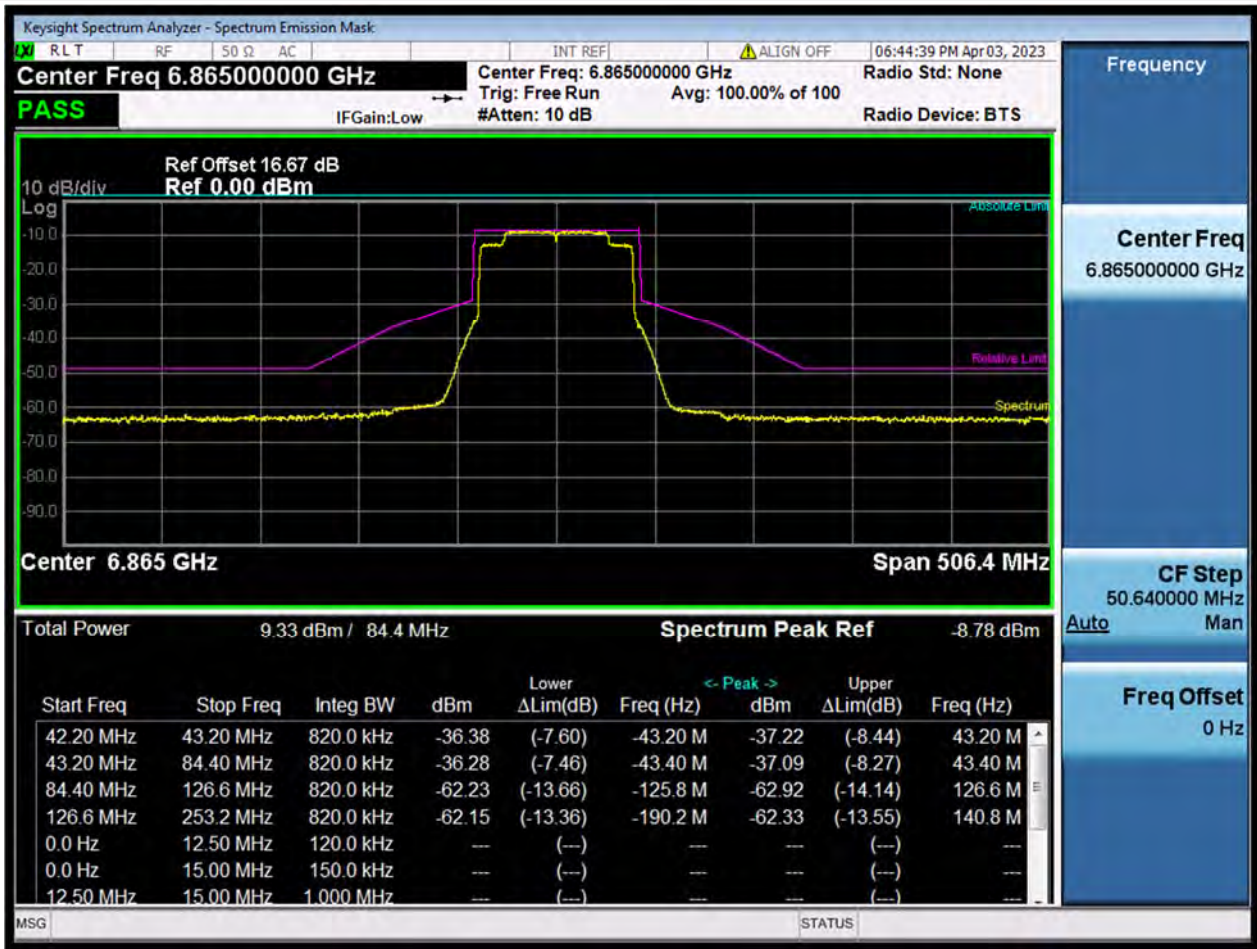


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-253.2	-126.6	0.8	-190.1532	6674.8468	-53.36	-62.15	-13.36	Pass
-126.6	-84.4	0.8	-125.8404	6739.1596	-53.44	-62.23	-13.66	Pass
-84.4	-43.2	0.8	-	6821.597901	-27.5	-36.28	-7.46	Pass
-43.2	-42.2	0.8	-43.2	6821.8	-27.6	-36.38	-7.6	Pass
42.2	43.2	0.8	43.2	6908.2	-28.44	-37.22	8.44	Pass
43.2	84.4	0.8	43.402099	6908.402099	-28.31	-37.09	8.27	Pass
84.4	126.6	0.8	126.6	6991.6	-54.14	-62.92	14.14	Pass
126.6	253.2	0.8	140.7792	7005.7792	-53.55	-62.33	13.55	Pass

11ax80 (SU), U-NII-8, Middle Channel

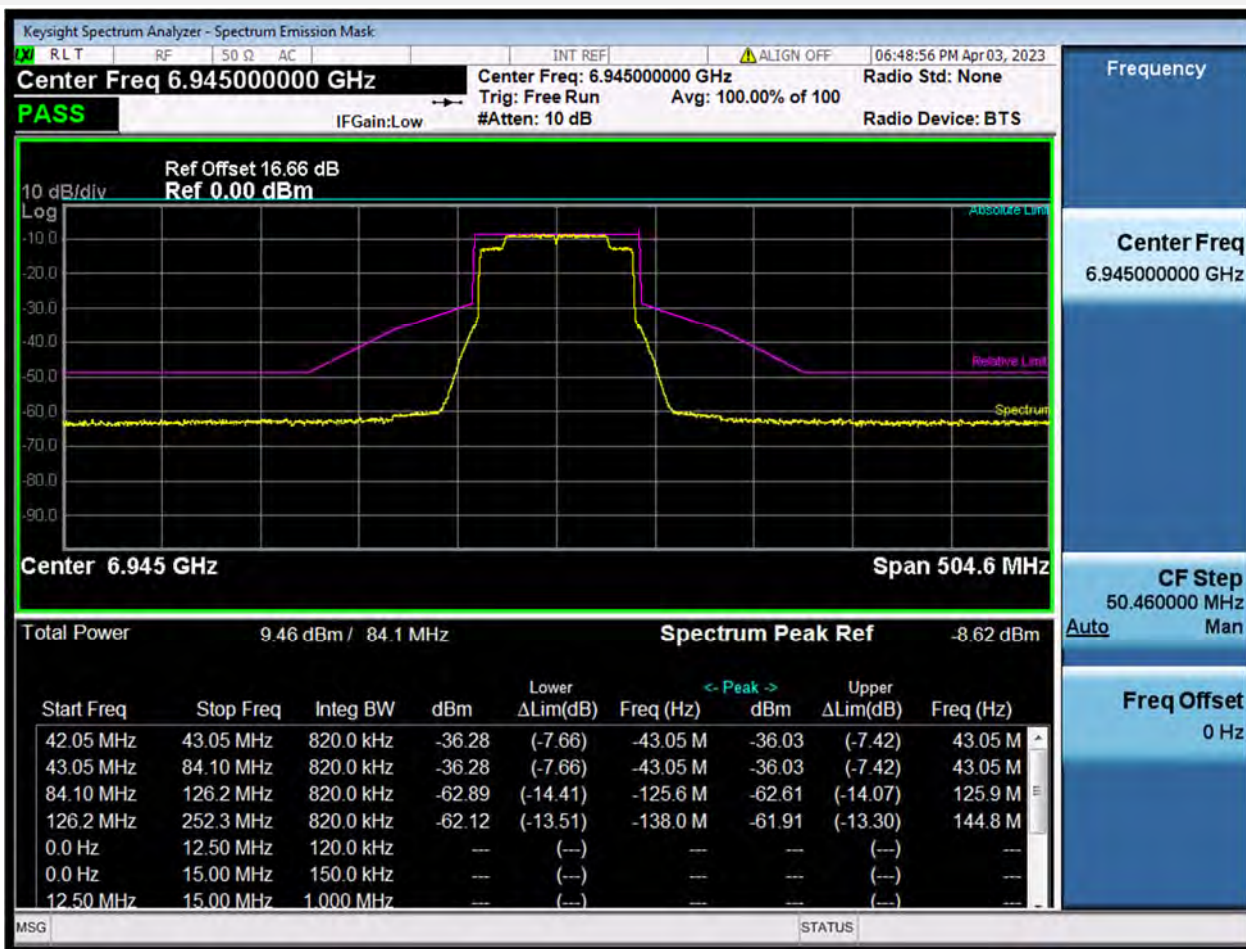


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-252.3	-126.15	0.8	-138.0081	6806.9919	-53.51	-62.12	-13.51	Pass
-126.15	-84.1	0.8	-125.6454	6819.3546	-54.27	-62.89	-14.41	Pass
-84.1	-43.05	0.8	-43.05	6901.95	-27.66	-36.28	-7.66	Pass
-43.05	-42.05	0.8	-43.05	6901.95	-27.66	-36.28	-7.66	Pass
42.05	43.05	0.8	43.05	6988.05	-27.42	-36.03	7.42	Pass
43.05	84.1	0.8	43.05	6988.05	-27.42	-36.03	7.42	Pass
84.1	126.15	0.8	125.8977	7070.8977	-54	-62.61	14.07	Pass
126.15	252.3	0.8	144.8202	7089.8202	-53.3	-61.91	13.3	Pass

11ax80 (SU), U-NII-8, High Channel

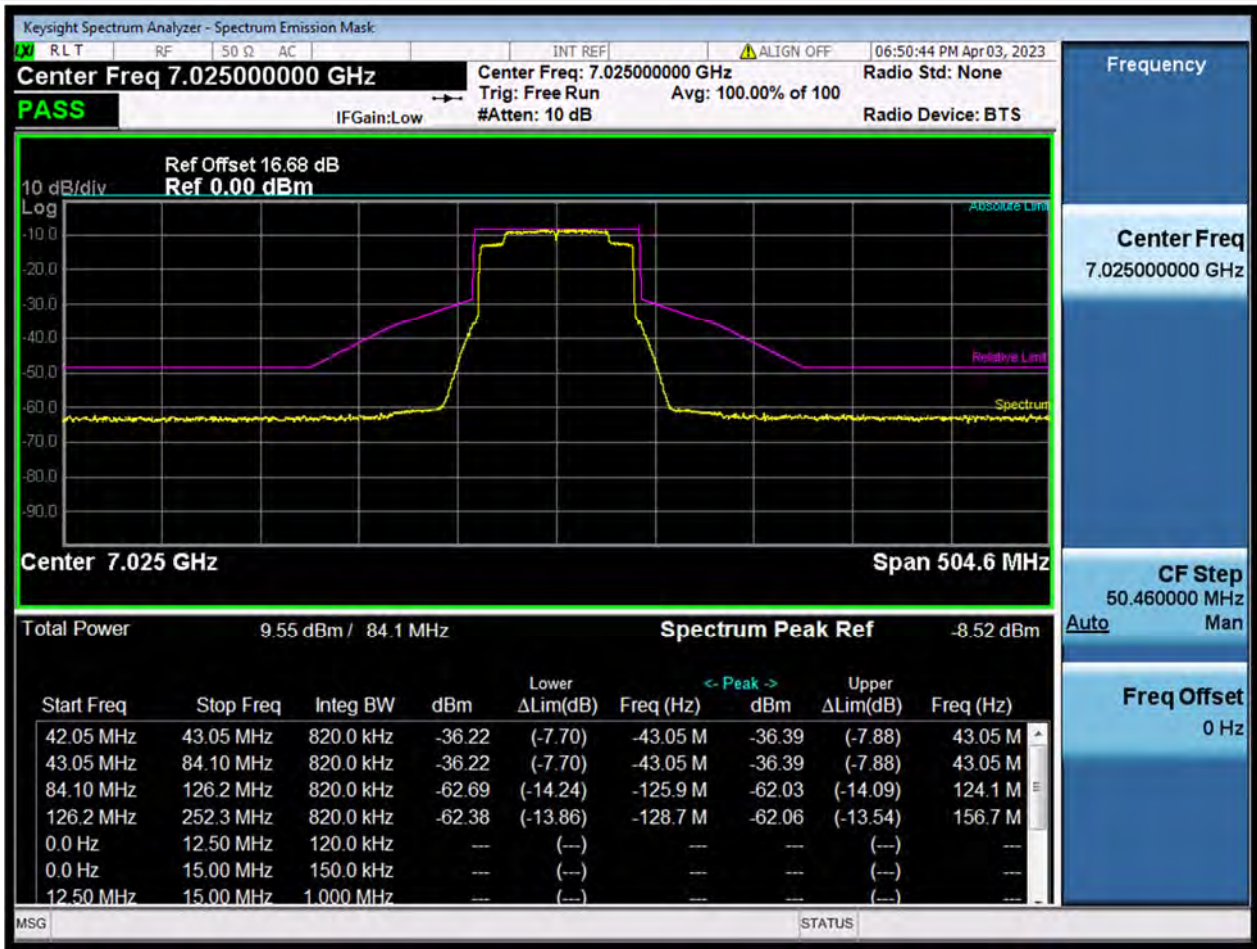

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-252.3	-126.15	0.8	-128.673	6896.327	-53.86	-62.38	-13.86	Pass
-126.15	-84.1	0.8	-125.8977	6899.1023	-54.17	-62.69	-14.24	Pass
-84.1	-43.05	0.8	-43.05	6981.95	-27.7	-36.22	-7.7	Pass
-43.05	-42.05	0.8	-43.05	6981.95	-27.7	-36.22	-7.7	Pass
42.05	43.05	0.8	43.05	7068.05	-27.88	-36.39	7.88	Pass
43.05	84.1	0.8	43.05	7068.05	-27.88	-36.39	7.88	Pass
84.1	126.15	0.8	124.1316	7149.1316	-53.52	-62.03	14.09	Pass
126.15	252.3	0.8	156.6783	7181.6783	-53.54	-62.06	13.54	Pass


11ax160 (SU), U-NII-8, Middle Channel

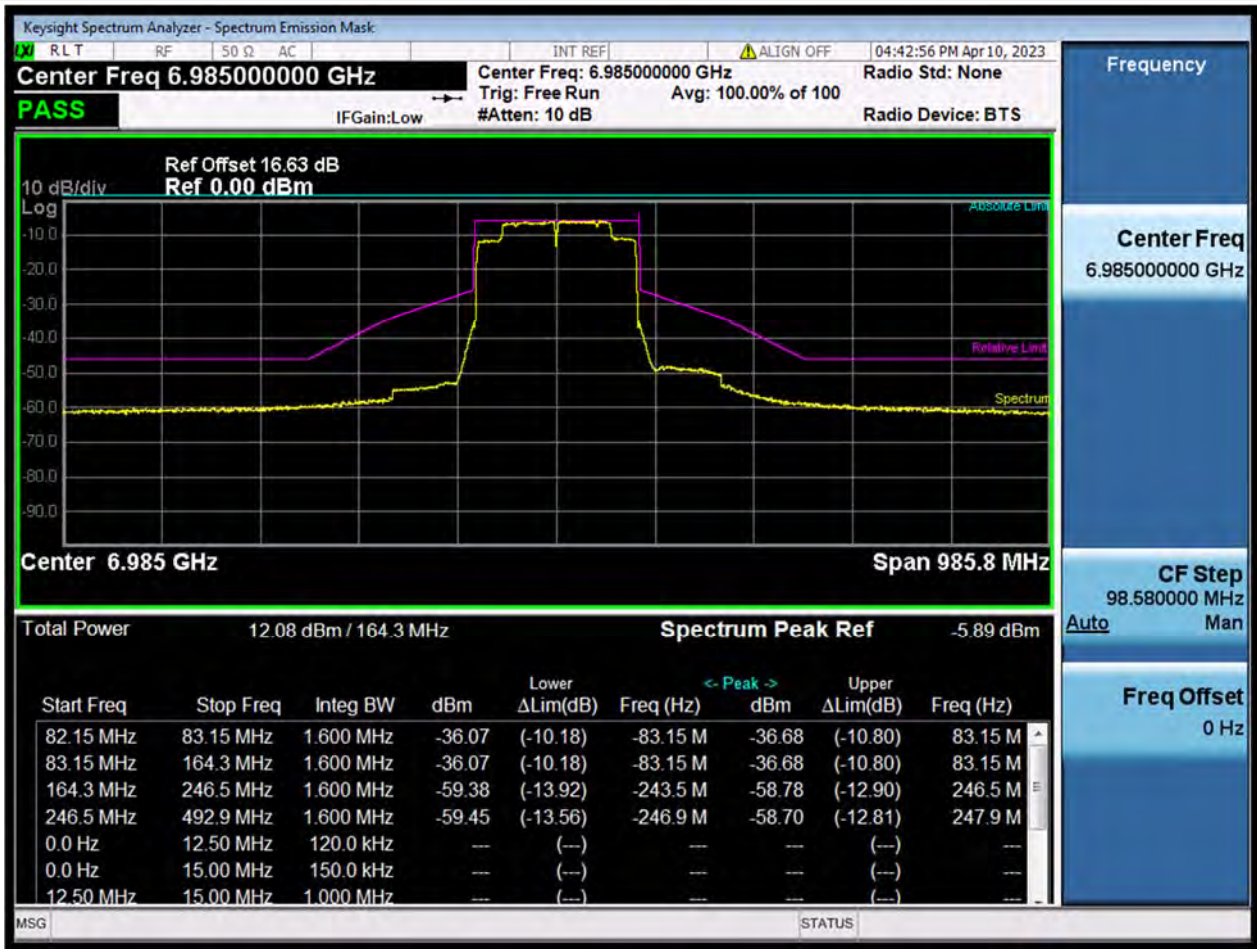

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.9	-246.45	1.6	-246.9429	6738.0571	-53.56	-59.45	-13.56	Pass
-246.45	-164.3	1.6	-243.4926	6741.5074	-53.49	-59.38	-13.92	Pass
-164.3	-83.15	1.6	-83.15	6901.85	-30.18	-36.07	-10.18	Pass
-83.15	-82.15	1.6	-83.15	6901.85	-30.18	-36.07	-10.18	Pass
82.15	83.15	1.6	83.15	7068.15	-30.8	-36.68	10.8	Pass
83.15	164.3	1.6	83.15	7068.15	-30.8	-36.68	10.8	Pass
164.3	246.45	1.6	246.45	7231.45	-52.9	-58.78	12.9	Pass
246.45	492.9	1.6	247.9287	7232.9287	-52.81	-58.7	12.81	Pass


MIMO-Aux. Antenna

11ax20 (SU), U-NII-5, Low Channel

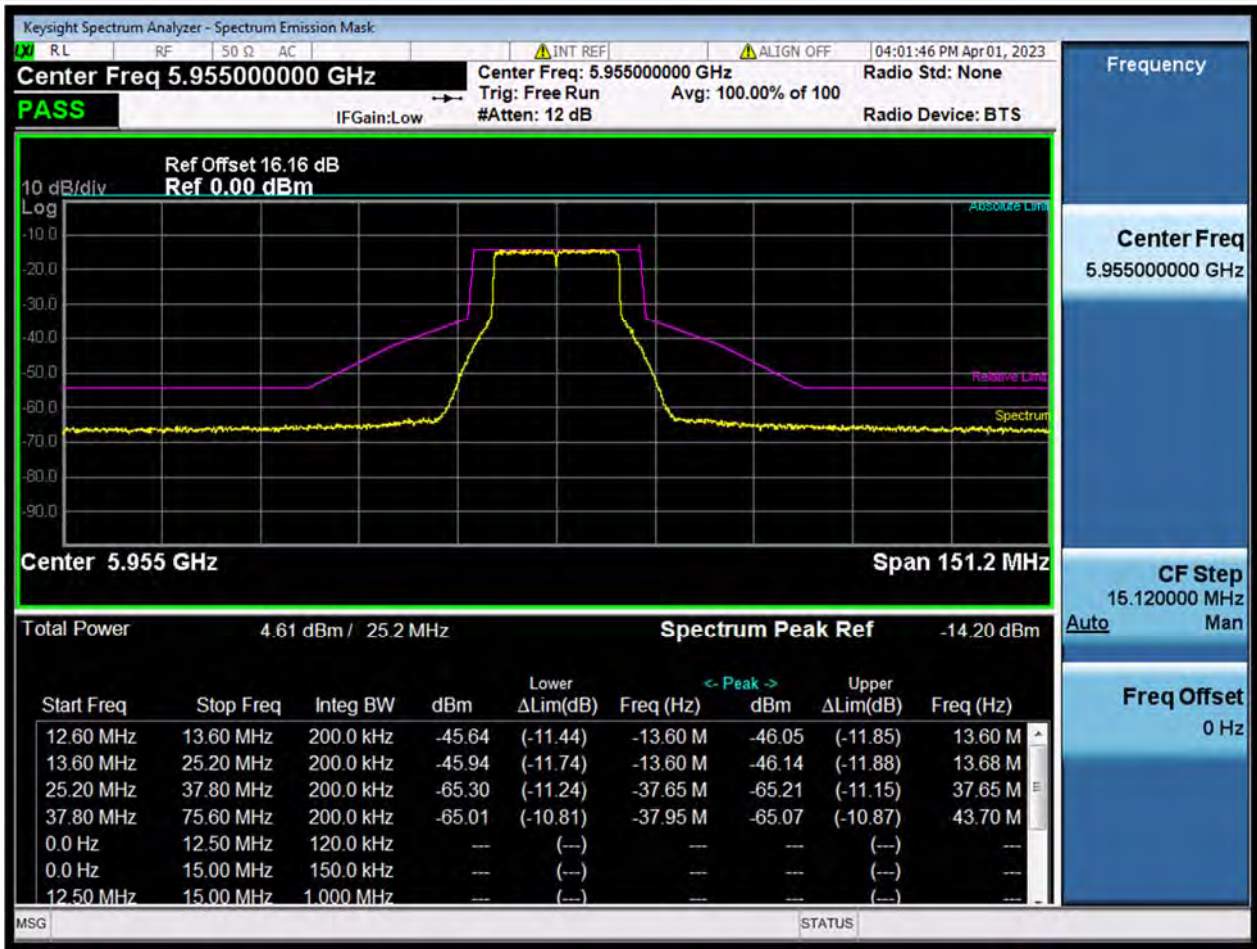


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.6	-37.8	0.2	-37.9512	5917.0488	-50.81	-65.01	-10.81	Pass
-37.8	-25.2	0.2	-37.6488	5917.3512	-51.1	-65.3	-11.24	Pass
-25.2	-13.6	0.2	-13.6	5941.4	-31.74	-45.94	-11.74	Pass
-13.6	-12.6	0.2	-13.6	5941.4	-31.44	-45.64	-11.44	Pass
12.6	13.6	0.2	13.6	5968.6	-31.85	-46.05	11.85	Pass
13.6	25.2	0.2	13.6836	5968.6836	-31.94	-46.14	11.88	Pass
25.2	37.8	0.2	37.6488	5992.6488	-51.01	-65.21	11.15	Pass
37.8	75.6	0.2	43.6968	5998.6968	-50.87	-65.07	10.87	Pass

11ax20 (SU), U-NII-5, Middle Channel

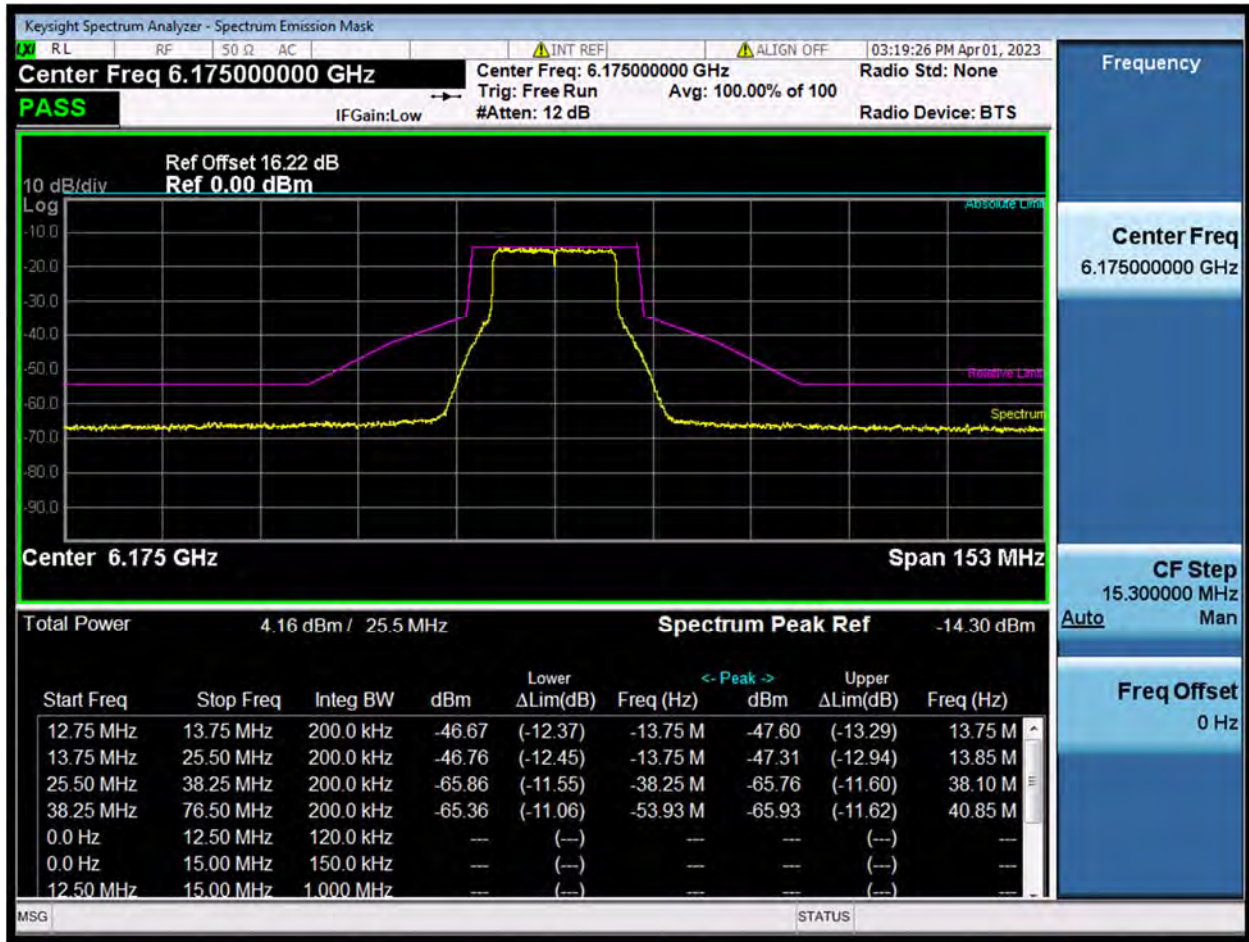

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.5	-38.25	0.2	-53.9325	6121.0675	-51.06	-65.36	-11.06	Pass
-38.25	-25.5	0.2	-38.25	6136.75	-51.55	-65.86	-11.55	Pass
-25.5	-13.75	0.2	-13.75	6161.25	-32.45	-46.76	-12.45	Pass
-13.75	-12.75	0.2	-13.75	6161.25	-32.37	-46.67	-12.37	Pass
12.75	13.75	0.2	13.75	6188.75	-33.29	-47.6	13.29	Pass
13.75	25.5	0.2	13.8465	6188.8465	-33.01	-47.31	12.94	Pass
25.5	38.25	0.2	38.097	6213.097	-51.46	-65.76	11.6	Pass
38.25	76.5	0.2	40.851	6215.851	-51.62	-65.93	11.62	Pass

11ax20 (SU), U-NII-5, High Channel

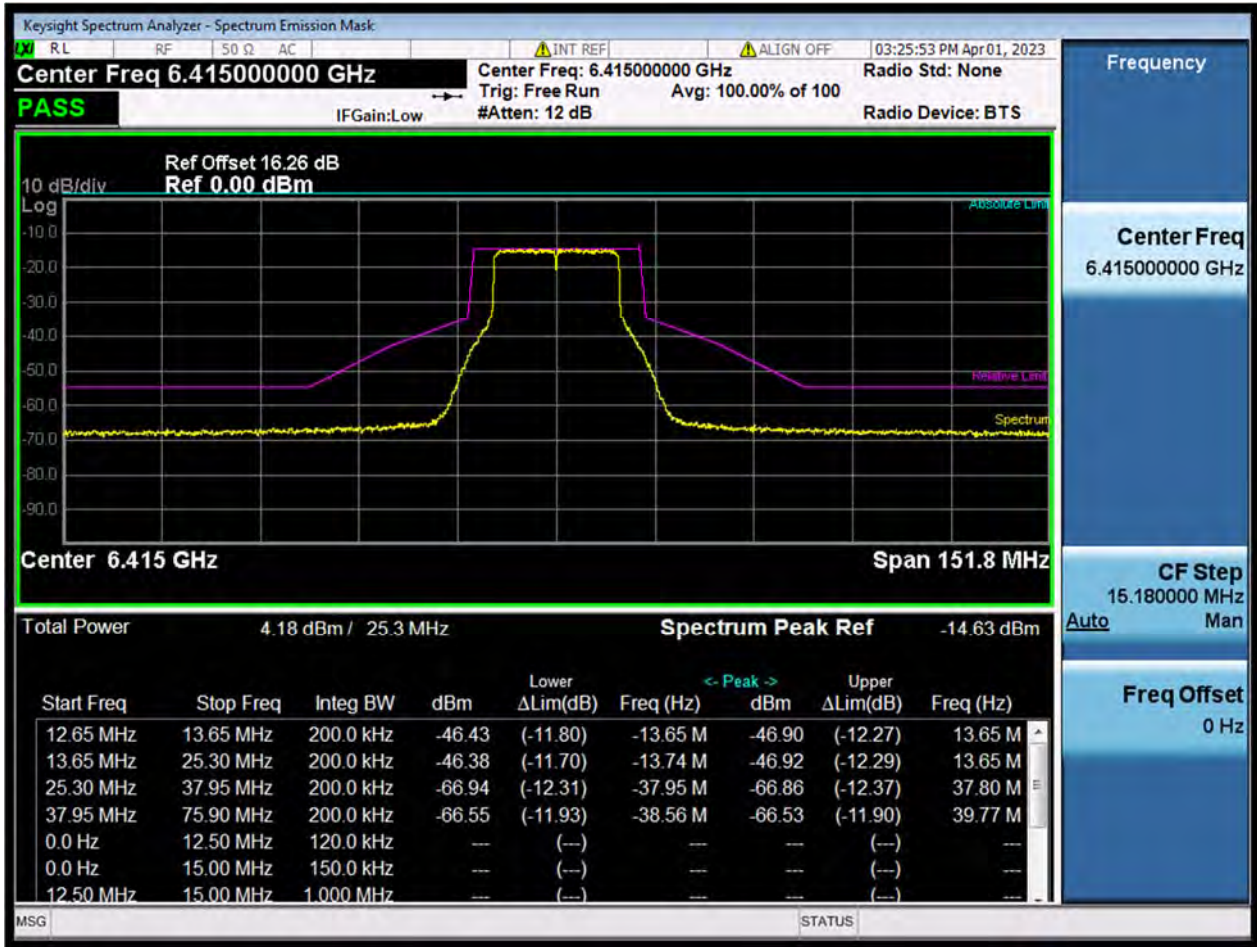


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.9	-37.95	0.2	-38.5572	6376.4428	-51.93	-66.55	-11.93	Pass
-37.95	-25.3	0.2	-37.95	6377.05	-52.31	-66.94	-12.31	Pass
-25.3	-13.65	0.2	-13.7379	6401.2621	-31.76	-46.38	-11.7	Pass
-13.65	-12.65	0.2	-13.65	6401.35	-31.8	-46.43	-11.8	Pass
12.65	13.65	0.2	13.65	6428.65	-32.27	-46.9	12.27	Pass
13.65	25.3	0.2	13.65	6428.65	-32.29	-46.92	12.29	Pass
25.3	37.95	0.2	37.7982	6452.7982	-52.23	-66.86	12.37	Pass
37.95	75.9	0.2	39.7716	6454.7716	-51.9	-66.53	11.9	Pass

11ax40 (SU), U-NII-5, Low Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-137.4	-68.7	0.4	-72.822	5892.178	-51.19	-62.77	-11.19	Pass
-68.7	-45.8	0.4	-68.013	5896.987	-50.55	-62.13	-10.91	Pass
-45.8	-23.9	0.4	-23.9	5941.1	-29.42	-41	-9.42	Pass
-23.9	-22.9	0.4	-23.9	5941.1	-29.42	-41	-9.42	Pass
22.9	23.9	0.4	23.9	5988.9	-29.85	-41.44	9.85	Pass
23.9	45.8	0.4	24.101649	5989.101649	-29.84	-41.42	9.76	Pass
45.8	68.7	0.4	68.7	6033.7	-52.05	-63.63	12.05	Pass
68.7	137.4	0.4	70.3488	6035.3488	-51.15	-62.74	11.15	Pass

11ax40 (SU), U-NII-5, Middle Channel

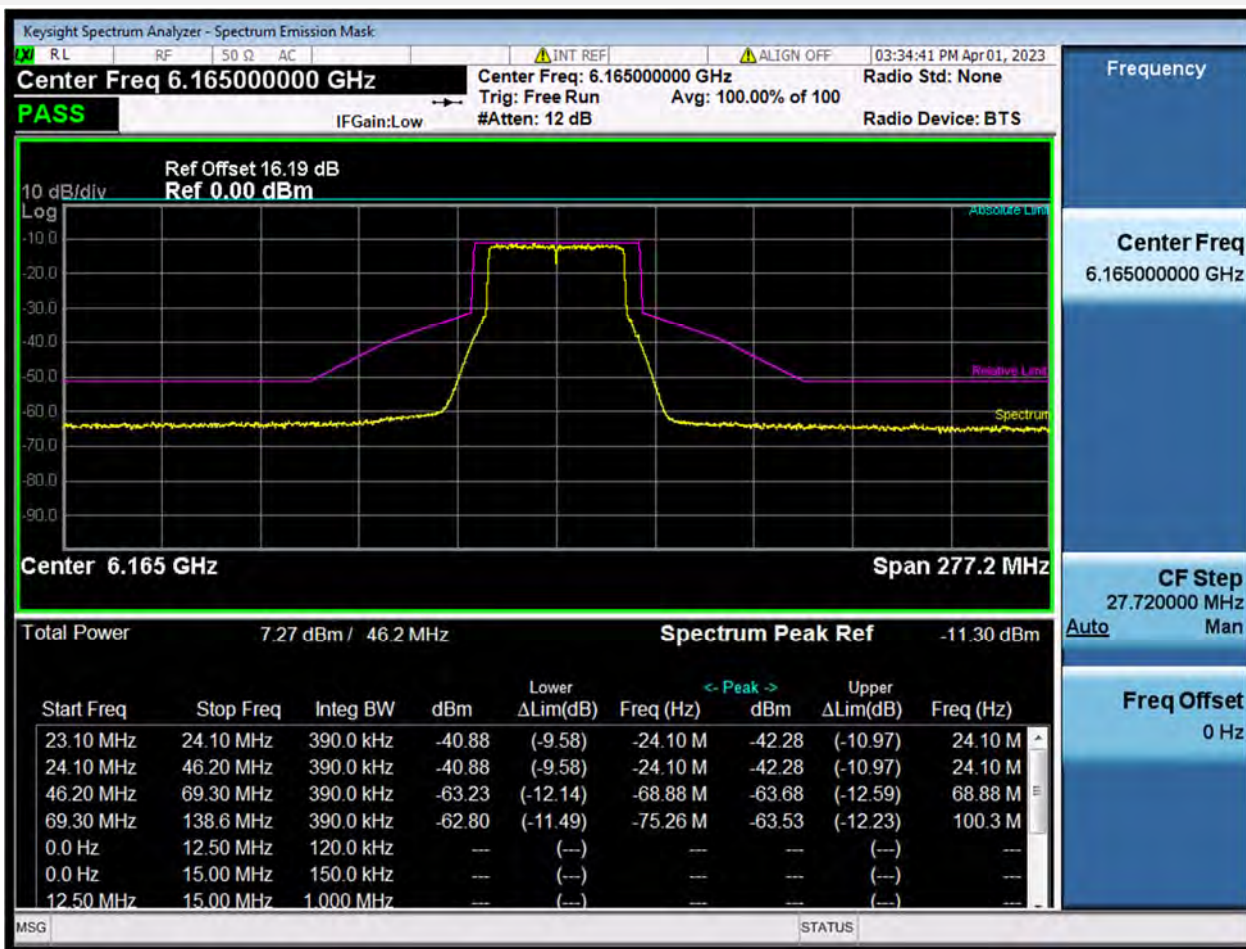


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.6	-69.3	0.4	-75.2598	6089.7402	-51.49	-62.8	-11.49	Pass
-69.3	-46.2	0.4	-68.8842	6096.1158	-51.92	-63.23	-12.14	Pass
-46.2	-24.1	0.4	-24.1	6140.9	-29.58	-40.88	-9.58	Pass
-24.1	-23.1	0.4	-24.1	6140.9	-29.58	-40.88	-9.58	Pass
23.1	24.1	0.4	24.1	6189.1	-30.97	-42.28	10.97	Pass
24.1	46.2	0.4	24.1	6189.1	-30.97	-42.28	10.97	Pass
46.2	69.3	0.4	68.8842	6233.8842	-52.38	-63.68	12.59	Pass
69.3	138.6	0.4	100.3464	6265.3464	-52.23	-63.53	12.23	Pass

11ax40 (SU), U-NII-5, High Channel

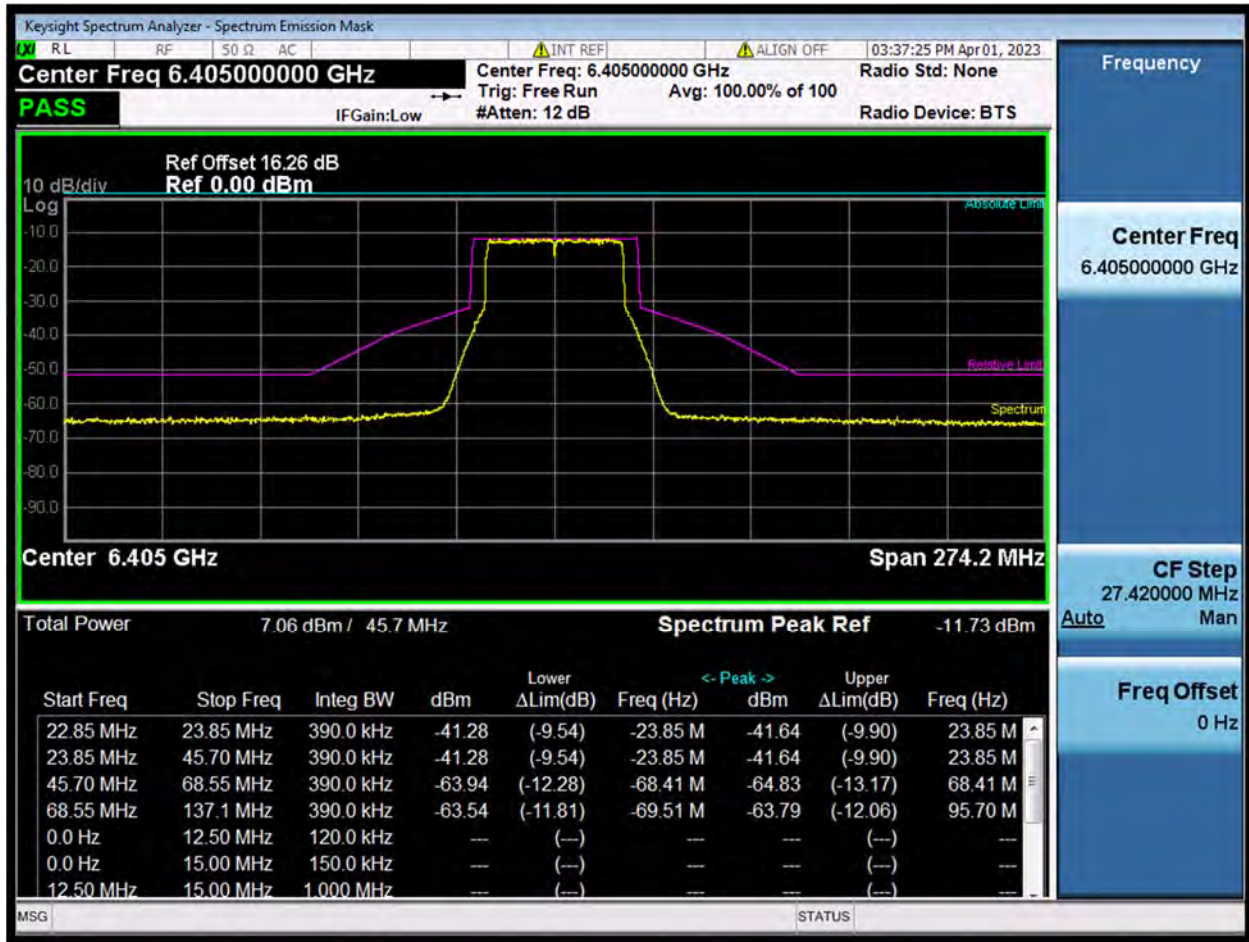


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-137.1	-68.55	0.4	-69.5097	6335.4903	-51.81	-63.54	-11.81	Pass
-68.55	-45.7	0.4	-68.4129	6336.5871	-52.21	-63.94	-12.28	Pass
-45.7	-23.85	0.4	-23.85	6381.15	-29.54	-41.28	-9.54	Pass
-23.85	-22.85	0.4	-23.85	6381.15	-29.54	-41.28	-9.54	Pass
22.85	23.85	0.4	23.85	6428.85	-29.9	-41.64	9.9	Pass
23.85	45.7	0.4	23.85	6428.85	-29.9	-41.64	9.9	Pass
45.7	68.55	0.4	68.4129	6473.4129	-53.1	-64.83	13.17	Pass
68.55	137.1	0.4	95.6958	6500.6958	-52.06	-63.79	12.06	Pass

11ax80 (SU), U-NII-5, Low Channel

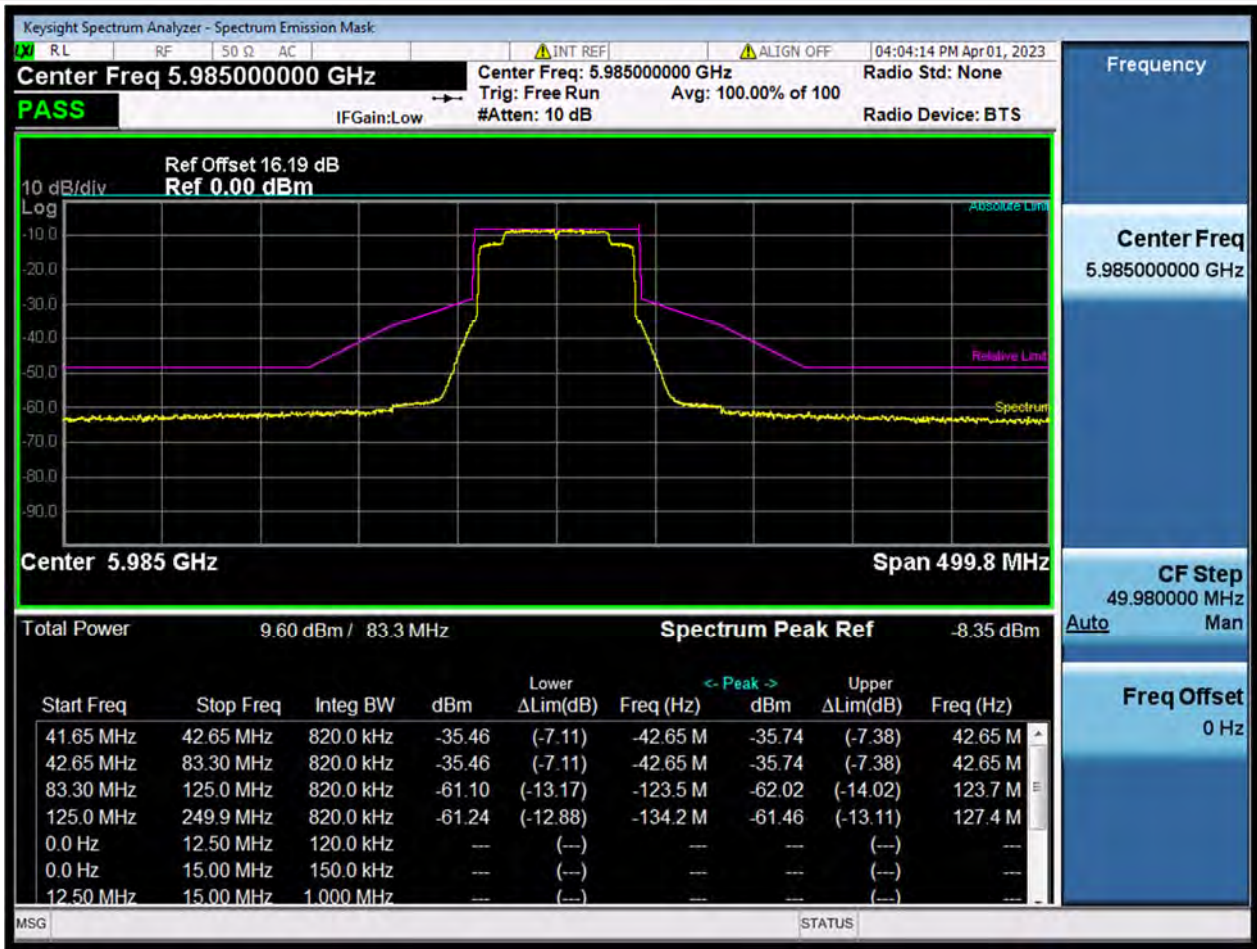

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-249.9	-124.95	0.8	-134.1963	5850.8037	-52.88	-61.24	-12.88	Pass
-124.95	-83.3	0.8	-123.4506	5861.5494	-52.74	-61.1	-13.17	Pass
-83.3	-42.65	0.8	-42.65	5942.35	-27.11	-35.46	-7.11	Pass
-42.65	-41.65	0.8	-42.65	5942.35	-27.11	-35.46	-7.11	Pass
41.65	42.65	0.8	42.65	6027.65	-27.38	-35.74	7.38	Pass
42.65	83.3	0.8	42.65	6027.65	-27.38	-35.74	7.38	Pass
83.3	124.95	0.8	123.7005	6108.7005	-53.66	-62.02	14.02	Pass
124.95	249.9	0.8	127.449	6112.449	-53.11	-61.46	13.11	Pass

11ax80 (SU), U-NII-5, Middle Channel

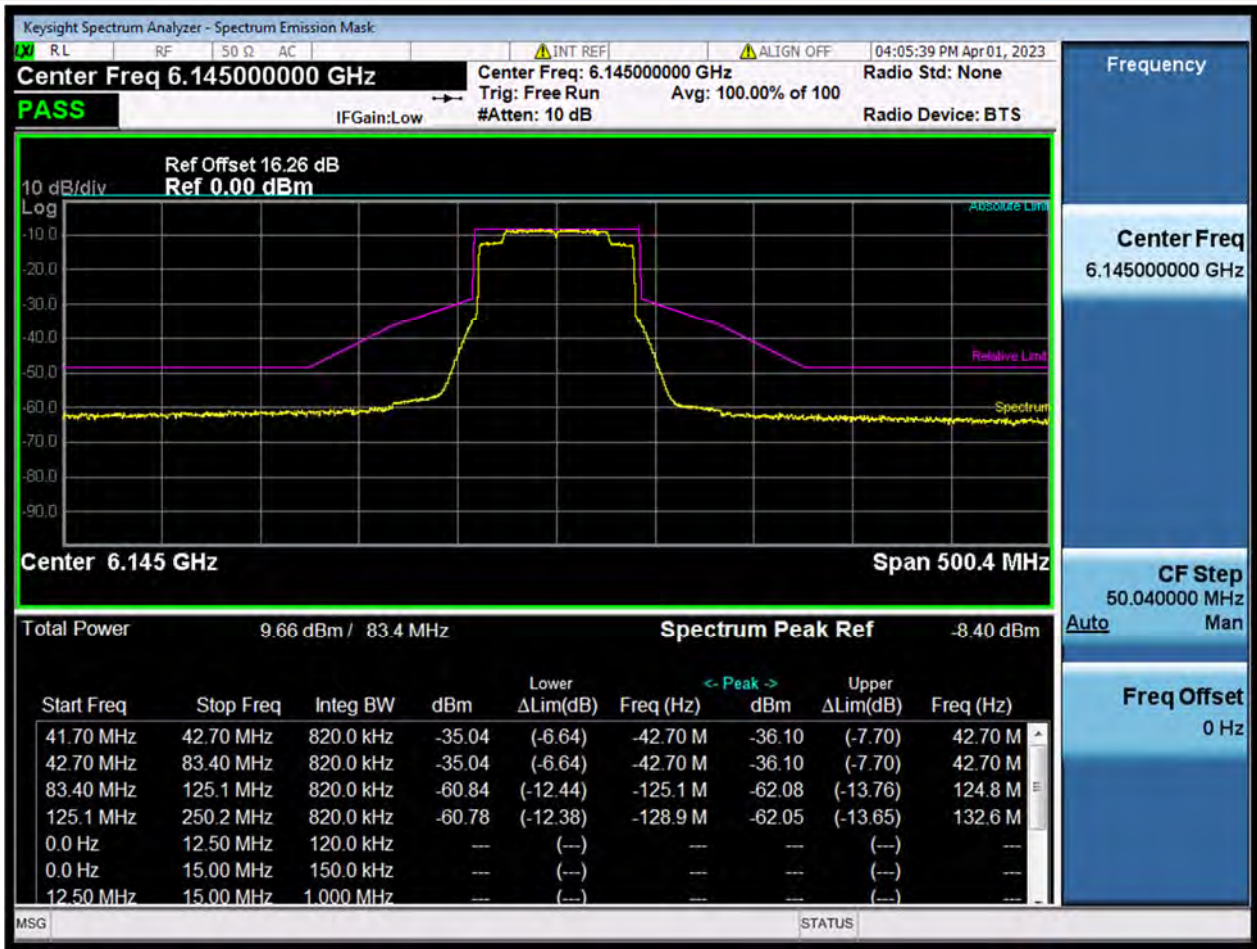

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-250.2	-125.1	0.8	-128.853	6016.147	-52.38	-60.78	-12.38	Pass
-125.1	-83.4	0.8	-125.1	6019.9	-52.44	-60.84	-12.44	Pass
-83.4	-42.7	0.8	-42.7	6102.3	-26.64	-35.04	-6.64	Pass
-42.7	-41.7	0.8	-42.7	6102.3	-26.64	-35.04	-6.64	Pass
41.7	42.7	0.8	42.7	6187.7	-27.7	-36.1	7.7	Pass
42.7	83.4	0.8	42.7	6187.7	-27.7	-36.1	7.7	Pass
83.4	125.1	0.8	124.8498	6269.8498	-53.69	-62.08	13.76	Pass
125.1	250.2	0.8	132.606	6277.606	-53.65	-62.05	13.65	Pass

11ax80 (SU), U-NII-5, High Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-253.2	-126.6	0.8	-138.5004	6246.4996	-53.3	-61.81	-13.3	Pass
-126.6	-84.4	0.8	-126.6	6258.4	-53.73	-62.24	-13.73	Pass
-84.4	-43.2	0.8	-43.2	6341.8	-27.58	-36.1	-7.58	Pass
-43.2	-42.2	0.8	-43.2	6341.8	-27.58	-36.1	-7.58	Pass
42.2	43.2	0.8	43.2	6428.2	-27.82	-36.33	7.82	Pass
43.2	84.4	0.8	43.2	6428.2	-27.82	-36.33	7.82	Pass
84.4	126.6	0.8	125.8404	6510.8404	-54.59	-63.1	14.8	Pass
126.6	253.2	0.8	138.7536	6523.7536	-54.37	-62.88	14.37	Pass

11ax160 (SU), U-NII-5, Low Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-493.5	-246.75	1.6	-247.737	5777.263	-53.93	-59.35	-13.93	Pass
-246.75	-164.5	1.6	-246.2565	5778.7435	-53.96	-59.38	-14.03	Pass
-164.5	-83.25	1.6	-83.25	5941.75	-31.12	-36.54	-11.12	Pass
-83.25	-82.25	1.6	-83.25	5941.75	-31.12	-36.54	-11.12	Pass
82.25	83.25	1.6	83.25	6108.25	-31.99	-37.41	11.99	Pass
83.25	164.5	1.6	83.25	6108.25	-31.99	-37.41	11.99	Pass
164.5	246.75	1.6	246.2565	6271.2565	-54.89	-60.31	14.96	Pass
246.75	493.5	1.6	252.672	6277.672	-54.74	-60.16	14.74	Pass

11ax160 (SU), U-NII-5, Middle Channel

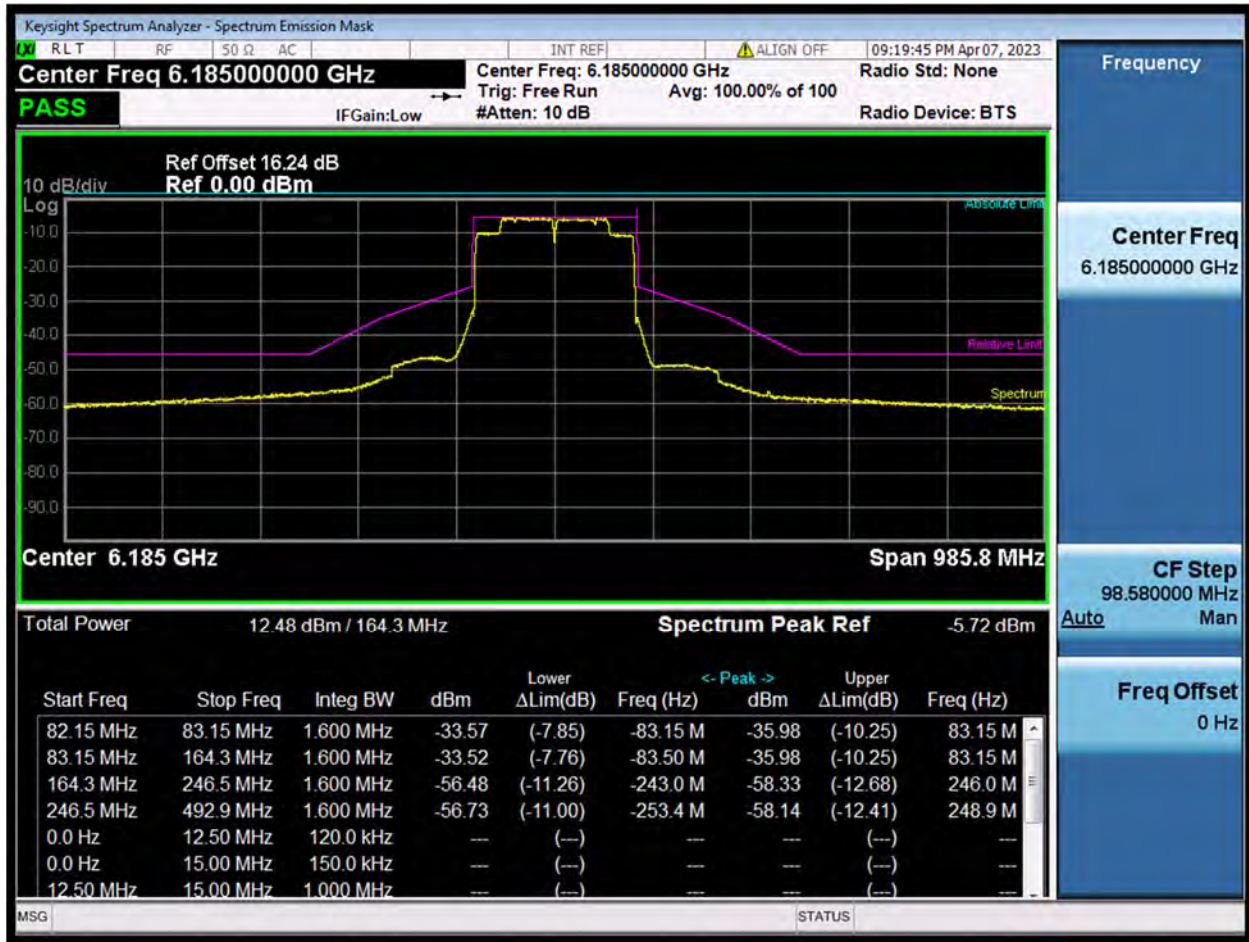


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.9	-246.45	1.6	-253.3506	5931.6494	-51	-56.73	-11	Pass
-246.45	-164.3	1.6	-242.9997	5942.0003	-50.76	-56.48	-11.26	Pass
-164.3	-83.15	1.6	-	6101.495202	-27.79	-33.52	-7.76	Pass
-83.15	-82.15	1.6	-83.15	6101.85	-27.85	-33.57	-7.85	Pass
82.15	83.15	1.6	83.15	6268.15	-30.25	-35.98	10.25	Pass
83.15	164.3	1.6	83.15	6268.15	-30.25	-35.98	10.25	Pass
164.3	246.45	1.6	245.9571	6430.9571	-52.6	-58.33	12.68	Pass
246.45	492.9	1.6	248.9145	6433.9145	-52.41	-58.14	12.41	Pass

11ax160 (SU), U-NII-5, High Channel

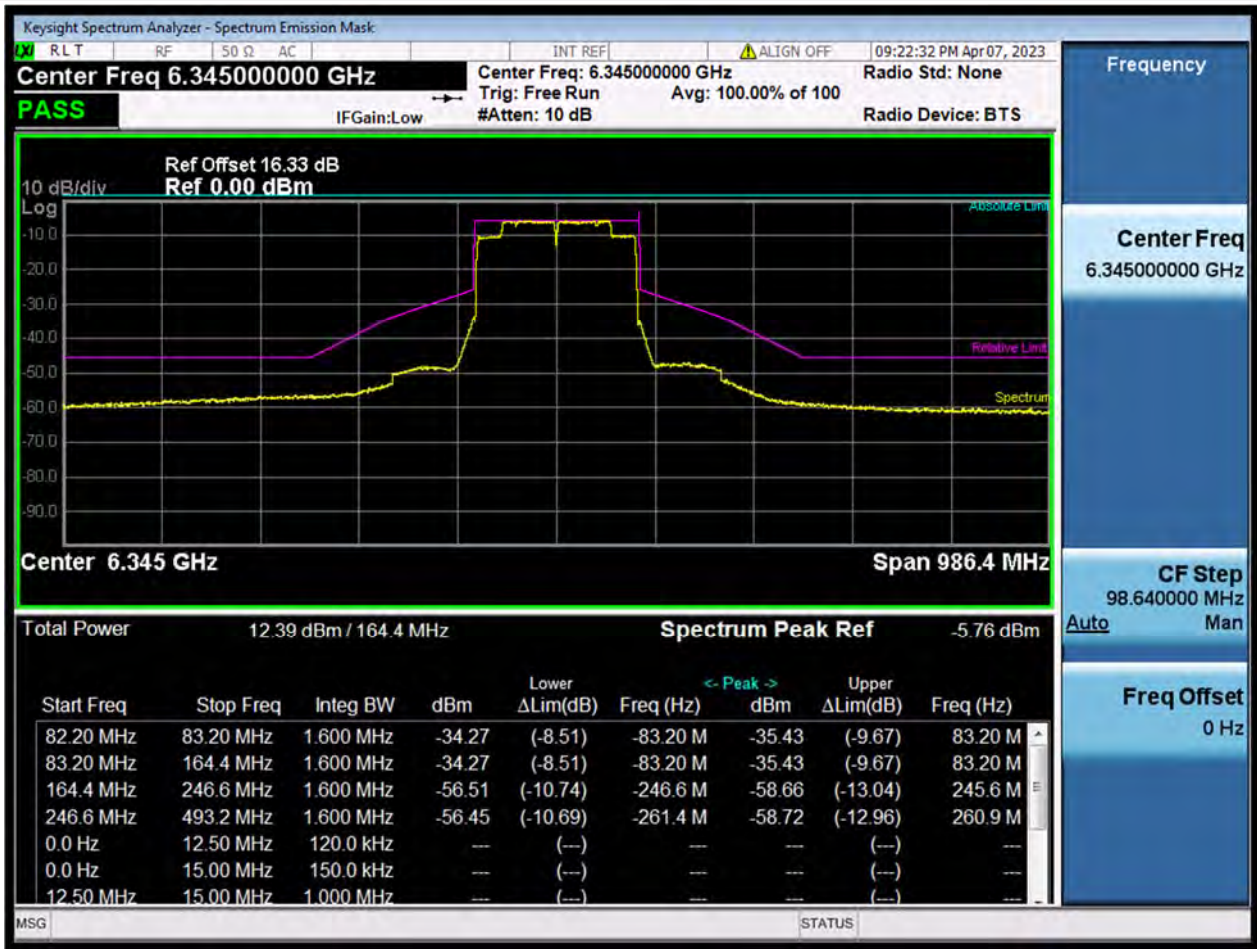


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-493.2	-246.6	1.6	-261.396	6083.604	-50.69	-56.45	-10.69	Pass
-246.6	-164.4	1.6	-246.6	6098.4	-50.74	-56.51	-10.74	Pass
-164.4	-83.2	1.6	-83.2	6261.8	-28.51	-34.27	-8.51	Pass
-83.2	-82.2	1.6	-83.2	6261.8	-28.51	-34.27	-8.51	Pass
82.2	83.2	1.6	83.2	6428.2	-29.67	-35.43	9.67	Pass
83.2	164.4	1.6	83.2	6428.2	-29.67	-35.43	9.67	Pass
164.4	246.6	1.6	245.6136	6590.6136	-52.9	-58.66	13.04	Pass
246.6	493.2	1.6	260.9028	6605.9028	-52.96	-58.72	12.96	Pass

11ax20 (SU), U-NII-6, Low Channel

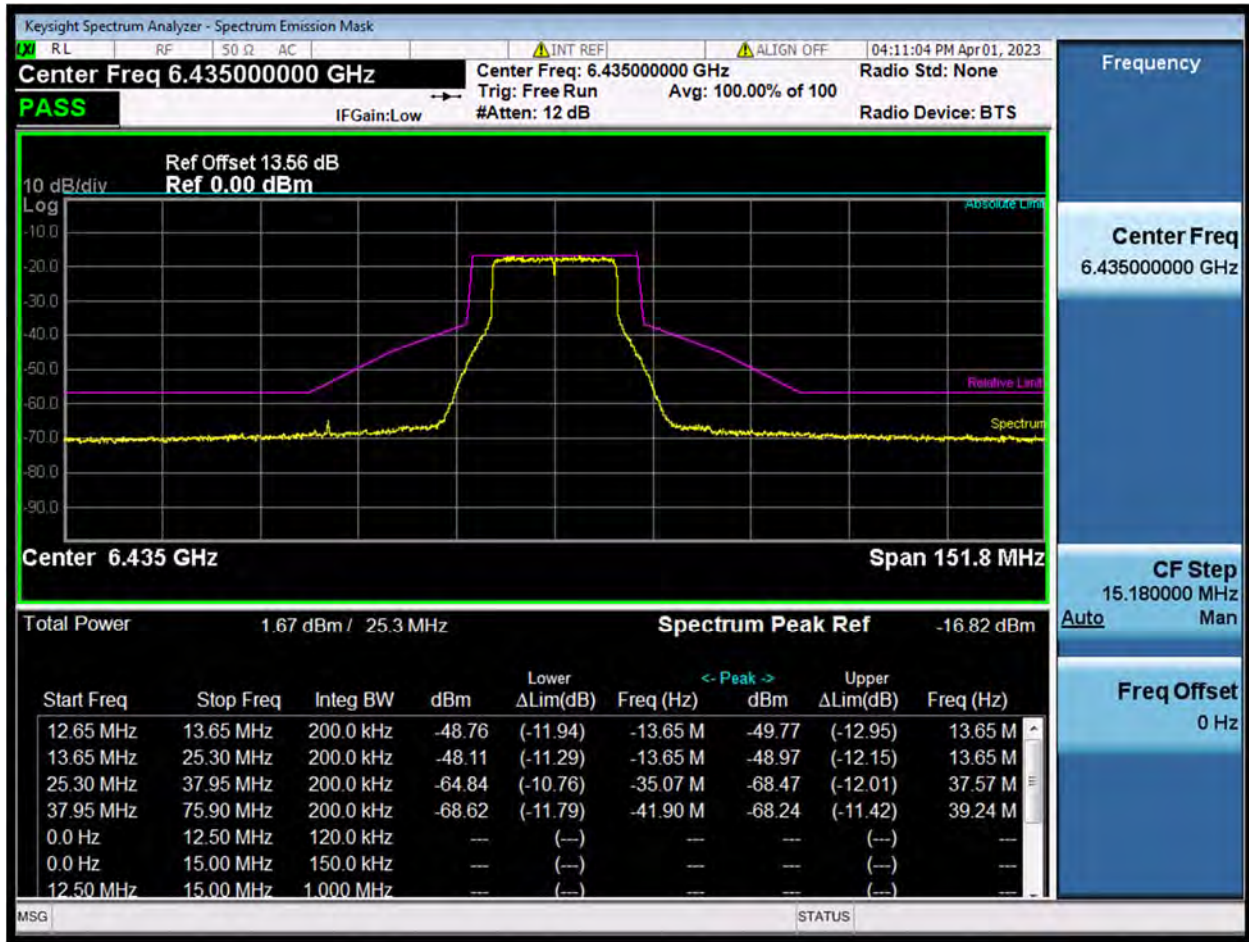


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.9	-37.95	0.2	-41.8968	6393.1032	-51.79	-68.62	-11.79	Pass
-37.95	-25.3	0.2	-35.0658	6399.9342	-48.02	-64.84	-10.76	Pass
-25.3	-13.65	0.2	-13.65	6421.35	-31.29	-48.11	-11.29	Pass
-13.65	-12.65	0.2	-13.65	6421.35	-31.94	-48.76	-11.94	Pass
12.65	13.65	0.2	13.65	6448.65	-32.95	-49.77	12.95	Pass
13.65	25.3	0.2	13.65	6448.65	-32.15	-48.97	12.15	Pass
25.3	37.95	0.2	37.5705	6472.5705	-51.65	-68.47	12.01	Pass
37.95	75.9	0.2	39.2403	6474.2403	-51.42	-68.24	11.42	Pass

11ax20 (SU), U-NII-6, Middle Channel

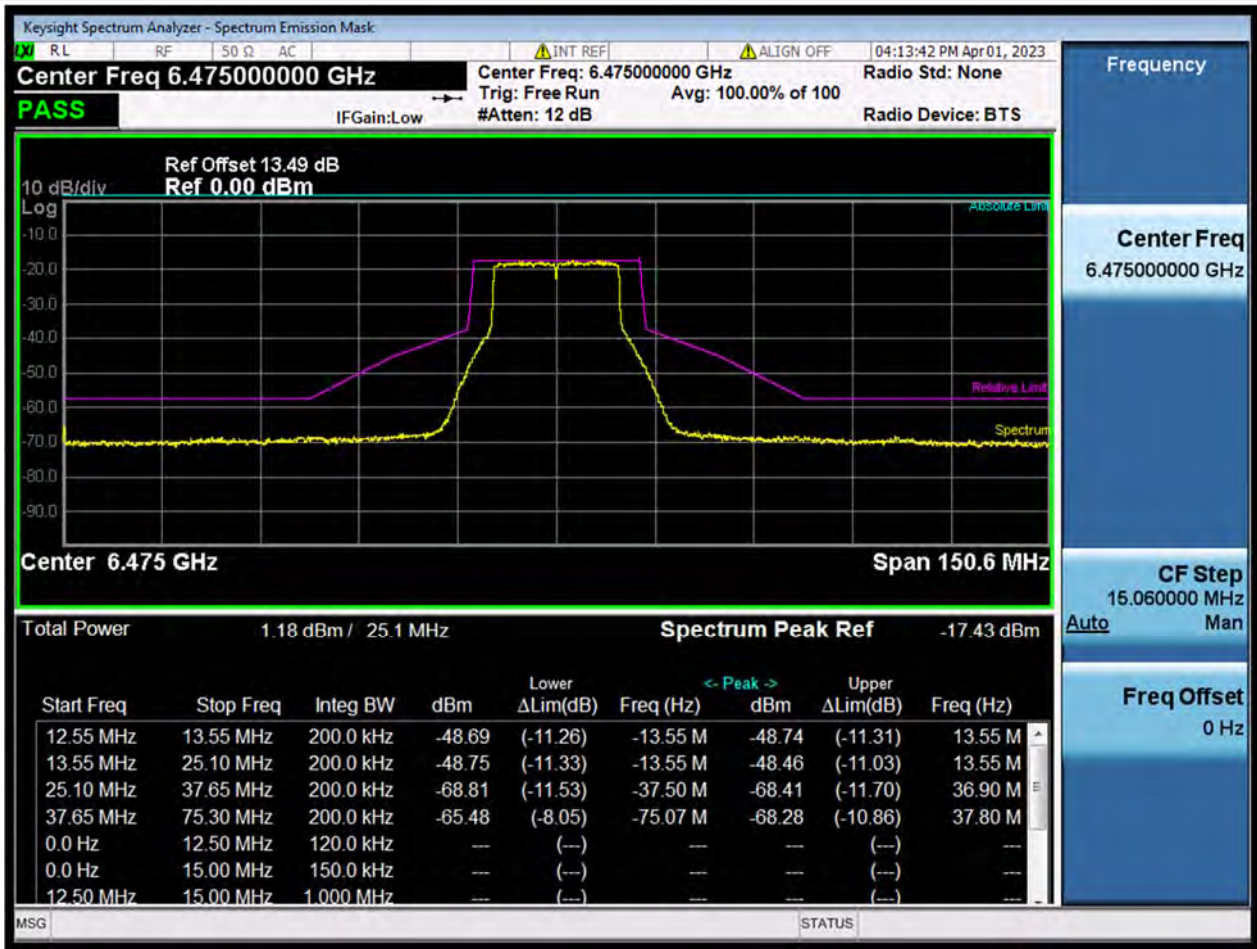


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.3	-37.65	0.2	-75.0741	6399.9259	-48.05	-65.48	-8.05	Pass
-37.65	-25.1	0.2	-37.4994	6437.5006	-51.38	-68.81	-11.53	Pass
-25.1	-13.55	0.2	-13.55	6461.45	-31.33	-48.75	-11.33	Pass
-13.55	-12.55	0.2	-13.55	6461.45	-31.26	-48.69	-11.26	Pass
12.55	13.55	0.2	13.55	6488.55	-31.31	-48.74	11.31	Pass
13.55	25.1	0.2	13.55	6488.55	-31.03	-48.46	11.03	Pass
25.1	37.65	0.2	36.897	6511.897	-50.98	-68.41	11.7	Pass
37.65	75.3	0.2	37.8006	6512.8006	-50.86	-68.28	10.86	Pass

11ax20 (SU), U-NII-6, High Channel

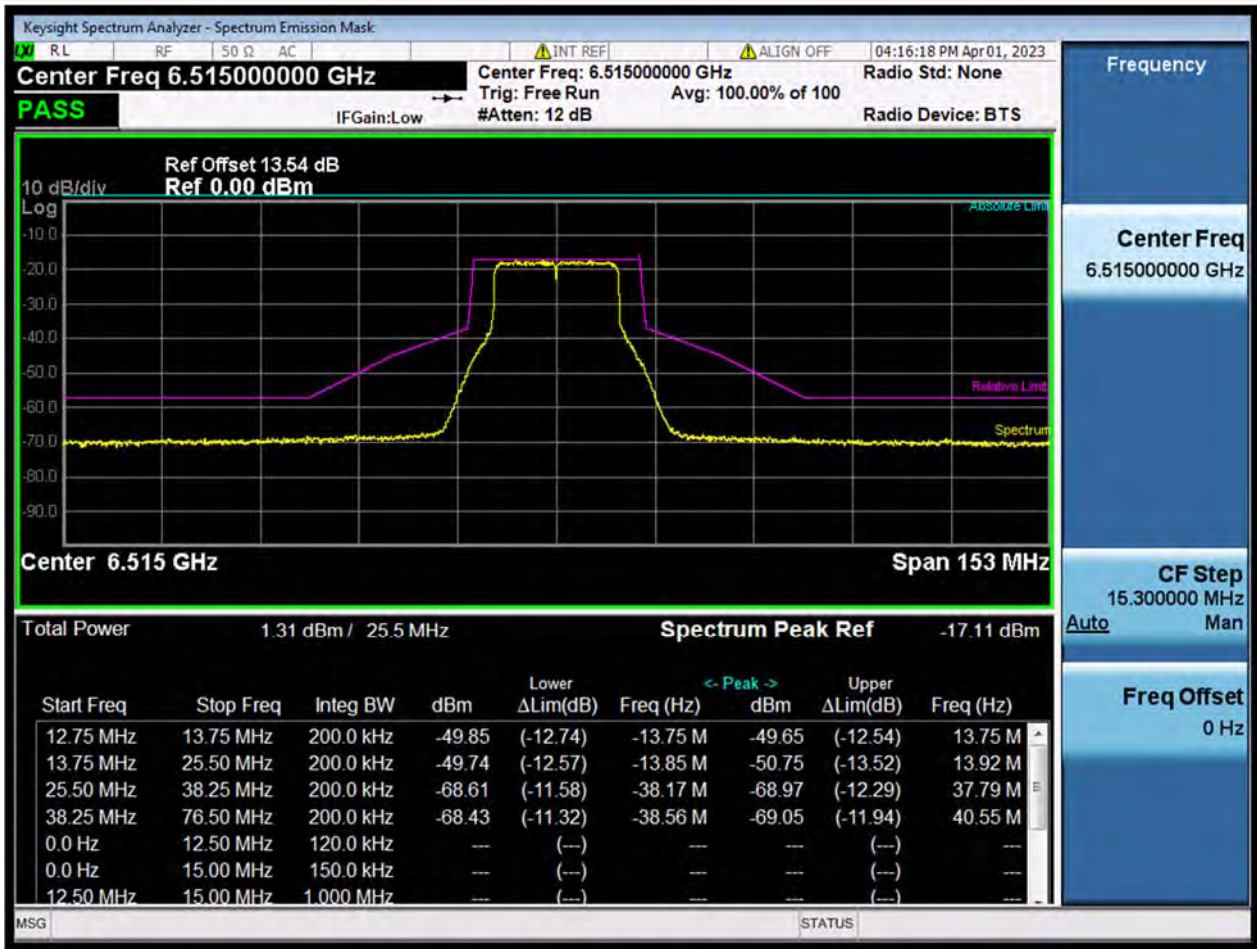

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.5	-38.25	0.2	-38.556	6476.444	-51.32	-68.43	-11.32	Pass
-38.25	-25.5	0.2	-38.1735	6476.8265	-51.51	-68.61	-11.58	Pass
-25.5	-13.75	0.2	-13.8465	6501.1535	-32.63	-49.74	-12.57	Pass
-13.75	-12.75	0.2	-13.75	6501.25	-32.74	-49.85	-12.74	Pass
12.75	13.75	0.2	13.75	6528.75	-32.54	-49.65	12.54	Pass
13.75	25.5	0.2	13.923	6528.923	-33.64	-50.75	13.52	Pass
25.5	38.25	0.2	37.791	6552.791	-51.86	-68.97	12.29	Pass
38.25	76.5	0.2	40.545	6555.545	-51.94	-69.05	11.94	Pass

11ax40 (SU), U-NII-6, Low Channel

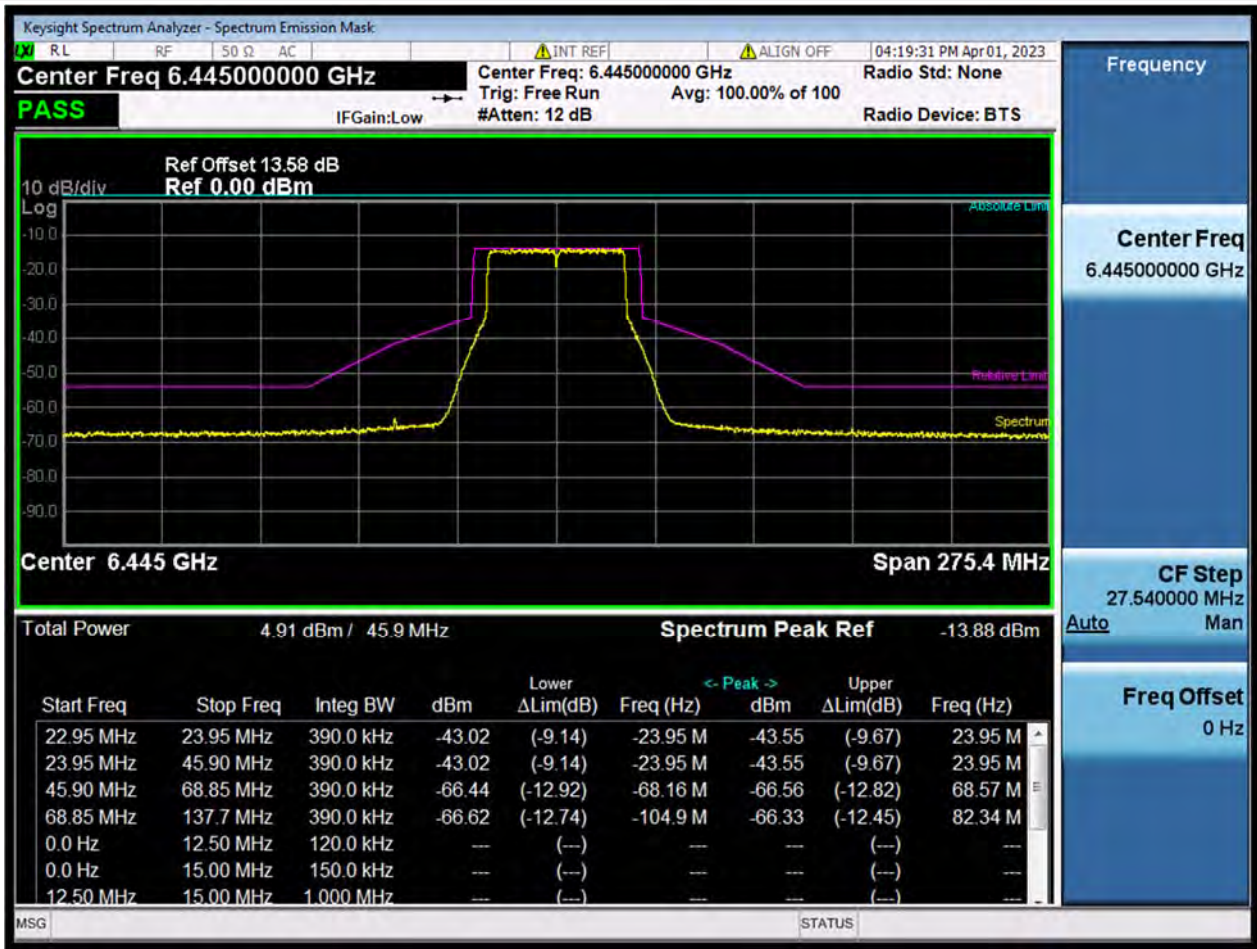


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-137.7	-68.85	0.4	-104.9274	6340.0726	-52.74	-66.62	-12.74	Pass
-68.85	-45.9	0.4	-68.1615	6376.8385	-52.56	-66.44	-12.92	Pass
-45.9	-23.95	0.4	-23.95	6421.05	-29.14	-43.02	-9.14	Pass
-23.95	-22.95	0.4	-23.95	6421.05	-29.14	-43.02	-9.14	Pass
22.95	23.95	0.4	23.95	6468.95	-29.67	-43.55	9.67	Pass
23.95	45.9	0.4	23.95	6468.95	-29.67	-43.55	9.67	Pass
45.9	68.85	0.4	68.5746	6513.5746	-52.68	-66.56	12.82	Pass
68.85	137.7	0.4	82.3446	6527.3446	-52.45	-66.33	12.45	Pass

11ax40 (SU), U-NII-6, Middle Channel



Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.9	-69.45	0.4	-85.0068	6399.9932	-49.98	-63.88	-9.98	Pass
-69.45	-46.3	0.4	-68.8944	6416.1056	-52.98	-66.88	-13.26	Pass
-46.3	-24.15	0.4	-	6460.6352 32	-30.61	-44.52	-10.53	Pass
-24.15	-23.15	0.4	-24.15	6460.85	-30.89	-44.8	-10.89	Pass
23.15	24.15	0.4	24.15	6509.15	-30.85	-44.76	10.85	Pass
24.15	46.3	0.4	24.225937	6509.2259 37	-30.81	-44.72	10.79	Pass
46.3	69.45	0.4	69.45	6554.45	-53.32	-67.23	13.32	Pass
69.45	138.9	0.4	70.4223	6555.4223	-52.77	-66.67	12.77	Pass

11ax40 (SU), U-NII-6, High Channel

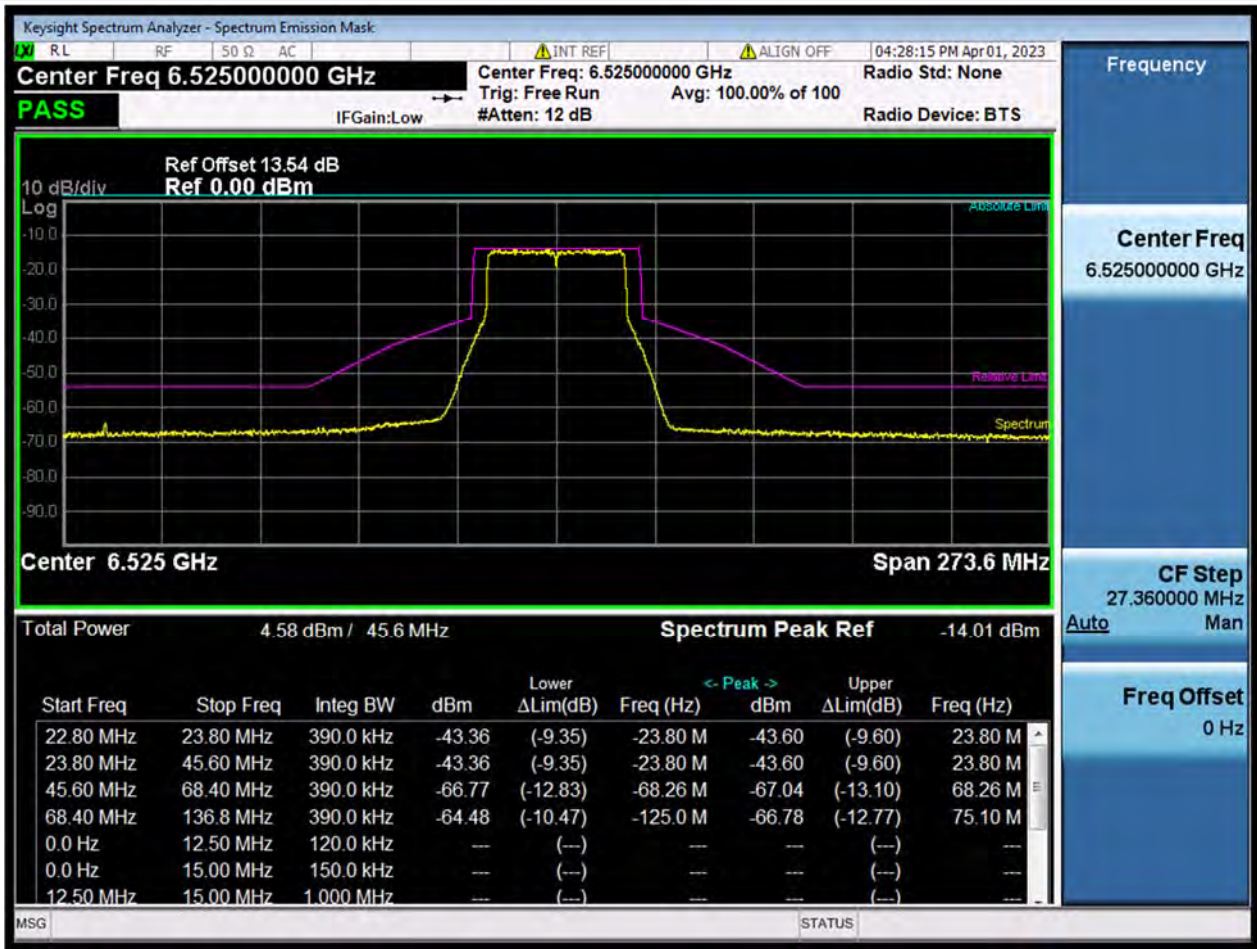


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-136.8	-68.4	0.4	-125.0352	6399.9648	-50.47	-64.48	-10.47	Pass
-68.4	-45.6	0.4	-68.2632	6456.7368	-52.76	-66.77	-12.83	Pass
-45.6	-23.8	0.4	-23.8	6501.2	-29.35	-43.36	-9.35	Pass
-23.8	-22.8	0.4	-23.8	6501.2	-29.35	-43.36	-9.35	Pass
22.8	23.8	0.4	23.8	6548.8	-29.6	-43.6	9.6	Pass
23.8	45.6	0.4	23.8	6548.8	-29.6	-43.6	9.6	Pass
45.6	68.4	0.4	68.2632	6593.2632	-53.03	-67.04	13.1	Pass
68.4	136.8	0.4	75.1032	6600.1032	-52.77	-66.78	12.77	Pass

11ax80 (SU), U-NII-6, Low Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-252	-126	0.8	-135.576	6329.424	-54.12	-64.98	-14.12	Pass
-126	-84	0.8	-125.748	6339.252	-54.81	-65.67	-14.89	Pass
-84	-43	0.8	-43	6422	-27.52	-38.38	-7.52	Pass
-43	-42	0.8	-43	6422	-27.52	-38.38	-7.52	Pass
42	43	0.8	43	6508	-27.61	-38.46	7.61	Pass
43	84	0.8	43	6508	-27.61	-38.46	7.61	Pass
84	126	0.8	125.748	6590.748	-54.88	-65.74	14.95	Pass
126	252	0.8	131.292	6596.292	-54.42	-65.28	14.42	Pass

11ax80 (SU), U-NII-6, High Channel

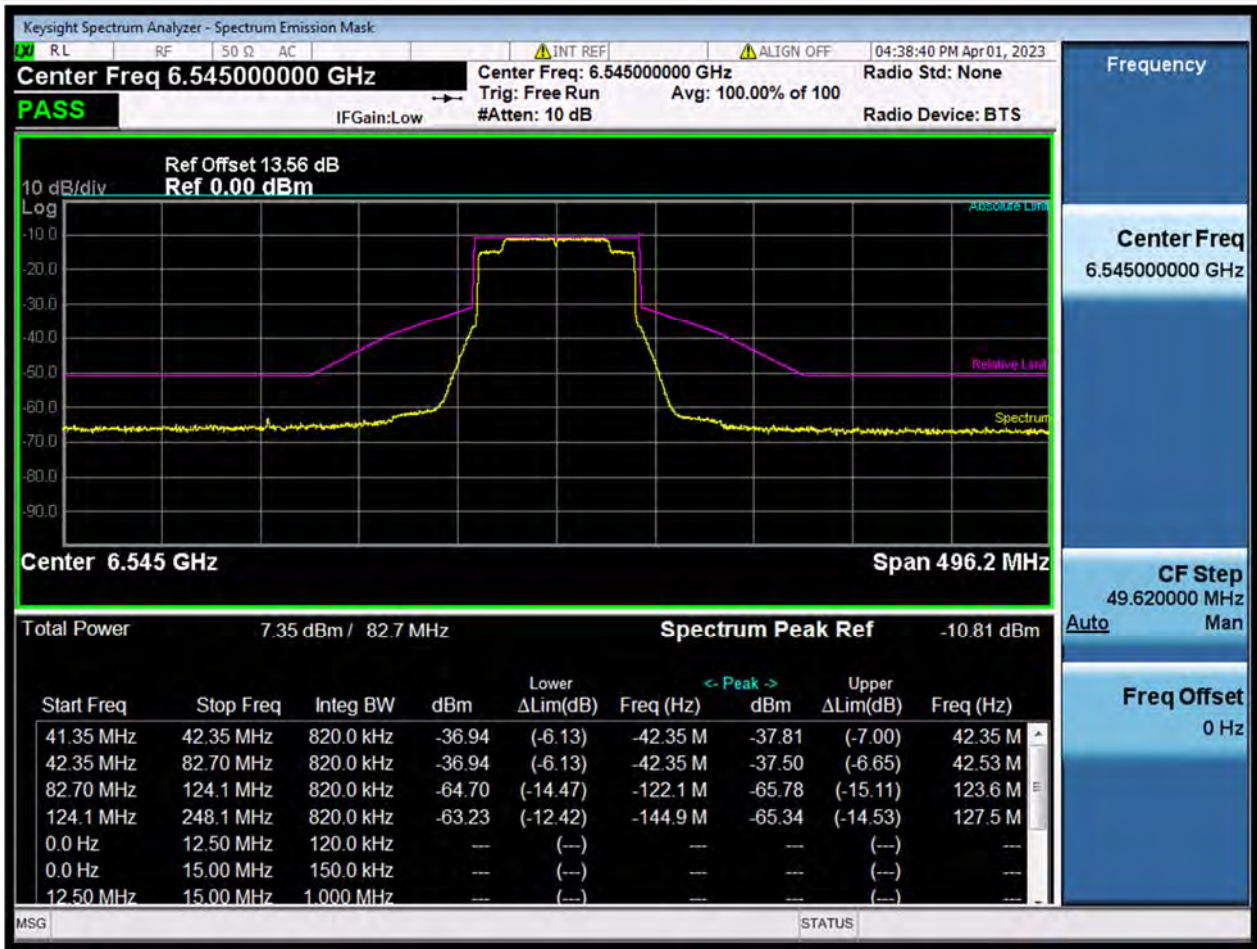


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-248.1	-124.05	0.8	-144.8904	6400.1096	-52.42	-63.23	-12.42	Pass
-124.05	-82.7	0.8	-122.0652	6422.9348	-53.89	-64.7	-14.47	Pass
-82.7	-42.35	0.8	-42.35	6502.65	-26.13	-36.94	-6.13	Pass
-42.35	-41.35	0.8	-42.35	6502.65	-26.13	-36.94	-6.13	Pass
41.35	42.35	0.8	42.35	6587.35	-27	-37.81	7	Pass
42.35	82.7	0.8	42.527886	6587.527886	-26.69	-37.5	6.65	Pass
82.7	124.05	0.8	123.5538	6668.5538	-54.97	-65.78	15.11	Pass
124.05	248.1	0.8	127.5234	6672.5234	-54.53	-65.34	14.53	Pass

11ax160 (SU), U-NII-6, Middle Channel

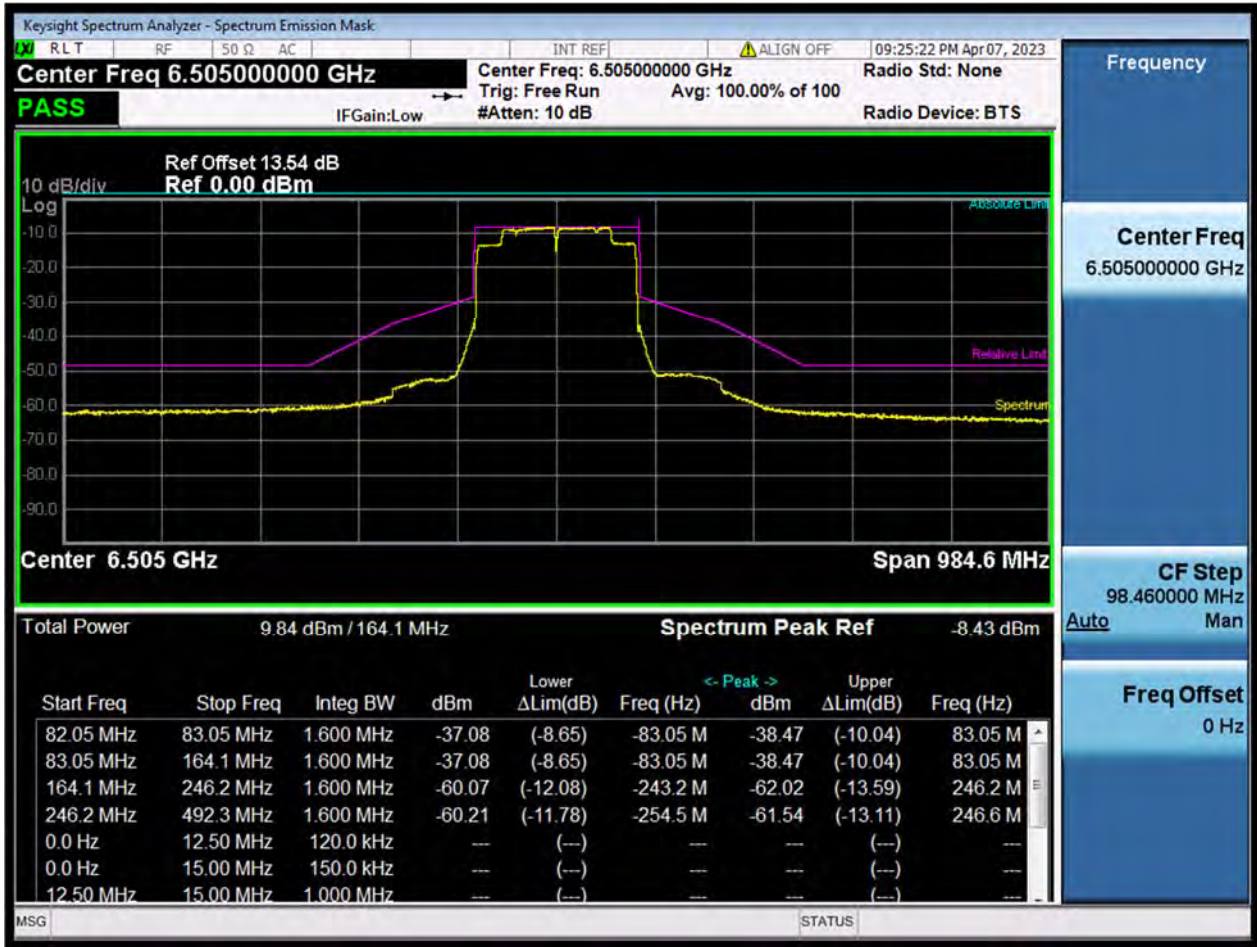


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.3	-246.15	1.6	-254.5191	6250.4809	-51.78	-60.21	-11.78	Pass
-246.15	-164.1	1.6	-243.1962	6261.8038	-51.64	-60.07	-12.08	Pass
-164.1	-83.05	1.6	-83.05	6421.95	-28.65	-37.08	-8.65	Pass
-83.05	-82.05	1.6	-83.05	6421.95	-28.65	-37.08	-8.65	Pass
82.05	83.05	1.6	83.05	6588.05	-30.04	-38.47	10.04	Pass
83.05	164.1	1.6	83.05	6588.05	-30.04	-38.47	10.04	Pass
164.1	246.15	1.6	246.15	6751.15	-53.59	-62.02	13.59	Pass
246.15	492.3	1.6	246.6423	6751.6423	-53.11	-61.54	13.11	Pass

11ax20 (SU), U-NII-7, Low Channel

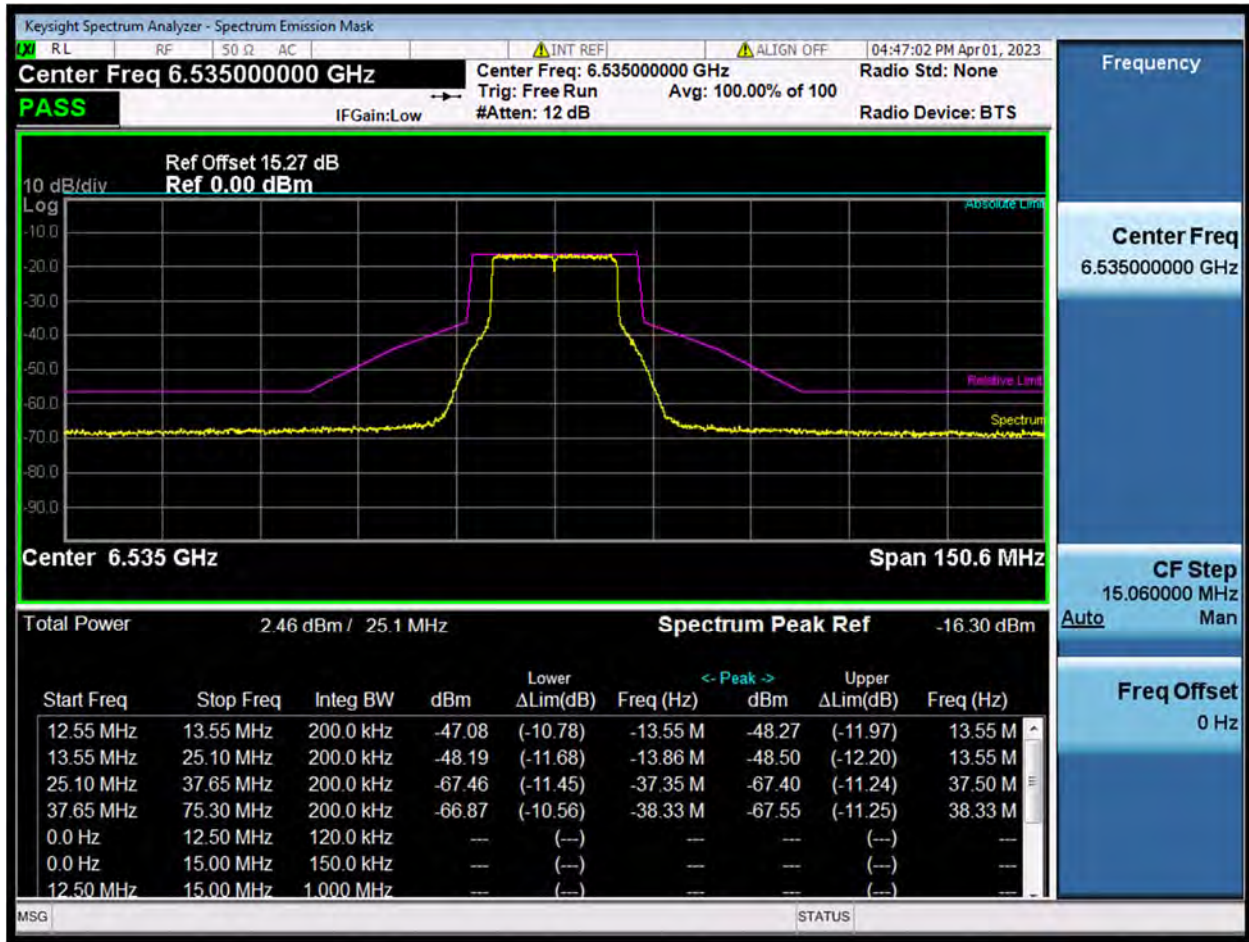


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.3	-37.65	0.2	-38.3277	6496.6723	-50.56	-66.87	-10.56	Pass
-37.65	-25.1	0.2	-37.3488	6497.6512	-51.16	-67.46	-11.45	Pass
-25.1	-13.55	0.2	-13.8552	6521.1448	-31.89	-48.19	-11.68	Pass
-13.55	-12.55	0.2	-13.55	6521.45	-30.78	-47.08	-10.78	Pass
12.55	13.55	0.2	13.55	6548.55	-31.97	-48.27	11.97	Pass
13.55	25.1	0.2	13.55	6548.55	-32.2	-48.5	12.2	Pass
25.1	37.65	0.2	37.4994	6572.4994	-51.09	-67.4	11.24	Pass
37.65	75.3	0.2	38.3277	6573.3277	-51.25	-67.55	11.25	Pass

11ax20 (SU), U-NII-7, Middle Channel

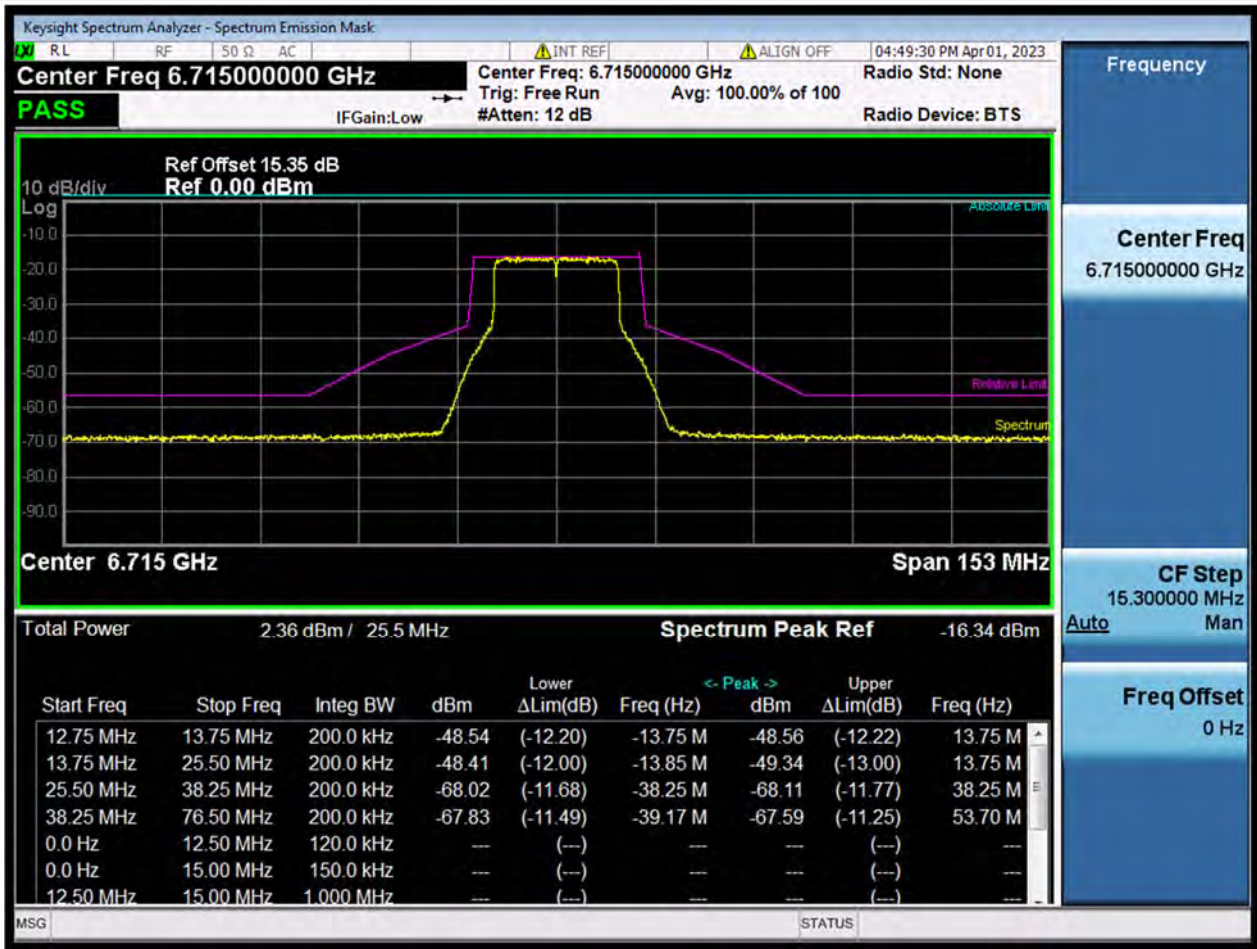

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.5	-38.25	0.2	-39.168	6675.832	-51.49	-67.83	-11.49	Pass
-38.25	-25.5	0.2	-38.25	6676.75	-51.68	-68.02	-11.68	Pass
-25.5	-13.75	0.2	-13.8465	6701.1535	-32.07	-48.41	-12	Pass
-13.75	-12.75	0.2	-13.75	6701.25	-32.2	-48.54	-12.2	Pass
12.75	13.75	0.2	13.75	6728.75	-32.22	-48.56	12.22	Pass
13.75	25.5	0.2	13.75	6728.75	-33	-49.34	13	Pass
25.5	38.25	0.2	38.25	6753.25	-51.77	-68.11	11.77	Pass
38.25	76.5	0.2	53.703	6768.703	-51.25	-67.59	11.25	Pass

11ax20 (SU), U-NII-7, High Channel

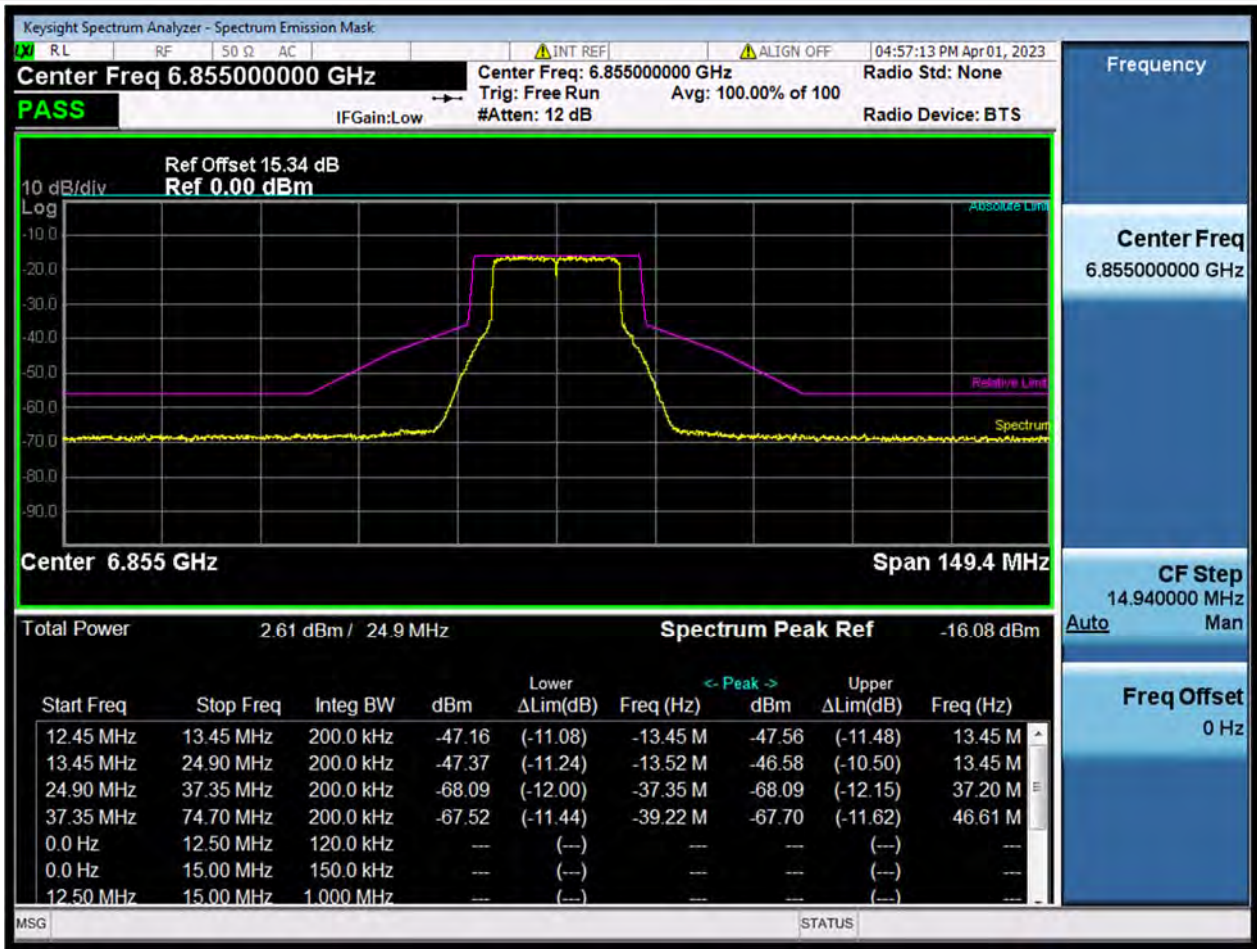

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-74.7	-37.35	0.2	-39.2175	6815.7825	-51.44	-67.52	-11.44	Pass
-37.35	-24.9	0.2	-37.35	6817.65	-52	-68.09	-12	Pass
-24.9	-13.45	0.2	-13.5207	6841.4793	-31.29	-47.37	-11.24	Pass
-13.45	-12.45	0.2	-13.45	6841.55	-31.08	-47.16	-11.08	Pass
12.45	13.45	0.2	13.45	6868.45	-31.48	-47.56	11.48	Pass
13.45	24.9	0.2	13.45	6868.45	-30.5	-46.58	10.5	Pass
24.9	37.35	0.2	37.2006	6892.2006	-52.01	-68.09	12.15	Pass
37.35	74.7	0.2	46.6128	6901.6128	-51.62	-67.7	11.62	Pass

11ax40 (SU), U-NII-7, Low Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-139.2	-69.6	0.4	-79.2048	6485.7952	-51.81	-64.78	-11.81	Pass
-69.6	-46.4	0.4	-69.6	6495.4	-51.87	-64.84	-11.87	Pass
-46.4	-24.2	0.4	-24.2	6540.8	-29.81	-42.77	-9.81	Pass
-24.2	-23.2	0.4	-24.2	6540.8	-29.81	-42.77	-9.81	Pass
23.2	24.2	0.4	24.2	6589.2	-30.69	-43.66	10.69	Pass
24.2	46.4	0.4	24.2	6589.2	-30.69	-43.66	10.69	Pass
46.4	69.6	0.4	68.4864	6633.4864	-52.36	-65.32	12.93	Pass
69.6	139.2	0.4	75.168	6640.168	-52.27	-65.24	12.27	Pass

11ax40 (SU), U-NII-7, Middle Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138	-69	0.4	-83.904	6641.096	-51.75	-65.07	-11.75	Pass
-69	-46	0.4	-68.448	6656.552	-52.57	-65.88	-12.86	Pass
-46	-24	0.4	-24	6701	-29.52	-42.84	-9.52	Pass
-24	-23	0.4	-24	6701	-29.52	-42.84	-9.52	Pass
23	24	0.4	24	6749	-30.28	-43.59	10.28	Pass
24	46	0.4	24	6749	-30.28	-43.59	10.28	Pass
46	69	0.4	68.586	6793.586	-52.44	-65.76	12.66	Pass
69	138	0.4	93.288	6818.288	-52.06	-65.38	12.06	Pass

11ax40 (SU), U-NII-7, High Channel

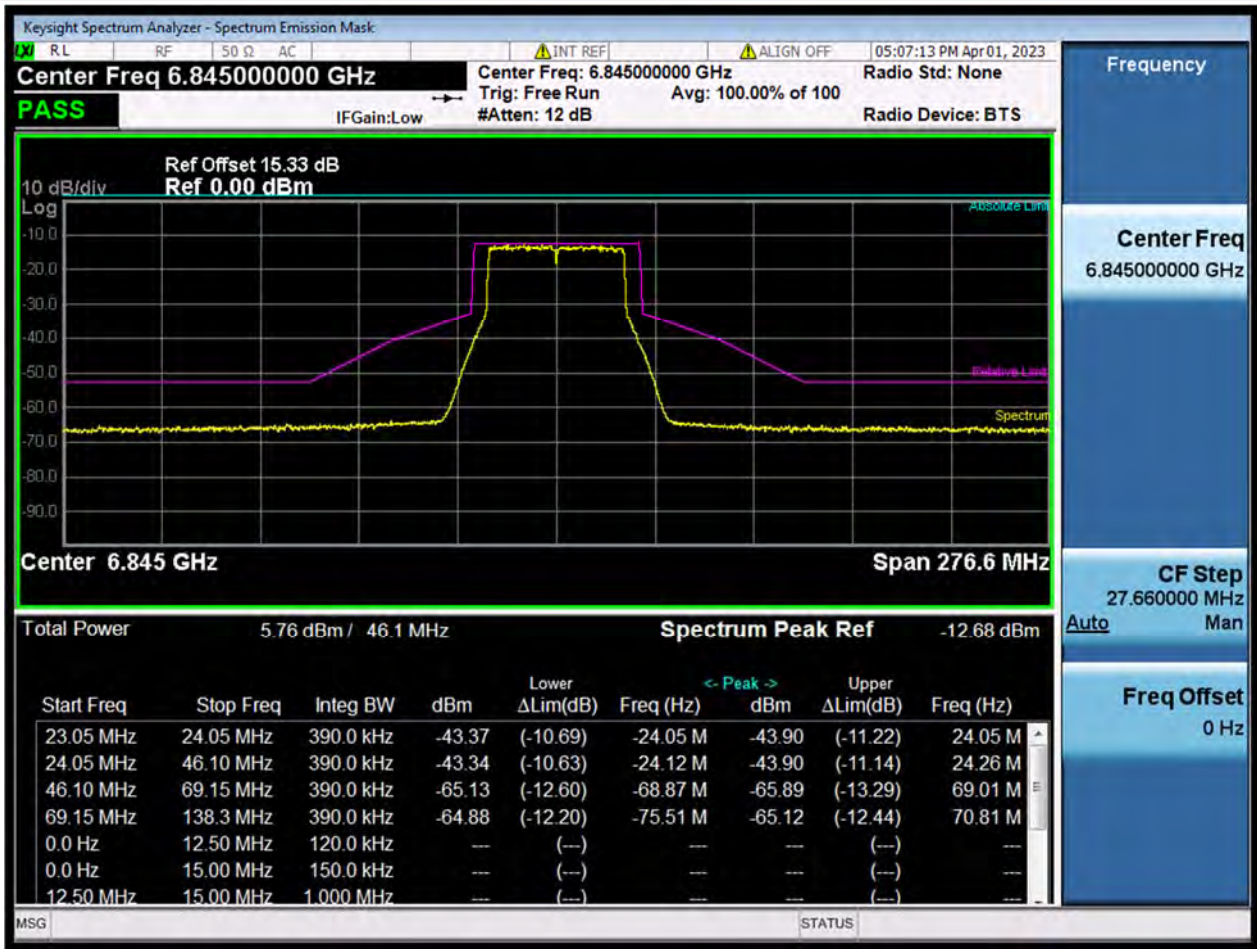


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.3	-69.15	0.4	-75.5118	6769.4882	-52.2	-64.88	-12.2	Pass
-69.15	-46.1	0.4	-68.8734	6776.1266	-52.45	-65.13	-12.6	Pass
-46.1	-24.05	0.4	-	6820.8787 11	-30.66	-43.34	-10.63	Pass
-24.05	-23.05	0.4	-24.05	6820.95	-30.69	-43.37	-10.69	Pass
23.05	24.05	0.4	24.05	6869.05	-31.22	-43.9	11.22	Pass
24.05	46.1	0.4	24.25952	6869.2595 2	-31.22	-43.9	11.14	Pass
46.1	69.15	0.4	69.0117	6914.0117	-53.21	-65.89	13.29	Pass
69.15	138.3	0.4	70.8096	6915.8096	-52.44	-65.12	12.44	Pass

11ax80 (SU), U-NII-7, Low Channel

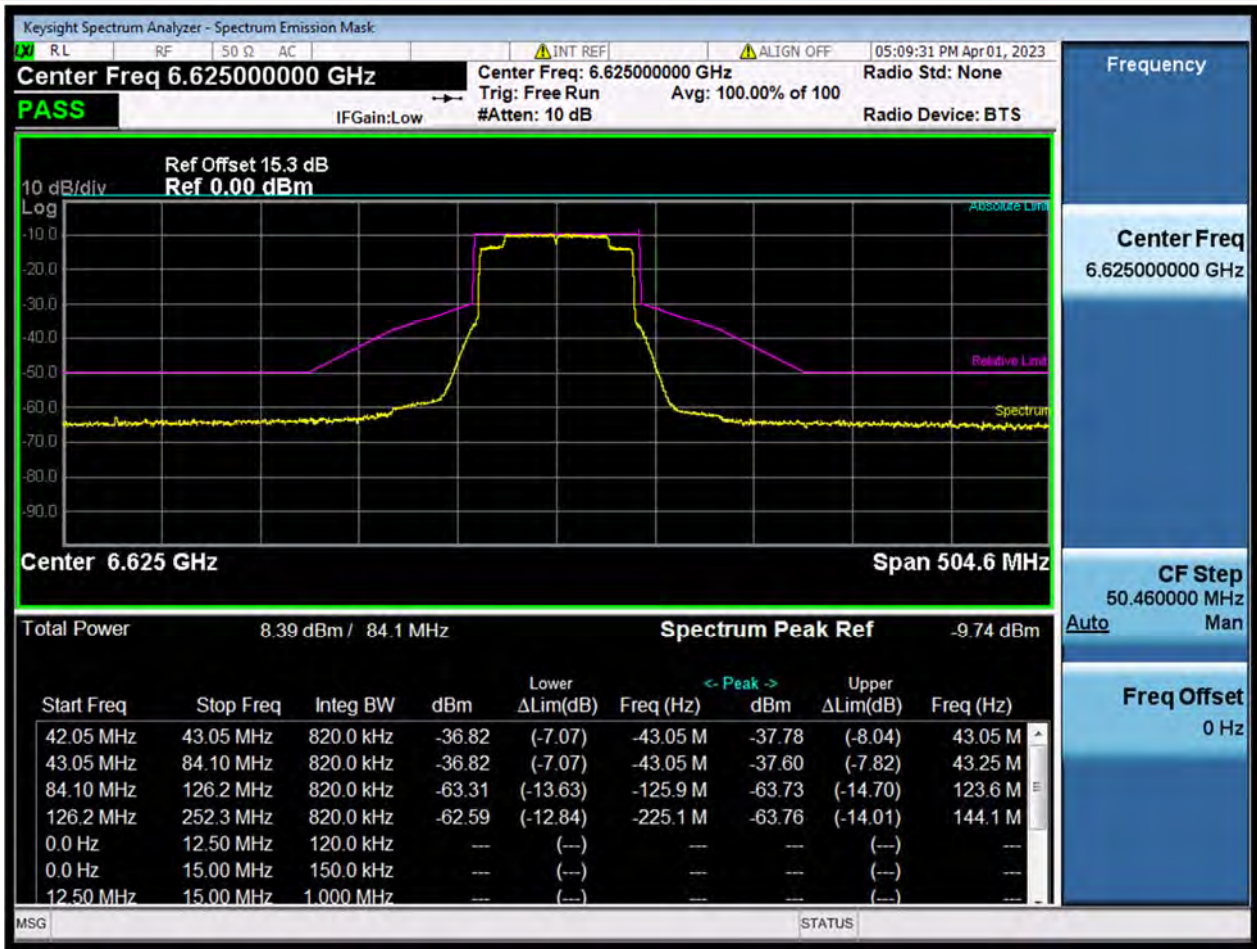


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-252.3	-126.15	0.8	-225.0516	6399.9484	-52.84	-62.59	-12.84	Pass
-126.15	-84.1	0.8	-125.8977	6499.1023	-53.56	-63.31	-13.63	Pass
-84.1	-43.05	0.8	-43.05	6581.95	-27.07	-36.82	-7.07	Pass
-43.05	-42.05	0.8	-43.05	6581.95	-27.07	-36.82	-7.07	Pass
42.05	43.05	0.8	43.05	6668.05	-28.04	-37.78	8.04	Pass
43.05	84.1	0.8	43.247826	6668.2478 26	-27.85	-37.6	7.82	Pass
84.1	126.15	0.8	123.627	6748.627	-53.98	-63.73	14.7	Pass
126.15	252.3	0.8	144.0633	6769.0633	-54.01	-63.76	14.01	Pass

11ax80 (SU), U-NII-7, Middle Channel

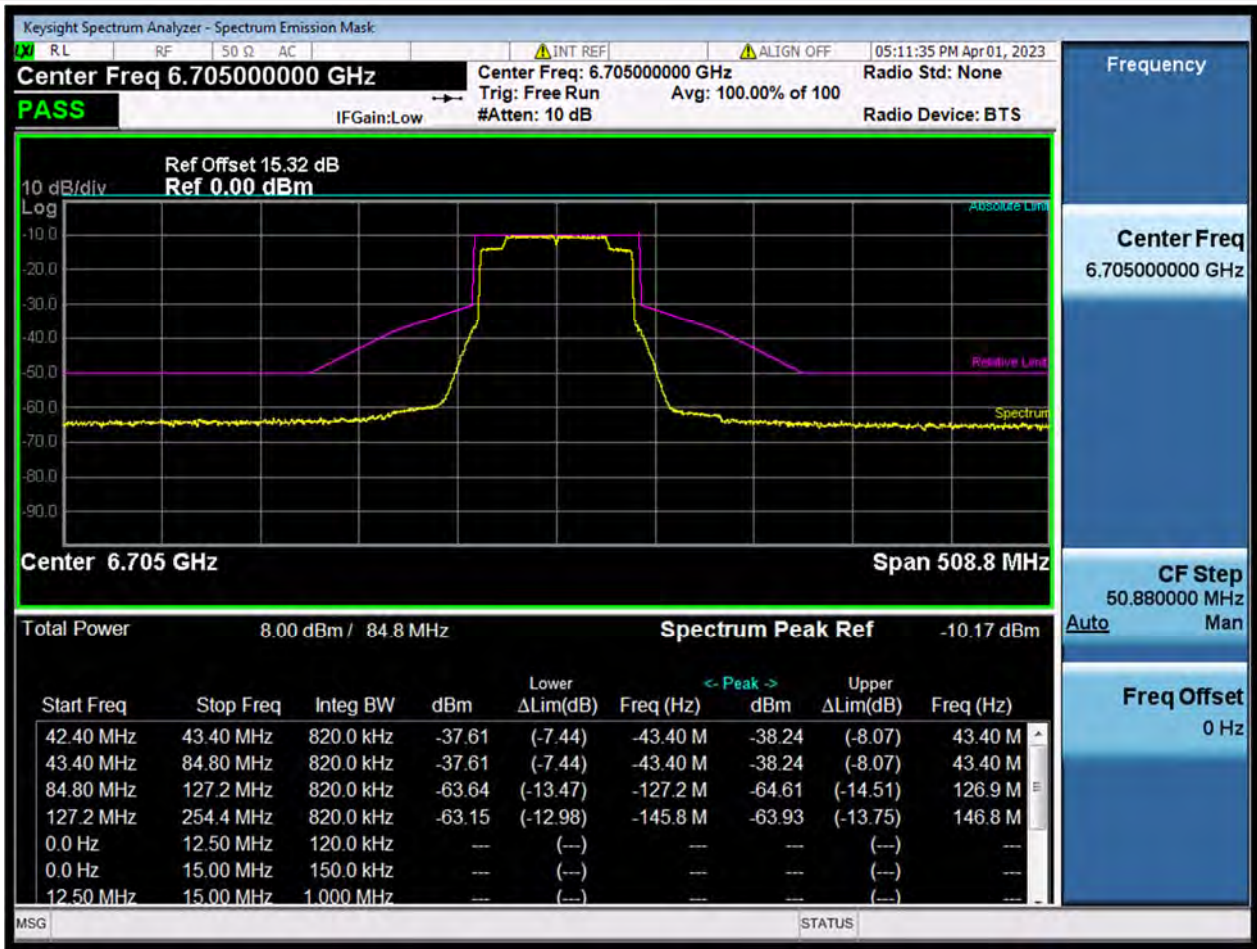


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-254.4	-127.2	0.8	-145.7712	6559.2288	-52.98	-63.15	-12.98	Pass
-127.2	-84.8	0.8	-127.2	6577.8	-53.47	-63.64	-13.47	Pass
-84.8	-43.4	0.8	-43.4	6661.6	-27.44	-37.61	-7.44	Pass
-43.4	-42.4	0.8	-43.4	6661.6	-27.44	-37.61	-7.44	Pass
42.4	43.4	0.8	43.4	6748.4	-28.07	-38.24	8.07	Pass
43.4	84.8	0.8	43.4	6748.4	-28.07	-38.24	8.07	Pass
84.8	127.2	0.8	126.9456	6831.9456	-54.44	-64.61	14.51	Pass
127.2	254.4	0.8	146.7888	6851.7888	-53.75	-63.93	13.75	Pass

11ax80 (SU), U-NII-7, High Channel

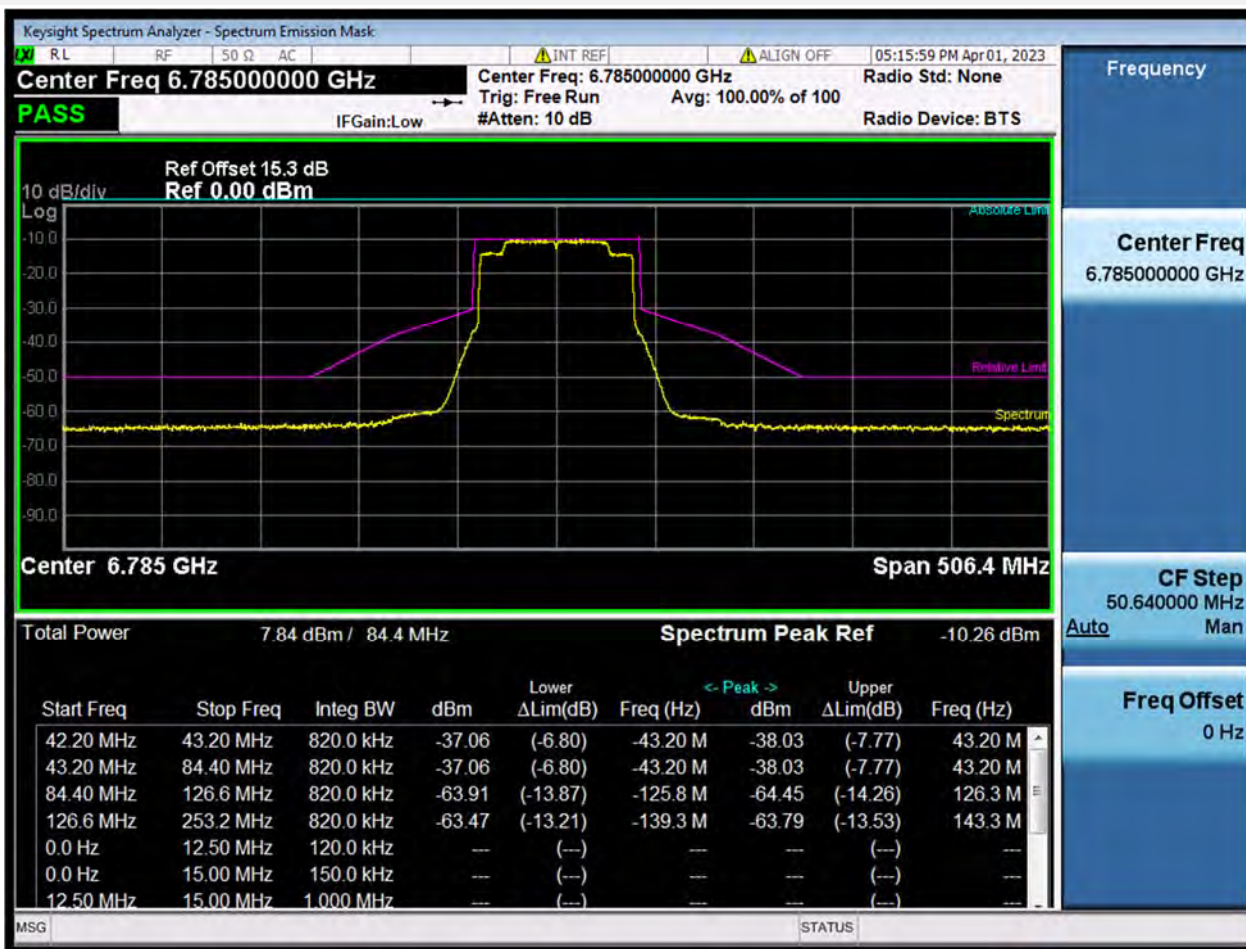


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-253.2	-126.6	0.8	-139.26	6645.74	-53.21	-63.47	-13.21	Pass
-126.6	-84.4	0.8	-125.8404	6659.1596	-53.65	-63.91	-13.87	Pass
-84.4	-43.2	0.8	-43.2	6741.8	-26.8	-37.06	-6.8	Pass
-43.2	-42.2	0.8	-43.2	6741.8	-26.8	-37.06	-6.8	Pass
42.2	43.2	0.8	43.2	6828.2	-27.77	-38.03	7.77	Pass
43.2	84.4	0.8	43.2	6828.2	-27.77	-38.03	7.77	Pass
84.4	126.6	0.8	126.3468	6911.3468	-54.18	-64.45	14.26	Pass
126.6	253.2	0.8	143.3112	6928.3112	-53.53	-63.79	13.53	Pass

11ax160 (SU), U-NII-7, Low Channel

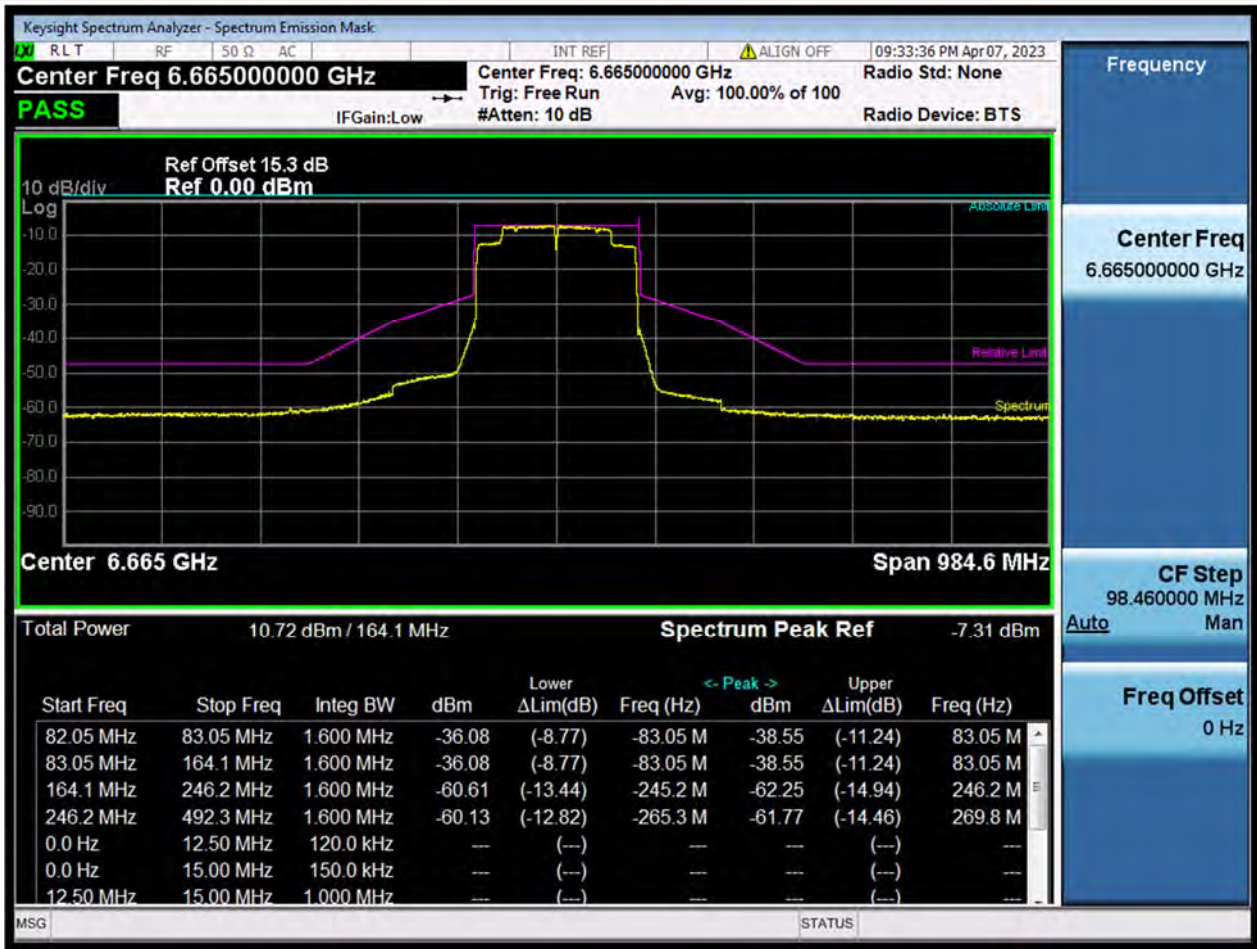

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.3	-246.15	1.6	-265.3497	6399.6503	-52.82	-60.13	-12.82	Pass
-246.15	-164.1	1.6	-245.1654	6419.8346	-53.29	-60.61	-13.44	Pass
-164.1	-83.05	1.6	-83.05	6581.95	-28.77	-36.08	-8.77	Pass
-83.05	-82.05	1.6	-83.05	6581.95	-28.77	-36.08	-8.77	Pass
82.05	83.05	1.6	83.05	6748.05	-31.24	-38.55	11.24	Pass
83.05	164.1	1.6	83.05	6748.05	-31.24	-38.55	11.24	Pass
164.1	246.15	1.6	246.15	6911.15	-54.94	-62.25	14.94	Pass
246.15	492.3	1.6	269.7804	6934.7804	-54.46	-61.77	14.46	Pass

11ax160 (SU), U-NII-7, High Channel

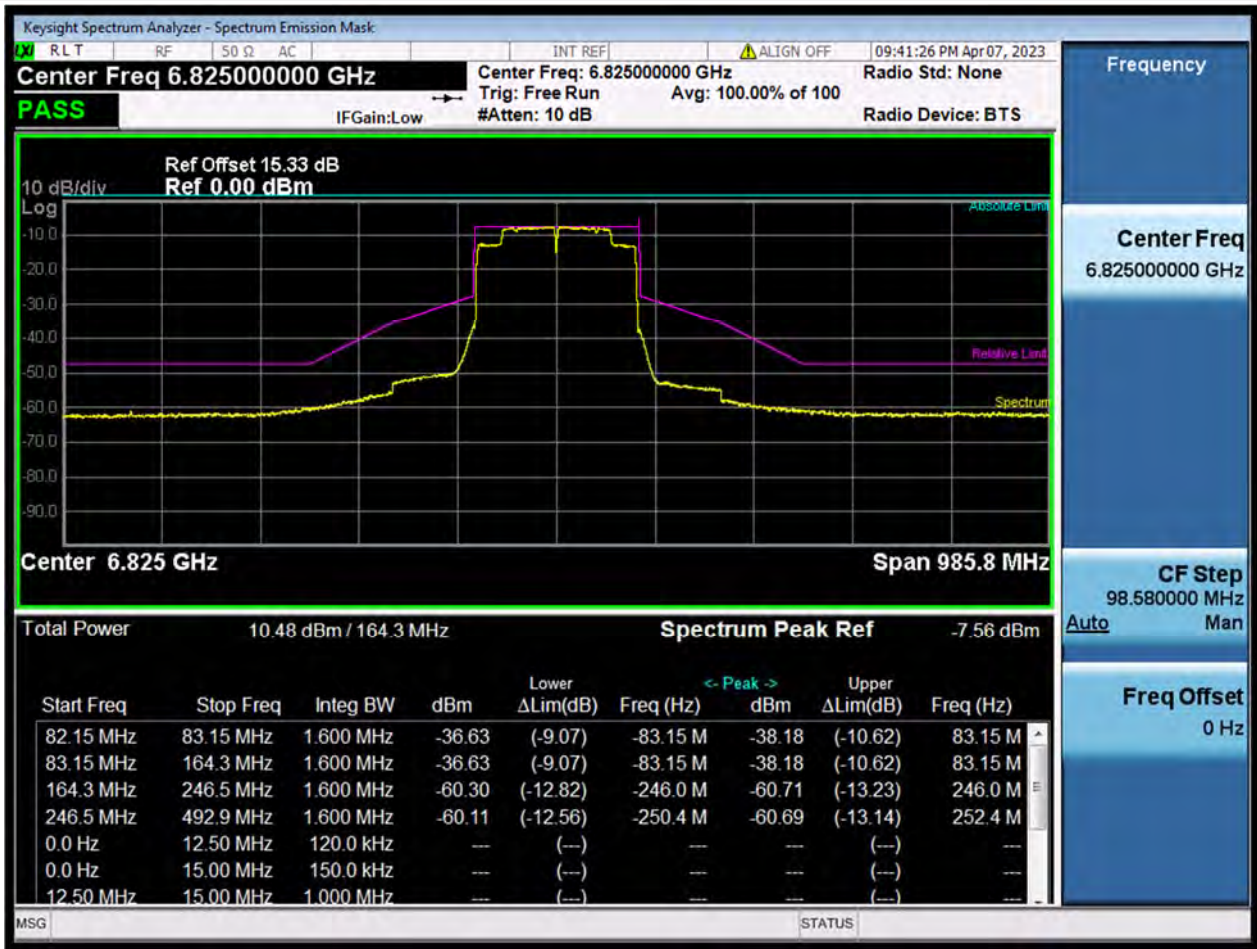

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.9	-246.45	1.6	-250.3932	6574.6068	-52.56	-60.11	-12.56	Pass
-246.45	-164.3	1.6	-245.9571	6579.0429	-52.74	-60.3	-12.82	Pass
-164.3	-83.15	1.6	-83.15	6741.85	-29.07	-36.63	-9.07	Pass
-83.15	-82.15	1.6	-83.15	6741.85	-29.07	-36.63	-9.07	Pass
82.15	83.15	1.6	83.15	6908.15	-30.62	-38.18	10.62	Pass
83.15	164.3	1.6	83.15	6908.15	-30.62	-38.18	10.62	Pass
164.3	246.45	1.6	245.9571	7070.9571	-53.16	-60.71	13.23	Pass
246.45	492.9	1.6	252.3648	7077.3648	-53.14	-60.69	13.14	Pass

11ax20 (SU), U-NII-8, Low Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-74.4	-37.2	0.2	-40.6968	6834.3032	-51.71	-66.22	-11.71	Pass
-37.2	-24.8	0.2	-36.9024	6838.0976	-51.82	-66.33	-12.11	Pass
-24.8	-13.4	0.2	-13.4	6861.6	-31.04	-45.55	-11.04	Pass
-13.4	-12.4	0.2	-13.4	6861.6	-30.96	-45.47	-10.96	Pass
12.4	13.4	0.2	13.4	6888.4	-31.69	-46.2	11.69	Pass
13.4	24.8	0.2	13.5408	6888.5408	-31.79	-46.3	11.69	Pass
24.8	37.2	0.2	37.0512	6912.0512	-52.56	-67.07	12.7	Pass
37.2	74.4	0.2	39.1344	6914.1344	-51.65	-66.16	11.65	Pass

11ax20 (SU), U-NII-8, Middle Channel




Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.5	-38.25	0.2	-41.5395	6973.4605	-51.55	-66.46	-11.55	Pass
-38.25	-25.5	0.2	-38.25	6976.75	-51.85	-66.76	-11.85	Pass
-25.5	-13.75	0.2	-13.75	7001.25	-32.83	-47.75	-12.83	Pass
-13.75	-12.75	0.2	-13.75	7001.25	-32.25	-47.16	-12.25	Pass
12.75	13.75	0.2	13.75	7028.75	-32.9	-47.81	12.9	Pass
13.75	25.5	0.2	13.75	7028.75	-32.09	-47	12.09	Pass
25.5	38.25	0.2	38.1735	7053.1735	-51.86	-66.77	11.93	Pass
38.25	76.5	0.2	44.5995	7059.5995	-51.32	-66.23	11.32	Pass

11ax20 (SU), U-NII-8, Middle Channel

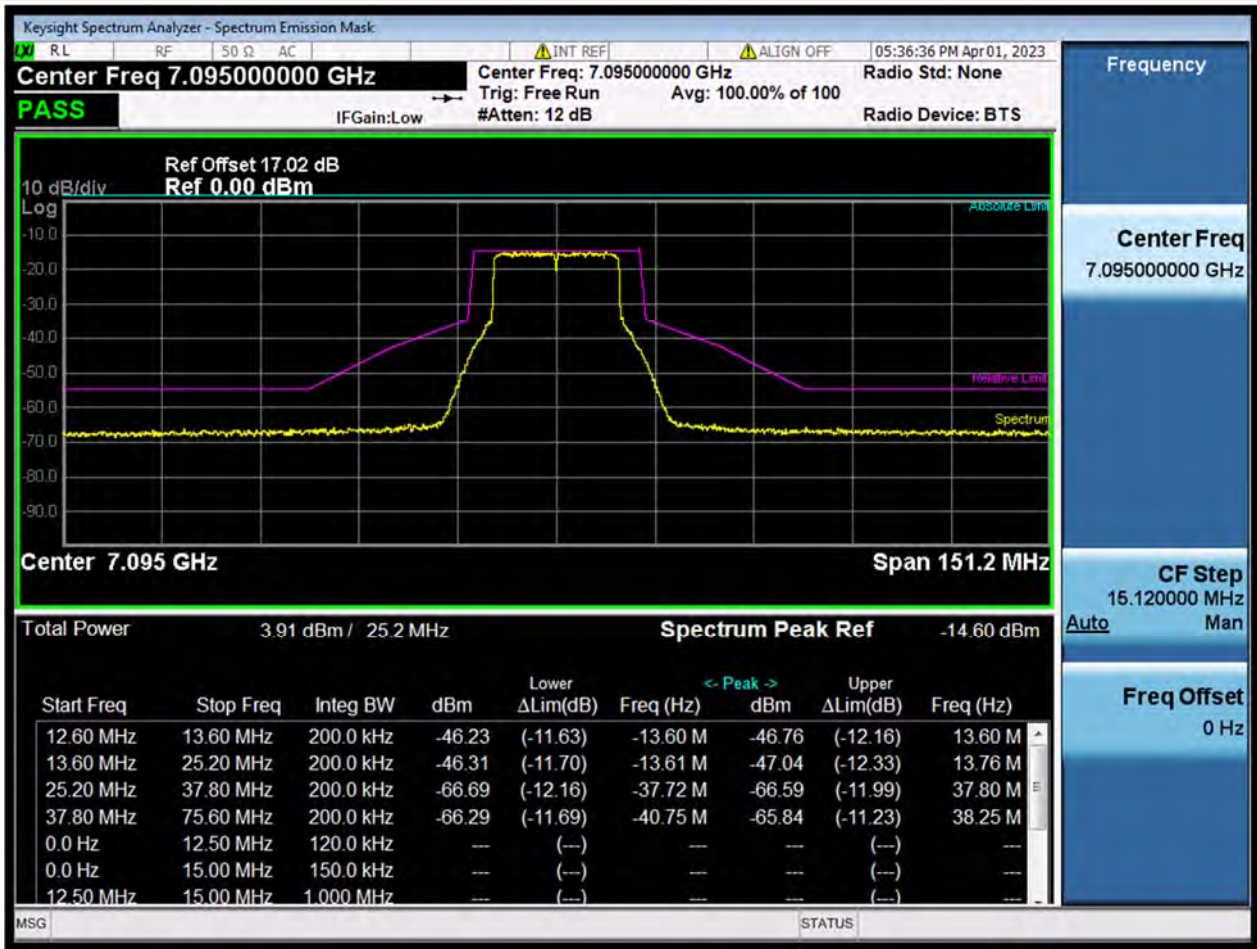


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-75.6	-37.8	0.2	-40.7484	7054.2516	-51.69	-66.29	-11.69	Pass
-37.8	-25.2	0.2	-37.7244	7057.2756	-52.09	-66.69	-12.16	Pass
-25.2	-13.6	0.2	-13.608	7081.392	-31.71	-46.31	-11.7	Pass
-13.6	-12.6	0.2	-13.6	7081.4	-31.63	-46.23	-11.63	Pass
12.6	13.6	0.2	13.6	7108.6	-32.16	-46.76	12.16	Pass
13.6	25.2	0.2	13.7592	7108.7592	-32.44	-47.04	12.33	Pass
25.2	37.8	0.2	37.8	7132.8	-51.99	-66.59	11.99	Pass
37.8	75.6	0.2	38.2536	7133.2536	-51.23	-65.84	11.23	Pass

11ax20 (SU), U-NII-8, High Channel

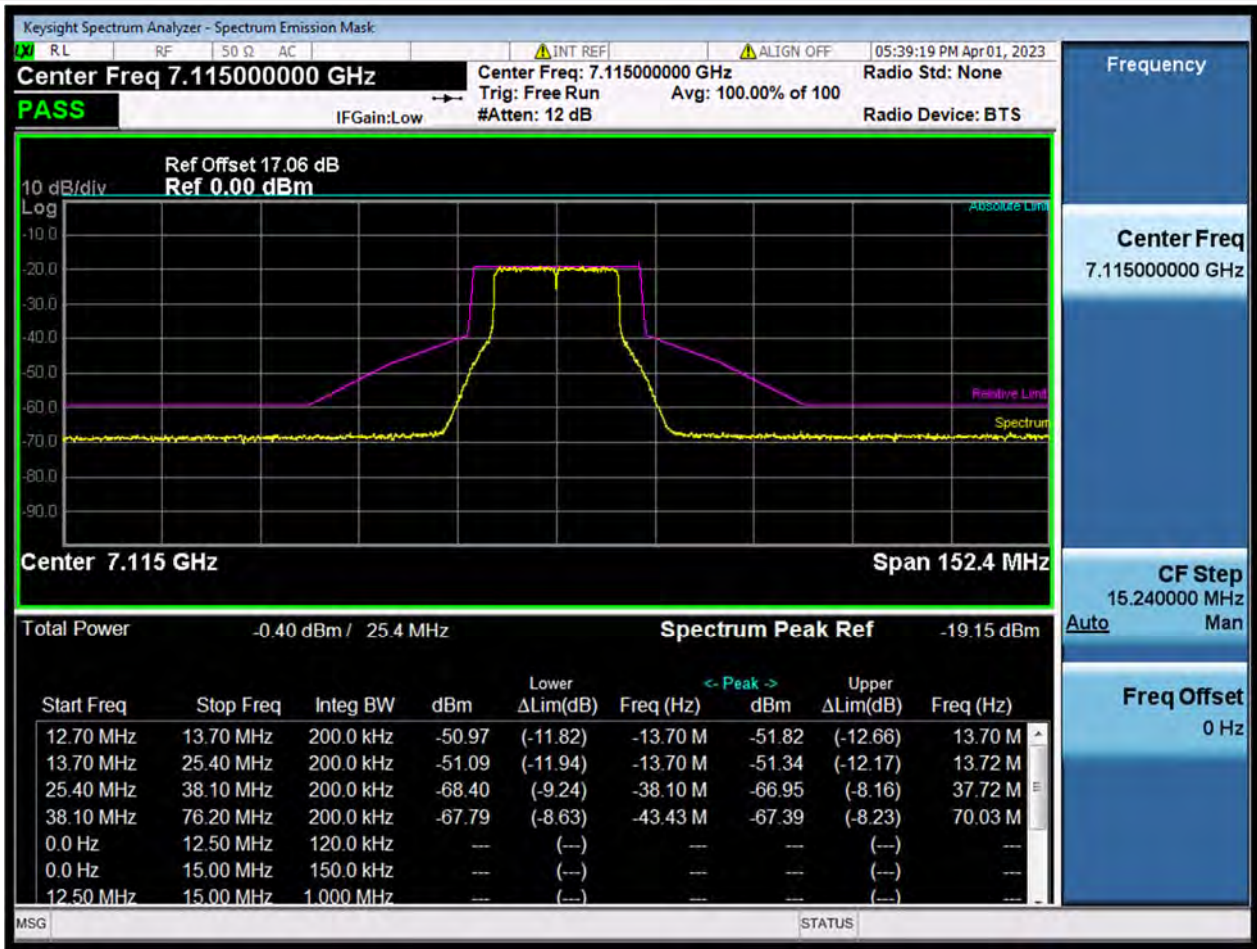


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-76.2	-38.1	0.2	-43.434	7071.566	-48.63	-67.79	-8.63	Pass
-38.1	-25.4	0.2	-38.1	7076.9	-49.24	-68.4	-9.24	Pass
-25.4	-13.7	0.2	-13.7	7101.3	-31.94	-51.09	-11.94	Pass
-13.7	-12.7	0.2	-13.7	7101.3	-31.82	-50.97	-11.82	Pass
12.7	13.7	0.2	13.7	7128.7	-32.66	-51.82	12.66	Pass
13.7	25.4	0.2	13.716	7128.716	-32.19	-51.34	12.17	Pass
25.4	38.1	0.2	37.719	7152.719	-47.8	-66.95	8.16	Pass
38.1	76.2	0.2	70.0278	7185.0278	-48.23	-67.39	8.23	Pass

11ax40 (SU), U-NII-8, Low Channel

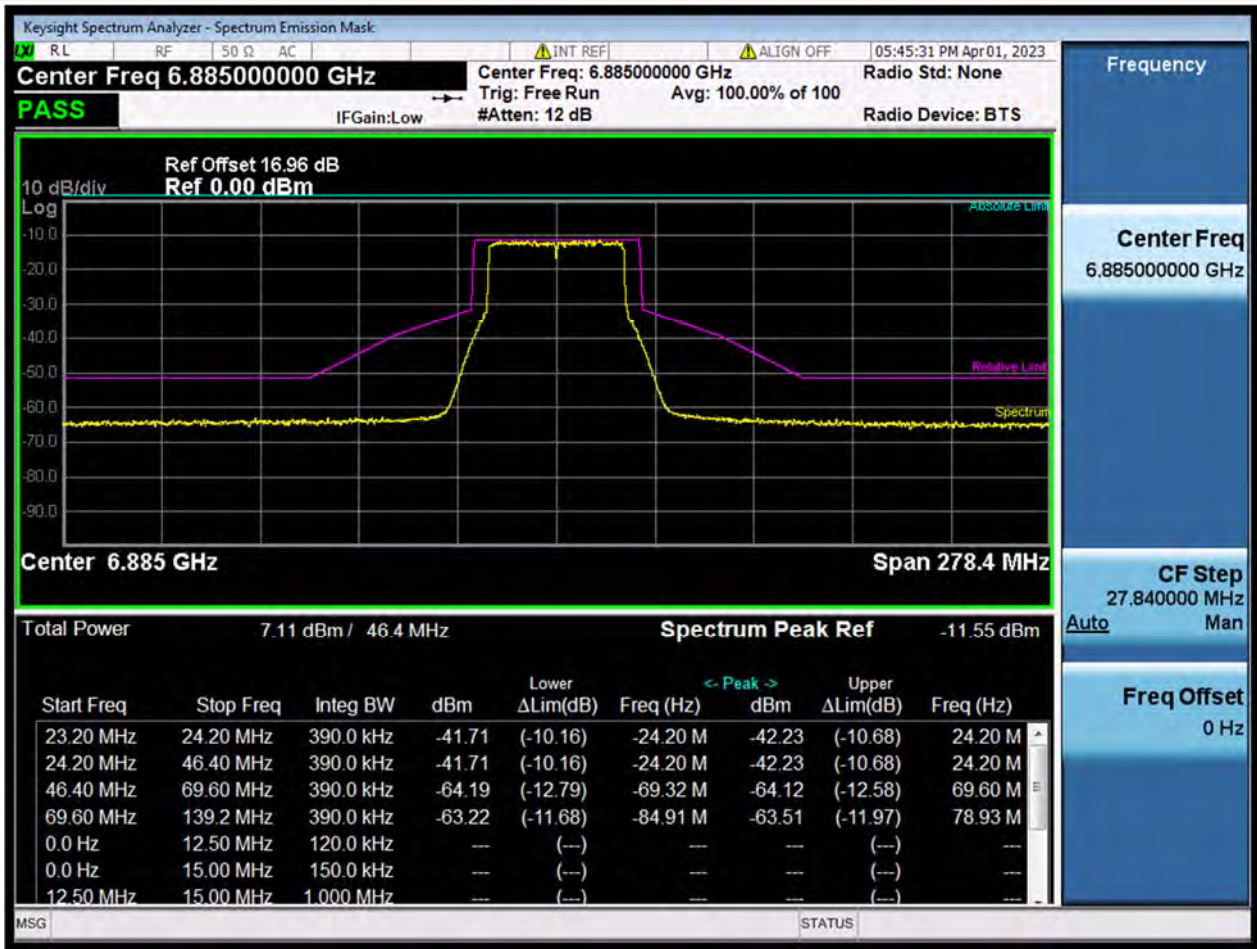


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-139.2	-69.6	0.4	-84.912	6800.088	-51.68	-63.22	-11.68	Pass
-69.6	-46.4	0.4	-69.3216	6815.6784	-52.65	-64.19	-12.79	Pass
-46.4	-24.2	0.4	-24.2	6860.8	-30.16	-41.71	-10.16	Pass
-24.2	-23.2	0.4	-24.2	6860.8	-30.16	-41.71	-10.16	Pass
23.2	24.2	0.4	24.2	6909.2	-30.68	-42.23	10.68	Pass
24.2	46.4	0.4	24.2	6909.2	-30.68	-42.23	10.68	Pass
46.4	69.6	0.4	69.6	6954.6	-52.58	-64.12	12.58	Pass
69.6	139.2	0.4	78.9264	6963.9264	-51.97	-63.51	11.97	Pass

11ax40 (SU), U-NII-8, Middle Channel

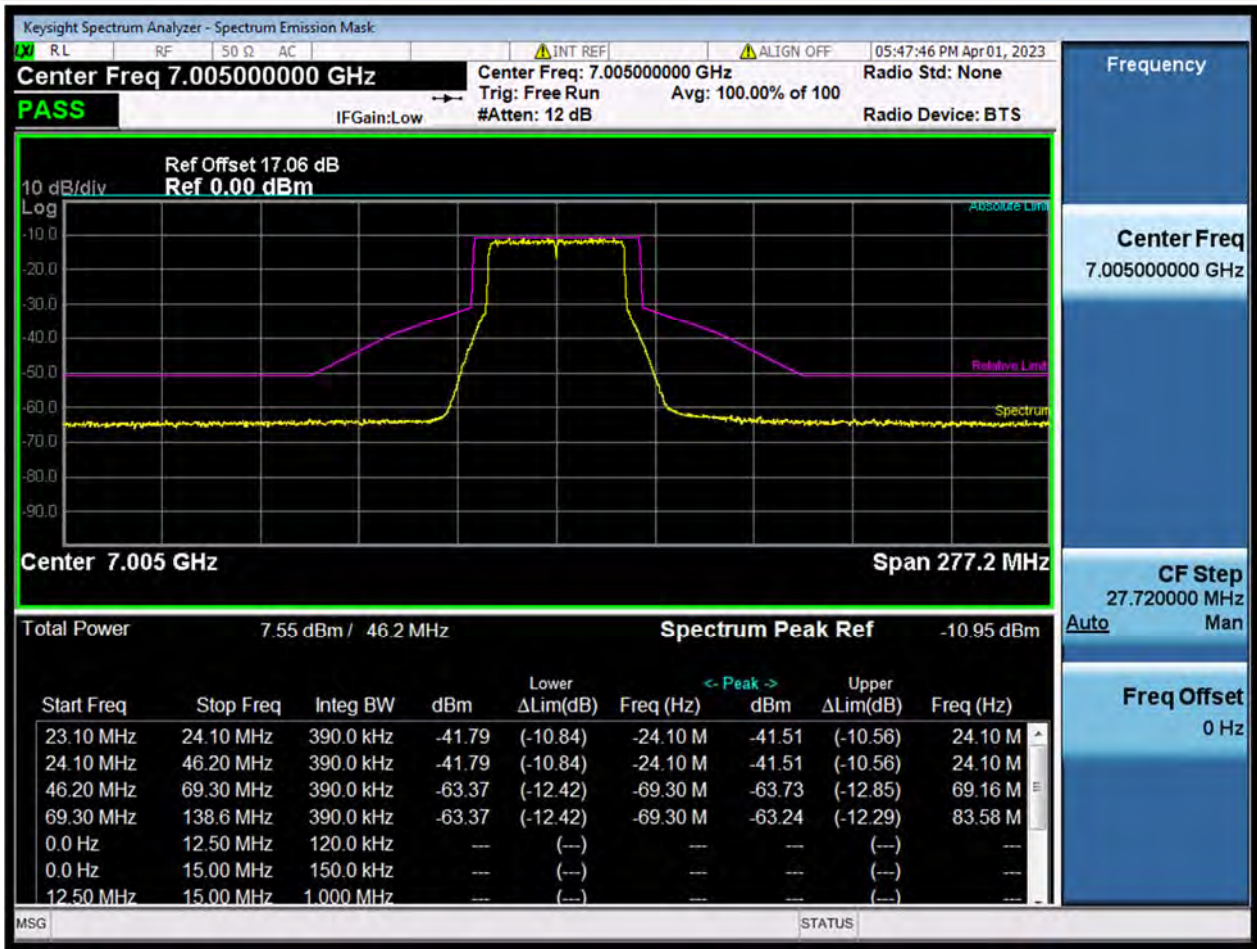


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138.6	-69.3	0.4	-69.3	6935.7	-52.42	-63.37	-12.42	Pass
-69.3	-46.2	0.4	-69.3	6935.7	-52.42	-63.37	-12.42	Pass
-46.2	-24.1	0.4	-24.1	6980.9	-30.84	-41.79	-10.84	Pass
-24.1	-23.1	0.4	-24.1	6980.9	-30.84	-41.79	-10.84	Pass
23.1	24.1	0.4	24.1	7029.1	-30.56	-41.51	10.56	Pass
24.1	46.2	0.4	24.1	7029.1	-30.56	-41.51	10.56	Pass
46.2	69.3	0.4	69.1614	7074.1614	-52.78	-63.73	12.85	Pass
69.3	138.6	0.4	83.5758	7088.5758	-52.29	-63.24	12.29	Pass

11ax40 (SU), U-NII-8, High Channel

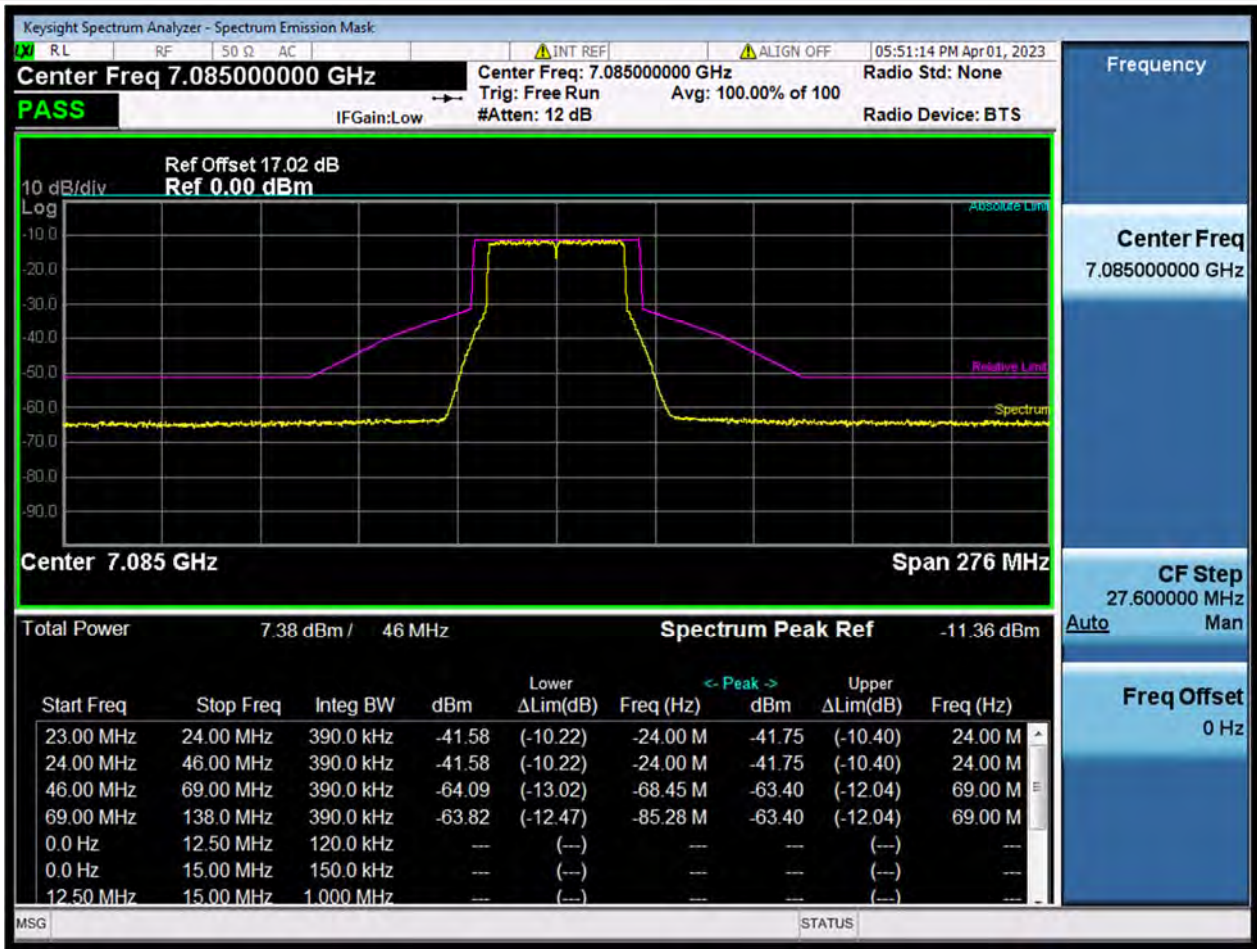


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-138	-69	0.4	-85.284	6999.716	-52.47	-63.82	-12.47	Pass
-69	-46	0.4	-68.448	7016.552	-52.74	-64.09	-13.02	Pass
-46	-24	0.4	-24	7061	-30.22	-41.58	-10.22	Pass
-24	-23	0.4	-24	7061	-30.22	-41.58	-10.22	Pass
23	24	0.4	24	7109	-30.4	-41.75	10.4	Pass
24	46	0.4	24	7109	-30.4	-41.75	10.4	Pass
46	69	0.4	69	7154	-52.04	-63.4	12.04	Pass
69	138	0.4	69	7154	-52.04	-63.4	12.04	Pass

11ax80 (SU), U-NII-8, Low Channel

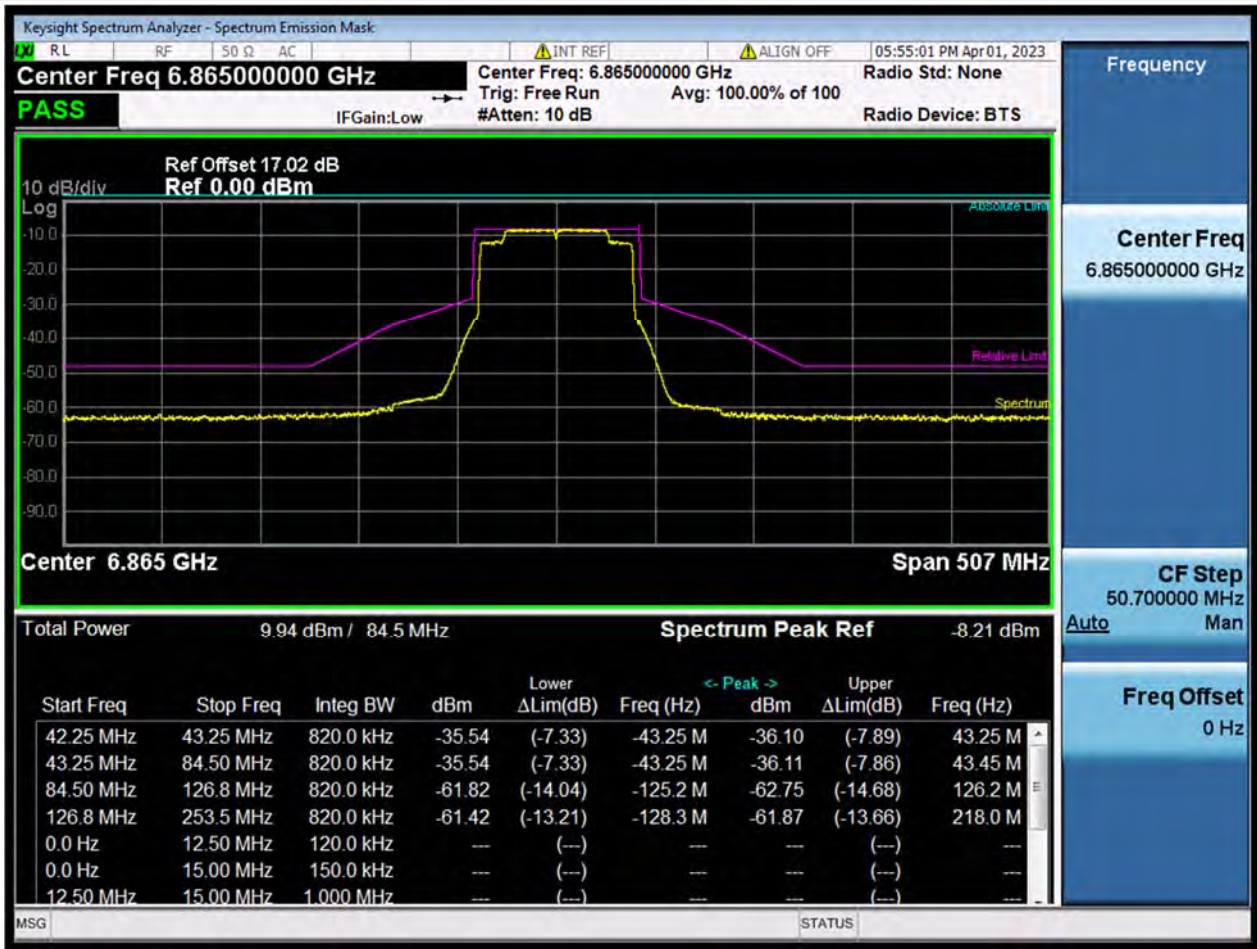


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-253.5	-126.75	0.8	-128.271	6736.729	-53.21	-61.42	-13.21	Pass
-126.75	-84.5	0.8	-125.229	6739.771	-53.61	-61.82	-14.04	Pass
-84.5	-43.25	0.8	-43.25	6821.75	-27.33	-35.54	-7.33	Pass
-43.25	-42.25	0.8	-43.25	6821.75	-27.33	-35.54	-7.33	Pass
42.25	43.25	0.8	43.25	6908.25	-27.89	-36.1	7.89	Pass
43.25	84.5	0.8	43.453523	6908.453523	-27.9	-36.11	7.86	Pass
84.5	126.75	0.8	126.243	6991.243	-54.53	-62.75	14.68	Pass
126.75	253.5	0.8	218.01	7083.01	-53.66	-61.87	13.66	Pass

11ax80 (SU), U-NII-8, Middle Channel

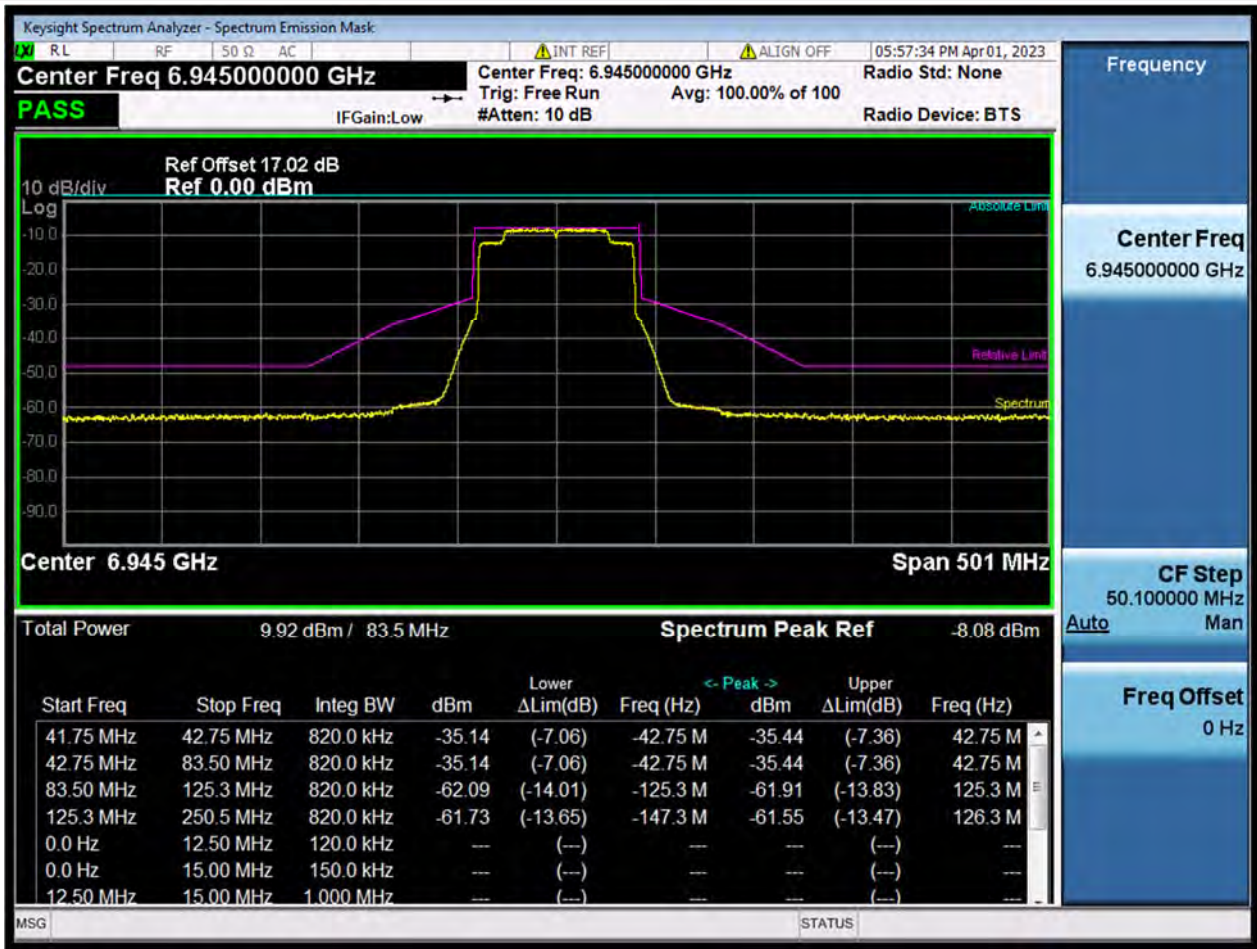


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-250.5	-125.25	0.8	-147.294	6797.706	-53.65	-61.73	-13.65	Pass
-125.25	-83.5	0.8	-125.25	6819.75	-54.01	-62.09	-14.01	Pass
-83.5	-42.75	0.8	-42.75	6902.25	-27.06	-35.14	-7.06	Pass
-42.75	-41.75	0.8	-42.75	6902.25	-27.06	-35.14	-7.06	Pass
41.75	42.75	0.8	42.75	6987.75	-27.36	-35.44	7.36	Pass
42.75	83.5	0.8	42.75	6987.75	-27.36	-35.44	7.36	Pass
83.5	125.25	0.8	125.25	7070.25	-53.83	-61.91	13.83	Pass
125.25	250.5	0.8	126.252	7071.252	-53.47	-61.55	13.47	Pass

11ax80 (SU), U-NII-8, High Channel

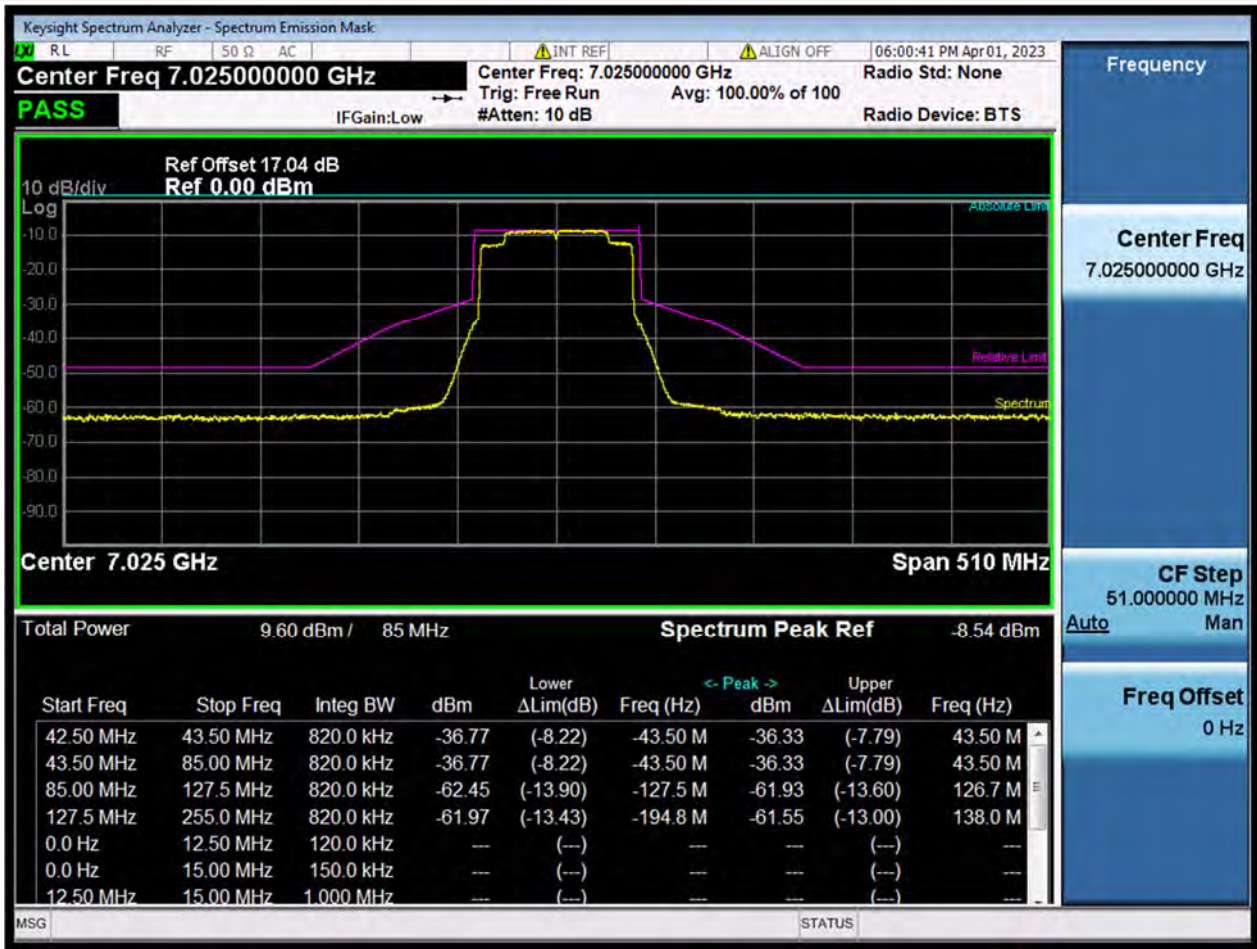

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-255	-127.5	0.8	-194.82	6830.18	-53.43	-61.97	-13.43	Pass
-127.5	-85	0.8	-127.5	6897.5	-53.9	-62.45	-13.9	Pass
-85	-43.5	0.8	-43.5	6981.5	-28.22	-36.77	-8.22	Pass
-43.5	-42.5	0.8	-43.5	6981.5	-28.22	-36.77	-8.22	Pass
42.5	43.5	0.8	43.5	7068.5	-27.79	-36.33	7.79	Pass
43.5	85	0.8	43.5	7068.5	-27.79	-36.33	7.79	Pass
85	127.5	0.8	126.735	7151.735	-53.39	-61.93	13.6	Pass
127.5	255	0.8	137.955	7162.955	-53	-61.55	13	Pass

11ax160 (SU), U-NII-8, Middle Channel

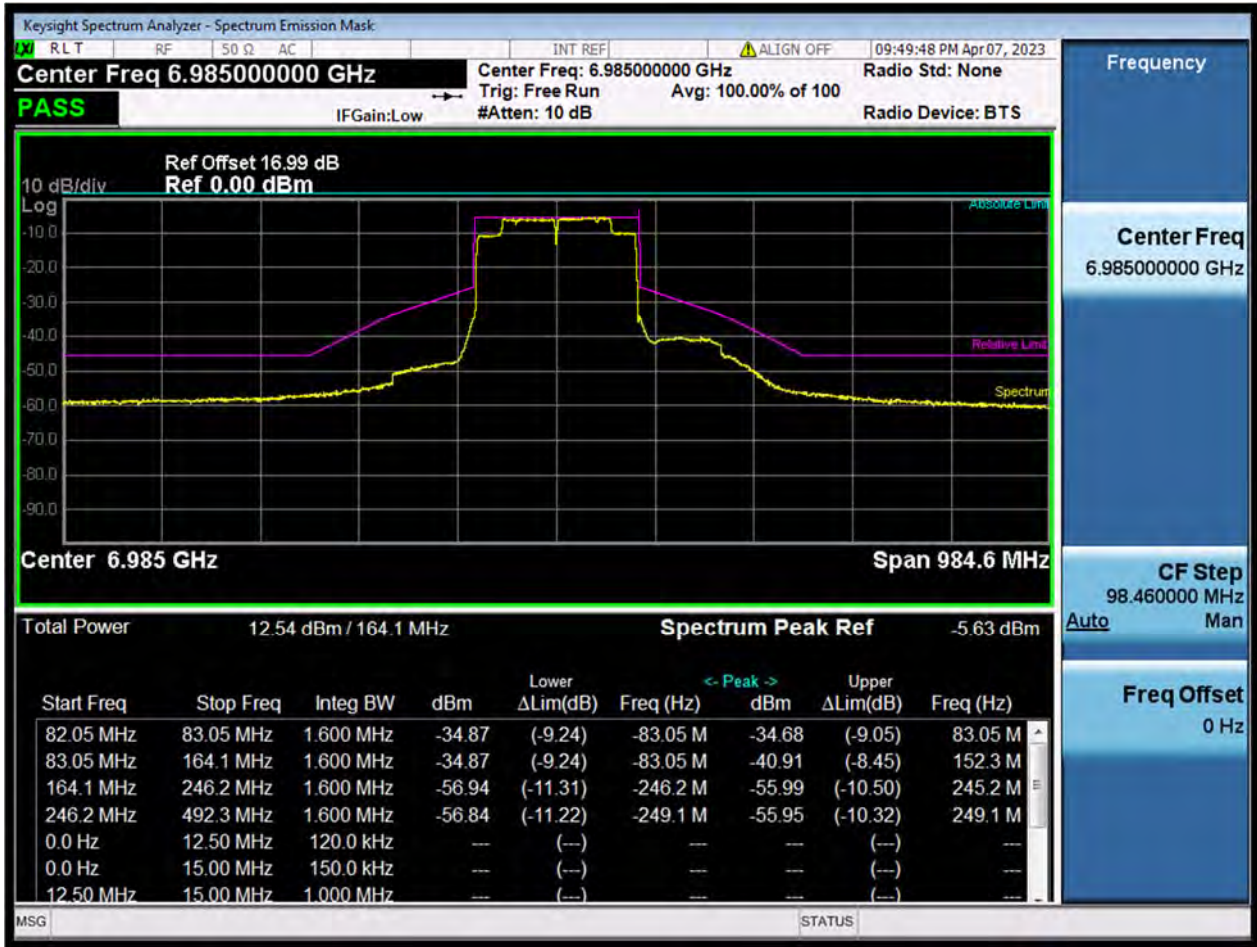

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-492.3	-246.15	1.6	-249.1038	6735.8962	-51.22	-56.84	-11.22	Pass
-246.15	-164.1	1.6	-246.15	6738.85	-51.31	-56.94	-11.31	Pass
-164.1	-83.05	1.6	-83.05	6901.95	-29.24	-34.87	-9.24	Pass
-83.05	-82.05	1.6	-83.05	6901.95	-29.24	-34.87	-9.24	Pass
82.05	83.05	1.6	83.05	7068.05	-29.05	-34.68	9.05	Pass
83.05	164.1	1.6	152.29070 5	7137.2907 05	-35.28	-40.91	8.45	Pass
164.1	246.15	1.6	245.1654	7230.1654	-50.36	-55.99	10.5	Pass
246.15	492.3	1.6	249.1038	7234.1038	-50.32	-55.95	10.32	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2330960-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2330960-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2330960-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--