




IN THE BOX

Make sure you have everything shown here.



This remote must be paired to and used with a Security Brands Ridge 2.0 Transceiver (Model 14-REC20) to work correctly.




Ridge Remote



Visor Clip

WHAT'S WHAT


The Ridge Remote has two programmable buttons and a status LED. Each button can be paired to a separate transceiver or the same transceiver and set to different modes of operation.

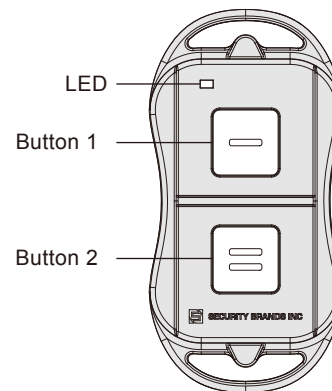


BASIC SETUP

1. On Ridge 2.0 Transceiver, hold down PROGRAMMING PAIR button for three seconds and release. PROG LED will light up.

NOTE: The transceiver must be powered up and have its cover removed for this step. Please see the instructions that came with it for help.

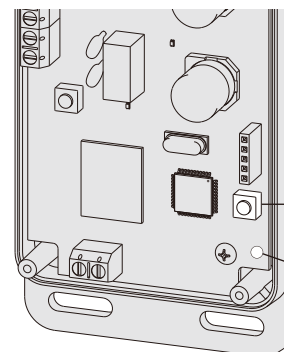


2. On Ridge Remote, press and hold down both buttons and pay attention to remote LED.

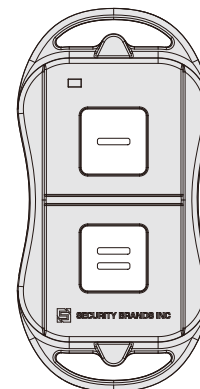


3. When LED flashes twice, continue holding button you want to program and release other button.
4. When LED flashes again, release button. Button is now programmed.
5. Repeat procedure for second button if desired.

NOTE: The second button can be paired with the same or a different Ridge 2.0 Transceiver.

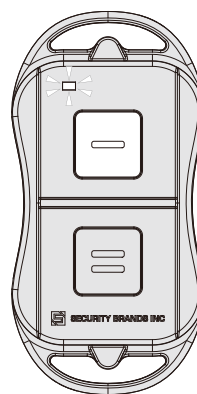

Step 3

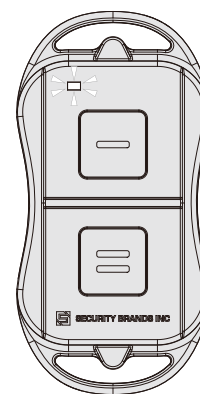

Step 4

MODE SELECTION (MOMENTARY/LATCH)

1. On Ridge Remote, press and hold down both buttons and pay attention to remote LED.
2. When LED flashes twice, continue holding both buttons.
3. When LED flashes twice again, continue holding button you want to change modes on until LED flashes multiple times to confirm mode change.

NOTE: If the relay on the Ridge 2.0 Transceiver is already latched (on), it cannot be unlatched unless the remote button is set to latch mode.

NOTE: If needed, follow the same procedure for the second button.



Go to securitybrandsinc.com/ridge/ for more helpful resources.

HOW TO USE

1. Make sure you are in range of Ridge 2.0 Transceiver you want to control.
2. Press remote button paired to transceiver long enough for LED to flash.
3. Transceiver will respond and operate gate/door.

NOTE: If the transceiver does not respond, make sure the remote LED is flashing when a button is pressed. If it is not, check the battery. If it still does not respond, complete the pairing procedure again.



WARNING! AUTOMATIC GATES CAN CAUSE SERIOUS INJURY OR DEATH! ALWAYS CHECK THAT THE GATE PATH IS CLEAR BEFORE OPERATING! REVERSING OR OTHER SAFETY DEVICES SHOULD ALWAYS BE USED!



NEED
HELP

call
(972) 474-6390
or email
techsupport@securitybrandsinc.com

Two-Year Limited Warranty

Visit securitybrandsinc.com/warranty/ for details



SECURITY BRANDS INC.
your *partner* in access control

FCC Statement:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

ISED RSS Warning:

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ISED RF exposure statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. The device has been evaluated to meet general RF exposure requirement.

Le matériel est conforme aux limites de dose d'exposition aux rayonnements énoncées pour un autre environnement. ce dispositif a été évalué à satisfaire l'exigence générale de l'exposition aux rf.