



# WINNF-TS-0122 TEST REPORT

**FCC ID** : 2BAMZGRBBU001I25001  
**Equipment** : REIGN CORE  
**Brand Name** : G REIGNS  
**Model Name** : Cupid001I25001  
**Applicant** : REIGN Technology Corporation  
12F, No.88, Section 3, Zhongxing Road, Xindian  
District, New Taipei City, Taiwan  
**Manufacturer** : REIGN Technology Corporation  
12F, No.88, Section 3, Zhongxing Road, Xindian  
District, New Taipei City, Taiwan  
**Standard** : WINNF-TS-0122 Version V1.0.2

The product was received on Mar. 22, 2023, and testing was started from Mar. 22, 2023 and completed on Apr. 20, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in WINNF-TS-0122 Version V1.0.2 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



# Table of Contents

- 1 General Description ..... 8**
- 1.1 Product Feature of Equipment Under Test ..... 8
- 1.2 Accessories ..... 9
- 1.3 Support Equipment ..... 9
- 1.4 Testing Location ..... 9
- 2 Measurement Environment ..... 10**
- 2.1 Conditional Test Case ..... 10
- 2.2 Test Configuration ..... 11
- 3 Protocol Test Results ..... 12**
- 3.1 WINNF.FT.C.REG.5 - Single-Step registration for CBSD with CPI signed data ..... 12
- 3.2 WINNF.FT.C.REG.8 - Missing Required parameters (responseCode 102) ..... 13
- 3.3 WINNF.FT.C.REG.10 - Pending registration (responseCode 200) ..... 14
- 3.4 WINNF.FT.C.REG.12 - Invalid parameter (responseCode 103) ..... 15
- 3.5 WINNF.FT.C.REG.14 - Blacklisted CBSD (responseCode 101) ..... 16
- 3.6 WINNF.FT.C.REG.16 - Unsupported SAS protocol version (responseCode 100) ..... 17
- 3.7 WINNF.FT.C.REG.18 - Group Error (responseCode 201) ..... 18
- 3.8 WINNF.FT.C.GRA.1 - Unsuccessful Grant responseCode=400 (INTERFERENCE) ..... 19
- 3.9 WINNF.FT.C.GRA.2 - Unsuccessful Grant responseCode=401 (GRANT\_CONFLICT) ..... 20
- 3.10 WINNF.FT.C.HBT.1 - Heartbeat Success Case (first Heartbeat Response) ..... 21
- 3.11 WINNF.FT.C.HBT.3 - Heartbeat responseCode=105 (DEREGISTER) ..... 23
- 3.12 WINNF.FT.C.HBT.4 - Heartbeat responseCode=500 (TERMINATED\_GRANT) ..... 24
- 3.13 WINNF.FT.C.HBT.5 - Heartbeat responseCode=501 (SUSPENDED\_GRANT) in First Heartbeat Response. 25
- 3.14 WINNF.FT.C.HBT.6 - Heartbeat responseCode=501 (SUSPENDED\_GRANT) in Subsequent Heartbeat Response ..... 26
- 3.15 WINNF.FT.C.HBT.7 - Heartbeat responseCode=502 (UNSYNC\_OP\_PARAM) ..... 27
- 3.16 WINNF.FT.C.HBT.9 - Heartbeat Response Absent (First Heartbeat) ..... 28
- 3.17 WINNF.FT.C.HBT.10 - Heartbeat Response Absent (Subsequent Heartbeat) ..... 29
- 3.18 WINNF.FT.C.HBT.11 - Successful Grant Renewal in Heartbeat Test Case ..... 30
- 3.19 WINNF.FT.C.RLQ.1 - Successful Relinquishment ..... 32
- 3.20 WINNF.FT.C.RLQ.3 - Unsuccessful Relinquishment, responseCode=102 ..... 33
- 3.21 WINNF.FT.C.RLQ.5 - Unsuccessful Relinquishment, responseCode=103 ..... 34
- 3.22 WINNF.FT.C.DRG.1 - Successful Deregistration ..... 35
- 3.23 WINNF.FT.C.DRG.3 - Deregistration responseCode=102 ..... 36
- 3.24 WINNF.FT.C.DRG.5 - Deregistration responseCode=103 ..... 37
- 3.25 WINNF.FT.C.SCS.1 - Successful TLS connection between UUT and SAS Test Harness ..... 38
- 3.26 WINNF.FT.C.SCS.2 - TLS failure due to revoked certificate ..... 39
- 3.27 WINNF.FT.C.SCS.3 - TLS failure due to expired server certificate ..... 40
- 3.28 WINNF.FT.C.SCS.4 - TLS failure when SAS Test Harness certificate is issued by an unknown CA ..... 41
- 3.29 WINNF.FT.C.SCS.5 - TLS failure when certificate at the SAS Test Harness is corrupted ..... 42
- 3.30 WINNF.PT.C.HBT.1 - UUT RF Transmit Power Measurement ..... 43
- 4 Test Equipment and Calibration Data ..... 46**
- 5 Measurement Uncertainty ..... 47**
- Appendix A. RF Measurement Plots**
- Appendix B. Wireshark Plots**
- Appendix C. CRL and OCSP Verify Plots**
- Appendix D. Test Photos**
- Photographs of EUT v01**





### Summary of Test Result

Report Clause	Ref Std. Clause	CBSD	DP	Required for Cert.	Test Case ID	Test Case Title	Result (PASS/FAIL)	Remark
-	6.1.4.1.1	X	-	C1	WINNF.FT.C.REG.1	Multi-Step registration	N/A	-
-	6.1.4.1.2	-	X	C1	WINNF.FT.D.REG.2	Domain Proxy Multi-Step registration	N/A	-
-	6.1.4.1.3	X	-	C2	WINNF.FT.C.REG.3	Single-Step registration for Category A CBSD	N/A	-
-	6.1.4.1.4	-	X	C2	WINNF.FT.D.REG.4	Domain Proxy Single-Step registration for Cat A CBSD	N/A	-
3.1	6.1.4.1.5	X	-	C3	WINNF.FT.C.REG.5	Single-Step registration for CBSD with CPI signed data	PASS	-
-	6.1.4.1.6	-	X	C3	WINNF.FT.D.REG.6	Domain Proxy Single-Step registration for CBSD with CPI signed data	N/A	-
-	6.1.4.1.7	X	X	C6	WINNF.FT.C.REG.7	Registration due to change of an installation parameter	N/A	-
3.2	6.1.4.2.1	X	-	M	WINNF.FT.C.REG.8	Missing Required parameters (responseCode 102)	PASS	-
-	6.1.4.2.2	-	X	M	WINNF.FT.D.REG.9	Domain Proxy Missing Required parameters (responseCode 102)	N/A	-
3.3	6.1.4.2.3	X	-	M	WINNF.FT.C.REG.10	Pending registration (responseCode 200)	PASS	-
-	6.1.4.2.4	-	X	M	WINNF.FT.D.REG.11	Domain Proxy Pending registration (responseCode 200)	N/A	-
3.4	6.1.4.2.5	X	-	M	WINNF.FT.C.REG.12	Invalid parameter (responseCode 103)	PASS	-
-	6.1.4.2.6	-	X	M	WINNF.FT.D.REG.13	DomainProxyInvalidparameters (responseCode103)	N/A	-
3.5	6.1.4.2.7	X	-	M	WINNF.FT.C.REG.14	Blacklisted CBSD (responseCode 101)	PASS	-
-	6.1.4.2.8	-	X	M	WINNF.FT.D.REG.15	Domain Proxy Blacklisted CBSD (responseCode 101)	N/A	-
3.6	6.1.4.2.9	X	-	M	WINNF.FT.C.REG.16	UnsupportedSASprotocolversion (responseCode100)	PASS	-
-	6.1.4.2.10	-	X	M	WINNF.FT.D.REG.17	Domain Proxy Unsupported SAS protocol version (responseCode 100)	N/A	-
3.7	6.1.4.2.11	X	-	M	WINNF.FT.C.REG.18	Group Error (responseCode 201)	PASS	-
-	6.1.4.2.12	-	X	M	WINNF.FT.D.REG.19	Domain Proxy Group Error (responseCode 201)	N/A	-



-	6.1.4.3.1	X	X	C2	WINNF.FT.C.REG.20	Category A CBSD location Update	N/A	-
3.8	6.3.4.2.1	X	X	M	WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS	-
3.9	6.3.4.2.2	X	X	M	WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	PASS	-
3.10	6.4.4.1.1	X	-	M	WINNF.FT.C.HBT.1	Heartbeat Success Case (first Heartbeat Response)	PASS	-
-	6.4.4.1.2	-	X	M	WINNF.FT.D.HBT.2	Domain Proxy Heartbeat Success Case (first Heartbeat Response)	N/A	-
3.11	6.4.4.2.1	X	X	M	WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DEREGISTER)	PASS	-
3.12	6.4.4.2.2	X	-	M	WINNF.FT.C.HBT.4	Heartbeat responseCode=500 (TERMINATED_GRANT)	PASS	-
3.13	6.4.4.2.3	X	X	M	WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS	-
3.14	6.4.4.2.4	X	X	M	WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS	-
3.15	6.4.4.2.5	X	X	M	WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	PASS	-
-	6.4.4.2.6	-	X	M	WINNF.FT.D.HBT.8	Domain Proxy Heartbeat responseCode=500 (TERMINATED_GRANT)	N/A	-
3.16	6.4.4.3.1	X	X	M	WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS	-
3.17	6.4.4.3.2	X	X	M	WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS	-
3.18	6.4.4.4.1	X	X	O	WINNF.FT.C.HBT.11	SuccessfulGrantRenewalin HeartbeatTestCase	PASS	-
-	6.5.4.2.1	X	-	C4	WINNF.FT.C.MES.1	Registration Response contains measReportConfig	N/A	-
-	6.5.4.2.2	-	X	C4	WINNF.FT.D.MES.2	Domain Proxy Registration Response contains measReportConfig	N/A	-
-	6.5.4.2.3	X	X	C5	WINNF.FT.C.MES.3	Grant Response contains measReportConfig	N/A	-
-	6.5.4.2.4	X	-	C5	WINNF.FT.C.MES.4	Heartbeat Response contains measReportConfig	N/A	-
-	6.5.4.2.5	-	X	C5	WINNF.FT.D.MES.5	Domain Proxy Heartbeat Response contains measReportConfig	N/A	-
3.19	6.6.4.1.1	X	-	M	WINNF.FT.C.RLQ.1	Successful Relinquishment	PASS	-
-	6.6.4.1.2	-	X	M	WINNF.FT.D.RLQ.2	Domain Proxy Successful Relinquishment	N/A	-



3.20	6.6.4.2.1	X	-	O	WINNF.FT.C.RLQ.3	Unsuccessful Relinquishment, responseCode=102	PASS	-
-	6.6.4.2.2	-	X	O	WINNF.FT.D.RLQ.4	Domain Proxy Unsuccessful Relinquishment, responseCode=102	N/A	-
3.21	6.6.4.3.1	X	-	O	WINNF.FT.C.RLQ.5	Unsuccessful Relinquishment, responseCode=103	PASS	-
-	6.6.4.3.2	-	X	O	WINNF.FT.D.RLQ.6	Domain Proxy Unsuccessful Relinquishment, responseCode=103	N/A	-
3.22	6.7.4.1.1	X	-	M	WINNF.FT.C.DRG.1	Successful Deregistration	PASS	-
-	6.7.4.1.2	-	X	M	WINNF.FT.D.DRG.2	Domain Proxy Successful Deregistration	N/A	-
3.23	6.7.4.2.1	X	-	O	WINNF.FT.C.DRG.3	Deregistration responseCode=102	PASS	-
-	6.7.4.2.2	-	X	O	WINNF.FT.D.DRG.4	Domain Proxy Deregistration responseCode=102	N/A	-
3.24	6.7.4.3.1	X	X	O	WINNF.FT.C.DRG.5	Deregistration responseCode=103	PASS	-
3.25	6.8.4.1.1	X	X	M	WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS	-
3.26	6.8.4.2.1	X	X	M	WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS	-
3.27	6.8.4.2.2	X	X	M	WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS	-
3.28	6.8.4.2.3	X	X	M	WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issue by unknown CA	PASS	-
3.29	6.8.4.2.4	X	X	M	WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS	-
3.30	7.1.4.1.1	X	X	M	WINNF.PT.C.HBT.1	UUT RF Transmit Power Measurement	PASS	-

**Note1:**

- ◆ M: Mandatory for certification
- ◆ O: Optional. Not required for certification.
- ◆ C: Conditional. Mandatory if CBSD supports relevant functionality.

**Note2:** The unit under test type is CBSD without Domain Proxy and Conditional Test Case Definitions are C3.



**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration was written in this test report are declared by the manufacturer.

**Reviewed by: Sam Chen**

**Report Producer: Sandy Chuang**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature of Equipment Under Test	
EUT Type	CBSD
Power Type	From power adapter or PoE
Category of EUT	<input checked="" type="checkbox"/> Category A <input type="checkbox"/> Category B
Professional Installation	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
EUT in Test ID	<input type="checkbox"/> EUT with Domain Proxy <input checked="" type="checkbox"/> EUT without Domain Proxy
CBSD Firmware Version	1.0
CBSD Software Version	N/A
CBSD Hardware Version	1.0
Domain Proxy Firmware Version	N/A
Domain Proxy Software Version	N/A
Domain Proxy Hardware Version	N/A

Note: The above information was declared by manufacturer.





### 1.2 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
PoE	PHIHONG	POE90U-1BT-5	INPUT: 100-240V~ 2.5A, 50-60Hz OUTPUT: 56V, 0.80A, 45W
Others			
Cradle*1			

### 1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook (SAS)	Lenovo	L440	N/A
B	Notebook	MSI	MS16JB	N/A
C	UE	Upurple	Naomi Color White	N/A
D	Notebook	MSI	MS16JB	N/A

### 1.4 Testing Location

Testing Location Information
Test Lab. : Sporton International Inc. Hsinchu Laboratory Hsinchu      ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) (TAF: 3787)    TEL: 886-3-656-9065                      FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Jeff Wu	22.1~23.9 / 58~63	Mar. 22, 2023~ Apr. 20, 2023



## 2 Measurement Environment


Measurement Environment Information	
Test Harness version	1.0.0.3
Operating System	Microsoft Windows 10
TLS version	1.2
Python	2.7.13

### 2.1 Conditional Test Case

<input type="checkbox"/>	C1	Mandatory for UUT which supports multi-step registration message
<input type="checkbox"/>	C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.
<input checked="" type="checkbox"/>	C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.
<input type="checkbox"/>	C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.
<input type="checkbox"/>	C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.
<input type="checkbox"/>	C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.

Note: The above information was declared by manufacturer.

## 2.2 Test Configuration

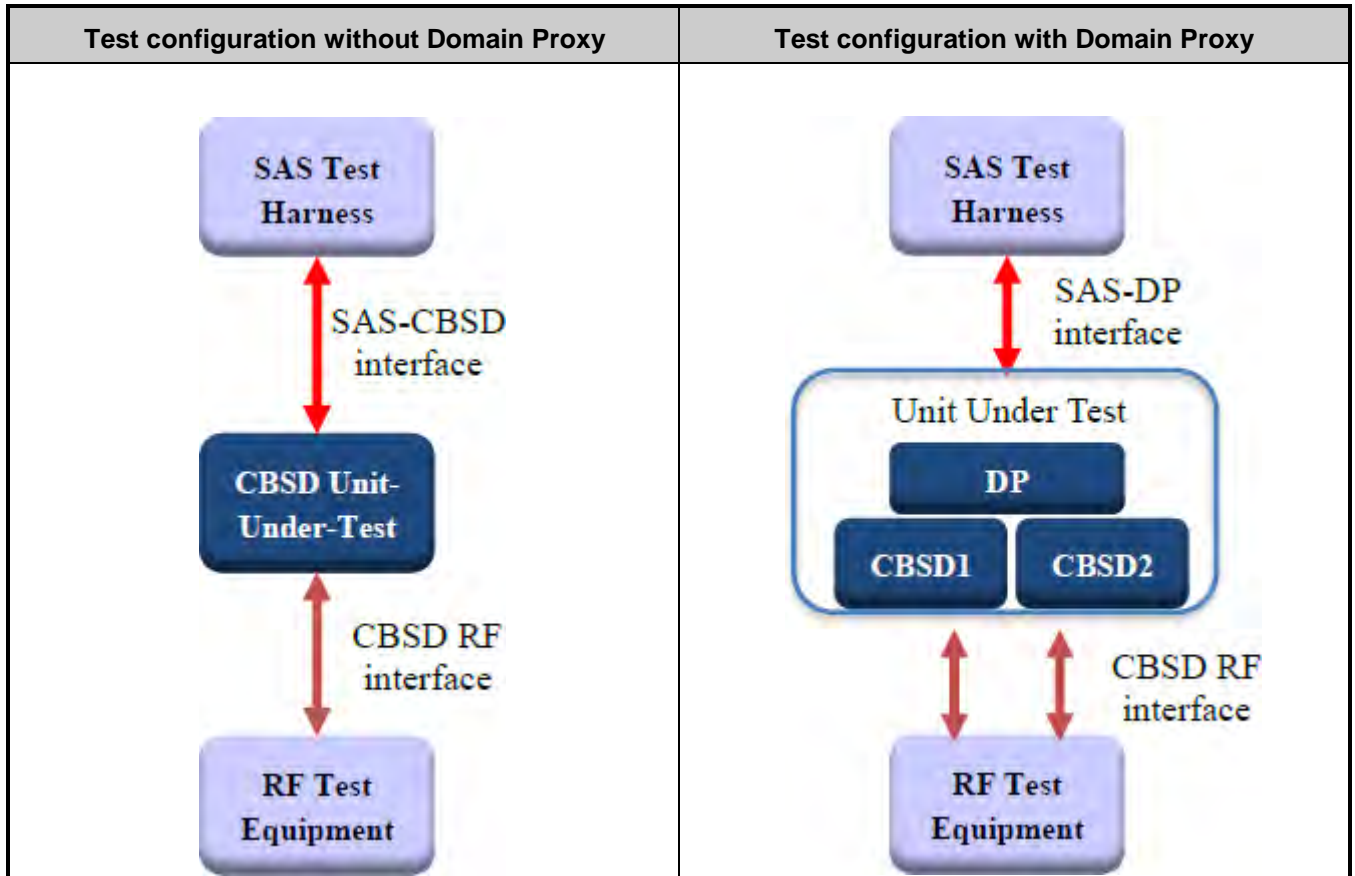



### 3 Protocol Test Results

#### 3.1 WINNF.FT.C.REG.5 - Single-Step registration for CBSD with CPI signed data

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li><li>• All of the required and REG-Conditional parameters shall be configured and CPI signature provided</li></ul>	--	--
2	CBSD sends Registration request to the SAS Test Harness: <ul style="list-style-type: none"><li>• TherequireduserId, fcclId and cbsdSerialNumber and REG- Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges.</li><li>• Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li></ul>	PASS	--
3	<ul style="list-style-type: none"><li>• SAS Test Harness sends a CBSD Registration Response as follows:<ul style="list-style-type: none"><li>– <i>cbsdId</i> = C</li><li>– <i>measReportConfig</i> shall not be included.</li><li>– <i>responseCode</i> = 0</li></ul></li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.2 WINNF.FT.C.REG.8 - Missing Required parameters (responseCode 102)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.3 WINNF.FT.C.REG.10 - Pending registration (responseCode 200)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>- SAS response does not include <i>cbsdId</i></li><li>- <i>responseCode</i> = R</li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =200) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.4 WINNF.FT.C.REG.12 - Invalid parameter (responseCode 103)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>- SAS response does not include <i>cbsdId</i></li><li>- <i>responseCode</i> = R</li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =103) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.5 WINNF.FT.C.REG.14 - Blacklisted CBSD (responseCode 101)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>- SAS response does not include <i>cbsdlid</i></li><li>- <i>responseCode</i> = R</li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =101) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--





### 3.6 WINNF.FT.C.REG.16 - Unsupported SAS protocol version (responseCode 100)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =100) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.7 WINNF.FT.C.REG.18 - Group Error (responseCode 201)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>- SAS response does not include <i>cbsdId</i></li><li>- <i>responseCode</i> = R</li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode</i> =201) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.8 WINNF.FT.C.GRA.1 - Unsuccessful Grant responseCode=400 (INTERFERENCE)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId = C</i></li></ul>	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"><li>• <i>cbsdId=C</i></li><li>• <i>responseCode = R</i></li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response( <i>responseCode=0</i> ) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.9 WINNF.FT.C.GRA.2 - Unsuccessful Grant responseCode=401 (GRANT\_CONFLICT)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbstdId = C</i></li></ul>	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"><li>• <i>cbstdId=C</i></li><li>• <i>responseCode =R</i></li></ul>	--	--
4	After completion of step 3, SAS Test Harness does not provide any positive response ( <i>responseCode=401</i> ) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--



### 3.10 WINNF.FT.C.HBT.1 - Heartbeat Success Case (first Heartbeat Response)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>UUT has registered successfully with SAS Test Harness, with <i>cbsdId = C</i></li></ul>	--	--
2	UUT sends a message: <ul style="list-style-type: none"><li>If message is type Spectrum Inquiry Request, go to step 3, or</li><li>If message is type Grant Request, go to step 5</li></ul>	--	--
3	UUT sends Spectrum Inquiry Request. Validate: <ul style="list-style-type: none"><li><i>cbsdId = C</i></li><li>List of frequencyRange objects sent by UUT are within the CBRS frequency range</li></ul>	PASS	--
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: <ul style="list-style-type: none"><li><i>cbsdId = C</i></li><li><i>availableChannel</i> is an array of availableChannel objects</li><li><i>responseCode = 0</i></li></ul>	--	--
5	UUT sends Grant Request message. Validate: <ul style="list-style-type: none"><li><i>cbsdId = C</i></li><li><i>maxEIRP</i> is at or below the limit appropriate for CBSD category as defined by Part 96</li><li><i>operationFrequencyRange, F</i>, sent by UUT is a valid range within the CBRS band</li></ul>	PASS	--
6	SAS Test Harness sends a Grant Response message, including the parameters: <ul style="list-style-type: none"><li><i>cbsdId = C</i></li><li><i>grantId = G</i> = a valid grant ID</li><li><i>grantExpireTime = UTC time greater than duration of the test</i></li><li><i>responseCode = 0</i></li></ul>	--	--
7	UUT sends a first Heartbeat Request message. VerifyHeartbeatRequest message is formatted correctly, including: <ul style="list-style-type: none"><li><i>cbsdId = C</i></li><li><i>grantId = G</i></li><li><i>operationState = "GRANTED"</i></li></ul>	PASS	--
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"><li><i>cbsdId = C</i></li><li><i>grantId = G</i></li><li><i>transmitExpireTime = current UTC time + 200 seconds</i></li><li><i>responseCode = 0</i></li></ul>	--	--



9	<p>For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul> <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	PASS	--
10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify:</p> <ul style="list-style-type: none"><li>• UUT does not transmit at any time prior to completion of the first heartbeat response</li><li>• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F.</li></ul>	PASS	--



### 3.11 WINNF.FT.C.HBT.3 - Heartbeat responseCode=105 (DEREGISTER)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>○ valid <i>cbsdId</i> =C</li><li>○ valid <i>grantId</i> =G</li><li>○ grant is for frequency range F, power P</li><li>○ <i>grantExpireTime</i>=UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsdId</i> =C</li><li>• <i>grantId</i> =G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS	--
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> =C</li><li>• <i>grantId</i> =G</li><li>• <i>transmitExpireTime</i> = T = Current UTC time</li><li>• <i>responseCode</i> = 105 (DEREGISTER)</li></ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"><li>• UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li></ul>	PASS	--



### 3.12 WINNF.FT.C.HBT.4 - Heartbeat responseCode=500 (TERMINATED\_GRANT)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:               <ul style="list-style-type: none"> <li>○ valid <i>cbsdId</i> =C</li> <li>○ valid <i>grantId</i> =G</li> <li>○ grant is for frequency range F, power P</li> <li>○ <i>grantExpireTime</i>=UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>operationState</i> ="AUTHORIZED"</li> </ul>	PASS	--
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>transmitExpireTime</i> =T =current UTC time</li> <li>• <i>responseCode</i> =500 (TERMINATED_GRANT)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> <li>• UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li> </ul>	PASS	--





### 3.13 WINNF.FT.C.HBT.5 - Heartbeat responseCode=501 (SUSPENDED\_GRANT) in First Heartbeat Response

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:               <ul style="list-style-type: none"> <li>○ valid <i>cbsdId</i> = C</li> <li>○ valid <i>grantId</i> = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ <i>grantExpireTime</i> = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li> </ul>	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> = C</li> <li>• <i>grantId</i> = G</li> <li>• <i>operationState</i> = "GRANTED"</li> </ul>	PASS	--
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> = C</li> <li>• <i>grantId</i> = G</li> <li>• <i>transmitExpireTime</i> = T = current UTC time</li> <li>• <i>responseCode</i> = 501 (SUSPENDED_GRANT)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• <i>cbsdId</i> = C</li> <li>• <i>grantId</i> = G</li> <li>• <i>operationState</i> = "GRANTED"</li> </ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• <i>cbdsId</i> = C</li> <li>• <i>grantId</i> = G</li> </ul> Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> <li>• UUT does not transmit at any time</li> </ul>	PASS	--



### 3.14 WINNF.FT.C.HBT.6 - Heartbeat responseCode=501 (SUSPENDED\_GRANT) in Subsequent Heartbeat Response

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:               <ul style="list-style-type: none"> <li>○ valid <i>cbsdId</i> =C</li> <li>○ valid <i>grantId</i> =G</li> <li>○ grant is for frequency range F, power P</li> <li>○ <i>grantExpireTime</i>=UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>operationState</i> ="AUTHORIZED"</li> </ul>	PASS	--
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>transmitExpireTime</i> =T =current UTC time</li> <li>• <i>responseCode</i> = 501 (SUSPENDED_GRANT)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>operationState</i> ="GRANTED"</li> </ul> <p>B. UUT sends a Relinquishment Request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• <i>cbdsId</i> =C</li> <li>• <i>grantId</i> =G</li> </ul> Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> <li>• UUT shall stop transmission within (T+60 seconds) of completion of step 3</li> </ul>	PASS	--



### 3.15 WINNF.FT.C.HBT.7 - Heartbeat responseCode=502 (UNSYNC\_OP\_PARAM)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:               <ul style="list-style-type: none"> <li>○ valid <i>cbsdId</i> =C</li> <li>○ valid <i>grantId</i> =G</li> <li>○ grant is for frequency range F, power P</li> <li>○ <i>grantExpireTime</i>=UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>operationState</i> = "AUTHORIZED"</li> </ul>	PASS	--
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>transmitExpireTime</i> = T = Current UTC Time</li> <li>• <i>responseCode</i> = 502 (UNSYNC_OP_PARAM)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify: <ul style="list-style-type: none"> <li>• UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters:               <ul style="list-style-type: none"> <li>○ <i>cbsdId</i> =C</li> <li>○ <i>grantId</i> =G</li> </ul> </li> </ul> Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> <li>• UUT shall stop transmission within (T+60) seconds of completion of step 3.</li> </ul>	PASS	--

### 3.16 WINNF.FT.C.HBT.9 - Heartbeat Response Absent (First Heartbeat)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:               <ul style="list-style-type: none"> <li>○ valid <i>cbsdId</i> = C</li> <li>○ valid <i>grantId</i> = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ <i>grantExpireTime</i> = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li> </ul>	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> = C</li> <li>• <i>grantId</i> = G</li> <li>• <i>operationState</i> = "GRANTED"</li> </ul>	PASS	--
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: <ul style="list-style-type: none"> <li>• At any time during the test, UUT shall not transmit on RF interface</li> </ul>	PASS	--



### 3.17 WINNF.FT.C.HBT.10 - Heartbeat Response Absent (Subsequent Heartbeat)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>○ valid <i>cbsdId</i> = C</li><li>○ valid <i>grantId</i> = G</li><li>○ grant is for frequency range F, power P</li><li>○ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS	--
3	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"><li>• UUT shall stop all transmission on RF interface within (<i>transmitExpireTime</i> + 60 seconds), using the <i>transmitExpireTime</i> sent in Step 3.</li></ul>	PASS	--



### 3.18 WINNF.FT.C.HBT.11 - Successful Grant Renewal in Heartbeat Test Case

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:               <ul style="list-style-type: none"> <li>○ valid <i>cbsdId</i> =C</li> <li>○ valid <i>grantId</i> =G</li> <li>○ grant is for frequency range F, power P</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface.</li> <li>• Grant has the following parameters at the start of the test:               <ul style="list-style-type: none"> <li>○ <i>grantExpireTime</i> = UTC time equal to time at start of test + 300 seconds = Tgrant_expire</li> <li>○ <i>transmitExpireTime</i> = UTC time equal to time at start of test + 200 seconds</li> <li>○ <i>heartbeatInterval</i> = 60 seconds</li> </ul> </li> </ul>	--	--
2	UUT sends a Heartbeat Request message. If Heartbeat Request message contains grantRenew = TRUE, go to Step 6, else go to Step 3.	--	--
3	Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>operationState</i> = "AUTHORIZED"</li> </ul>	PASS	--
4	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>transmitExpireTime</i> = current UTC + 200 seconds</li> <li>• <i>grantExpireTime</i> = same as Step 1</li> <li>• <i>responseCode</i> =0</li> </ul>	--	--
5	Go to Step 2	--	--
6	Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"> <li>• <i>cbsdId</i> =C</li> <li>• <i>grantId</i> =G</li> <li>• <i>operationState</i> = "AUTHORIZED"</li> <li>• <i>grantRenew</i> = TRUE</li> </ul>	PASS	--



7	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>grantExpireTime</i> = UTC time set far in the future</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--	--
8	Continue to respond to any subsequent Heartbeat Request from CBSD with Heartbeat Response with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = same as Step 7</li><li>• <i>responseCode</i> = 0</li></ul>	--	--
9	Monitor RF transmission of UUT from start of test until Tgrant_expire + 60 seconds and ensure UUT continues to transmit throughout the time period.	PASS	--



### 3.19 WINNF.FT.C.RLQ.1 - Successful Relinquishment

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i></li><li>• UUT has received a valid grant with <i>grantId= G</i></li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> Invoke <i>trigger</i> to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"><li>• <i>cbsdId = C</i></li><li>• <i>grantId = G</i></li></ul>	PASS	--
3	SAS Test Harness shall approve the request with a Relinquishment Response message with parameters: <ul style="list-style-type: none"><li>– <i>cbsdId = C</i></li><li>– <i>grantId = G</i></li><li>– <i>responseCode = 0</i></li></ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response ( <i>responseCode=0</i> ) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS	--





### 3.20 WINNF.FT.C.RLQ.3 - Unsuccessful Relinquishment, responseCode=102

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdlId=C</i></li><li>• UUT has received a valid grant with <i>grantId= G</i></li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> Invoke <i>triggertoRelinquish</i> UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"><li>• <i>cbsdlId=C</i></li><li>• <i>grantId=G</i></li></ul>	--	--
3	SAS Test Harness shall send a Relinquishment Response message with parameters: <ul style="list-style-type: none"><li>• <i>cbsdlId=C</i></li><li>• No <i>grantId</i></li><li>• <i>responseCode=R</i></li></ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode=0</i> ) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS	--



### 3.21 WINNF.FT.C.RLQ.5 - Unsuccessful Relinquishment, responseCode=103

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i></li><li>• UUT has received a valid grant with <i>grantId= G</i></li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> Invoke <i>triggertoRelinquish</i> UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"><li>• <i>cbsdId=C</i></li><li>• <i>grantId=G</i></li></ul>	--	--
3	SAS Test Harness shall send a Relinquishment Response message with parameters: <ul style="list-style-type: none"><li>• <i>cbsdId=C</i></li><li>• No <i>grantId</i></li><li>• <i>responseCode=R</i></li></ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode=103</i> ) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS	--



### 3.22 WINNF.FT.C.DRG.1 - Successful Deregistration

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i></li><li>• UUT has received a valid grant with <i>grantId= G</i></li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode=0</i>	--	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId=C</i> .	PASS	--
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: <ul style="list-style-type: none"><li>• <i>cbsdId = C</i></li><li>• <i>responseCode = 0</i></li></ul>	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response ( <i>responseCode=0</i> ) to further request messages from the UUT.	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message</li></ul>	PASS	--



### 3.23 WINNF.FT.C.DRG.3 - Deregistration responseCode=102

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i></li><li>• UUT has received a valid grant with <i>grantId= G</i></li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode=0</i>	--	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId=C</i>	--	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"><li>• No <i>cbsdId</i></li><li>• <i>responseCode = 102</i></li></ul>	--	--
5	After completion of step 3, SAS Test Harness will not provide any positive response( <i>responseCode=0</i> ) to further request messages from the UUT.	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message</li></ul>	PASS	--



### 3.24 WINNF.FT.C.DRG.5 - Deregistration responseCode=103

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i></li><li>• UUT has received a valid grant with <i>grantId= G</i></li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode=0</i>	--	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId=C</i>	--	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"><li>• No <i>cbsdId</i></li><li>• <i>responseCode = 103</i></li></ul>	--	--
5	After completion of step 3, SAS Test Harness will not provide any positive response( <i>responseCode=0</i> ) to further request messages from the UUT.	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT stopped RF transmission at anytime between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message</li></ul>	PASS	--



### 3.25 WINNF.FT.C.SCS.1 - Successful TLS connection between UUT and SAS Test Harness

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> <li>UUT shall start CBSD-SAS communication with the security procedure</li> <li>The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.</li> <li>Configure the SAS Test Harness to accept the security procedure and establish the connection</li> </ul>	PASS	--
2	<ul style="list-style-type: none"> <li>Make sure that Mutual authentication happens between UUT and the SAS Test Harness.</li> <li>Make sure that UUT uses TLS v1.2</li> <li>Make sure that cipher suites from one of the following is selected,               <ul style="list-style-type: none"> <li>TLS_RSA_WITH_AES_128_GCM_SHA256</li> <li>TLS_RSA_WITH_AES_256_GCM_SHA384</li> <li>TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256</li> <li>TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384</li> <li>TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256</li> </ul> </li> </ul>	PASS	--
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> <li>UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with <i>responseCode = 0</i> and <i>cbsdId</i>.</li> </ul>	PASS	--
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>UUT shall not transmit RF</li> </ul>	PASS	--



### 3.26 WINNF.FT.C.SCS.2 - TLS failure due to revoked certificate

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"><li>UUT shall start CBS-D-SAS communication with the security procedures</li></ul>	PASS	--
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS	--
3	UUT may retry for the security procedure which shall fail	PASS	--
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS	--



### 3.27 WINNF.FT.C.SCS.3 - TLS failure due to expired server certificate

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"><li>• UUT shall start CBS-D-SAS communication with the security procedures</li></ul>	PASS	--
2	<ul style="list-style-type: none"><li>• Make sure that UUT uses TLS v1.2 for security establishment.</li><li>• Make sure UUT selects the correct cipher suite.</li><li>• UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS	--
3	UUT may retry for the security procedure which shall fail.	PASS	--
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--





### 3.28 WINNF.FT.C.SCS.4 - TLS failure when SAS Test Harness certificate is issued by an unknown CA

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"><li>• UUT shall start CBSD-SAS communication with these security procedures</li></ul>	PASS	--
2	<ul style="list-style-type: none"><li>• Make sure that UUT uses TLS v1.2 for security establishment.</li><li>• Make sure UUT selects the correct cipher suite.</li><li>• UUT shall use CRL or OCSP to verify the validity of the server certificate</li><li>• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS	--
3	UUT may retry for the security procedure which shall fail.	PASS	--
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS	--




### 3.29 WINNF.FT.C.SCS.5 - TLS failure when certificate at the SAS Test Harness is corrupted

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS	--
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS	--
3	UUT may retry for the security procedure which shall fail.	PASS	--
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS	--

### 3.30 WINNF.PT.C.HBT.1 - UUT RF Transmit Power Measurement

Items	Parameters
Maximum rated power (EIRP, dBm/MHz)	7 dBm/MHz
Transmit dynamic range (EIRP, dBm/MHz)	7, 5, 2, -1, -3 dBm/MHz
Occupied bandwidth (OBW)	40MHz
maxEirp values	7 dBm/MHz

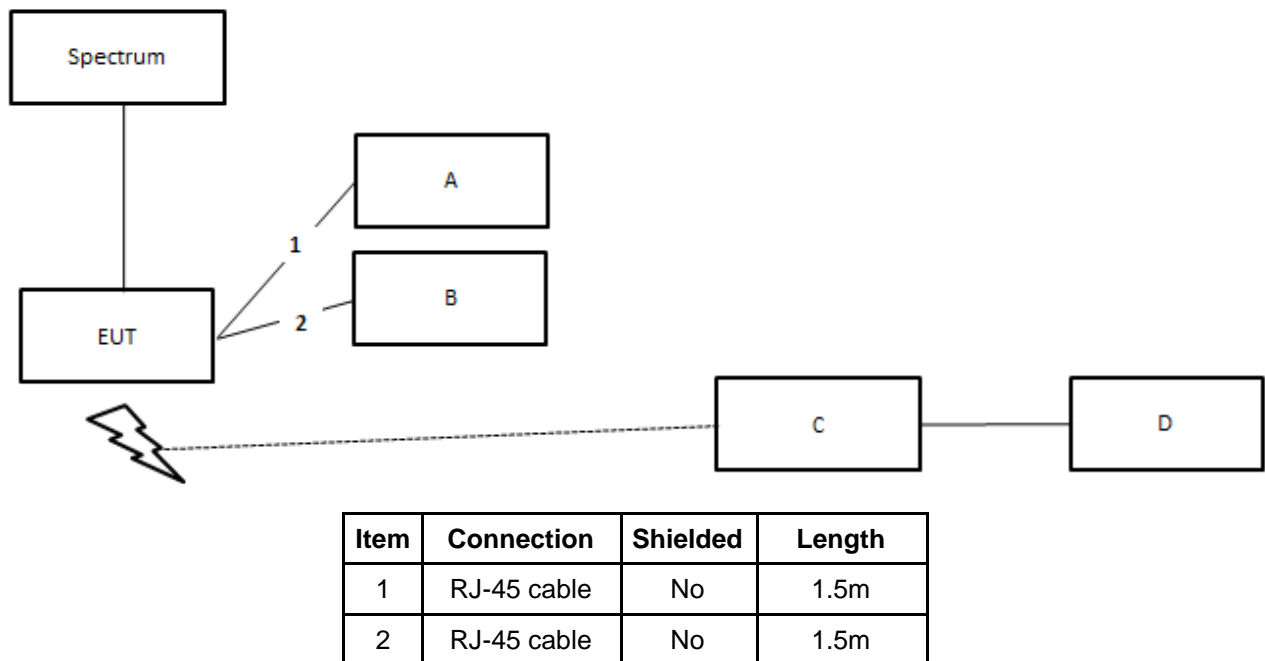

Note: To ensure EUT transmits with full power across the Bandwidth during the on duration of duty cycle, EUT is running maximum traffic during the test.



Spectrum Analyzer Setting	Parameters
Center Frequency	3630 MHz
Frequency Span	50 MHz
RBW / VBW	1 MHz / 3MHz
Channel Power Meas Bandwidth	10 MHz
Sweep Time	1 ms

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li> <li>• UUT has registered with the SAS, with CBSID ID=C</li> <li>• UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case</li> </ul> <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> <li>• UUT sends Heartbeat Request, including: <ul style="list-style-type: none"> <li>○ cbsId = C</li> <li>○ grantId = G</li> </ul> </li> <li>• SAS Test Harness responds with Heartbeat Response, including: <ul style="list-style-type: none"> <li>○ cbsId = C</li> <li>○ grantId = G</li> <li>○ transmitExpireTime = current UTC time + 200 seconds</li> <li>○ responseCode = 0</li> </ul> </li> </ul>	--	--



3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	PASS	--
---	---	------	----

Frequency (MHz)	Bandwidth (MHz)	Antenna Gain (dBi)	Conducted PSD				maxEirp (dBm/MHz)	Grant maxEirp (dBm/MHz)	Result
			Port 1	Port 2	Port 3	Port 4			
			(dBm/MHz)	(dBm/MHz)	(dBm/MHz)	(dBm/MHz)			
3630	40	3.98	-4.559	-3.28	-4.05	-3.207	6.26	7	PASS
3630	40	3.98	-9.26	-8.496	-9.052	-7.647	1.43	2	PASS
3630	40	3.98	-14.46	-14.39	-14.31	-13.59	-4.17	-3	PASS



#### 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Dec. 30, 2022	Dec. 29, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-11	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-12	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-13	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Power Divider	Woken	2 Way	TH03-DV-01	1GHz ~ 6GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH03-CB)
RF Power Divider	Woken	3 Way	TH03-DV-02	1GHz ~ 6GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.



## **5 Measurement Uncertainty**


<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
Conducted Emission	3.2 dB	Confidence levels of 95%

RF measurement plot for WINNF.FT.C.HBT Test Case ID







RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 2 (1TX)

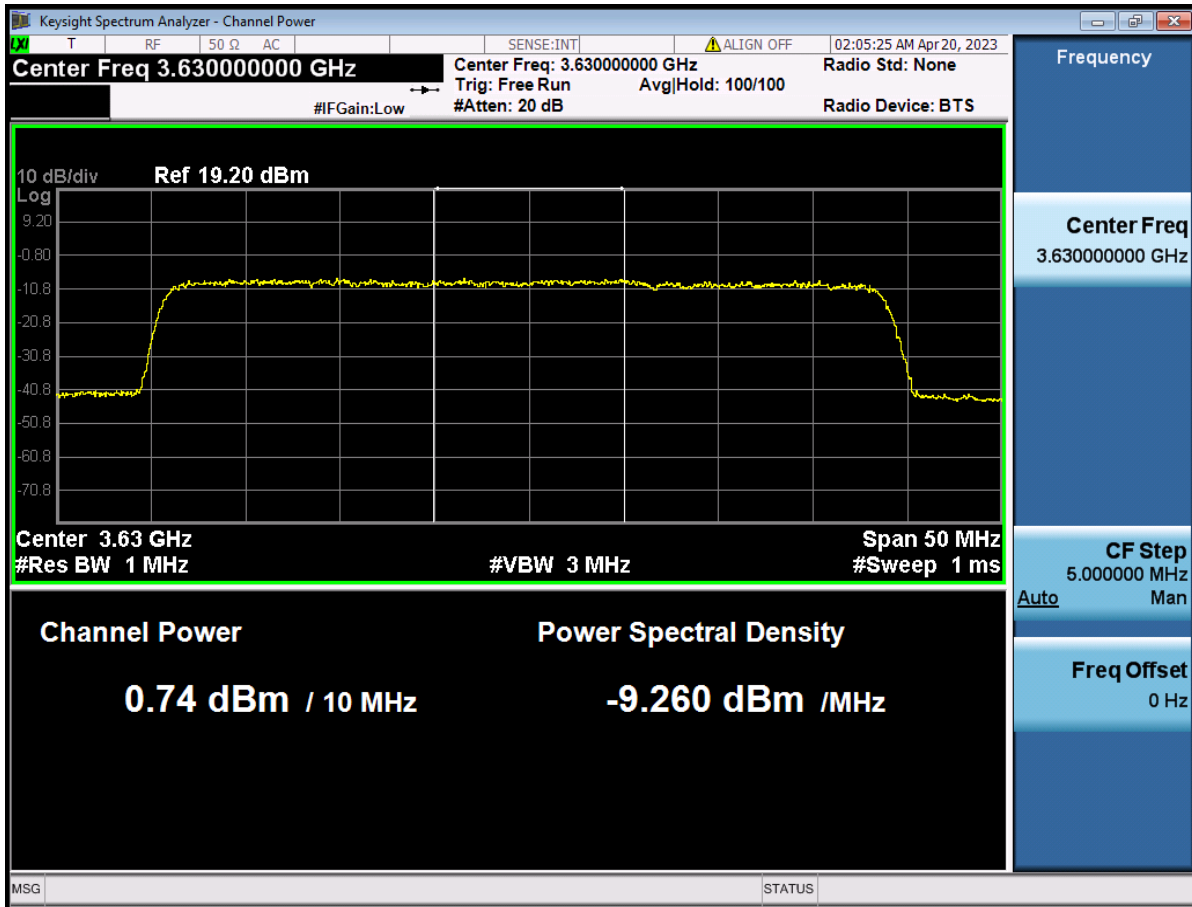


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 2 (2TX)

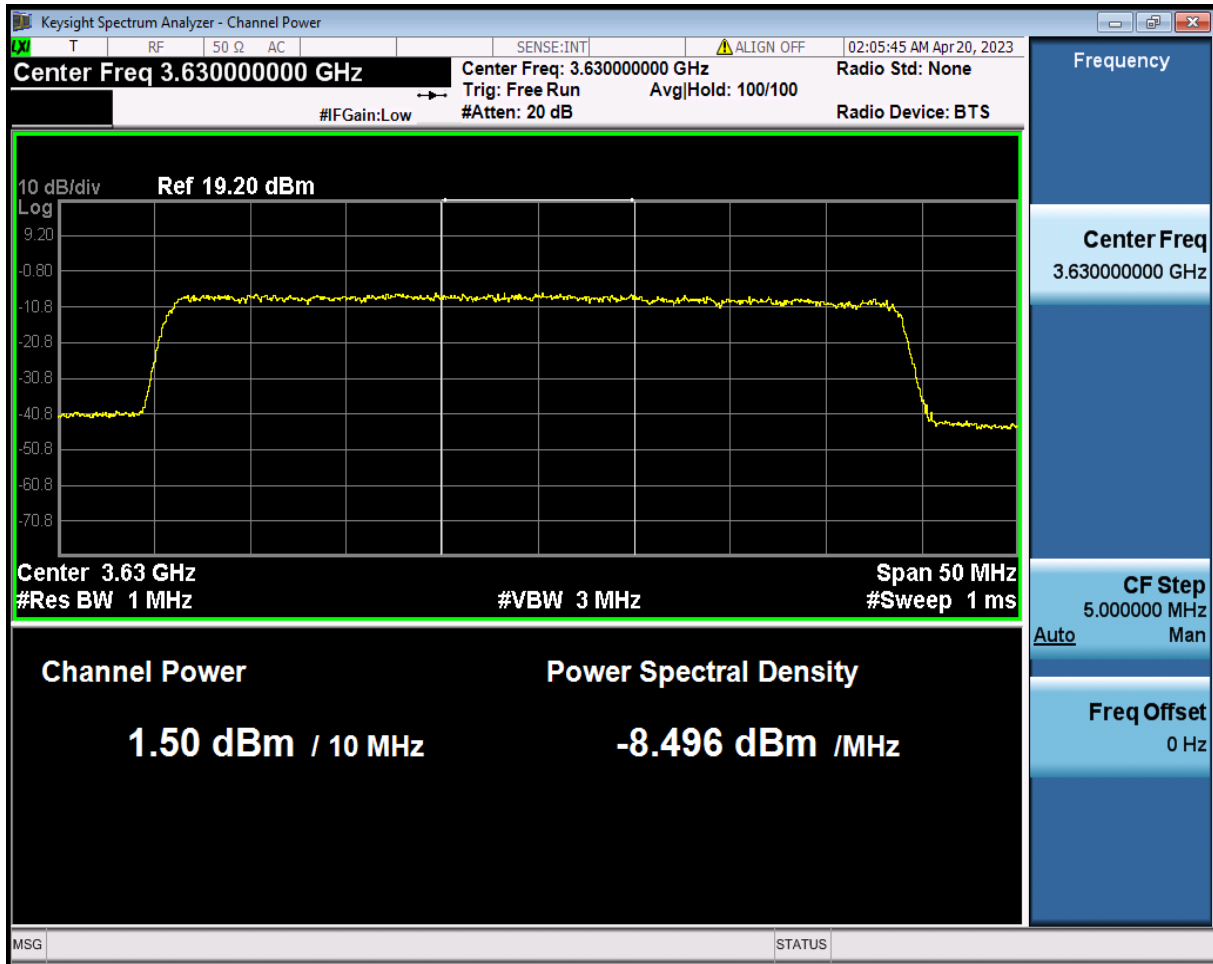


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 2 (3TX)

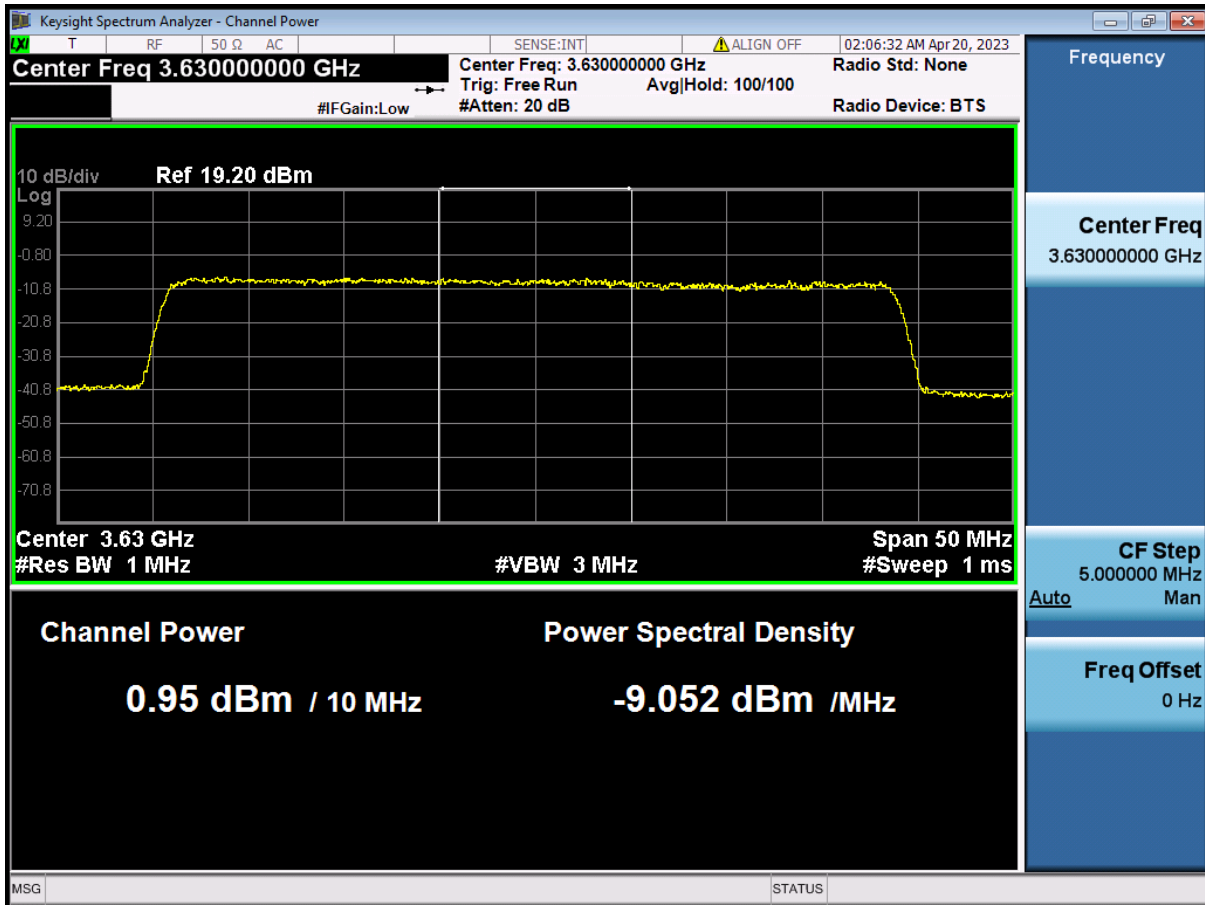


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 2 (4TX)

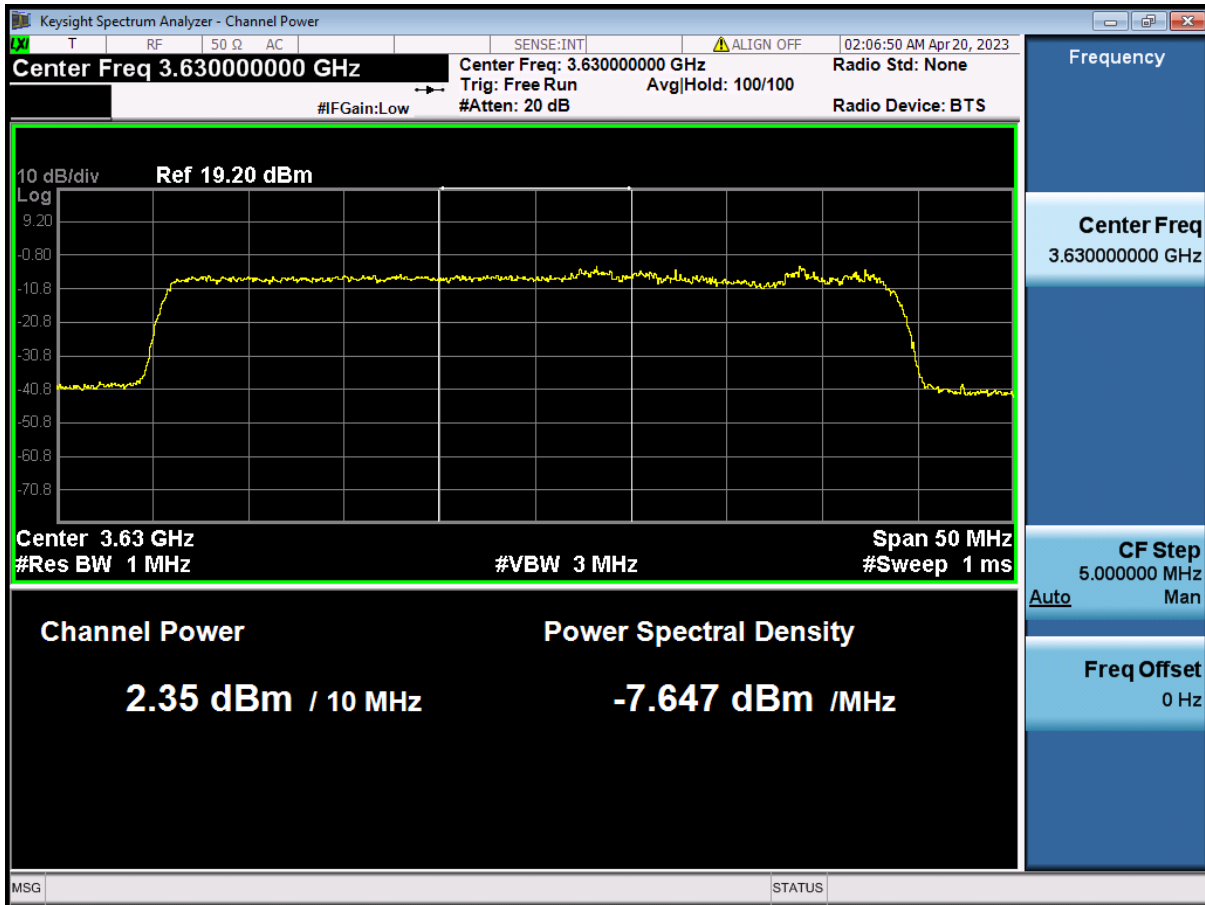


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 3 (1TX)

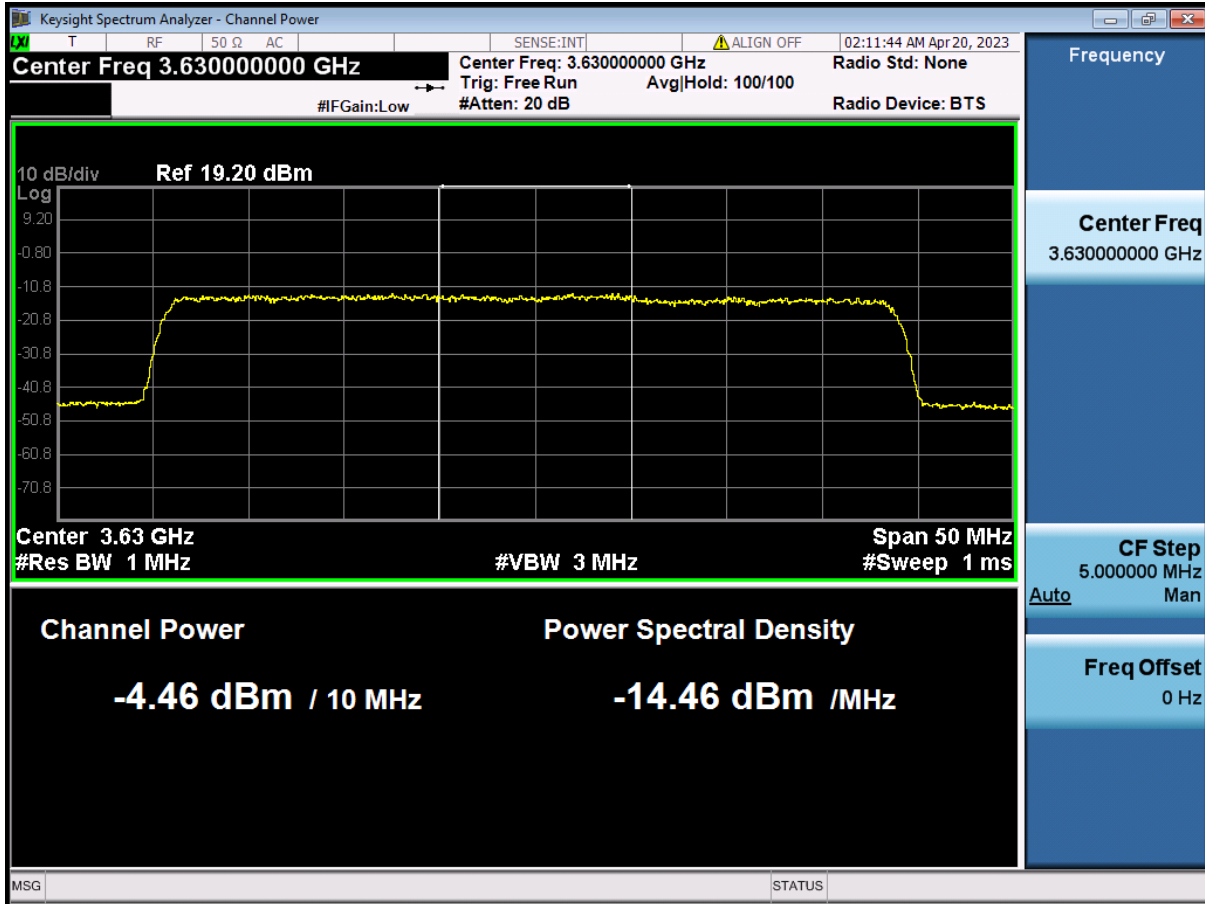


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 3 (2TX)

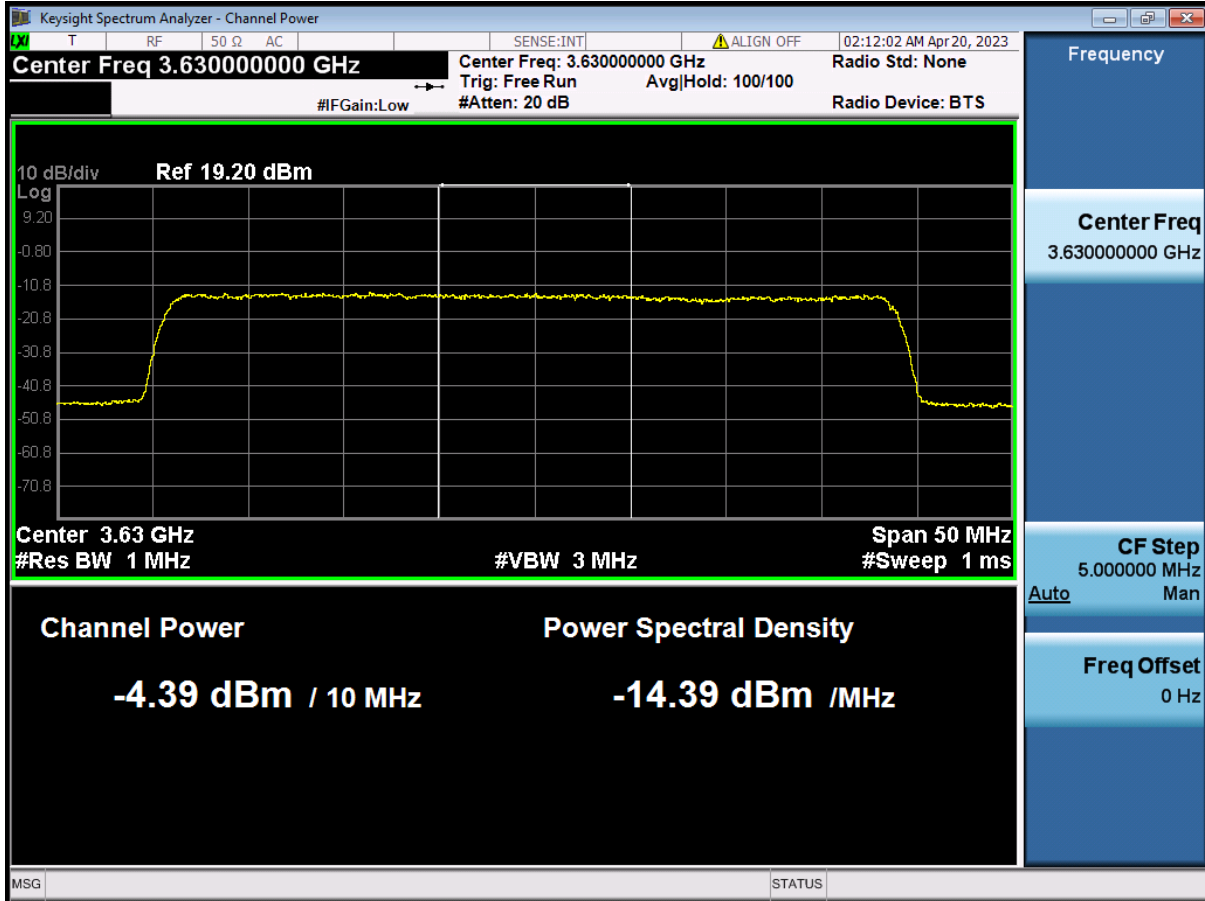

RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 3 (3TX)

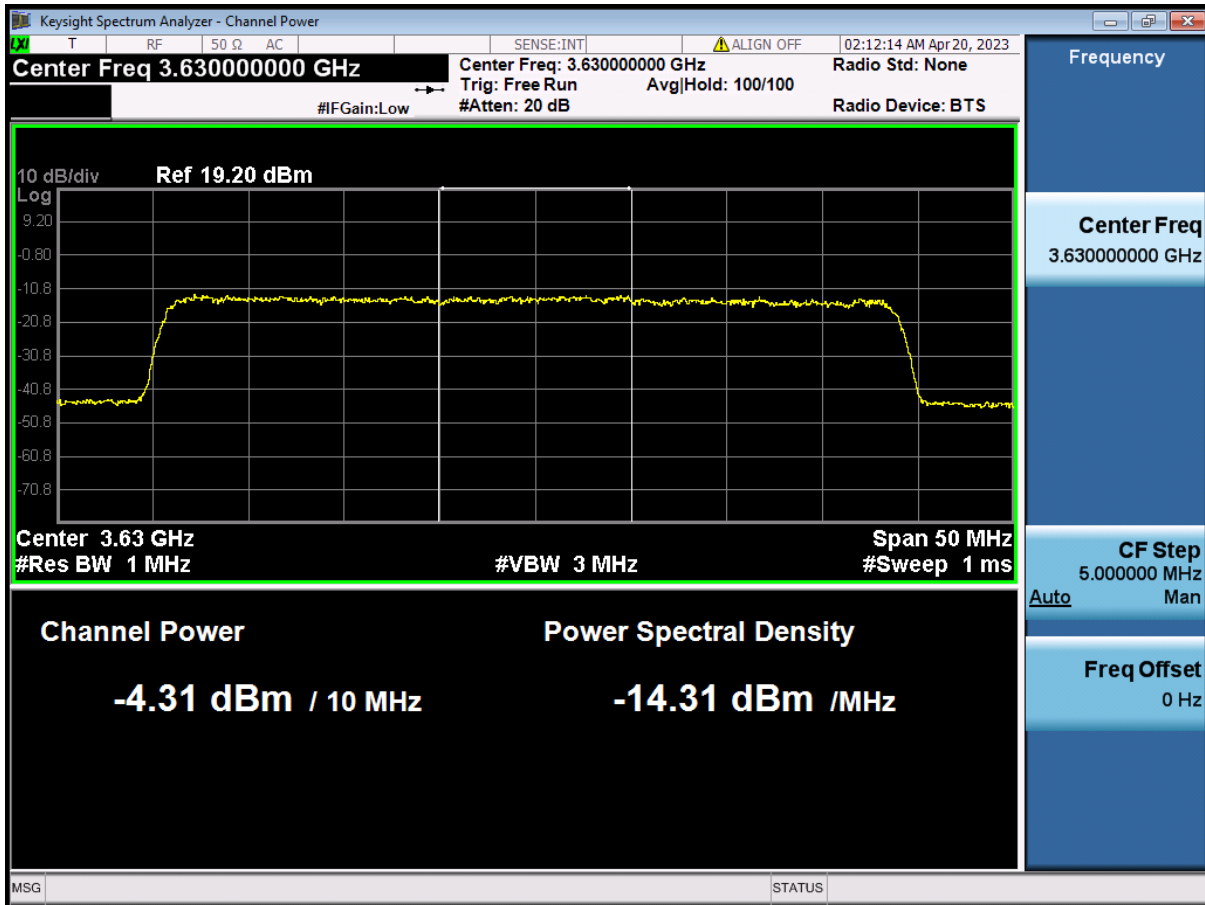


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 3 (4TX)

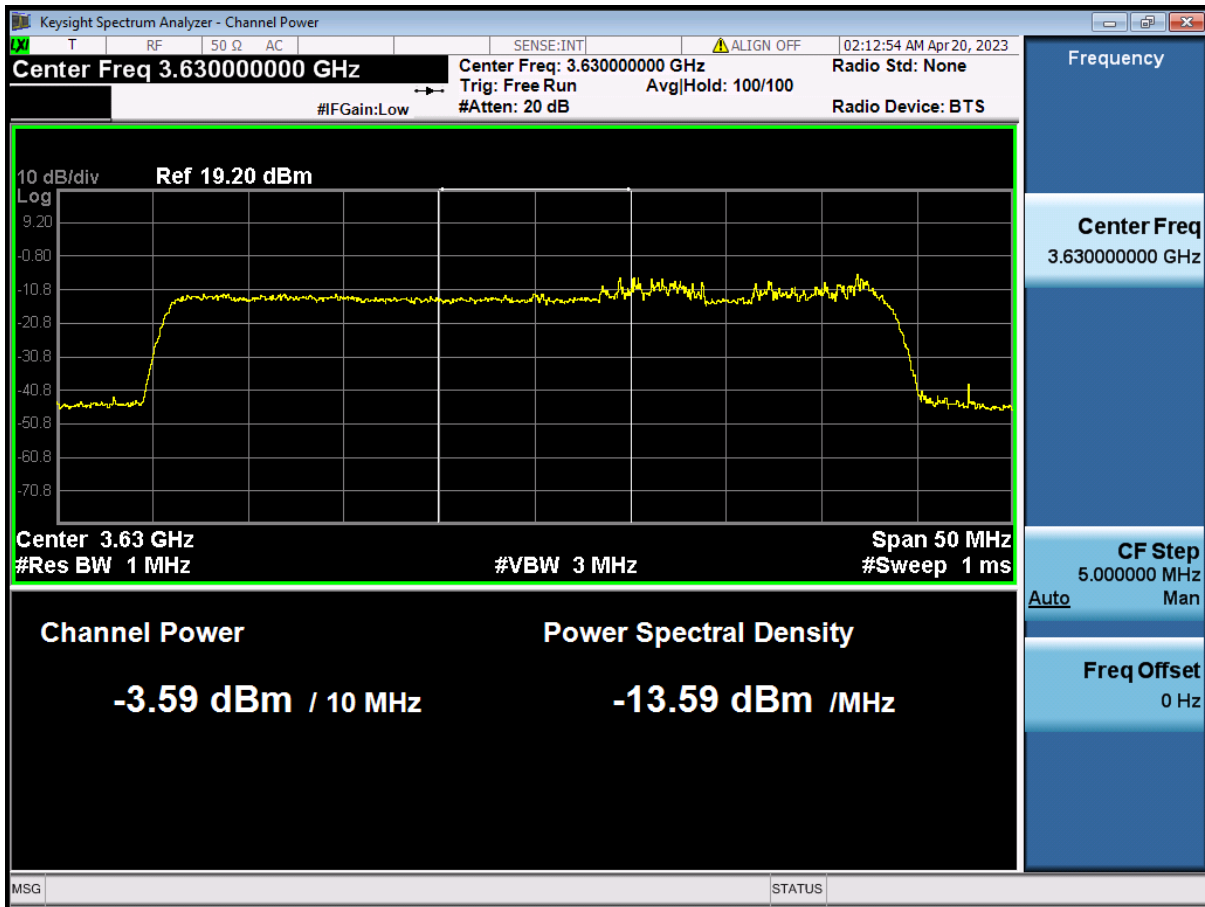





RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 7 (1TX)

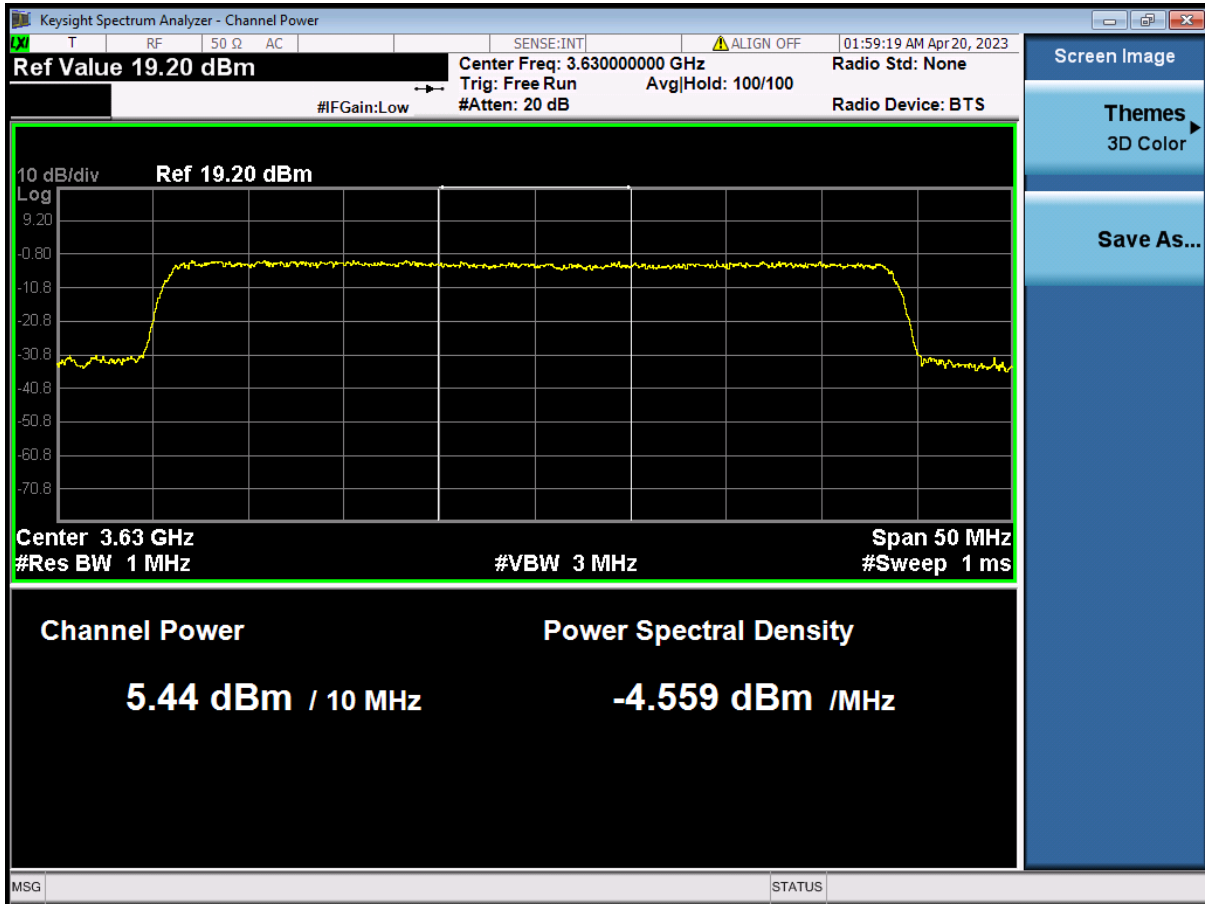


RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 7 (2TX)

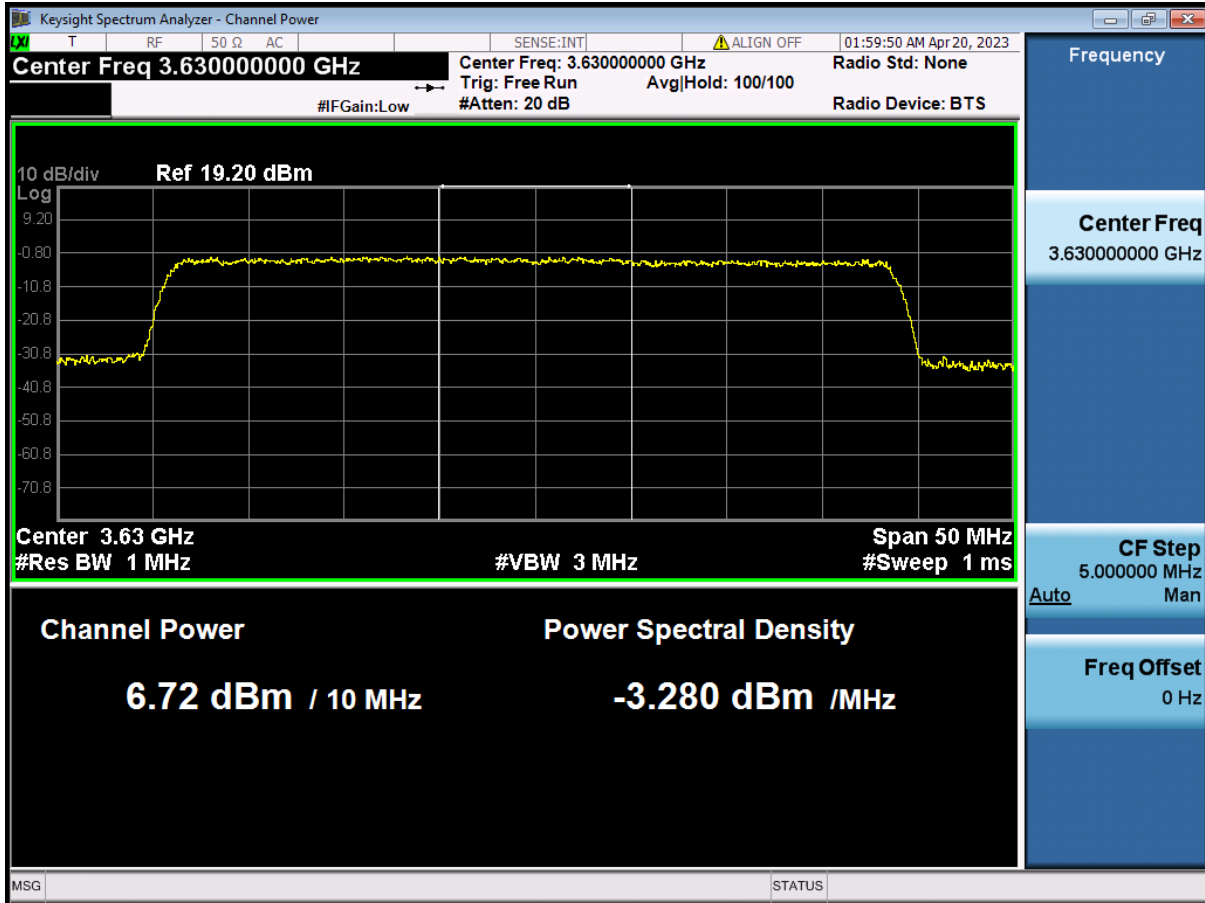

RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 7 (3TX)

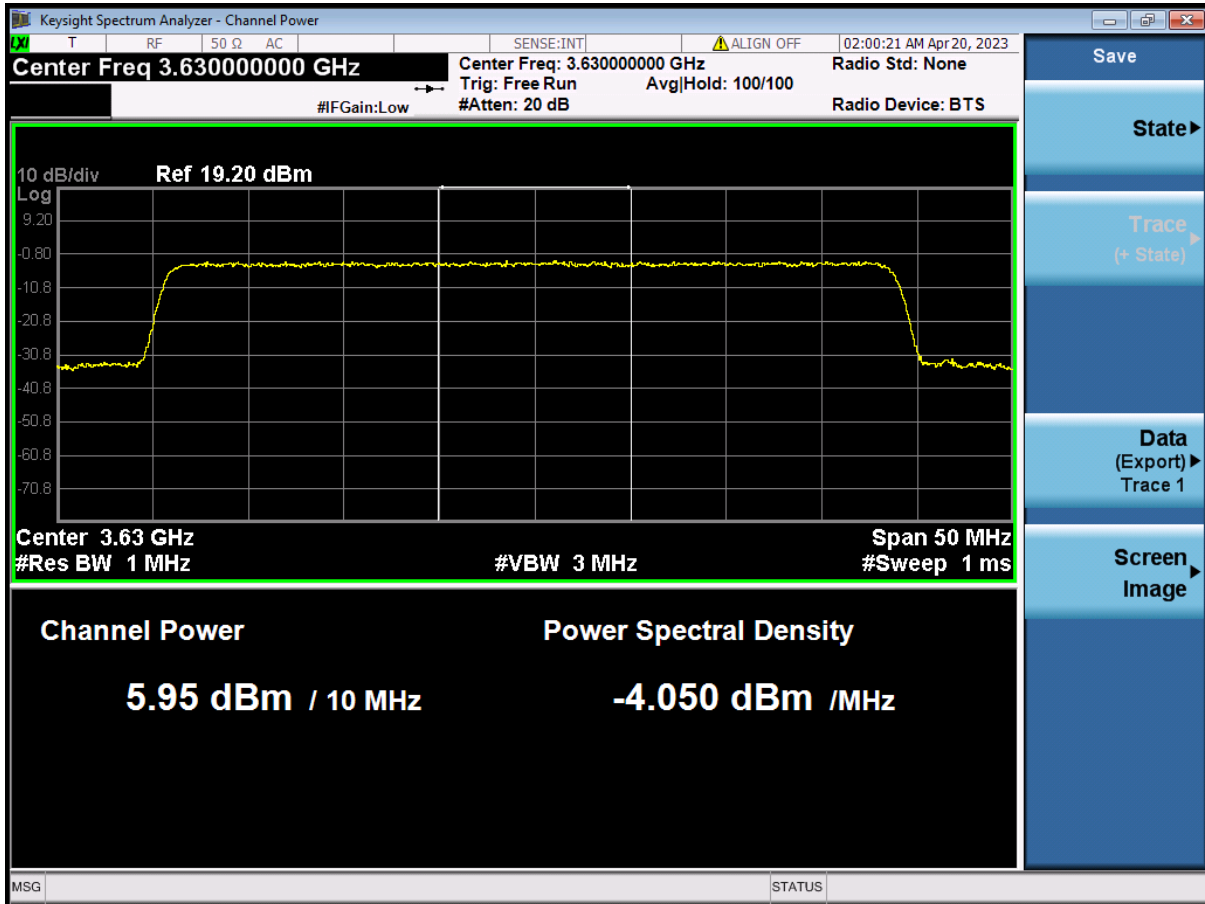

RF measurement plot for WINNF.PT.C.HBT.1 Test Case ID\_BW40M\_Grant maxEirp 7 (4TX)

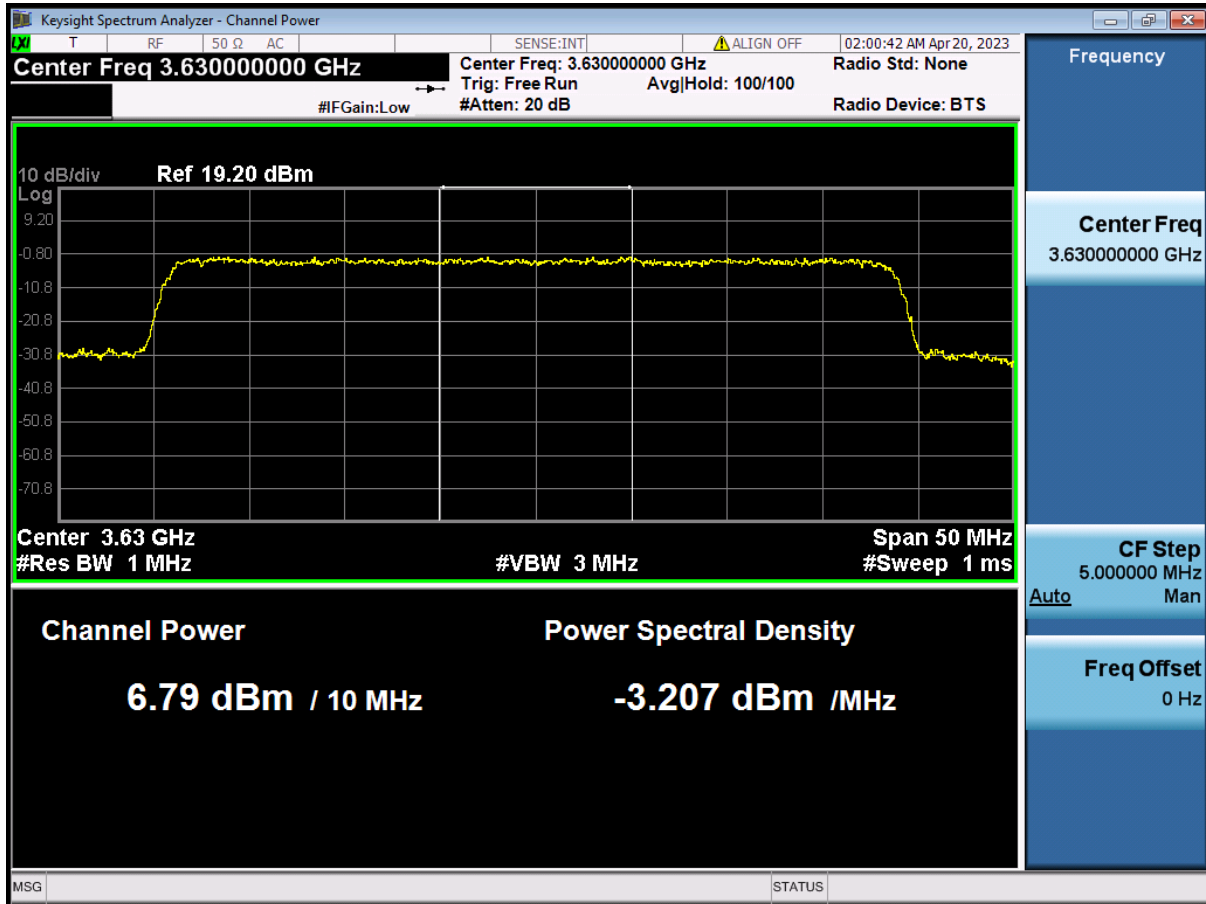

### Wireshark Plots for WINNF.FT.C.SCS.1 Test Case ID




The screenshot displays the Wireshark interface with the following details:

- Filter:** ip.addr == 192.168.138.101 && ssl
- Packet List:**

No.	Time	Source	Destination	Protocol	Length	Info
72	42.170970	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
73	42.198555	192.168.138.101	192.168.138.100	TLSv1.2	3503	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
79	42.204427	192.168.138.100	192.168.138.101	TLSv1.2	426	Certificate, Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted H
81	42.214511	192.168.138.101	192.168.138.100	TLSv1.2	105	Change Cipher Spec, Encrypted Handshake Message
83	42.214769	192.168.138.100	192.168.138.101	TLSv1.2	290	Application Data
84	42.216014	192.168.138.101	192.168.138.100	TLSv1.2	108	Application Data
85	42.216161	192.168.138.100	192.168.138.101	TLSv1.2	1453	Application Data
87	42.282983	192.168.138.101	192.168.138.100	TLSv1.2	100	Application Data
- Packet Details (Frame 73):**
  - Frame 73: 3503 bytes on wire (28024 bits), 3503 bytes captured (28024 bits) on interface \Device\NPF\_{FCFC32D3-E91B-4CC6-95FA-3A6CCB9B36C6}, id 0
  - Ethernet II, Src: WistronI\_23:43:77 (54:ee:75:23:43:77), Dst: SuperMic\_0f:25:a3 (3c:ec:ef:0f:25:a3)
  - Internet Protocol Version 4, Src: 192.168.138.101, Dst: 192.168.138.100
  - Transmission Control Protocol, Src Port: 9099, Dst Port: 58792, Seq: 1, Ack: 174, Len: 3449
  - Transport Layer Security
    - TLSv1.2 Record Layer: Handshake Protocol: Server Hello
      - Content Type: Handshake (22)
      - Version: TLS 1.2 (0x0303)
      - Length: 89
      - Handshake Protocol: Server Hello
        - Handshake Type: Server Hello (2)
        - Length: 85
        - Version: TLS 1.2 (0x0303)
        - Random: 23a85a6ecdb0f136f76d76f68503d36daec5d71670923e78a201a4c05e942fb4
        - Session ID Length: 32
        - Session ID: 50791db3838dca3442b2867de894bb1fc0dbd8b2f7c6e37bfd44c4d43543b9
        - Cipher Suite: TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256 (0xc02f)
        - Compression Method: null (0)

- Packet Bytes:** 0000 43 b9 c0 2f 00 00 0d ff 01 00 01 00 00 0b 04 C:./.....

### Wireshark Plots for WINNF.FT.C.SCS.2 Test Case ID

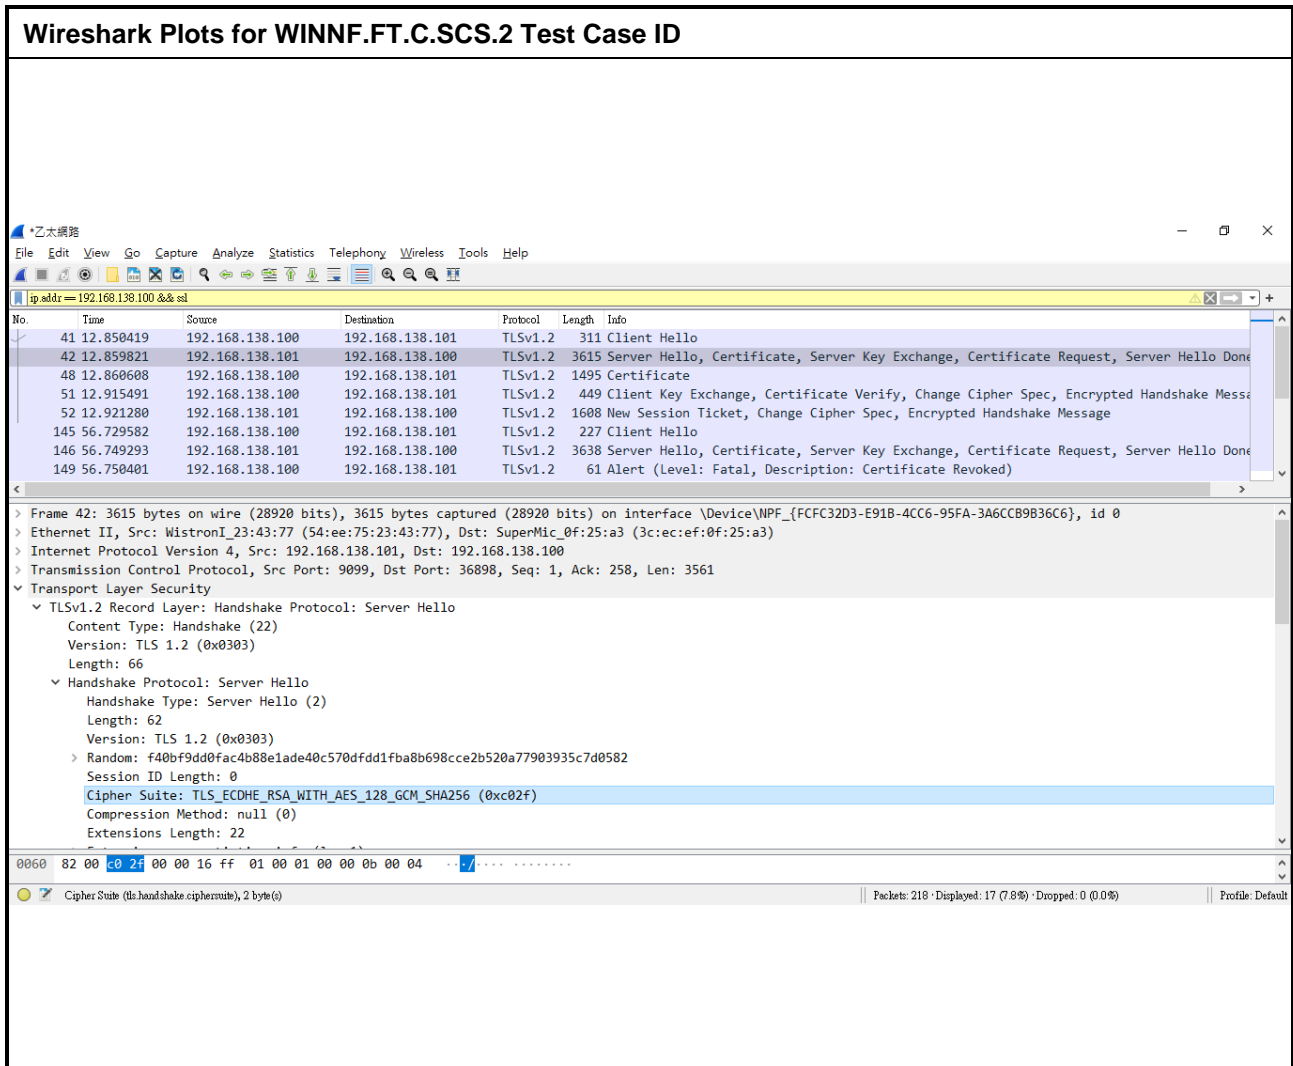


The screenshot displays a Wireshark capture of network traffic. The packet list pane shows the following entries:

No.	Time	Source	Destination	Protocol	Length	Info
41	12.850419	192.168.138.100	192.168.138.101	TLSv1.2	311	Client Hello
42	12.859821	192.168.138.101	192.168.138.100	TLSv1.2	3615	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
48	12.860608	192.168.138.100	192.168.138.101	TLSv1.2	1495	Certificate
51	12.915491	192.168.138.100	192.168.138.101	TLSv1.2	449	Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
52	12.921280	192.168.138.101	192.168.138.100	TLSv1.2	1608	New Session Ticket, Change Cipher Spec, Encrypted Handshake Message
145	56.729582	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
146	56.749293	192.168.138.101	192.168.138.100	TLSv1.2	3638	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
149	56.750401	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Certificate Revoked)

The expanded view of Frame 42 shows the following details:

- Frame 42: 3615 bytes on wire (28920 bits), 3615 bytes captured (28920 bits) on interface \Device\NPF\_{FCFC32D3-E91B-4CC6-95FA-3A6CCB9B36C6}, id 0
- Ethernet II, Src: WistronI\_23:43:77 (54:ee:75:23:43:77), Dst: SuperMic\_0f:25:a3 (3c:ec:ef:0f:25:a3)
- Internet Protocol Version 4, Src: 192.168.138.101, Dst: 192.168.138.100
- Transmission Control Protocol, Src Port: 9099, Dst Port: 36898, Seq: 1, Ack: 258, Len: 3561
- Transport Layer Security
  - TLSv1.2 Record Layer: Handshake Protocol: Server Hello
    - Content Type: Handshake (22)
    - Version: TLS 1.2 (0x0303)
    - Length: 66
    - Handshake Protocol: Server Hello
      - Handshake Type: Server Hello (2)
      - Length: 62
      - Version: TLS 1.2 (0x0303)
      - Random: f40bf9dd0fac4b88e1ade40c570dfd1fba8b698cce2b520a77903935c7d0582
      - Session ID Length: 0
      - Cipher Suite: TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256 (0xc02f)
      - Compression Method: null (0)
      - Extensions Length: 22

### Wireshark Plots for WINNF.FT.C.SCS.3 Test Case ID

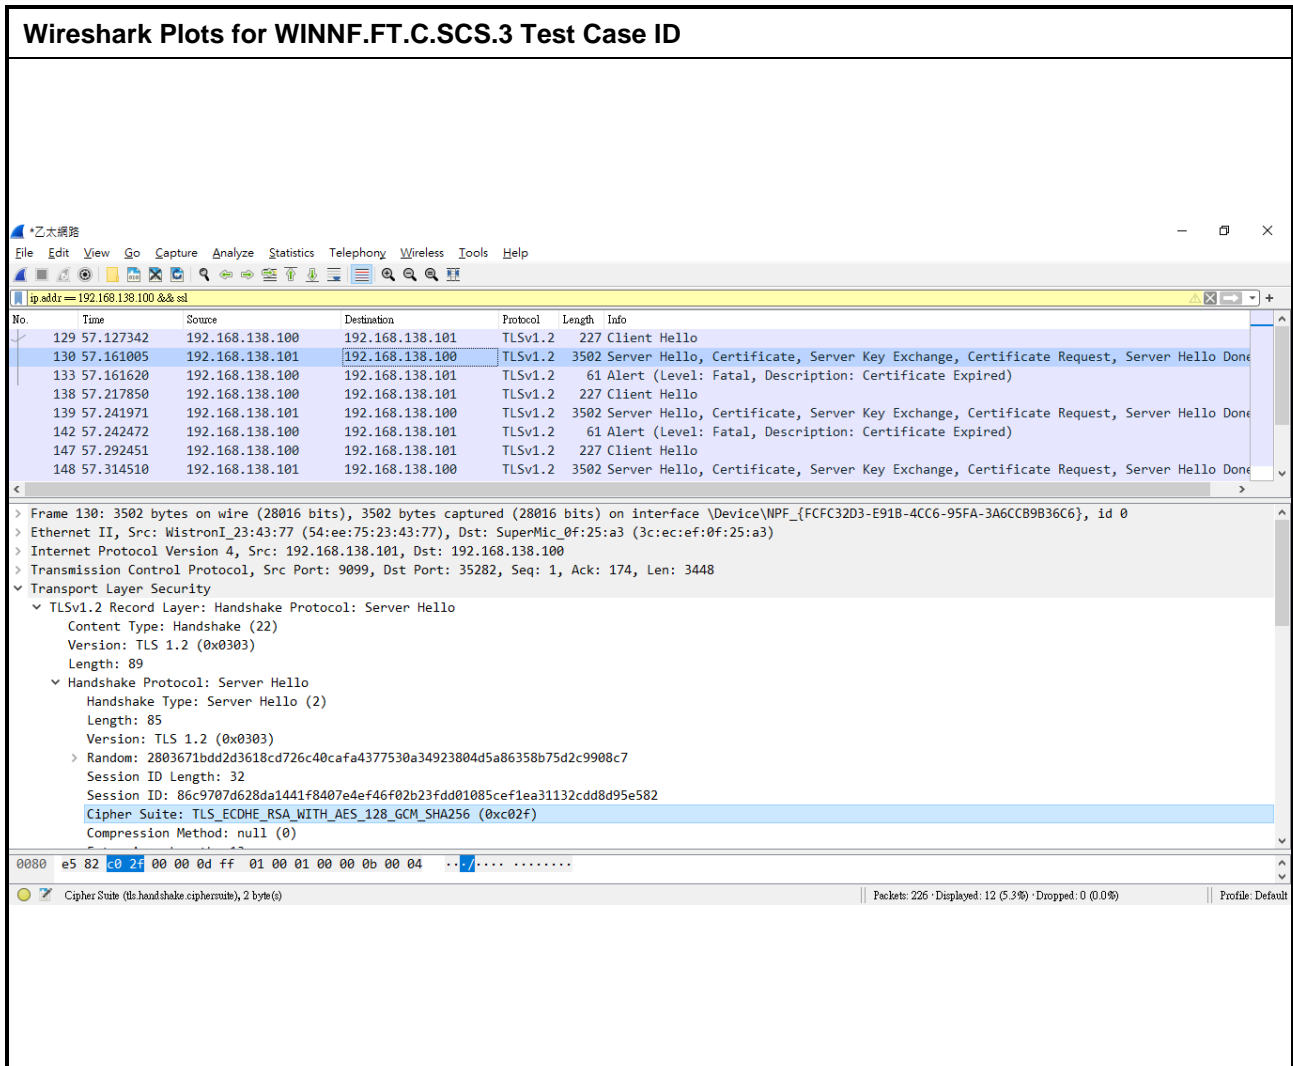

The screenshot displays the Wireshark interface with the following details:


- Filter:** ip.addr == 192.168.138.100 && ssl
- Packet List:**

No.	Time	Source	Destination	Protocol	Length	Info
129	57.127342	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
130	57.161005	192.168.138.101	192.168.138.100	TLSv1.2	3502	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
133	57.161620	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Certificate Expired)
138	57.217850	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
139	57.241971	192.168.138.101	192.168.138.100	TLSv1.2	3502	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
142	57.242472	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Certificate Expired)
147	57.292451	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
148	57.314510	192.168.138.101	192.168.138.100	TLSv1.2	3502	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
- Packet Details (Frame 130):**
  - Transport Layer Security
    - TLSv1.2 Record Layer: Handshake Protocol: Server Hello
      - Content Type: Handshake (22)
      - Version: TLS 1.2 (0x0303)
      - Length: 89
      - Handshake Protocol: Server Hello
        - Handshake Type: Server Hello (2)
        - Length: 85
        - Version: TLS 1.2 (0x0303)
        - Random: 2803671bdd2d3618cd726c40cfa4377530a34923804d5a86358b75d2c9908c7
        - Session ID Length: 32
        - Session ID: 86c9707d628da1441f8407e4ef46f02b23fdd01085cef1ea31132cdd8d95e582
        - Cipher Suite: TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256 (0xc02f)**
        - Compression Method: null (0)
- Packet Bytes:**

```

0080 e5 82 e0 2f 00 00 0d ff 01 00 01 00 0b 00 04 ..-/.....
    
```

### Wireshark Plots for WINNF.FT.C.SCS.4 Test Case ID

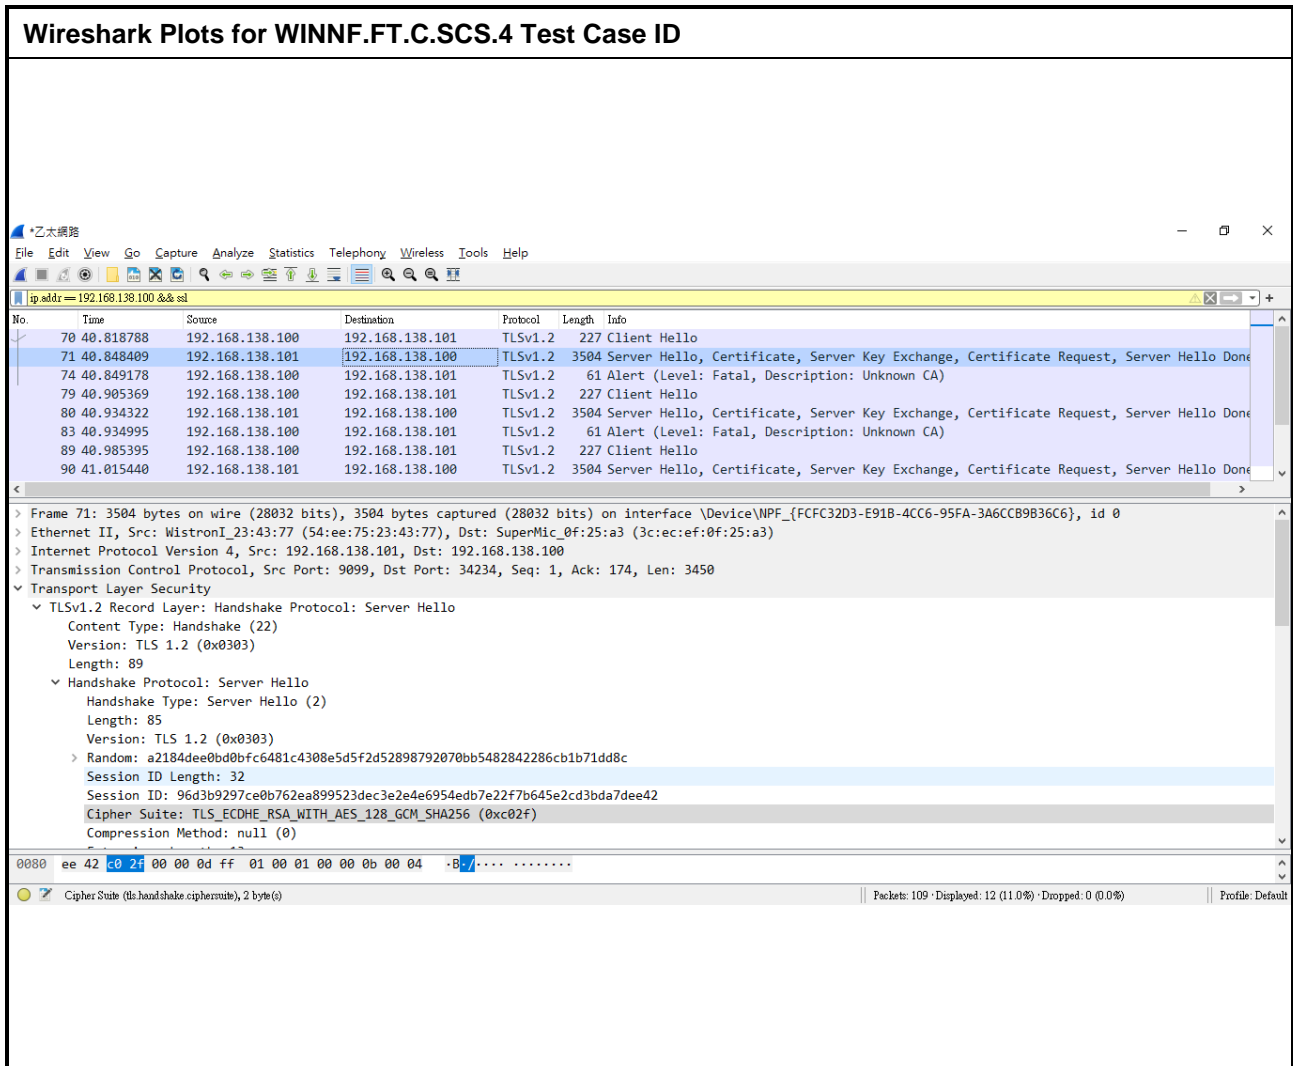


The screenshot shows the Wireshark interface with the following details:

- Filter:** ip.addr == 192.168.138.100 && ssl
- Packet List:**

No.	Time	Source	Destination	Protocol	Length	Info
70	40.818788	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
71	40.848409	192.168.138.101	192.168.138.100	TLSv1.2	3504	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
74	40.849178	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
79	40.905369	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
80	40.934322	192.168.138.101	192.168.138.100	TLSv1.2	3504	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
83	40.934995	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
89	40.985395	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
90	41.015440	192.168.138.101	192.168.138.100	TLSv1.2	3504	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
- Packet 71 Details:**
  - Frame 71: 3504 bytes on wire (28032 bits), 3504 bytes captured (28032 bits) on interface \Device\NPF\_{FCFC32D3-E91B-4CC6-95FA-3A6CCB9B36C6}, id 0
  - Ethernet II, Src: WistronI\_23:43:77 (54:ee:75:23:43:77), Dst: SuperMic\_0f:25:a3 (3c:ec:ef:0f:25:a3)
  - Internet Protocol Version 4, Src: 192.168.138.101, Dst: 192.168.138.100
  - Transmission Control Protocol, Src Port: 9099, Dst Port: 34234, Seq: 1, Ack: 174, Len: 3450
  - Transport Layer Security
    - TLSv1.2 Record Layer: Handshake Protocol: Server Hello
      - Content Type: Handshake (22)
      - Version: TLS 1.2 (0x0303)
      - Length: 89
      - Handshake Protocol: Server Hello
        - Handshake Type: Server Hello (2)
        - Length: 85
        - Version: TLS 1.2 (0x0303)
        - Random: a2184dee0bd0bfc6481c4308e5d5f2d52898792070bb5482842286cb1b71dd8c
        - Session ID Length: 32
        - Session ID: 96d3b9297ce0b762ea899523dec3e2e4e6954edb7e22f7b645e2cd3bda7dee42
        - Cipher Suite: TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256 (0xcc02f)
        - Compression Method: null (0)
- Packet Bytes:** ee 42 e0 2f 00 00 0d ff 01 00 01 00 0b 00 04 -B-./.....
- Summary:** Cipher Suite (tls\_handshake\_cipher\_suite), 2 byte(s) | Packets: 109 · Displayed: 12 (11.0%) · Dropped: 0 (0.0%) | Profile: Default



### Wireshark Plots for WINNF.FT.C.SCS.5 Test Case ID

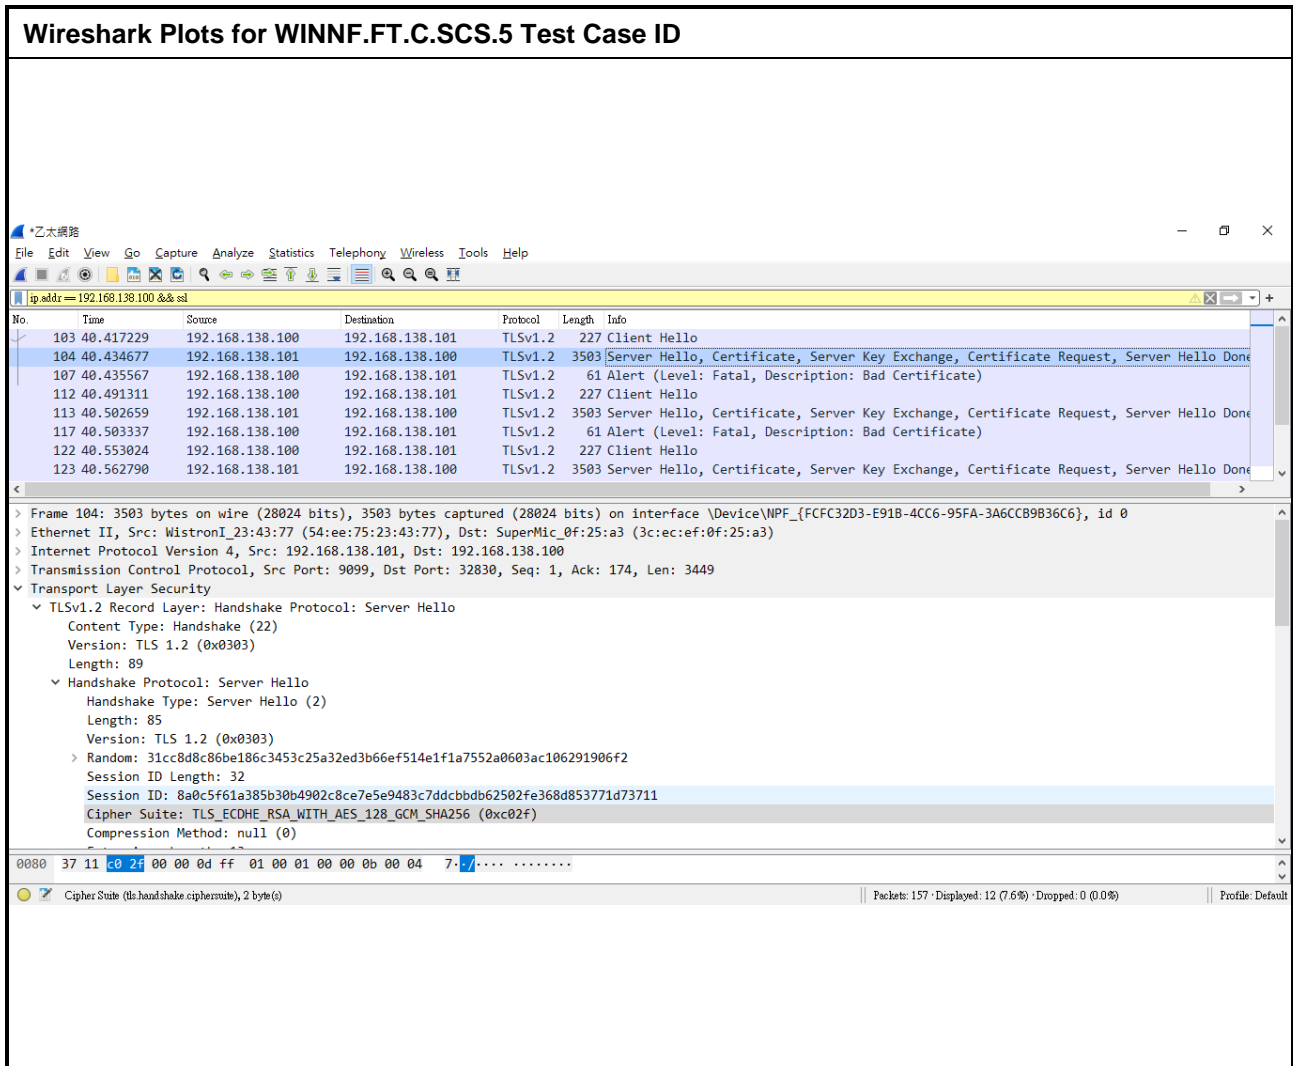


The screenshot displays the Wireshark interface with the following details:

- Filter:** ip.addr == 192.168.138.100 && ssl
- Packet List:**

No.	Time	Source	Destination	Protocol	Length	Info
103	40.417229	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
104	40.434677	192.168.138.101	192.168.138.100	TLSv1.2	3503	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
107	40.435567	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Bad Certificate)
112	40.491311	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
113	40.502659	192.168.138.101	192.168.138.100	TLSv1.2	3503	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
117	40.503337	192.168.138.100	192.168.138.101	TLSv1.2	61	Alert (Level: Fatal, Description: Bad Certificate)
122	40.553024	192.168.138.100	192.168.138.101	TLSv1.2	227	Client Hello
123	40.562790	192.168.138.101	192.168.138.100	TLSv1.2	3503	Server Hello, Certificate, Server Key Exchange, Certificate Request, Server Hello Done
- Packet Details (Frame 104):**
  - Frame 104: 3503 bytes on wire (28024 bits), 3503 bytes captured (28024 bits) on interface \Device\NPF\_{FCFC32D3-E91B-4CC6-95FA-3A6CCB9836C6}, id 0
  - Ethernet II, Src: WistronI\_23:43:77 (54:ee:75:23:43:77), Dst: SuperMic\_0f:25:a3 (3c:ec:ef:0f:25:a3)
  - Internet Protocol Version 4, Src: 192.168.138.101, Dst: 192.168.138.100
  - Transmission Control Protocol, Src Port: 9099, Dst Port: 32830, Seq: 1, Ack: 174, Len: 3449
  - Transport Layer Security
    - TLSv1.2 Record Layer: Handshake Protocol: Server Hello
      - Content Type: Handshake (22)
      - Version: TLS 1.2 (0x0303)
      - Length: 89
      - Handshake Protocol: Server Hello
        - Handshake Type: Server Hello (2)
        - Length: 85
        - Version: TLS 1.2 (0x0303)
        - Random: 31cc8d8c86be186c3453c25a32ed3b66ef514e1f1a7552a0603ac106291906f2
        - Session ID Length: 32
        - Session ID: 8a0c5f61a385b30b4902c8ce7e5e9483c7ddcbdb62502fe368d853771d73711
        - Cipher Suite: TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256 (0xcc02f)
        - Compression Method: null (0)
- Packet Bytes:** 0000 37 11 e0 2f 00 00 0d ff 01 00 01 00 00 0b 04 7c /.....
- Summary:** Cipher Suite (tls\_handshake\_cipher\_suite), 2 byte(s) | Packets: 157 · Displayed: 12 (7.6%) · Dropped: 0 (0.0%) | Profile: Default

### CRL and OCSP Verify Plots for WINNF.FT.C.SCS.2 Test Case ID

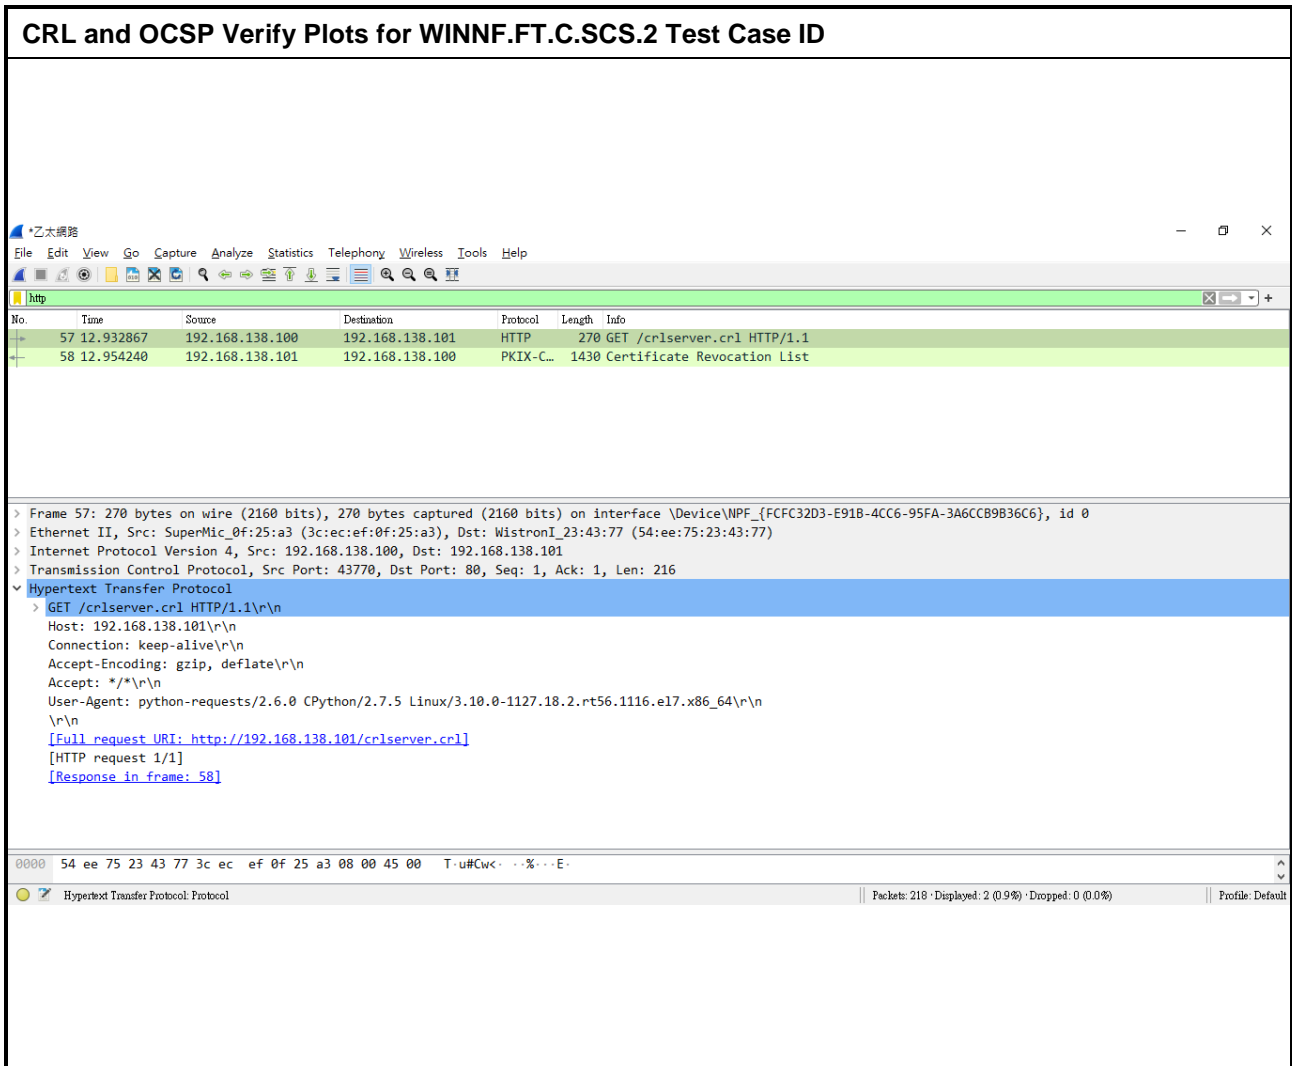

The image shows a Wireshark capture of network traffic. The main pane displays a list of packets:

No.	Time	Source	Destination	Protocol	Length	Info
57	12.932867	192.168.138.100	192.168.138.101	HTTP	270	GET /cr1server.cr1 HTTP/1.1
58	12.954240	192.168.138.101	192.168.138.100	PKIX-C...	1430	Certificate Revocation List

The packet details pane for the selected packet (No. 58) shows the following structure:

- Frame 57: 270 bytes on wire (2160 bits), 270 bytes captured (2160 bits) on interface \Device\NPF\_{FCFC32D3-E91B-4CC6-95FA-3A6CCB9B36C6}, id 0
- Ethernet II, Src: SuperMic\_0f:25:a3 (3c:ec:ef:0f:25:a3), Dst: WistronI\_23:43:77 (54:ee:75:23:43:77)
- Internet Protocol Version 4, Src: 192.168.138.100, Dst: 192.168.138.101
- Transmission Control Protocol, Src Port: 43770, Dst Port: 80, Seq: 1, Ack: 1, Len: 216
- Hypertext Transfer Protocol**
  - GET /cr1server.cr1 HTTP/1.1\r\n
  - Host: 192.168.138.101\r\n
  - Connection: keep-alive\r\n
  - Accept-Encoding: gzip, deflate\r\n
  - Accept: \*/\*\r\n
  - User-Agent: python-requests/2.6.0 CPython/2.7.5 Linux/3.10.0-1127.18.2.rt56.1116.el7.x86\_64\r\n
  - \r\n
  - [Full request URI: <http://192.168.138.101/cr1server.cr1>]
  - [HTTP request 1/1]
  - [Response in frame: 58]

The packet bytes pane shows the raw data: 0000 54 ee 75 23 43 77 3c ec ef 0f 25 a3 08 00 45 00 T·u#Cw<· ··%· ··E·

Summary: Hypertext Transfer Protocol: Protocol | Packets: 218 · Displayed: 2 (0.9%) · Dropped: 0 (0.0%) | Profile: Default