

# Setup Guide

Smart Battery Cam  
Model: SS113



**safemo**

Smart security. Safer spaces.

## Table of Contents

### Table of contents


1. In the box
2. At a glance
3. Download Safemo App
  - Add devices to your app
4. Prepare the camera
  - Remove & insert charged battery
  - Charge the battery
  - Mount the camera
5. Safety

## 1. In the box

## 1. In the box



Smart battery cam x2 (SS113) Ceiling bracket x2 Mounting bracket x2

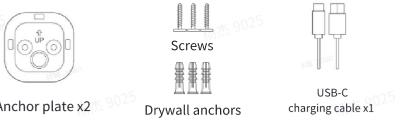


Anchor plate x2 Screws Drywall anchors USB-C charging cable x1

01

## 2. At a glance

### Camera

1. Camera lens
2. LED indicator
3. Light sensor
4. Microphone
5. Motion sensor
6. Spotlight
7. Solar panel port
8. Battery latch
9. Speakers
10. Removeable & rechargeable battery

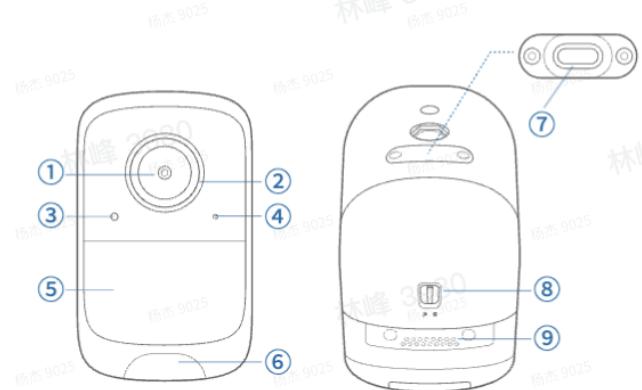


### Battery


- 11.

### ⊕/SYNC

12. Charging port

13. Power Indicator

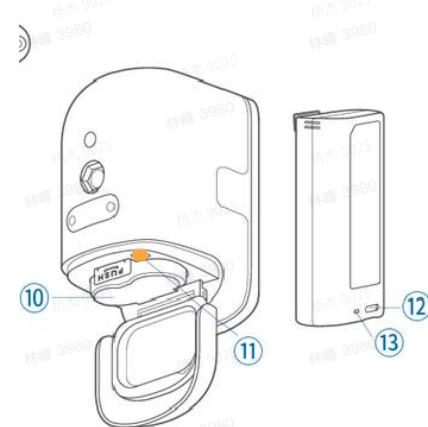


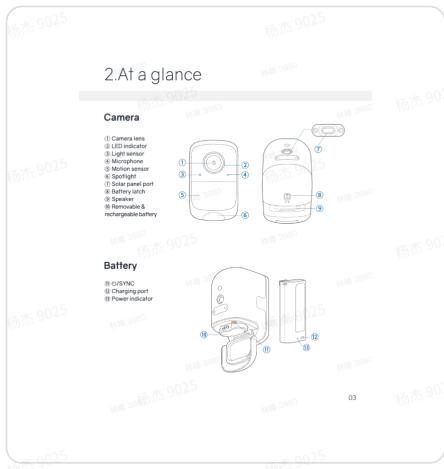

### 3. Download Safemo app

Search "Safemo" in your phone's app store or scan the QR code.



To reduce the risk of scams or malware, use your phone's camera app for scanning QR codes instead of third-party apps.

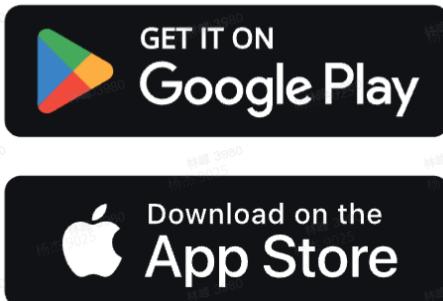

<https://app.safemo.com>

### Add devices to your app


Follow the in-app instructions to begin using your security cameras.

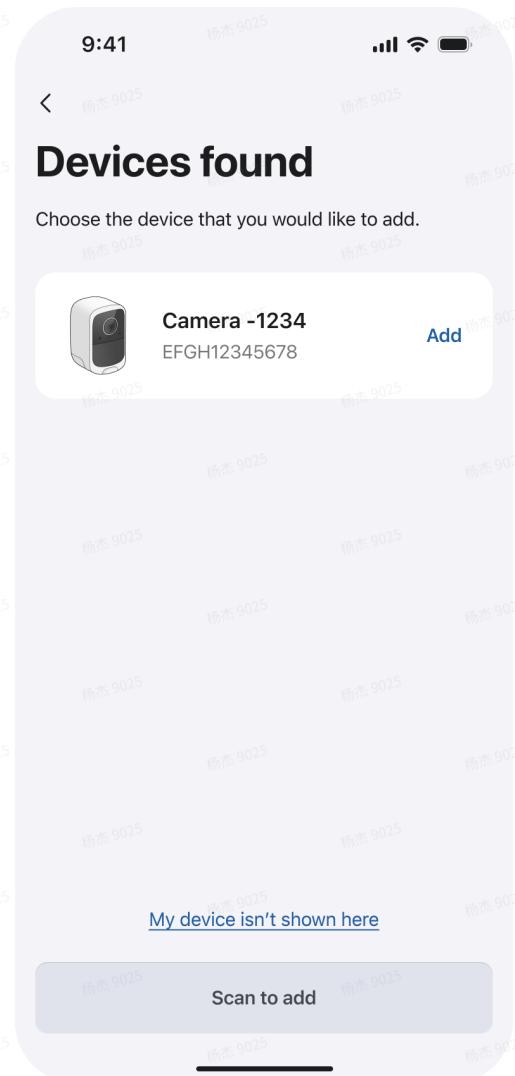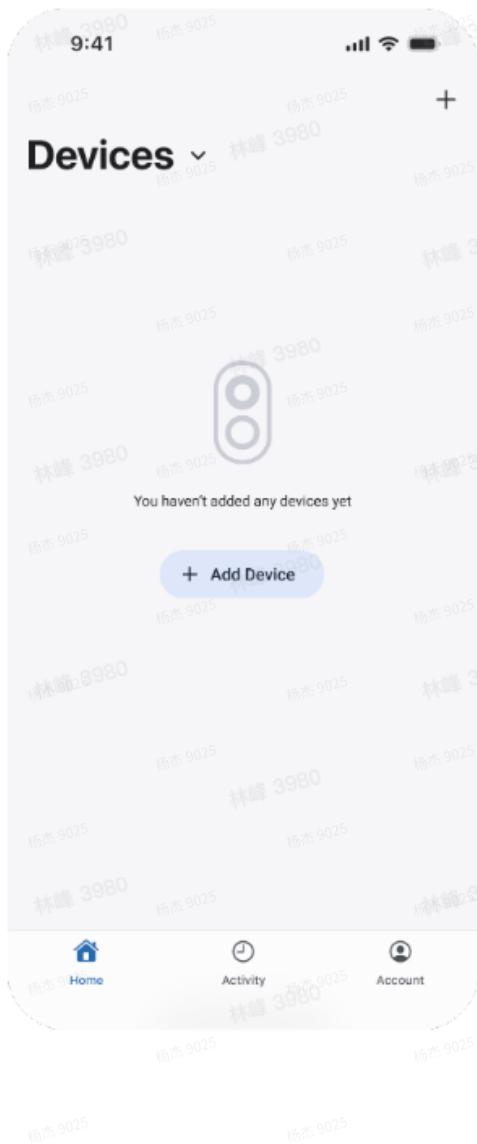

## 4. Prepare the camera


### Remove & insert charged battery

1. Open the bottom cover with the battery latch.
2. Remove the battery from the camera by pressing the metal attachment and pull it out.

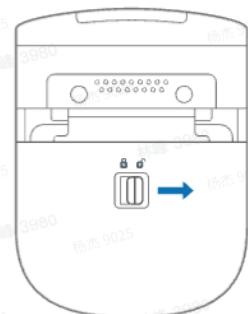



3. Remove the **battery's label**. Before its initial use, refer to the "Charge the battery" section to fully charge the battery.

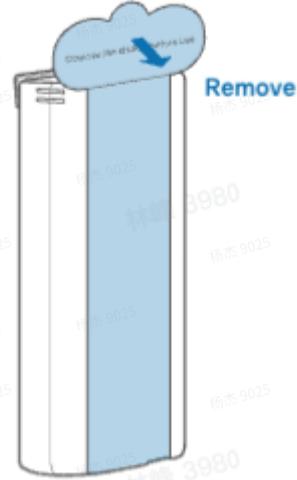


4. Insert the charged battery back inside the camera and press the battery down to lock it in place. Close the cover and let the battery power on the camera.

## Charge the battery


Fully charge the battery before its initial use by connecting it to a USB-C cable and charge via hub or USB-C charger (DC 5V/1A-2A).

It will take approximately 9 hours to charge the battery. The power indicator at the bottom of the battery will turn green once fully charged.

### Charge via hub

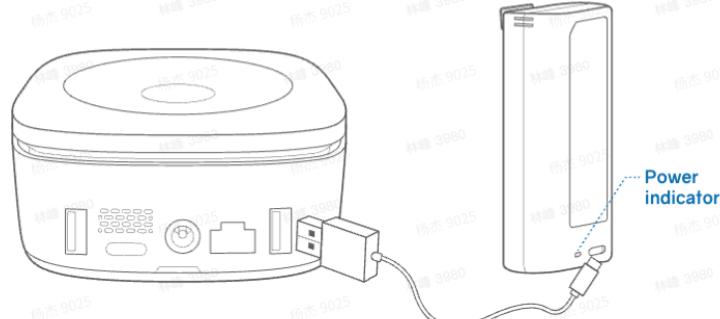

### Charge via USB-C cable charger

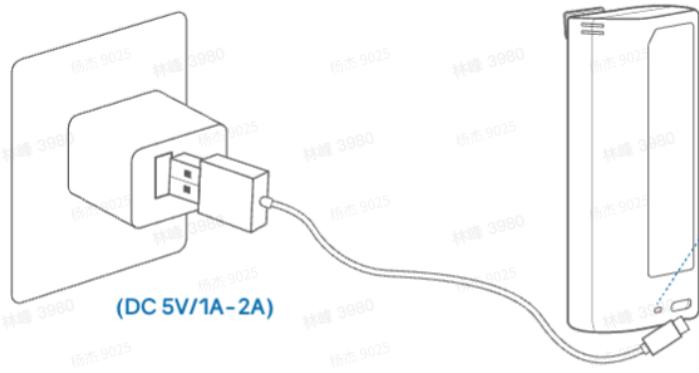

## Indicator Light


### Status:



Charging



Fully Charged



Low Battery (删除这个状态)


(颜色改成橙色, 和电池贴纸和指示灯颜色一致)



## Mount the camera


### Wall

We recommend hanging the camera 7-10 ft (2-3m) above the ground to capture the desired camera angle.

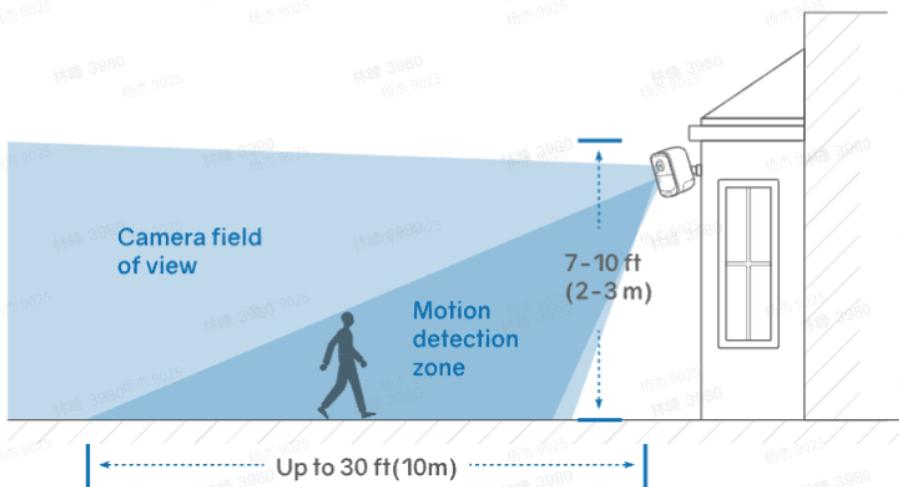


## 1. Mount the anchor plate

- Use a 15/64-inch (6mm) drill bit to drill holes where the **anchor plate** will be placed.
- If your wall is made of concrete, brick, or stucco, insert the provided drywall anchors into the holes.
- Attach the anchor plate to the wall, ensuring the "Up" label on the plate is placed in the upward direction.

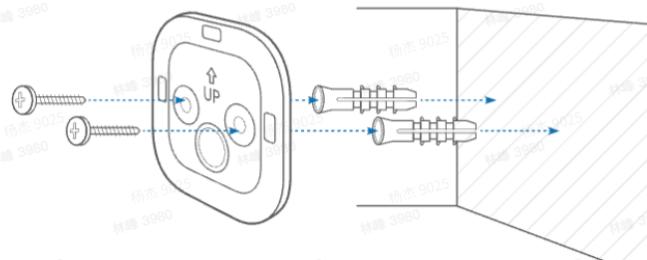


## 2. Mount the camera


- Tighten the screws at the bottom of the mounting bracket to secure it to the camera.

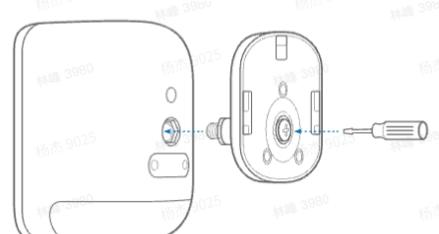

- Fasten the camera to the anchor plate, and make sure it is attached securely.

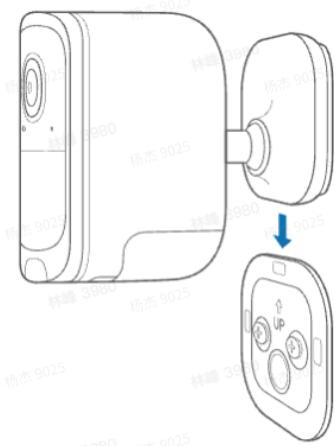


- Adjust to the appropriate angle for monitoring.

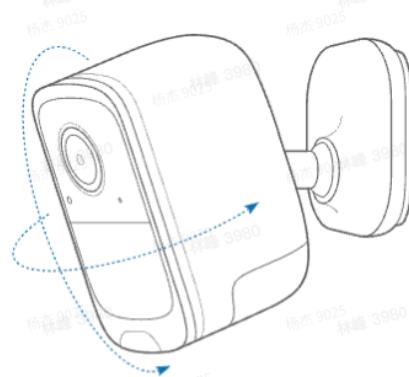

## Ceiling


### 1. Mount the anchor plate

- Use a 15/64-inch (6mm) drill bit to drill holes where the **anchor plate** will be placed.
- If your wall is made of concrete, brick, or stucco, insert the provided drywall anchors into the holes.
- Attach the anchor plate to the ceiling.

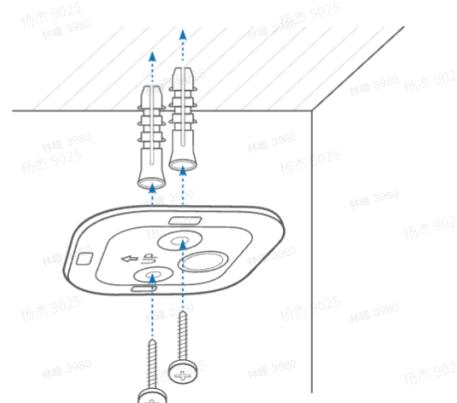

### 2. Mount the camera


- Tighten the screws at the bottom of the mounting bracket to secure it to the ceiling bracket.

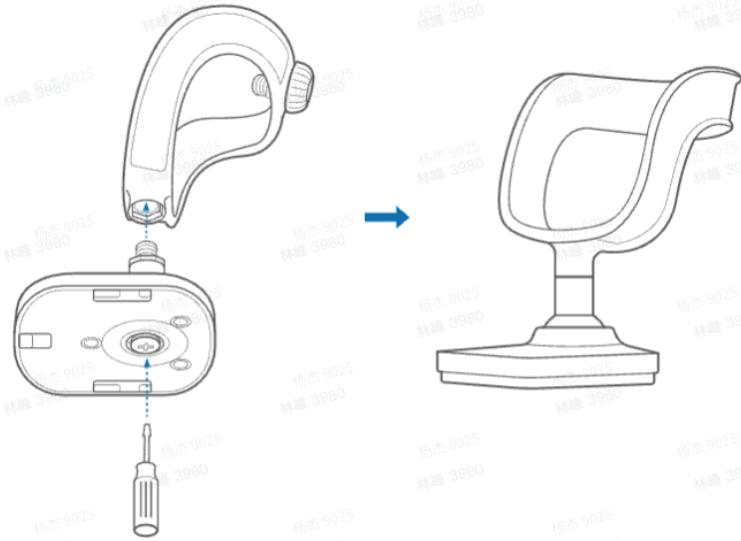

- Fasten the camera to the ceiling bracket in the downward position, where the camera lens is positioned near the base of the ceiling bracket (for better filming & motion detection).



- Fasten the camera to the anchor plate, and make sure it is attached securely.

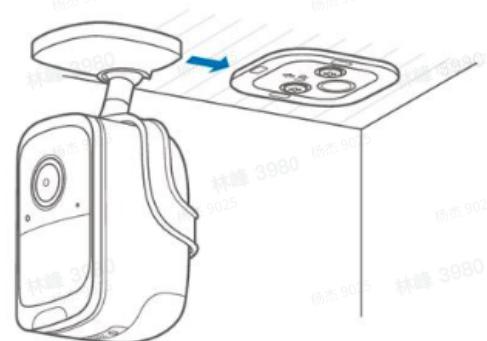

- Adjust to the appropriate angle for monitoring.



## Flat surface


- Tighten the screws at the bottom of the mounting bracket to secure it to the ceiling bracket.



- Fasten the camera to the ceiling bracket in the upright position and place the camera on the flat surface.



- Adjust to the appropriate angle for monitoring.

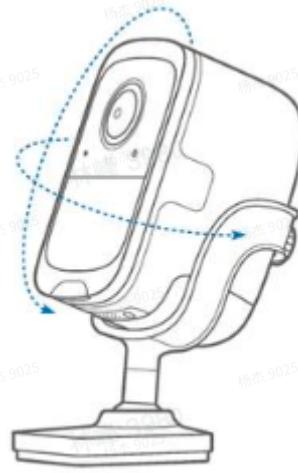

## 5. Safety

Do not use the device in extreme temperatures, and never expose the device to strong sunshine or a humid, wet environment.

- The suitable temperature for SS113 and its accessories is -10°C / 14°F to 45°C / 113°F. (The temperature for charging is 0°C / 32°F to 45°C / 113°F).
- The best environment is a temperature range **between** 5°C / 41°F - 25°C / 77°F.
- When charging, please place the device(s) at room temperature in a place with good ventilation.
- The adapter should be installed near the equipment and be easily accessible for best use.
- Only use the **battery** supplied by the manufacturer. Using unauthorized **batteries** may cause damage to the device and will void the device's warranty.
- The camera's rated input voltage/current is 5V/DC 1.5A

### Warning

- Replacing the battery with an incorrect version can destroy the safety mechanisms within the device.
- Inappropriate battery disposal--for example, into a fire or a hot oven, or mechanically crushing or cutting the battery--can result in an explosion.
- Leaving a battery in a very high-temperature environment can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas.

### Attention

- Remplacement d' une batterie par un type incorrect pouvant supprimer une protection
- Mise au rebut d' une batterie dans un feu ou dans un four chaud, ou écrasement mécanique ou coupure d' une batterie, susceptible de provoquer une explosion;

- Maintien d' une batterie dans un environnement à très haute température pouvant provoquer une explosion ou la fuite de liquide ou de gaz inflammables; et
- Batterie soumise à une pression de l' air extrêmement faible pouvant provoquer une explosion ou la fuite de liquide ou de gaz inflammables.



**CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT MODEL.  
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.**



**ATTENTION RISQUE D'EXPLOSION SI LA BATTERIE EST REMPLACÉE PAR UN TYPE INCORRECT. ÉLIMINER LES BATTERIES USÉES SELON LES INSTRUCTIONS.**

#### **Notice**

#### **FCC Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference;
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

#### **FCC Radio Frequency Exposure Statement**

The device has been evaluated to meet general RF exposure requirements. The device can be used in fixed/mobile exposure condition. The min separation distance is 20 cm.

#### **Notice: Shielded cables**

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- (1) Reorient or relocate the receiving antenna.
- (2) Increase the separation between the equipment and receiver.<sup>25</sup>
- (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- (4) Consult the dealer or an experienced radio/ TV technician for help.

All connections to other computing devices must be made using shielded cables to maintain compliance with FCC regulations.

## IC Statement

This device complies with Industry Canada Licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exemptés de licence. L'exploitation est soumises aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

## IC RF Statement

When using the product, maintain a distance of 20 cm from the body to ensure compliance with RF exposure requirements.

Lors de l'utilisation du produit, maintenez une distance de 20 cm du corps afin de vous conformer aux exigences en matière d'exposition RF

## EU Statement



This product complies with the radio interference requirements of the European Community. Hereby, Safemo Pte. Ltd. declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. For the declaration of conformity, visit the Website: <https://www.safemo.com>.

This product can be used across EU member states.

#### RF exposure information:

The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of  $d=20$  cm between the device and the human body. To maintain compliance with RF exposure requirement, use product while maintaining a 20 cm distance between the device and human body.

SS113 Wi-Fi Operating Frequency Range: 2412~2472 MHz(2.4G), Wi-Fi Max Output Power: 20 dBm(EIRP);

SS113 Bluetooth Operating Frequency Range: 2402~2480 MHz; Bluetooth Max Output Power: 8 dBm(EIRP);



This product is designed and manufactured with high quality materials and components, which can be recycled and reused.



This symbol means the product must not be discarded as household waste, and should be delivered to an appropriate collection facility for recycling. Proper disposal and recycling helps protect natural resources, human health, and the environment. For more information on disposal and recycling of this product, contact your local municipality, disposal service, or the shop where you **purchased** this product.

#### UK Statement



This product complies with the radio interference requirements of the United Kingdom Declaration of Conformity.

Hereby, Safemo Pte. Ltd. declares that this product is in compliance with Radio Equipment Regulations 2017(S.I. 2017/1206). The full text of the UK declaration of conformity is available at the following internet address: <https://www.safemo.com>.

## 1. 售后保修(此部分在成型的kx1确认完直接沿用)

For more information, please visit our website: [www.safemo.com](http://www.safemo.com)

If you have any queries, feel free to contact us: [support@safemo.com](mailto:support@safemo.com)



**12-month limited warranty**



**United States**  
+1 (800) 988 7973  
Mon-Sat 6:15AM-6:45PM(PT)  
Sun 6:15AM-5:45PM(PT)

**United Kingdom**  
+44 (0) 1604 936 200  
Mon-Sun 6:00-19:00

**Germany**  
+49 (0) 69 9579 7960  
Mo-Fr 8:00-16:00 Sa 9:00-16:00



**support@eufylife.com**



**@EufyOfficial**



**@EufyOfficial**



**@EufyOfficial**

**Anker Innovations Limited**  
**Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong**