



802.11be-EHT80 26dB Bandwidth & 99% Bandwidth


Channel 39 (6145MHz)

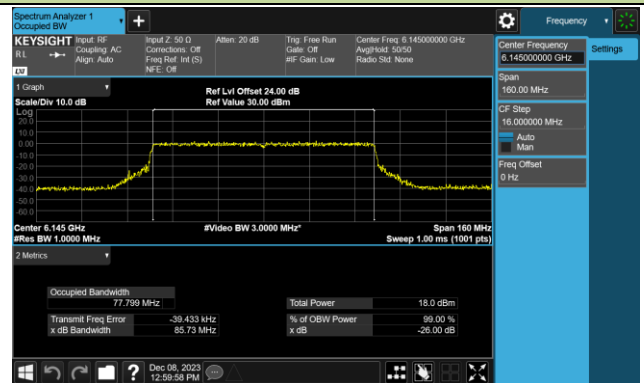


Channel 55 (6225MHz)

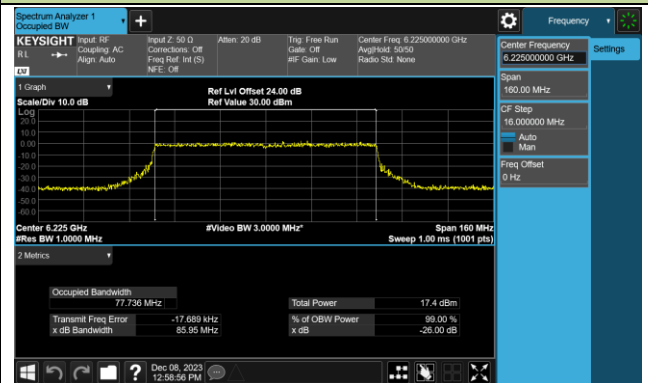


Channel 87 (6385MHz)

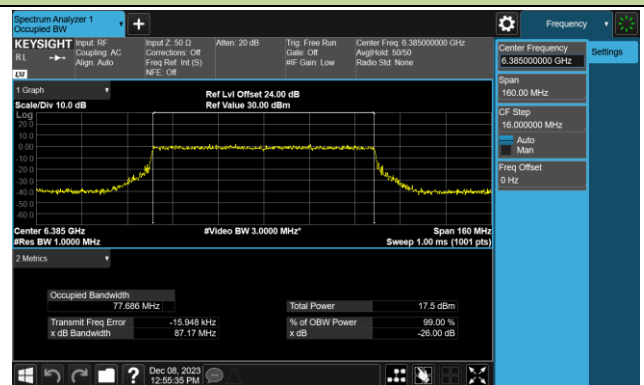


Channel 103 (6465MHz)

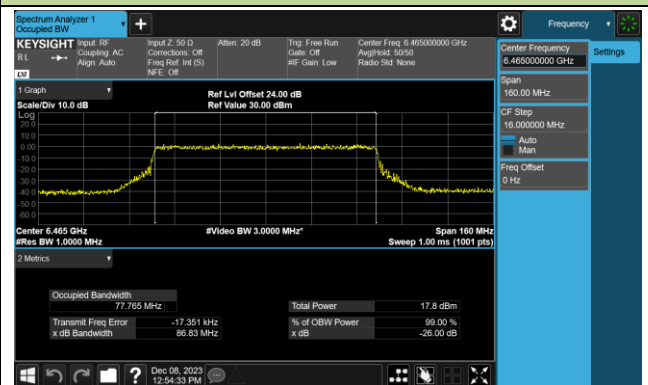


Channel 119 (6545MHz)

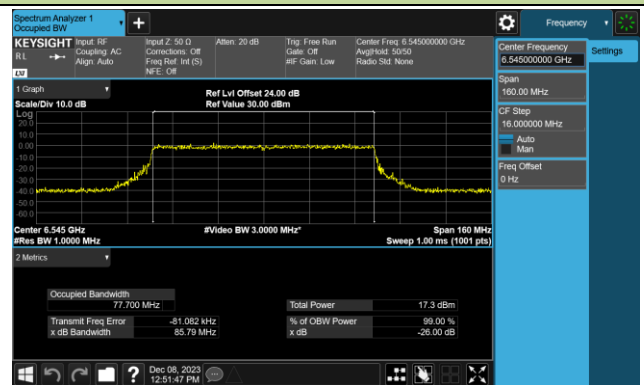


Channel 135 (6625MHz)

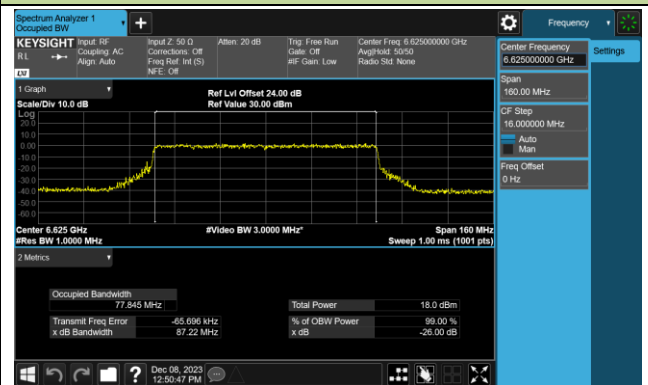


Channel 151 (6705MHz)

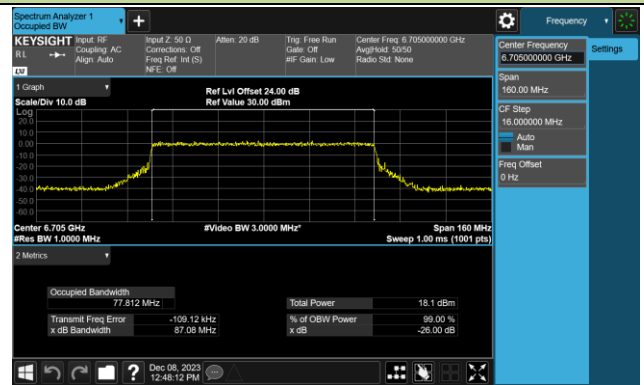


Channel 167 (6785MHz)

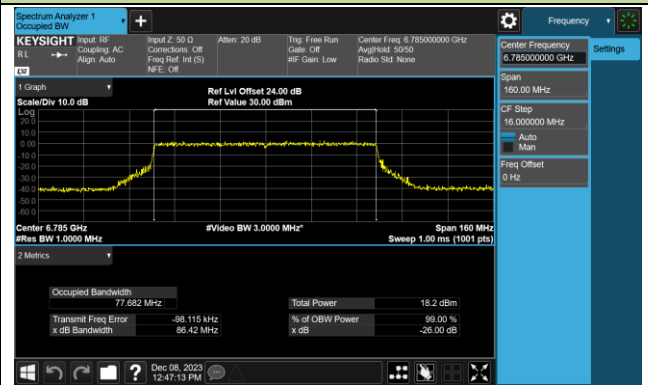

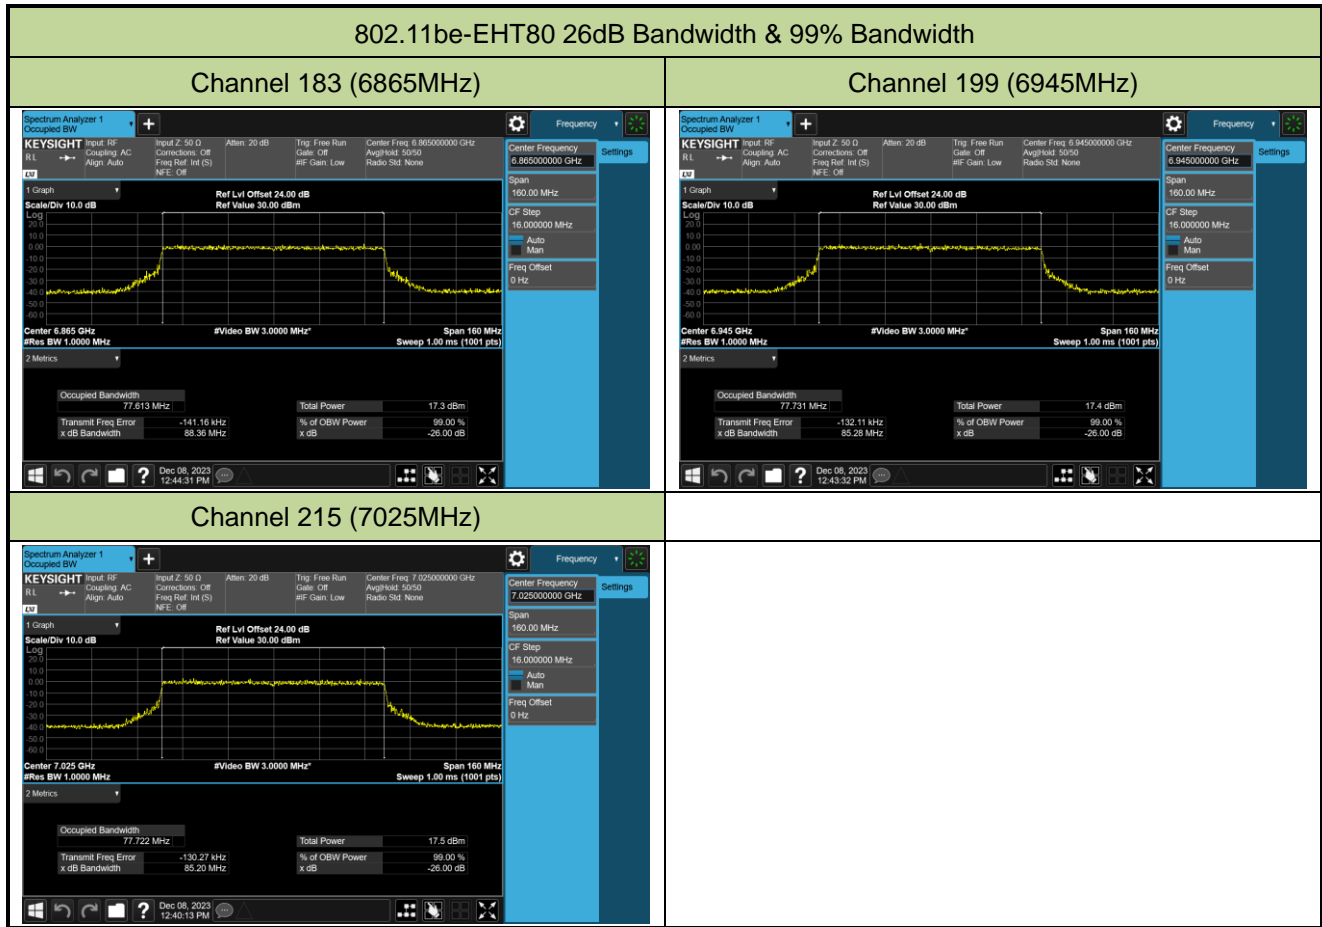


802.11be-EHT160 26dB Bandwidth & 99% Bandwidth


Channel 47 (6185MHz)

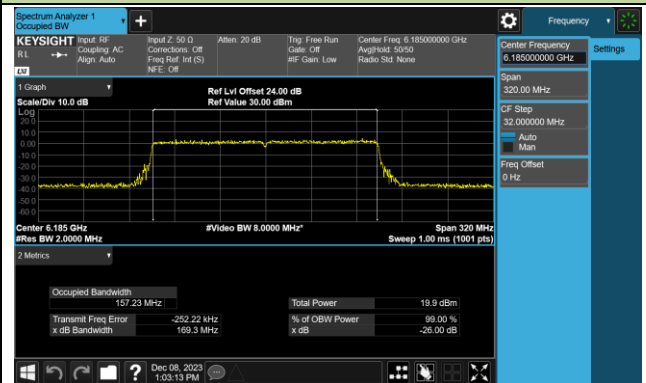


Channel 79 (6345MHz)

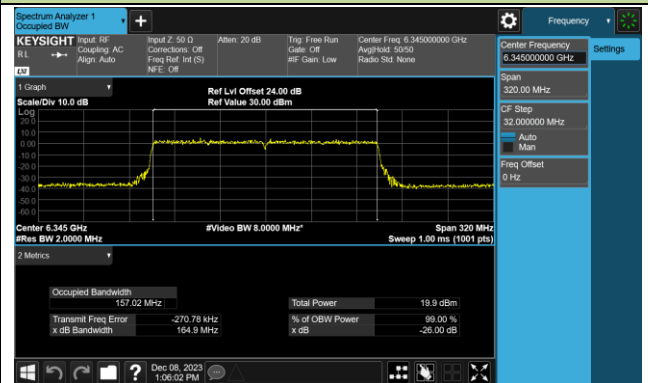


Channel 111 (6505MHz)

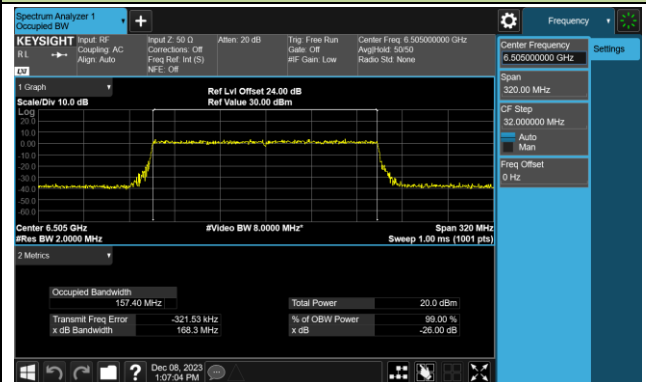


Channel 143 (6665MHz)

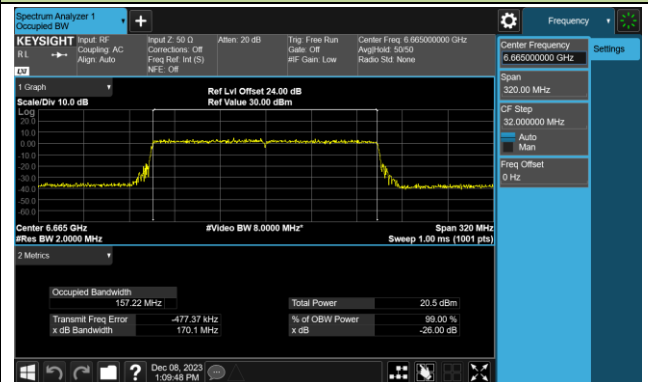

Channel 175 (6825MHz)

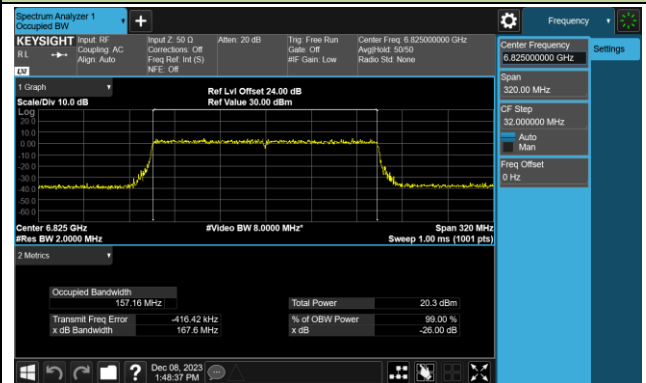


Channel 207 (6985MHz)

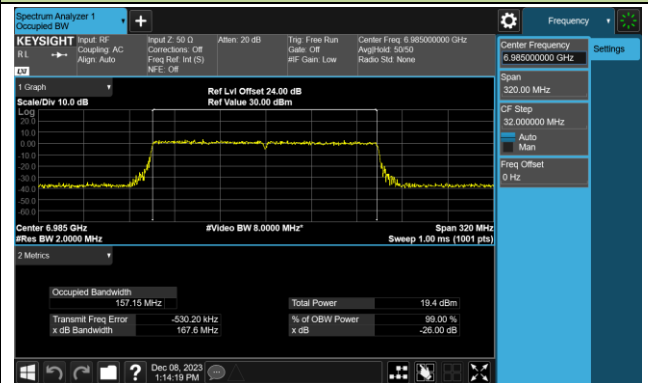


802.11be-EHT320 26dB Bandwidth & 99% Bandwidth


Channel 63 (6265MHz)

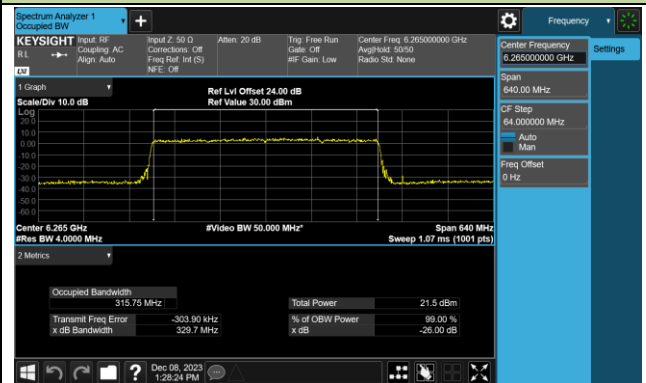


Channel 95 (6425MHz)

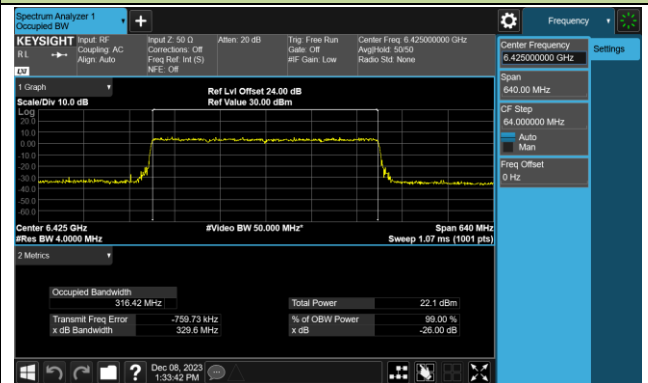


Channel 127 (6585MHz)

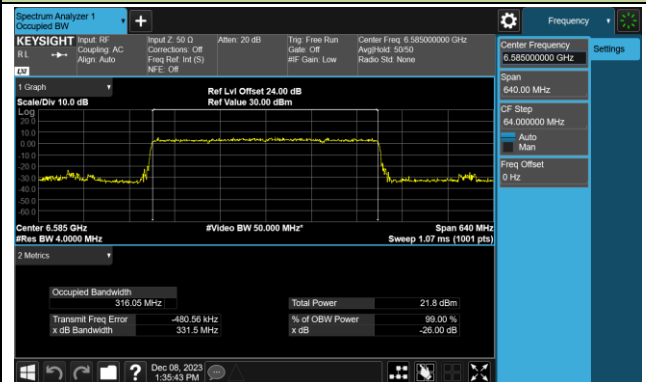

Channel 159 (6745MHz)

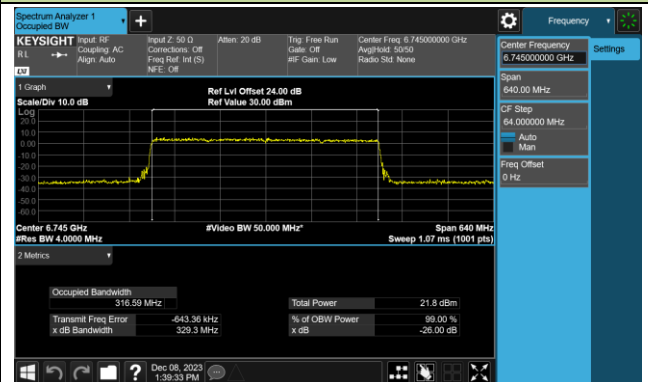

Channel 191 (6905MHz)

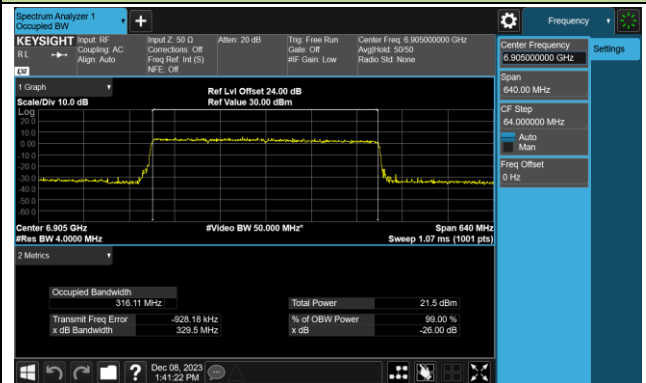

6.3. Output Power

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

6.3.2. Test Procedure Used


KDB 789033D02v02r01- Section E)3)b) Method PM-G

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

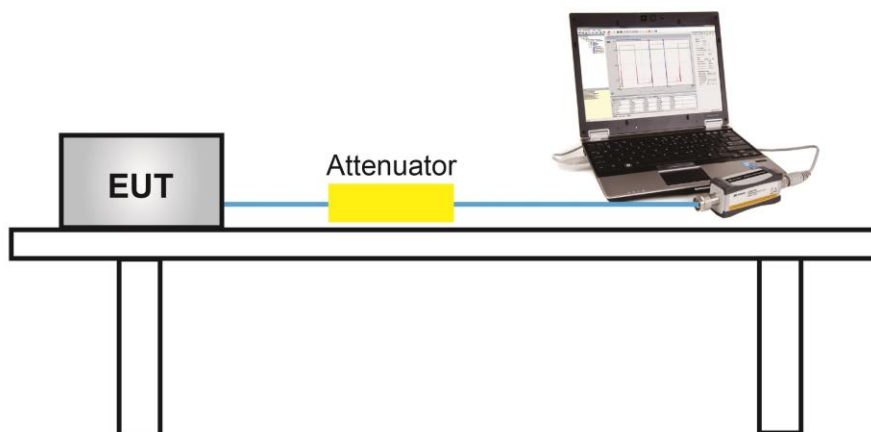

6.3.5. Test Result

Test Site	SR6	Test Engineer	Xuan
Test Date	2023/11/23	Mode	Nss=1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
CDD Mode								
11ax-HE20	MCS0	33	6115	8.31	8.04	11.19	14.19	≤ 30.00
11ax-HE20	MCS0	61	6255	8.71	8.14	11.44	14.44	≤ 30.00
11ax-HE20	MCS0	93	6415	8.38	8.14	11.27	14.27	≤ 30.00
11ax-HE20	MCS0	97	6435	8.21	7.82	11.03	14.03	≤ 30.00
11ax-HE20	MCS0	105	6475	8.13	8.02	11.09	14.09	≤ 30.00
11ax-HE20	MCS0	113	6515	8.50	8.20	11.36	14.36	≤ 30.00
11ax-HE20	MCS0	117	6535	8.17	8.14	11.17	14.17	≤ 30.00
11ax-HE20	MCS0	149	6695	8.53	8.95	11.76	14.76	≤ 30.00
11ax-HE20	MCS0	181	6855	7.49	7.86	10.69	13.69	≤ 30.00
11ax-HE20	MCS0	185	6875	7.90	7.94	10.93	13.93	≤ 30.00
11ax-HE20	MCS0	189	6895	7.71	7.86	10.80	13.80	≤ 30.00
11ax-HE20	MCS0	213	7015	8.45	8.58	11.53	14.53	≤ 30.00
11ax-HE20	MCS0	229	7095	8.13	8.75	11.46	14.46	≤ 30.00
11ax-HE40	MCS0	35	6125	11.01	11.22	14.13	17.13	≤ 30.00
11ax-HE40	MCS0	59	6245	11.26	11.22	14.25	17.25	≤ 30.00
11ax-HE40	MCS0	91	6405	11.82	11.10	14.49	17.49	≤ 30.00
11ax-HE40	MCS0	99	6445	10.79	10.72	13.77	16.77	≤ 30.00
11ax-HE40	MCS0	107	6485	11.27	11.43	14.36	17.36	≤ 30.00
11ax-HE40	MCS0	115	6525	11.50	11.18	14.35	17.35	≤ 30.00
11ax-HE40	MCS0	123	6565	11.45	11.36	14.42	17.42	≤ 30.00
11ax-HE40	MCS0	147	6685	12.05	12.41	15.24	18.24	≤ 30.00
11ax-HE40	MCS0	179	6845	10.94	11.13	14.05	17.05	≤ 30.00
11ax-HE40	MCS0	187	6885	10.83	10.67	13.76	16.76	≤ 30.00
11ax-HE40	MCS0	195	6925	11.56	10.87	14.24	17.24	≤ 30.00
11ax-HE40	MCS0	211	7005	11.67	11.16	14.43	17.43	≤ 30.00
11ax-HE40	MCS0	227	7085	11.71	11.60	14.67	17.67	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11ax-HE80	MCS0	39	6145	13.95	13.96	16.97	19.97	≤ 30.00
11ax-HE80	MCS0	55	6225	14.57	14.36	17.48	20.48	≤ 30.00
11ax-HE80	MCS0	87	6385	14.61	14.07	17.36	20.36	≤ 30.00
11ax-HE80	MCS0	103	6465	13.97	14.08	17.04	20.04	≤ 30.00
11ax-HE80	MCS0	119	6545	14.07	13.88	16.99	19.99	≤ 30.00
11ax-HE80	MCS0	135	6625	14.23	14.36	17.31	20.31	≤ 30.00
11ax-HE80	MCS0	151	6705	14.58	15.18	17.90	20.90	≤ 30.00
11ax-HE80	MCS0	167	6865	14.36	14.86	17.63	20.63	≤ 30.00
11ax-HE80	MCS0	183	6865	13.57	13.79	16.69	19.69	≤ 30.00
11ax-HE80	MCS0	199	6945	14.47	14.22	17.36	20.36	≤ 30.00
11ax-HE80	MCS0	215	7025	14.73	14.71	17.73	20.73	≤ 30.00
11ax-HE160	MCS0	47	6185	17.01	17.31	20.17	23.17	≤ 30.00
11ax-HE160	MCS0	79	6345	17.23	16.85	20.05	23.05	≤ 30.00
11ax-HE160	MCS0	111	6505	17.08	17.10	20.10	23.10	≤ 30.00
11ax-HE160	MCS0	143	6665	17.31	17.66	20.50	23.50	≤ 30.00
11ax-HE160	MCS0	175	6825	16.87	17.07	19.98	22.98	≤ 30.00
11ax-HE160	MCS0	207	6985	16.48	16.22	19.36	22.36	≤ 30.00
11be-EHT20	MCS0	33	6115	8.75	8.64	11.71	14.71	≤ 30.00
11be-EHT20	MCS0	61	6255	9.15	9.10	12.14	15.14	≤ 30.00
11be-EHT20	MCS0	93	6415	8.53	8.29	11.42	14.42	≤ 30.00
11be-EHT20	MCS0	97	6435	8.44	8.71	11.59	14.59	≤ 30.00
11be-EHT20	MCS0	105	6475	8.58	8.81	11.71	14.71	≤ 30.00
11be-EHT20	MCS0	113	6515	8.62	8.83	11.74	14.74	≤ 30.00
11be-EHT20	MCS0	117	6535	8.57	8.73	11.66	14.66	≤ 30.00
11be-EHT20	MCS0	149	6695	8.81	9.48	12.17	15.17	≤ 30.00
11be-EHT20	MCS0	181	6855	8.61	9.02	11.83	14.83	≤ 30.00
11be-EHT20	MCS0	185	6875	8.65	8.73	11.70	14.70	≤ 30.00
11be-EHT20	MCS0	189	6895	8.37	8.43	11.41	14.41	≤ 30.00
11be-EHT20	MCS0	213	7015	8.77	9.07	11.93	14.93	≤ 30.00
11be-EHT20	MCS0	229	7095	8.95	8.79	11.88	14.88	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11be-EHT40	MCS0	35	6125	11.45	11.65	14.56	17.56	≤ 30.00
11be-EHT40	MCS0	59	6245	12.01	12.10	15.07	18.07	≤ 30.00
11be-EHT40	MCS0	91	6405	11.71	11.01	14.38	17.38	≤ 30.00
11be-EHT40	MCS0	99	6445	11.74	11.73	14.75	17.75	≤ 30.00
11be-EHT40	MCS0	107	6485	11.76	11.74	14.76	17.76	≤ 30.00
11be-EHT40	MCS0	115	6525	11.76	11.75	14.77	17.77	≤ 30.00
11be-EHT40	MCS0	123	6565	12.03	11.41	14.74	17.74	≤ 30.00
11be-EHT40	MCS0	147	6685	12.10	12.55	15.34	18.34	≤ 30.00
11be-EHT40	MCS0	179	6845	11.61	11.95	14.79	17.79	≤ 30.00
11be-EHT40	MCS0	187	6885	11.47	11.60	14.55	17.55	≤ 30.00
11be-EHT40	MCS0	195	6925	11.41	10.76	14.11	17.11	≤ 30.00
11be-EHT40	MCS0	211	7005	11.39	11.09	14.25	17.25	≤ 30.00
11be-EHT40	MCS0	227	7085	11.65	11.36	14.52	17.52	≤ 30.00
11be-EHT80	MCS0	39	6145	14.50	14.36	17.44	20.44	≤ 30.00
11be-EHT80	MCS0	55	6225	14.70	14.20	17.47	20.47	≤ 30.00
11be-EHT80	MCS0	87	6385	14.60	14.18	17.41	20.41	≤ 30.00
11be-EHT80	MCS0	103	6465	14.50	14.04	17.29	20.29	≤ 30.00
11be-EHT80	MCS0	119	6545	14.36	14.31	17.35	20.35	≤ 30.00
11be-EHT80	MCS0	135	6625	14.93	15.01	17.98	20.98	≤ 30.00
11be-EHT80	MCS0	151	6705	14.77	15.27	18.04	21.04	≤ 30.00
11be-EHT80	MCS0	167	6865	14.25	14.84	17.57	20.57	≤ 30.00
11be-EHT80	MCS0	183	6865	13.65	13.86	16.77	19.77	≤ 30.00
11be-EHT80	MCS0	199	6945	14.41	14.05	17.24	20.24	≤ 30.00
11be-EHT80	MCS0	215	7025	14.49	14.75	17.63	20.63	≤ 30.00
11be-EHT160	MCS0	47	6185	17.24	17.33	20.30	23.30	≤ 30.00
11be-EHT160	MCS0	79	6345	17.32	16.95	20.15	23.15	≤ 30.00
11be-EHT160	MCS0	111	6505	17.23	17.17	20.21	23.21	≤ 30.00
11be-EHT160	MCS0	143	6665	17.37	17.85	20.63	23.63	≤ 30.00
11be-EHT160	MCS0	175	6825	16.91	16.98	19.96	22.96	≤ 30.00
11be-EHT160	MCS0	207	6985	16.82	16.68	19.76	22.76	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11be-EHT320	MCS0	63	6265	19.60	19.18	22.41	25.41	≤ 30.00
11be-EHT320	MCS0	95	6425	19.62	19.62	22.63	25.63	≤ 30.00
11be-EHT320	MCS0	127	6585	20.21	19.89	23.06	26.06	≤ 30.00
11be-EHT320	MCS0	159	6745	19.44	19.99	22.73	25.73	≤ 30.00
11be-EHT320	MCS0	191	6905	19.42	19.34	22.39	25.39	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Directional Gain (dBi).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
Beam-Forming Mode								
11ax-HE20	MCS0	33	6115	8.31	8.04	11.19	16.64	≤ 30.00
11ax-HE20	MCS0	61	6255	8.71	8.14	11.44	16.89	≤ 30.00
11ax-HE20	MCS0	93	6415	8.38	8.14	11.27	16.72	≤ 30.00
11ax-HE20	MCS0	97	6435	8.21	7.82	11.03	16.54	≤ 30.00
11ax-HE20	MCS0	105	6475	8.13	8.02	11.09	16.60	≤ 30.00
11ax-HE20	MCS0	113	6515	8.50	8.20	11.36	16.87	≤ 30.00
11ax-HE20	MCS0	117	6535	8.17	8.14	11.17	16.68	≤ 30.00
11ax-HE20	MCS0	149	6695	8.53	8.95	11.76	17.27	≤ 30.00
11ax-HE20	MCS0	181	6855	7.49	7.86	10.69	16.20	≤ 30.00
11ax-HE20	MCS0	185	6875	7.90	7.94	10.93	16.44	≤ 30.00
11ax-HE20	MCS0	189	6895	7.71	7.86	10.80	16.31	≤ 30.00
11ax-HE20	MCS0	213	7015	8.45	8.58	11.53	17.04	≤ 30.00
11ax-HE20	MCS0	229	7095	8.13	8.75	11.46	16.97	≤ 30.00
11ax-HE40	MCS0	35	6125	11.01	11.22	14.13	19.58	≤ 30.00
11ax-HE40	MCS0	59	6245	11.26	11.22	14.25	19.70	≤ 30.00
11ax-HE40	MCS0	91	6405	11.82	11.10	14.49	19.94	≤ 30.00
11ax-HE40	MCS0	99	6445	10.79	10.72	13.77	19.28	≤ 30.00
11ax-HE40	MCS0	107	6485	11.27	11.43	14.36	19.87	≤ 30.00
11ax-HE40	MCS0	115	6525	11.50	11.18	14.35	19.86	≤ 30.00
11ax-HE40	MCS0	123	6565	11.45	11.36	14.42	19.93	≤ 30.00
11ax-HE40	MCS0	147	6685	12.05	12.41	15.24	20.75	≤ 30.00
11ax-HE40	MCS0	179	6845	10.94	11.13	14.05	19.56	≤ 30.00
11ax-HE40	MCS0	187	6885	10.83	10.67	13.76	19.27	≤ 30.00
11ax-HE40	MCS0	195	6925	11.56	10.87	14.24	19.75	≤ 30.00
11ax-HE40	MCS0	211	7005	11.67	11.16	14.43	19.94	≤ 30.00
11ax-HE40	MCS0	227	7085	11.71	11.60	14.67	20.18	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11ax-HE80	MCS0	39	6145	13.95	13.96	16.97	22.42	≤ 30.00
11ax-HE80	MCS0	55	6225	14.57	14.36	17.48	22.93	≤ 30.00
11ax-HE80	MCS0	87	6385	14.61	14.07	17.36	22.81	≤ 30.00
11ax-HE80	MCS0	103	6465	13.97	14.08	17.04	22.55	≤ 30.00
11ax-HE80	MCS0	119	6545	14.07	13.88	16.99	22.50	≤ 30.00
11ax-HE80	MCS0	135	6625	14.23	14.36	17.31	22.82	≤ 30.00
11ax-HE80	MCS0	151	6705	14.58	15.18	17.90	23.41	≤ 30.00
11ax-HE80	MCS0	167	6865	14.36	14.86	17.63	23.14	≤ 30.00
11ax-HE80	MCS0	183	6865	13.57	13.79	16.69	22.20	≤ 30.00
11ax-HE80	MCS0	199	6945	14.47	14.22	17.36	22.87	≤ 30.00
11ax-HE80	MCS0	215	7025	14.73	14.71	17.73	23.24	≤ 30.00
11ax-HE160	MCS0	47	6185	17.01	17.31	20.17	25.62	≤ 30.00
11ax-HE160	MCS0	79	6345	17.23	16.85	20.05	25.50	≤ 30.00
11ax-HE160	MCS0	111	6505	17.08	17.10	20.10	25.61	≤ 30.00
11ax-HE160	MCS0	143	6665	17.31	17.66	20.50	26.01	≤ 30.00
11ax-HE160	MCS0	175	6825	16.87	17.07	19.98	25.49	≤ 30.00
11ax-HE160	MCS0	207	6985	16.48	16.22	19.36	24.87	≤ 30.00
11be-EHT20	MCS0	33	6115	8.75	8.64	11.71	17.16	≤ 30.00
11be-EHT20	MCS0	61	6255	9.15	9.10	12.14	17.59	≤ 30.00
11be-EHT20	MCS0	93	6415	8.53	8.29	11.42	16.87	≤ 30.00
11be-EHT20	MCS0	97	6435	8.44	8.71	11.59	17.10	≤ 30.00
11be-EHT20	MCS0	105	6475	8.58	8.81	11.71	17.22	≤ 30.00
11be-EHT20	MCS0	113	6515	8.62	8.83	11.74	17.25	≤ 30.00
11be-EHT20	MCS0	117	6535	8.57	8.73	11.66	17.17	≤ 30.00
11be-EHT20	MCS0	149	6695	8.81	9.48	12.17	17.68	≤ 30.00
11be-EHT20	MCS0	181	6855	8.61	9.02	11.83	17.34	≤ 30.00
11be-EHT20	MCS0	185	6875	8.65	8.73	11.70	17.21	≤ 30.00
11be-EHT20	MCS0	189	6895	8.37	8.43	11.41	16.92	≤ 30.00
11be-EHT20	MCS0	213	7015	8.77	9.07	11.93	17.44	≤ 30.00
11be-EHT20	MCS0	229	7095	8.95	8.79	11.88	17.39	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11be-EHT40	MCS0	35	6125	11.45	11.65	14.56	20.01	≤ 30.00
11be-EHT40	MCS0	59	6245	12.01	12.10	15.07	20.52	≤ 30.00
11be-EHT40	MCS0	91	6405	11.71	11.01	14.38	19.83	≤ 30.00
11be-EHT40	MCS0	99	6445	11.74	11.73	14.75	20.26	≤ 30.00
11be-EHT40	MCS0	107	6485	11.76	11.74	14.76	20.27	≤ 30.00
11be-EHT40	MCS0	115	6525	11.76	11.75	14.77	20.28	≤ 30.00
11be-EHT40	MCS0	123	6565	12.03	11.41	14.74	20.25	≤ 30.00
11be-EHT40	MCS0	147	6685	12.10	12.55	15.34	20.85	≤ 30.00
11be-EHT40	MCS0	179	6845	11.61	11.95	14.79	20.30	≤ 30.00
11be-EHT40	MCS0	187	6885	11.47	11.60	14.55	20.06	≤ 30.00
11be-EHT40	MCS0	195	6925	11.41	10.76	14.11	19.62	≤ 30.00
11be-EHT40	MCS0	211	7005	11.39	11.09	14.25	19.76	≤ 30.00
11be-EHT40	MCS0	227	7085	11.65	11.36	14.52	20.03	≤ 30.00
11be-EHT80	MCS0	39	6145	14.50	14.36	17.44	22.89	≤ 30.00
11be-EHT80	MCS0	55	6225	14.70	14.20	17.47	22.92	≤ 30.00
11be-EHT80	MCS0	87	6385	14.60	14.18	17.41	22.86	≤ 30.00
11be-EHT80	MCS0	103	6465	14.50	14.04	17.29	22.80	≤ 30.00
11be-EHT80	MCS0	119	6545	14.36	14.31	17.35	22.86	≤ 30.00
11be-EHT80	MCS0	135	6625	14.93	15.01	17.98	23.49	≤ 30.00
11be-EHT80	MCS0	151	6705	14.77	15.27	18.04	23.55	≤ 30.00
11be-EHT80	MCS0	167	6865	14.25	14.84	17.57	23.08	≤ 30.00
11be-EHT80	MCS0	183	6865	13.65	13.86	16.77	22.28	≤ 30.00
11be-EHT80	MCS0	199	6945	14.41	14.05	17.24	22.75	≤ 30.00
11be-EHT80	MCS0	215	7025	14.49	14.75	17.63	23.14	≤ 30.00
11be-EHT160	MCS0	47	6185	17.24	17.33	20.30	25.75	≤ 30.00
11be-EHT160	MCS0	79	6345	17.32	16.95	20.15	25.60	≤ 30.00
11be-EHT160	MCS0	111	6505	17.23	17.17	20.21	25.72	≤ 30.00
11be-EHT160	MCS0	143	6665	17.37	17.85	20.63	26.14	≤ 30.00
11be-EHT160	MCS0	175	6825	16.91	16.98	19.96	25.47	≤ 30.00
11be-EHT160	MCS0	207	6985	16.82	16.68	19.76	25.27	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11be-EHT320	MCS0	63	6265	19.60	19.18	22.41	27.86	≤ 30.00
11be-EHT320	MCS0	95	6425	19.62	19.62	22.63	28.08	≤ 30.00
11be-EHT320	MCS0	127	6585	20.21	19.89	23.06	28.57	≤ 30.00
11be-EHT320	MCS0	159	6745	19.44	19.99	22.73	28.24	≤ 30.00
11be-EHT320	MCS0	191	6905	19.42	19.34	22.39	27.90	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Directional Gain (dBi)

Test Site	SR6	Test Engineer	Xuan
Test Date	2023/11/23		Nss=2

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
CDD Mode								
11ax-HE20	MCS0	33	6115	11.78	11.55	14.68	17.68	≤ 30.00
11ax-HE20	MCS0	61	6255	12.12	12.04	15.09	18.09	≤ 30.00
11ax-HE20	MCS0	93	6415	11.72	10.89	14.34	17.34	≤ 30.00
11ax-HE20	MCS0	97	6435	11.27	10.97	14.13	17.13	≤ 30.00
11ax-HE20	MCS0	105	6475	11.23	11.15	14.20	17.20	≤ 30.00
11ax-HE20	MCS0	113	6515	11.74	11.63	14.70	17.70	≤ 30.00
11ax-HE20	MCS0	117	6535	11.86	11.46	14.67	17.67	≤ 30.00
11ax-HE20	MCS0	149	6695	11.68	12.10	14.91	17.91	≤ 30.00
11ax-HE20	MCS0	181	6855	11.20	11.54	14.38	17.38	≤ 30.00
11ax-HE20	MCS0	185	6875	11.14	11.44	14.30	17.30	≤ 30.00
11ax-HE20	MCS0	189	6895	11.60	11.65	14.64	17.64	≤ 30.00
11ax-HE20	MCS0	213	7015	12.01	11.71	14.87	17.87	≤ 30.00
11ax-HE20	MCS0	229	7095	12.09	12.45	15.28	18.28	≤ 30.00
11be-EHT20	MCS0	33	6115	11.43	11.75	14.60	17.60	≤ 30.00
11be-EHT20	MCS0	61	6255	12.20	12.04	15.13	18.13	≤ 30.00
11be-EHT20	MCS0	93	6415	11.72	11.23	14.49	17.49	≤ 30.00
11be-EHT20	MCS0	97	6435	11.44	11.06	14.26	17.26	≤ 30.00
11be-EHT20	MCS0	105	6475	11.33	11.49	14.42	17.42	≤ 30.00
11be-EHT20	MCS0	113	6515	12.08	11.70	14.90	17.90	≤ 30.00
11be-EHT20	MCS0	117	6535	12.08	11.95	15.03	18.03	≤ 30.00
11be-EHT20	MCS0	149	6695	11.83	11.38	14.62	17.62	≤ 30.00
11be-EHT20	MCS0	181	6855	11.71	12.20	14.97	17.97	≤ 30.00
11be-EHT20	MCS0	185	6875	11.75	11.91	14.84	17.84	≤ 30.00
11be-EHT20	MCS0	189	6895	11.62	11.85	14.75	17.75	≤ 30.00
11be-EHT20	MCS0	213	7015	12.02	11.71	14.88	17.88	≤ 30.00
11be-EHT20	MCS0	229	7095	12.19	12.26	15.24	18.24	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total AV Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11be-EHT320	MCS0	63	6265	22.76	22.32	25.56	28.56	≤ 30.00
11be-EHT320	MCS0	95	6425	22.27	21.91	25.10	28.10	≤ 30.00
11be-EHT320	MCS0	127	6585	21.51	21.34	24.44	27.44	≤ 30.00
11be-EHT320	MCS0	159	6745	20.68	20.97	23.84	26.84	≤ 30.00
11be-EHT320	MCS0	191	6905	21.31	21.06	24.20	27.20	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Directional Gain (dBi).

6.4. Power Spectral Density

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band.


6.4.2. Test Procedure Used

KDB 789033 D02v02r01-SectionF

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

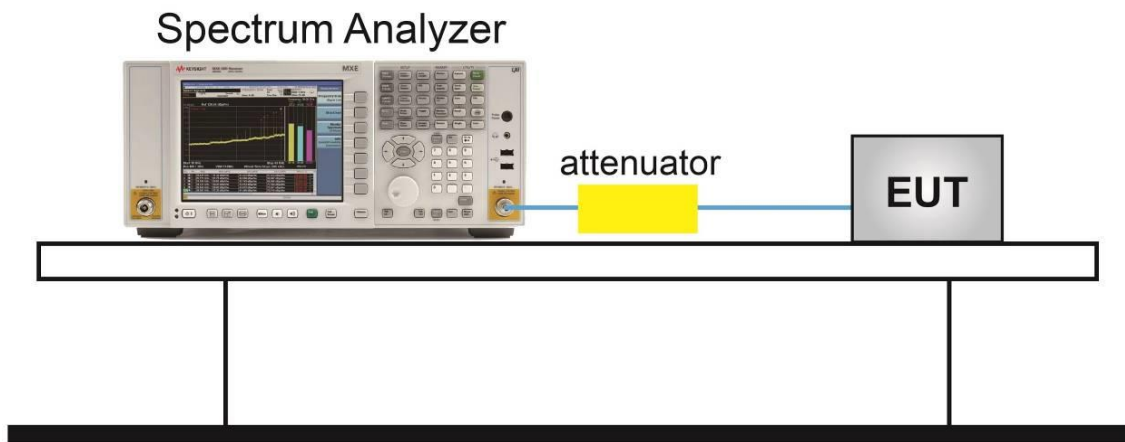

6.4.5. Test Result

Test Site	SR6	Test Engineer	Xuan
Test Date	2023/11/23~2023/11/24	Test Mode	Nss=1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11ax-HE20	MCS0	33	6115	-4.309	-4.347	-1.318	97.52%	4.24	≤ 5.00
11ax-HE20	MCS0	61	6255	-4.681	-4.254	-1.452	97.52%	4.11	≤ 5.00
11ax-HE20	MCS0	93	6415	-4.168	-4.329	-1.237	97.52%	4.32	≤ 5.00
11ax-HE20	MCS0	97	6435	-4.486	-4.475	-1.470	97.52%	4.15	≤ 5.00
11ax-HE20	MCS0	105	6475	-4.456	-4.321	-1.378	97.52%	4.24	≤ 5.00
11ax-HE20	MCS0	113	6515	-4.637	-4.240	-1.424	97.52%	4.20	≤ 5.00
11ax-HE20	MCS0	117	6535	-4.560	-4.264	-1.399	97.52%	4.22	≤ 5.00
11ax-HE20	MCS0	149	6695	-4.373	-4.136	-1.243	97.52%	4.38	≤ 5.00
11ax-HE20	MCS0	181	6855	-4.995	-4.106	-1.517	97.52%	4.10	≤ 5.00
11ax-HE20	MCS0	185	6875	-4.625	-4.026	-1.305	97.52%	4.31	≤ 5.00
11ax-HE20	MCS0	189	6895	-4.609	-4.205	-1.392	97.52%	4.23	≤ 5.00
11ax-HE20	MCS0	213	7015	-4.482	-4.165	-1.310	97.52%	4.31	≤ 5.00
11ax-HE20	MCS0	229	7095	-4.702	-4.350	-1.512	97.52%	4.11	≤ 5.00
11ax-HE40	MCS0	35	6125	-4.543	-4.188	-1.352	98.32%	4.17	≤ 5.00
11ax-HE40	MCS0	59	6245	-4.663	-4.391	-1.515	98.32%	4.01	≤ 5.00
11ax-HE40	MCS0	91	6405	-4.134	-4.387	-1.248	98.32%	4.28	≤ 5.00
11ax-HE40	MCS0	99	6445	-4.747	-4.438	-1.579	98.32%	4.00	≤ 5.00
11ax-HE40	MCS0	107	6485	-4.164	-4.164	-1.154	98.32%	4.43	≤ 5.00
11ax-HE40	MCS0	115	6525	-4.186	-4.227	-1.196	98.32%	4.39	≤ 5.00
11ax-HE40	MCS0	123	6565	-4.220	-4.659	-1.424	98.32%	4.16	≤ 5.00
11ax-HE40	MCS0	147	6685	-4.528	-3.929	-1.208	98.32%	4.38	≤ 5.00
11ax-HE40	MCS0	179	6845	-4.753	-4.272	-1.496	98.32%	4.09	≤ 5.00
11ax-HE40	MCS0	187	6885	-4.559	-4.616	-1.577	98.32%	4.01	≤ 5.00
11ax-HE40	MCS0	195	6925	-4.324	-4.089	-1.195	98.32%	4.39	≤ 5.00
11ax-HE40	MCS0	211	7005	-4.133	-4.565	-1.333	98.32%	4.25	≤ 5.00
11ax-HE40	MCS0	227	7085	-4.537	-4.394	-1.455	98.32%	4.13	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11ax-HE80	MCS0	39	6145	-4.460	-4.553	-1.496	98.16%	4.03	≤ 5.00
11ax-HE80	MCS0	55	6225	-4.418	-4.065	-1.228	98.16%	4.30	≤ 5.00
11ax-HE80	MCS0	87	6385	-4.004	-4.463	-1.217	98.16%	4.31	≤ 5.00
11ax-HE80	MCS0	103	6465	-4.436	-4.137	-1.274	98.16%	4.32	≤ 5.00
11ax-HE80	MCS0	119	6545	-4.537	-4.557	-1.537	98.16%	4.05	≤ 5.00
11ax-HE80	MCS0	135	6625	-4.829	-4.261	-1.525	98.16%	4.07	≤ 5.00
11ax-HE80	MCS0	151	6705	-4.590	-3.864	-1.202	98.16%	4.39	≤ 5.00
11ax-HE80	MCS0	167	6865	-4.553	-3.927	-1.218	98.16%	4.37	≤ 5.00
11ax-HE80	MCS0	183	6865	-4.806	-4.403	-1.590	98.16%	4.00	≤ 5.00
11ax-HE80	MCS0	199	6945	-4.255	-4.164	-1.199	98.16%	4.39	≤ 5.00
11ax-HE80	MCS0	215	7025	-4.178	-4.241	-1.199	98.16%	4.39	≤ 5.00
11ax-HE160	MCS0	47	6185	-4.465	-4.100	-1.268	97.55%	4.29	≤ 5.00
11ax-HE160	MCS0	79	6345	-4.050	-4.607	-1.309	97.55%	4.25	≤ 5.00
11ax-HE160	MCS0	111	6505	-4.444	-4.143	-1.281	97.55%	4.34	≤ 5.00
11ax-HE160	MCS0	143	6665	-4.659	-4.055	-1.336	97.55%	4.28	≤ 5.00
11ax-HE160	MCS0	175	6825	-4.495	-4.074	-1.269	97.55%	4.35	≤ 5.00
11ax-HE160	MCS0	207	6985	-4.863	-4.309	-1.567	97.55%	4.05	≤ 5.00
11be-EHT20	MCS0	33	6115	-4.203	-4.163	-1.173	98.47%	4.34	≤ 5.00
11be-EHT20	MCS0	61	6255	-4.364	-4.263	-1.303	98.47%	4.21	≤ 5.00
11be-EHT20	MCS0	93	6415	-4.550	-4.440	-1.484	98.47%	4.03	≤ 5.00
11be-EHT20	MCS0	97	6435	-4.402	-4.054	-1.214	98.47%	4.36	≤ 5.00
11be-EHT20	MCS0	105	6475	-4.428	-4.048	-1.224	98.47%	4.35	≤ 5.00
11be-EHT20	MCS0	113	6515	-4.380	-4.166	-1.261	98.47%	4.32	≤ 5.00
11be-EHT20	MCS0	117	6535	-4.502	-4.064	-1.267	98.47%	4.31	≤ 5.00
11be-EHT20	MCS0	149	6695	-4.709	-4.001	-1.330	98.47%	4.25	≤ 5.00
11be-EHT20	MCS0	181	6855	-4.509	-3.920	-1.194	98.47%	4.38	≤ 5.00
11be-EHT20	MCS0	185	6875	-4.413	-4.080	-1.233	98.47%	4.34	≤ 5.00
11be-EHT20	MCS0	189	6895	-4.602	-4.076	-1.321	98.47%	4.26	≤ 5.00
11be-EHT20	MCS0	213	7015	-4.400	-4.162	-1.269	98.47%	4.31	≤ 5.00
11be-EHT20	MCS0	229	7095	-4.799	-4.218	-1.488	98.47%	4.09	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11be-EHT40	MCS0	35	6125	-4.620	-4.015	-1.297	97.79%	4.25	≤ 5.00
11be-EHT40	MCS0	59	6245	-4.621	-4.102	-1.343	97.79%	4.20	≤ 5.00
11be-EHT40	MCS0	91	6405	-4.199	-4.921	-1.535	97.79%	4.01	≤ 5.00
11be-EHT40	MCS0	99	6445	-4.515	-3.938	-1.207	97.79%	4.40	≤ 5.00
11be-EHT40	MCS0	107	6485	-4.402	-4.134	-1.256	97.79%	4.35	≤ 5.00
11be-EHT40	MCS0	115	6525	-4.444	-4.401	-1.412	97.79%	4.19	≤ 5.00
11be-EHT40	MCS0	123	6565	-4.424	-4.311	-1.357	97.79%	4.25	≤ 5.00
11be-EHT40	MCS0	147	6685	-4.563	-4.042	-1.284	97.79%	4.32	≤ 5.00
11be-EHT40	MCS0	179	6845	-4.794	-3.993	-1.365	97.79%	4.24	≤ 5.00
11be-EHT40	MCS0	187	6885	-4.576	-4.364	-1.458	97.79%	4.15	≤ 5.00
11be-EHT40	MCS0	195	6925	-4.079	-4.853	-1.438	97.79%	4.17	≤ 5.00
11be-EHT40	MCS0	211	7005	-4.233	-4.530	-1.369	97.79%	4.24	≤ 5.00
11be-EHT40	MCS0	227	7085	-4.122	-4.453	-1.274	97.79%	4.33	≤ 5.00
11be-EHT80	MCS0	39	6145	-4.146	-4.339	-1.231	96.90%	4.36	≤ 5.00
11be-EHT80	MCS0	55	6225	-4.321	-4.316	-1.308	96.90%	4.28	≤ 5.00
11be-EHT80	MCS0	87	6385	-4.051	-4.485	-1.252	96.90%	4.33	≤ 5.00
11be-EHT80	MCS0	103	6465	-4.400	-4.274	-1.326	96.90%	4.32	≤ 5.00
11be-EHT80	MCS0	119	6545	-4.200	-4.602	-1.386	96.90%	4.26	≤ 5.00
11be-EHT80	MCS0	135	6625	-4.642	-4.231	-1.421	96.90%	4.23	≤ 5.00
11be-EHT80	MCS0	151	6705	-4.549	-4.038	-1.276	96.90%	4.37	≤ 5.00
11be-EHT80	MCS0	167	6865	-4.527	-3.999	-1.245	96.90%	4.40	≤ 5.00
11be-EHT80	MCS0	183	6865	-4.406	-4.362	-1.374	96.90%	4.27	≤ 5.00
11be-EHT80	MCS0	199	6945	-4.214	-4.320	-1.256	96.90%	4.39	≤ 5.00
11be-EHT80	MCS0	215	7025	-4.993	-4.213	-1.575	96.90%	4.07	≤ 5.00
11be-EHT160	MCS0	47	6185	-4.611	-4.132	-1.355	97.73%	4.20	≤ 5.00
11be-EHT160	MCS0	79	6345	-4.111	-4.451	-1.267	97.73%	4.28	≤ 5.00
11be-EHT160	MCS0	111	6505	-4.217	-4.305	-1.250	97.73%	4.36	≤ 5.00
11be-EHT160	MCS0	143	6665	-4.900	-3.630	-1.208	97.73%	4.40	≤ 5.00
11be-EHT160	MCS0	175	6825	-4.421	-4.198	-1.298	97.73%	4.31	≤ 5.00
11be-EHT160	MCS0	207	6985	-4.083	-4.361	-1.209	97.73%	4.40	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11be-EHT320	MCS0	63	6265	-4.522	-4.494	-1.498	96.53%	4.11	≤ 5.00
11be-EHT320	MCS0	95	6425	-4.097	-4.472	-1.270	96.53%	4.33	≤ 5.00
11be-EHT320	MCS0	127	6585	-4.300	-4.777	-1.522	96.53%	4.14	≤ 5.00
11be-EHT320	MCS0	159	6745	-5.010	-4.083	-1.512	96.53%	4.15	≤ 5.00
11be-EHT320	MCS0	191	6905	-4.395	-4.710	-1.539	96.53%	4.12	≤ 5.00

Note 1: Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$

Note 2: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = Total PSD (dBm/MHz) + $10 \cdot \log (1/\text{Duty Cycle})$ + Directional Gain (dBi).

Test Site	SR6	Test Engineer	Xuan
Test Date	2023/11/24~2023/12/8	Test Mode	Nss=2

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11ax-HE20	MCS0	33	6115	-1.756	-0.898	1.704	97.52%	4.81	≤ 5.00
11ax-HE20	MCS0	61	6255	-1.511	-0.919	1.805	97.52%	4.91	≤ 5.00
11ax-HE20	MCS0	93	6415	-1.230	-1.392	1.700	97.52%	4.81	≤ 5.00
11ax-HE20	MCS0	97	6435	-1.845	-1.324	1.434	97.52%	4.54	≤ 5.00
11ax-HE20	MCS0	105	6475	-1.916	-1.269	1.430	97.52%	4.54	≤ 5.00
11ax-HE20	MCS0	113	6515	-1.370	-1.080	1.788	97.52%	4.90	≤ 5.00
11ax-HE20	MCS0	117	6535	-1.254	-1.209	1.779	97.52%	4.89	≤ 5.00
11ax-HE20	MCS0	149	6695	-1.680	-1.160	1.598	97.52%	4.71	≤ 5.00
11ax-HE20	MCS0	181	6855	-1.569	-1.021	1.724	97.52%	4.83	≤ 5.00
11ax-HE20	MCS0	185	6875	-2.074	-1.178	1.407	97.52%	4.52	≤ 5.00
11ax-HE20	MCS0	189	6895	-1.497	-1.035	1.750	97.52%	4.86	≤ 5.00
11ax-HE20	MCS0	213	7015	-1.151	-1.322	1.775	97.52%	4.88	≤ 5.00
11ax-HE20	MCS0	229	7095	-1.520	-1.043	1.735	97.52%	4.84	≤ 5.00
11be-EHT20	MCS0	33	6115	-1.425	-0.968	1.820	98.47%	4.89	≤ 5.00
11be-EHT20	MCS0	61	6255	-1.483	-0.942	1.806	98.47%	4.87	≤ 5.00
11be-EHT20	MCS0	93	6415	-1.042	-1.588	1.704	98.47%	4.77	≤ 5.00
11be-EHT20	MCS0	97	6435	-1.364	-1.251	1.703	98.47%	4.77	≤ 5.00
11be-EHT20	MCS0	105	6475	-1.529	-1.345	1.574	98.47%	4.64	≤ 5.00
11be-EHT20	MCS0	113	6515	-1.330	-1.186	1.753	98.47%	4.82	≤ 5.00
11be-EHT20	MCS0	117	6535	-1.132	-1.201	1.844	98.47%	4.91	≤ 5.00
11be-EHT20	MCS0	149	6695	-1.859	-0.911	1.651	98.47%	4.72	≤ 5.00
11be-EHT20	MCS0	181	6855	-1.640	-0.910	1.751	98.47%	4.82	≤ 5.00
11be-EHT20	MCS0	185	6875	-1.605	-1.012	1.712	98.47%	4.78	≤ 5.00
11be-EHT20	MCS0	189	6895	-1.700	-1.279	1.526	98.47%	4.59	≤ 5.00
11be-EHT20	MCS0	213	7015	-1.447	-1.660	1.458	98.47%	4.53	≤ 5.00
11be-EHT20	MCS0	229	7095	-1.348	-1.144	1.765	98.47%	4.83	≤ 5.00


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11be-EHT320	MCS0	63	6265	-1.432	-1.602	1.494	96.53%	4.65	≤ 5.00
11be-EHT320	MCS0	95	6425	-2.419	-2.334	0.634	96.53%	3.79	≤ 5.00
11be-EHT320	MCS0	127	6585	-2.574	-3.171	0.148	96.53%	3.30	≤ 5.00
11be-EHT320	MCS0	159	6745	-3.920	-3.082	-0.471	96.53%	2.68	≤ 5.00
11be-EHT320	MCS0	191	6905	-2.657	-2.719	0.322	96.53%	3.48	≤ 5.00

Note 1: Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$


Note 2: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = Total PSD (dBm/MHz) + $10 \cdot \log (1/\text{Duty Cycle})$ + Directional Gain (dBi).

802.11ax-HE20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 33 (6115MHz)

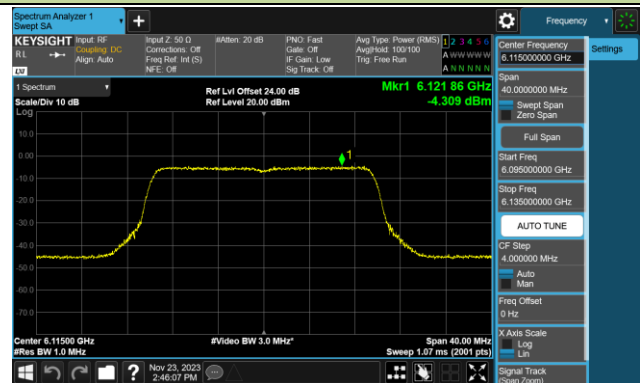


Channel 61 (6255MHz)

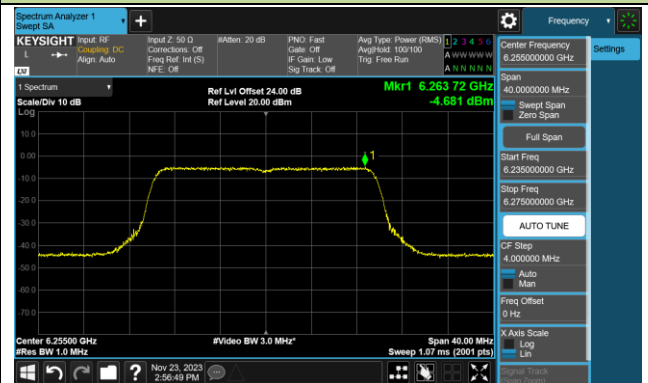


Channel 93 (6415MHz)

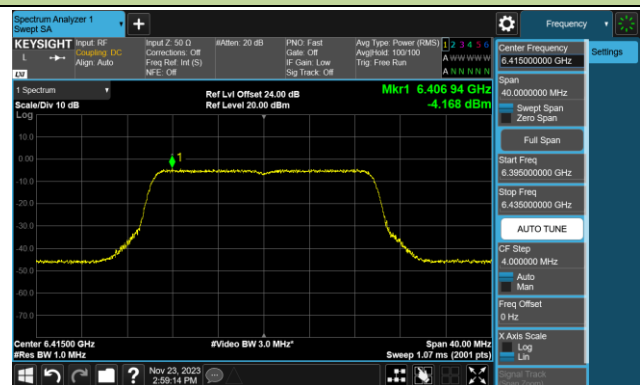


Channel 97 (6435MHz)

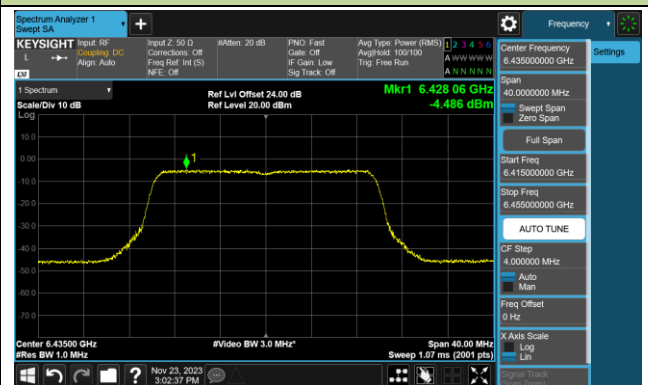


Channel 105 (6475MHz)

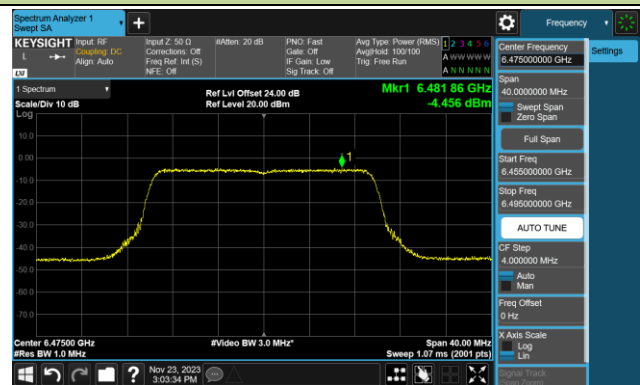


Channel 113 (6515MHz)

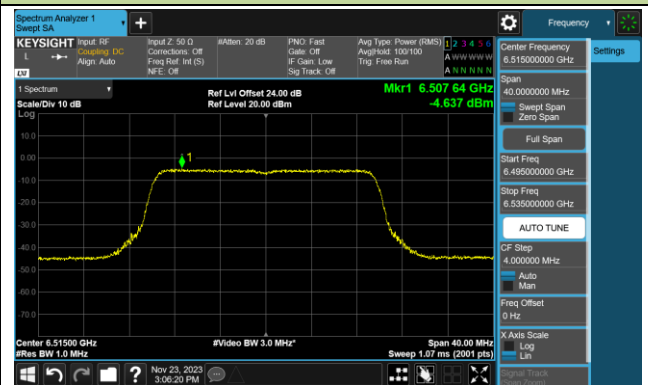

Channel 117 (6535MHz)

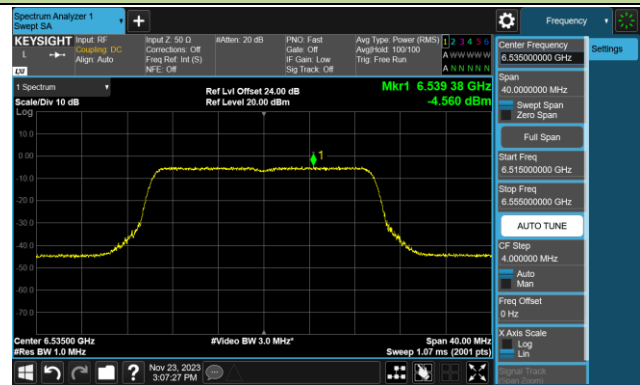


Channel 149 (6695MHz)

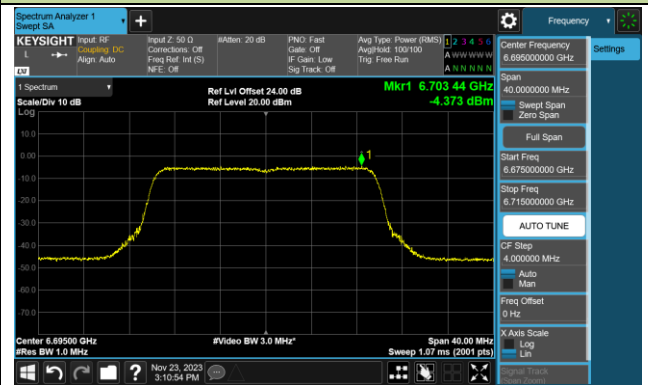


802.11ax-HE20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 181 (6855MHz)

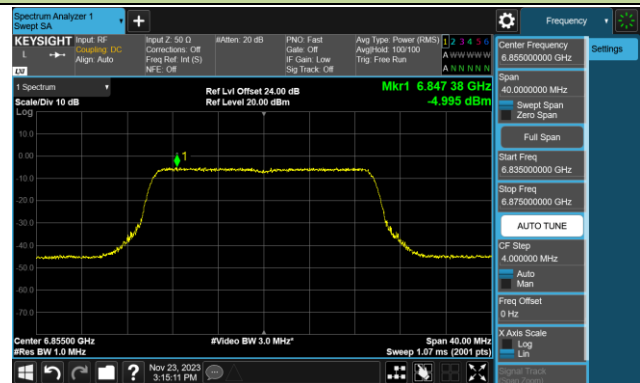


Channel 185 (6875MHz)

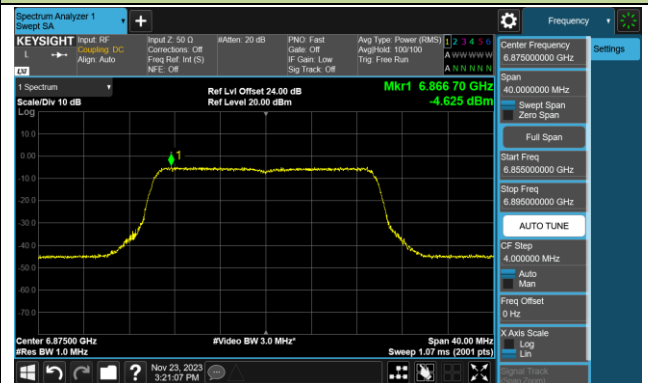


Channel 189 (6895MHz)

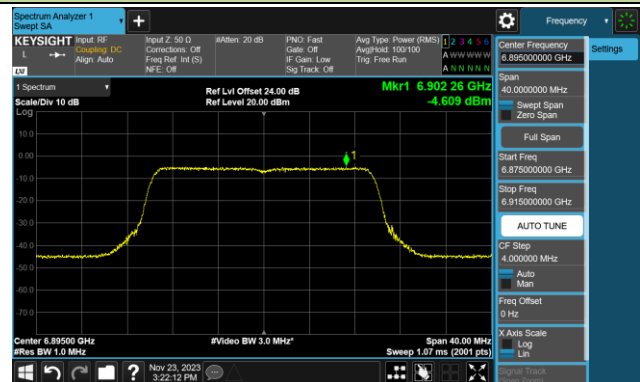

Channel 213 (7015MHz)

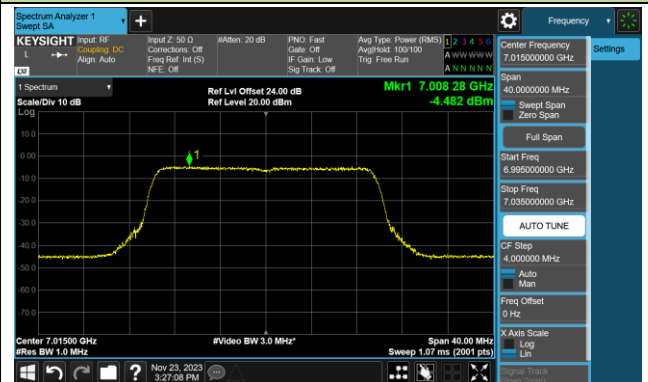


Channel 229 (7095MHz)

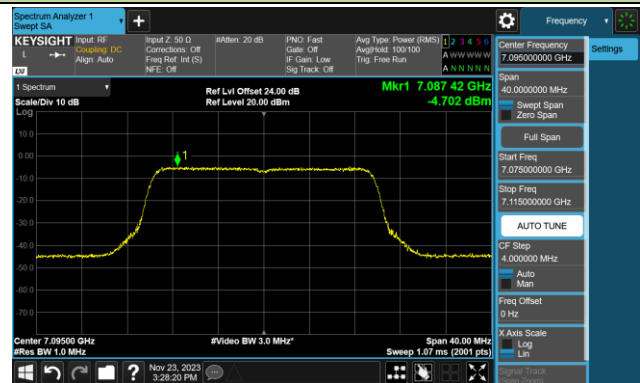


802.11ax-HE40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 35 (6125MHz)

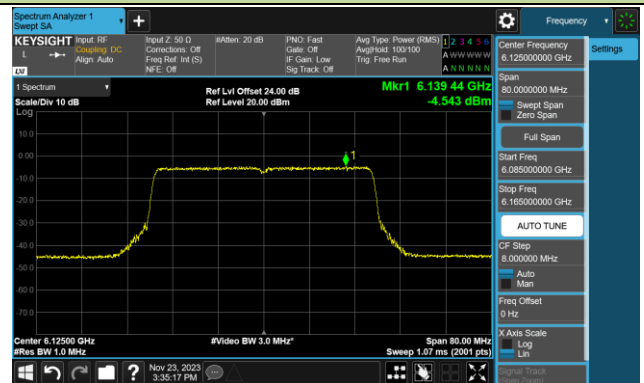


Channel 59 (6245MHz)

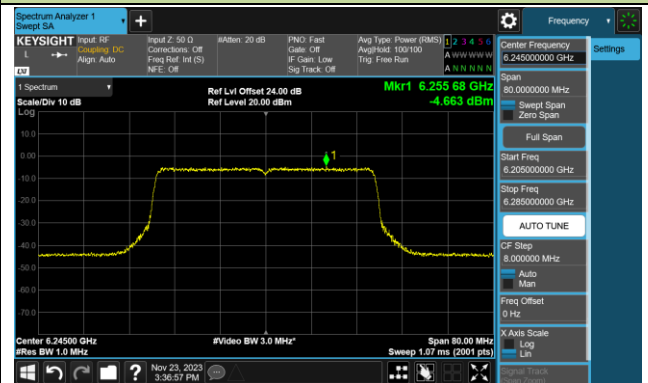


Channel 91 (6405MHz)

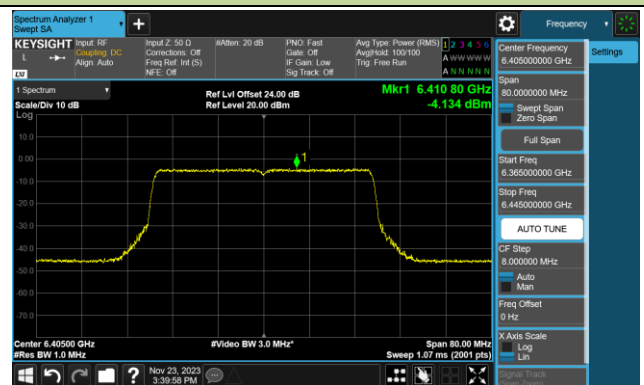


Channel 99 (6445MHz)

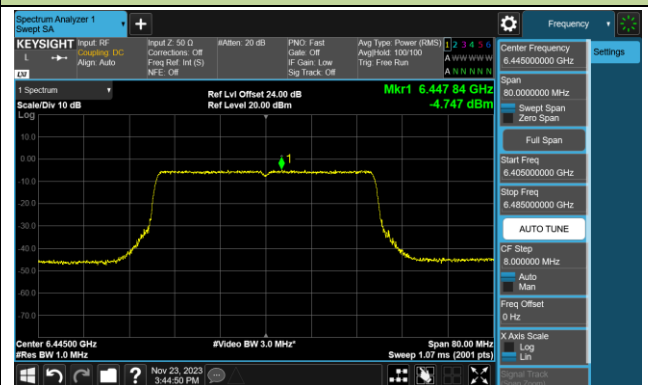


Channel 107 (6485MHz)

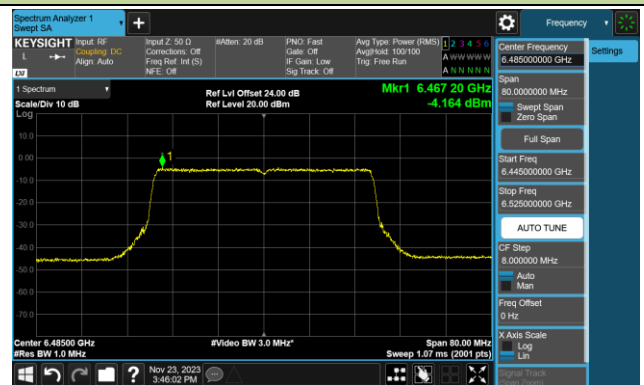


Channel 115 (6525MHz)

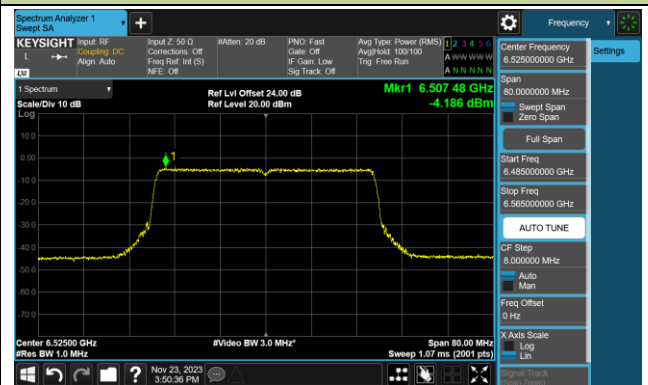

Channel 123 (6565MHz)

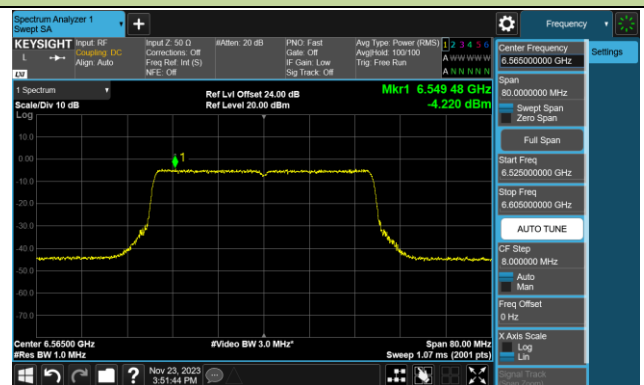


Channel 147 (6685MHz)

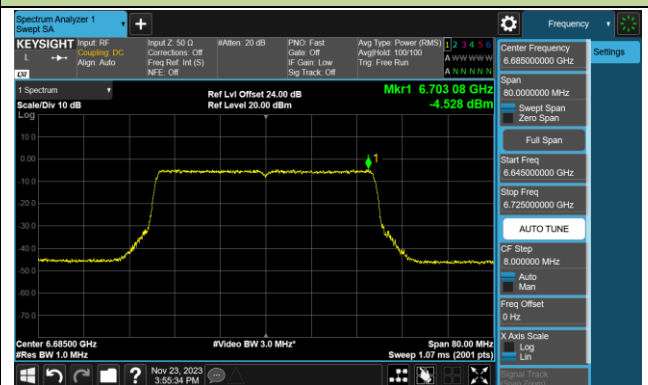


802.11ax-HE40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 179 (6845MHz)

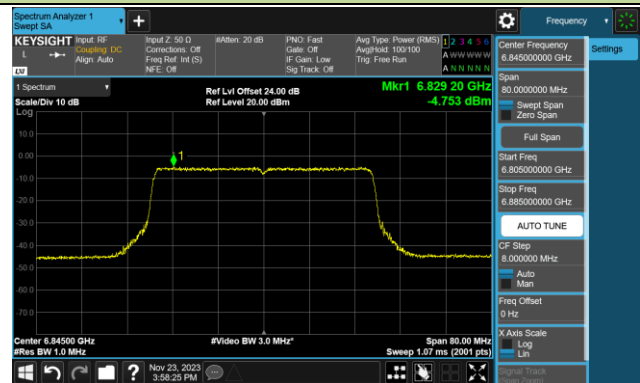


Channel 187 (6885MHz)

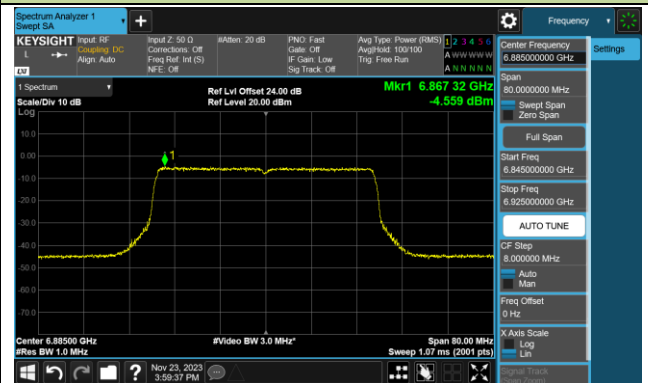


Channel 195 (6925MHz)

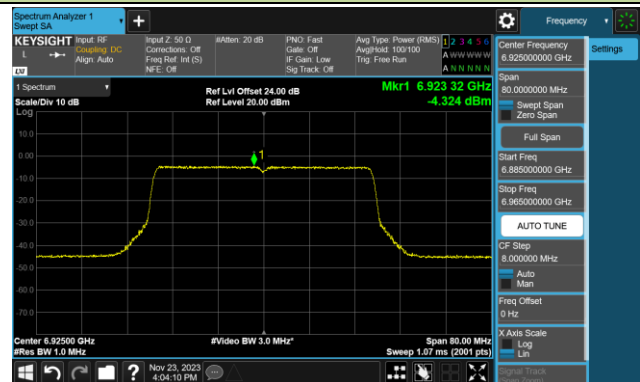

Channel 211 (7005MHz)

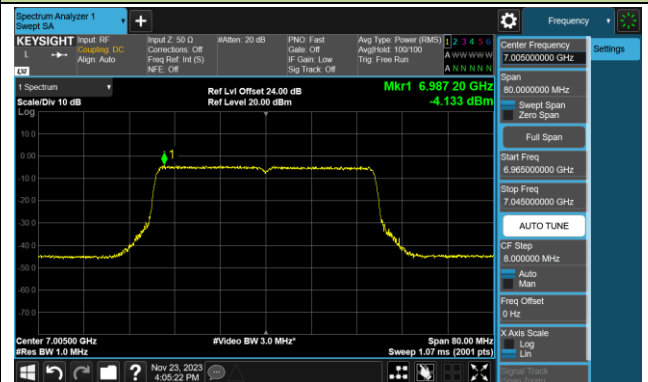


Channel 227 (7085MHz)

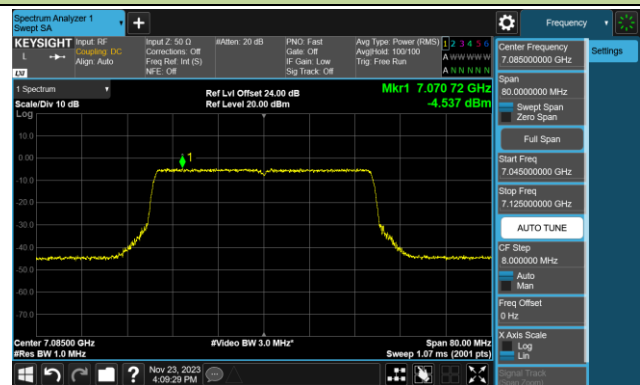


802.11ax-HE80 Power Spectral Density- Ant 0 (Nss = 1)


Channel 39 (6145MHz)

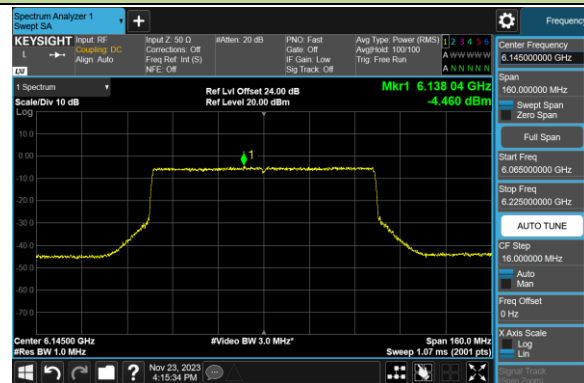


Channel 55 (6225MHz)

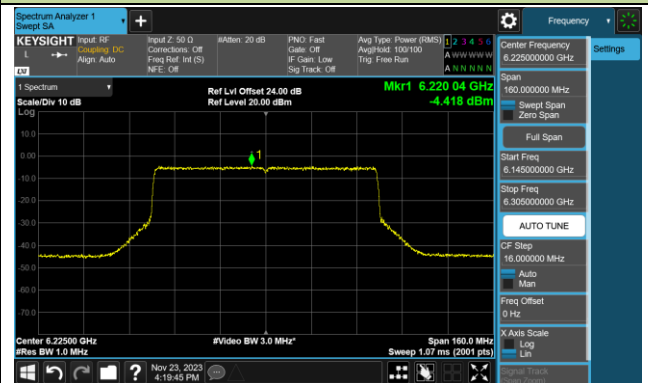


Channel 87 (6385MHz)

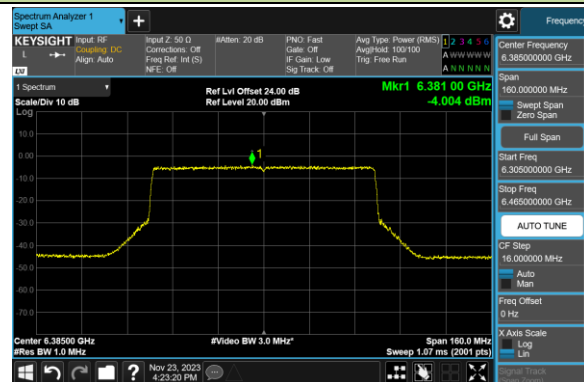


Channel 103 (6465MHz)

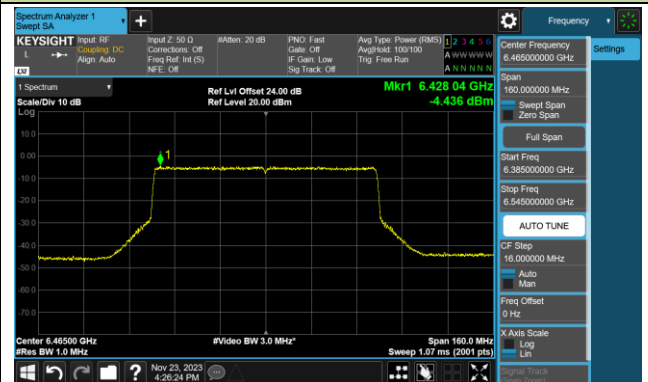


Channel 119 (6545MHz)

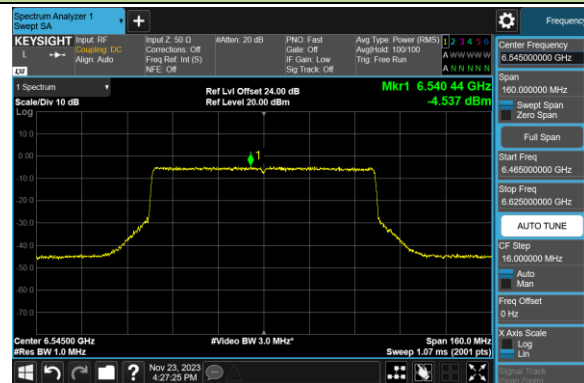


Channel 135 (6625MHz)

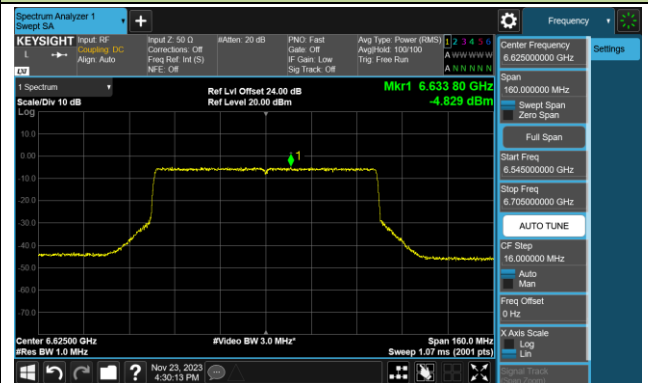

Channel 151 (6705MHz)

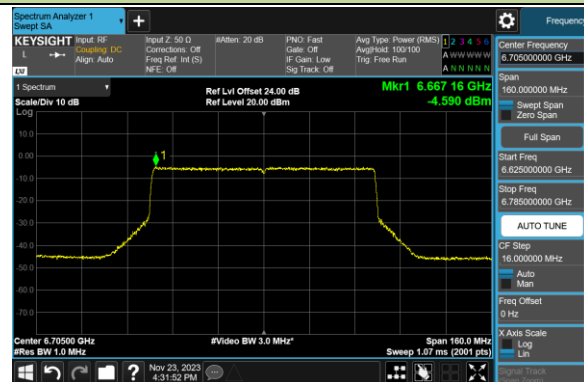


Channel 167 (6785MHz)

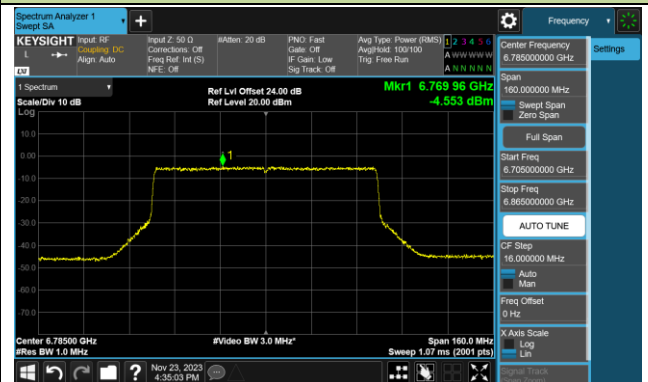


802.11ax-HE80 Power Spectral Density- Ant 0 (Nss = 1)


Channel 183 (6865MHz)

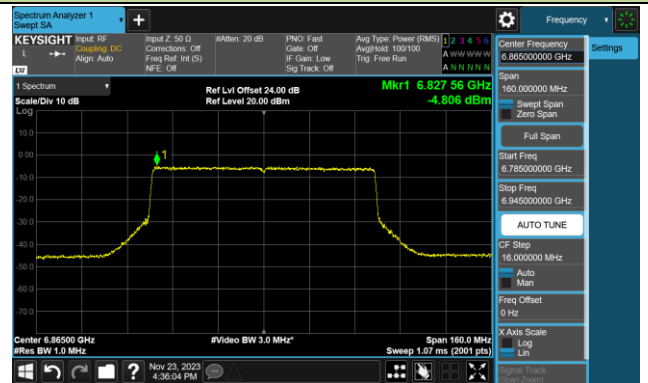

Channel 199 (6945MHz)

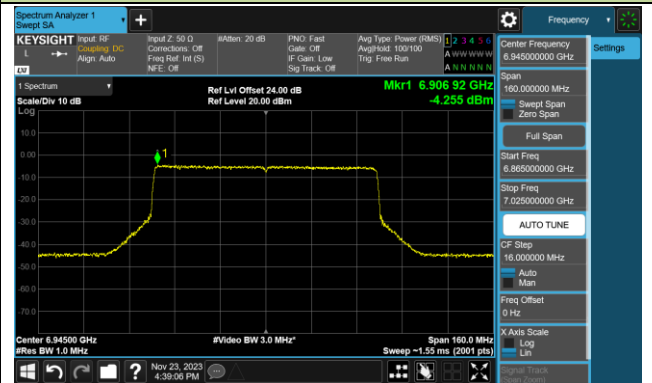


Channel 215 (7025MHz)

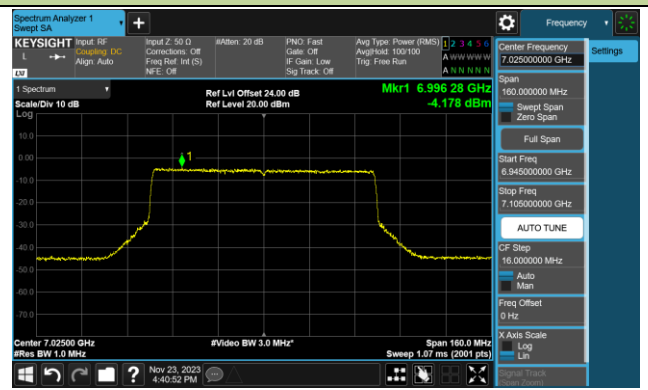


802.11ax-HE160 Power Spectral Density- Ant 0 (Nss = 1)


Channel 47 (6185MHz)

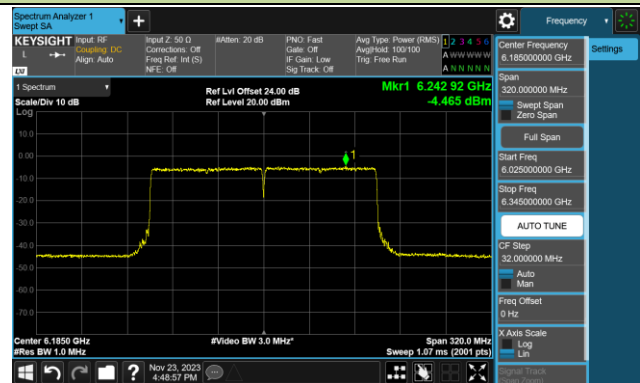


Channel 79 (6345MHz)

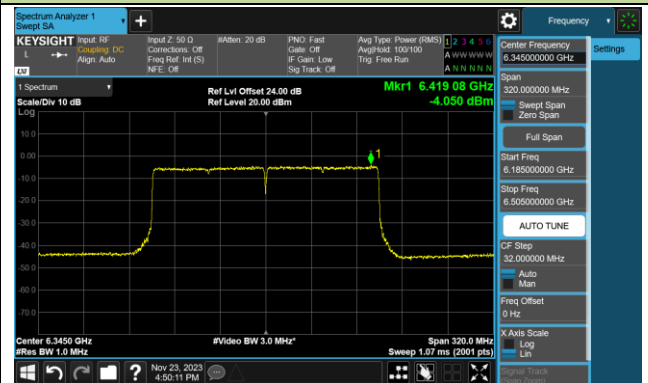


Channel 111 (6505MHz)

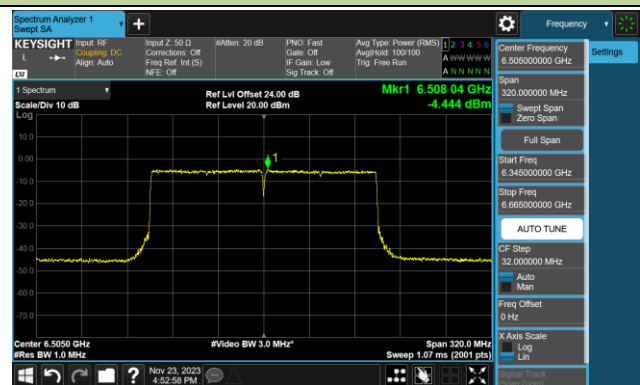


Channel 143 (6665MHz)

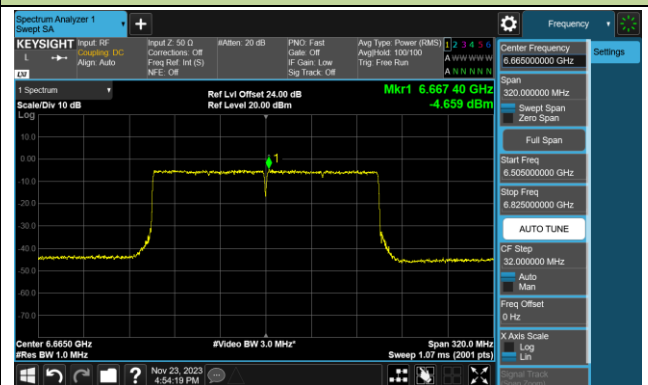

Channel 175 (6825MHz)

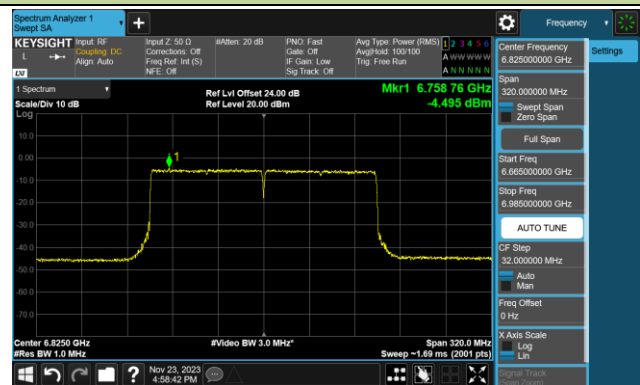


Channel 207 (6985MHz)

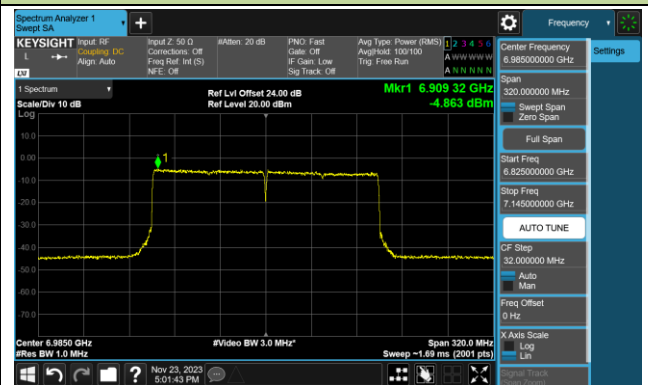


802.11be-EHT20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 33 (6115MHz)

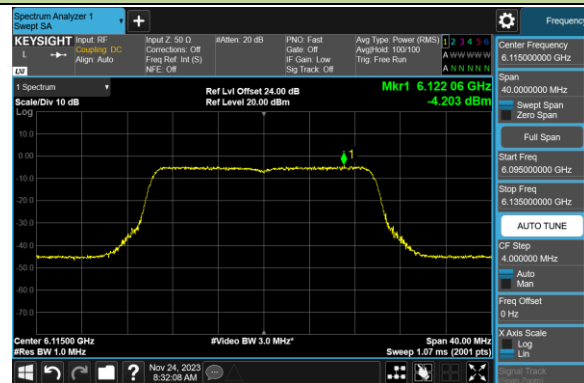


Channel 61 (6255MHz)

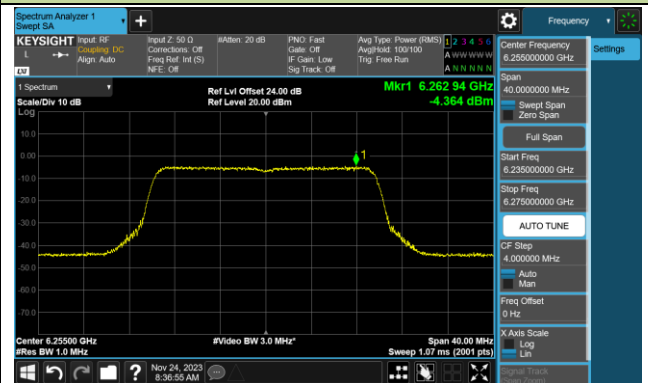


Channel 93 (6415MHz)

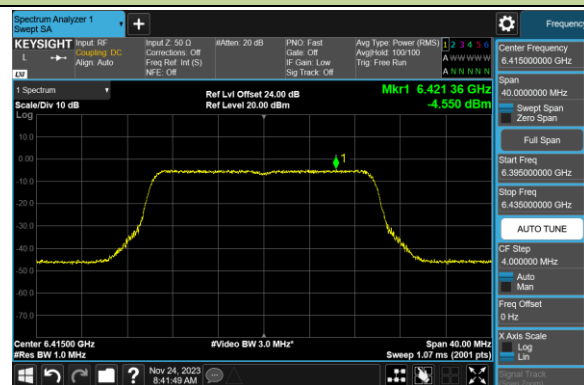


Channel 97 (6435MHz)

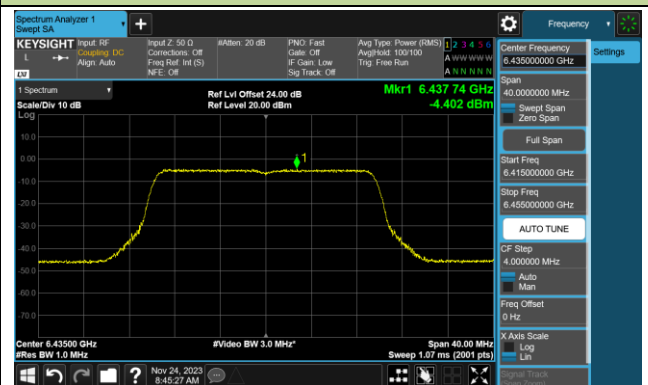


Channel 105 (6475MHz)

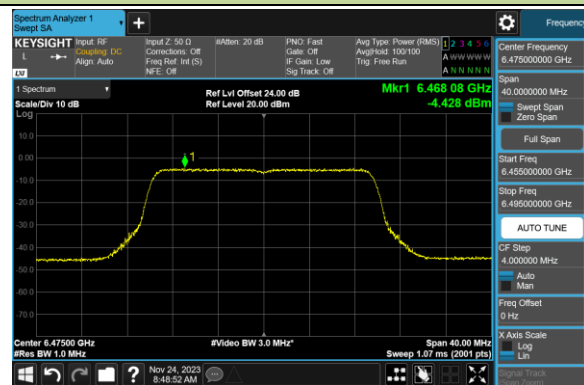


Channel 113 (6515MHz)

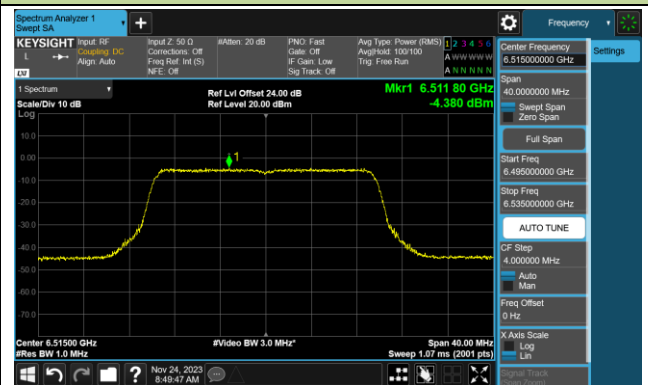

Channel 117 (6535MHz)

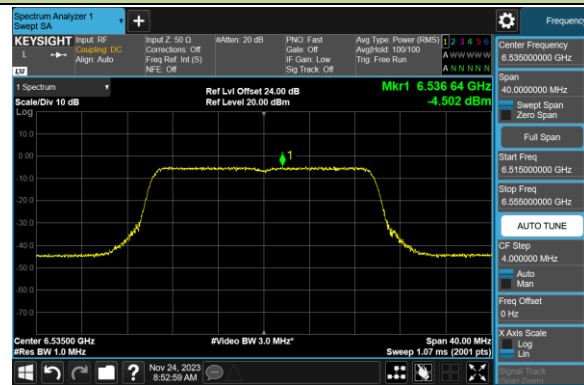


Channel 149 (6695MHz)

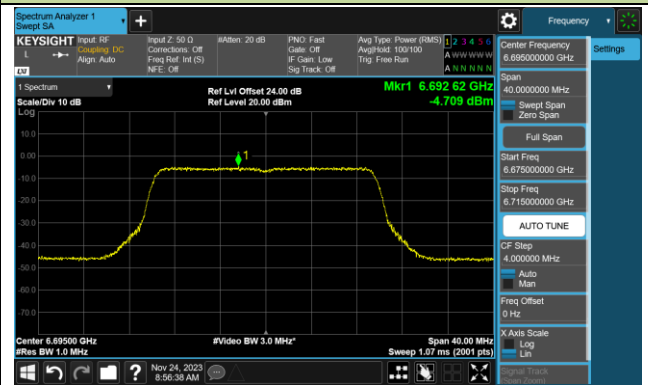


802.11be-EHT20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 181 (6855MHz)

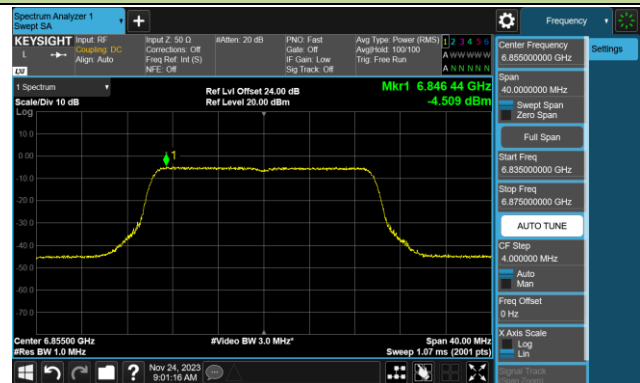


Channel 185 (6875MHz)

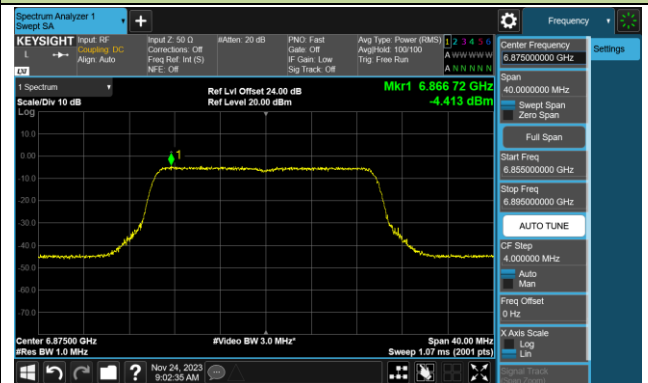

Channel 189 (6895MHz)

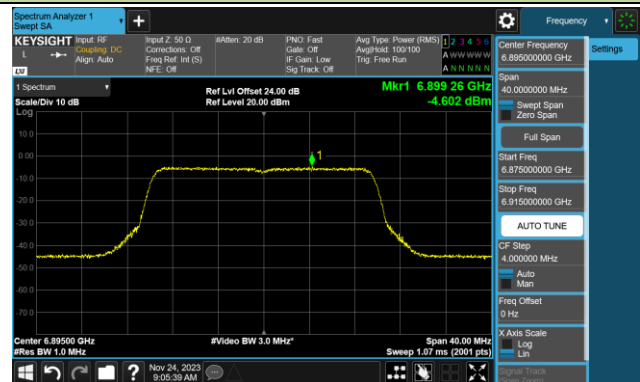

Channel 213 (7015MHz)

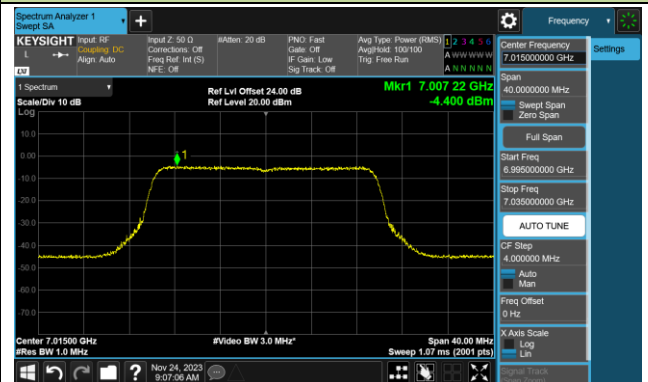

Channel 229 (7095MHz)

