

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.03	0.07	12.1	30	Pass
NVNT	a	5785	Ant1	12.37	0.07	12.44	30	Pass
NVNT	a	5825	Ant1	12.3	0.07	12.37	30	Pass
NVNT	a	5745	Ant2	11.33	0.07	11.4	30	Pass
NVNT	a	5785	Ant2	11.49	0.07	11.56	30	Pass
NVNT	a	5825	Ant2	11.64	0.07	11.71	30	Pass
NVNT	n20	5745	Ant1	11.99	0.04	12.03	30	Pass
NVNT	n20	5785	Ant1	12.4	0.04	12.44	30	Pass
NVNT	n20	5825	Ant1	12.26	0.04	12.3	30	Pass
NVNT	n20	5745	Ant2	11.38	0.04	11.42	30	Pass
NVNT	n20	5785	Ant2	11.57	0.04	11.61	30	Pass
NVNT	n20	5825	Ant2	11.74	0.04	11.78	30	Pass
NVNT	n40	5755	Ant1	12.32	0.04	12.36	30	Pass
NVNT	n40	5795	Ant1	12.63	0.04	12.67	30	Pass
NVNT	n40	5755	Ant2	11.52	0.04	11.56	30	Pass
NVNT	n40	5795	Ant2	11.77	0.04	11.81	30	Pass
NVNT	ac20	5745	Ant1	12	0.04	12.04	30	Pass
NVNT	ac20	5785	Ant1	12.45	0.04	12.49	30	Pass
NVNT	ac20	5825	Ant1	12.29	0.04	12.33	30	Pass
NVNT	ac20	5745	Ant2	11.39	0.04	11.43	30	Pass
NVNT	ac20	5785	Ant2	11.56	0.04	11.6	30	Pass
NVNT	ac20	5825	Ant2	11.74	0.04	11.78	30	Pass
NVNT	ac40	5755	Ant1	12.23	0.04	12.27	30	Pass
NVNT	ac40	5795	Ant1	12.62	0.04	12.66	30	Pass
NVNT	ac40	5755	Ant2	11.52	0.04	11.56	30	Pass
NVNT	ac40	5795	Ant2	11.81	0.04	11.85	30	Pass
NVNT	ac80	5775	Ant1	12.67	0.04	12.71	30	Pass
NVNT	ac80	5775	Ant2	11.81	0.04	11.85	30	Pass
NVNT	ax20	5745	Ant1	11.97	0.04	12.01	30	Pass
NVNT	ax20	5785	Ant1	12.28	0.04	12.32	30	Pass
NVNT	ax20	5825	Ant1	12.2	0.04	12.24	30	Pass
NVNT	ax20	5745	Ant2	11.29	0.04	11.33	30	Pass
NVNT	ax20	5785	Ant2	11.44	0.04	11.48	30	Pass
NVNT	ax20	5825	Ant2	11.59	0.04	11.63	30	Pass
NVNT	ax40	5755	Ant1	12.01	0.04	12.05	30	Pass
NVNT	ax40	5795	Ant1	12.44	0.04	12.48	30	Pass
NVNT	ax40	5755	Ant2	11.34	0.03	11.37	30	Pass
NVNT	ax40	5795	Ant2	11.53	0.04	11.57	30	Pass
NVNT	ax80	5775	Ant1	12.45	0.04	12.49	30	Pass



NVNT	ax80	5775	Ant2	11.53	0.04	11.57	30	Pass
------	------	------	------	-------	------	-------	----	------



-6dB Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.395	0.5	Pass
NVNT	a	5785	Ant1	16.338	0.5	Pass
NVNT	a	5825	Ant1	16.551	0.5	Pass
NVNT	a	5745	Ant2	16.332	0.5	Pass
NVNT	a	5785	Ant2	16.452	0.5	Pass
NVNT	a	5825	Ant2	16.458	0.5	Pass
NVNT	n20	5745	Ant1	17.79	0.5	Pass
NVNT	n20	5785	Ant1	17.796	0.5	Pass
NVNT	n20	5825	Ant1	17.799	0.5	Pass
NVNT	n20	5745	Ant2	17.745	0.5	Pass
NVNT	n20	5785	Ant2	17.598	0.5	Pass
NVNT	n20	5825	Ant2	17.805	0.5	Pass
NVNT	n40	5755	Ant1	36.492	0.5	Pass
NVNT	n40	5795	Ant1	36.312	0.5	Pass
NVNT	n40	5755	Ant2	36.366	0.5	Pass
NVNT	n40	5795	Ant2	36.354	0.5	Pass
NVNT	ac20	5745	Ant1	17.787	0.5	Pass
NVNT	ac20	5785	Ant1	17.781	0.5	Pass
NVNT	ac20	5825	Ant1	17.745	0.5	Pass
NVNT	ac20	5745	Ant2	17.808	0.5	Pass
NVNT	ac20	5785	Ant2	17.787	0.5	Pass
NVNT	ac20	5825	Ant2	17.607	0.5	Pass
NVNT	ac40	5755	Ant1	36.534	0.5	Pass
NVNT	ac40	5795	Ant1	36.318	0.5	Pass
NVNT	ac40	5755	Ant2	36.522	0.5	Pass
NVNT	ac40	5795	Ant2	36.54	0.5	Pass
NVNT	ac80	5775	Ant1	76.056	0.5	Pass
NVNT	ac80	5775	Ant2	62.7	0.5	Pass
NVNT	ax20	5745	Ant1	17.778	0.5	Pass
NVNT	ax20	5785	Ant1	18.459	0.5	Pass
NVNT	ax20	5825	Ant1	18.942	0.5	Pass
NVNT	ax20	5745	Ant2	19.047	0.5	Pass
NVNT	ax20	5785	Ant2	19.059	0.5	Pass
NVNT	ax20	5825	Ant2	19.008	0.5	Pass
NVNT	ax40	5755	Ant1	37.488	0.5	Pass
NVNT	ax40	5795	Ant1	38.094	0.5	Pass
NVNT	ax40	5755	Ant2	37.146	0.5	Pass



NVNT	ax40	5795	Ant2	38.034	0.5	Pass
NVNT	ax80	5775	Ant1	69.168	0.5	Pass
NVNT	ax80	5775	Ant2	51.36	0.5	Pass


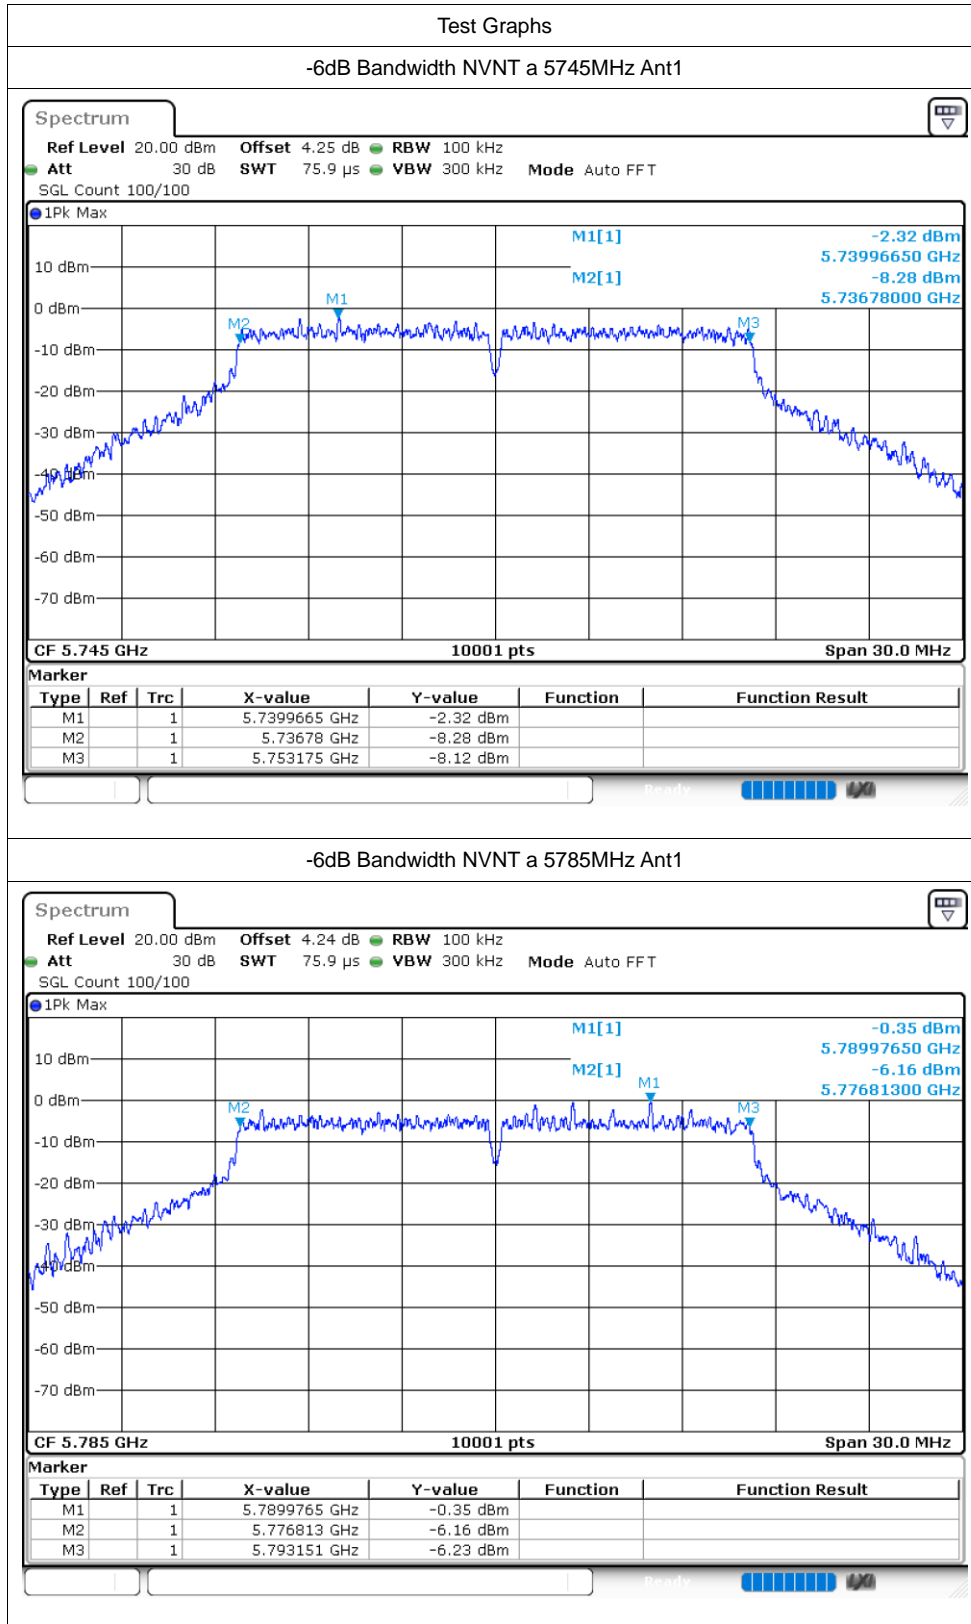


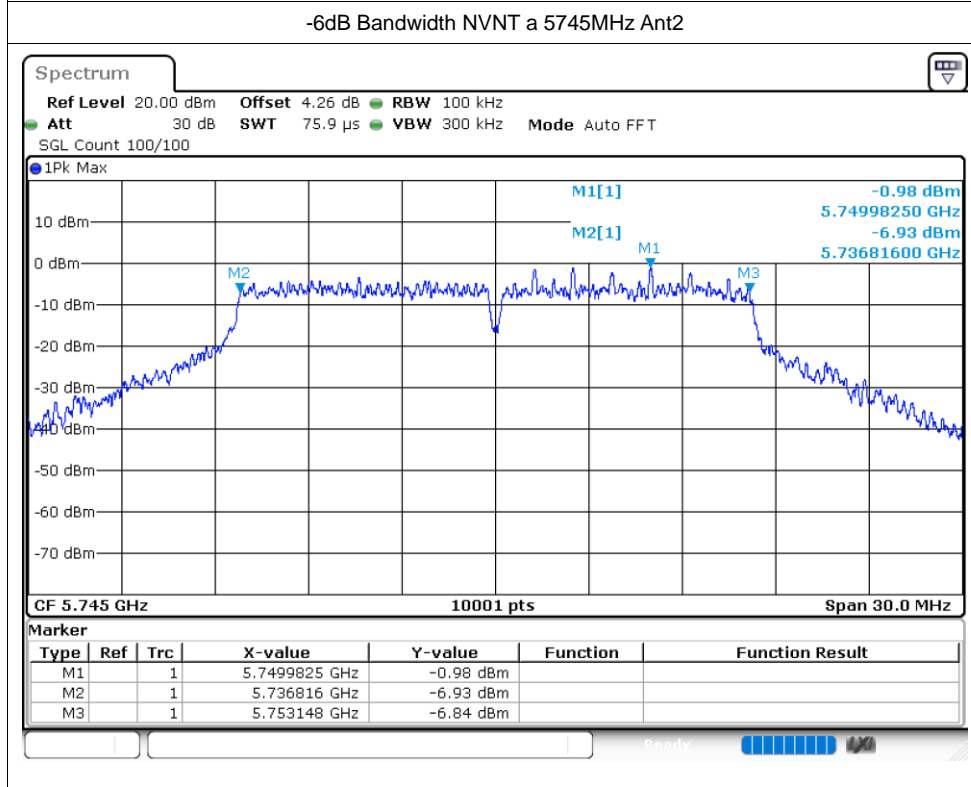
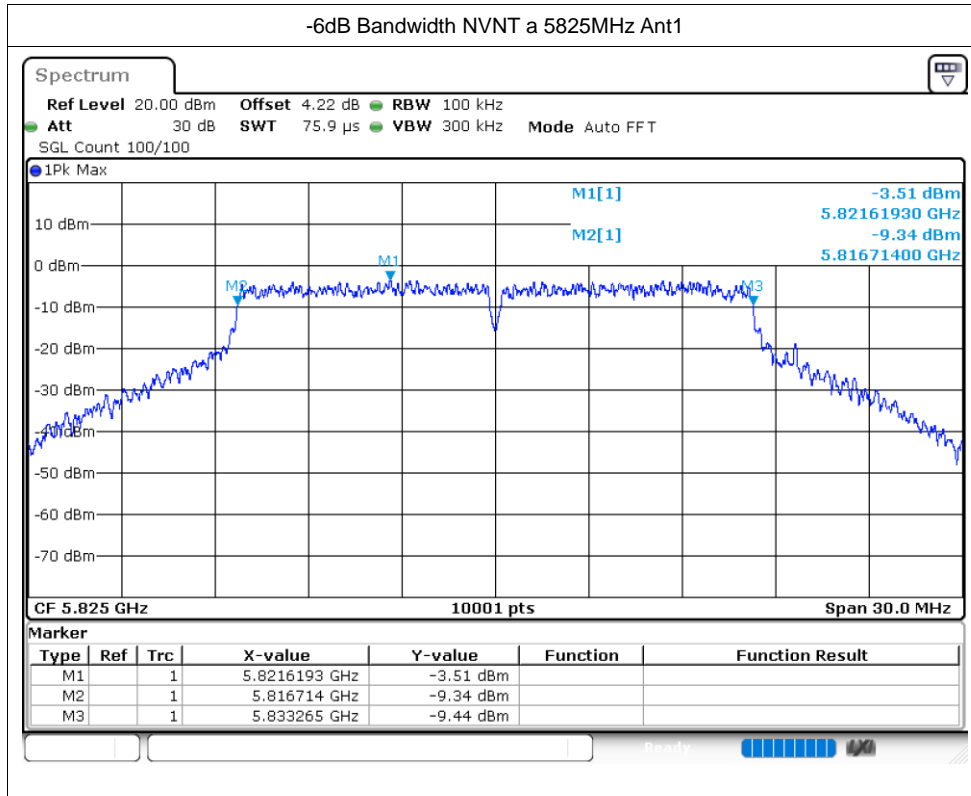


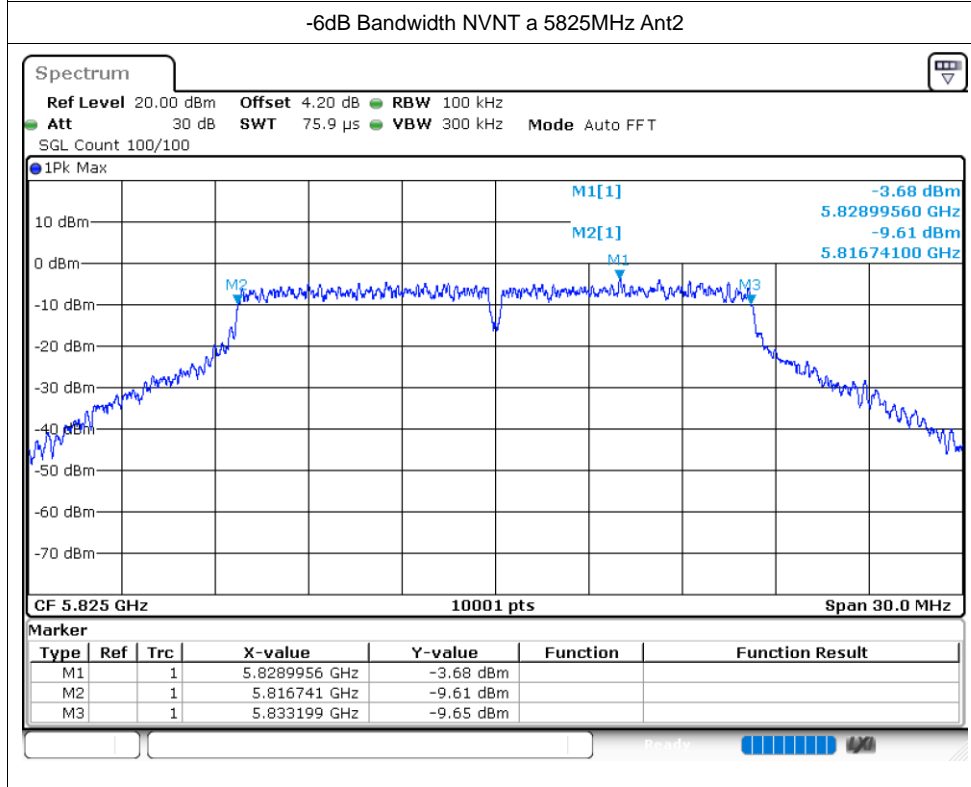
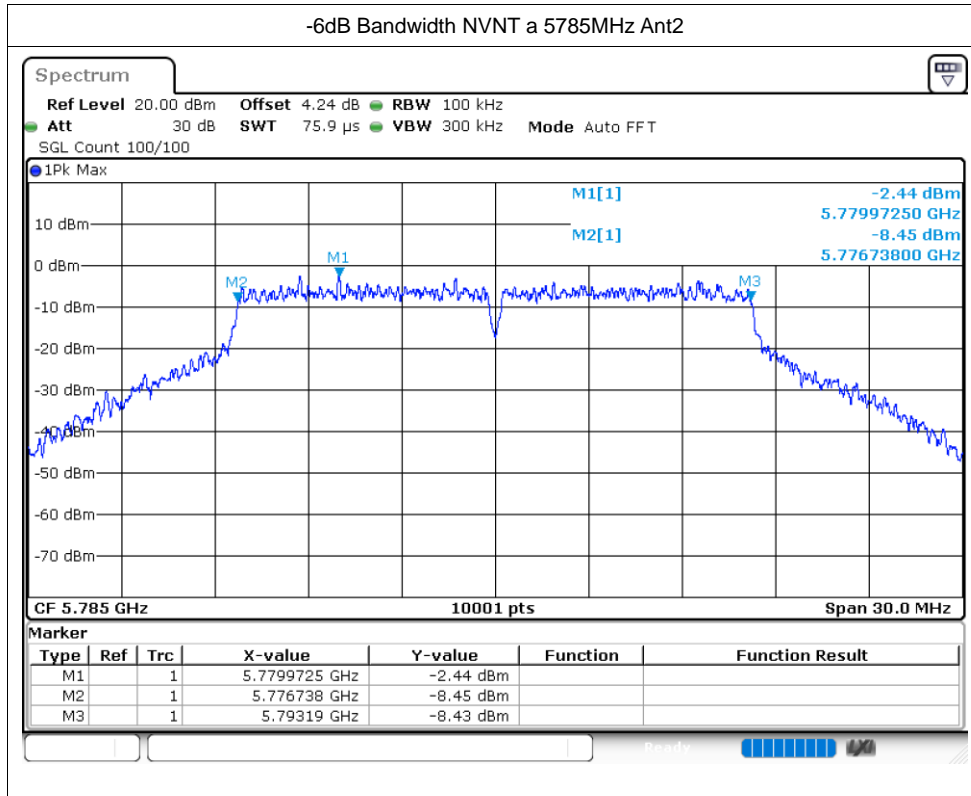


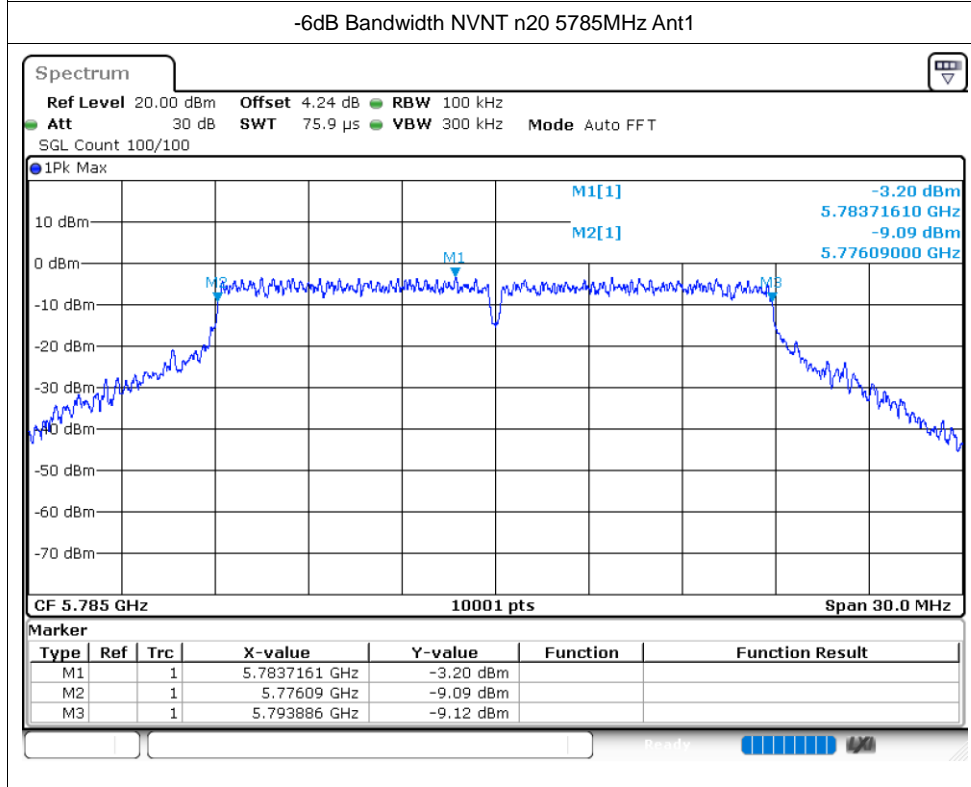
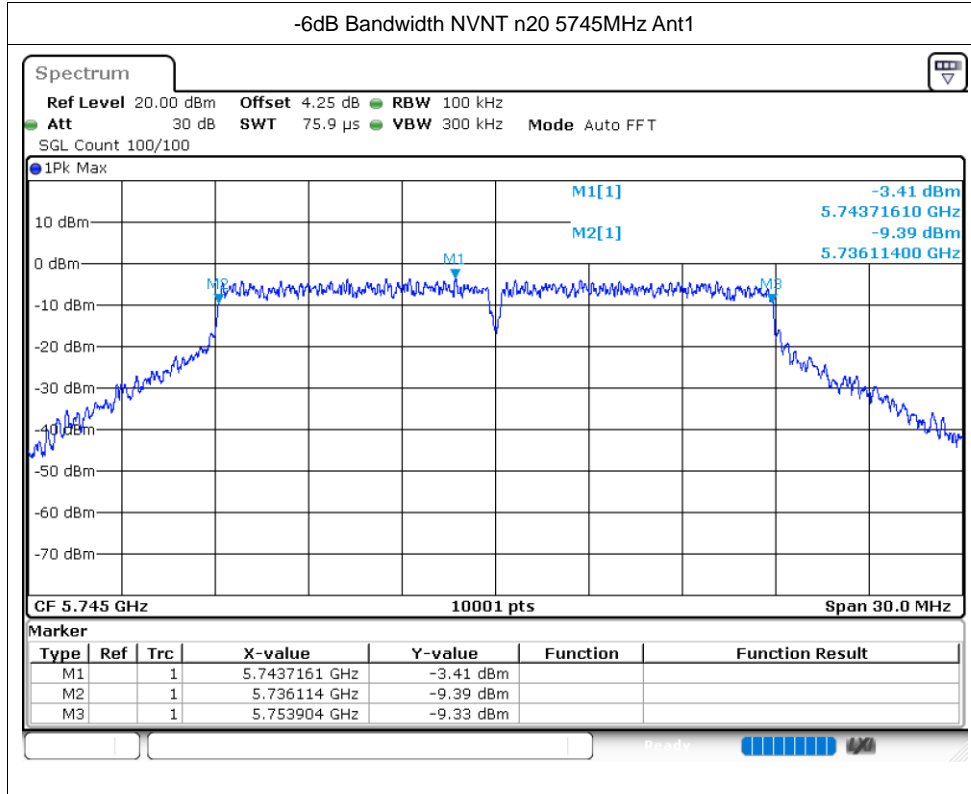


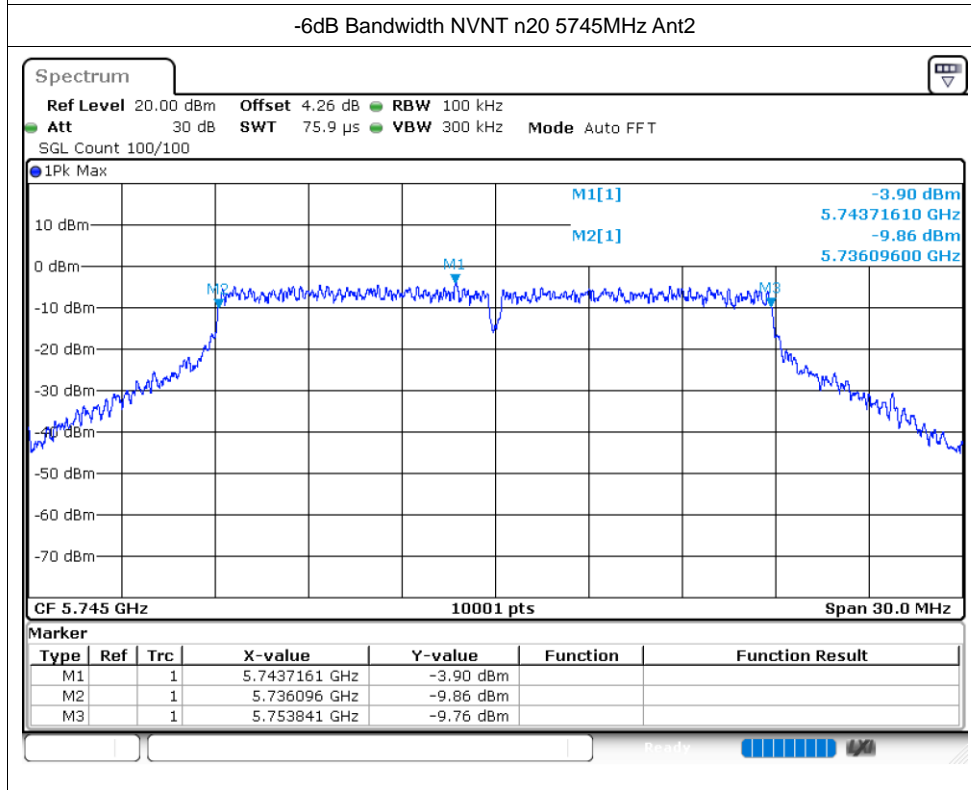
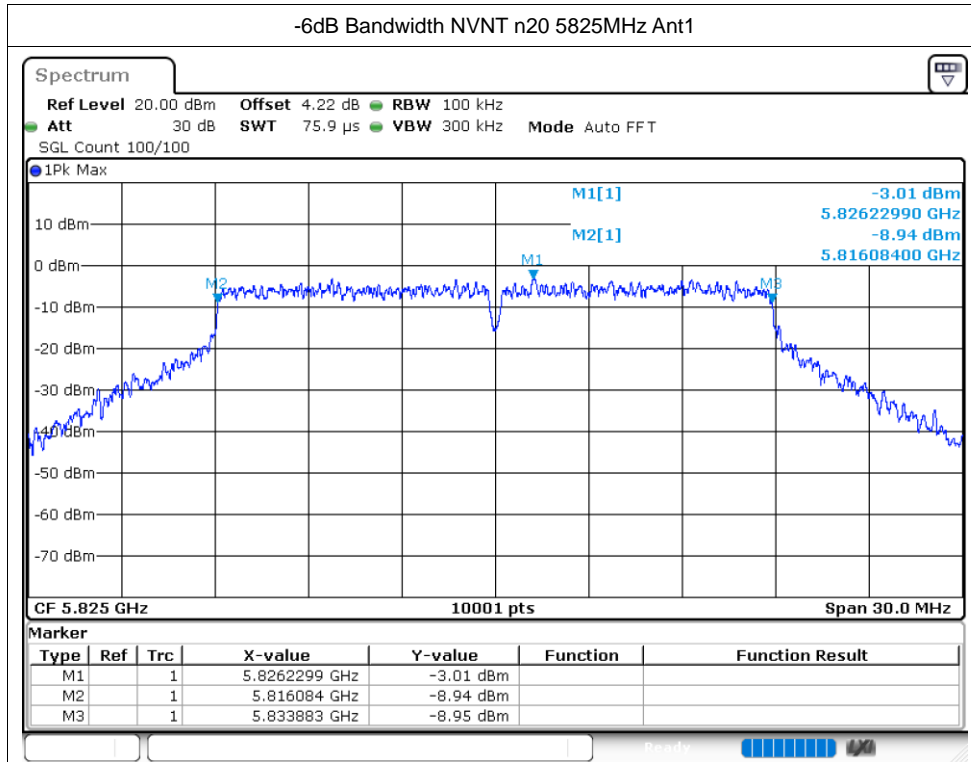


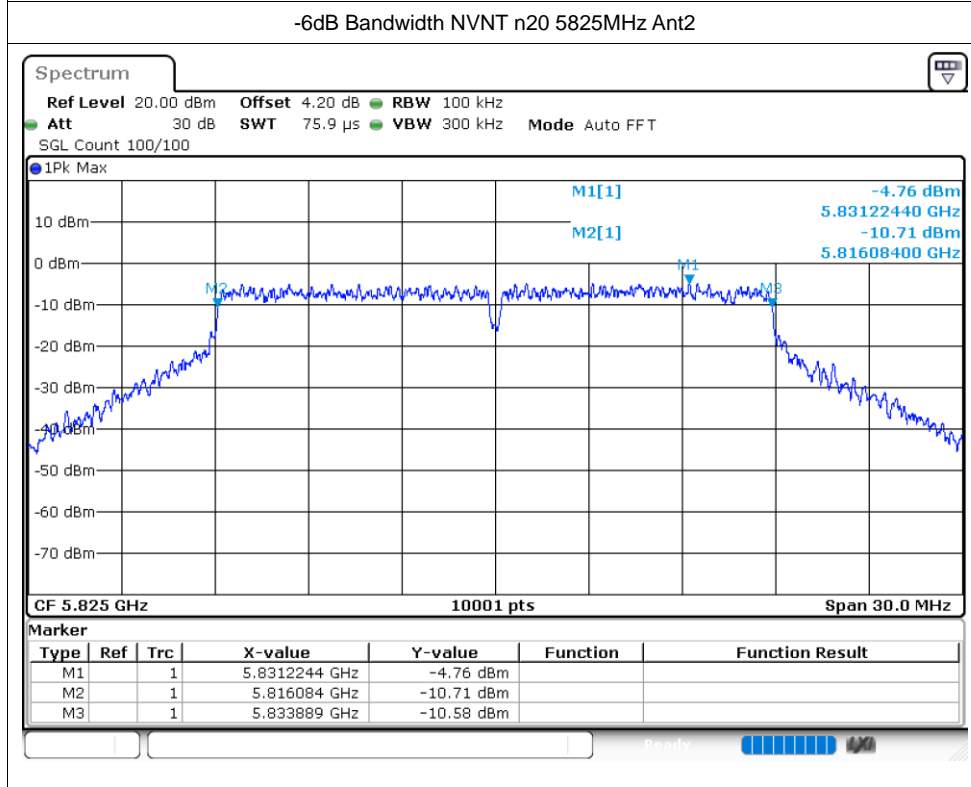
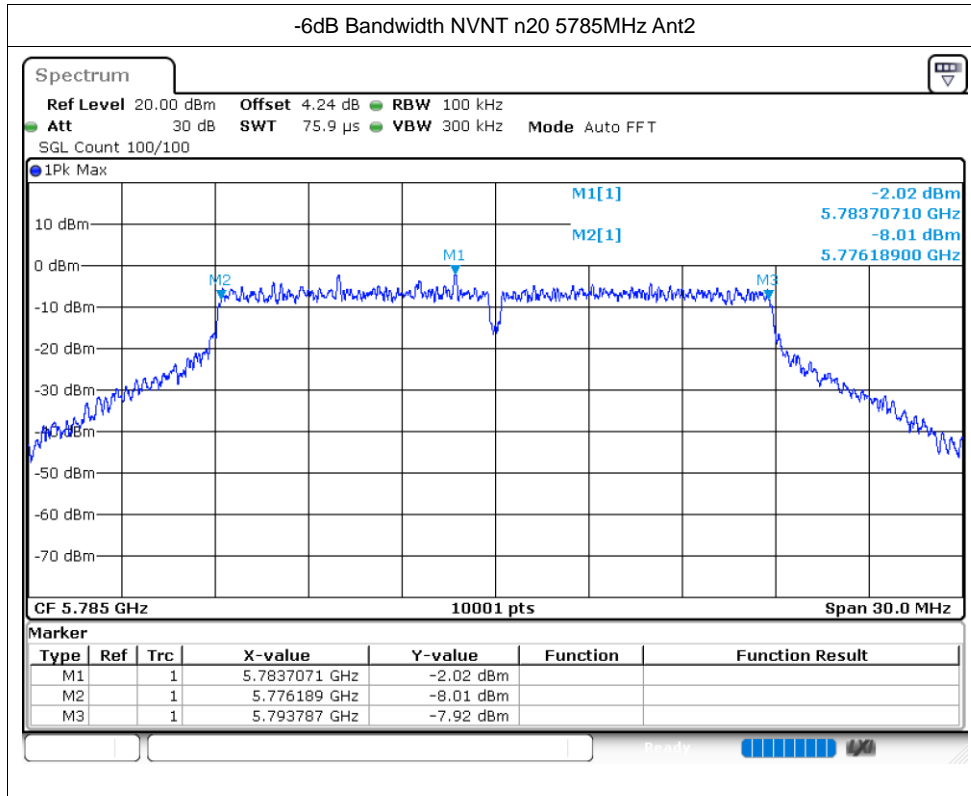


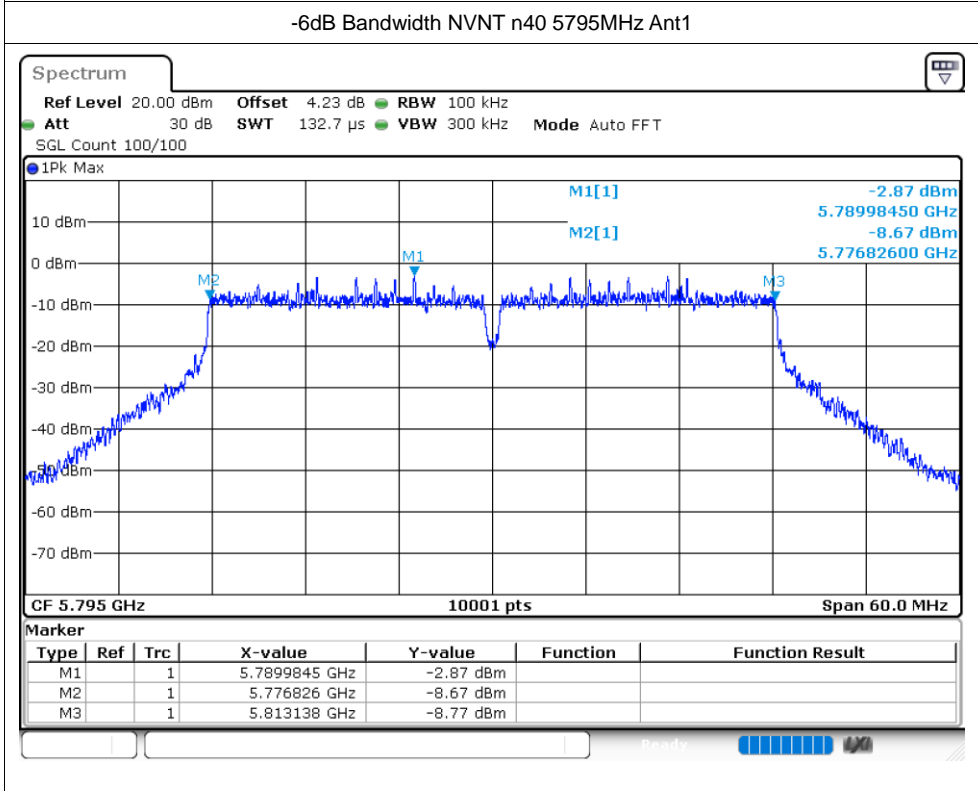
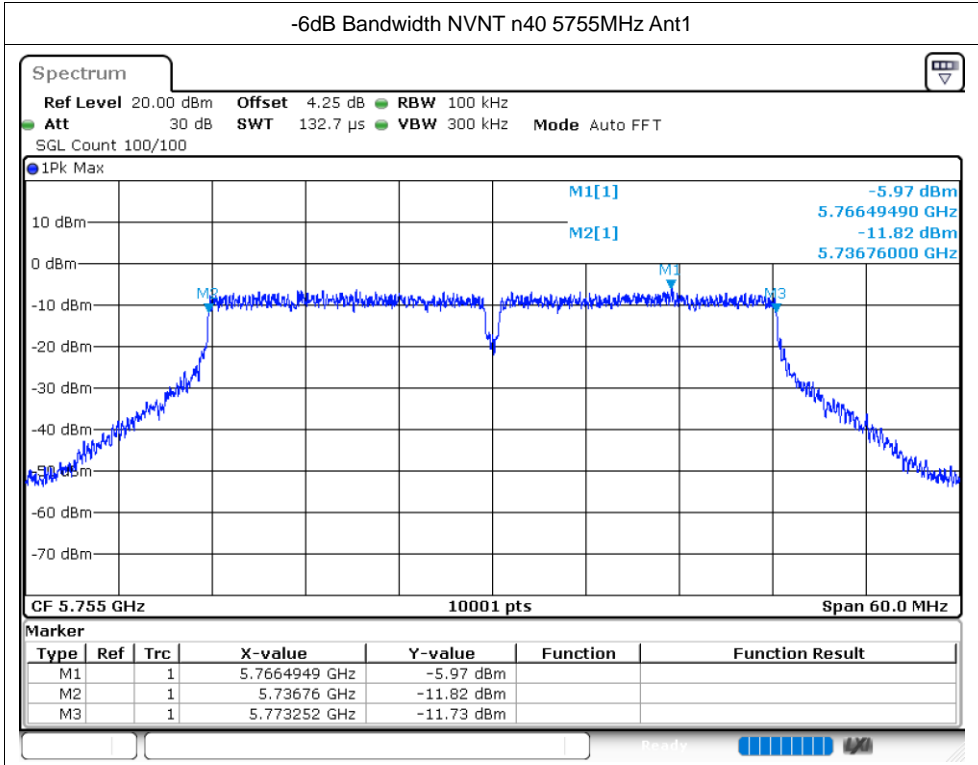


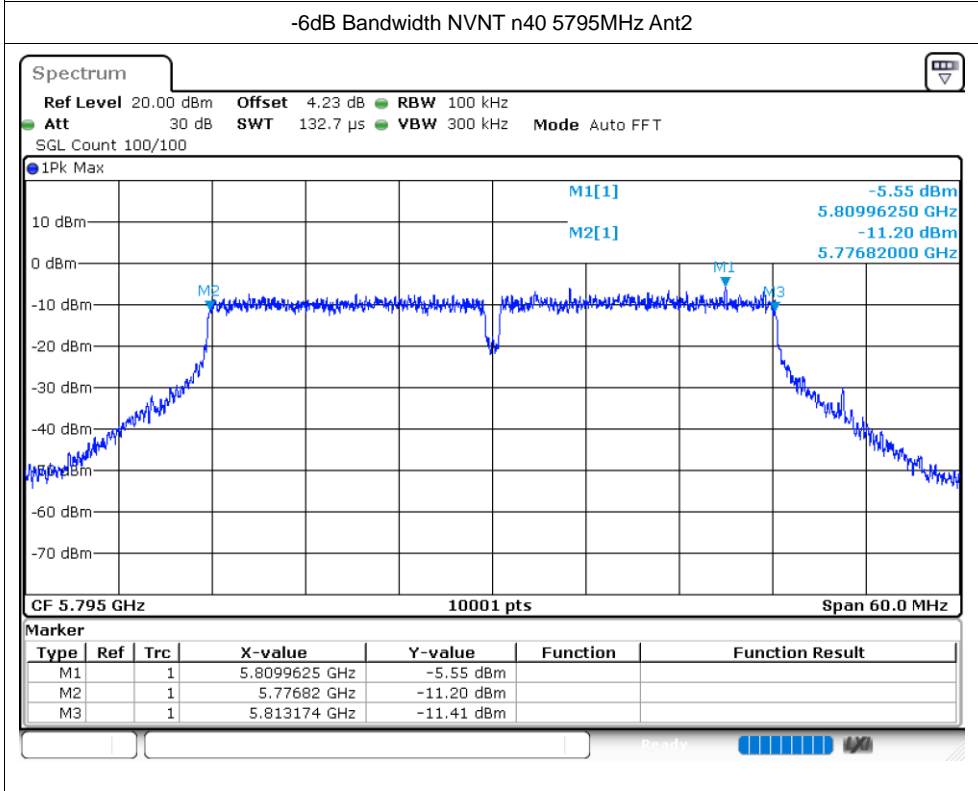
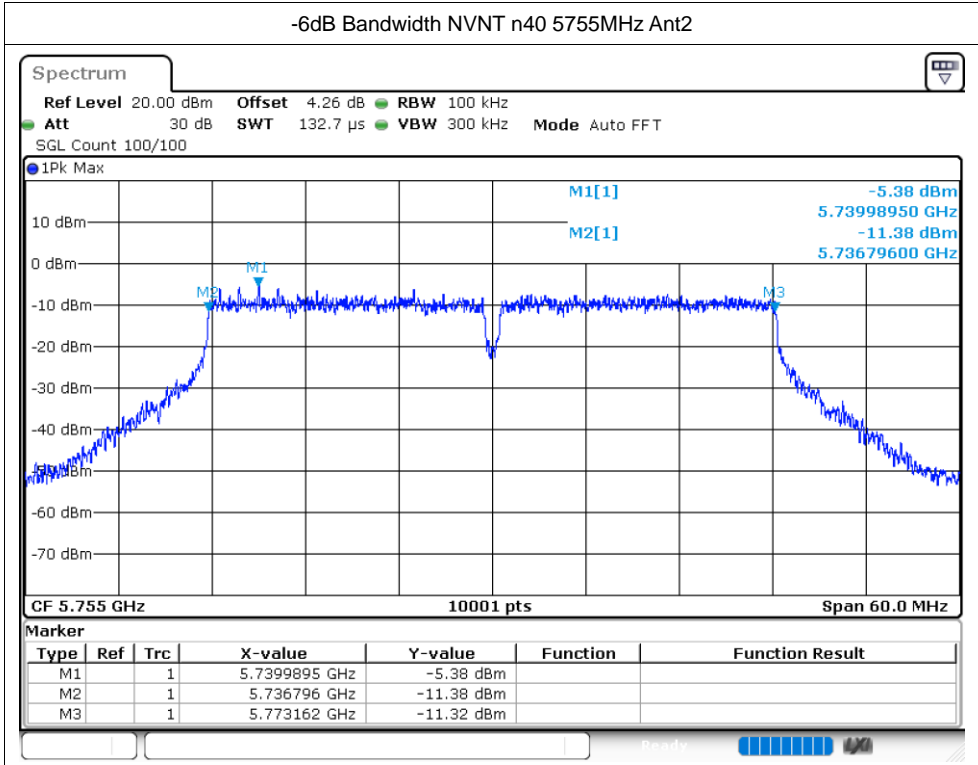


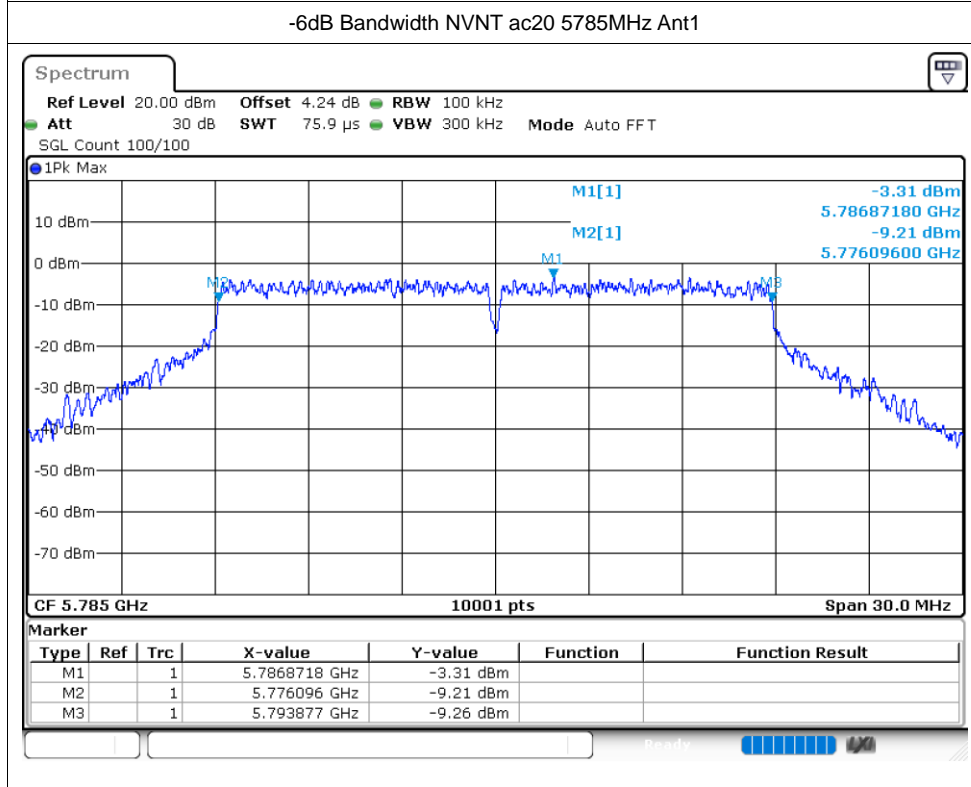
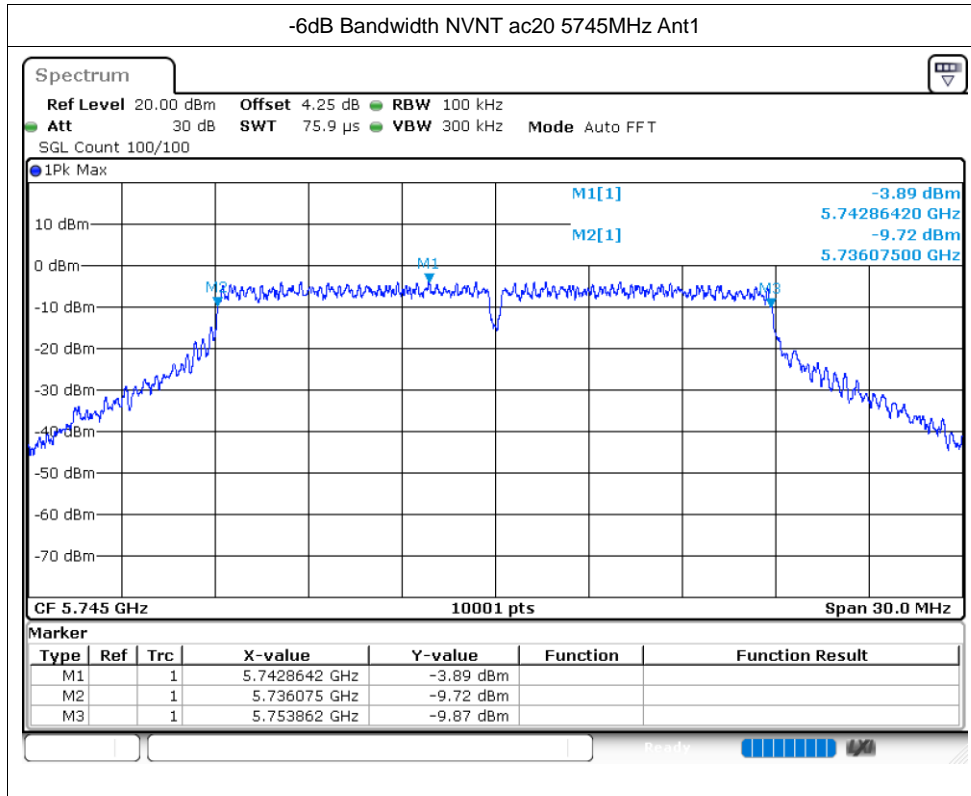


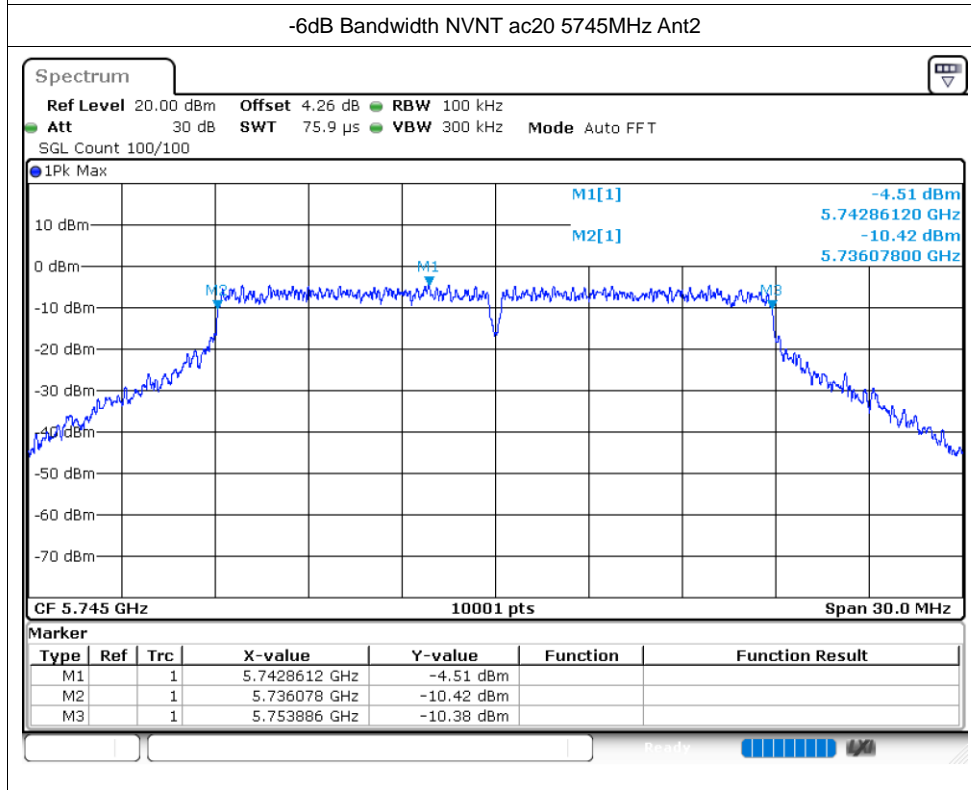
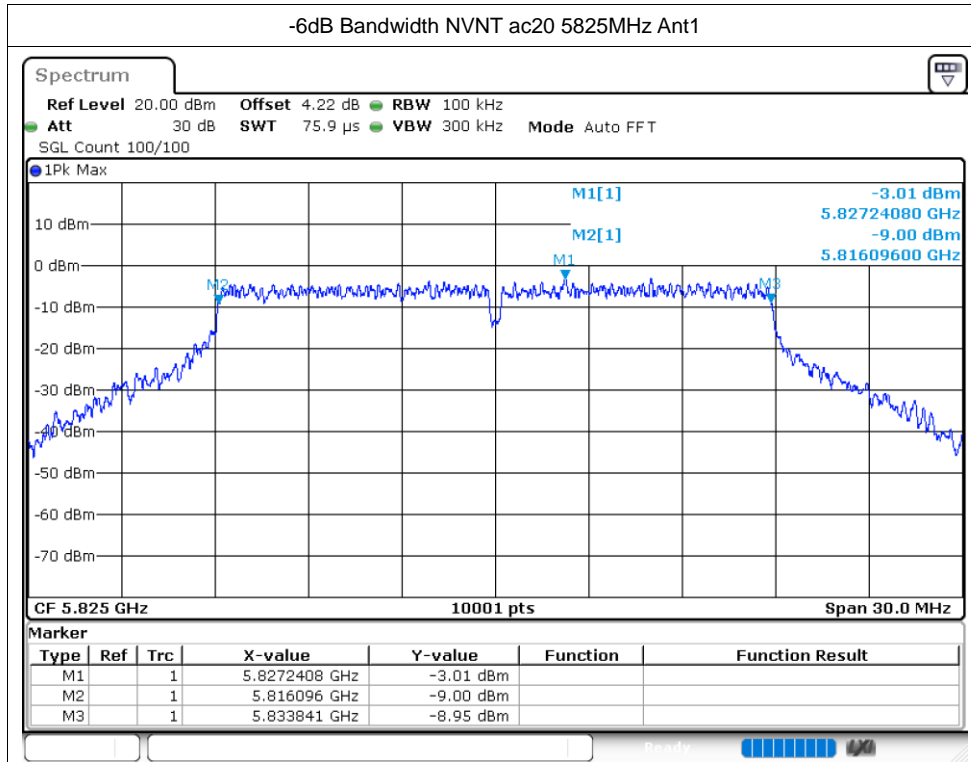


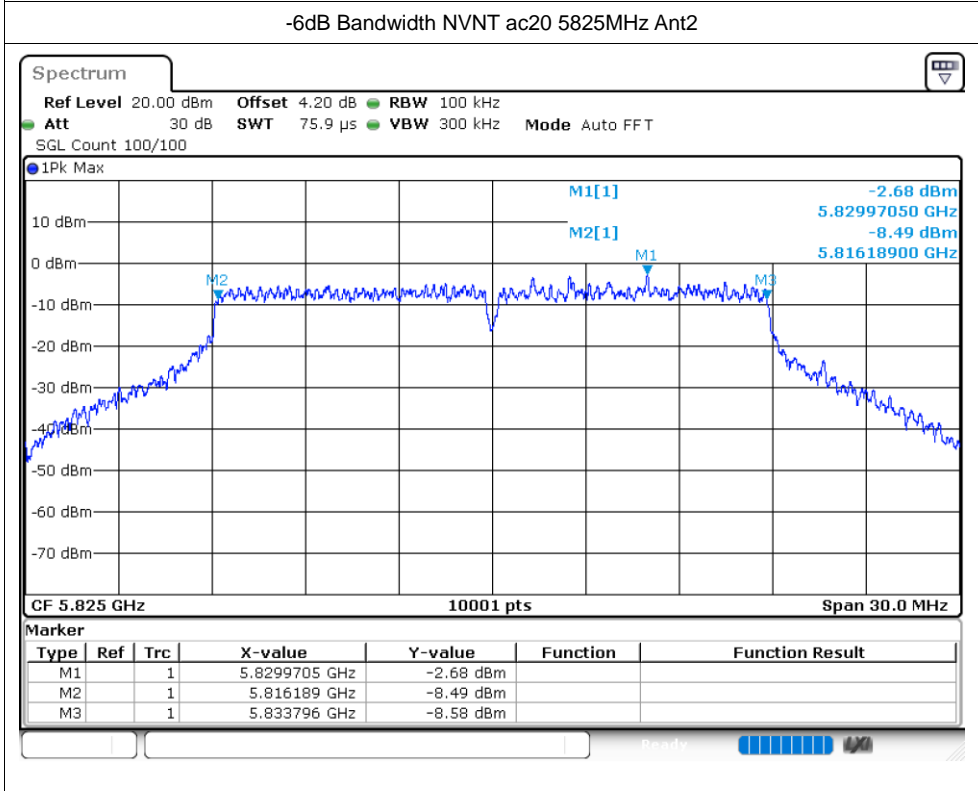
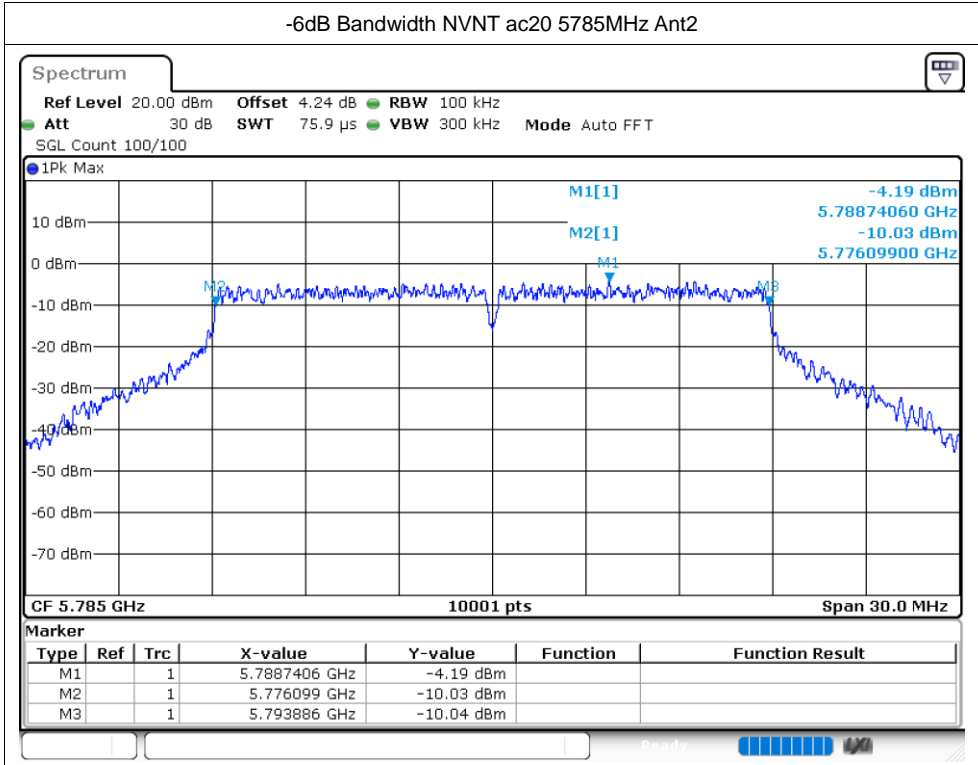


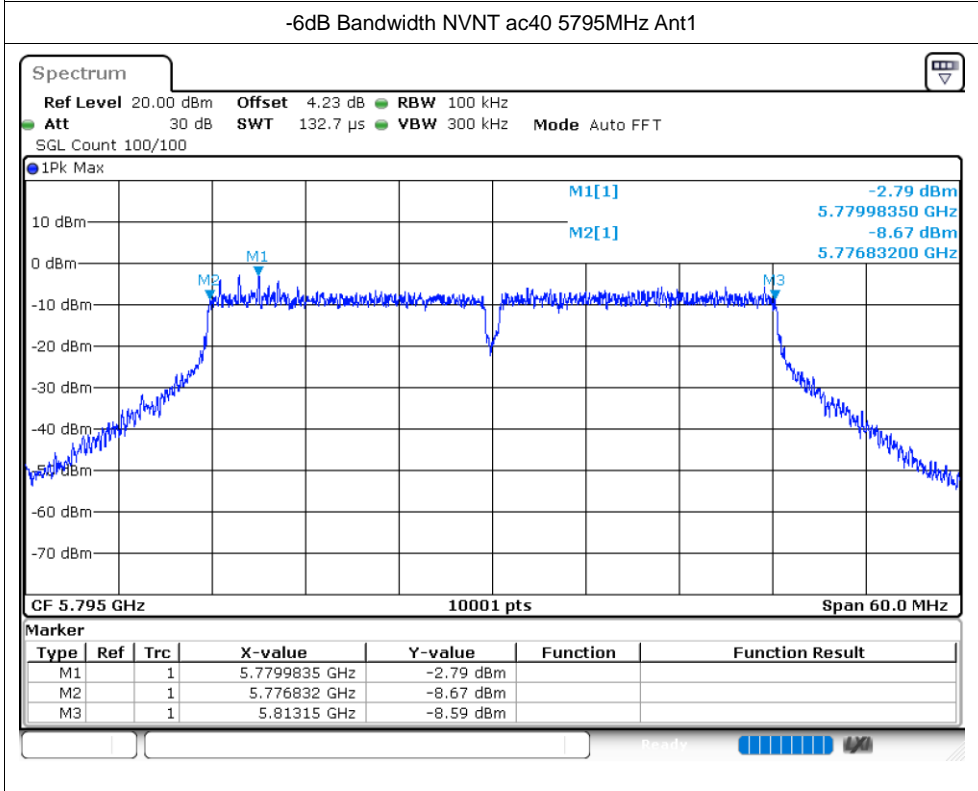
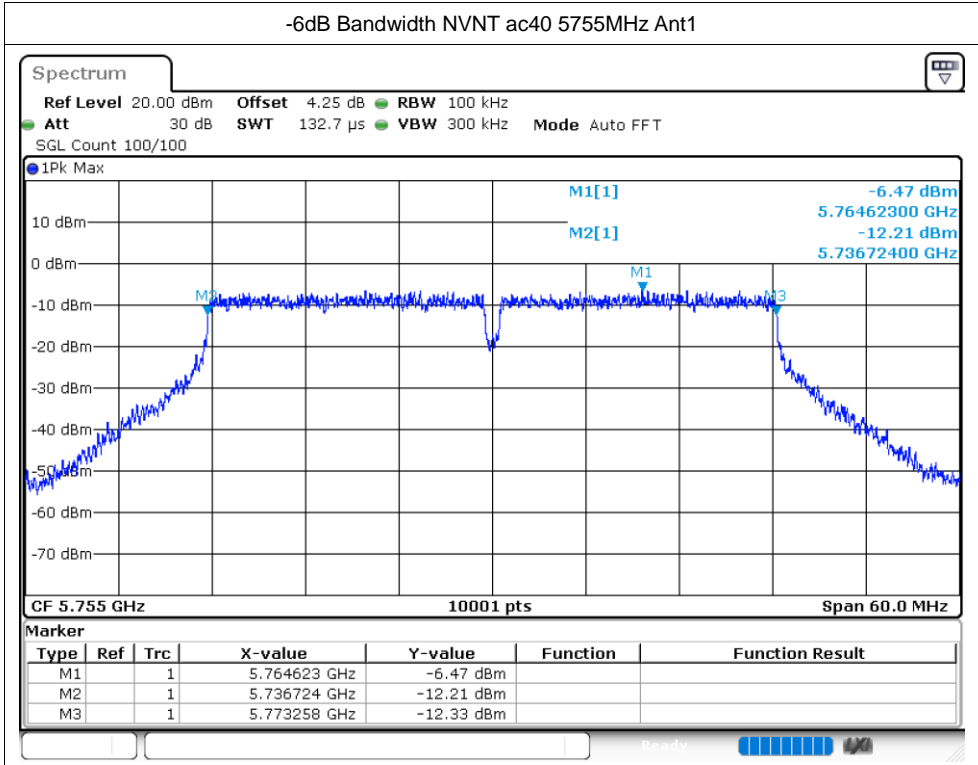


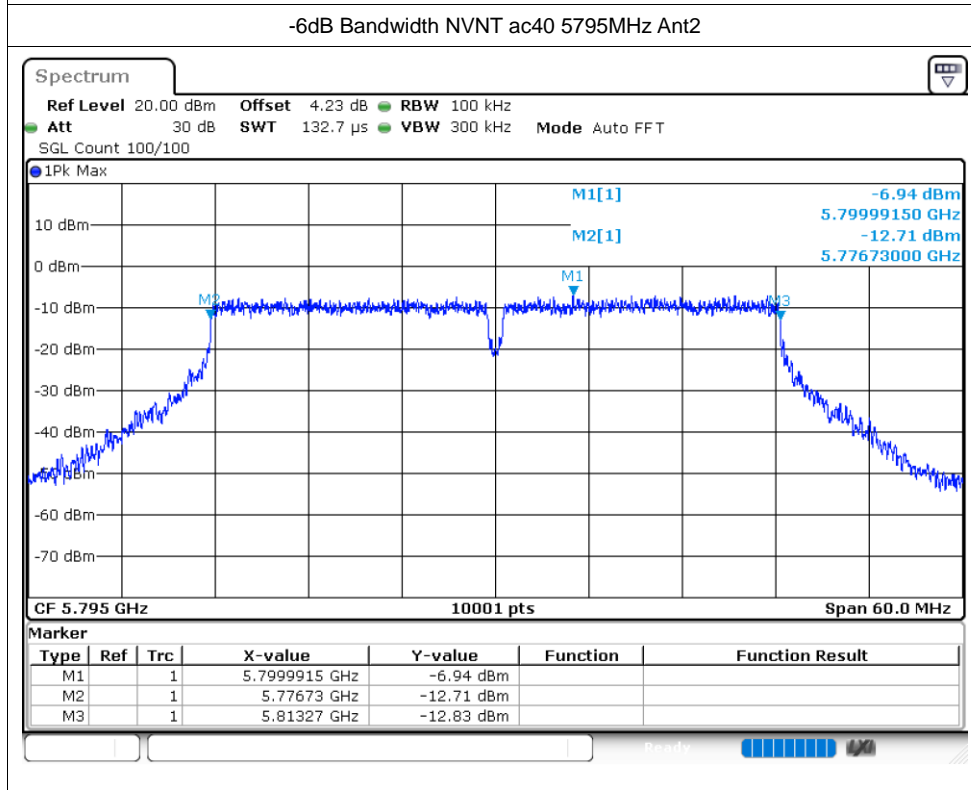
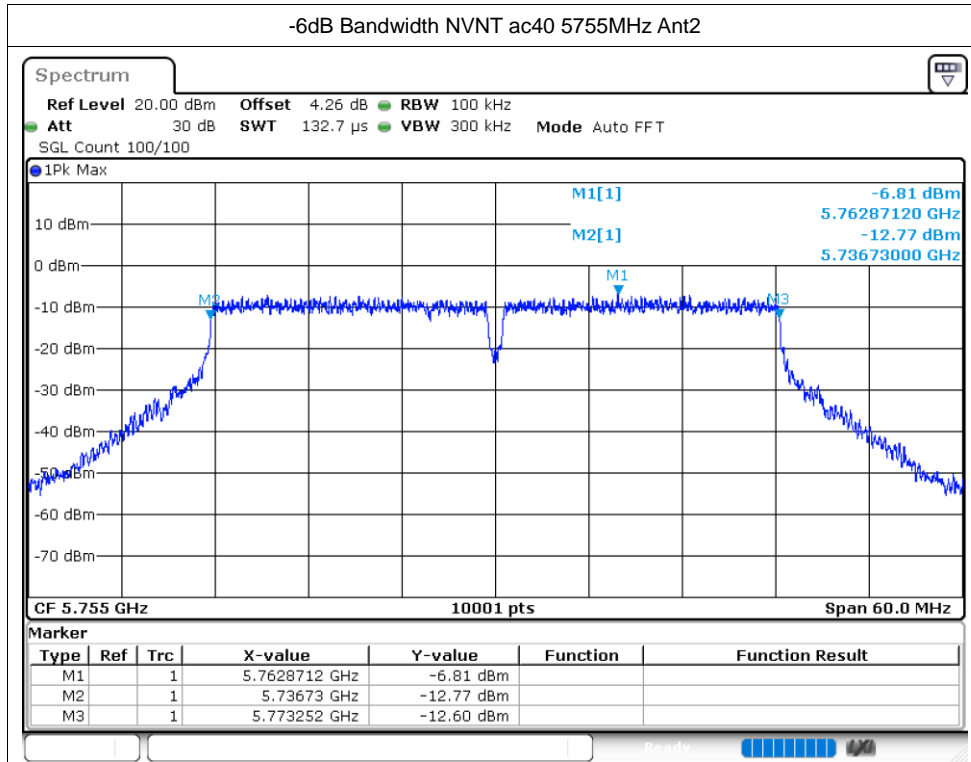


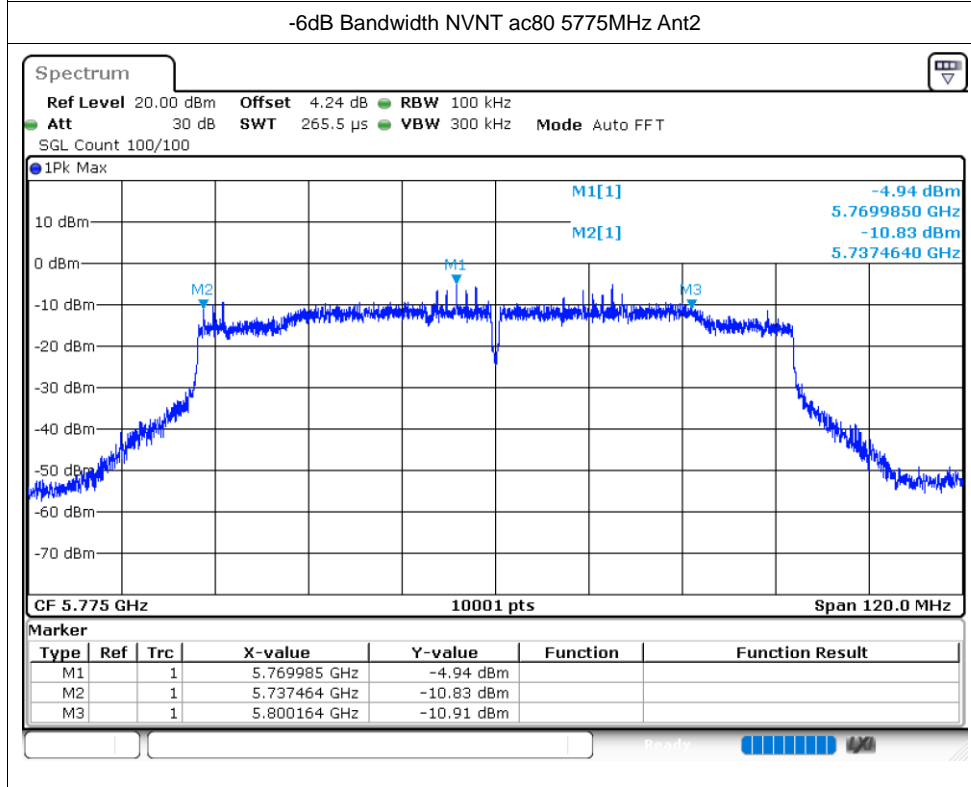
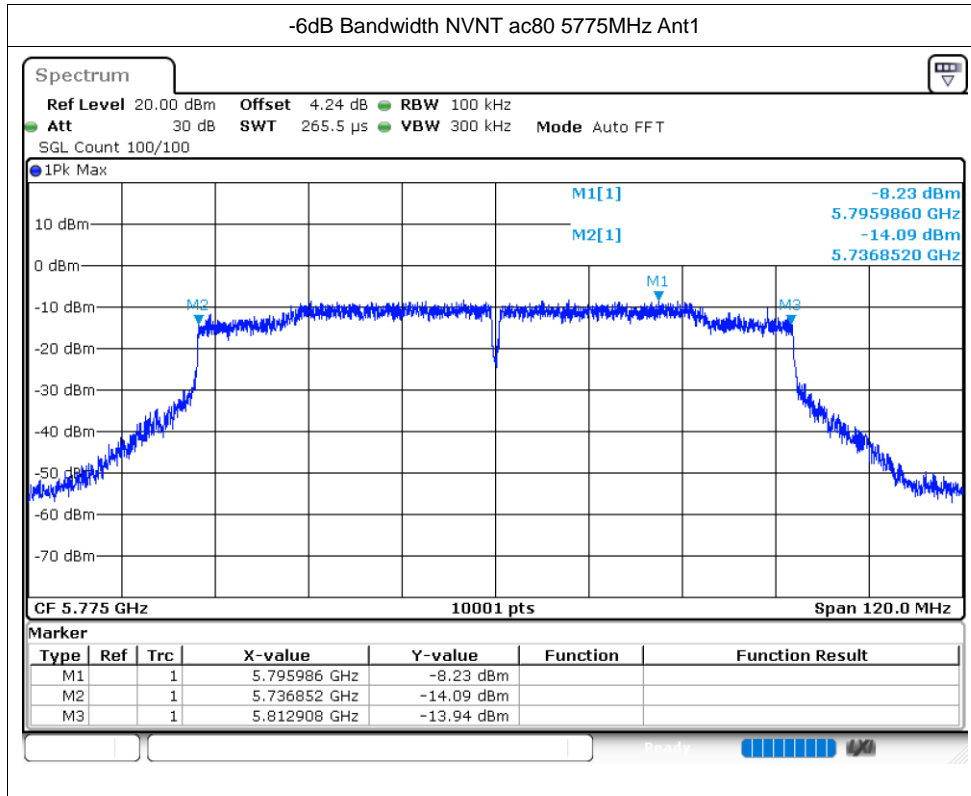


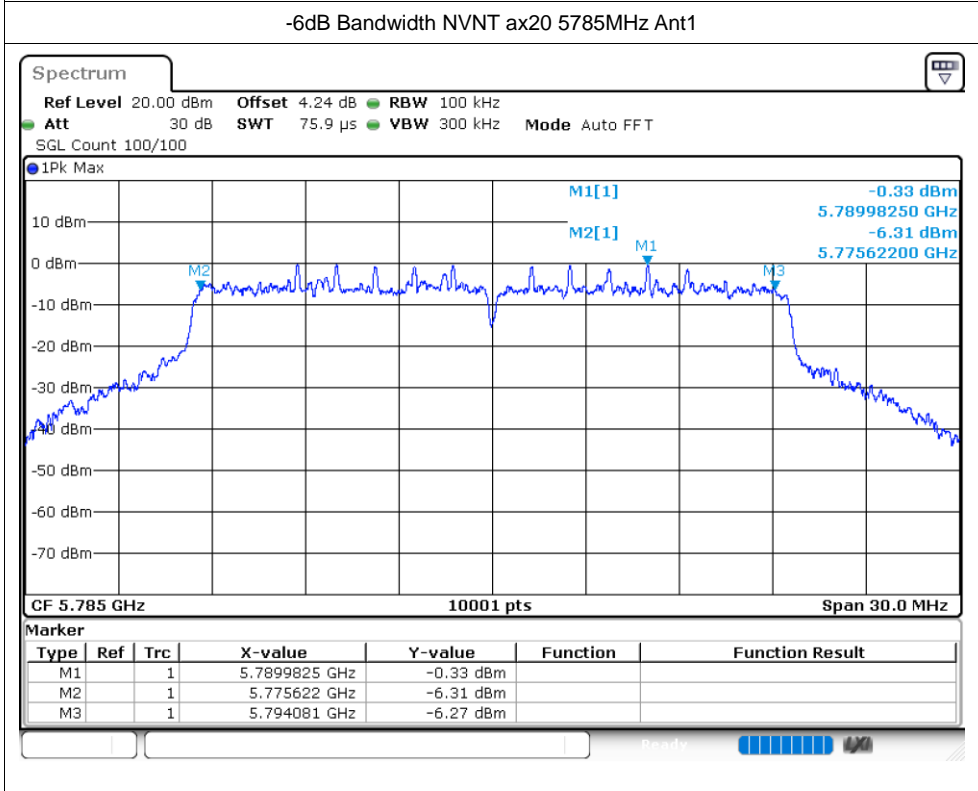
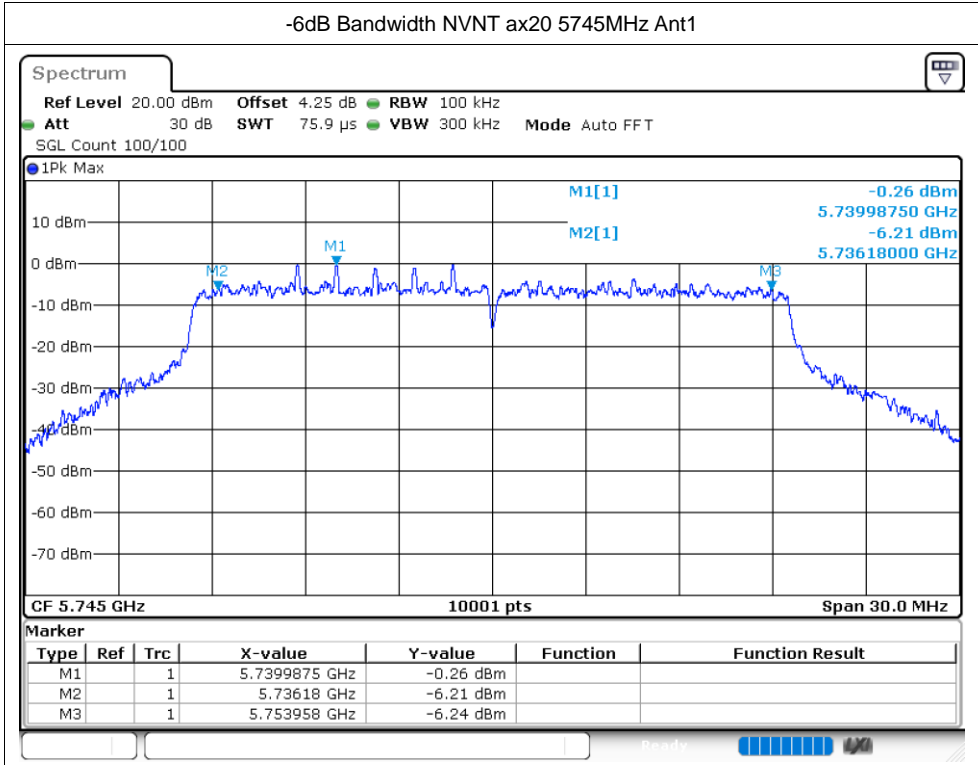


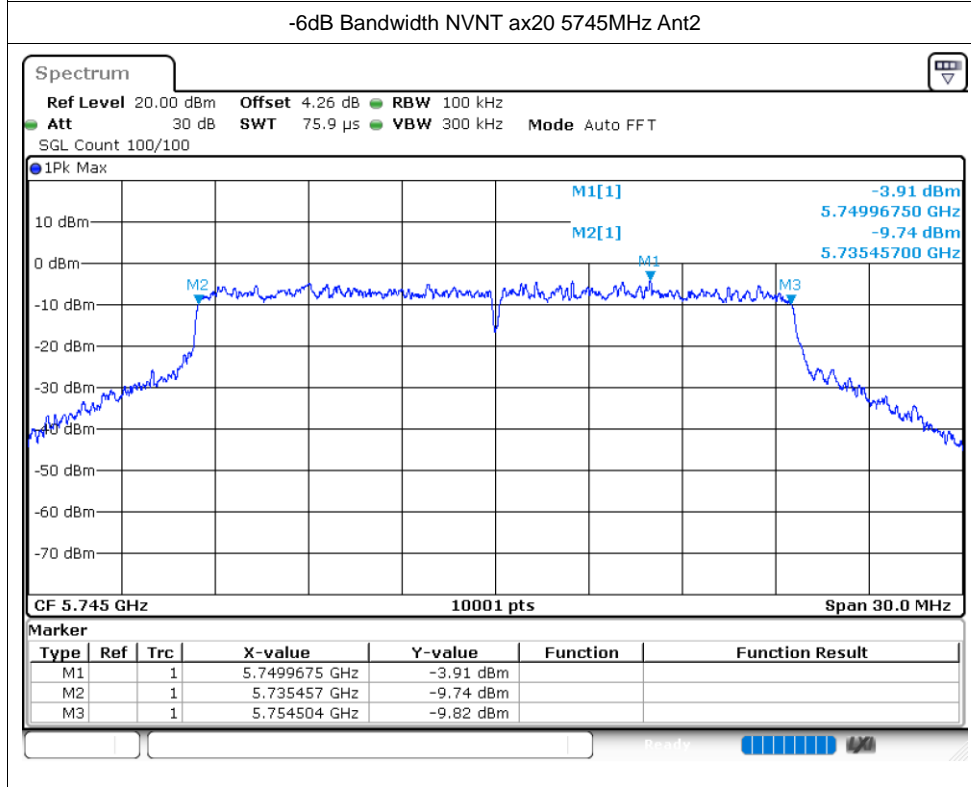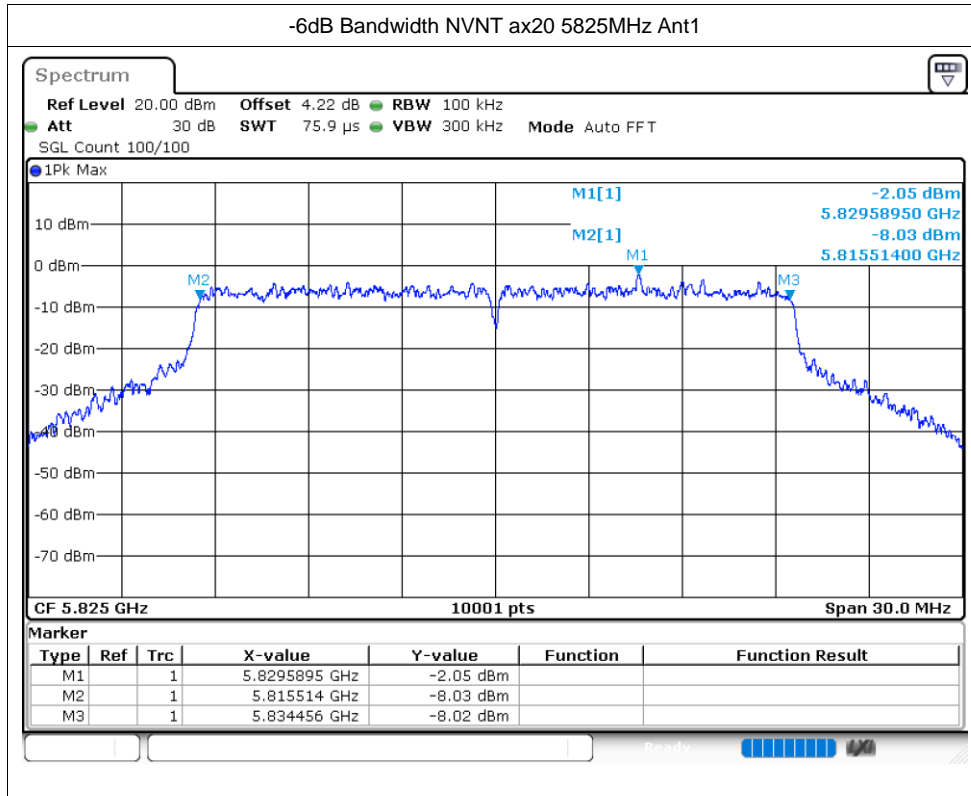

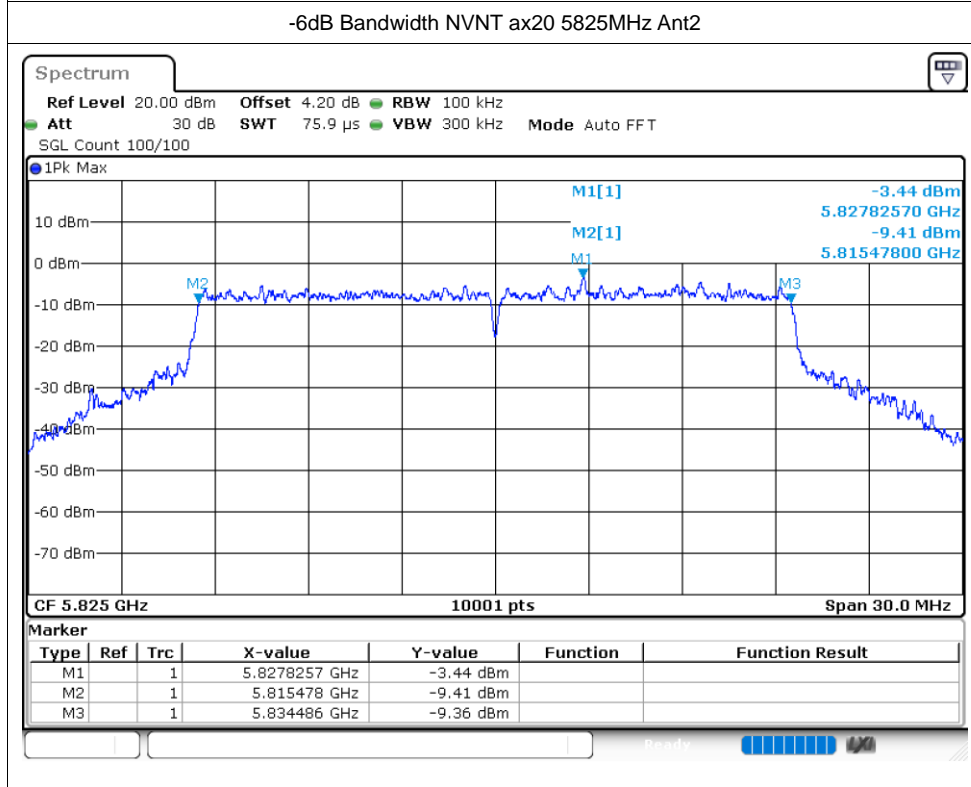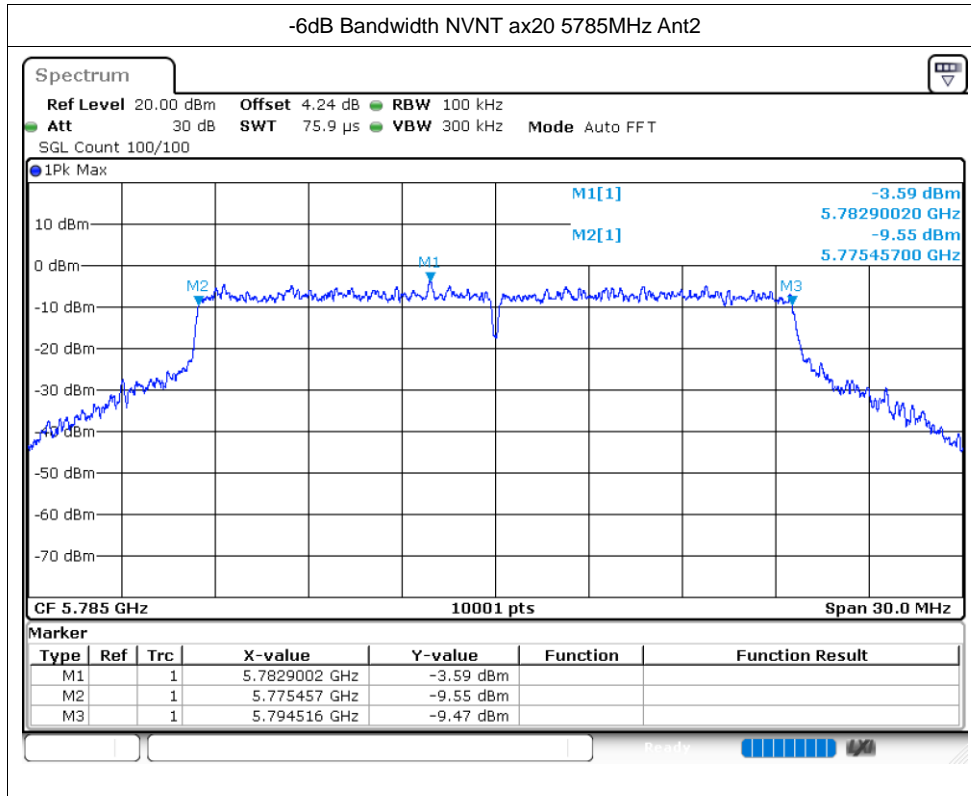

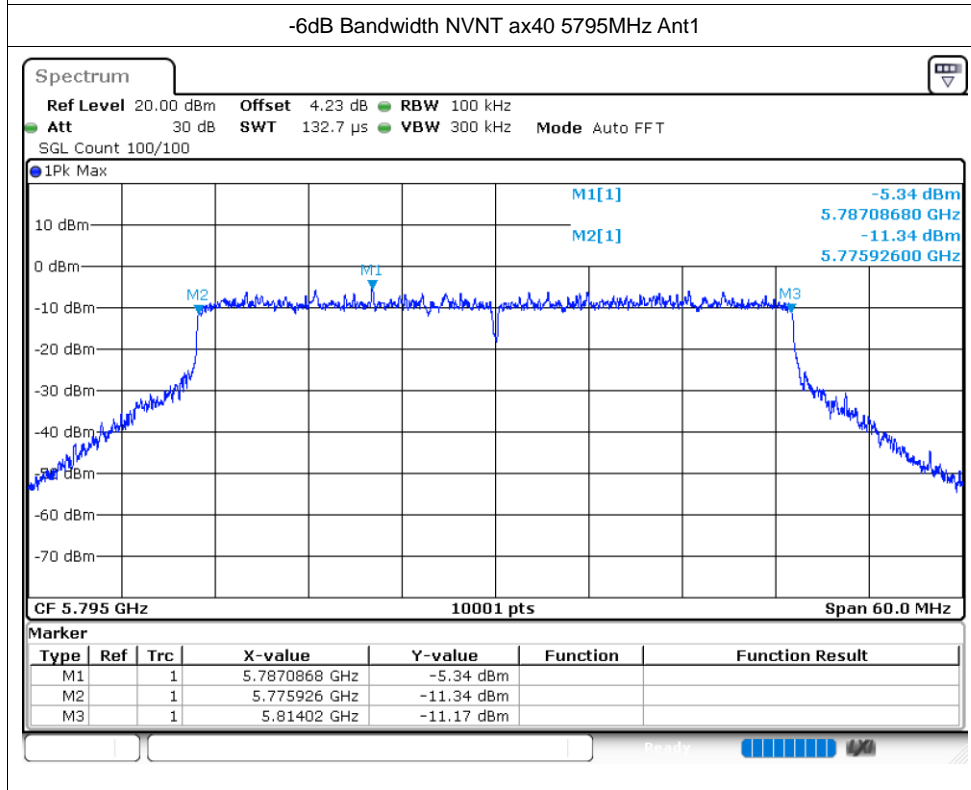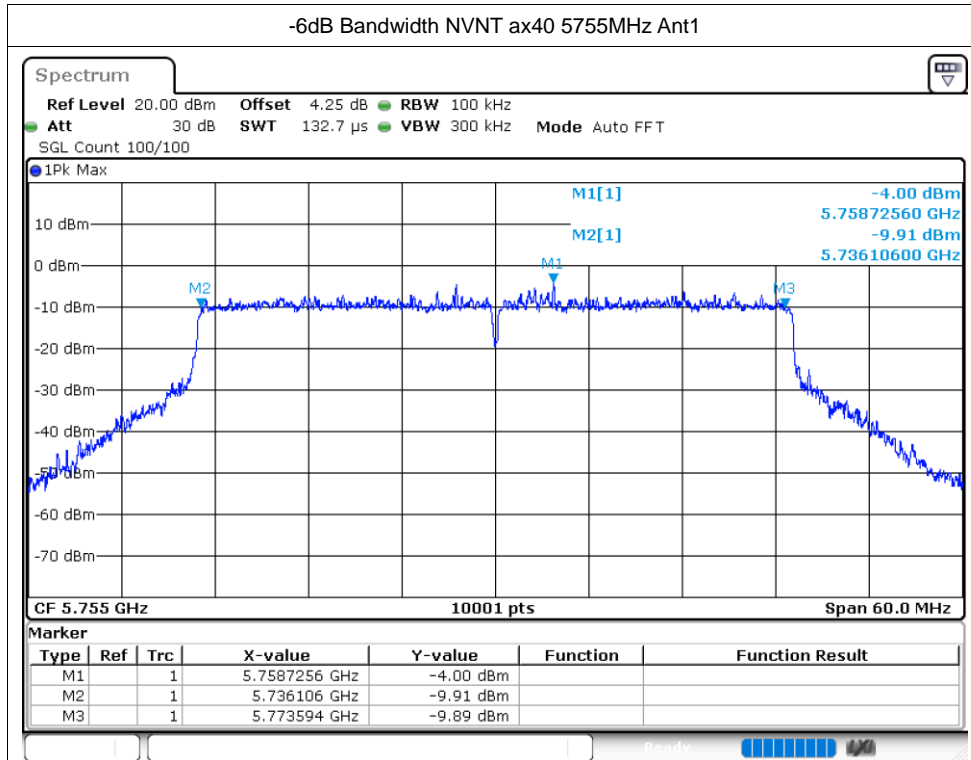

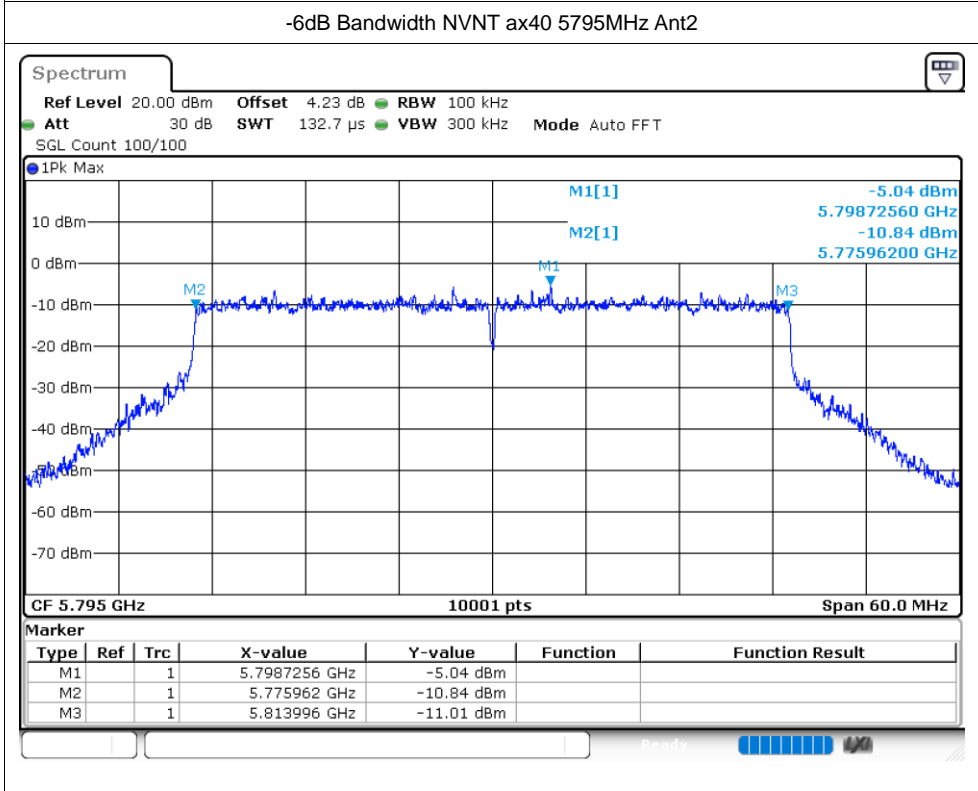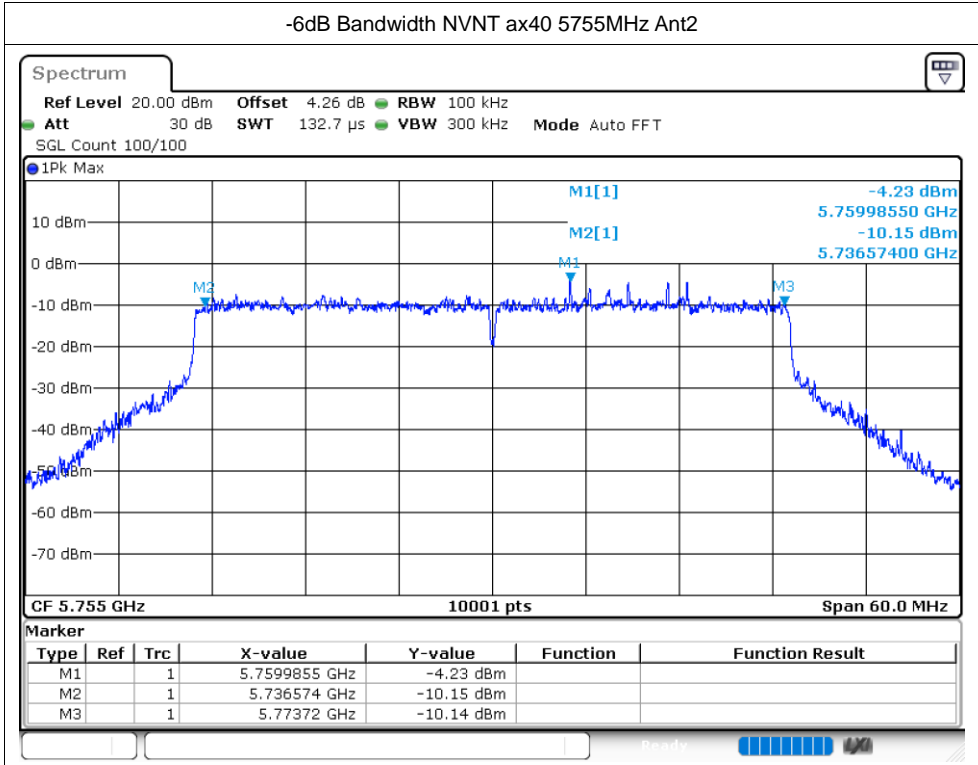

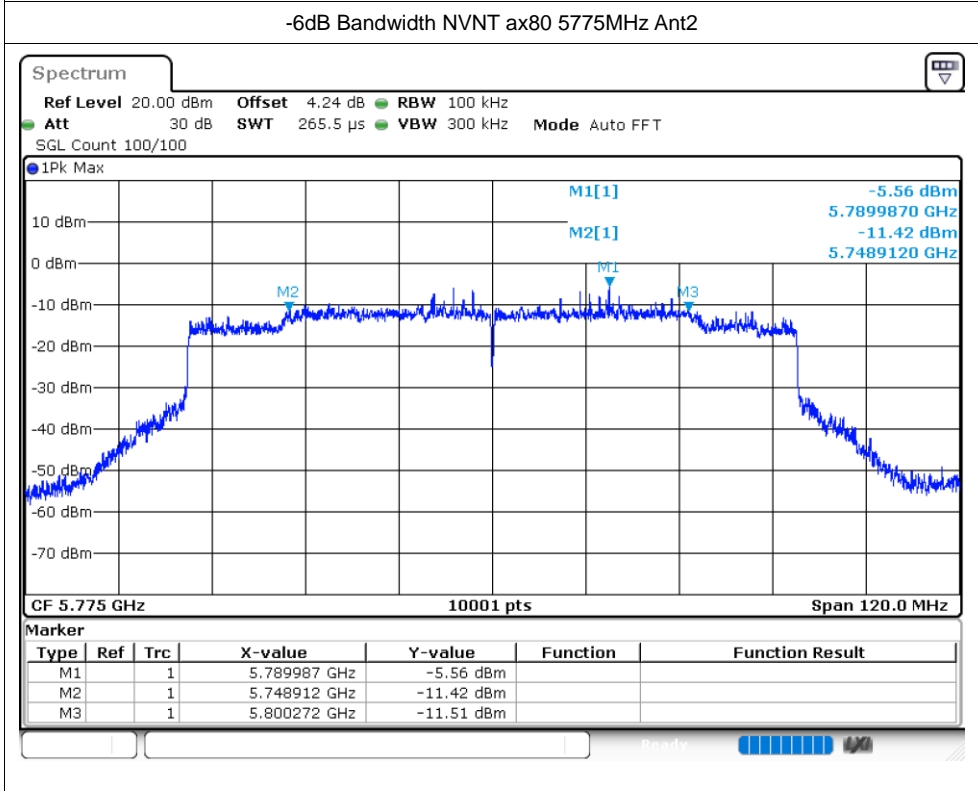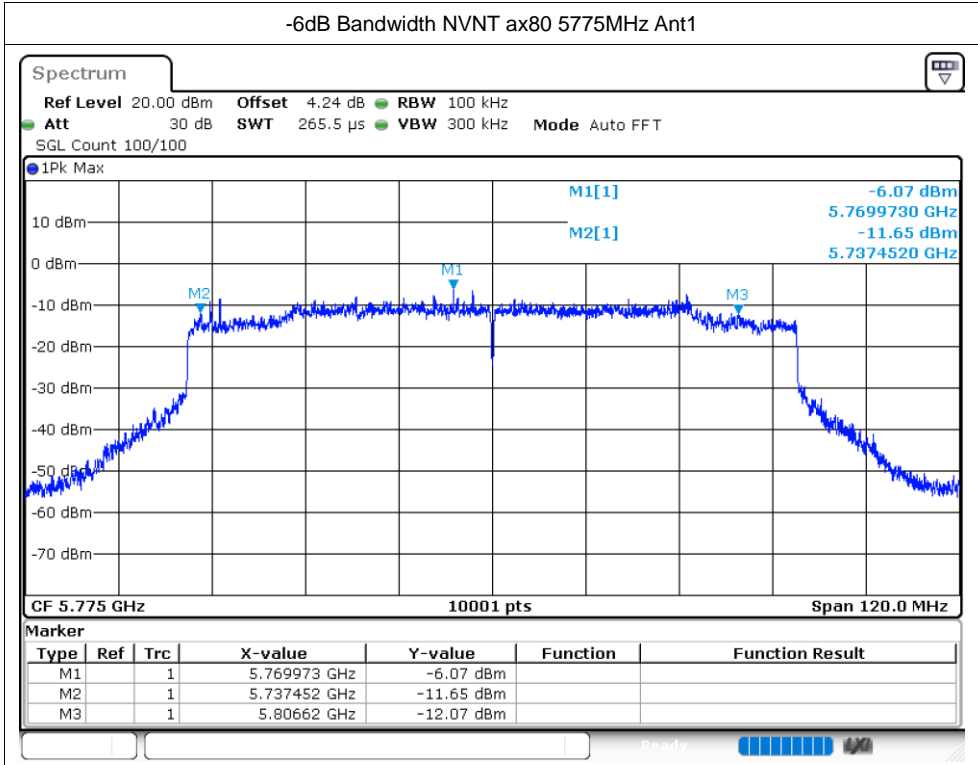

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.888
NVNT	a	5785	Ant1	16.756
NVNT	a	5825	Ant1	16.621
NVNT	a	5745	Ant2	16.795
NVNT	a	5785	Ant2	16.711
NVNT	a	5825	Ant2	16.627
NVNT	n20	5745	Ant1	17.83
NVNT	n20	5785	Ant1	17.929
NVNT	n20	5825	Ant1	17.881
NVNT	n20	5745	Ant2	17.881
NVNT	n20	5785	Ant2	17.872
NVNT	n20	5825	Ant2	17.884
NVNT	n40	5755	Ant1	36.446
NVNT	n40	5795	Ant1	36.488
NVNT	n40	5755	Ant2	36.512
NVNT	n40	5795	Ant2	36.464
NVNT	ac20	5745	Ant1	17.863
NVNT	ac20	5785	Ant1	17.86
NVNT	ac20	5825	Ant1	17.899
NVNT	ac20	5745	Ant2	17.782
NVNT	ac20	5785	Ant2	17.899
NVNT	ac20	5825	Ant2	17.851
NVNT	ac40	5755	Ant1	36.446
NVNT	ac40	5795	Ant1	36.488
NVNT	ac40	5755	Ant2	36.464
NVNT	ac40	5795	Ant2	36.464
NVNT	ac80	5775	Ant1	75.1
NVNT	ac80	5775	Ant2	75.136
NVNT	ax20	5745	Ant1	18.937
NVNT	ax20	5785	Ant1	19.153
NVNT	ax20	5825	Ant1	19.021
NVNT	ax20	5745	Ant2	18.949
NVNT	ax20	5785	Ant2	19.066
NVNT	ax20	5825	Ant2	19.057
NVNT	ax40	5755	Ant1	37.82
NVNT	ax40	5795	Ant1	37.892
NVNT	ax40	5755	Ant2	37.856
NVNT	ax40	5795	Ant2	37.856
NVNT	ax80	5775	Ant1	76.612
NVNT	ax80	5775	Ant2	76.684

