




For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

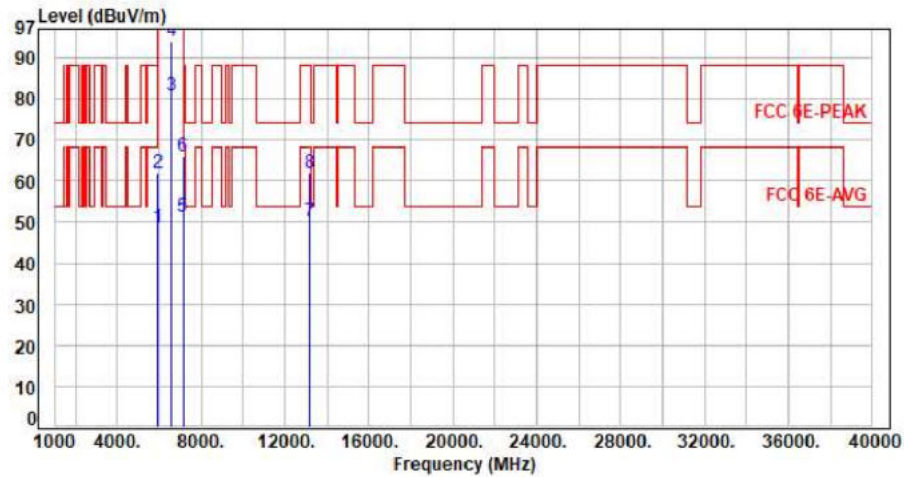

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.20          | 48.86          | 68.20          | -19.34      | Average  | 100         | 44            | P   |
| 2   | 5925.00         | 7.66        | 54.30          | 61.96          | 88.20          | -26.24      | Peak     | 100         | 44            | P   |
| 3   | 6565.00         | 8.67        | 72.26          | 80.93          | 200.00         | -119.07     | Average  | 100         | 44            | P   |
| 4   | 6565.00         | 8.67        | 85.27          | 93.94          | 200.00         | -106.06     | Peak     | 100         | 44            | P   |
| 5   | 7125.00         | 10.05       | 41.07          | 51.12          | 68.20          | -17.08      | Average  | 100         | 44            | P   |
| 6   | 7125.00         | 10.05       | 55.99          | 66.04          | 88.20          | -22.16      | Peak     | 100         | 44            | P   |
| 7   | 13130.00        | 20.32       | 29.81          | 50.13          | 68.20          | -18.07      | Average  | 100         | 164           | P   |
| 8   | 13130.00        | 20.32       | 41.55          | 61.87          | 88.20          | -26.33      | Peak     | 100         | 164           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

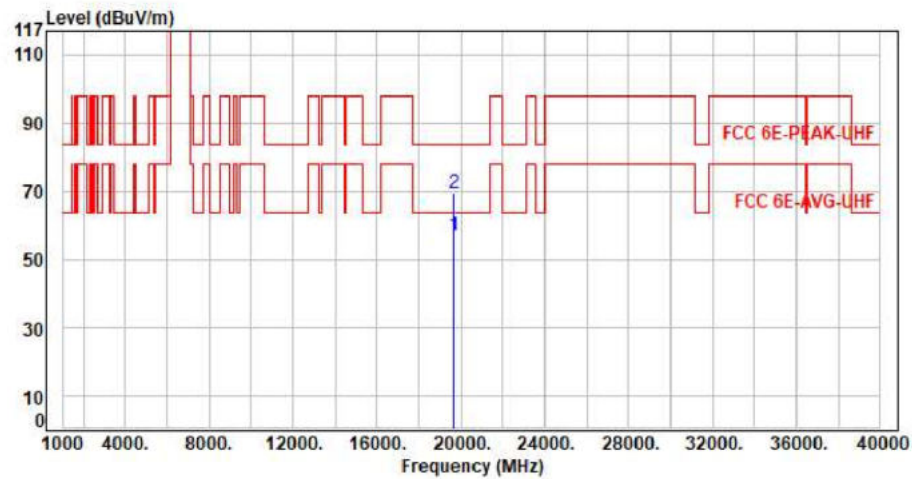


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19695.00           | 11.45          | 45.45             | 56.90             | 63.54             | -6.64          | Average  | 150            | 360              | P   |
| 2   | 19695.00           | 11.45          | 57.74             | 69.19             | 83.54             | -14.35         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

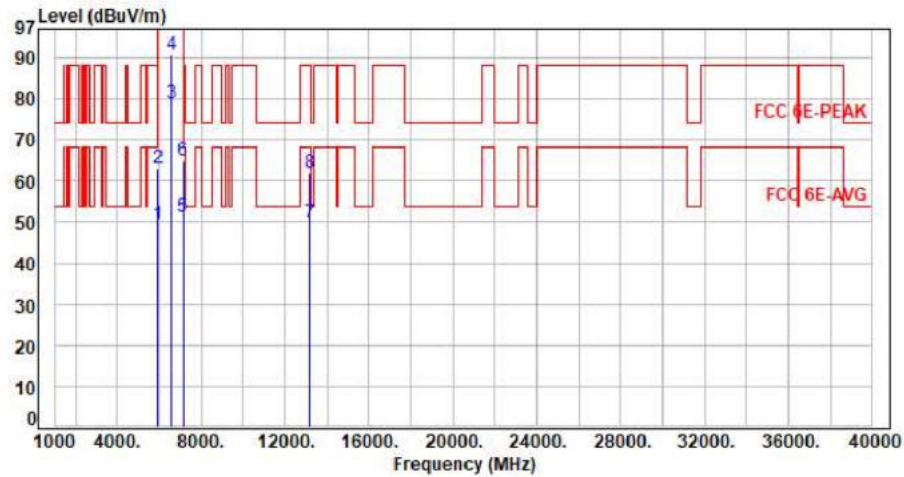

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.60          | 49.26          | 68.20          | -18.94      | Average  | 355         | 87            | P   |
| 2   | 5925.00         | 7.66        | 55.30          | 62.96          | 88.20          | -25.24      | Peak     | 355         | 87            | P   |
| 3   | 6565.00         | 8.67        | 70.07          | 78.74          | 200.00         | -121.26     | Average  | 355         | 87            | P   |
| 4   | 6565.00         | 8.67        | 82.20          | 90.87          | 200.00         | -109.13     | Peak     | 355         | 87            | P   |
| 5   | 7125.00         | 10.05       | 41.05          | 51.10          | 68.20          | -17.10      | Average  | 355         | 87            | P   |
| 6   | 7125.00         | 10.05       | 54.79          | 64.84          | 88.20          | -23.36      | Peak     | 355         | 87            | P   |
| 7   | 13130.00        | 20.32       | 29.54          | 49.86          | 68.20          | -18.34      | Average  | 100         | 164           | P   |
| 8   | 13130.00        | 20.32       | 41.52          | 61.84          | 88.20          | -26.36      | Peak     | 100         | 164           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

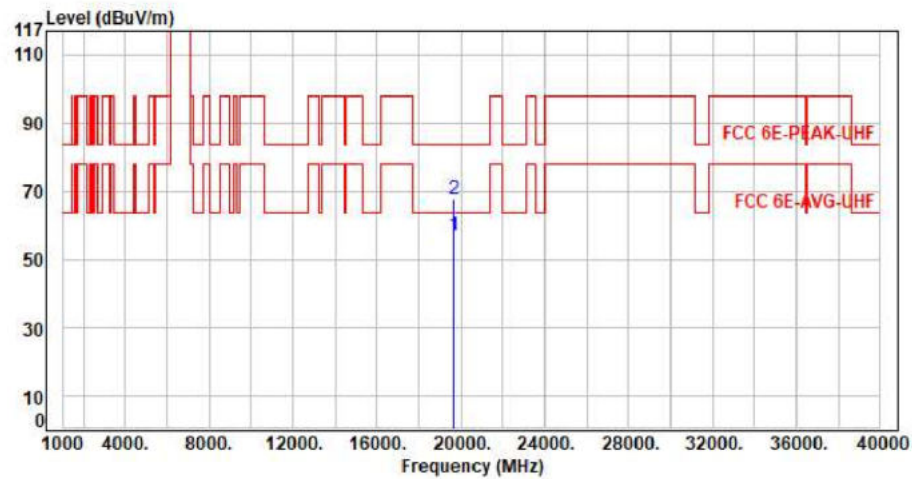


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19695.00           | 11.45          | 45.42             | 56.87             | 63.54             | -6.67          | Average  | 150            | 360              | P   |
| 2   | 19695.00           | 11.45          | 56.31             | 67.76             | 83.54             | -15.78         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

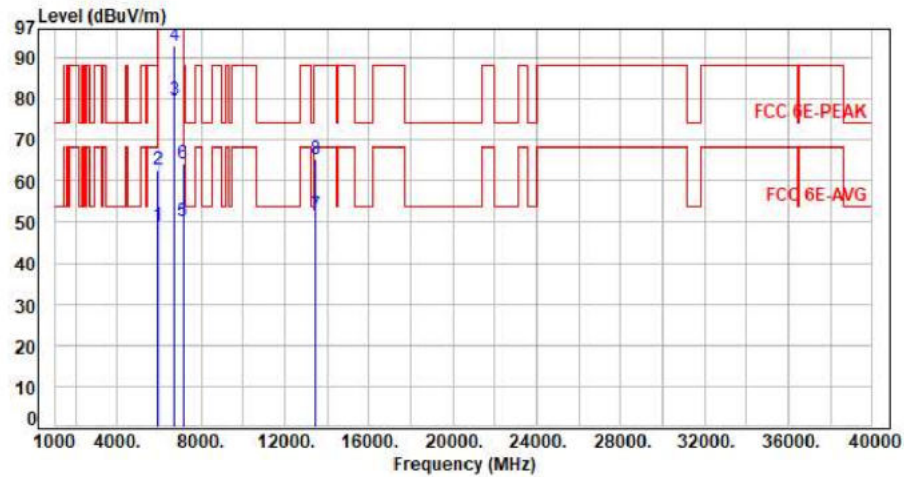


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.22          | 48.88          | 68.20          | -19.32      | Average  | 100         | 350           | P   |
| 2   | 5925.00         | 7.66        | 54.86          | 62.52          | 88.20          | -25.68      | Peak     | 100         | 350           | P   |
| 3   | 6725.00         | 9.33        | 70.39          | 79.72          | 200.00         | -120.28     | Average  | 100         | 350           | P   |
| 4   | 6725.00         | 9.33        | 83.55          | 92.88          | 200.00         | -107.12     | Peak     | 100         | 350           | P   |
| 5   | 7125.00         | 10.05       | 40.29          | 50.34          | 68.20          | -17.86      | Average  | 100         | 350           | P   |
| 6   | 7125.00         | 10.05       | 54.07          | 64.12          | 88.20          | -24.08      | Peak     | 100         | 350           | P   |
| 7   | 13450.00        | 21.80       | 29.72          | 51.52          | 68.20          | -16.68      | Average  | 100         | 175           | P   |
| 8   | 13450.00        | 21.80       | 43.52          | 65.32          | 88.20          | -22.88      | Peak     | 100         | 175           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

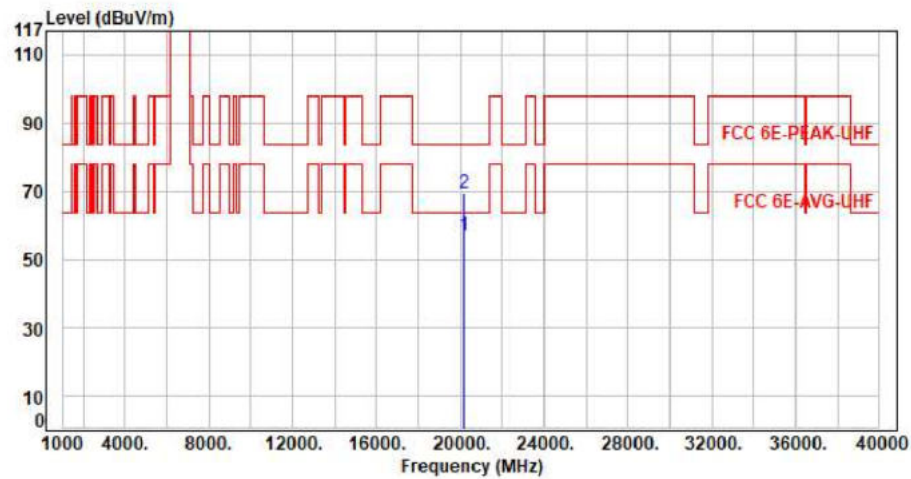


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20175.00           | 11.46          | 45.43             | 56.89             | 63.54             | -6.65          | Average  | 150            | 360              | P   |
| 2   | 20175.00           | 11.46          | 57.86             | 69.32             | 83.54             | -14.22         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

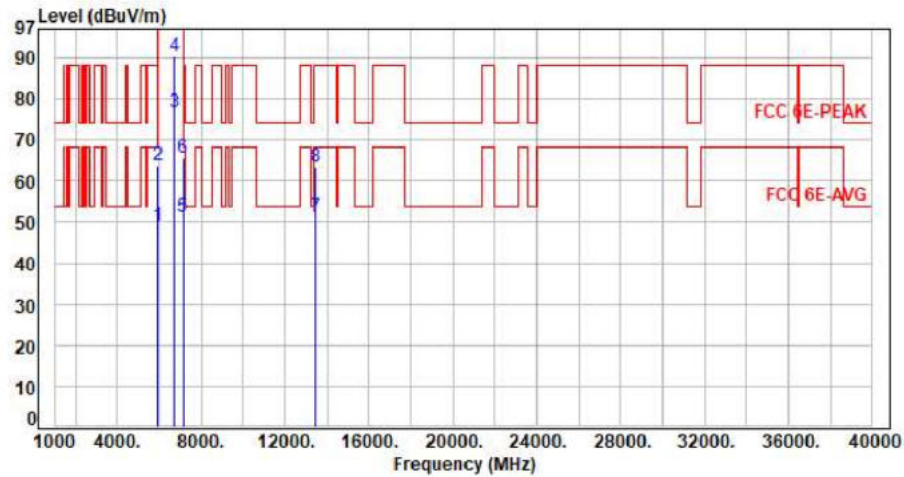

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.28          | 48.94          | 68.20          | -19.26      | Average  | 400         | 90            | P   |
| 2   | 5925.00         | 7.66        | 56.18          | 63.84          | 88.20          | -24.36      | Peak     | 400         | 90            | P   |
| 3   | 6725.00         | 9.33        | 67.28          | 76.61          | 200.00         | -123.39     | Average  | 400         | 90            | P   |
| 4   | 6725.00         | 9.33        | 81.18          | 90.51          | 200.00         | -109.49     | Peak     | 400         | 90            | P   |
| 5   | 7125.00         | 10.05       | 41.29          | 51.34          | 68.20          | -16.86      | Average  | 400         | 90            | P   |
| 6   | 7125.00         | 10.05       | 55.67          | 65.72          | 88.20          | -22.48      | Peak     | 400         | 90            | P   |
| 7   | 13450.00        | 21.80       | 29.63          | 51.43          | 68.20          | -16.77      | Average  | 100         | 200           | P   |
| 8   | 13450.00        | 21.80       | 41.69          | 63.49          | 88.20          | -24.71      | Peak     | 100         | 200           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

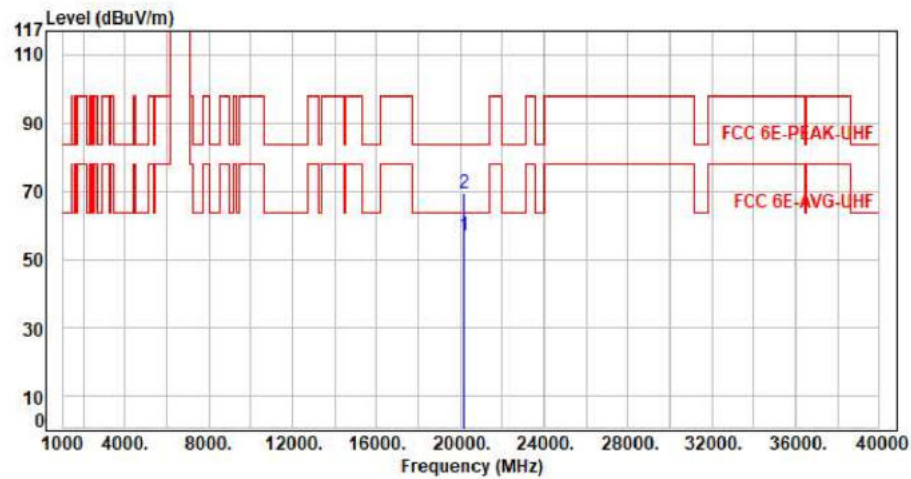


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20175.00           | 11.46          | 45.56             | 57.02             | 63.54             | -6.52          | Average  | 150            | 360              | P   |
| 2   | 20175.00           | 11.46          | 57.76             | 69.22             | 83.54             | -14.32         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

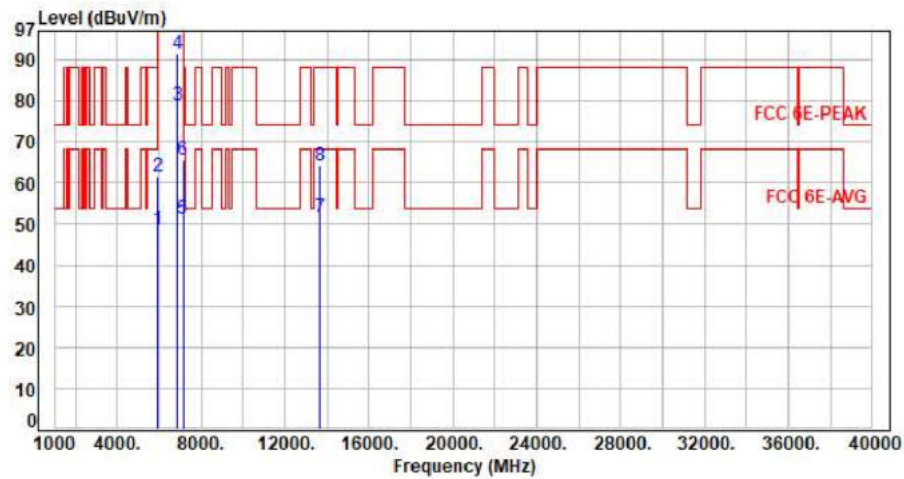

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.02          | 48.68          | 68.20          | -19.52      | Average  | 100         | 348           | P   |
| 2   | 5925.00         | 7.66        | 54.06          | 61.72          | 88.20          | -26.48      | Peak     | 100         | 348           | P   |
| 3   | 6845.00         | 9.48        | 69.52          | 79.00          | 200.00         | -121.00     | Average  | 100         | 348           | P   |
| 4   | 6845.00         | 9.48        | 82.02          | 91.50          | 200.00         | -108.50     | Peak     | 100         | 348           | P   |
| 5   | 7125.00         | 10.05       | 41.28          | 51.33          | 68.20          | -16.87      | Average  | 100         | 348           | P   |
| 6   | 7125.00         | 10.05       | 55.68          | 65.73          | 88.20          | -22.47      | Peak     | 100         | 348           | P   |
| 7   | 13690.00        | 22.40       | 29.18          | 51.58          | 68.20          | -16.62      | Average  | 100         | 164           | P   |
| 8   | 13690.00        | 22.40       | 41.62          | 64.02          | 88.20          | -24.18      | Peak     | 100         | 164           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

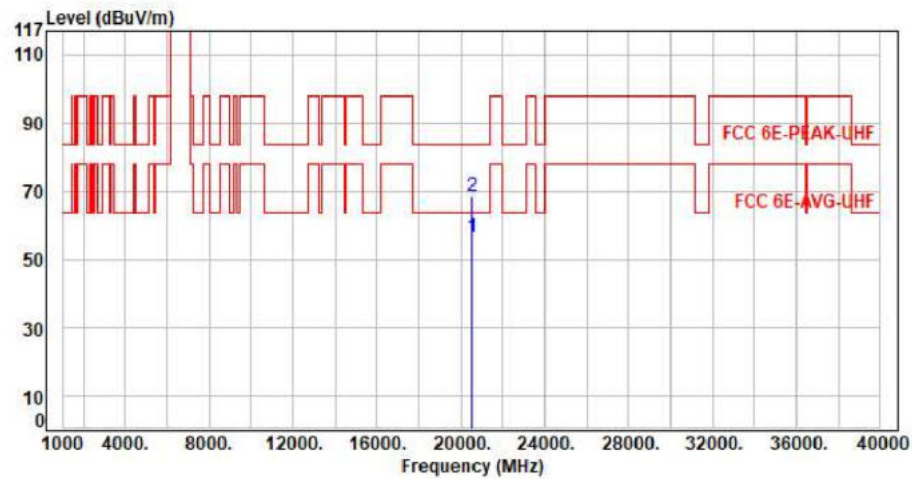


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20535.00           | 11.44          | 44.99             | 56.43             | 63.54             | -7.11          | Average  | 150            | 360              | P   |
| 2   | 20535.00           | 11.44          | 56.99             | 68.43             | 83.54             | -15.11         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

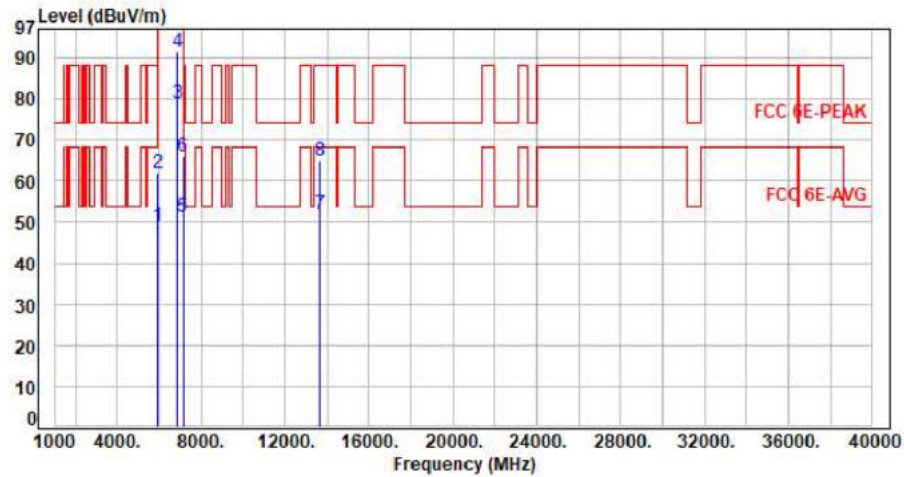

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.33          | 48.99          | 68.20          | -19.21      | Average  | 315         | 0             | P   |
| 2   | 5925.00         | 7.66        | 54.38          | 62.04          | 88.20          | -26.16      | Peak     | 315         | 0             | P   |
| 3   | 6845.00         | 9.48        | 69.55          | 79.03          | 200.00         | -120.97     | Average  | 315         | 0             | P   |
| 4   | 6845.00         | 9.48        | 81.83          | 91.31          | 200.00         | -108.69     | Peak     | 315         | 0             | P   |
| 5   | 7125.00         | 10.05       | 41.24          | 51.29          | 68.20          | -16.91      | Average  | 315         | 0             | P   |
| 6   | 7125.00         | 10.05       | 56.05          | 66.10          | 88.20          | -22.10      | Peak     | 315         | 0             | P   |
| 7   | 13690.00        | 22.40       | 29.64          | 52.04          | 68.20          | -16.16      | Average  | 100         | 196           | P   |
| 8   | 13690.00        | 22.40       | 42.51          | 64.91          | 88.20          | -23.29      | Peak     | 100         | 196           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

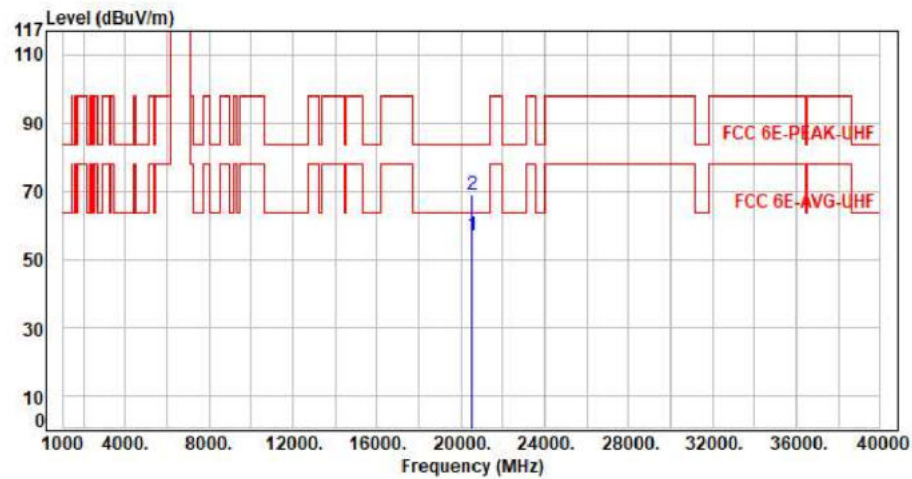


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 20535.00        | 11.44       | 45.32          | 56.76          | 63.54          | -6.78       | Average  | 150         | 360           | P   |
| 2   | 20535.00        | 11.44       | 57.53          | 68.97          | 83.54          | -14.57      | Peak     | 150         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

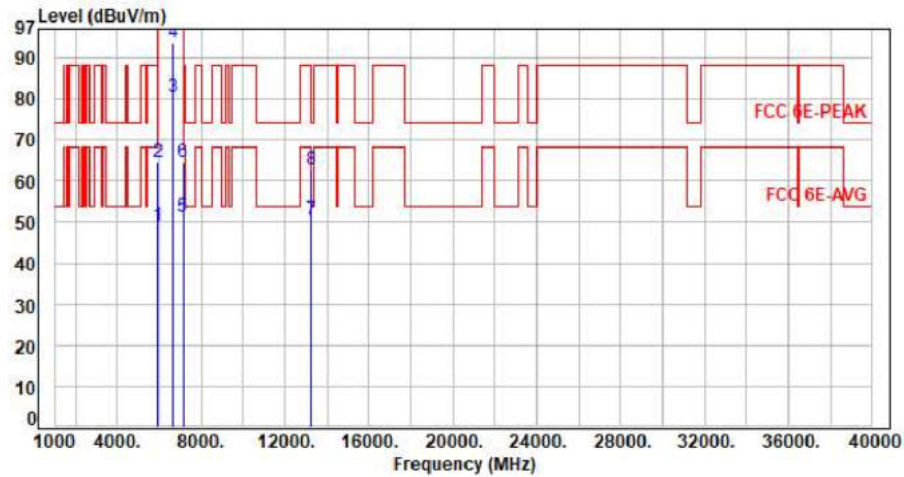

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.33          | 48.99          | 68.20          | -19.21      | Average  | 100         | 44            | P   |
| 2   | 5925.00         | 7.66        | 56.72          | 64.38          | 88.20          | -23.82      | Peak     | 100         | 44            | P   |
| 3   | 6625.00         | 8.94        | 71.40          | 80.34          | 200.00         | -119.66     | Average  | 100         | 44            | P   |
| 4   | 6625.00         | 8.94        | 84.87          | 93.81          | 200.00         | -106.19     | Peak     | 100         | 44            | P   |
| 5   | 7125.00         | 10.05       | 41.19          | 51.24          | 68.20          | -16.96      | Average  | 100         | 44            | P   |
| 6   | 7125.00         | 10.05       | 54.67          | 64.72          | 88.20          | -23.48      | Peak     | 100         | 44            | P   |
| 7   | 13250.00        | 21.00       | 29.61          | 50.61          | 54.00          | -3.39       | Average  | 100         | 189           | P   |
| 8   | 13250.00        | 21.00       | 41.69          | 62.69          | 74.00          | -11.31      | Peak     | 100         | 189           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

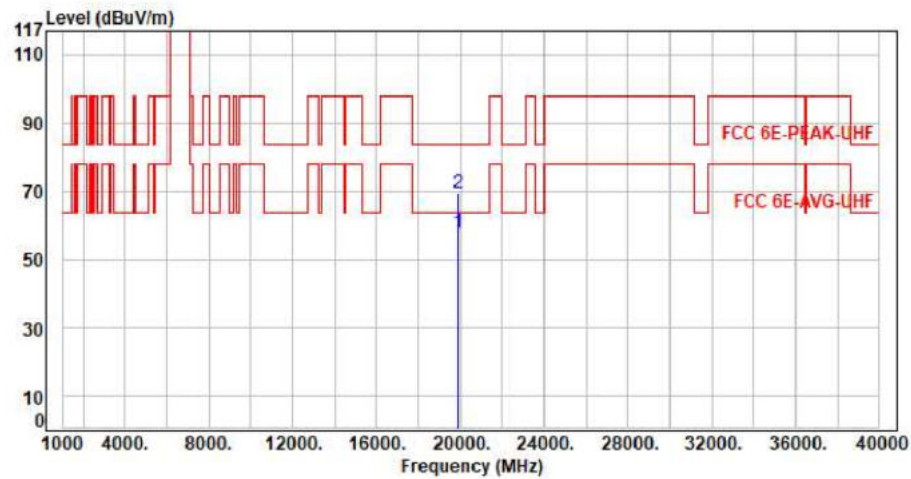


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19875.00           | 11.90          | 45.82             | 57.72             | 63.54             | -5.82          | Average  | 150            | 360              | P   |
| 2   | 19875.00           | 11.90          | 57.41             | 69.31             | 83.54             | -14.23         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

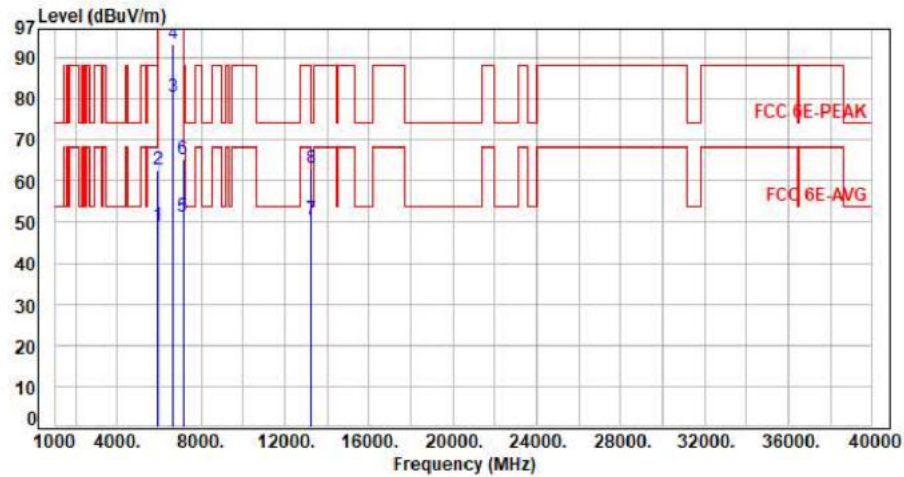

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.23          | 48.89          | 68.20          | -19.31      | Average  | 350         | 87            | P   |
| 2   | 5925.00         | 7.66        | 54.86          | 62.52          | 88.20          | -25.68      | Peak     | 350         | 87            | P   |
| 3   | 6625.00         | 8.94        | 71.58          | 80.52          | 200.00         | -119.48     | Average  | 350         | 87            | P   |
| 4   | 6625.00         | 8.94        | 84.49          | 93.43          | 200.00         | -106.57     | Peak     | 350         | 87            | P   |
| 5   | 7125.00         | 10.05       | 41.04          | 51.09          | 68.20          | -17.11      | Average  | 350         | 87            | P   |
| 6   | 7125.00         | 10.05       | 55.26          | 65.31          | 88.20          | -22.89      | Peak     | 350         | 87            | P   |
| 7   | 13250.00        | 21.00       | 29.64          | 50.64          | 54.00          | -3.36       | Average  | 100         | 164           | P   |
| 8   | 13250.00        | 21.00       | 42.22          | 63.22          | 74.00          | -10.78      | Peak     | 100         | 164           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

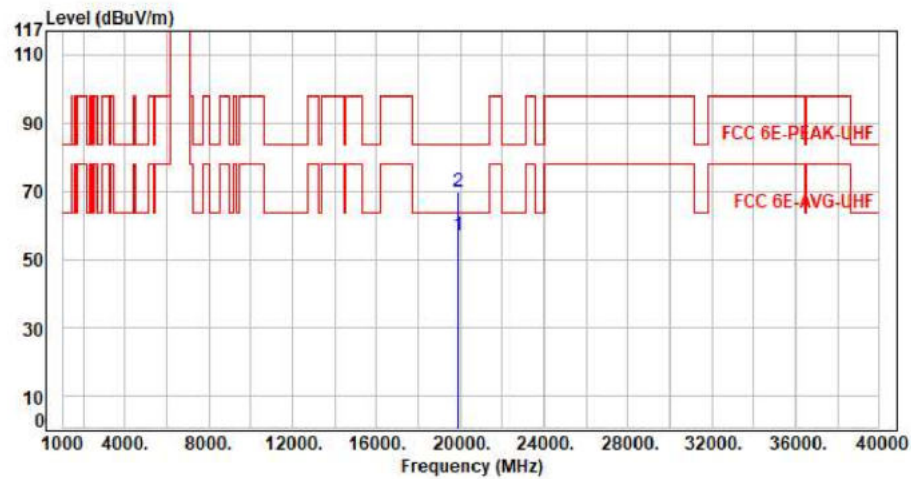


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19875.00           | 11.90          | 45.18             | 57.08             | 63.54             | -6.46          | Average  | 150            | 360              | P   |
| 2   | 19875.00           | 11.90          | 57.94             | 69.84             | 83.54             | -13.70         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

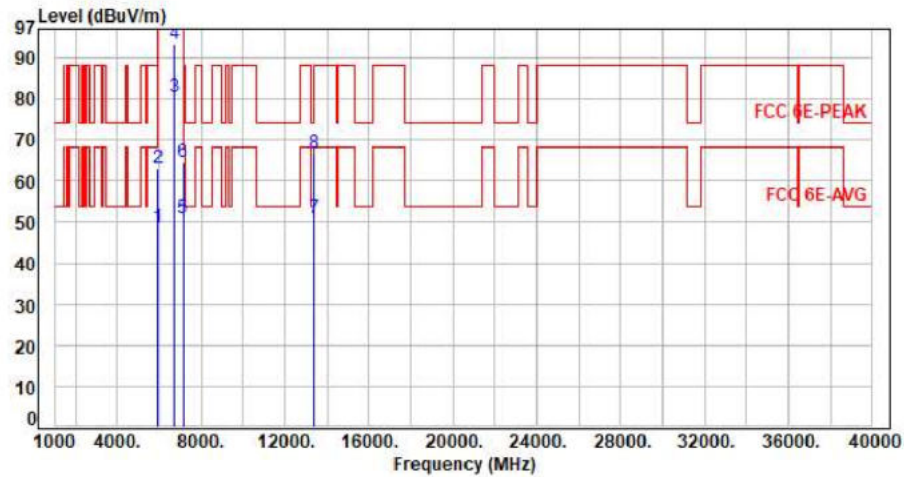

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.11          | 48.77          | 68.20          | -19.43      | Average  | 100         | 350           | P   |
| 2   | 5925.00         | 7.66        | 55.36          | 63.02          | 88.20          | -25.18      | Peak     | 100         | 350           | P   |
| 3   | 6705.00         | 9.25        | 71.30          | 80.55          | 200.00         | -119.45     | Average  | 100         | 350           | P   |
| 4   | 6705.00         | 9.25        | 83.96          | 93.21          | 200.00         | -106.79     | Peak     | 100         | 350           | P   |
| 5   | 7125.00         | 10.05       | 41.01          | 51.06          | 68.20          | -17.14      | Average  | 100         | 350           | P   |
| 6   | 7125.00         | 10.05       | 54.67          | 64.72          | 88.20          | -23.48      | Peak     | 100         | 350           | P   |
| 7   | 13410.00        | 21.62       | 29.42          | 51.04          | 68.20          | -17.16      | Average  | 100         | 173           | P   |
| 8   | 13410.00        | 21.62       | 45.11          | 66.73          | 88.20          | -21.47      | Peak     | 100         | 173           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

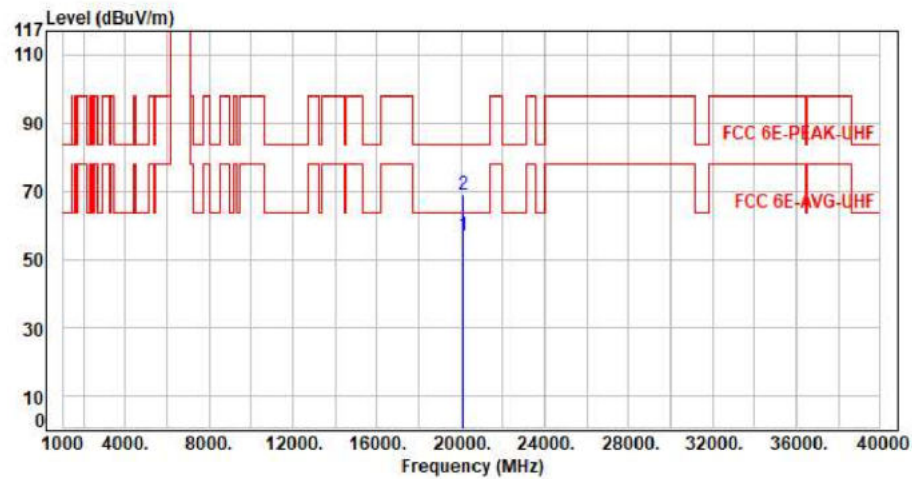

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20115.00           | 11.40          | 45.66             | 57.06             | 63.54             | -6.48          | Average  | 150            | 360              | P   |
| 2   | 20115.00           | 11.40          | 57.76             | 69.16             | 83.54             | -14.38         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

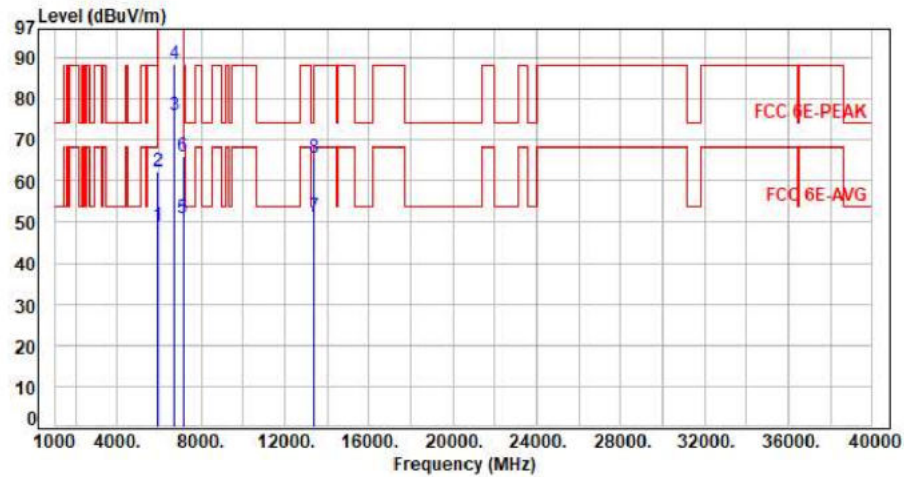


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.52          | 49.18          | 68.20          | -19.02      | Average  | 131         | 108           | P   |
| 2   | 5925.00         | 7.66        | 54.69          | 62.35          | 88.20          | -25.85      | Peak     | 131         | 108           | P   |
| 3   | 6705.00         | 9.25        | 66.85          | 76.10          | 200.00         | -123.90     | Average  | 131         | 108           | P   |
| 4   | 6705.00         | 9.25        | 79.36          | 88.61          | 200.00         | -111.39     | Peak     | 131         | 108           | P   |
| 5   | 7125.00         | 10.05       | 41.02          | 51.07          | 68.20          | -17.13      | Average  | 131         | 108           | P   |
| 6   | 7125.00         | 10.05       | 56.07          | 66.12          | 88.20          | -22.08      | Peak     | 131         | 108           | P   |
| 7   | 13410.00        | 21.62       | 29.61          | 51.23          | 68.20          | -16.97      | Average  | 100         | 192           | P   |
| 8   | 13410.00        | 21.62       | 44.08          | 65.70          | 88.20          | -22.50      | Peak     | 100         | 192           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

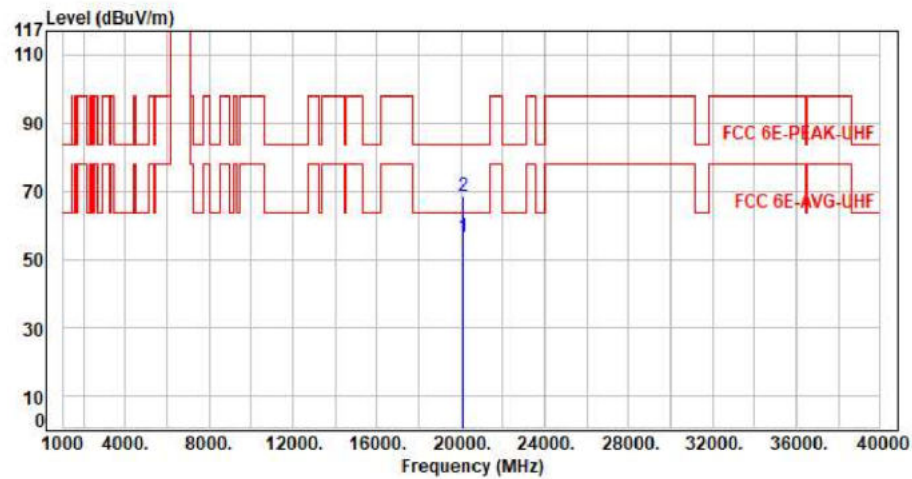


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20115.00           | 11.40          | 45.27             | 56.67             | 63.54             | -6.87          | Average  | 150            | 360              | P   |
| 2   | 20115.00           | 11.40          | 57.13             | 68.53             | 83.54             | -15.01         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

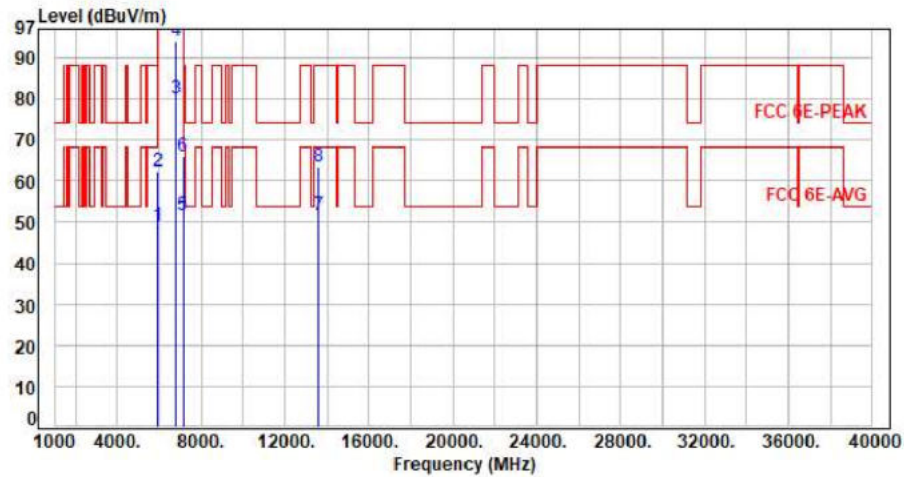

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.42          | 49.08          | 68.20          | -19.12      | Average  | 100         | 351           | P   |
| 2   | 5925.00         | 7.66        | 54.67          | 62.33          | 88.20          | -25.87      | Peak     | 100         | 351           | P   |
| 3   | 6785.00         | 9.46        | 70.72          | 80.18          | 200.00         | -119.82     | Average  | 100         | 351           | P   |
| 4   | 6785.00         | 9.46        | 84.64          | 94.10          | 200.00         | -105.90     | Peak     | 100         | 351           | P   |
| 5   | 7125.00         | 10.05       | 41.75          | 51.80          | 68.20          | -16.40      | Average  | 100         | 351           | P   |
| 6   | 7125.00         | 10.05       | 55.83          | 65.88          | 88.20          | -22.32      | Peak     | 100         | 351           | P   |
| 7   | 13570.00        | 22.06       | 29.46          | 51.52          | 68.20          | -16.68      | Average  | 100         | 228           | P   |
| 8   | 13570.00        | 22.06       | 41.30          | 63.36          | 88.20          | -24.84      | Peak     | 100         | 228           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

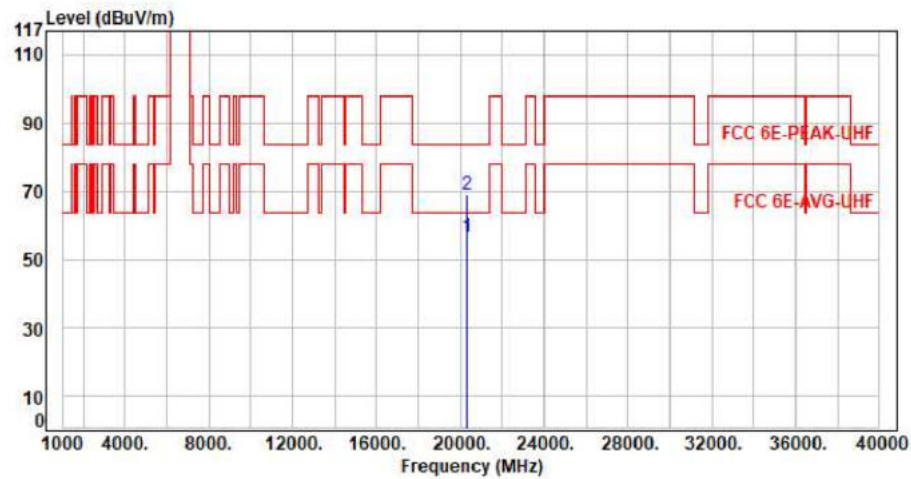


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 20355.00        | 11.06       | 45.55          | 56.61          | 63.54          | -6.93       | Average  | 150         | 360           | P   |
| 2   | 20355.00        | 11.06       | 57.85          | 68.91          | 83.54          | -14.63      | Peak     | 150         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

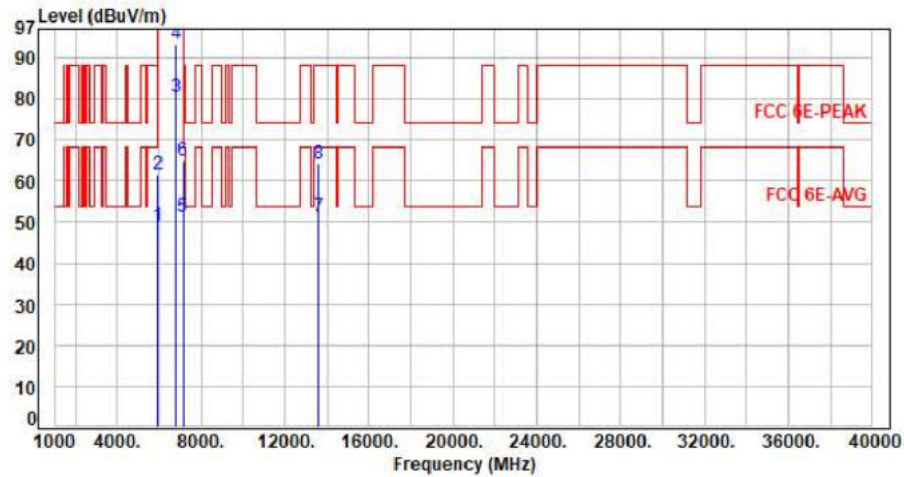

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.28          | 48.94          | 68.20          | -19.26      | Average  | 301         | 84            | P   |
| 2   | 5925.00         | 7.66        | 54.04          | 61.70          | 88.20          | -26.50      | Peak     | 301         | 84            | P   |
| 3   | 6785.00         | 9.46        | 70.89          | 80.35          | 200.00         | -119.65     | Average  | 301         | 84            | P   |
| 4   | 6785.00         | 9.46        | 83.83          | 93.29          | 200.00         | -106.71     | Peak     | 301         | 84            | P   |
| 5   | 7125.00         | 10.05       | 41.21          | 51.26          | 68.20          | -16.94      | Average  | 301         | 84            | P   |
| 6   | 7125.00         | 10.05       | 54.68          | 64.73          | 88.20          | -23.47      | Peak     | 301         | 84            | P   |
| 7   | 13570.00        | 22.06       | 29.11          | 51.17          | 68.20          | -17.03      | Average  | 100         | 135           | P   |
| 8   | 13570.00        | 22.06       | 42.09          | 64.15          | 88.20          | -24.05      | Peak     | 100         | 135           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

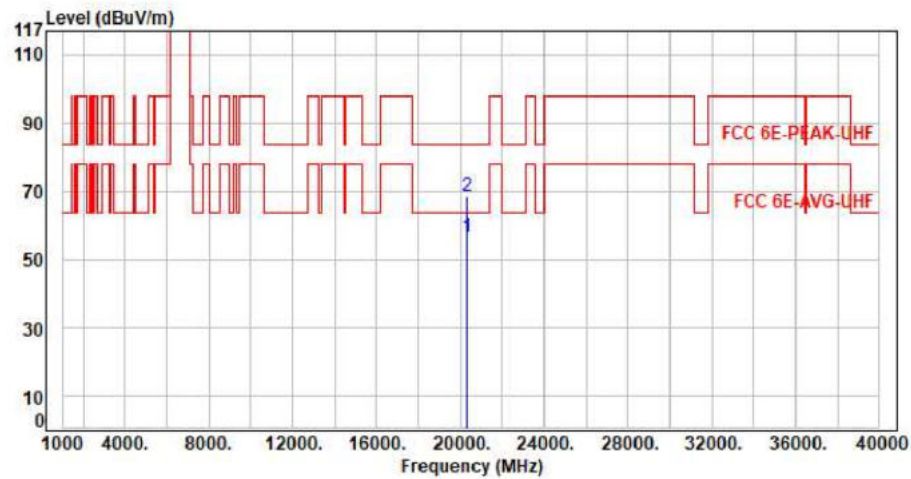


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20355.00           | 11.06          | 45.31             | 56.37             | 63.54             | -7.17          | Average  | 150            | 360              | P   |
| 2   | 20355.00           | 11.06          | 57.45             | 68.51             | 83.54             | -15.03         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

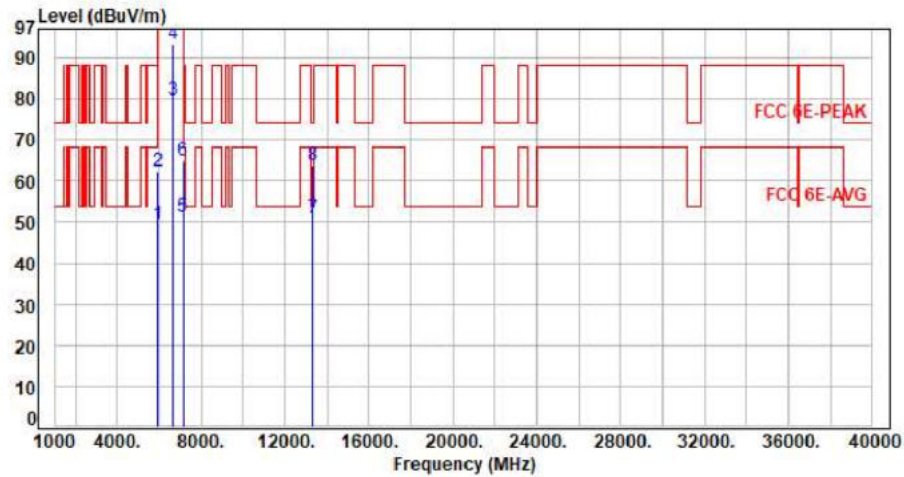


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.85          | 49.51          | 68.20          | -18.69      | Average  | 100         | 43            | P   |
| 2   | 5925.00         | 7.66        | 54.56          | 62.22          | 88.20          | -25.98      | Peak     | 100         | 43            | P   |
| 3   | 6665.00         | 9.08        | 70.58          | 79.66          | 200.00         | -120.34     | Average  | 100         | 43            | P   |
| 4   | 6665.00         | 9.08        | 84.35          | 93.43          | 200.00         | -106.57     | Peak     | 100         | 43            | P   |
| 5   | 7125.00         | 10.05       | 41.21          | 51.26          | 68.20          | -16.94      | Average  | 100         | 43            | P   |
| 6   | 7125.00         | 10.05       | 54.95          | 65.00          | 88.20          | -23.20      | Peak     | 100         | 43            | P   |
| 7   | 13330.00        | 21.30       | 29.62          | 50.92          | 54.00          | -3.08       | Average  | 100         | 158           | P   |
| 8   | 13330.00        | 21.30       | 42.37          | 63.67          | 74.00          | -10.33      | Peak     | 100         | 158           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

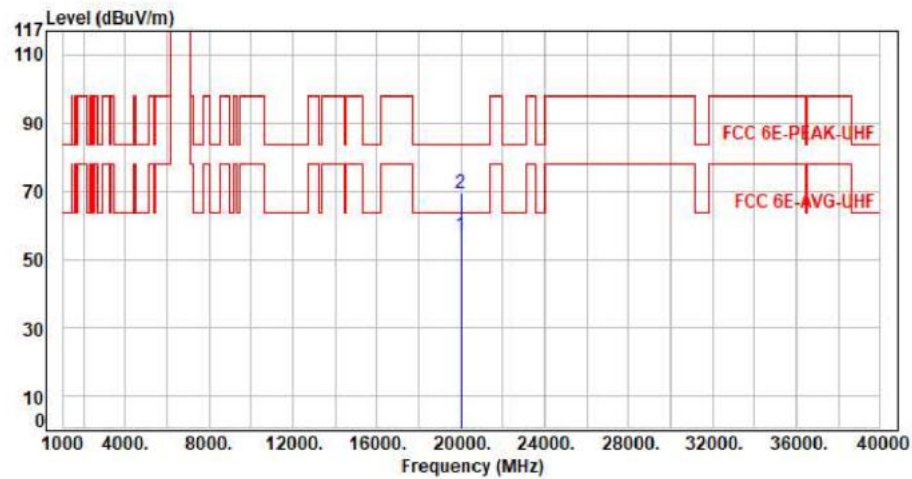


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19995.00           | 11.70          | 45.28             | 56.98             | 63.54             | -6.56          | Average  | 150            | 360              | P   |
| 2   | 19995.00           | 11.70          | 57.49             | 69.19             | 83.54             | -14.35         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

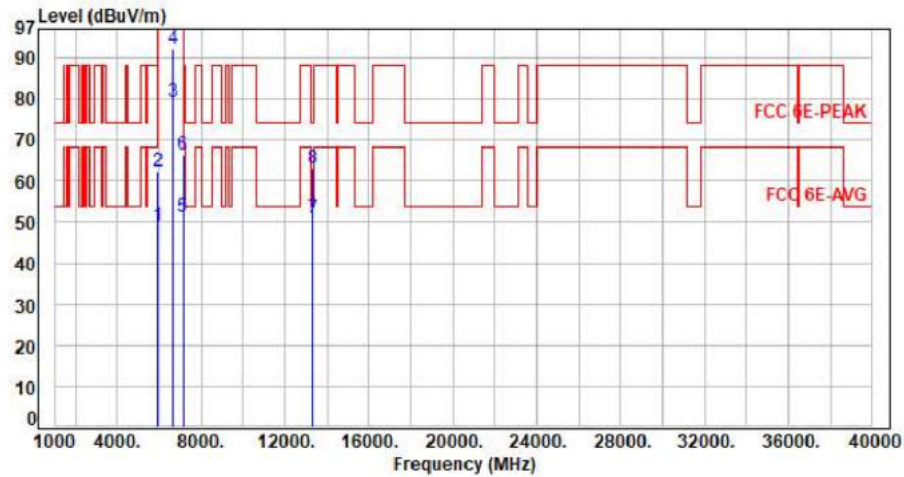

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.28          | 48.94          | 68.20          | -19.26      | Average  | 344         | 92            | P   |
| 2   | 5925.00         | 7.66        | 54.56          | 62.22          | 88.20          | -25.98      | Peak     | 344         | 92            | P   |
| 3   | 6665.00         | 9.08        | 70.17          | 79.25          | 200.00         | -120.75     | Average  | 344         | 92            | P   |
| 4   | 6665.00         | 9.08        | 83.10          | 92.18          | 200.00         | -107.82     | Peak     | 344         | 92            | P   |
| 5   | 7125.00         | 10.05       | 41.31          | 51.36          | 68.20          | -16.84      | Average  | 344         | 92            | P   |
| 6   | 7125.00         | 10.05       | 56.27          | 66.32          | 88.20          | -21.88      | Peak     | 344         | 92            | P   |
| 7   | 13330.00        | 21.30       | 29.62          | 50.92          | 54.00          | -3.08       | Average  | 100         | 112           | P   |
| 8   | 13330.00        | 21.30       | 41.62          | 62.92          | 74.00          | -11.08      | Peak     | 100         | 112           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

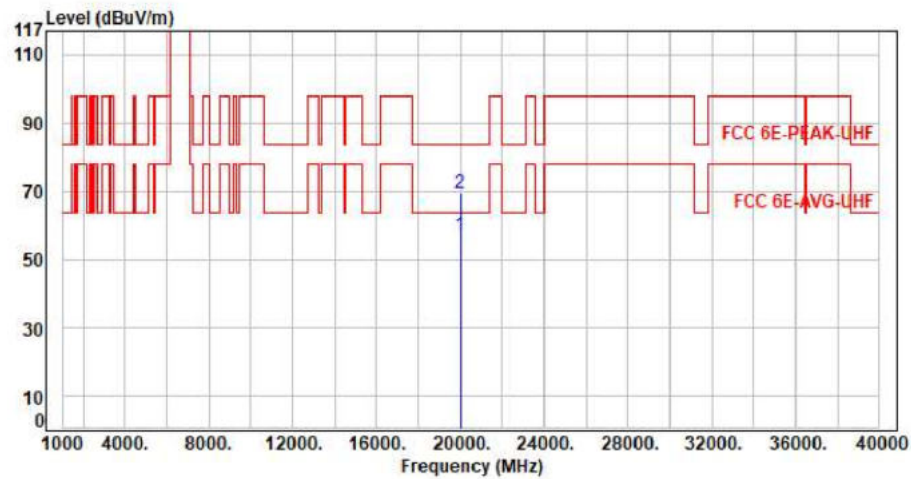

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19995.00           | 11.70          | 45.35             | 57.05             | 63.54             | -6.49          | Average  | 150            | 360              | P   |
| 2   | 19995.00           | 11.70          | 57.81             | 69.51             | 83.54             | -14.03         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

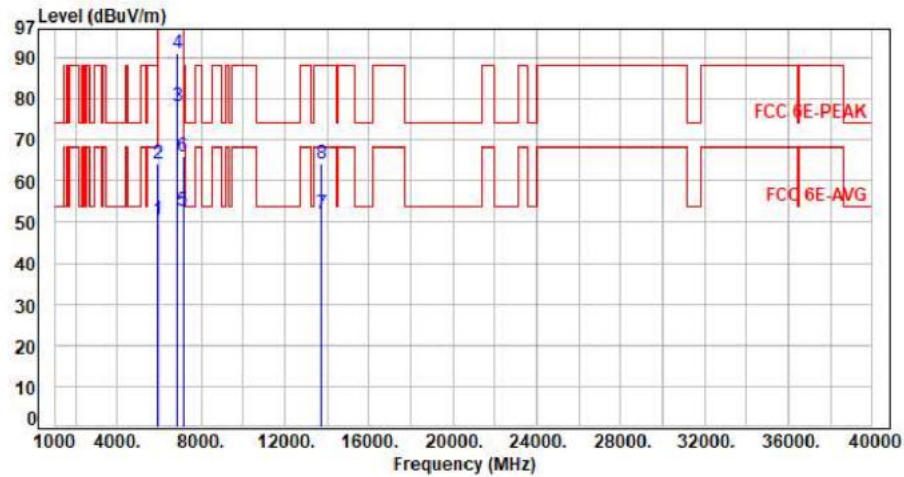

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.93          | 50.59          | 68.20          | -17.61      | Average  | 105         | 348           | P   |
| 2   | 5925.00         | 7.66        | 56.38          | 64.04          | 88.20          | -24.16      | Peak     | 105         | 348           | P   |
| 3   | 6875.00         | 9.55        | 68.79          | 78.34          | 200.00         | -121.66     | Average  | 105         | 348           | P   |
| 4   | 6875.00         | 9.55        | 81.60          | 91.15          | 200.00         | -108.85     | Peak     | 105         | 348           | P   |
| 5   | 7125.00         | 10.05       | 42.63          | 52.68          | 68.20          | -15.52      | Average  | 105         | 348           | P   |
| 6   | 7125.00         | 10.05       | 55.94          | 65.99          | 88.20          | -22.21      | Peak     | 105         | 348           | P   |
| 7   | 13750.00        | 22.65       | 29.50          | 52.15          | 68.20          | -16.05      | Average  | 100         | 225           | P   |
| 8   | 13750.00        | 22.65       | 41.69          | 64.34          | 88.20          | -23.86      | Peak     | 100         | 225           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

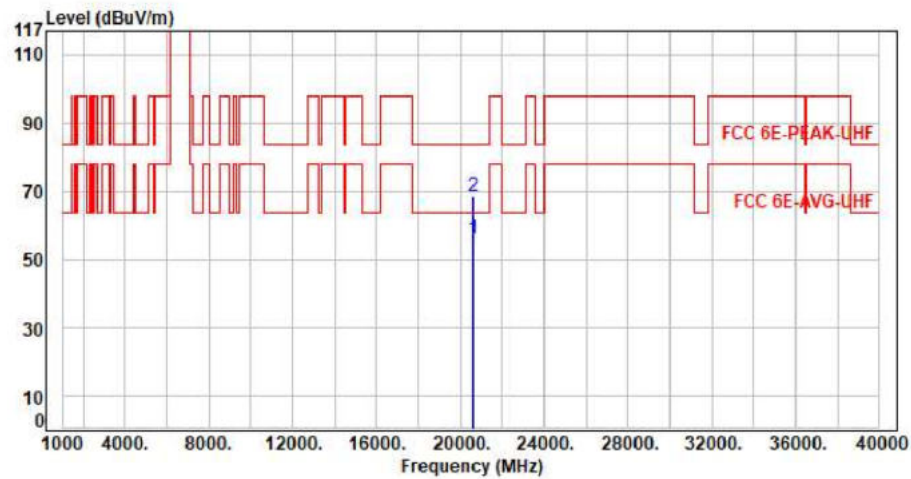


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20625.00           | 11.14          | 45.03             | 56.17             | 63.54             | -7.37          | Average  | 150            | 360              | P   |
| 2   | 20625.00           | 11.14          | 57.19             | 68.33             | 83.54             | -15.21         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

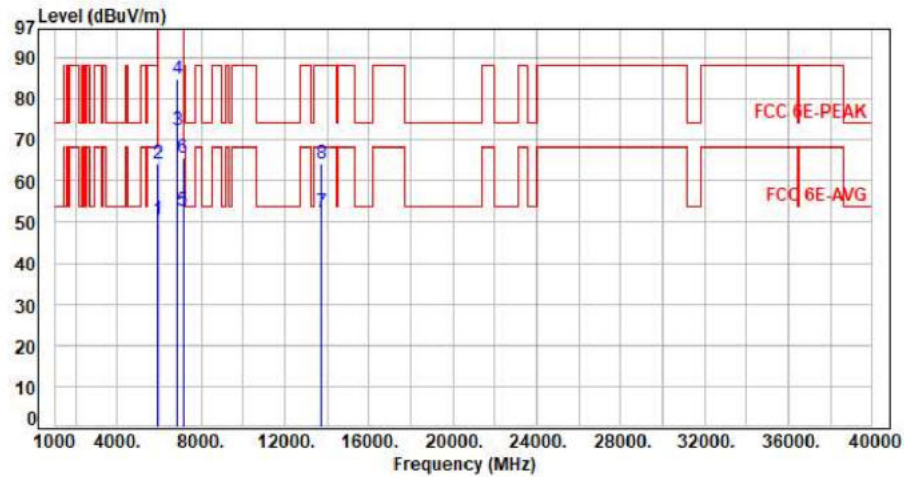


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.80          | 50.46          | 68.20          | -17.74      | Average  | 100         | 270           | P   |
| 2   | 5925.00         | 7.66        | 56.45          | 64.11          | 88.20          | -24.09      | Peak     | 100         | 270           | P   |
| 3   | 6875.00         | 9.55        | 62.61          | 72.16          | 200.00         | -127.84     | Average  | 100         | 270           | P   |
| 4   | 6875.00         | 9.55        | 75.23          | 84.78          | 200.00         | -115.22     | Peak     | 100         | 270           | P   |
| 5   | 7125.00         | 10.05       | 42.68          | 52.73          | 68.20          | -15.47      | Average  | 100         | 270           | P   |
| 6   | 7125.00         | 10.05       | 55.68          | 65.73          | 88.20          | -22.47      | Peak     | 100         | 270           | P   |
| 7   | 13750.00        | 22.65       | 29.61          | 52.26          | 68.20          | -15.94      | Average  | 100         | 142           | P   |
| 8   | 13750.00        | 22.65       | 41.68          | 64.33          | 88.20          | -23.87      | Peak     | 100         | 142           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

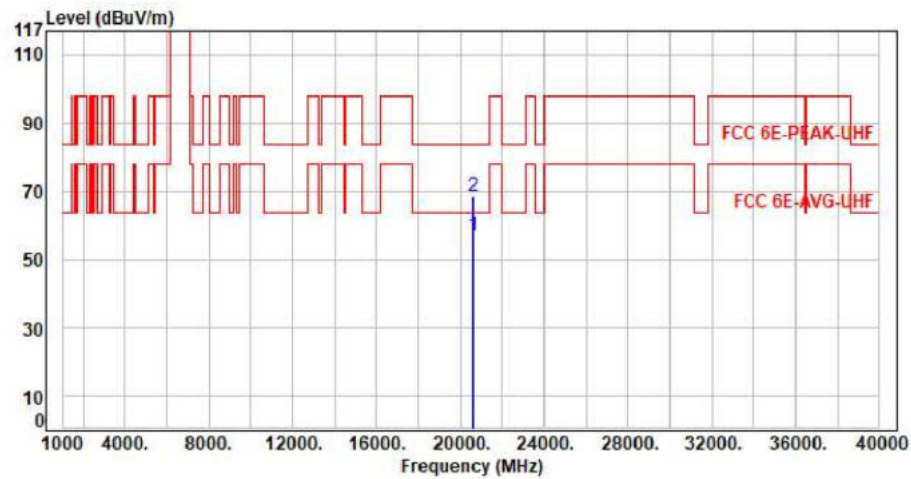


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20625.00           | 11.14          | 45.95             | 57.09             | 63.54             | -6.45          | Average  | 150            | 360              | P   |
| 2   | 20625.00           | 11.14          | 57.38             | 68.52             | 83.54             | -15.02         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

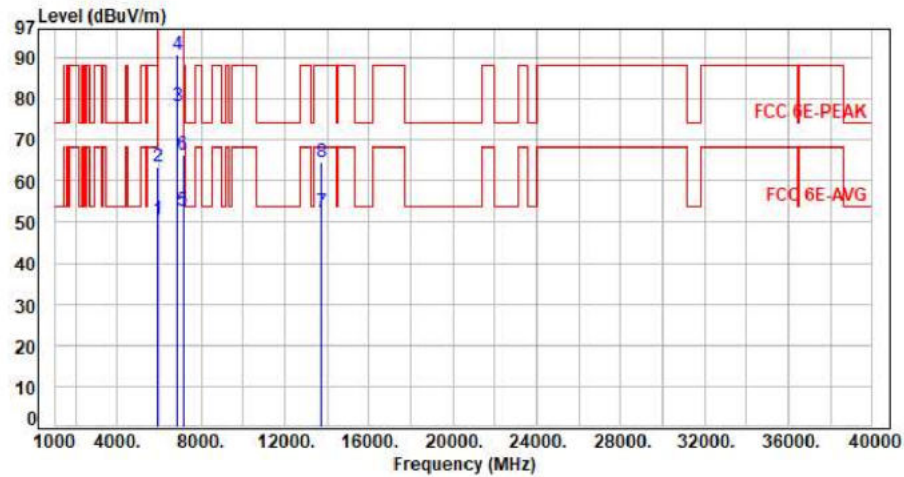

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.75          | 50.41          | 68.20          | -17.79      | Average  | 100         | 347           | P   |
| 2   | 5925.00         | 7.66        | 55.64          | 63.30          | 88.20          | -24.90      | Peak     | 100         | 347           | P   |
| 3   | 6885.00         | 9.56        | 68.66          | 78.22          | 200.00         | -121.78     | Average  | 100         | 347           | P   |
| 4   | 6885.00         | 9.56        | 81.26          | 90.82          | 200.00         | -109.18     | Peak     | 100         | 347           | P   |
| 5   | 7125.00         | 10.05       | 42.75          | 52.80          | 68.20          | -15.40      | Average  | 100         | 347           | P   |
| 6   | 7125.00         | 10.05       | 56.50          | 66.55          | 88.20          | -21.65      | Peak     | 100         | 347           | P   |
| 7   | 13770.00        | 22.69       | 29.66          | 52.35          | 68.20          | -15.85      | Average  | 100         | 142           | P   |
| 8   | 13770.00        | 22.69       | 41.67          | 64.36          | 88.20          | -23.84      | Peak     | 100         | 142           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

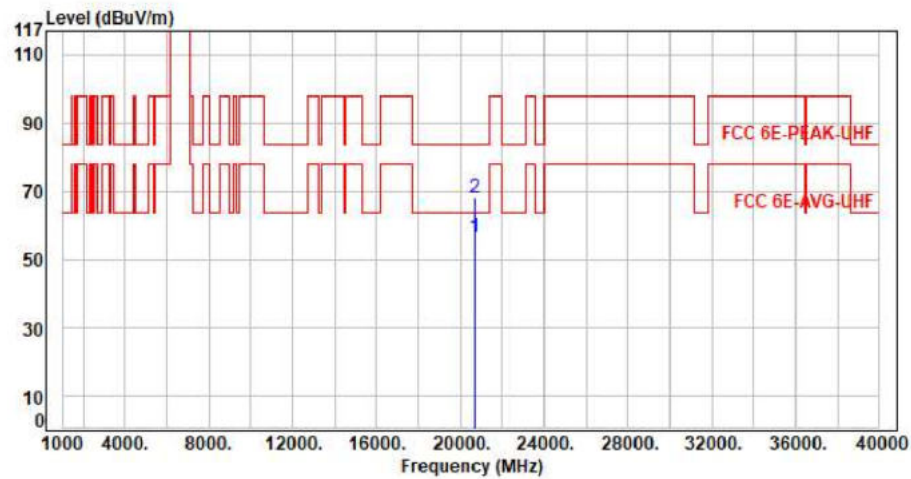


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20655.00           | 10.99          | 45.31             | 56.30             | 63.54             | -7.24          | Average  | 150            | 360              | P   |
| 2   | 20655.00           | 10.99          | 57.22             | 68.21             | 83.54             | -15.33         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

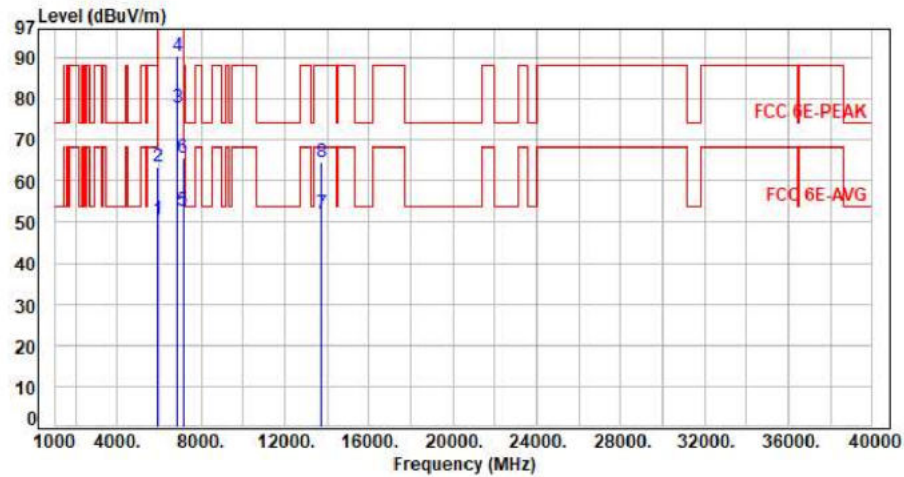

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.87          | 50.53          | 68.20          | -17.67      | Average  | 400         | 270           | P   |
| 2   | 5925.00         | 7.66        | 55.79          | 63.45          | 88.20          | -24.75      | Peak     | 400         | 270           | P   |
| 3   | 6885.00         | 9.56        | 68.27          | 77.83          | 200.00         | -122.17     | Average  | 400         | 270           | P   |
| 4   | 6885.00         | 9.56        | 80.84          | 90.40          | 200.00         | -109.60     | Peak     | 400         | 270           | P   |
| 5   | 7125.00         | 10.05       | 42.64          | 52.69          | 68.20          | -15.51      | Average  | 400         | 270           | P   |
| 6   | 7125.00         | 10.05       | 55.76          | 65.81          | 88.20          | -22.39      | Peak     | 400         | 270           | P   |
| 7   | 13770.00        | 22.69       | 29.44          | 52.13          | 68.20          | -16.07      | Average  | 100         | 134           | P   |
| 8   | 13770.00        | 22.69       | 41.68          | 64.37          | 88.20          | -23.83      | Peak     | 100         | 134           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

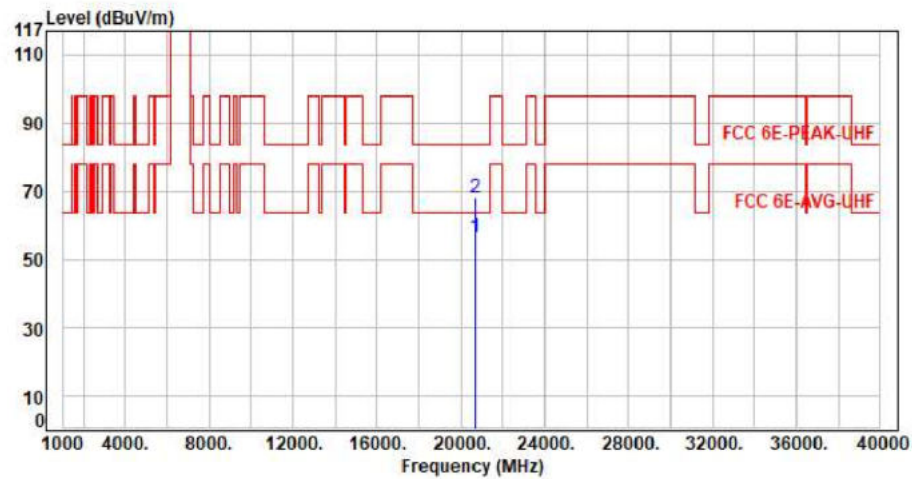


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 20655.00        | 10.99       | 45.48          | 56.47          | 63.54          | -7.07       | Average  | 150         | 360           | P   |
| 2   | 20655.00        | 10.99       | 57.11          | 68.10          | 83.54          | -15.44      | Peak     | 150         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

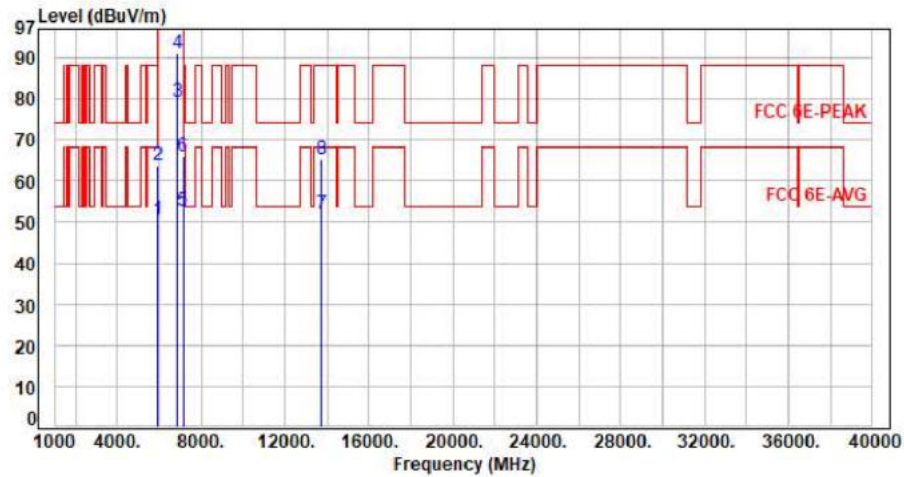


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.81          | 50.47          | 68.20          | -17.73      | Average  | 100         | 314           | P   |
| 2   | 5925.00         | 7.66        | 56.17          | 63.83          | 88.20          | -24.37      | Peak     | 100         | 314           | P   |
| 3   | 6865.00         | 9.52        | 69.60          | 79.12          | 200.00         | -120.88     | Average  | 100         | 314           | P   |
| 4   | 6865.00         | 9.52        | 81.74          | 91.26          | 200.00         | -108.74     | Peak     | 100         | 314           | P   |
| 5   | 7125.00         | 10.05       | 42.63          | 52.68          | 68.20          | -15.52      | Average  | 100         | 314           | P   |
| 6   | 7125.00         | 10.05       | 55.94          | 65.99          | 88.20          | -22.21      | Peak     | 100         | 314           | P   |
| 7   | 13730.00        | 22.57       | 29.61          | 52.18          | 68.20          | -16.02      | Average  | 100         | 158           | P   |
| 8   | 13730.00        | 22.57       | 42.77          | 65.34          | 88.20          | -22.86      | Peak     | 100         | 158           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

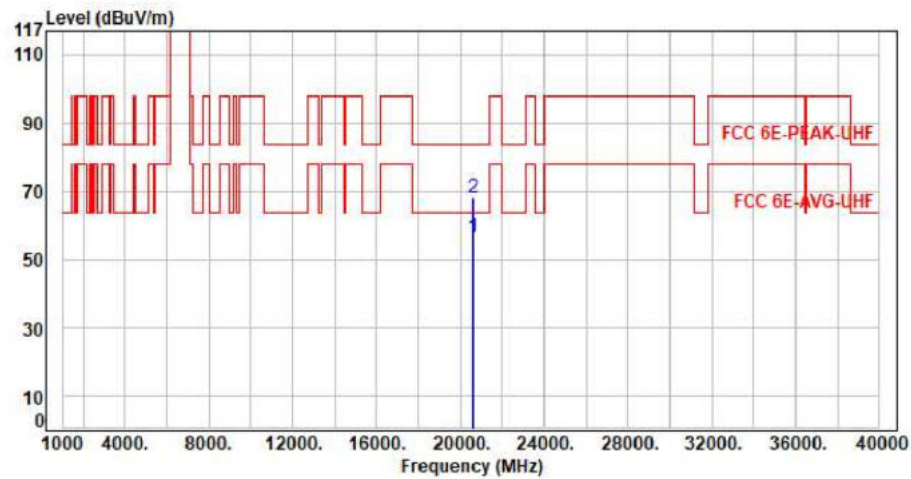


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20595.00           | 11.31          | 45.18             | 56.49             | 63.54             | -7.05          | Average  | 150            | 360              | P   |
| 2   | 20595.00           | 11.31          | 56.59             | 67.90             | 83.54             | -15.64         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

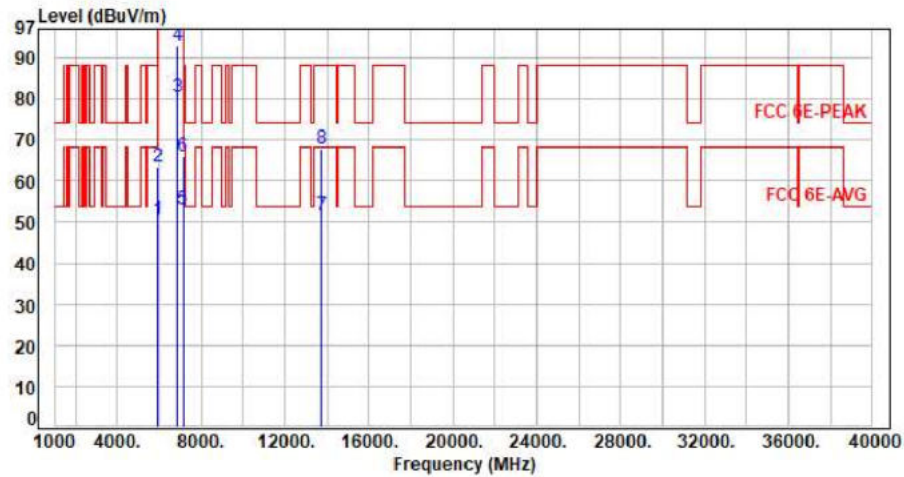

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.89          | 50.55          | 68.20          | -17.65      | Average  | 315         | 84            | P   |
| 2   | 5925.00         | 7.66        | 55.77          | 63.43          | 88.20          | -24.77      | Peak     | 315         | 84            | P   |
| 3   | 6865.00         | 9.52        | 70.86          | 80.38          | 200.00         | -119.62     | Average  | 315         | 84            | P   |
| 4   | 6865.00         | 9.52        | 83.26          | 92.78          | 200.00         | -107.22     | Peak     | 315         | 84            | P   |
| 5   | 7125.00         | 10.05       | 42.93          | 52.98          | 68.20          | -15.22      | Average  | 315         | 84            | P   |
| 6   | 7125.00         | 10.05       | 56.09          | 66.14          | 88.20          | -22.06      | Peak     | 315         | 84            | P   |
| 7   | 13730.00        | 22.57       | 28.99          | 51.56          | 68.20          | -16.64      | Average  | 100         | 314           | P   |
| 8   | 13730.00        | 22.57       | 45.17          | 67.74          | 88.20          | -20.46      | Peak     | 100         | 314           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

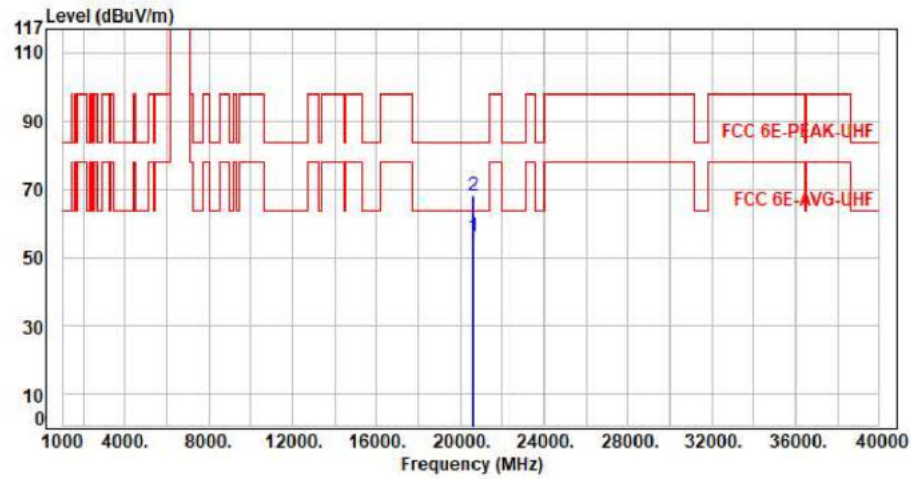


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20595.00           | 11.31          | 44.88             | 56.19             | 63.54             | -7.35          | Average  | 150            | 360              | P   |
| 2   | 20595.00           | 11.31          | 56.67             | 67.98             | 83.54             | -15.56         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

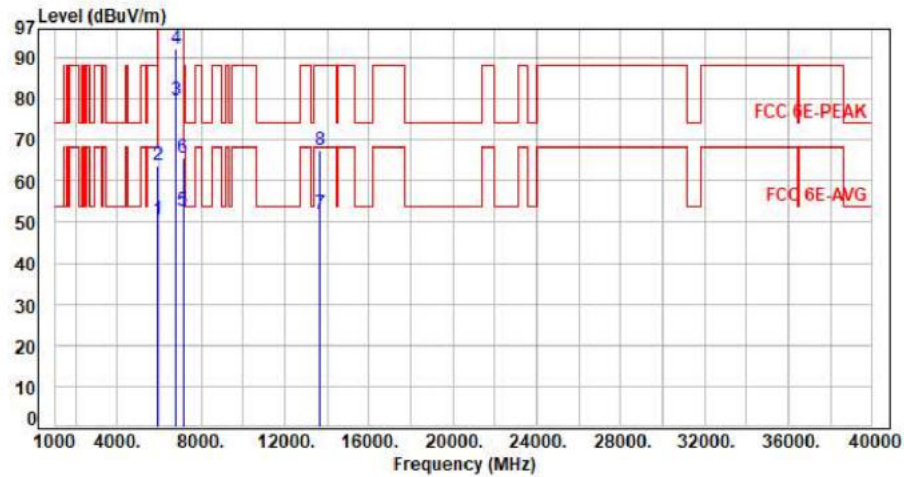

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.82          | 50.48          | 68.20          | -17.72      | Average  | 104         | 350           | P   |
| 2   | 5925.00         | 7.66        | 56.01          | 63.67          | 88.20          | -24.53      | Peak     | 104         | 350           | P   |
| 3   | 6825.00         | 9.47        | 70.12          | 79.59          | 200.00         | -120.41     | Average  | 104         | 350           | P   |
| 4   | 6825.00         | 9.47        | 82.55          | 92.02          | 200.00         | -107.98     | Peak     | 104         | 350           | P   |
| 5   | 7125.00         | 10.05       | 42.69          | 52.74          | 68.20          | -15.46      | Average  | 104         | 350           | P   |
| 6   | 7125.00         | 10.05       | 55.66          | 65.71          | 88.20          | -22.49      | Peak     | 104         | 350           | P   |
| 7   | 13650.00        | 22.24       | 29.66          | 51.90          | 68.20          | -16.30      | Average  | 100         | 147           | P   |
| 8   | 13650.00        | 22.24       | 45.17          | 67.41          | 88.20          | -20.79      | Peak     | 100         | 147           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

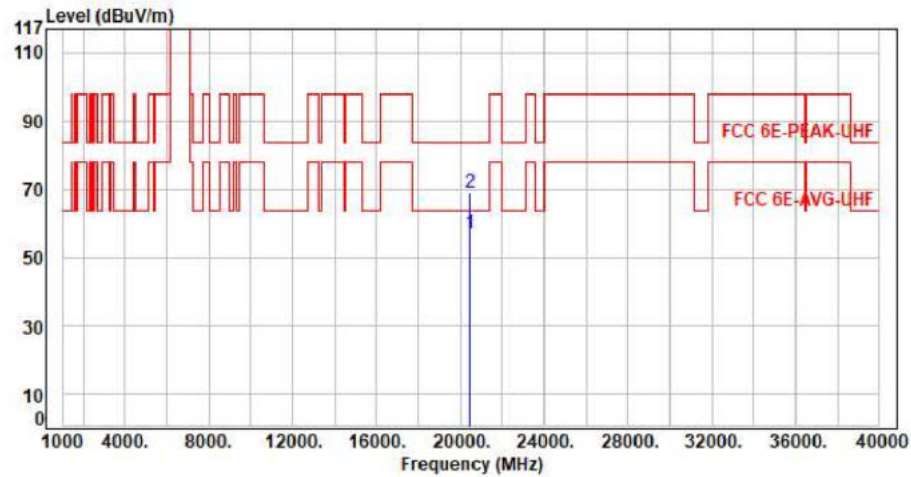


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20475.00           | 11.45          | 45.67             | 57.12             | 63.54             | -6.42          | Average  | 150            | 360              | P   |
| 2   | 20475.00           | 11.45          | 57.57             | 69.02             | 83.54             | -14.52         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

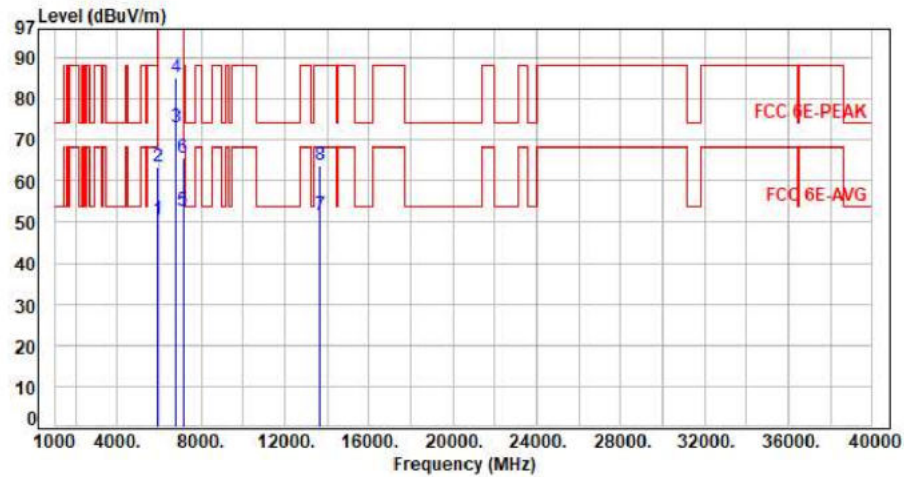

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.77          | 50.43          | 68.20          | -17.77      | Average  | 100         | 134           | P   |
| 2   | 5925.00         | 7.66        | 55.60          | 63.26          | 88.20          | -24.94      | Peak     | 100         | 134           | P   |
| 3   | 6825.00         | 9.47        | 63.67          | 73.14          | 200.00         | -126.86     | Average  | 100         | 134           | P   |
| 4   | 6825.00         | 9.47        | 75.55          | 85.02          | 200.00         | -114.98     | Peak     | 100         | 134           | P   |
| 5   | 7125.00         | 10.05       | 42.73          | 52.78          | 68.20          | -15.42      | Average  | 100         | 134           | P   |
| 6   | 7125.00         | 10.05       | 55.59          | 65.64          | 88.20          | -22.56      | Peak     | 100         | 134           | P   |
| 7   | 13650.00        | 22.24       | 29.31          | 51.55          | 68.20          | -16.65      | Average  | 100         | 161           | P   |
| 8   | 13650.00        | 22.24       | 41.68          | 63.92          | 88.20          | -24.28      | Peak     | 100         | 161           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

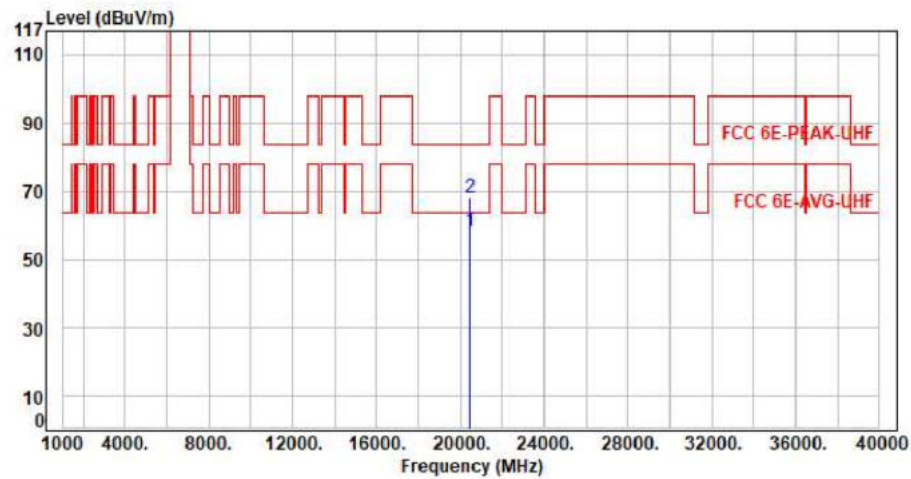


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20475.00           | 11.45          | 46.68             | 58.13             | 63.54             | -5.41          | Average  | 150            | 360              | P   |
| 2   | 20475.00           | 11.45          | 56.77             | 68.22             | 83.54             | -15.32         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

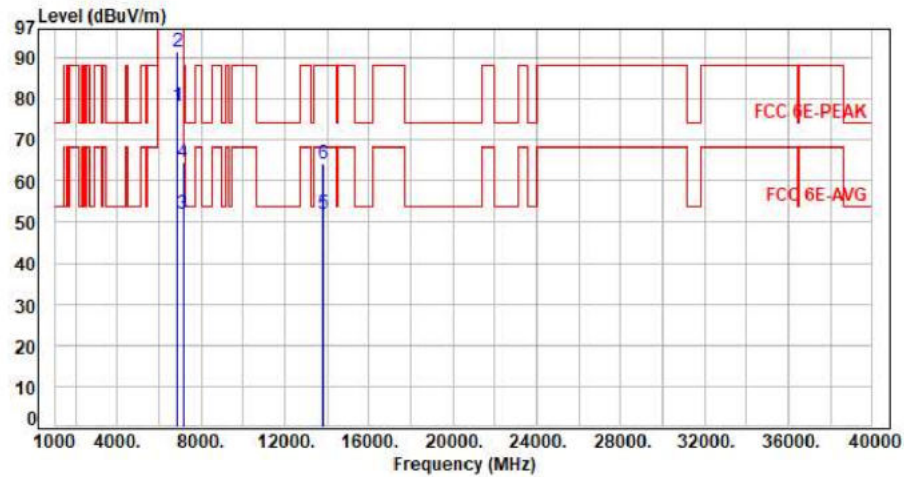


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6895.00         | 9.59        | 68.68          | 78.27          | 200.00         | -121.73     | Average  | 100         | 347           | P   |
| 2   | 6895.00         | 9.59        | 81.79          | 91.38          | 200.00         | -108.62     | Peak     | 100         | 347           | P   |
| 3   | 7125.00         | 10.05       | 41.94          | 51.99          | 68.20          | -16.21      | Average  | 100         | 347           | P   |
| 4   | 7125.00         | 10.05       | 54.32          | 64.37          | 88.20          | -23.83      | Peak     | 100         | 347           | P   |
| 5   | 13790.00        | 22.74       | 29.17          | 51.91          | 68.20          | -16.29      | Average  | 100         | 224           | P   |
| 6   | 13790.00        | 22.74       | 41.37          | 64.11          | 88.20          | -24.09      | Peak     | 100         | 224           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

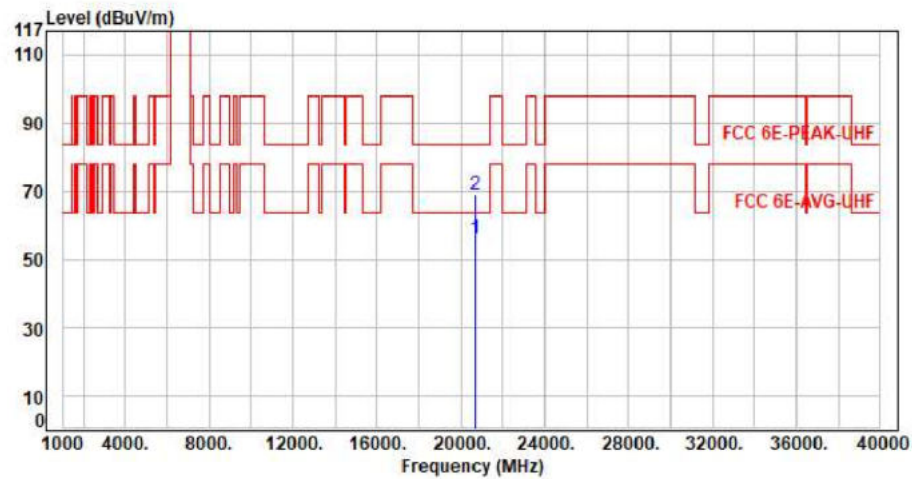


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20685.00           | 11.04          | 45.21             | 56.25             | 63.54             | -7.29          | Average  | 150            | 360              | P   |
| 2   | 20685.00           | 11.04          | 57.76             | 68.80             | 83.54             | -14.74         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

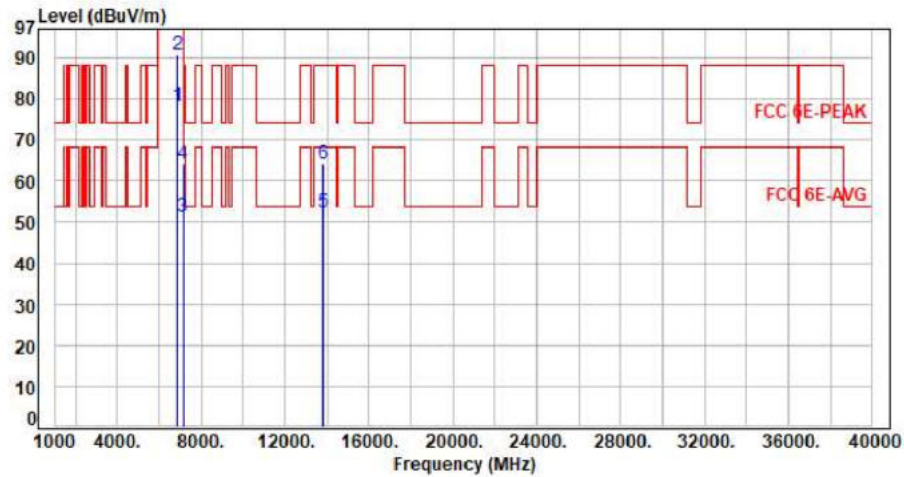


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6895.00         | 9.59        | 68.68          | 78.27          | 200.00         | -121.73     | Average  | 297         | 82            | P   |
| 2   | 6895.00         | 9.59        | 80.99          | 90.58          | 200.00         | -109.42     | Peak     | 297         | 82            | P   |
| 3   | 7125.00         | 10.05       | 41.09          | 51.14          | 68.20          | -17.06      | Average  | 297         | 82            | P   |
| 4   | 7125.00         | 10.05       | 54.19          | 64.24          | 88.20          | -23.96      | Peak     | 297         | 82            | P   |
| 5   | 13790.00        | 22.74       | 29.60          | 52.34          | 68.20          | -15.86      | Average  | 100         | 139           | P   |
| 6   | 13790.00        | 22.74       | 41.27          | 64.01          | 88.20          | -24.19      | Peak     | 100         | 139           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

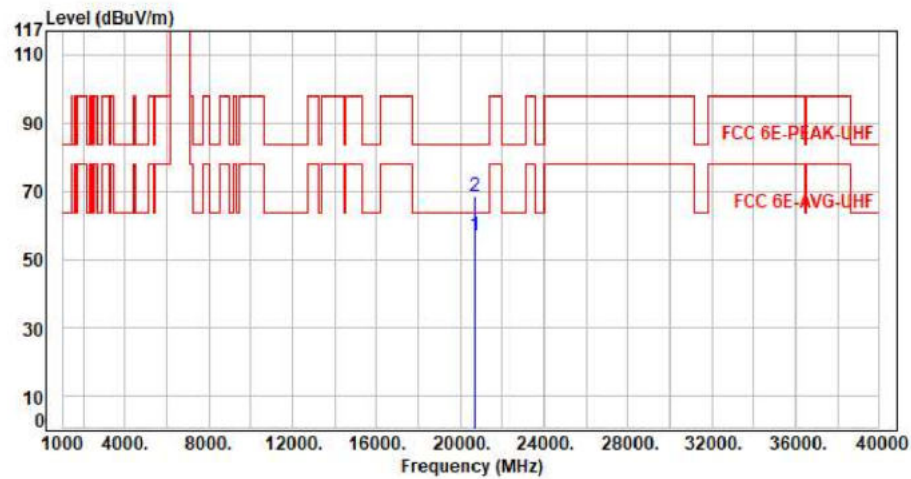

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20685.00           | 11.04          | 45.75             | 56.79             | 63.54             | -6.75          | Average  | 150            | 360              | P   |
| 2   | 20685.00           | 11.04          | 57.56             | 68.60             | 83.54             | -14.94         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

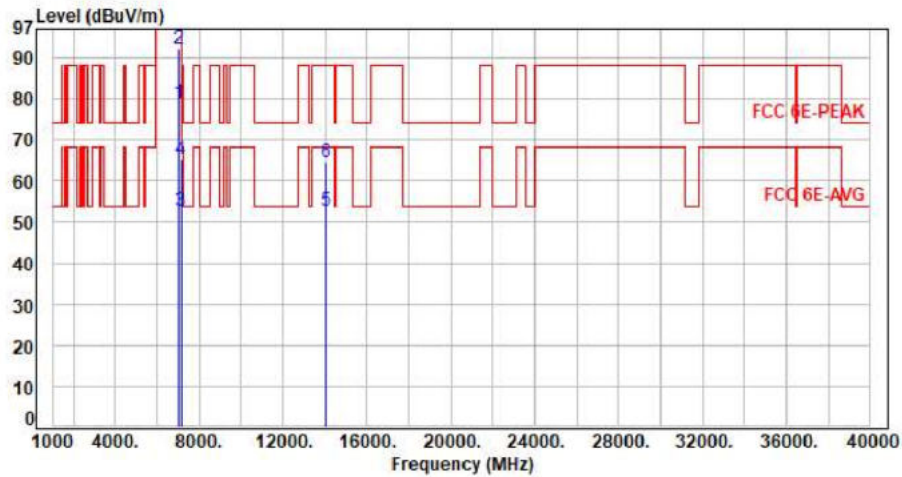

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 7015.00         | 9.68        | 69.42          | 79.10          | 200.00         | -120.90     | Average  | 118         | 346           | P   |
| 2   | 7015.00         | 9.68        | 82.46          | 92.14          | 200.00         | -107.86     | Peak     | 118         | 346           | P   |
| 3   | 7125.00         | 10.05       | 42.66          | 52.71          | 68.20          | -15.49      | Average  | 118         | 346           | P   |
| 4   | 7125.00         | 10.05       | 55.36          | 65.41          | 88.20          | -22.79      | Peak     | 118         | 346           | P   |
| 5   | 14030.00        | 23.39       | 29.29          | 52.68          | 68.20          | -15.52      | Average  | 100         | 138           | P   |
| 6   | 14030.00        | 23.39       | 41.31          | 64.70          | 88.20          | -23.50      | Peak     | 100         | 138           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor