


FIXTURE INSTALLATION INSTALLATION DU LUMINAIRE

Smart Panel User Manual

Important: Read all instructions in order to ensure safety and proper installation.
Lisez toutes les instructions afin d'assurer une bonne installation en toute sécurité.

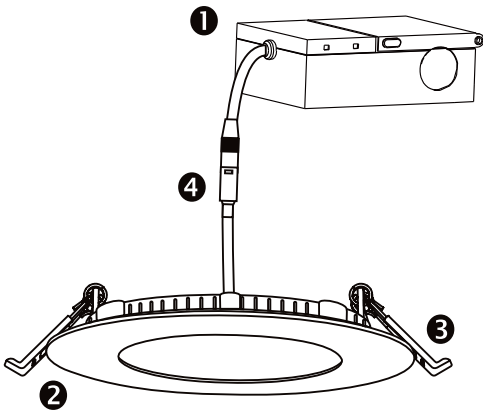


PARTS LIST / LISTE DES COMPOSANTS

- ① Junction box / Boîte de jonction
- ② Light panel / Panneau d'éclairage
- ③ Spring clips / Agrafe-ressort
- ④ Connector / Connecteur

Specification	Power	Voltage	Outer Diameter	Thicknes	Cutout Size	Equivalent to	Application
4"WIFI Smart Panel	10W	120V AC / Dimmable	5" (122mm)	1/2" (11.5mm)	4-1/4" (108mm)	70W Halogen	IC Rated
6"WIFI Smart Panel	12W	120V AC / Dimmable	7" (173mm)	1/2" (11.5mm)	6-1/4" (158mm)	90W Halogen	IC Rated

HOW TO CONNECT?

1. Download the "Tuya Smart" or "Smart Life" from Apple Store or Google Store, register an account and log in.
2. Turn on WiFi on your phone.
3. Click "+" in the upper right corner – Lighting – Lighting Source (BLE + WI-FI).
4. Switch the ON/Off for 3 times continuously. IF light flashes, can start the connection.
5. Click "confirm light blinks rapidly" on the App and then input the correct Wifi Password (2.4Ghz WiFi) .
6. Within 30 seconds, it will be connected. Start to enjoy the scene.

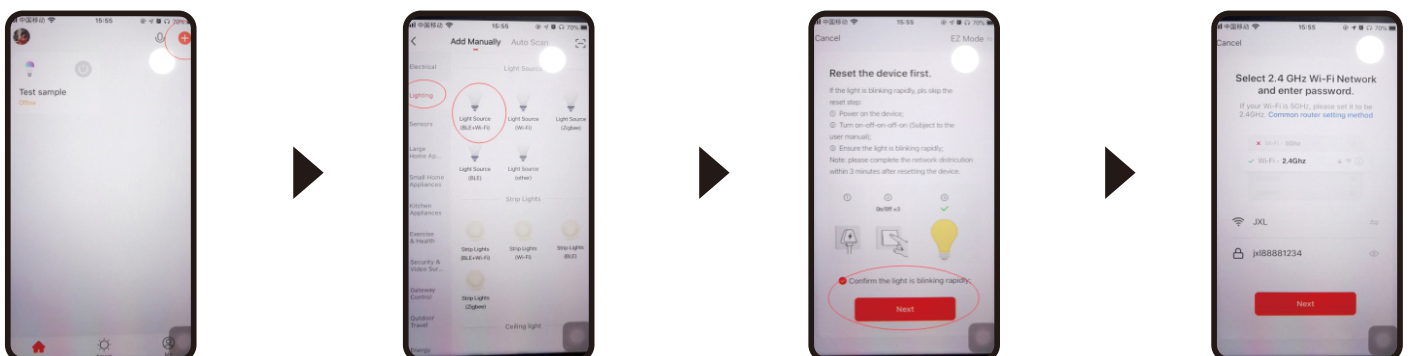















Limited Warranty

The warranty applies to the product from the original date of purchase for five (5) years against manufacturing defects. The owner must provide a copy of the original proof of purchase. The manufacturer's obligation under this warranty is limited to repairing or replacing the component. It is not related in any way to the cost of the connection, the installation of the replacement parts or cost of transport.

Maintenance

Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
This product is suitable for damp locations.

PRODUCT FEATURES





-  2.4 GHz Wi-Fi & Bluetooth Smart
-  Tuya Smart App compatible : download TUYA Smart APP to connect and enjoy intelligent control.
-  Brightness Dimmable : 1%-100% brightness is adjustable
-  Color Temperature Dimmable : warm white and cool white from 2700K to 6500K dimmable
-  RGBCW Adjustable: Provide 16 million colors. DIY the scene modes available.
-  Voice Control: A simple dialogue can turn on or off and adjust more colors.
-  Compatible with Alexa and Google Assistant, no hub needed
-  Control the lighting in groups
-  Remotely Control : remote control the light through the APP on your phone
-  Memory Function: stay at the last setting you choose while turn on again
-  Music Sync: The smart recessed lighting can change the color with the beat of the music or the sound of the game.
-  Scheduled On-Off :Enjoy the benefits of smart living by scheduling your lights to wake you up in the morning, to turn on when you home.
-  Remote Controller : smart control the light with remote controller when without wifi
-  Airtight & IC rated , Suitable for damp locations

INSTALLATION GUIDE

WARNING

Turn power OFF from electrical panel before installation or maintenance.

1. Turn power OFF from the electrical panel prior to installation.
2. Determine the location for installation and cut ceiling hole in accordance with cut-hole dimensions. Refer to hole diameter table for appropriate sizes.(Fig.1)
3. Remove the appropriate knockouts on the side panel.(Fig.2)
4. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
5. Using quick-connect push-in terminals,connect the ground wire to the green wire terminal; black wire to black wire terminal; white wire to white wire terminal.(Fig.2)
6. Place all wiring and connections back in to the box and close the cover. Connect the driver to the light panel.
7. Insert junction box through the mounting hole.(Fig.3)
8. Push spring-loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling.(Fig.4)

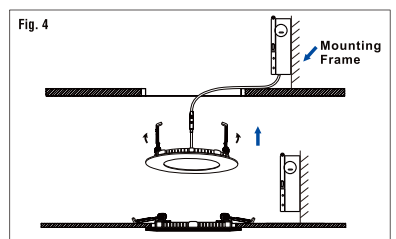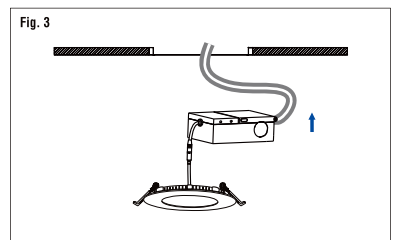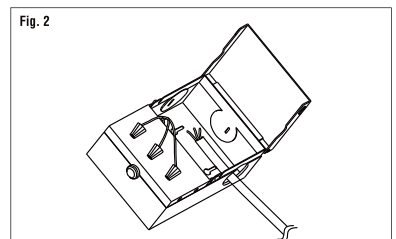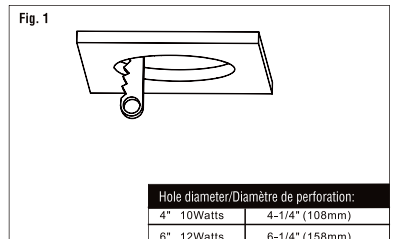

Model: JXL-TZ06-T12W-RGBCW, JXL-CA06-T12W-RGBCW, JXL-CA04-T10W-RGBCW, JXL-TZ04-T10W-RGBCW

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Innovation, Science, and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et*
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

This equipment complies with FCC/ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

L'appareil est conforme aux limites d'exposition aux rayonnements spécifiées par la FCC/ISED pour les

environnements non contrôlés. La distance entre le radiateur et le corps doit être d'au moins 20 cm lors de l'installation et du fonctionnement de l'appareil.

Cet émetteur ne doit pas coexister ou fonctionner conjointement avec toute autre antenne ou émetteur.