


Power measurement connection diagram:

The power measurement for 2G/3G/LTE/5G FR1/DL CA is to establish a connection between device and call box, and via call box to configure Bands, channel, BWs, RB size, carrier aggregation of CA, frequency channels, SCS and maximum output power. Hereunder is screenshot call box connection information for 2G/3G/LTE/5G FR1/DL CA.


<GSM>

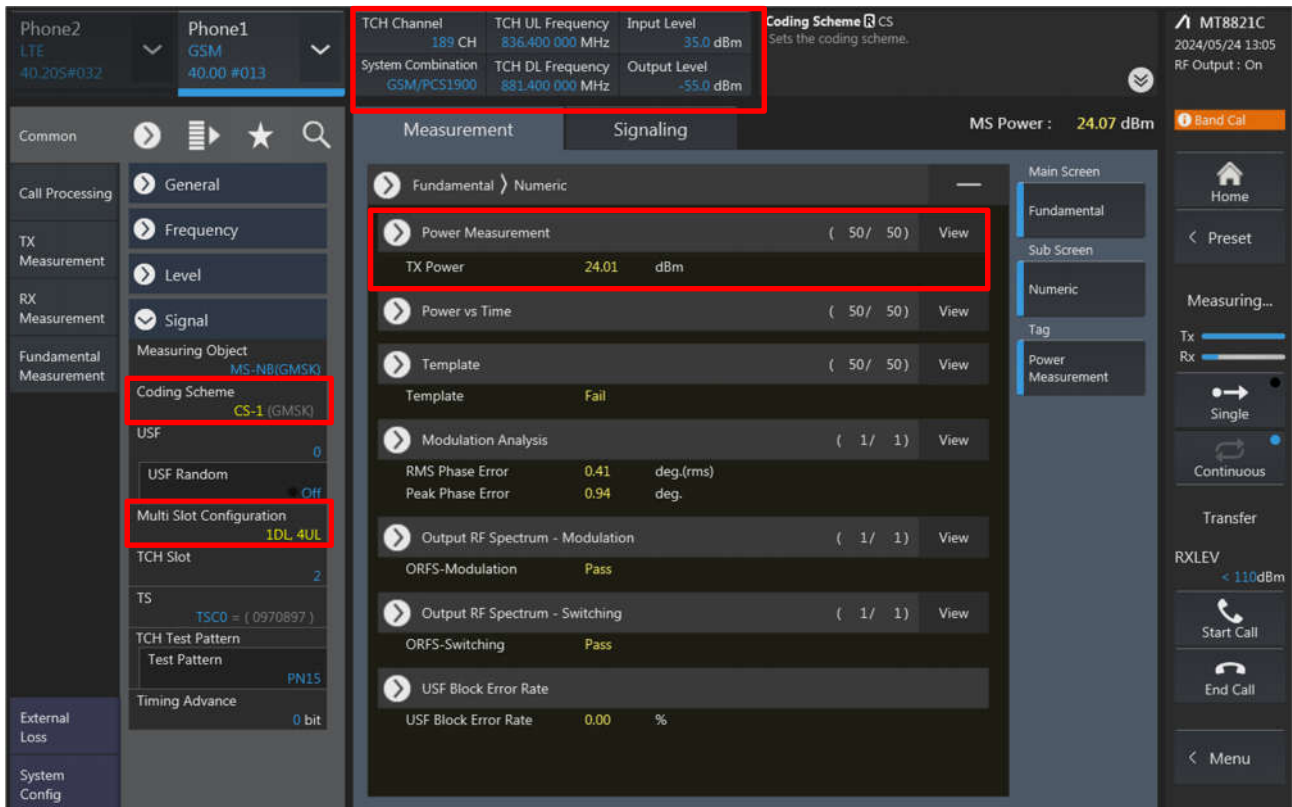

The screenshot displays the configuration and measurement results for a GSM call. Key elements include:


- Configuration (Left Sidebar):**
 - Measuring Object: MS-NB(GMSK)
 - Coding Scheme: CS-1 (GMSK)
 - Multi Slot Configuration: 1DL, 4UL
 - TCH Slot: 2
 - TS: TSC0 = (0970897)
 - TCH Test Pattern: Test Pattern PN15
 - Timing Advance: 0 bit
- Measurement Data (Top Bar):**
 - TCH Channel: 189 CH
 - TCH UL Frequency: 836.400 000 MHz
 - Input Level: 35.0 dBm
 - System Combination: GSM/PCS1900
 - TCH DL Frequency: 881.400 000 MHz
 - Output Level: -55.0 dBm
- Measurement Results (Main Area):**
 - MS Power: 24.07 dBm
 - Power Measurement: TX Power 24.01 dBm
 - Power vs Time: (50 / 50)
 - Template: Fail
 - Modulation Analysis: (1 / 1)
 - RMS Phase Error: 0.41 deg.(rms)
 - Peak Phase Error: 0.94 deg.
 - Output RF Spectrum - Modulation: (1 / 1)
 - ORFS-Modulation: Pass
 - Output RF Spectrum - Switching: (1 / 1)
 - ORFS-Switching: Pass
 - USF Block Error Rate: 0.00 %

<WCDMA>

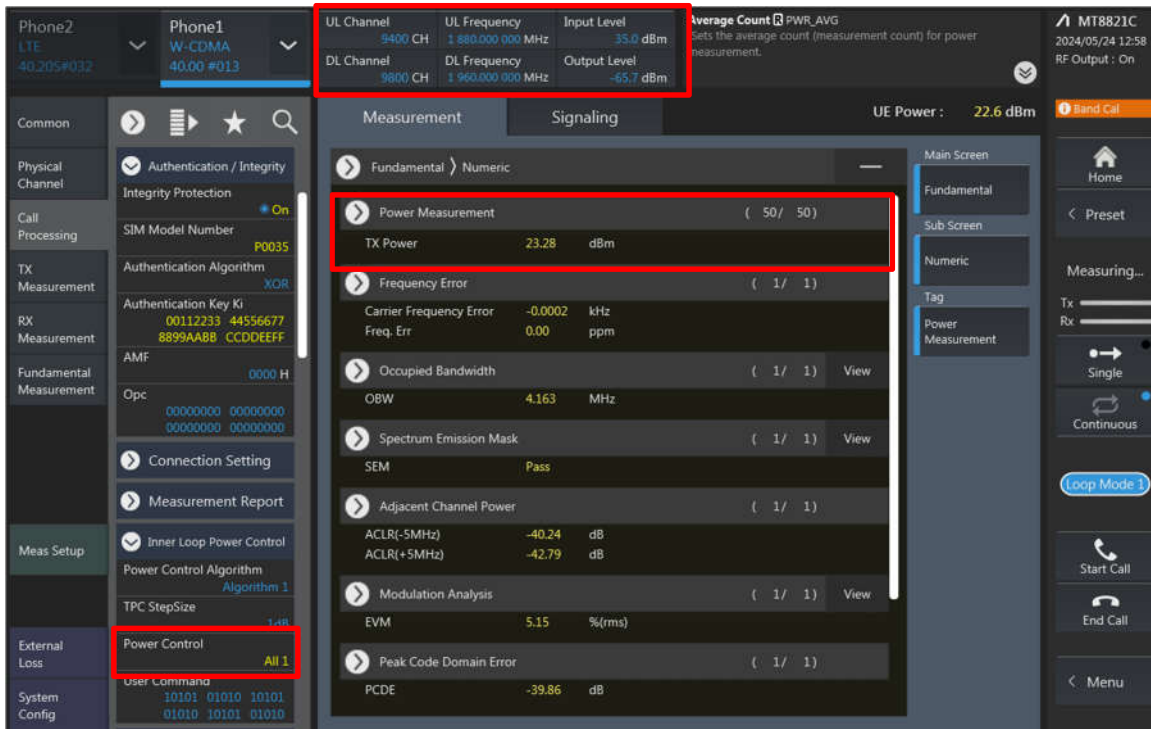

The screenshot shows the WCDMA measurement interface. At the top, it displays 'Phone2 LTE 40.205#032' and 'Phone1 W-CDMA 40.00 #013'. A red box highlights the channel and frequency information: UL Channel 9400 CH, UL Frequency 1 880.000 000 MHz, Input Level 35.0 dBm, DL Channel 9800 CH, DL Frequency 1 960.000 000 MHz, and Output Level -65.7 dBm. The 'Average Count' is set to PWR_AVG. The 'Measurement' section shows 'Fundamental' selected, with 'Power Measurement' (50/50) highlighted in a red box, showing a TX Power of 23.28 dBm. Other measurements include Frequency Error (-0.0002 kHz), Occupied Bandwidth (4.163 MHz), Spectrum Emission Mask (Pass), Adjacent Channel Power (ACLR(-5MHz) -40.24 dB, ACLR(+5MHz) -42.79 dB), Modulation Analysis (EVM 5.15 %/rms), and Peak Code Domain Error (PCDE -39.86 dB). The 'External Loss' is set to 'All 1'. The UE Power is 22.6 dBm.

<LTE>

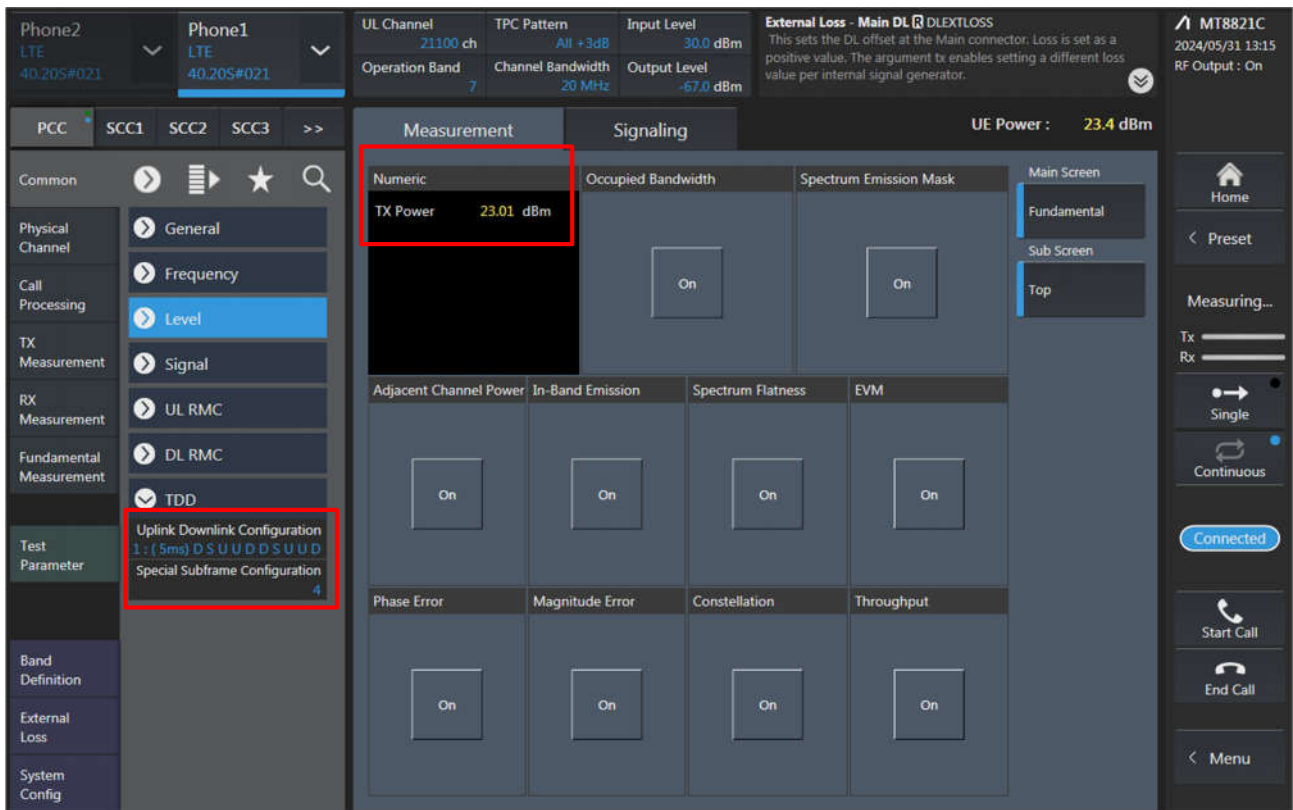

The screenshot shows the LTE measurement interface. At the top, it displays 'Phone2 LTE 40.205#021' and 'Phone1 LTE 40.20S#021'. A red box highlights the channel and frequency information: UL Channel 21100 ch, TPC Pattern All +3dB, Input Level 30.0 dBm, Operation Band 7, Channel Bandwidth 20 MHz, and Output Level -67.0 dBm. The 'External Loss - Main DL' is set to DLEXTLOSS. The 'Measurement' section shows 'Numeric' selected, with 'TX Power' (23.01 dBm) highlighted in a red box. Other measurements include Occupied Bandwidth, Spectrum Emission Mask, Adjacent Channel Power, In-Band Emission, Spectrum Flatness, EVM, Phase Error, Magnitude Error, Constellation, and Throughput. The 'Test Parameter' section shows 'Uplink Downlink Configuration 1: (5ms) DSUUDDSUUD' and 'Special Subframe Configuration 4'. The UE Power is 23.4 dBm.



<LTE TDD Power class 3>

The screenshot displays the configuration and measurement interface for LTE TDD Power class 3. The interface is divided into several sections:

- Top Bar:** Shows device information (Phone2, Phone1), channel parameters (UL Channel: 40620 ch, Operation Band: 41, TPC Pattern: All +3dB, Channel Bandwidth: 20 MHz, Input Level: 30.0 dBm, Output Level: -54.2 dBm), and TDD - Special Subframe Configuration (TDDSSFCONF). The UE Power is indicated as 23.5 dBm.
- Left Panel:** A navigation menu with categories like Physical Channel, Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, Test Parameter, Band Definition, External Loss, and System Config. The 'Fundamental Measurement' section is expanded to show 'TDD' configuration.
- Configuration Section:** Under 'TDD', the 'Uplink Downlink Configuration' is set to '0: (5ms) DSUUU DSUUU' and the 'Special Subframe Configuration' is set to '5'. Both are highlighted with a red box.
- Measurement Section:** A grid of measurement options, each with an 'On' button. The 'TX Power' measurement is highlighted with a red box and shows a value of 23.19 dBm. Other measurements include Occupied Bandwidth, Spectrum Emission Mask, Adjacent Channel Power, In-Band Emission, Spectrum Flatness, EVM, Phase Error, Magnitude Error, Constellation, and Throughput.
- Right Panel:** Contains navigation buttons (Home, Preset, Measuring...), signal strength indicators (Tx, Rx), and call control buttons (Start Call, End Call, Menu).

<5G NR FR1>

5G NR V08.90.21#000 *SA-FDD Power Measurement - Count PWR_AVG

DL Center Channel: 126900, TPC Pattern: All +3dB, Input Level: 26.5 dBm
 Operation Band: 71, DL Channel Bandwidth: 20MHz, Output Level: -40.0 dBm

Common: UL RMC (selected), Waveform: DFT-S-OFDM, Modulation: QP/2 BPSK

Measurement: Tx Power: 25.88 dBm, OBW: 18.787 MHz, ACLR(-): -53.74 dB, ACLR(+): -55.90 dB

Occupied Bandwidth: 18.787 MHz

UE Power: 26.0 dBm

Adjacent Channel Power: [On]

In-Band Emission: [On]

Spectrum Flatness: [On]

EVM: [On], Phase Error: [On], Magnitude Error: [On], Constellation: [On]

NR Connected

5G NR V08.90.21#000 *SA-FDD Power Measurement - Count PWR_AVG

DL Center Channel: 126900, TPC Pattern: All +3dB, Input Level: 26.5 dBm
 Operation Band: 71, DL Channel Bandwidth: 20MHz, Output Level: -40.0 dBm

Common: Cell (selected), DL Subcarrier Spacing(data): 15kHz, UL Subcarrier Spacing(data): 15kHz

Measurement: Tx Power: 25.83 dBm, OBW: 18.787 MHz, ACLR(-): -53.70 dB, ACLR(+): -55.93 dB

Occupied Bandwidth: 18.787 MHz

UE Power: 26.0 dBm


Adjacent Channel Power: [On]

In-Band Emission: [On]

Spectrum Flatness: [On]


EVM: [On], Phase Error: [On], Magnitude Error: [On], Constellation: [On]

NR Connected

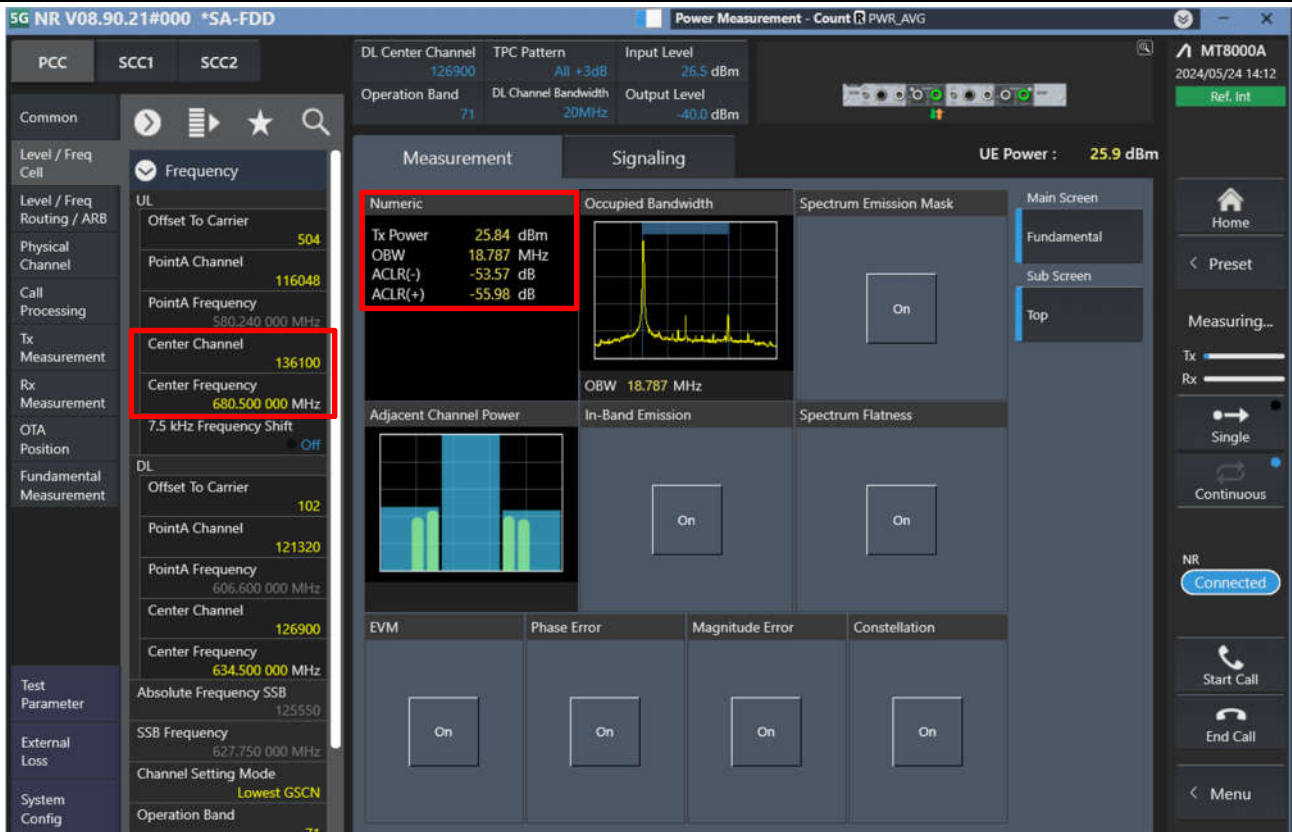


LTE Downlink Carrier Aggregation configurations:

1. Change the Scenario in the Configuration of Phone1 LTE Signaling and Preset.

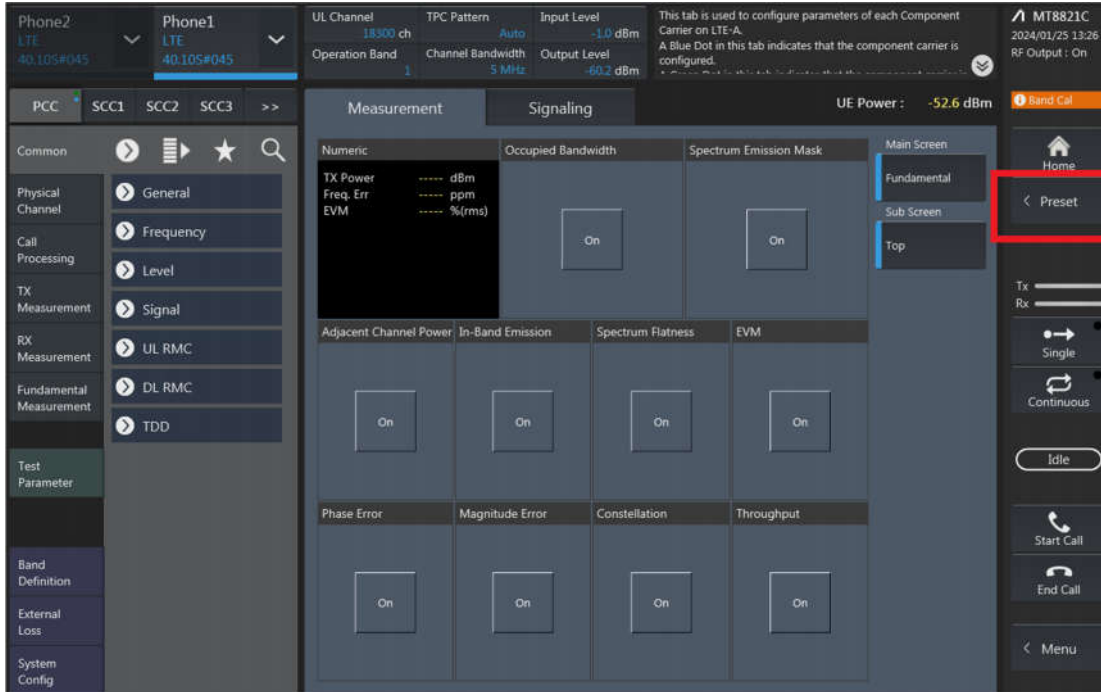


2. If Select “RMC (DL/UL CA)” for Uplink Carrier Aggregation;
If Select “RMC (DL CA)” for Downlink Carrier Aggregation.
For example, Uplink Carrier Aggregation:

Detailed operation: PCC → Common → Signal → Channel Coding → Select 【RMC (DL/UL CA)】

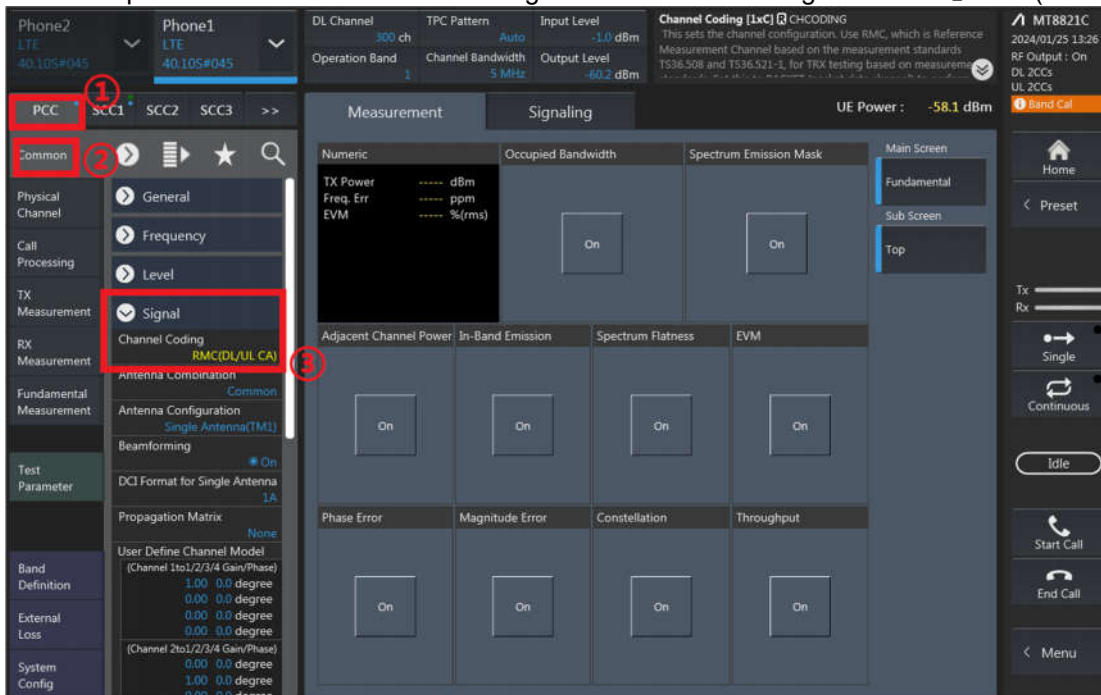

3. PCC parameter Settings: on the screen, and then select the PCC tab and Set operating band, BW, channel and RB configurations for PCC;

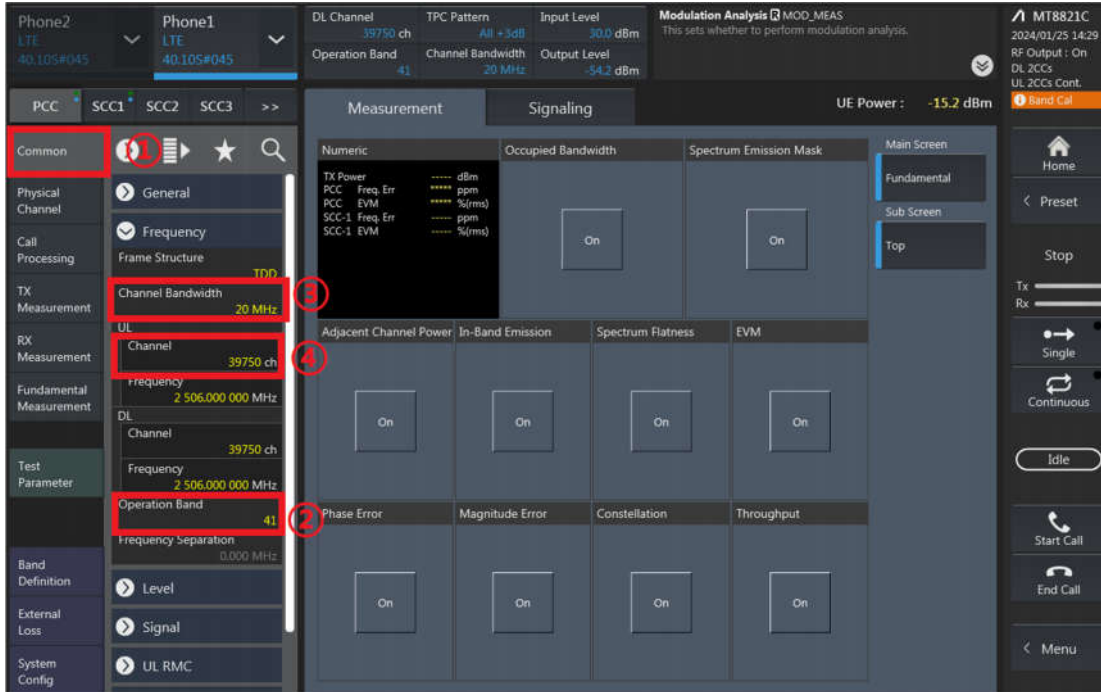

Phone2 LTE 40.10S#045 | Phone1 LTE 40.10S#045 | DL Channel 39750 ch | TPC Pattern All +3dB | Input Level 30.0 dBm | Modulation Analysis MOD-MEAS | MT8821C 2024/01/25 14:29

Operation Band 41 | Channel Bandwidth 20 MHz | Output Level -54.2 dBm


Common | Physical Channel | Call Processing | TX Measurement | RX Measurement | Fundamental Measurement | Test Parameter | Band Definition | External Loss | System Config

Measurement | Signaling | UE Power: -15.2 dBm

Channel Bandwidth 20 MHz (3) | Channel 39750 ch (4) | Operation Band 41 (2)

Adjacent Channel Power | In-Band Emission | Spectrum Flatness | EVM | Phase Error | Magnitude Error | Constellation | Throughput

RB configurations (Number of RB / Starting RB) for PCC;

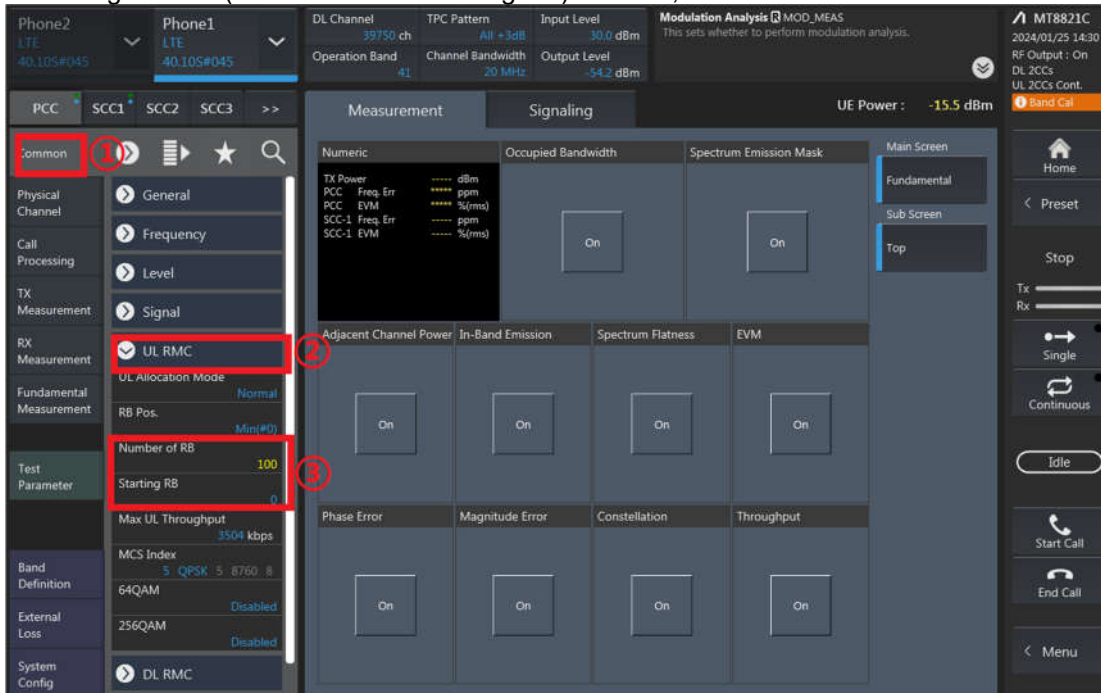

Phone2 LTE 40.10S#045 | Phone1 LTE 40.10S#045 | DL Channel 39750 ch | TPC Pattern All +3dB | Input Level 30.0 dBm | Modulation Analysis MOD-MEAS | MT8821C 2024/01/25 14:30

Operation Band 41 | Channel Bandwidth 20 MHz | Output Level -54.2 dBm


Common | Physical Channel | Call Processing | TX Measurement | RX Measurement | Fundamental Measurement | Test Parameter | Band Definition | External Loss | System Config

Measurement | Signaling | UE Power: -15.5 dBm


UL RMC (2) | Number of RB 100 (3) | Starting RB 0

Adjacent Channel Power | In-Band Emission | Spectrum Flatness | EVM | Phase Error | Magnitude Error | Constellation | Throughput


4. SCC parameter Settings: Select the SCC1 tab, Set operating band, BW, channel, and RB configurations for SCC1;

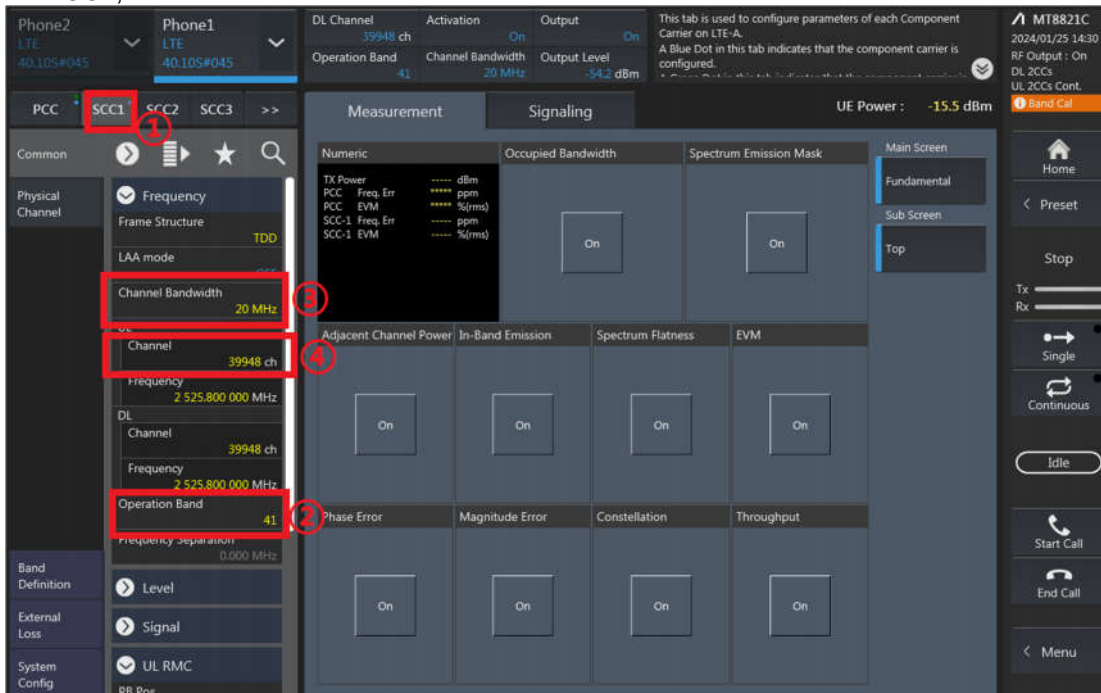


RB configurations (Number of RB / Starting RB) for SCC1;

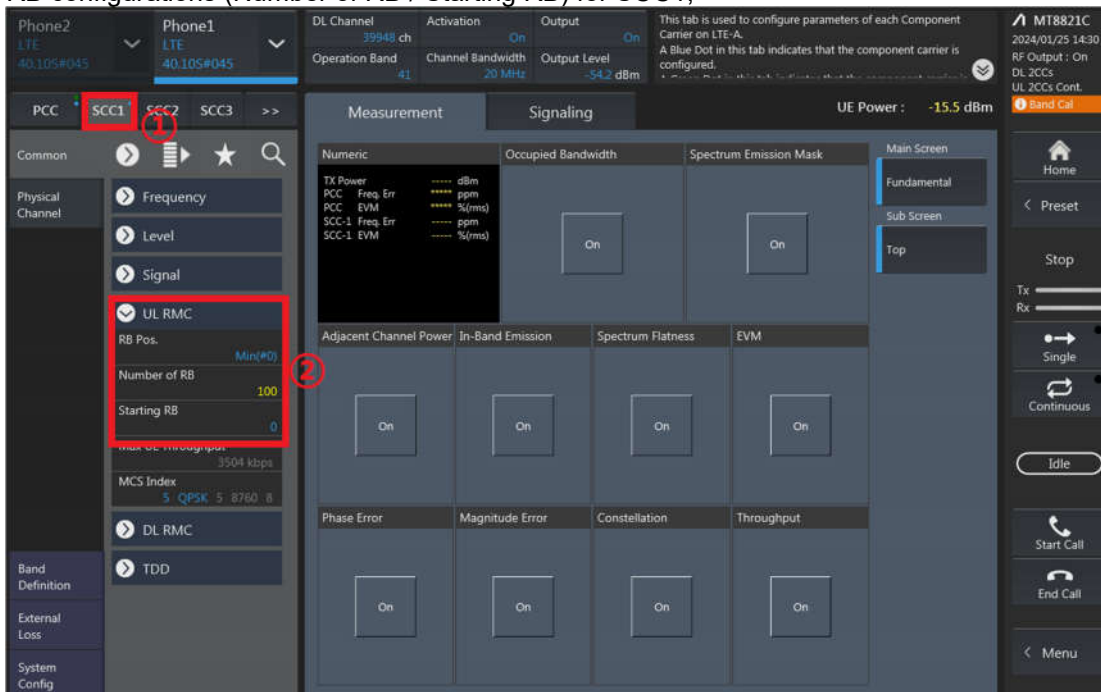

- Select the PCC tab, then set “SIM Model Number” and select max power;

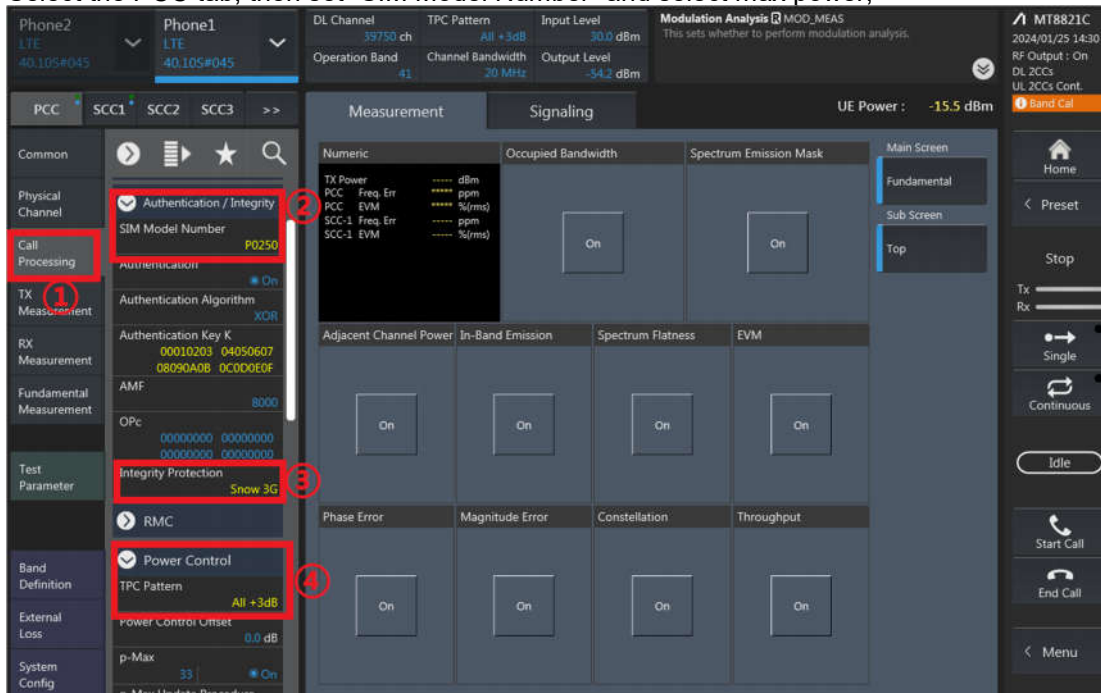

- Click the “Connect” button at the Right of the screen, if necessary, turn the Airplane mode on/off in the DUT

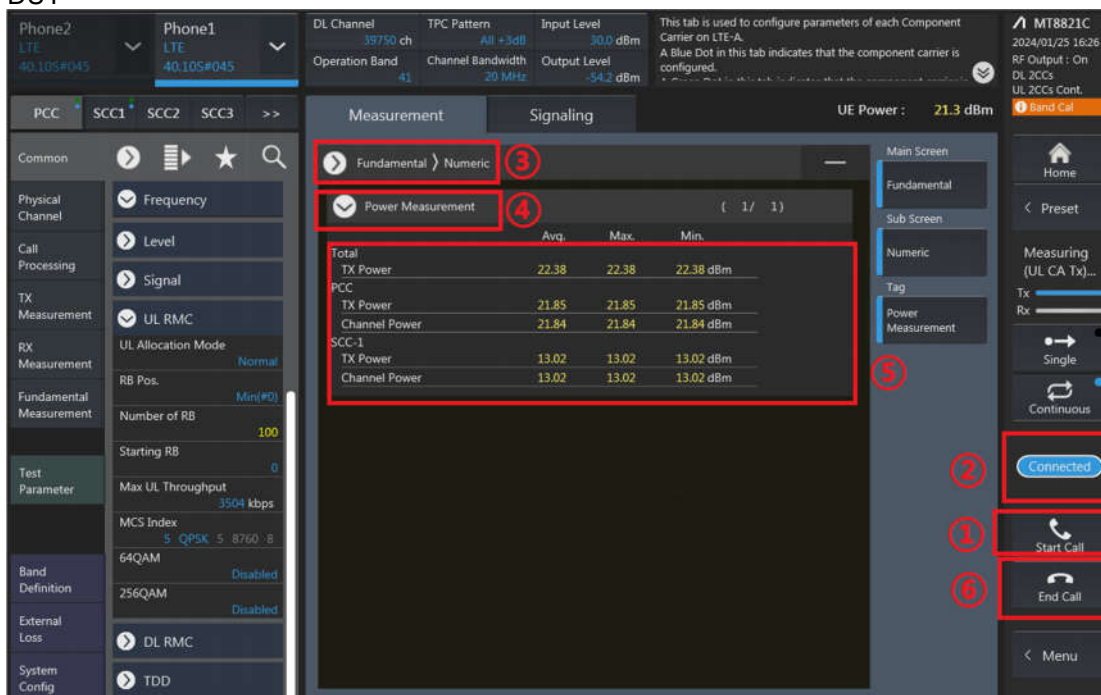

	Avg.	Max.	Min.
Total TX Power	22.38	22.38	22.38 dBm
PCC TX Power	21.85	21.85	21.85 dBm
PCC Channel Power	21.84	21.84	21.84 dBm
SCC-1 TX Power	13.02	13.02	13.02 dBm
SCC-1 Channel Power	13.02	13.02	13.02 dBm

- The inter-band DLCA test method is similar to intra-band DLCA, and DLCA test method is similar to intra-band DLCA too.



2CA DL

CA List	PCC										SCC				Power	
	LTE	BW	BW	UL	UL	UL#	UL	DL Antenna Configuration	LTE	BW	DL	DL	DL Antenna Configuration	With CA	Without CA	
	Band	Ant	(MHz)	Freq. (MHz)	Channel				Mod	RB	Offset	Band		(MHz)	Freq. (MHz)	Channel
CA 41A-42A	Band 41	Ant 0	20M	2593	40620	QPSK	1	0	4X4MMMO	Band 42	20M	3500	42950	4X4MMMO	15.01	15.09
	Band 42	Ant 0	20M	3500	42950	QPSK	1	0	4X4MMMO	Band 41	20M	2593	40620	4X4MMMO	14.66	14.72



3CA DL

3CA List	PCC									SCC1					SCC2				Power		
	LTE	BW	BW	UL	UL	Mod.	UL#	UL	DL Antenna Configuration	LTE	BW	DL	DL	DL Antenna Configuration	LTE	BW	DL	DL	DL Antenna Configuration	With CA	Without CA
	Band	Ant	(MHz)	Freq. (MHz)	Channel		RB	RB Offset		Band	(MHz)	Freq. (MHz)	Channel		Band	(MHz)	Freq. (MHz)	Channel		Tx Power (dBm)	Tx Power (dBm)
CA_41A-42C	Band 41	Ant 0	20M	2593	40620	QPSK	1	0	4X4MMIMO	Band 42	20M	3500	42590	4X4MMIMO	Band 42	20M	3519.8	42788	4X4MMIMO	15.02	15.09
	Band 42	Ant 0	20M	3500	42590	QPSK	1	0	4X4MMIMO	Band 42	20M	3519.8	42788	4X4MMIMO	Band 41	20M	2593	40620	4X4MMIMO	14.66	14.72
CA_41C-42A	Band 41	Ant 0	20M	2593	40620	QPSK	1	0	4X4MMIMO	Band 41	20M	2612.8	40818	4X4MMIMO	Band 42	20M	3500	42590	4X4MMIMO	15.05	15.09
	Band 42	Ant 0	20M	3500	42590	QPSK	1	0	4X4MMIMO	Band 41	20M	2593	40620	4X4MMIMO	Band 41	20M	2612.8	40818	4X4MMIMO	14.69	14.72