


1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	94.02	0.27	1.34
NVNT	a	5200	Ant1	94.07	0.27	1.34
NVNT	a	5240	Ant1	94.09	0.26	1.34
NVNT	a	5180	Ant2	94.16	0.26	1.34
NVNT	a	5200	Ant2	93.91	0.27	1.34
NVNT	a	5240	Ant2	94.09	0.26	1.34
NVNT	ac20	5180	Sum	93.58	0.29	1.48
NVNT	ac20	5200	Sum	93.51	0.29	1.48
NVNT	ac20	5240	Sum	93.51	0.29	1.48
NVNT	ac40	5190	Sum	88.44	0.53	1.06
NVNT	ac40	5230	Sum	88.48	0.53	1.06
NVNT	ac80	5210	Sum	87.56	0.58	2.17
NVNT	ax20	5180	Sum	78.74	1.04	5.69
NVNT	ax20	5200	Sum	78.74	1.04	5.69
NVNT	ax20	5240	Sum	78.82	1.03	5.69
NVNT	ax40	5190	Sum	77.72	1.09	5.64
NVNT	ax40	5230	Sum	78.45	1.05	5.63
NVNT	ax80	5210	Sum	77.68	1.1	5.66
NVNT	n20	5180	Sum	86.7	0.62	3.19
NVNT	n20	5200	Sum	86.96	0.61	3.19
NVNT	n20	5240	Sum	86.82	0.61	3.19
NVNT	n40	5190	Sum	80.61	0.94	1.07
NVNT	n40	5230	Sum	80.61	0.94	1.07

Test Graphs


Duty Cycle NVNT a 5180MHz Ant1

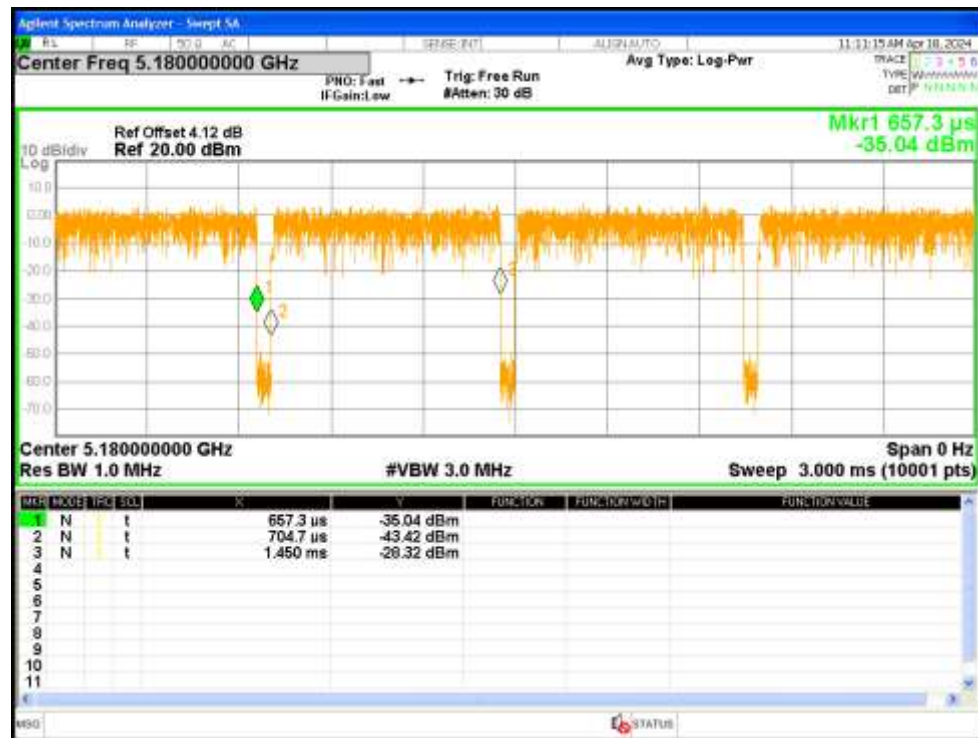


Duty Cycle NVNT a 5200MHz Ant1

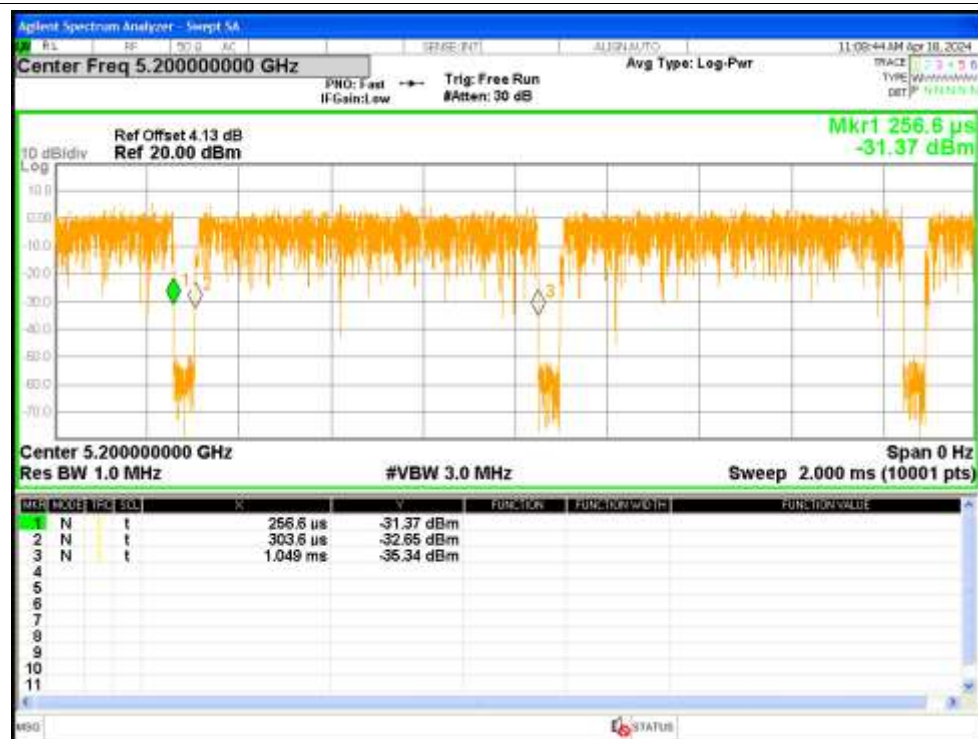

Duty Cycle NVNT a 5240MHz Ant1

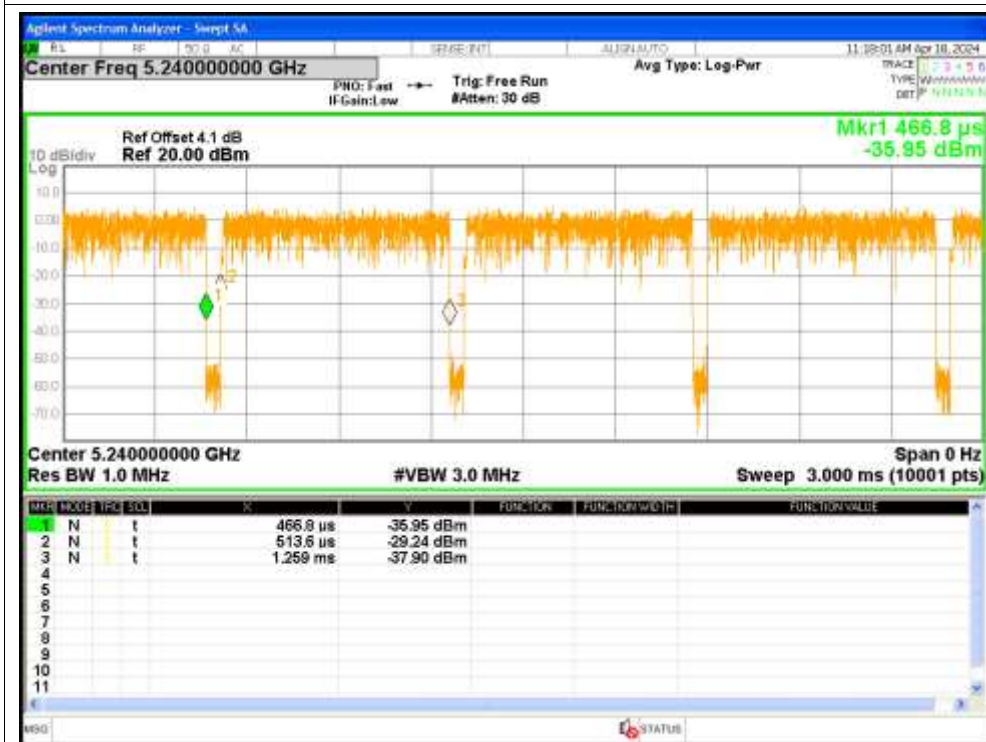

Duty Cycle NVNT a 5180MHz Ant2

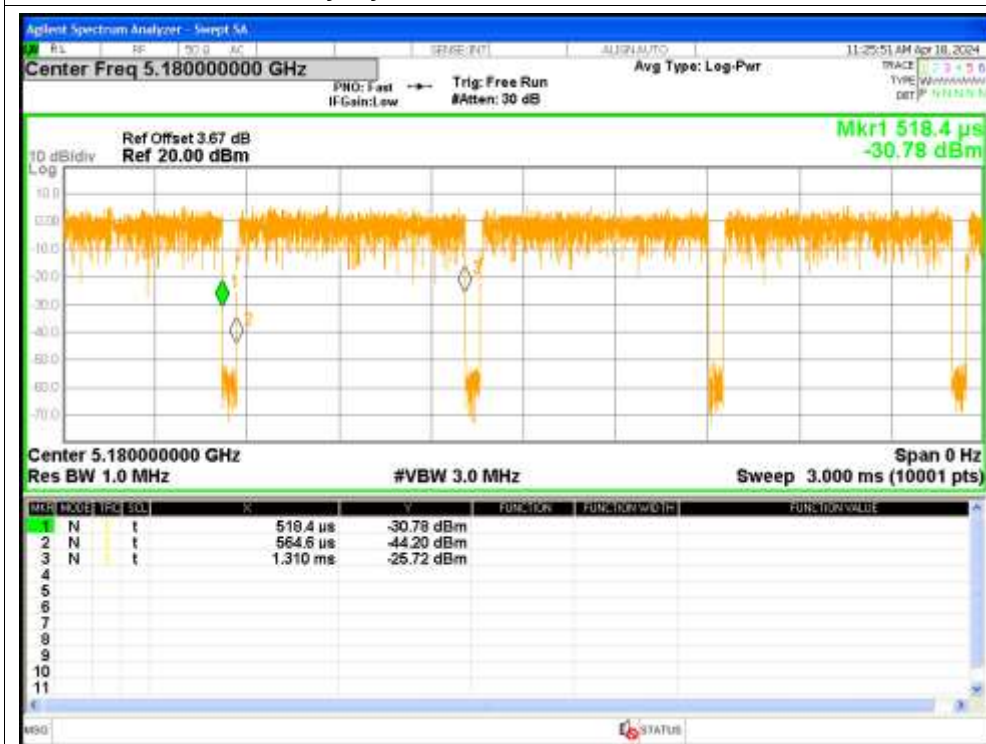


Duty Cycle NVNT a 5200MHz Ant2


Duty Cycle NVNT ac40 5230MHz Sum




Duty Cycle NVNT ac80 5210MHz Sum			
1	2	3	4
5	6	7	8
9	10	11	12
13	14	15	16
17	18	19	20
21	22	23	24
25	26	27	28
29	30	31	32
33	34	35	36
37	38	39	40
41	42	43	44
45	46	47	48
49	50	51	52
53	54	55	56
57	58	59	60
61	62	63	64
65	66	67	68
69	70	71	72
73	74	75	76
77	78	79	80
81	82	83	84
85	86	87	88
89	90	91	92
93	94	95	96
97	98	99	100

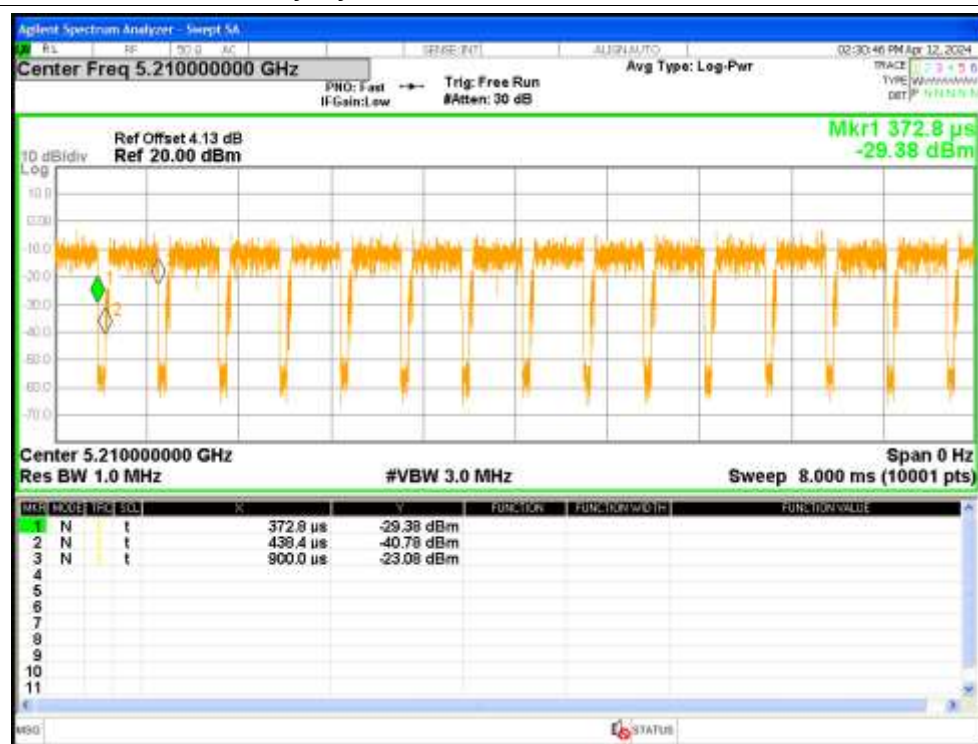


Duty Cycle NVNT n20 5180MHz Sum

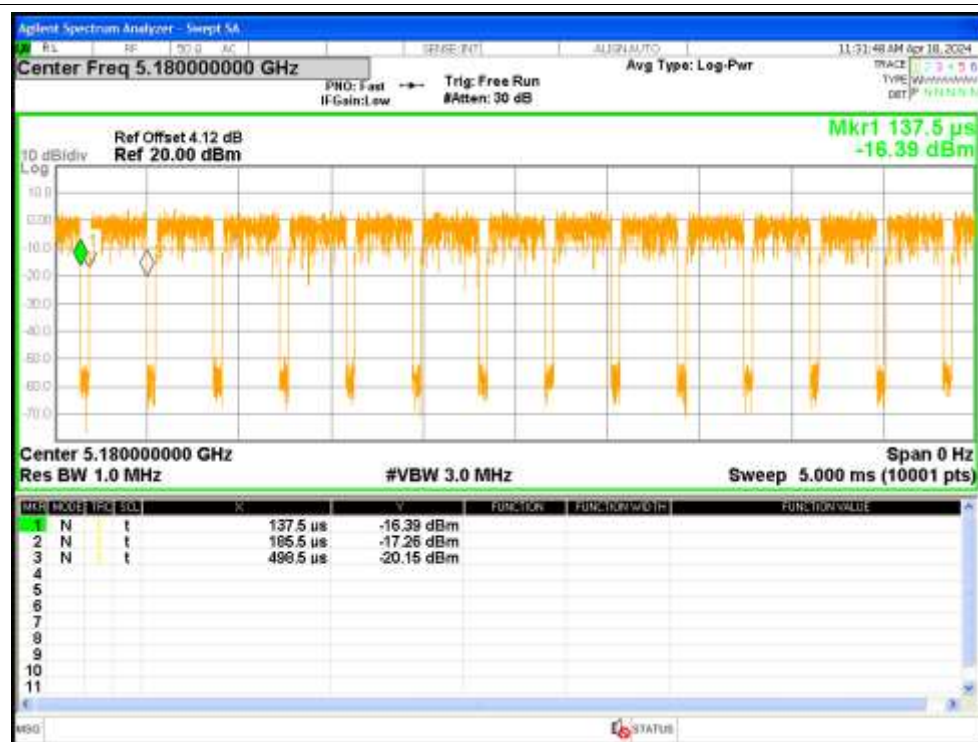

Duty Cycle NVNT n20 5200MHz Sum			
0	0	0	0
1	0	0	0
2	0	0	0
3	0	0	0
4	0	0	0
5	0	0	0
6	0	0	0
7	0	0	0
8	0	0	0
9	0	0	0
10	0	0	0
11	0	0	0
12	0	0	0
13	0	0	0
14	0	0	0
15	0	0	0
16	0	0	0
17	0	0	0
18	0	0	0
19	0	0	0
20	0	0	0
21	0	0	0
22	0	0	0
23	0	0	0
24	0	0	0
25	0	0	0
26	0	0	0
27	0	0	0
28	0	0	0
29	0	0	0
30	0	0	0
31	0	0	0
32	0	0	0
33	0	0	0
34	0	0	0
35	0	0	0
36	0	0	0
37	0	0	0
38	0	0	0
39	0	0	0
40	0	0	0
41	0	0	0
42	0	0	0
43	0	0	0
44	0	0	0
45	0	0	0
46	0	0	0
47	0	0	0
48	0	0	0
49	0	0	0
50	0	0	0
51	0	0	0
52	0	0	0
53	0	0	0
54	0	0	0
55	0	0	0
56	0	0	0
57	0	0	0
58	0	0	0
59	0	0	0
60	0	0	0
61	0	0	0
62	0	0	0
63	0	0	0
64	0	0	0
65	0	0	0
66	0	0	0
67	0	0	0
68	0	0	0
69	0	0	0
70	0	0	0
71	0	0	0
72	0	0	0
73	0	0	0
74	0	0	0
75	0	0	0
76	0	0	0
77	0	0	0
78	0	0	0
79	0	0	0
80	0	0	0
81	0	0	0
82	0	0	0
83	0	0	0
84	0	0	0
85	0	0	0
86	0	0	0
87	0	0	0
88	0	0	0
89	0	0	0
90	0	0	0
91	0	0	0
92	0	0	0
93	0	0	0
94	0	0	0
95	0	0	0
96	0	0	0
97	0	0	0
98	0	0	0
99	0	0	0
100	0	0	0
101	0	0	0
102	0	0	0
103	0	0	0
104	0	0	0
105	0	0	0
106	0	0	0
107	0	0	0
108	0	0	0
109	0	0	0
110	0	0	0
111	0	0	0
112	0		

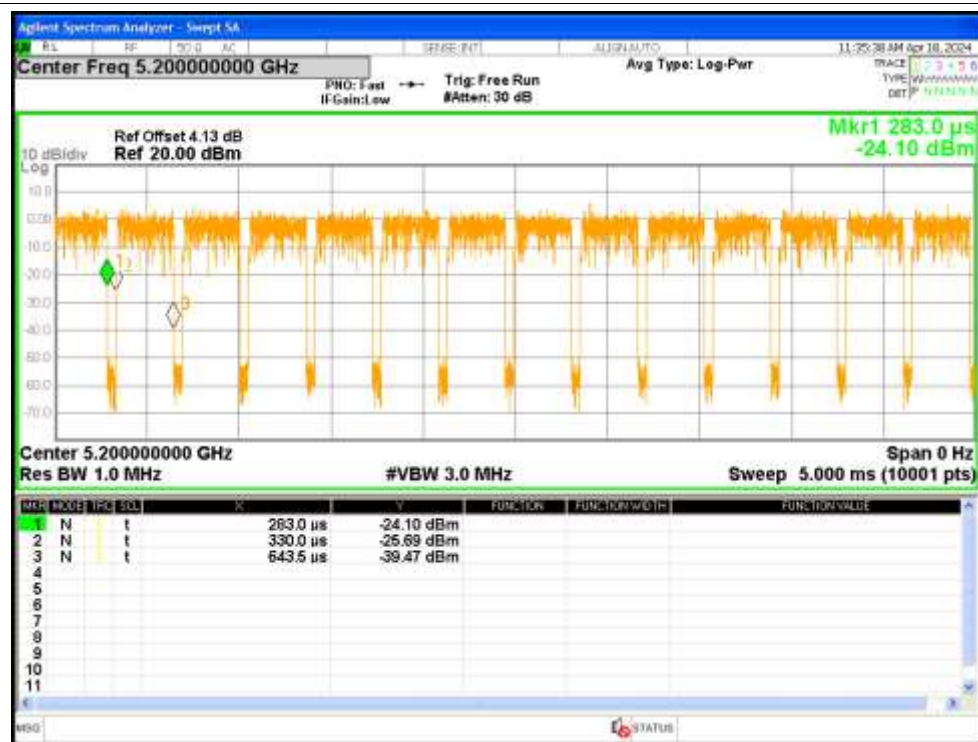

Duty Cycle NVNT n40 5230MHz Sum

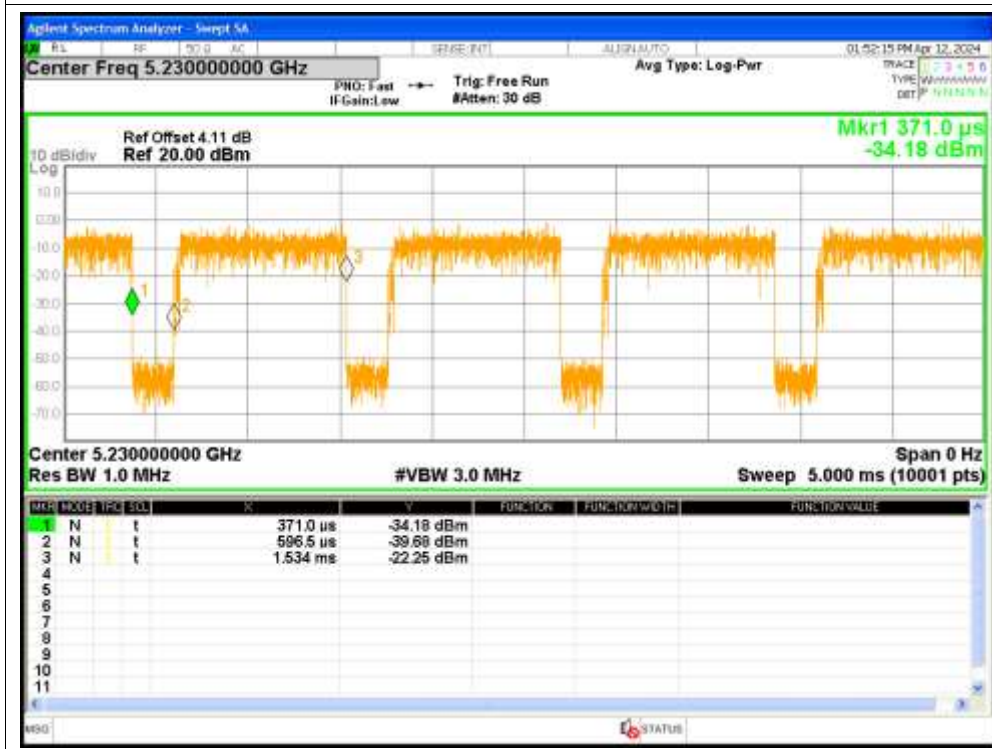


2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	8.65	0.27	8.92	<=24	Pass
NVNT	a	5200	Ant1	8.72	0.27	8.99	<=24	Pass
NVNT	a	5240	Ant1	9.75	0.26	10.01	<=24	Pass
NVNT	a	5180	Ant2	9.85	0.26	10.11	<=24	Pass
NVNT	a	5200	Ant2	9.95	0.27	10.22	<=24	Pass
NVNT	a	5240	Ant2	10.03	0.26	10.29	<=24	Pass
NVNT	ac20	5180	Ant1	8.77	0.29	9.06	<=24	Pass
NVNT	ac20	5180	Ant2	9.78	0.29	10.07	<=24	Pass
NVNT	ac20	5180	Sum	12.31	0.29	12.6	<=21.81	Pass
NVNT	ac20	5200	Ant1	8.68	0.29	8.97	<=24	Pass
NVNT	ac20	5200	Ant2	9.79	0.29	10.08	<=24	Pass
NVNT	ac20	5200	Sum	12.28	0.29	12.57	<=21.81	Pass
NVNT	ac20	5240	Ant1	9.78	0.29	10.07	<=24	Pass
NVNT	ac20	5240	Ant2	10.04	0.29	10.33	<=24	Pass
NVNT	ac20	5240	Sum	12.92	0.29	13.21	<=21.81	Pass
NVNT	ac40	5190	Ant1	8.1	0.53	8.63	<=24	Pass
NVNT	ac40	5190	Ant2	10.34	0.53	10.87	<=24	Pass
NVNT	ac40	5190	Sum	12.37	0.53	12.9	<=21.81	Pass
NVNT	ac40	5230	Ant1	8.84	0.53	9.37	<=24	Pass
NVNT	ac40	5230	Ant2	10.67	0.53	11.2	<=24	Pass
NVNT	ac40	5230	Sum	12.86	0.53	13.39	<=21.81	Pass
NVNT	ac80	5210	Ant1	7.57	0.58	8.15	<=24	Pass
NVNT	ac80	5210	Ant2	9.64	0.58	10.22	<=24	Pass
NVNT	ac80	5210	Sum	11.74	0.58	12.32	<=21.81	Pass
NVNT	ax20	5180	Ant1	7.92	1.04	8.96	<=24	Pass
NVNT	ax20	5180	Ant2	9.2	1.04	10.24	<=24	Pass
NVNT	ax20	5180	Sum	11.62	1.04	12.66	<=21.81	Pass
NVNT	ax20	5200	Ant1	7.9	1.04	8.94	<=24	Pass
NVNT	ax20	5200	Ant2	9.21	1.04	10.25	<=24	Pass
NVNT	ax20	5200	Sum	11.61	1.04	12.65	<=21.81	Pass
NVNT	ax20	5240	Ant1	8.91	1.03	9.94	<=24	Pass
NVNT	ax20	5240	Ant2	9.34	1.03	10.37	<=24	Pass
NVNT	ax20	5240	Sum	12.14	1.03	13.17	<=21.81	Pass
NVNT	ax40	5190	Ant1	7.7	1.09	8.79	<=24	Pass
NVNT	ax40	5190	Ant2	9.1	1.09	10.19	<=24	Pass
NVNT	ax40	5190	Sum	11.47	1.09	12.56	<=21.81	Pass
NVNT	ax40	5230	Ant1	8.64	1.05	9.69	<=24	Pass
NVNT	ax40	5230	Ant2	9.35	1.05	10.4	<=24	Pass
NVNT	ax40	5230	Sum	12.02	1.05	13.07	<=21.81	Pass


NVNT	ax80	5210	Ant1	7.19	1.1	8.29	<=24	Pass
NVNT	ax80	5210	Ant2	8.32	1.1	9.42	<=24	Pass
NVNT	ax80	5210	Sum	10.8	1.1	11.9	<=21.81	Pass
NVNT	n20	5180	Ant1	8.4	0.62	9.02	<=24	Pass
NVNT	n20	5180	Ant2	9.44	0.62	10.06	<=24	Pass
NVNT	n20	5180	Sum	11.96	0.62	12.58	<=21.81	Pass
NVNT	n20	5200	Ant1	8.42	0.61	9.03	<=24	Pass
NVNT	n20	5200	Ant2	9.45	0.61	10.06	<=24	Pass
NVNT	n20	5200	Sum	11.98	0.61	12.59	<=21.81	Pass
NVNT	n20	5240	Ant1	9.32	0.61	9.93	<=24	Pass
NVNT	n20	5240	Ant2	9.62	0.61	10.23	<=24	Pass
NVNT	n20	5240	Sum	12.48	0.61	13.09	<=21.81	Pass
NVNT	n40	5190	Ant1	7.65	0.94	8.59	<=24	Pass
NVNT	n40	5190	Ant2	9.79	0.94	10.73	<=24	Pass
NVNT	n40	5190	Sum	11.86	0.94	12.8	<=21.81	Pass
NVNT	n40	5230	Ant1	8.08	0.94	9.02	<=24	Pass
NVNT	n40	5230	Ant2	10.04	0.94	10.98	<=24	Pass
NVNT	n40	5230	Sum	12.18	0.94	13.12	<=21.81	Pass

Test Graphs

Power NVNT a 5180MHz Ant1

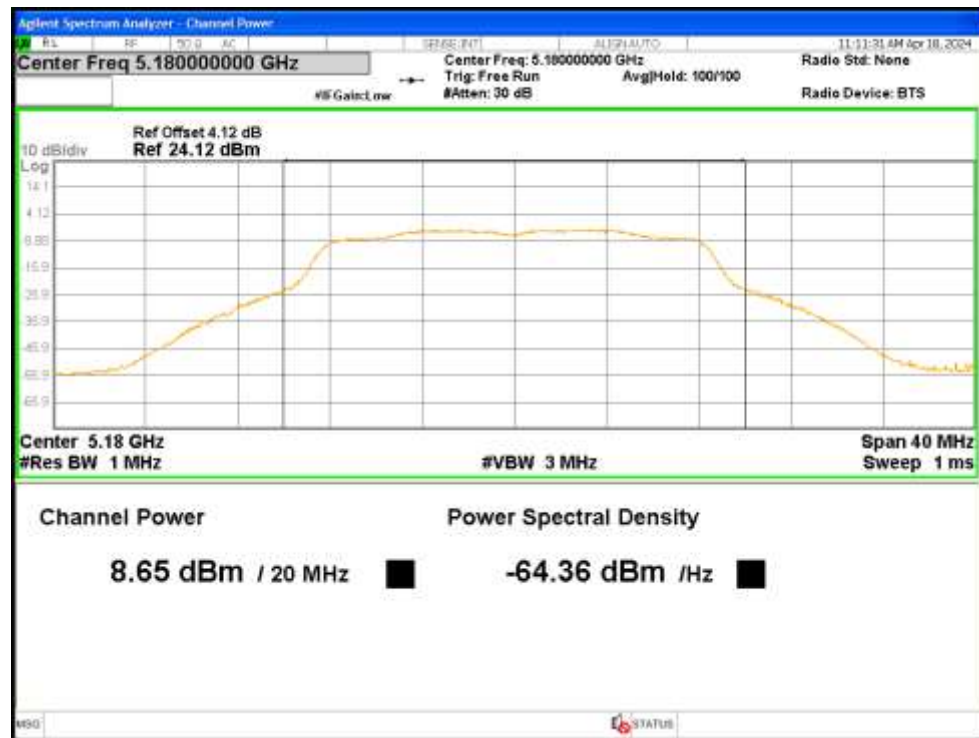

Power NVNT a 5200MHz Ant1

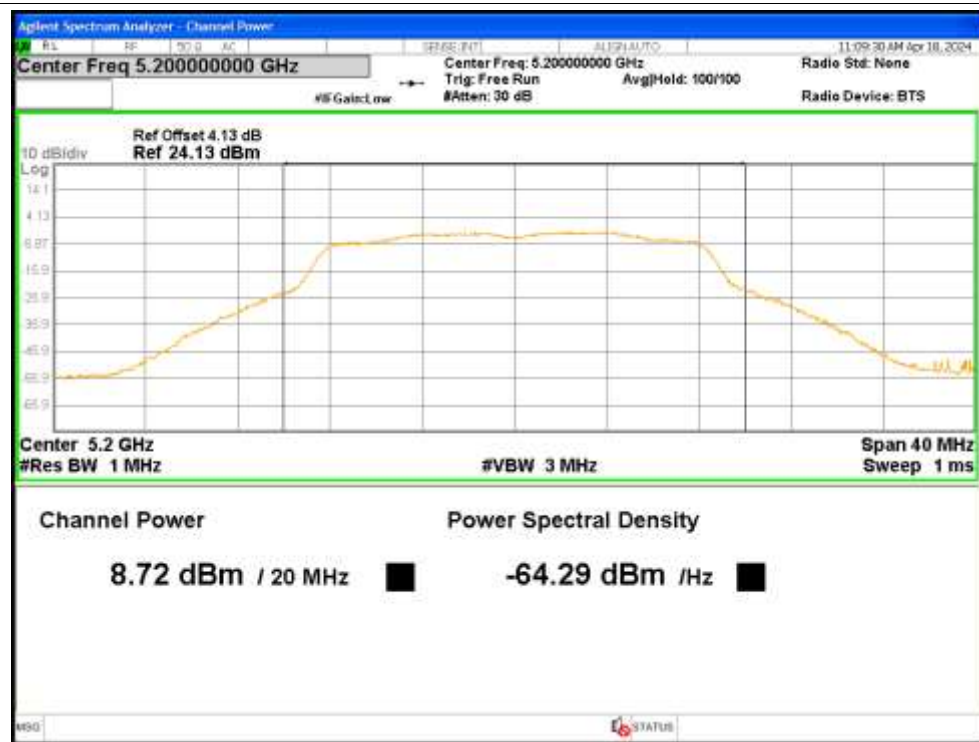


Power NVNT a 5240MHz Ant1



Power NVNT a 5180MHz Ant2



Power NVNT a 5200MHz Ant2

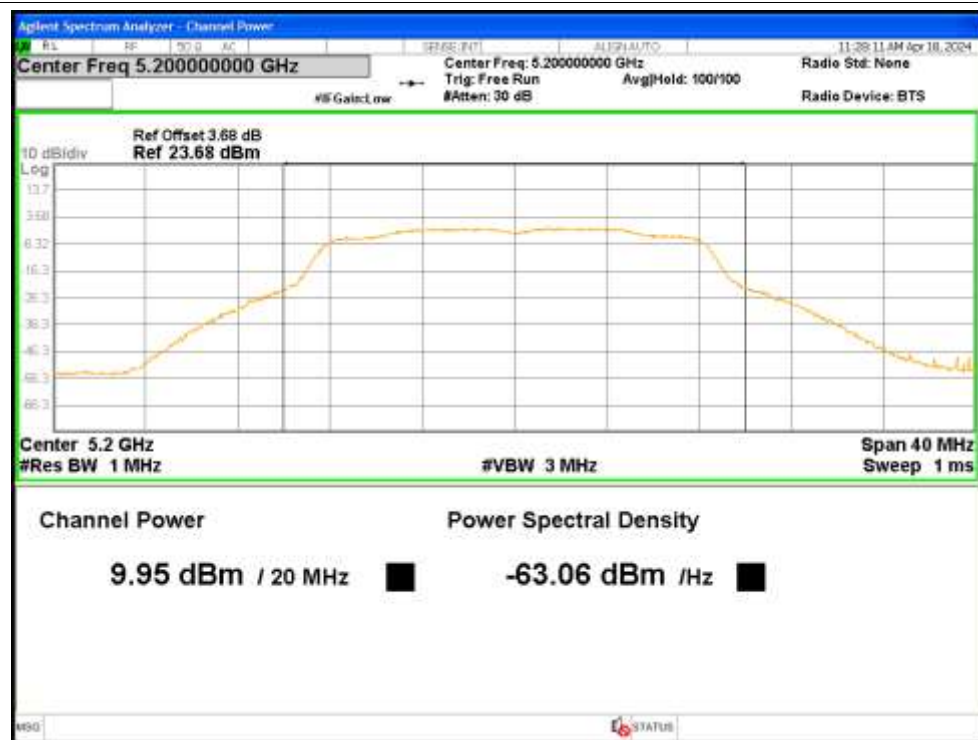

Power NVNT a 5240MHz Ant2




Power NVNT ac20 5180MHz Ant1



Power NVNT ac20 5180MHz Ant2



Power NVNT ac20 5200MHz Ant1

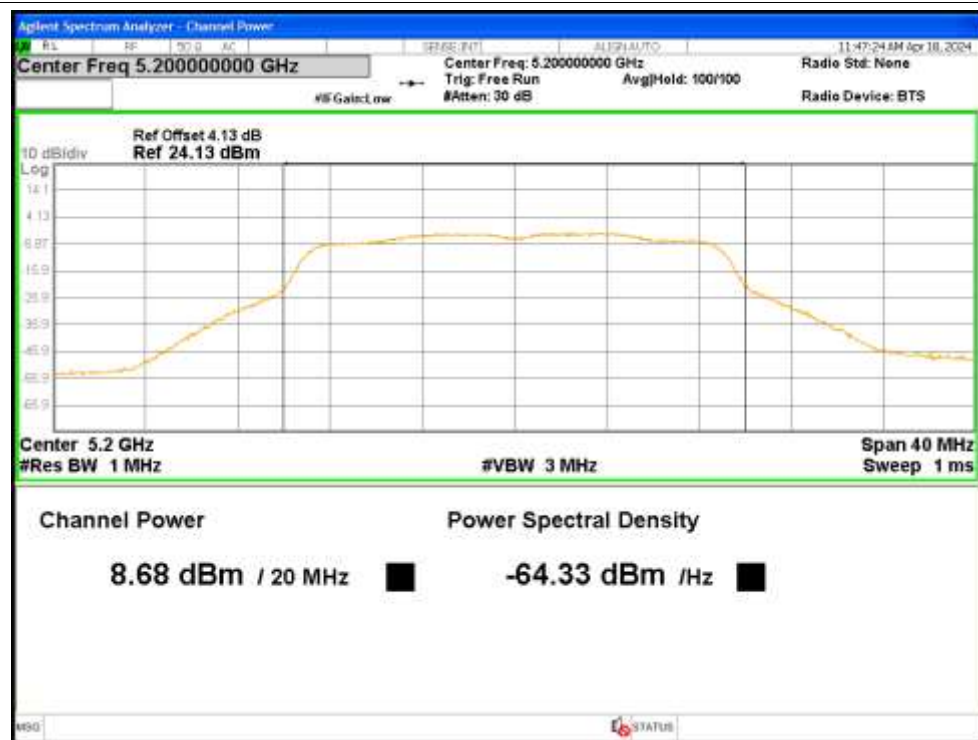

Power NVNT ac20 5200MHz Ant2




Power NVNT ac20 5240MHz Ant1



Power NVNT ac20 5240MHz Ant2



Power NVNT ac40 5190MHz Ant1

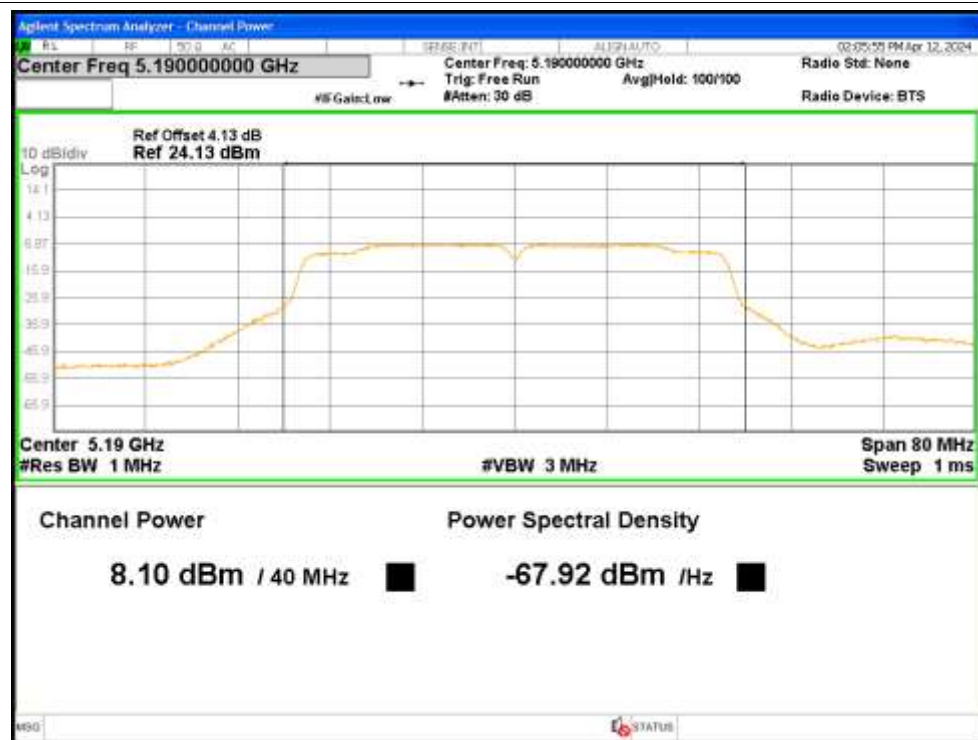

Power NVNT ac40 5190MHz Ant2




Power NVNT ac40 5230MHz Ant1



Power NVNT ac40 5230MHz Ant2



Power NVNT ac80 5210MHz Ant1

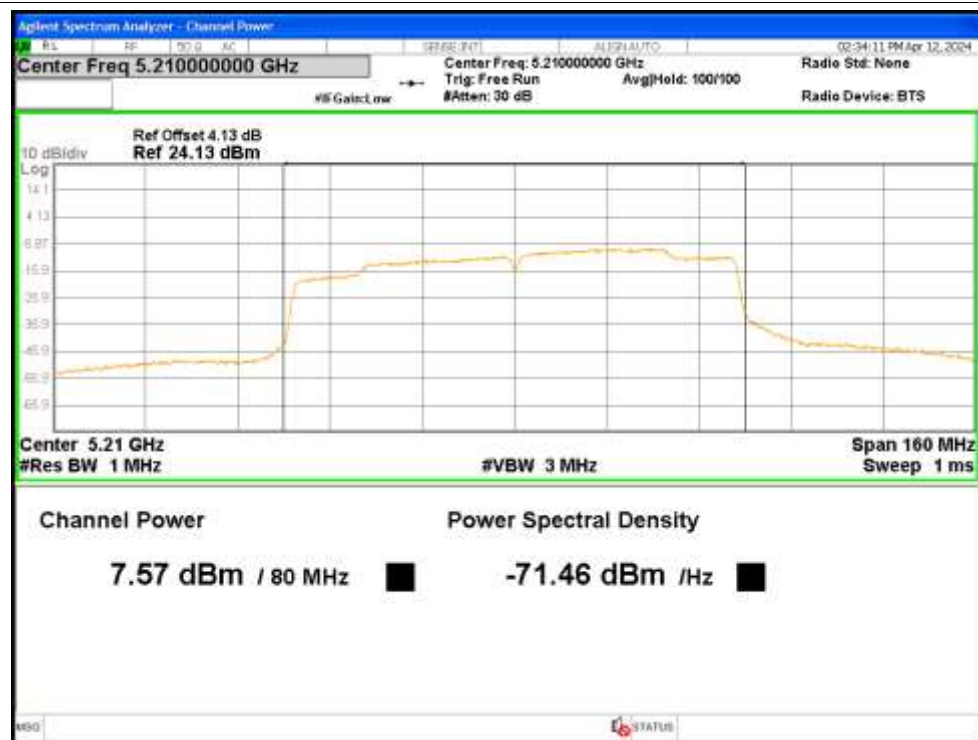

Power NVNT ac80 5210MHz Ant2



Power NVNT ax20 5180MHz Ant1



Power NVNT ax20 5180MHz Ant2



Power NVNT ax20 5200MHz Ant1



Power NVNT ax20 5200MHz Ant2



Power NVNT ax20 5240MHz Ant1



Power NVNT ax20 5240MHz Ant2




Power NVNT ax40 5190MHz Ant1



Power NVNT ax40 5190MHz Ant2




Power NVNT ax40 5230MHz Ant1

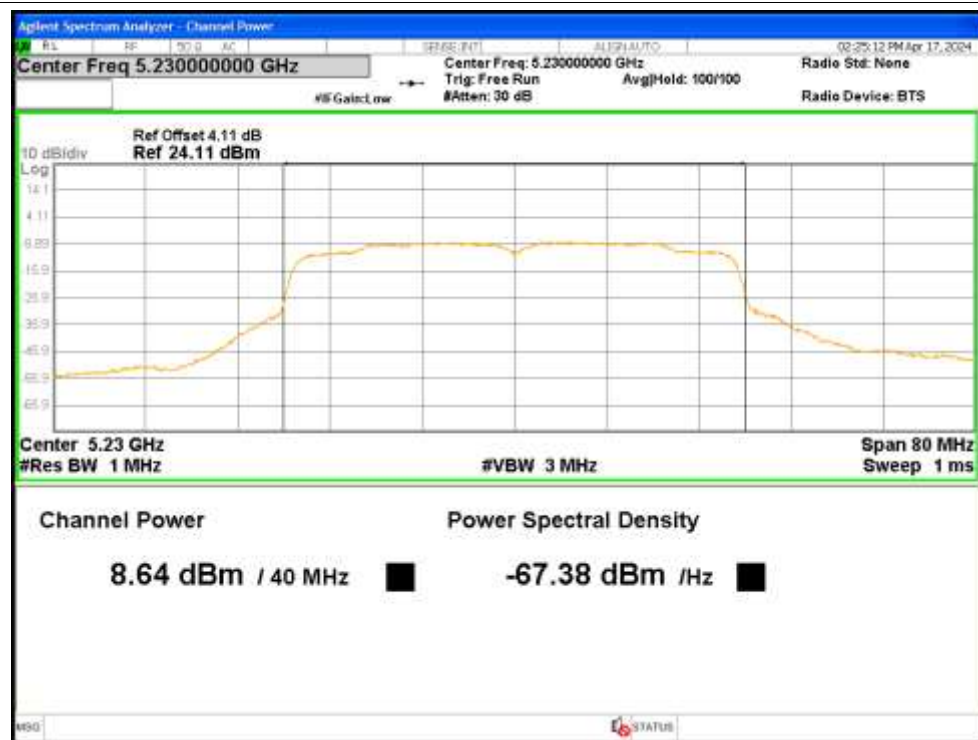

Power NVNT ax40 5230MHz Ant2



Power NVNT ax80 5210MHz Ant1

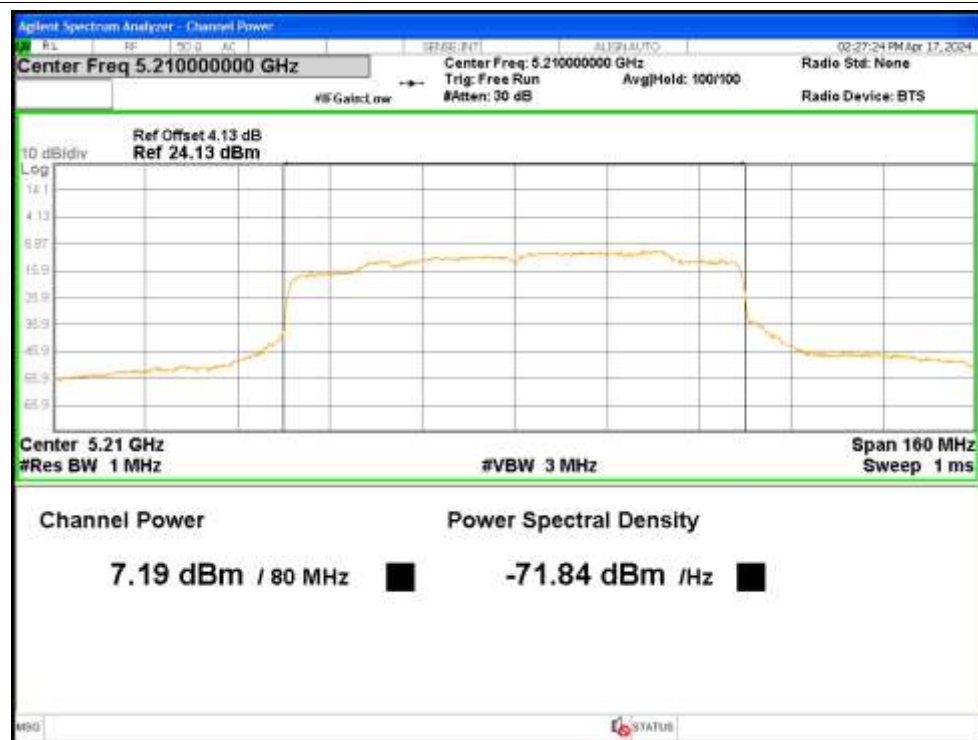

Power NVNT ax80 5210MHz Ant2



Power NVNT n20 5180MHz Ant1



Power NVNT n20 5180MHz Ant2



Power NVNT n20 5200MHz Ant1



Power NVNT n20 5200MHz Ant2



Power NVNT n20 5240MHz Ant1



Power NVNT n20 5240MHz Ant2



Power NVNT n40 5190MHz Ant1



Power NVNT n40 5190MHz Ant2



Power NVNT n40 5230MHz Ant1



Power NVNT n40 5230MHz Ant2



3. -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	22.4375	Pass
NVNT	a	5200	Ant1	23.4649	Pass
NVNT	a	5240	Ant1	22.8993	Pass
NVNT	a	5180	Ant2	21.9235	Pass
NVNT	a	5200	Ant2	23.4515	Pass
NVNT	a	5240	Ant2	23.1624	Pass
NVNT	ac20	5180	Ant1	23.2004	Pass
NVNT	ac20	5180	Ant2	23.998	Pass
NVNT	ac20	5200	Ant1	22.711	Pass
NVNT	ac20	5200	Ant2	23.6814	Pass
NVNT	ac20	5240	Ant1	25.0705	Pass
NVNT	ac20	5240	Ant2	23.4287	Pass
NVNT	ac40	5190	Ant1	42.0385	Pass
NVNT	ac40	5190	Ant2	44.0943	Pass
NVNT	ac40	5230	Ant1	42.5428	Pass
NVNT	ac40	5230	Ant2	42.0142	Pass
NVNT	ac80	5210	Ant1	82.499	Pass
NVNT	ac80	5210	Ant2	82.7513	Pass
NVNT	ax20	5180	Ant1	22.5693	Pass
NVNT	ax20	5180	Ant2	23.0036	Pass
NVNT	ax20	5200	Ant1	23.1043	Pass
NVNT	ax20	5200	Ant2	22.4687	Pass
NVNT	ax20	5240	Ant1	22.8471	Pass
NVNT	ax20	5240	Ant2	22.0058	Pass
NVNT	ax40	5190	Ant1	43.0926	Pass
NVNT	ax40	5190	Ant2	42.1114	Pass
NVNT	ax40	5230	Ant1	42.99	Pass
NVNT	ax40	5230	Ant2	42.6408	Pass
NVNT	ax80	5210	Ant1	79.8238	Pass
NVNT	ax80	5210	Ant2	81.6844	Pass
NVNT	n20	5180	Ant1	23.6678	Pass
NVNT	n20	5180	Ant2	23.3803	Pass
NVNT	n20	5200	Ant1	23.1387	Pass
NVNT	n20	5200	Ant2	23.9642	Pass
NVNT	n20	5240	Ant1	24.8776	Pass
NVNT	n20	5240	Ant2	23.4234	Pass
NVNT	n40	5190	Ant1	42.7457	Pass
NVNT	n40	5190	Ant2	43.3659	Pass
NVNT	n40	5230	Ant1	41.8018	Pass
NVNT	n40	5230	Ant2	41.1578	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1



-26dB Bandwidth NVNT a 5200MHz Ant1



-26dB Bandwidth NVNT a 5240MHz Ant1



-26dB Bandwidth NVNT a 5180MHz Ant2



-26dB Bandwidth NVNT a 5200MHz Ant2



-26dB Bandwidth NVNT a 5240MHz Ant2



-26dB Bandwidth NVNT ac20 5180MHz Ant1



-26dB Bandwidth NVNT ac20 5180MHz Ant2



-26dB Bandwidth NVNT ac20 5200MHz Ant1



-26dB Bandwidth NVNT ac20 5200MHz Ant2



-26dB Bandwidth NVNT ac20 5240MHz Ant1



-26dB Bandwidth NVNT ac20 5240MHz Ant2



-26dB Bandwidth NVNT ac40 5190MHz Ant1



-26dB Bandwidth NVNT ac40 5190MHz Ant2



-26dB Bandwidth NVNT ac40 5230MHz Ant1



-26dB Bandwidth NVNT ac40 5230MHz Ant2




-26dB Bandwidth NVNT ac80 5210MHz Ant1




-26dB Bandwidth NVNT ac80 5210MHz Ant2



-26dB Bandwidth NVNT ax20 5180MHz Ant1

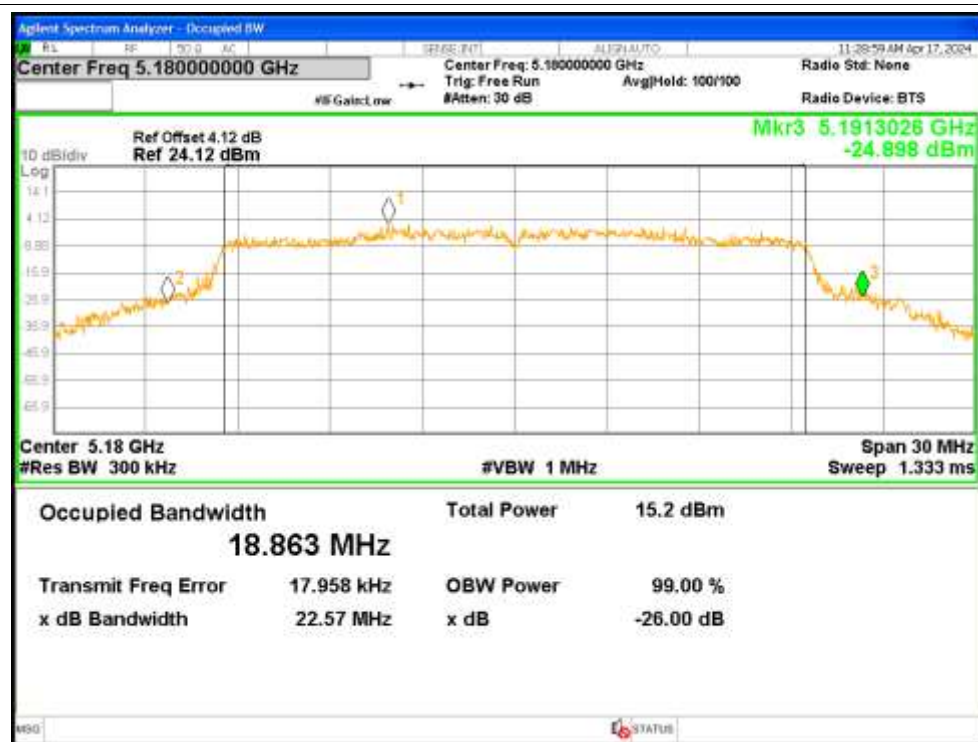


-26dB Bandwidth NVNT ax20 5180MHz Ant2

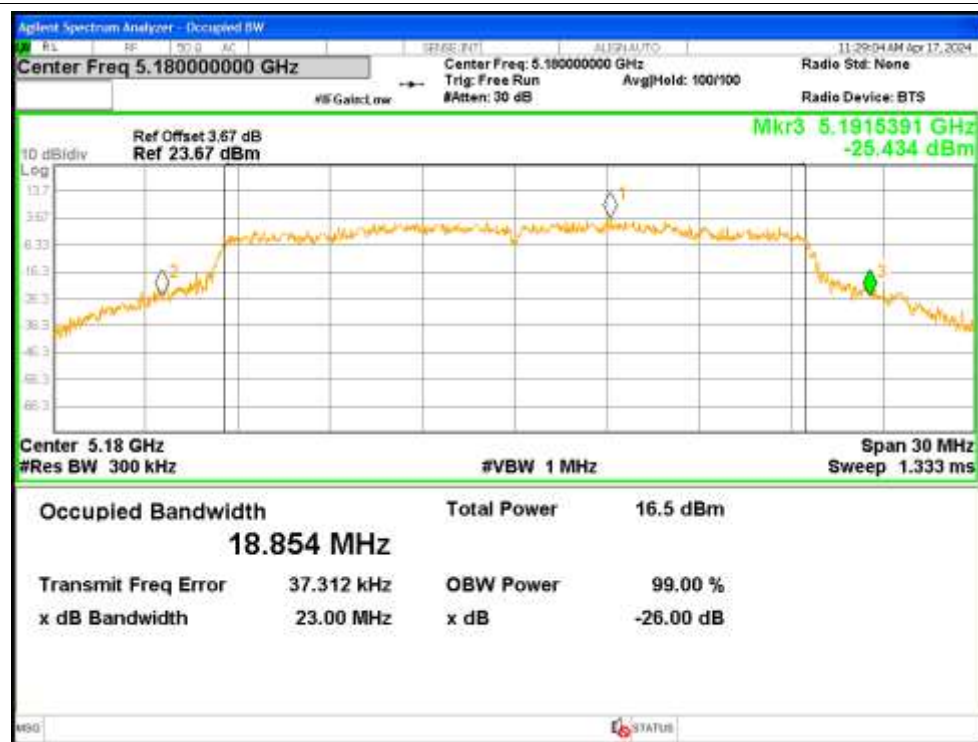

-26dB Bandwidth NVNT ax20 5200MHz Ant1




-26dB Bandwidth NVNT ax20 5200MHz Ant2

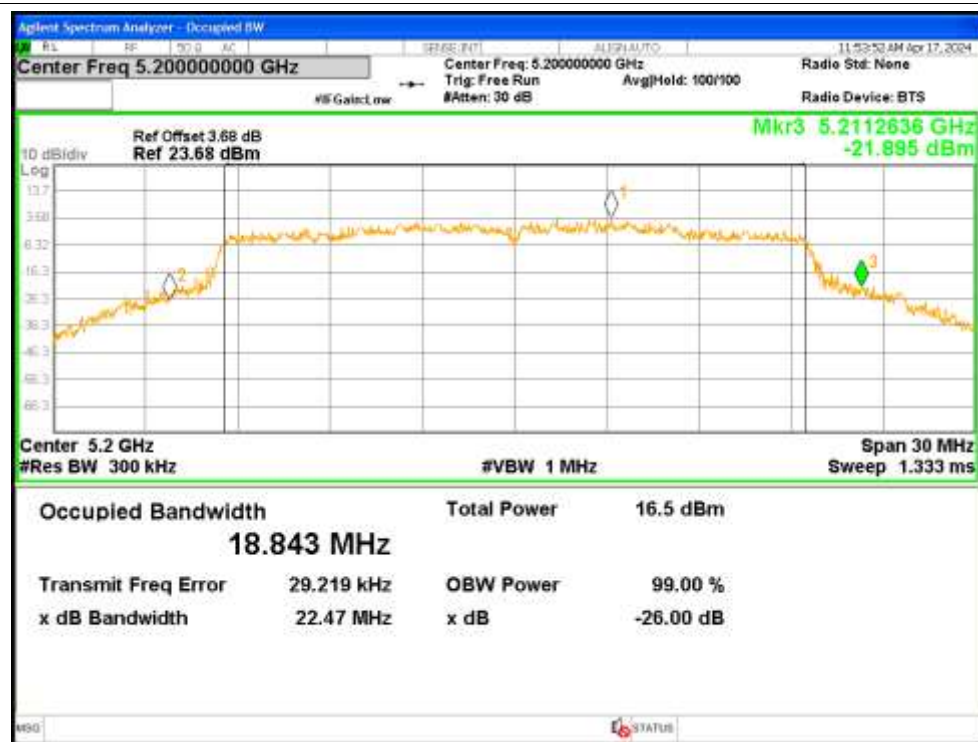


-26dB Bandwidth NVNT ax20 5240MHz Ant1



-26dB Bandwidth NVNT ax20 5240MHz Ant2

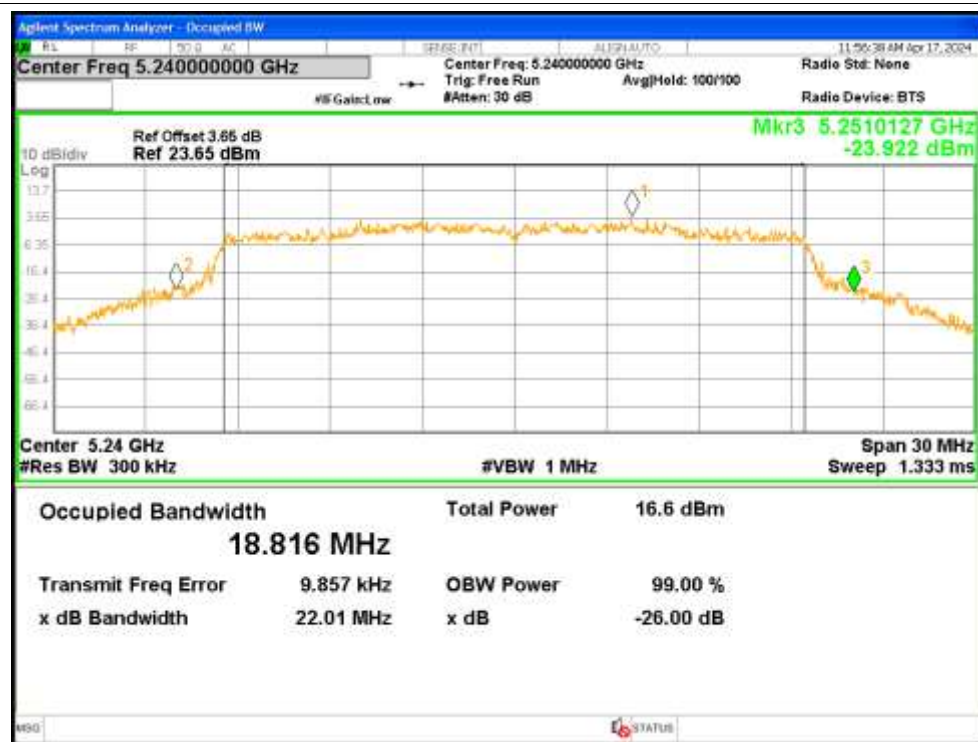

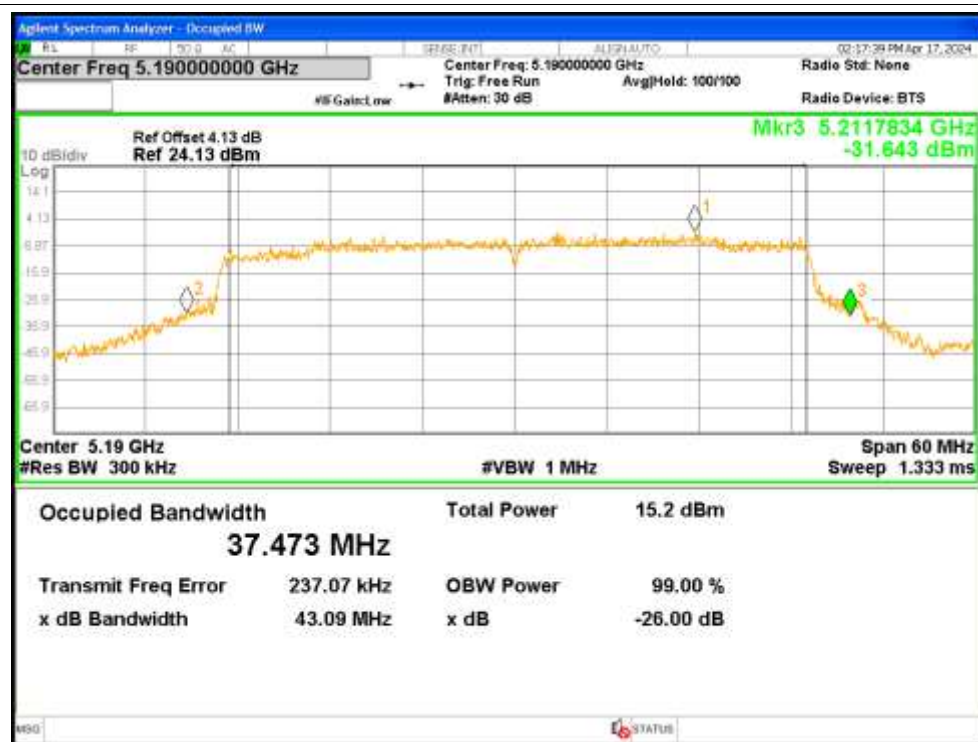-26dB Bandwidth NVNT ax40 5190MHz Ant1**-26dB Bandwidth NVNT ax40 5190MHz Ant2**

-26dB Bandwidth NVNT ax40 5230MHz Ant1




-26dB Bandwidth NVNT ax40 5230MHz Ant2



-26dB Bandwidth NVNT ax80 5210MHz Ant1



-26dB Bandwidth NVNT ax80 5210MHz Ant2

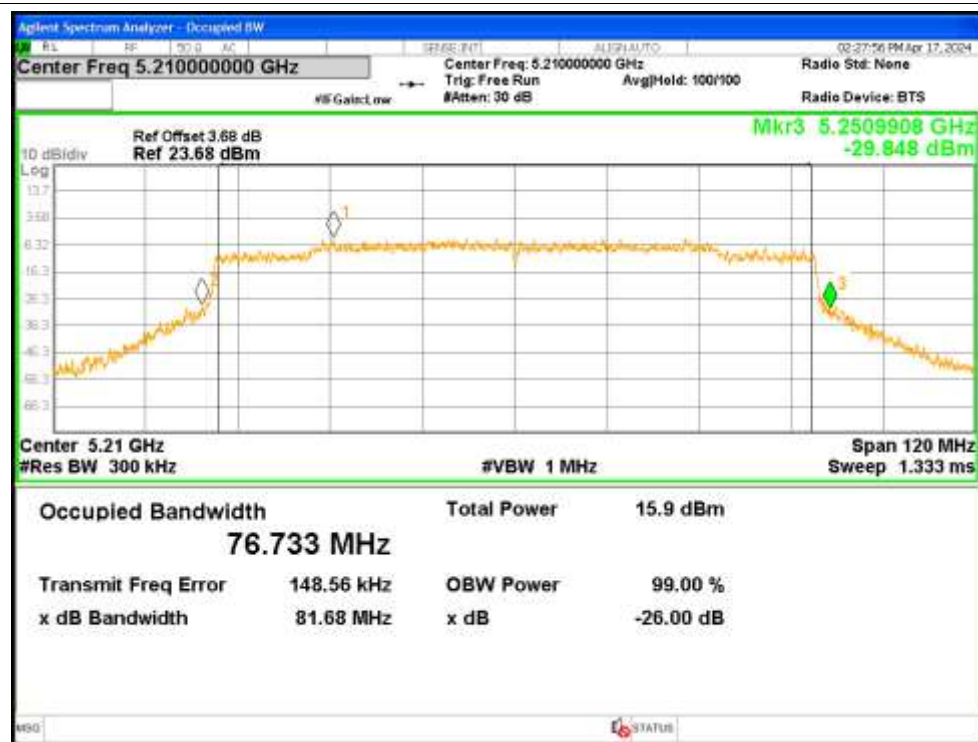

-26dB Bandwidth NVNT n20 5180MHz Ant1



-26dB Bandwidth NVNT n20 5180MHz Ant2



-26dB Bandwidth NVNT n20 5200MHz Ant1



-26dB Bandwidth NVNT n20 5200MHz Ant2



-26dB Bandwidth NVNT n20 5240MHz Ant1



-26dB Bandwidth NVNT n20 5240MHz Ant2



-26dB Bandwidth NVNT n40 5190MHz Ant1



-26dB Bandwidth NVNT n40 5190MHz Ant2



-26dB Bandwidth NVNT n40 5230MHz Ant1



-26dB Bandwidth NVNT n40 5230MHz Ant2




4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.4941
NVNT	a	5200	Ant1	16.5836
NVNT	a	5240	Ant1	16.5311
NVNT	a	5180	Ant2	16.5409
NVNT	a	5200	Ant2	16.5266
NVNT	a	5240	Ant2	16.5079
NVNT	ac20	5180	Ant1	17.666
NVNT	ac20	5180	Ant2	17.6527
NVNT	ac20	5200	Ant1	17.6776
NVNT	ac20	5200	Ant2	17.6778
NVNT	ac20	5240	Ant1	17.6994
NVNT	ac20	5240	Ant2	17.6479
NVNT	ac40	5190	Ant1	36.1119
NVNT	ac40	5190	Ant2	36.0795
NVNT	ac40	5230	Ant1	35.9803
NVNT	ac40	5230	Ant2	35.9287
NVNT	ac80	5210	Ant1	73.4757
NVNT	ac80	5210	Ant2	75.1273
NVNT	ax20	5180	Ant1	18.8166
NVNT	ax20	5180	Ant2	18.8446
NVNT	ax20	5200	Ant1	18.8429
NVNT	ax20	5200	Ant2	18.806
NVNT	ax20	5240	Ant1	18.8147
NVNT	ax20	5240	Ant2	18.7983
NVNT	ax40	5190	Ant1	37.4964
NVNT	ax40	5190	Ant2	37.4676
NVNT	ax40	5230	Ant1	37.4797
NVNT	ax40	5230	Ant2	37.5314
NVNT	ax80	5210	Ant1	75.6112
NVNT	ax80	5210	Ant2	76.6186
NVNT	n20	5180	Ant1	17.6462
NVNT	n20	5180	Ant2	17.6406
NVNT	n20	5200	Ant1	17.6689
NVNT	n20	5200	Ant2	17.6976
NVNT	n20	5240	Ant1	17.682
NVNT	n20	5240	Ant2	17.6488
NVNT	n40	5190	Ant1	36.1466
NVNT	n40	5190	Ant2	36.1039
NVNT	n40	5230	Ant1	35.9784
NVNT	n40	5230	Ant2	35.9476

Test Graphs

OBW NVNT a 5180MHz Ant1

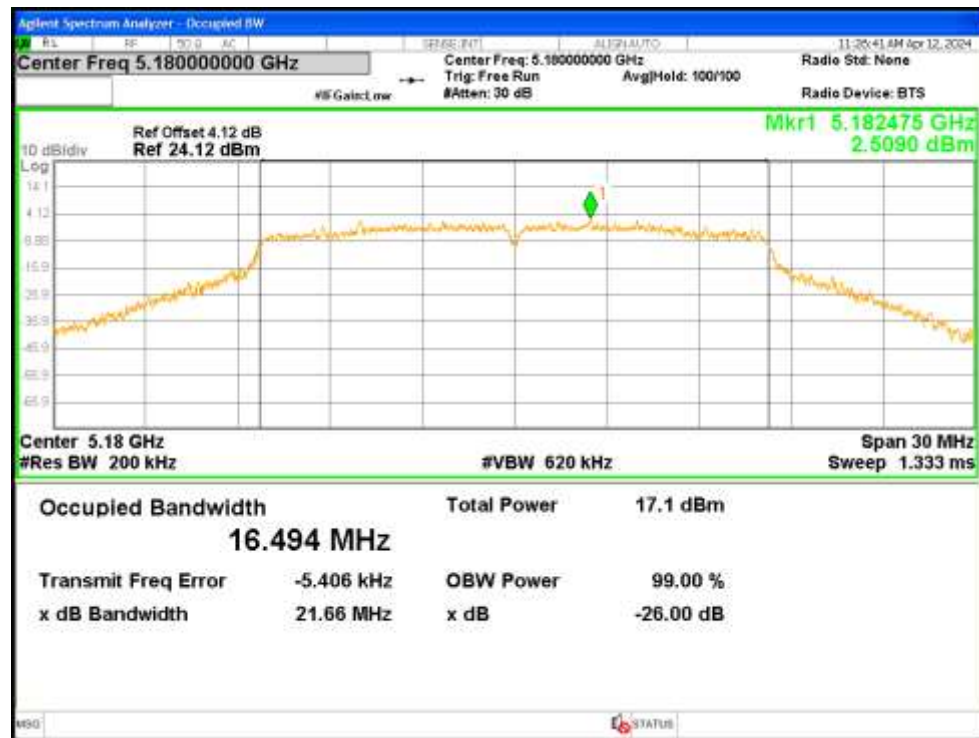

OBW NVNT a 5200MHz Ant1

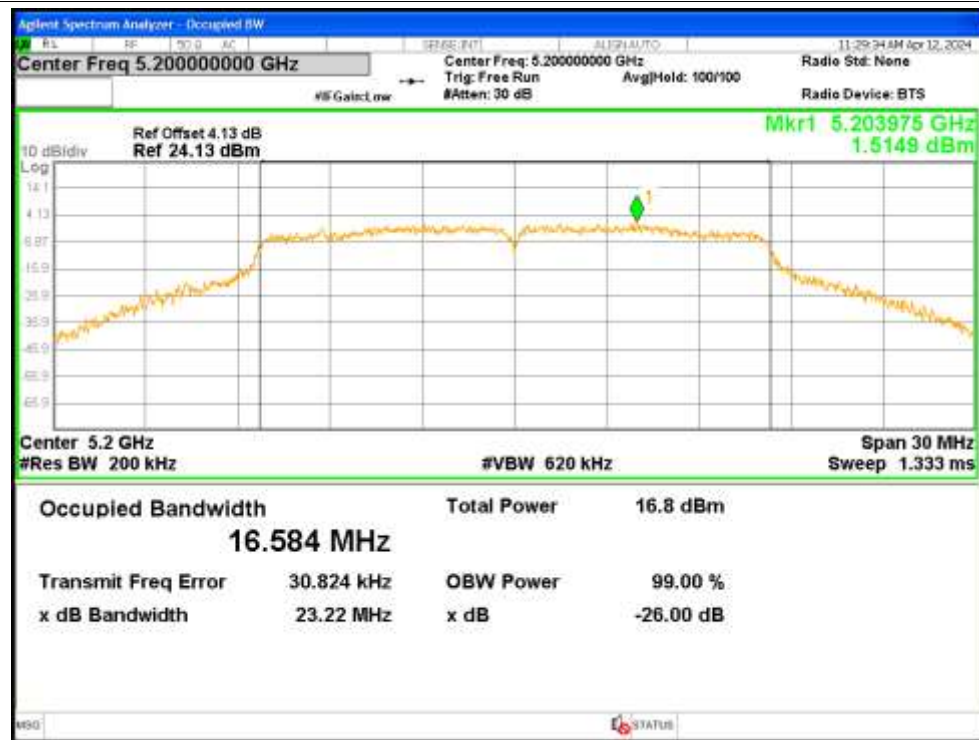

OBW NVNT a 5240MHz Ant1



OBW NVNT a 5180MHz Ant2



OBW NVNT a 5200MHz Ant2



OBW NVNT a 5240MHz Ant2



OBW NVNT ac20 5180MHz Ant1



OBW NVNT ac20 5180MHz Ant2



OBW NVNT ac20 5200MHz Ant1



OBW NVNT ac20 5200MHz Ant2



OBW NVNT ac20 5240MHz Ant1



OBW NVNT ac20 5240MHz Ant2



OBW NVNT ac40 5190MHz Ant1




OBW NVNT ac40 5190MHz Ant2



OBW NVNT ac40 5230MHz Ant1



OBW NVNT ac40 5230MHz Ant2

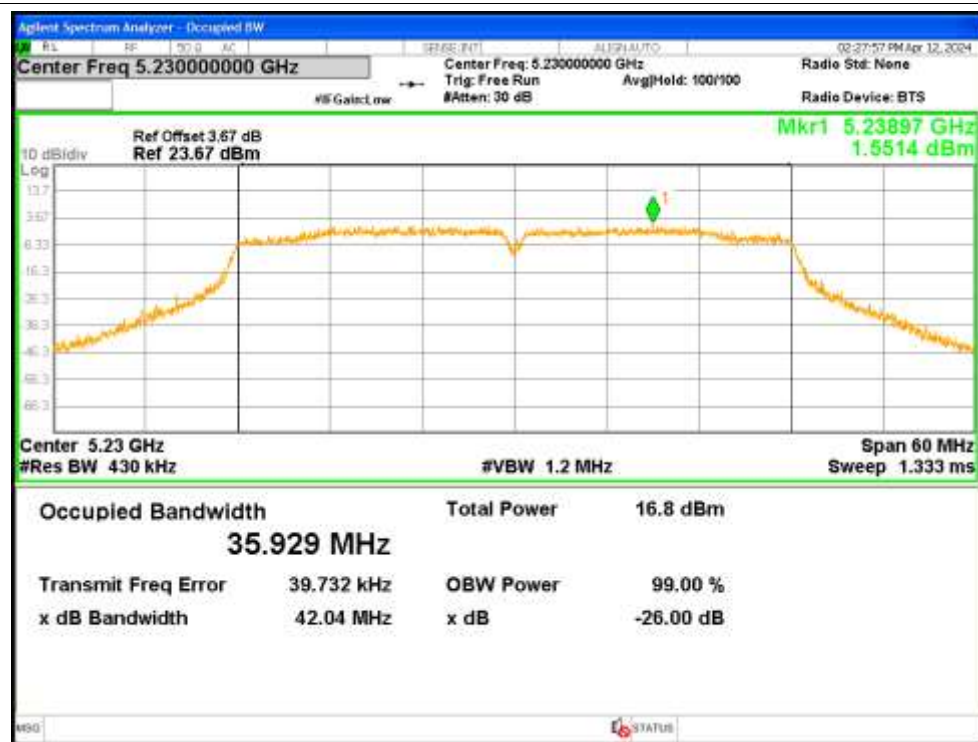

OBW NVNT ac80 5210MHz Ant1




OBW NVNT ac80 5210MHz Ant2




OBW NVNT ax20 5180MHz Ant1




OBW NVNT ax20 5180MHz Ant2

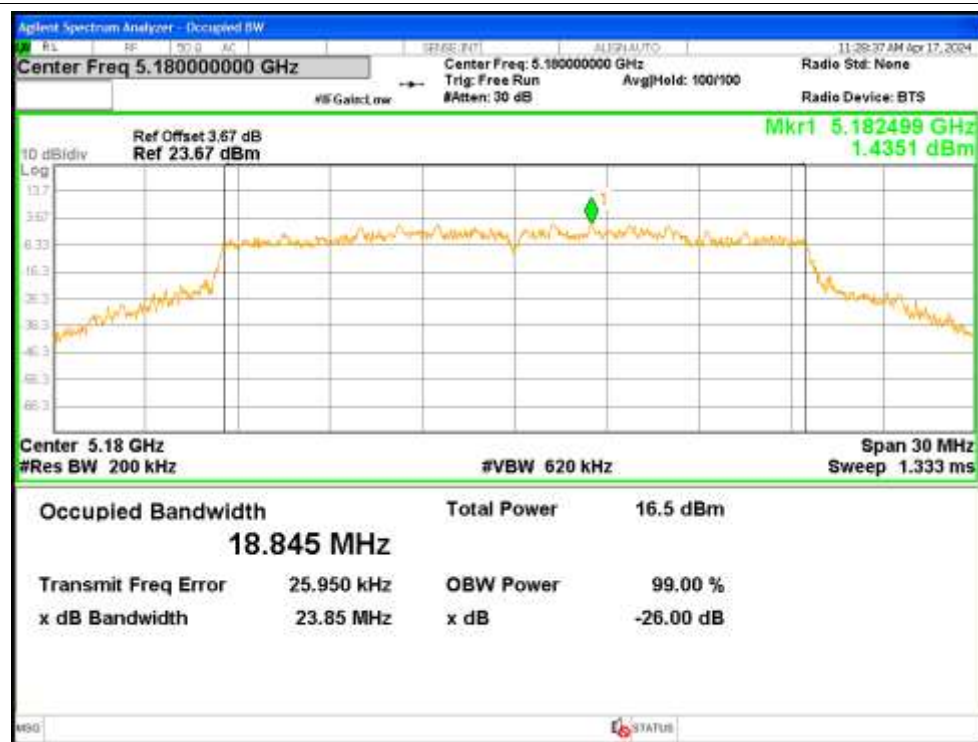

OBW NVNT ax20 5200MHz Ant1

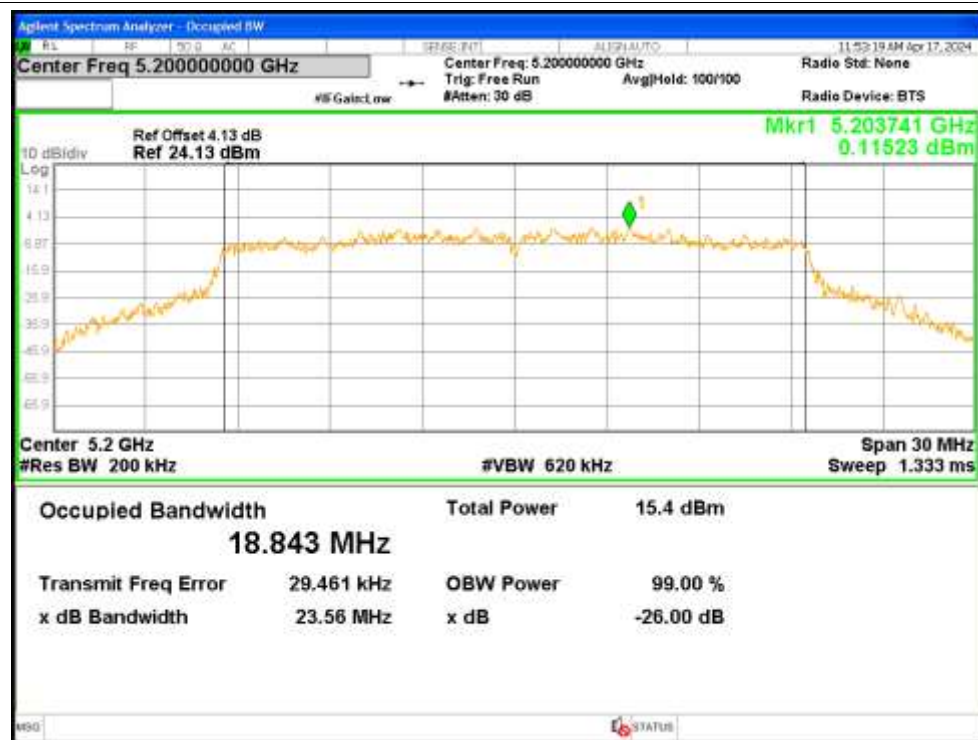


OBW NVNT ax20 5200MHz Ant2

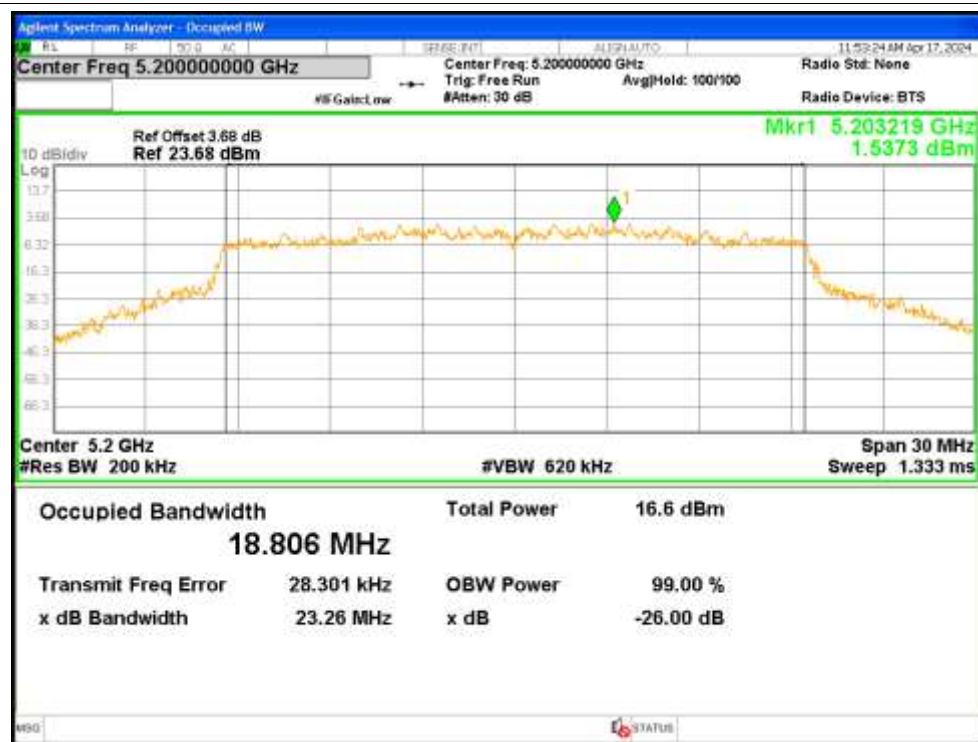

OBW NVNT ax20 5240MHz Ant1




OBW NVNT ax20 5240MHz Ant2

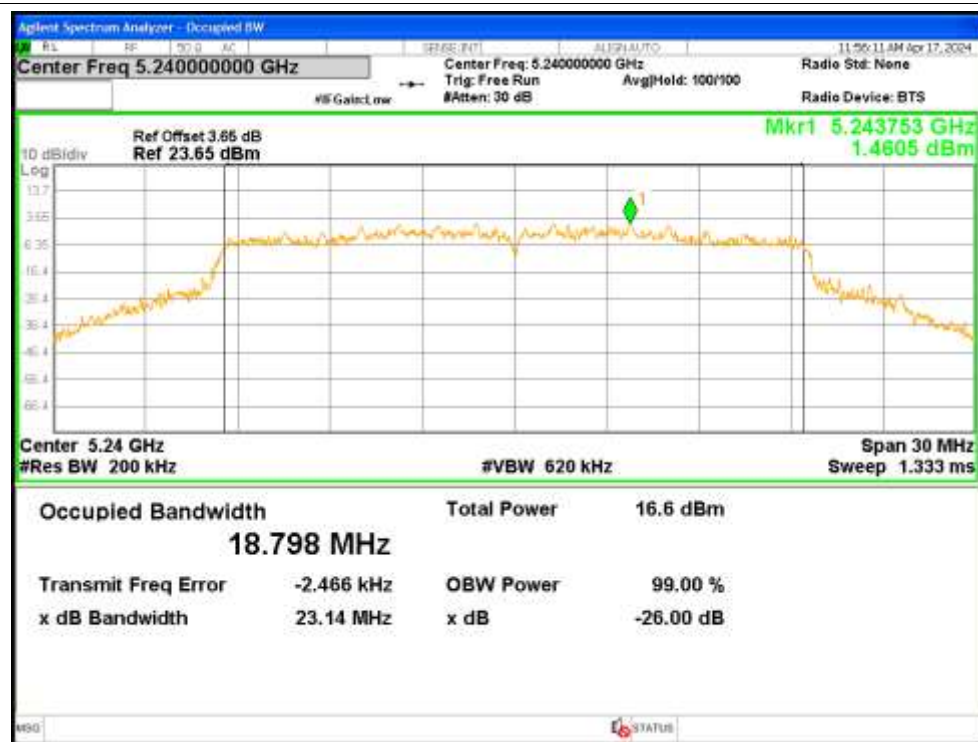

OBW NVNT ax40 5190MHz Ant1



OBW NVNT ax40 5190MHz Ant2

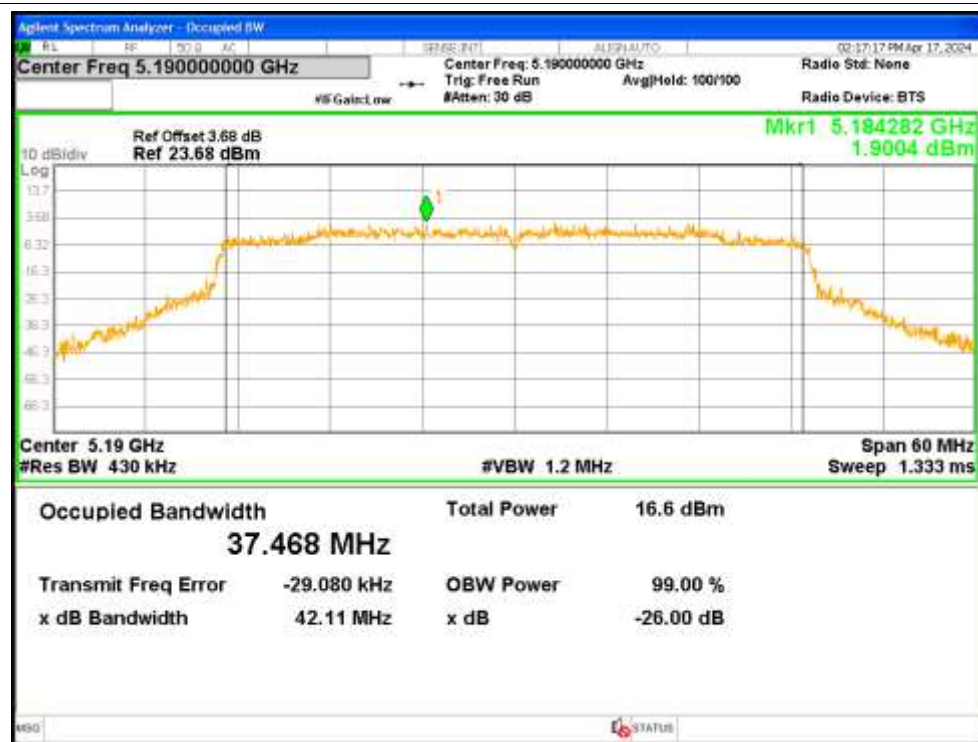

OBW NVNT ax40 5230MHz Ant1




OBW NVNT ax40 5230MHz Ant2



OBW NVNT ax80 5210MHz Ant1



OBW NVNT ax80 5210MHz Ant2

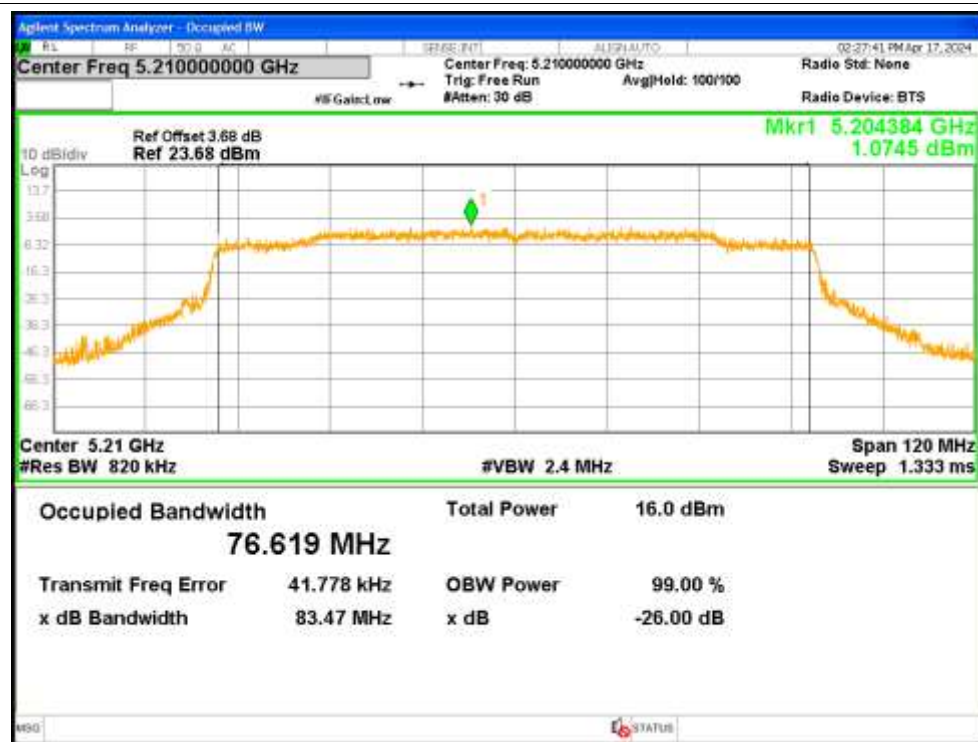

OBW NVNT n20 5180MHz Ant1



OBW NVNT n20 5180MHz Ant2



OBW NVNT n20 5200MHz Ant1



OBW NVNT n20 5200MHz Ant2



OBW NVNT n20 5240MHz Ant1



OBW NVNT n20 5240MHz Ant2



OBW NVNT n40 5190MHz Ant1




OBW NVNT n40 5190MHz Ant2



OBW NVNT n40 5230MHz Ant1



OBW NVNT n40 5230MHz Ant2

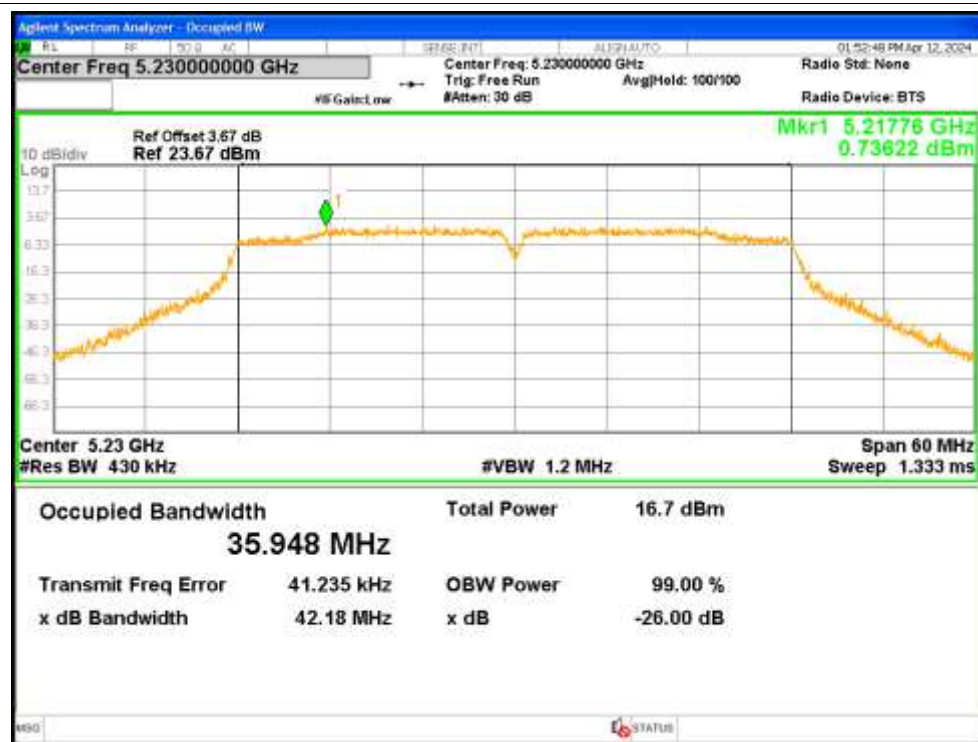

5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-1.236	0.27	-0.966	<=11	Pass
NVNT	a	5200	Ant1	-1.039	0.27	-0.769	<=11	Pass
NVNT	a	5240	Ant1	-0.141	0.26	0.119	<=11	Pass
NVNT	a	5180	Ant2	0.176	0.26	0.436	<=11	Pass
NVNT	a	5200	Ant2	0.061	0.27	0.331	<=11	Pass
NVNT	a	5240	Ant2	0.272	0.26	0.532	<=11	Pass
NVNT	ac20	5180	Ant1	-0.934	0.29	-0.644	<=11	Pass
NVNT	ac20	5180	Ant2	-0.362	0.29	-0.072	<=11	Pass
NVNT	ac20	5180	Sum	2.372	0.29	2.662	<=8.81	Pass
NVNT	ac20	5200	Ant1	-1.211	0.29	-0.921	<=11	Pass
NVNT	ac20	5200	Ant2	-0.042	0.29	0.248	<=11	Pass
NVNT	ac20	5200	Sum	2.423	0.29	2.713	<=8.81	Pass
NVNT	ac20	5240	Ant1	0.018	0.29	0.308	<=11	Pass
NVNT	ac20	5240	Ant2	0.051	0.29	0.341	<=11	Pass
NVNT	ac20	5240	Sum	3.045	0.29	3.335	<=8.81	Pass
NVNT	ac40	5190	Ant1	-5.124	0.53	-4.594	<=11	Pass
NVNT	ac40	5190	Ant2	-3.054	0.53	-2.524	<=11	Pass
NVNT	ac40	5190	Sum	-0.957	0.53	-0.427	<=8.81	Pass
NVNT	ac40	5230	Ant1	-4.678	0.53	-4.148	<=11	Pass
NVNT	ac40	5230	Ant2	-2.838	0.53	-2.308	<=11	Pass
NVNT	ac40	5230	Sum	-0.651	0.53	-0.121	<=8.81	Pass
NVNT	ac80	5210	Ant1	-7.004	0.58	-6.424	<=11	Pass
NVNT	ac80	5210	Ant2	-6.438	0.58	-5.858	<=11	Pass
NVNT	ac80	5210	Sum	-3.701	0.58	-3.121	<=8.81	Pass
NVNT	ax20	5180	Ant1	-2.056	1.04	-1.016	<=11	Pass
NVNT	ax20	5180	Ant2	-0.582	1.04	0.458	<=11	Pass
NVNT	ax20	5180	Sum	1.754	1.04	2.794	<=8.81	Pass
NVNT	ax20	5200	Ant1	-2.12	1.04	-1.08	<=11	Pass
NVNT	ax20	5200	Ant2	-0.642	1.04	0.398	<=11	Pass
NVNT	ax20	5200	Sum	1.692	1.04	2.732	<=8.81	Pass
NVNT	ax20	5240	Ant1	-1.01	1.03	0.02	<=11	Pass
NVNT	ax20	5240	Ant2	-0.503	1.03	0.527	<=11	Pass
NVNT	ax20	5240	Sum	2.261	1.03	3.291	<=8.81	Pass
NVNT	ax40	5190	Ant1	-5.026	1.09	-3.936	<=11	Pass
NVNT	ax40	5190	Ant2	-3.887	1.09	-2.797	<=11	Pass
NVNT	ax40	5190	Sum	-1.409	1.09	-0.319	<=8.81	Pass
NVNT	ax40	5230	Ant1	-4.384	1.05	-3.334	<=11	Pass
NVNT	ax40	5230	Ant2	-3.897	1.05	-2.847	<=11	Pass
NVNT	ax40	5230	Sum	-1.123	1.05	-0.073	<=8.81	Pass

NVNT	ax80	5210	Ant1	-7.993	1.1	-6.893	<=11	Pass
NVNT	ax80	5210	Ant2	-7.567	1.1	-6.467	<=11	Pass
NVNT	ax80	5210	Sum	-4.764	1.1	-3.664	<=8.81	Pass
NVNT	n20	5180	Ant1	-1.45	0.62	-0.83	<=11	Pass
NVNT	n20	5180	Ant2	-0.429	0.62	0.191	<=11	Pass
NVNT	n20	5180	Sum	2.101	0.62	2.721	<=8.81	Pass
NVNT	n20	5200	Ant1	-1.301	0.61	-0.691	<=11	Pass
NVNT	n20	5200	Ant2	-0.318	0.61	0.292	<=11	Pass
NVNT	n20	5200	Sum	2.229	0.61	2.839	<=8.81	Pass
NVNT	n20	5240	Ant1	-0.476	0.61	0.134	<=11	Pass
NVNT	n20	5240	Ant2	0.048	0.61	0.658	<=11	Pass
NVNT	n20	5240	Sum	2.804	0.61	3.414	<=8.81	Pass
NVNT	n40	5190	Ant1	-5.566	0.94	-4.626	<=11	Pass
NVNT	n40	5190	Ant2	-3.429	0.94	-2.489	<=11	Pass
NVNT	n40	5190	Sum	-1.357	0.94	-0.417	<=8.81	Pass
NVNT	n40	5230	Ant1	-4.396	0.94	-3.456	<=11	Pass
NVNT	n40	5230	Ant2	-2.864	0.94	-1.924	<=11	Pass
NVNT	n40	5230	Sum	-0.552	0.94	0.388	<=8.81	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1



PSD NVNT a 5200MHz Ant1



PSD NVNT a 5240MHz Ant1



PSD NVNT a 5180MHz Ant2



PSD NVNT a 5200MHz Ant2



PSD NVNT a 5240MHz Ant2



PSD NVNT ac20 5180MHz Ant1



PSD NVNT ac20 5180MHz Ant2



PSD NVNT ac20 5200MHz Ant1



PSD NVNT ac20 5200MHz Ant2



PSD NVNT ac20 5240MHz Ant1



PSD NVNT ac20 5240MHz Ant2



PSD NVNT ac40 5190MHz Ant1



PSD NVNT ac40 5190MHz Ant2




PSD NVNT ac40 5230MHz Ant1



PSD NVNT ac40 5230MHz Ant2



PSD NVNT ac80 5210MHz Ant1

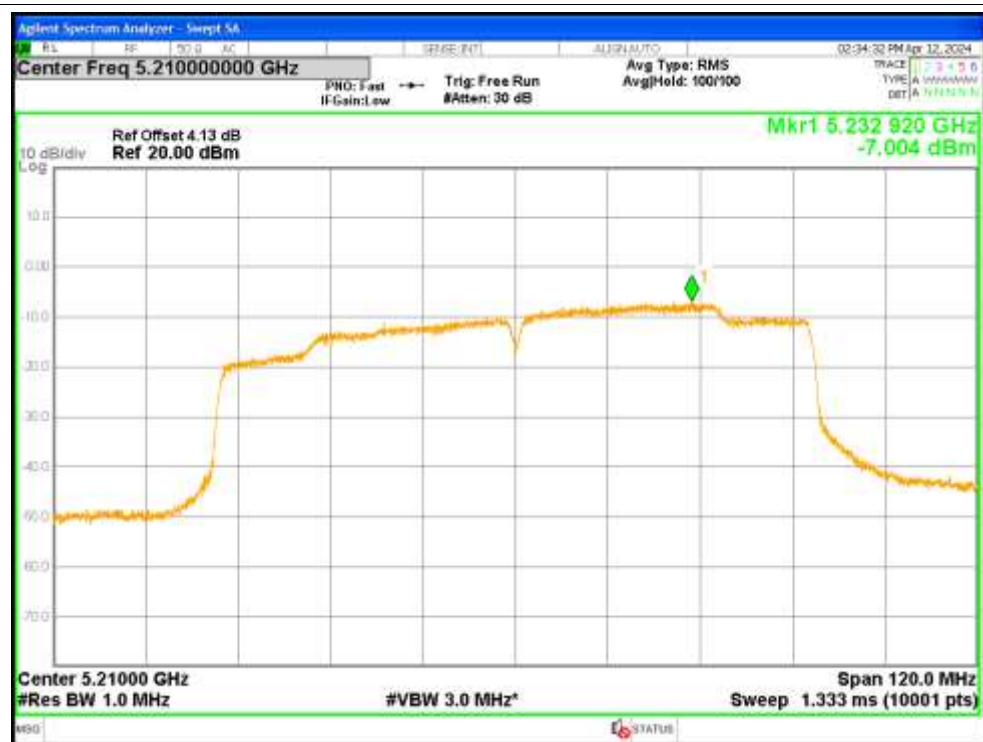

PSD NVNT ac80 5210MHz Ant2



PSD NVNT ax20 5180MHz Ant1



PSD NVNT ax20 5180MHz Ant2



PSD NVNT ax20 5200MHz Ant1



PSD NVNT ax20 5200MHz Ant2



PSD NVNT ax20 5240MHz Ant1



PSD NVNT ax20 5240MHz Ant2



PSD NVNT ax40 5190MHz Ant1



PSD NVNT ax40 5190MHz Ant2



PSD NVNT ax40 5230MHz Ant1



PSD NVNT ax40 5230MHz Ant2



PSD NVNT ax80 5210MHz Ant1



PSD NVNT ax80 5210MHz Ant2



PSD NVNT n20 5180MHz Ant1



PSD NVNT n20 5180MHz Ant2



PSD NVNT n20 5200MHz Ant1



PSD NVNT n20 5200MHz Ant2



PSD NVNT n20 5240MHz Ant1



PSD NVNT n20 5240MHz Ant2



PSD NVNT n40 5190MHz Ant1



PSD NVNT n40 5190MHz Ant2



PSD NVNT n40 5230MHz Ant1



PSD NVNT n40 5230MHz Ant2

