



BreezeMAX™ 3500

All the technology and experience of Alvarion.
All the promise of WiMAX.

Alvarion proudly introduces BreezeMAX, the industry's leading WiMAX-ready platform. Featuring advanced OFDM technology to support non-line-of-sight (NLOS) operation, adaptive modulation up to QAM64, and the highest spectral efficiency available, BreezeMAX allows operators to begin building their WiMAX networks today. Operating in the 3.5 GHz licensed frequency band, BreezeMAX 3500 addresses the immediate customer demand for cost-effective next generation BWA systems with a platform designed around the coming implementation of the IEEE 802.16 and HiperMAN standards by the WiMAX Forum™.

BreezeMAX is the ideal solution for operators offering high-bandwidth, IP-based voice and data services who wish to evolve their networks to industry standard solutions with all the benefits of vendor interoperability and improved CPE economics. The system's rich feature set and cost-effective and versatile CPEs make BreezeMAX the ultimate BWA solution for providers wanting to significantly boost their revenue potential.





BreezeMAX: Taking WiMAX to the MAX

Since its founding over 10 years ago, Alvarion has been actively involved in helping to create and proliferate new industry standards for broadband wireless applications. The Company's continual involvement with IEEE, ETSI, and the WiMAX Forum for the standardization of BWA systems is a direct extension of that work. BreezeMAX represents the sum total of the Company's advanced technology capabilities and long-term field experience. BreezeMAX is a future-proof solution that offers operators reliability, flexibility, and compelling economics while migrating their networks to a standard WiMAX architecture.

Powered by Intel's PRO / Wireless 5116 broadband interface chip, BreezeMAX is able to meet the requirements of a myriad of service environments, from sparsely populated rural areas to high-density urban areas. BreezeMAX delivers broadband access services to a wide range of customers, including residential, SOHO, SME, large enterprise and multi-tenant customers.

BreezeMAX 3500 System Components

Base Station Equipment

BreezeMAX 3500 base stations are available either as high density chassis configuration or a micro base station:

High Density Base Station

The high density base station is a carrier class 8U high cPCI shelf that fits into standard 19" or 22" (ETSI) racks. The chassis contains a network processor unit, multiple access unit modules (up to 6 in a single chassis), power supply and power feeding modules. All the modules are hot swappable, and high availability can be provided through multiple redundancy schemes.



Network Processing Unit (NPU)

The NPU is the heart of the base station and serves as the central processing unit managing the base station components and all subscriber units it connects. Its main functions are:

- Traffic aggregation of all access units to/from the backbone via 100/1000 BaseT network interface.
- Traffic classification and connection establishment initiation.
- Policy based data switching.
- Service Level Agreements management.
- Base station overall management, operation control and alarms management.



The BreezeMAX 3500 base station can host two NPU modules for redundancy support (1+1 redundancy scheme).

Indoor/Outdoor Access Units

The BreezeMAX 3500 access unit is comprised of an indoor unit (IDU) and an outdoor unit (ODU). The access unit IDU module contains the wireless IEEE 802.16/HiperMAN Mac and modem and is responsible for the wireless network connection establishment and for bandwidth management. Each access unit IDU includes two 3.5/1.75 MHz PHY channels for support of RF diversity combining functionality and radio link redundancy.



The access unit ODU is a high power, multi-carrier radio unit that connects to an external antenna. The base station operates in full duplex, dramatically increasing system efficiency. It is designed to provide high system gain and interference robustness utilizing high transmit power and low noise figure. It has multi channel functionality and supports up to 14 MHz of bandwidth, thus enabling scalable and cost-effective capacity growth by connecting additional IDU modules to an existing ODU device via an IF multiplexer.



Micro Base Station

The micro base station provides cost-effective broadband services in low-density rural areas. It is comprised of a stand-alone module that connects to the same outdoor radio unit described above. The indoor unit is 1U high, fits into standard 19" or 22" (ETSI) rack, has a 10/100 BaseT network interface to the backbone and is powered from the Mains with either AC or DC power.



Base Station Equipment Components

Product Type	Product Name	Product Description
High Density Base Station Equipment	BMAX-BST-SH	BreezeMAX 3500 base station shelf
	BMAX-BST-NPU	BreezeMAX 3500 base station network processor unit
	BMAX-BST-AU-IDU-2CH	BreezeMAX 3500 base station access unit interface module
	BMAX-BST-PSU	BreezeMAX 3500 base station power supply unit
Micro Base Station Equipment	BMAX-BST-PIU	BreezeMAX 3500 base station power interface unit
	BMAX-MBST-IDU-2CH-AC	BreezeMAX 3500 micro base station indoor unit, AC power
Base Station Radio Equipment	BMAX-MBST-IDU-2CH-DC	BreezeMAX 3500 micro base station indoor unit, DC power
	BMAX-BST-AU-ODU-3.5a	BreezeMAX 3500 base station outdoor radio unit, frequency band 3.5a
	BMAX-BST-AU-ODU-3.5b	BreezeMAX 3500 base station outdoor radio unit, frequency band 3.5b



BreezeMAX 3500 CPEs - MAXimizing service to customers with compelling economics

The BreezeMAX platform provides several CPE types in order to provide operators the ultimate flexibility to serve a variety of business and residential customers cost effectively. BreezeMAX PRO CPEs are WiMAX-ready and are powered by Intel's PRO/Wireless 5116 broadband interface.

The BreezeMAX system is able to operate in various environments, from low populated rural areas to high density urban areas and provides subscribers with fast access at net data rates of up to 10Mbps over a 3.5MHz channel.

BreezeMAX PRO CPEs support the following key applications: Broadband Data + Voice, Advanced Home Networking and Hotspot Backhauling.





The BreezeMAX PRO CPE is comprised of an indoor unit (IDU) and an outdoor unit (ODU).

The BreezeMAX PRO CPE ODU contains the modem, radio, data processing and management components. It also contains an integral high-gain flat antenna with either vertical or horizontal polarization. An ODU with a connector to an external antenna is also available.



The BreezeMAX PRO CPE IDU is available in multiple network configurations that optimally serve a wide variety of market segments and applications. Each version of IDU connects directly to the ODU via a category 5 Ethernet cable that carries the data traffic, power and control signals between the IDU and ODU.

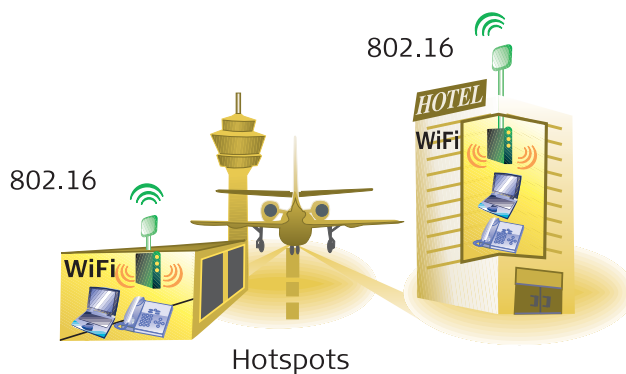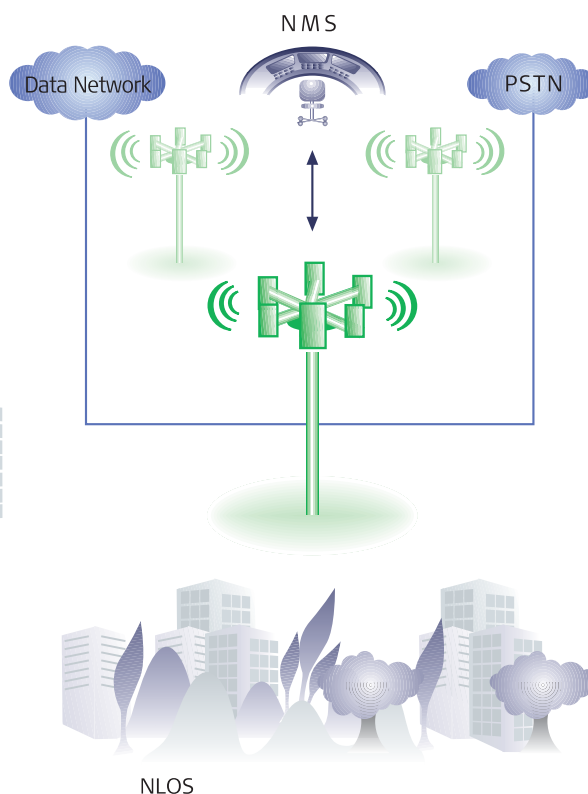



BreezeMAX 3500 PRO CPE IDU types: Broadband Data CPE


The BreezeMAX broadband data CPE acts as a bridge between the wireless and wireline media, supporting up to 512 MAC Addresses. It connects the subscriber's data equipment via a standard IEEE 802.3 Ethernet 10/100 BaseT (RJ 45) interface.



Broadband Voice Gateway CPE

The broadband voice gateway CPE provides integrated voice and data services for residential and SOHO users and is available in two models:

- One 10/100 BaseT data port and one RJ-11 voice POTS port.
- One 10/100 BaseT data port and two RJ-11 voice POTS port.



Featuring advanced voice and data functions such as VLAN tagging, traffic prioritization by IP DiffServ, H.323 and SIP protocols support, Class 5 voice services (3-Party conference, call waiting, call hold), integrated management and more, the broadband voice gateway CPE presents an ideal single box solution for operators seeking to serve combined broadband voice and data services.



NLOS



Residential WDSL
& Home Networking

Networking Gateway CPE

The BreezeMAX networking gateway CPE is the optimal networking solution for both home and small business users. It features an advanced integrated broadband router with comprehensive IP-sharing and security capabilities.



The networking gateway CPE has four 10/100 BaseT ports and 802.11g wireless access point.

The powerful networking solution not only enables comprehensive high-speed connection sharing for multiple users, but also brings the freedom of high-speed, wireless broadband connectivity to home and SOHO networks with integrated 802.11b/g Wireless LAN functionality. With features such as static & dynamic routing, NAT functionality, built-in firewall and an indoor coverage range of 35-100m, the networking gateway presents operators with a compelling high quality home networking solution.

Customer Premises Equipment Components

Product Type	Product Name	Product Description
CPE Indoor Equipment	BMAX-CPE-IDU-1D	BreezeMAX 3500 broadband data CPE indoor module with one 10/100 BaseT data port
	BMAX-CPE-IDU-VG-1D1V	BreezeMAX 3500 broadband voice gateway CPE indoor module with one 10/100 BaseT data port + one RJ11 POTS Port
	BMAX-CPE-IDU-VG-1D2V	BreezeMAX 3500 broadband voice gateway CPE indoor module with one 10/100 BaseT data ports + two RJ11 POTS Port
	BMAX-CPE-IDU-NG-4D1WLAN	BreezeMAX 3500 networking gateway CPE indoor module with four 10/100 BaseT data ports + one 802.11b/g wireless interface
CPE Outdoor Equipment	BMAX-CPE-ODU-PRO-AV-3.5	BreezeMAX 3500 subscriber outdoor radio unit with integrated vertical antenna, frequency band 3.5a+b
	BMAX-CPE-ODU-PRO-AH-3.5	BreezeMAX 3500 subscriber outdoor radio unit with integrated horizontal antenna, frequency band 3.5a+b
	BMAX-CPE-ODU-PRO-E-3.5	BreezeMAX 3500 subscriber outdoor radio unit with connector for external antenna, frequency band 3.5a+b



Product Highlights & Advantages

BreezeMAX delivers a comprehensive range of features, all of which make it the solution of choice for operators seeking to start building their WiMAX networks today. The system provides the following product features and benefits:

- **WiMAX architecture** - Based on the WiMAX Forum's standard implementation of the IEEE 802.16 and ETSI HiperMAN industry specifications for wireless access in Metropolitan Area Networks
- **Addressing multiple markets** - Suitable for serving residential, business, MDU/MTU, hotspot, backhubs, and wireless home networking applications
- **Low cost ownership** - Supports simple installation and demand-based "pay-as-you-grow" build-outs of all Alvarion systems, BreezeMAX enables operators to penetrate new market segments rapidly and to build out their networks while minimizing CAPEX
- **Carrier class** - Meets the most demanding requirements of large service providers with high throughput and availability, component redundancy, and flexible Network Management System (NMS)
- **Scalable base station configurations** - High density base station suitable for large-scale deployments in both dense urban and suburban areas. The micro base station, is an ideal, cost-effective solution for providers seeking to penetrate rural and low-density areas
- **High capacity and throughput** - Base station full duplex and multi-channel functionality enables a single base station to support very large numbers of subscribers. Highly efficient and robust 802.16 air protocol provides high broadband rates up to 10 Mbps of net throughput per subscriber
- **NLOS coverage** - Advanced Orthogonal Frequency Division Multiplexing (OFDM) modulation enhances performance in non-line-of-sight (NLOS) conditions to ensure immunity to interference and multi-path conflicts typical of deployments in densely populated urban areas
- **End-to-end QoS** - Advanced QoS capabilities in the 802.16 MAC, 802.1P and DSCP classification and prioritization functions ensure true end-to-end QoS and support high quality data, voice and video services
- **Adaptive modulation technology** - maximizes the bandwidth throughput of the system over large distances by automatically adjusting modulation to respond to various signal qualities
- **AlvariSTAR management system** - Carrier class NMS platform that supports full FCAPS functionality, remote software upgrade to multiple devices and integration via standard interfaces to higher level network management systems

International Corporate Headquarters

Tel: +972 3 6456262
Email: corporate-sales@alvarion.com

North America Headquarters

Tel: +1 650 314 2500
Email: n.america-sales@alvarion.com

Latin America & Caribbean

Tel: +1 954 746 7420
Email: lasales@alvarion.com

Brazil

Tel: +55 41 3024 6665
Email: brazil-sales@alvarion.com

China

Tel: +86 10 8857 6770
Email: china-sales@alvarion.com

Czech Republic

Tel: +420 222 191 233
Email: czech-sales@alvarion.com

France

Tel 1: +33 1 49 38 91 91
Tel 2: +33 1 34 38 54 30
Email: france-sales@alvarion.com

Germany

Tel: +49 89 90405 923
Email: germany-sales@alvarion.com

Ireland

Tel: +353 66 712 8004
Email: uk-sales@alvarion.com

Japan

Tel: +81 3 3761 7206
Email: japan-sales@alvarion.com

Mexico

Tel: +52 55 5340 1421
Email: mexico-sales@alvarion.com

Philippines

Tel: +632 754 8028
Email: far.east-sales@alvarion.com

Poland

Tel: +48 22 863 28 78 / 80
Email: poland-sales@alvarion.com

Romania

Tel: +40 21 266 47 31
Email: romania-sales@alvarion.com

Russia

Tel: +7 095 783 82 31
Email: info@alvarion.ru

Singapore

Tel: +65 9631 4700
Email: far.east-sales@alvarion.com

South Africa

Tel: +27 12 6728836
Email: africa-sales@alvarion.com

U.K.

Tel: +44 845 450 1414
Email: uk-sales@alvarion.com

Uruguay

Tel: +598 2 606 2651
Email: lasales@alvarion.com

Specifications

Radio & Modem

Parameter		Value
Frequency	Base Station	Band a: UL: 3399.5-3453.5MHz; DL: 3499.5-3553.5MHz Band b: UL: 3450.0-3500.0MHz. DL: 3550.0-3600.0MHz
	CPE	UL:3399.5-3500.0MHz DL: 3499.5-3600.0MHz
Radio Access Method		TDMA FDD
Modulation		OFDM 256 FFT with adaptive sub-carrier modulation: BPSK, QPSK, QAM 16, QAM 64.
Channel bandwidth		3.5MHz; 1.75MHz - software selectable
Base Station Multi Carrier bandwidth (via IF Mux)		14MHz
Duplexing Scheme		AU full duplex SU half duplex
Central frequency resolution		125KHz
Antenna (CPE)		18dBi, 20°, Vertical & Horizontal polarization, compliant with ETSI EN 302 085 V1.1.2 TS3.
Maximum Output power (At antenna port)		AU: 28dBm (+/-1dB) SU: 20dBm (+/-1dB)
Sensitivity Typical values		-82/85 dBm for highest modulation (QAM 64) @ 3.5/1.75 MHz -100/103 dBm for lowest modulation (BPSK) @ 3.5/1.75 MHz

Data Communications

Data	IEEE 802.3 CSMA/CD
Air Interface	IEEE 802.16a
VLAN support	IEEE 802.1Q
Traffic Classification	Layer 2 IEEE 802.1p, IP DiffServ Code Points DSCP

Networking Gateway CPE

General Features	
WAN Connection Types	Static IP, Dynamic IP (DHCP), PPPoE and PPTP client
Routing	Static Route, Dynamic Route (RIP1/2)
Firewall	NAT Firewall with SPI mode
NAT Functionality	NAT, Virtual Server, Special Application, DMZ Host
VPN	IPSec, PPTP & LT2P Pass-Through
DHCP	DHCP server for LAN and WLAN clients, DHCP client for WAN
Wireless Features (supported only with wireless networking gateway)	
Standard	IEEE 802.11b / 802.11g
Range Coverage	Indoors - approx. 35-100 meters
Security	WEP encryption - 64 Bit, 128 Bit

Voice Gateway CPE

Interfaces	
Ethernet LAN	1 10/100 Base-TX RJ45 port
Telephony	1 or 2 RJ11 connectors for analog telephones
Security	
PipeLock™	Button for disconnection of the secure Ethernet LAN port
Packet Filter	Separates data, management and telephone traffic
VLAN	802.1Q+P
Authentication Per Registration	H225.0.0 RAS
Telephony and fax services	
VoIP Protocol	H.323, SIP
Internal Class 5 services	Call Waiting, 3-party call, call alteration, differentiated ringing tones
External Class 5 services	Activation of class 5 services supported by the IP-telephony system
G3 Fax	T.38
Calling number identification	FSK, DTMF
DTMF	In-band and out-band using H245 and H225 bi-directional
Speech Codecs	G711, G729ab
DiffServ	Level 3 (IP) mechanism for handling QoS

Electrical

	Subscriber Unit	Base Station
Power Source	100-240 VAC, 50-60 Hz	-36 to -72 VDC
Power Consumption (max)	CPE ODU only: 30W	BST PS: 200W each, up to 4 PS
	CPE PRO ODU only: 16.5W	AU IDU 2 channels: 38 W
	CPE IDU+ODU data: 40W	AU ODU: 38 W
	CPE PRO IDU+ODU data: 22W	NPU: 70 W, PIU: 35 W, AVU: 24 W

Environmental

	Indoor Unit	Outdoor Unit
Operating Temperature	0°C to 40°C	-40°C to 55°C
Operating Humidity	5%-95% non condensing	5%-95% non condensing, weather protected

Standard Compliance

Type	Standard
EMC	ETSI EN 301 489-1
Safety	EN 60950 (CE), CB, IEC 60 950 US/C (TUV)
Environmental	ETS 300 019 part 2-1 T 1.2 & part 2-2 T 2.3 for indoor & outdoor part 2-3 T 3.2 for indoor part 2-4 T 4.1E for outdoor
Radio	ETSI EN 301 021 V.1.4.1, ETSI EN 301 753 V.1.1.1

