



# Control4 CORE-5 Controller Installation Guide



## Supported model

- C4-CORE5 Control4 CORE-5 Hub & Controller

## Box contents

The following items are included in the box:

- AC power cord
- IR emitters (6)
- Rock ears (2, pre-installed on the CORE-5)
- Rubber feet (2, in box)
- External antennas (2)
- Terminal blocks for contacts and relays

## Accessories sold separately

- Control4 3-Meter Wireless Antenna Kit (C4-AK-3M)
- Control4 Dual-Band WiFi USB Adapter (C4-USBWIFI OR C4-USBWIFI-1)
- Control4 3.5 mm to DB9 Serial Cable (C4-CBL3.5-DB9B)

## Warnings

- Caution!** To reduce the risk of electrical shock, do not expose this apparatus to rain or moisture.
- Avertissement!** Pour réduire le risque de choc électrique, n'exposez pas cet appareil à la pluie ou à l'humidité.
- Caution!** In an over-current condition on USB or contact output the software disables the output. If the attached USB device or contact sensor does not appear to power on, remove the device from the controller.
- Avertissement!** Dans une condition de surintensité sur USB ou sortie de contact le logiciel désactive sortie. Si le périphérique USB ou le capteur de contact connecté ne semble pas s'allumer, retirez le périphérique du contrôleur.
- Caution!** If this product is used as a means to open and close a garage door, gate, or similar device, use safety or other sensors to ensure safe function. Follow appropriate regulatory and safety standards governing project design and installation. Failure to do so may result in property damage or personal injury.

## Requirements and specifications

- Note:** We recommend using Ethernet instead of WiFi for the best network connectivity.
- Note:** The Ethernet or WiFi network should be installed before you install the CORE-5 controller.
- Note:** The CORE-5 requires OS 3.3 or higher.
- Note:** Composer Pro is required to configure this device. See the *Composer Pro User Guide* ([ctrl4.co/cpro-ug](http://ctrl4.co/cpro-ug)) for details.

## Specifications

	Inputs / Outputs
<b>Video out</b>	1 video out—1 HDMI
<b>Video</b>	HDMI 2.0a; 3840x2160 @ 60Hz (4K); HDCP 2.2 and HDCP 1.4
<b>Audio out</b>	7 audio out—1 HDMI, 3 stereo analog, 3 digital coax
<b>Audio playback formats</b>	AAC, AIFC, ALAC, FLAC, M4A, MP2, MP3, M9A/M4A, Ogg Vorbis, PCM, WAV, WMA
<b>High-res audio playback</b>	Up to 192 kHz / 24 bit
<b>Audio in</b>	2 audio in—1 stereo analog, 1 digital coax
<b>Audio delay on audio in</b>	Up to 3.5 seconds, depending on network conditions
<b>Digital signal processing</b>	Digital Coax (a—line level) Audio out 1/2/3 (analog)—Balance, volume, loudness, 6-band PEO, mono/stereo, test signal, mute Digital coax out 1/2/3—Volume, mute
<b>Signal-to-noise ratio</b>	>118 dBFS
<b>Total harmonic distortion</b>	0.00023 (<10 dB)
<b>Ethernet</b>	Network 1.0/10/100/1000BaseT compatible port (required for controller setup).
<b>WiFi</b>	Optional Dual-Band WiFi USB Adapter (2.4 GHz, 5 GHz, 802.11ac/a/g/n/s)
<b>WiFi security</b>	WPA, WPA2
<b>ZigBee Pro</b>	802.15.4
<b>ZigBee antenna</b>	External reverse SMA connector
<b>Z-Wave</b>	Z-Wave 700 series
<b>Z-Wave antenna</b>	External reverse SMA connector
<b>USB port</b>	2 USB 3.0 port—500mA Control
<b>IR OUT</b>	8 IR out—57/27mA max output
<b>IR capture</b>	1 IR receiver—front; 20–60 KHz
<b>SERIAL OUT</b>	4 Serial out—2 DB9 ports and 2 shared with IR out 1–2 12VDC 125mA maximum output
<b>Relay</b>	4 relay—AC: 36V, 2A maximum voltage across relay; DC: 24V, 2A maximum voltage across relay
<b>Power requirements</b>	100–240 VAC, 60/50Hz
<b>Power consumption</b>	Max: 40W, 136 BTU/hr/hour Idle: 15W, 51 BTU/hr/hour
<b>Operating temperature</b>	32°F to 104°F (0°C to 40°C)
<b>Storage temperature</b>	4°F to 158°F (-20°C to 70°C)
<b>Dimensions (H x W x D)</b>	1.65 x 17.4 x 9.92" (42 x 442 x 252 mm)
<b>Weight</b>	5.9 lbs (2.68 kg)
<b>Shipping weight</b>	9 lbs (4.08 kg)

## Additional resources

- The following resources are available for more support:
- Control4 CORE series help and information: [ctrl4.co/core](http://ctrl4.co/core)
- Snap One Tech Community and Knowledgebase: [tech.control4.com](http://tech.control4.com)
- Control4 Technical Support
- Control4 website: [www.control4.com](http://www.control4.com)


## Front view



- A Activity LED**—The LED indicates that the controller is streaming audio.
- B IR window**—IR receiver for learning IR codes.
- C Caution LED**—This LED shows solid red, then blinks blue during the boot process.

- Note:** The Caution LED flashes orange during the factory restore process. See "Reset to factory settings" in this document.
- Link LED**—The LED indicates that the controller has been identified in a Control4 Composer project and is communicating with Director.
- Power LED**—The blue LED indicates that AC power is connected. The controller turns on immediately after power is applied to it.

## Back view



- A Power plug port**—AC power receptacle for an IEC 60320-C13 power cord.
- B Contact/Relay port**—Connect up to four relay devices and four contact sensor devices to the terminal block connector. Relay connections are COM, NC (normally closed), and NO (normally open). Contact sensor connections are +12, SIG (signal), and GND (ground).
- C USB**—Two port for an external USB drive or the optional Dual-Band WiFi USB Adapter. See "Set up external storage devices" in this document.
- E HDMI OUT**—An HDMI port to display system menus. Also an audio out over HDMI.
- F ID and FACTORY RESET**—ID button to identify the device in Composer Pro. The ID button on the CORE-5 is also an LED that displays feedback useful during a factory restore.
- G Z-WAVE**—Antenna connector for the Z-Wave radio
- H SERIAL**—Two serial ports for RS-232 control. See "Connecting the serial ports" in this document.
- I IR / SERIAL**—Eight 3.5 mm jacks for up to eight IR emitters or for a combination of IR emitters and serial devices. Ports 1 and 2 can be configured independently for serial control or for IR control. See "Setting up remitters" in this document for more information.
- J DIGITAL AUDIO**—One digital coax audio input and three output ports. Allows a digital audio source (like a network or other Control4 device) or other digital audio (OUT 1/2/3) shared from other Control4 devices or from digital audio sources (local media or digital streaming services such as TuneIn).
- K ANALOG AUDIO**—One stereo audio input and three output ports. Audio to be shared (IN 1) over the local network to other Control4 devices. Outputs audio (OUT 1/2/3) shared from other Control4 devices or from digital audio sources (local media or digital streaming services such as TuneIn).
- L ZIGBEE**—Antenna for the ZigBee radio.

## Installing the controller

### To install the controller:

- Ensure that the home network is in place before starting system setup. The controller requires a network connection, Ethernet (recommended) or WiFi (with optional adapter), to use all of the features as designed. When connected, the controller can access web-based media databases, communicate with other IP devices in the home, and access Control4 system updates.
- Mount the controller in a rack or stacked on a shelf. Always allow plenty of ventilation. See "Mounting the controller in a rack" in this document.

- Connect the controller to the network.

- Ethernet**—To connect using an Ethernet connection, plug the data cable from the home network connection into the controller's RJ-45 port (labeled **ETHERNET**) and the network port on the wall or at the network switch.
- WiFi**—To connect using WiFi, first connect the controller to Ethernet, and then use Composer Pro System Manager to reconfigure the controller for WiFi.

- Connect system devices. Attach IR and serial devices as described in "Connecting the IR ports/serial ports" and "Setting up IR emitters."
- Set up any external storage devices as described in "Setting up external storage devices" in this document.

- Power up the controller. Plug the power cord into the controller's power plug port and then into an electrical outlet.

## Mounting the controller in a rack

Using the pre-installed rack-mount ears, the CORE-5 can easily be mounted in a rack for convenient installation and flexible rack placement. The pre-installed rack-mount ears can even be reversed to mount the controller facing the rear of the rack, if needed.

### To attach the rubber feet to the controller:


- Remove the two screws in each of the rack ears on the bottom of the controller. Remove the rack ears from the controller.
- Remove the two additional screws from the controller case and place the rubber feet on the controller.
- Secure the rubber feet to the controller with three screws in each rubber foot.

## Pluggable terminal block connectors

For the contact and relay ports, the CORE-5 makes use of pluggable terminal block connectors which are removable plastic parts that locks in individual wires (included).


### To connect a device to the pluggable terminal block:

- Insert one of the wires required for your device into the appropriate opening in the pluggable terminal block you reserved for that device.
- Use a small flat-blade screwdriver to tighten the screw and secure the wire in the terminal block.



**Example:** To add a motion sensor (see Figure 3), connect its wires to the following contact openings:

- Power input to +12V
- Output signal to SIG
- Ground connector to GND




**Note:** To connect dry contact closure devices, such as doorbells, connect the switch between +12 (power) and SIG (signal).


### Connecting the contact ports

The CORE-5 provides four contact ports on the included pluggable terminal blocks. See the examples below to learn how to connect devices to the contact ports.


*Wire the contact to a sensor that also needs power (Motion sensor)*



*Wire the contact to a dry contact sensor (Door contact sensor)*




*Wire the contact to an externally powered sensor (Driveway sensor)*




### Connecting the relay ports

The CORE-5 provides four relay ports on the included pluggable terminal blocks. See the examples below to learn how to connect various devices to the relay ports.


*Wire the relay to a single-relay device, normally open (Fireplaces)*



*Wire the relay to a dual-relay device (Blinds)*



*Wire the relay with power from the contact, normally closed (Amplifier trigger)*



### Connecting the serial ports

The CORE-5 controller provides four serial ports, SERIAL 1 and SERIAL 2 can connect to a standard DB9 serial cable, IR ports 1 and 2 (serial 3 and 4) can be reconfigured independently for serial communication. If not used for serial, they can be used for IR. Connect a serial device to the controller using the Control4 3.5 mm-to-DB9 Serial Cable (C4-CBL3.5-DB9B, sold separately).

- The serial ports support many different baud rates (acceptable range: 1200 to 115200 baud for odd and even parity). Serial ports 3 and 4 (IR 1 and 2) do not support hardware flow control.
- See Knowledgebase article #268 (<http://ctl4.co/control-serial-pinout>) for pinout diagrams.
- To configure a port's serial settings, make the appropriate connections in your project using Composer Pro. Connecting the port to the driver will apply the serial settings contained in the driver file to the serial port. See the *Composer Pro User Guide* for details.

**Note:** Serial ports 3 and 4 can be configured as straight-through or null with Composer Pro. Serial ports by default are configured straight-through and can be changed in Composer by selecting the option *Enable Null/Modem Serial Port* (3/4).

### Setting up IR emitters

The CORE-5 controller provides 8 IR ports. Your system may contain third-party products that are controlled through IR commands. The included IR emitters can send commands from the controller to any IR-controlled device.

- Connect one of the included IR emitters into an IR OUT port on the controller.
- Remove the adhesive backing from the emitter (round) end of the IR emitter and affix it to the device to be controlled over the IR receiver on the device.

### Setting up external storage devices

You can store and access media from an external storage device, for example, a USB drive, by connecting the USB drive to the USB port and configuring or scanning the media in Composer Pro. A NAS drive can also be used as an external storage device, see the *Composer Pro User Guide* (<http://ctl4.co/ctl4-pro-ug>) for more details.

**Note:** We support only externally powered USB drives or solid-state USB drives (USB thumb drives). USB hard drives that do not have a separate power supply are not supported.

**Note:** When using USB or eSATA storage devices on an CORE-5 controller, a single primary partition formatted FAT32 is recommended.

### Composer Pro driver information

Use Auto Discovery and SDDP to add the driver to the Composer project. See the *Composer Pro User Guide* (<http://ctl4.co/ctl4-pro-ug>) for details.

### Troubleshooting

#### Reset to factory settings

**Caution:** The factory restore process will remove the Composer project.

To restore the controller to the factory default image:

- Insert one end of a paper clip into the small hole on the back of the controller labeled **RESET**.
- Press and hold the **RESET** button. The controller resets and the ID button changes to solid red.

- Hold the button until the ID flashes double orange. This should take five to seven seconds. The ID button flashes orange while the factory restore is running. When complete, the ID button turns off and the device power cycles one more time to complete the factory restore process.

**Note:** During the reset process, the ID button provides the same feedback as the Caution LED on the front of the controller.

### Power cycle the controller

- Press and hold the ID button for five seconds. The controller turns off and back on.

### Reset the network settings

To reset the controller network settings to the default:

- Disconnect power to the controller.
- While pressing and holding the ID button on the back of the controller, power on the controller.

- Hold the ID button until ID button turns solid orange and the Link and Power LEDs are solid blue, and then immediately release the button.

**Note:** During the reset process, the ID button provides the same feedback as the Caution LED on the front of the controller.

### LED status information


Activity	Caution	Link	Power
Just powered on	Bootloader loaded	Kernel loaded	Network reset check
Factory restore underway	Factory restore fail	Connected to Director	Playing audio

### Legal, Warranty, and Regulatory/Safety information

Visit [arapace.com/legal](http://arapace.com/legal) for details.

### More help

For the latest version of this document and to view additional materials, open the URL below or scan the QR code on a device that can view PDFs.

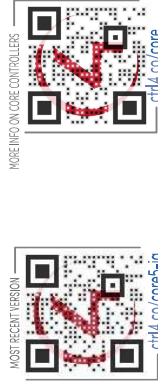

control4.com | 888.400.4070

Copyright 2021, Snap One, LLC. All rights reserved. Snap One and its respective logos are registered trademarks or trademarks of Snap One, LLC (formerly known as Wirepath Home Systems, LLC) in the United States and/or other countries. iStere, iSight, iControl, iControl My Home, iSnapIt, iMockupency, iNEC, iOneC, iWirepath, and iWirepath ONE are also registered trademarks or trademarks of Snap One, LLC. Other names and brands may be claimed as the trademarks of their respective owners. All trademarks are the property of their respective owners. This document covers all installation scenarios and configurations, or product use risks. Information within this specification subject to change without notice.