


HWP7200P Block Diagram

- To use NOVATEK Scalar

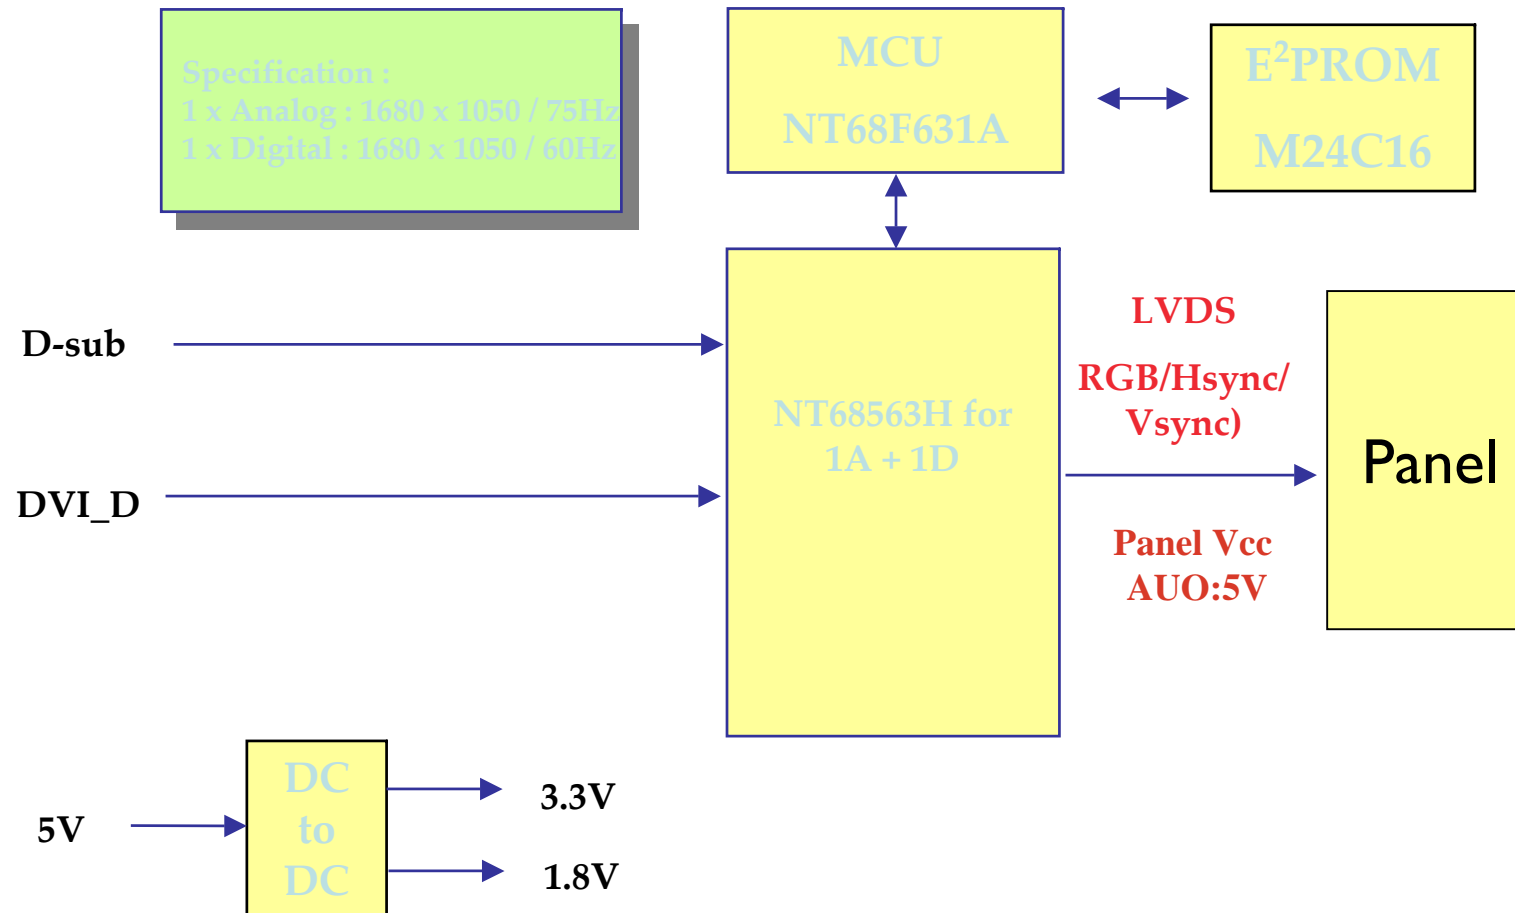

HWP7200P Circuit Description

General

HWP7200P is the 7th generation of Hudson series Flat Panel Display Monitor. It designed with LVDS interface feature. The monitor featured with DVI-D and analog signal input interface, and modularized as a display unit with embedded universal AC power supplies inside monitor main body. The monitor comes with super ergo base (SEB), the base is featured with tilt, swivel, height adjustment and portrait functionality. The power button and display control buttons (tact switch type) are on the front of the monitor. The monitor will be TCO03/TCO99 and Energy Star compliant and incorporate energy saving features described further in this document. The monitor shall support an internal scalar to automatically enable the monitor to display lower resolution video modes into 1680x1050 full screen display. The monitor shall communicate display data to the host computer using DDC2B and shall support EDID structure 1.3 for analog and digital signal input.

1. Power supply

Main Voltage:	AC 90 - 135 Vrms and 170 – 264 Vrms, 50/60±2 Hz
Power consumption:	Operating < 48W w/o USB, Standby < 2W. DC power switch off < 1W.
Power cord length:	1.8M
Power cord type:	3 lead with earth plug
Power indicator:	LED (ON: green, Standby: amber)
Auto power saving:	EPA, Nutek, VESA, DPMS, E2000

3. Input signal

Horizontal scan: 30 - 98 KHz

Vertical scan: 56 - 76 Hz

Input signals 1).VESA Analog

Input signal	: Video, Hsync., Vsync
Video	: 0.7 Vp-p, input impedance, 75 ohm @DC
Sync.	: Separate sync TTL level, input impedance 5k ohms
Hor. sync	: Positive/Negative
Ver. sync	: Positive/Negative

2).Intel DVI Digital

Input signal : Four channel TMDS signals

4. OSD (On Screen Display) function

Software control function via OSD/ Control as below:

Analog Signal Input

1 st LEVEL	2 nd LEVEL	3rd LEVEL
MONITOR SETUP		
Exit		
Brightness & Contrast	Brightness Contrast	
Color	Original Color, 9300K, 6500K, sRGB, User Define	
Position	Horizontal Vertical	
Input Selection	Analog (D-Sub), Digital (DVI-D)	
More Settings	Language	English, Espanol, Frencais, Deutsch, Italiano, Russian
	Phase/ Clock	Phase Clock
	OSD Settings	Horizontal Vertical
Reset	No Yes	
Serial No.:		
(Serial No.)		
Timing Mode		
Up/Down to Move, <input type="checkbox"/> to Confirm		

Digital Signal Input

1 st LEVEL	2 nd LEVEL	3rd LEVEL
MONITOR SETUP		
Exit		
Brightness & Contrast	Brightness Contrast	
Color	Original Color, 9300K, 6500K, sRGB, User Define	
Input Selection	Analog (D-Sub), Analog (DVI-A), Digital (DVI-D)	
More Settings	Language	English, Espanol, Frencais, Deutsch, Italiano, Russian
	Phase/ Clock (Grey out)	
	OSD Settings	Horizontal Vertical
Reset	No Yes	
Serial No.:		
(Serial No.)		
Timing Mode		
Up/Down to Move, <input type="checkbox"/> to Confirm		

5. LCD panel (QDI)

Type NR.	: LM201W01 SLA1
Outside dimensions	: 459.4(H) x 296.4(V) x 22.8(D) (Typ) mm
Pixel Pitch (mm)	: 0.258 mm x 0258mm
Color pixel arrangement	: RGB vertical stripes
Display surface	: antiglare with hard coating
Color depth	: 16.7M colors (8 bits)
Backlight	: Six CCFLs
Active area	: 433.44(H) x 270.9(V)
View angle	: Horizontal & Vertical 178 degree (CR>=10)
Contrast ratio	: 500(min.); 800 :1 (typ)
White luminance	: Panel original color 250nits (min), 300 nits (Typ)

6. Function block

6.1 Scaler board

Scaling NT68563HFG including ADC, Scaler, OSD, LVDS)

Analog

- Monitor the input horizontal and vertical sync signal to judge input video mode
- Sample the input video signal according to its pixel rate to form a digital data for panel.
- Auto-adjustment for sampling phase and frequency, picture alignment and color alignment.
- Send the parameters to format scaler IC according to the input mode.
- Process the control data listed in OSD section.

Digital

- Monitor DVI input with internal TMDS receiver to judge input video mode
- Sample the input video signal according to its pixel rate to form a digital data for panel.
- Send the parameters to format scaler IC according to the input mode.
- Process the control data listed in OSD section.

MCU NT68F631A

- Control Scaling and all I/Os port of monitor including audio.
- Store the source code into internal Flash ROM and capable of down loading program via ISP.

6.2 Front panel switch control board

- Used for OSD function and power on/off
7 push buttons (left, ok, right, up, down, auto, power switch)
- Power on/off LED indicator

6.3 AC to DC Power Board

The AC power input from 90 VAC to 264 VAC can generate 12VDC and 5VDC power to supply to inverter function and scaler board.