




# TEST REPORT

<b>Eurofins KCTL Co.,Ltd.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: KR22-SRF0176-A Page (1) of (118)	   <b>KCTL</b>
<p><b>1. Client</b></p> <ul style="list-style-type: none"> <li>◦ Name : Samsung Electronics Co., Ltd.</li> <li>◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea</li> <li>◦ Date of Receipt : 2022-09-05</li> </ul> <p><b>2. Use of Report</b> : Certification</p> <p><b>3. Name of Product / Model</b> : Notebook PC / NP345XNA</p> <p><b>4. Manufacturer / Country of Origin</b> : Samsung Electronics Co., Ltd. / Vietnam</p> <p><b>5. FCC ID</b> : A3LNP345XNA</p> <p><b>6. Date of Test</b> : 2022-09-15 to 2022-10-26</p> <p><b>7. Location of Test</b> : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing          (Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p><b>8. Test method used</b> : FCC Part 15 Subpart E, 15.407          RSS-248 Issue 1 November 2021          RSS-Gen Issue 5 February 2021</p> <p><b>9. Test Result</b> : Refer to the test result in the test report</p>		
Affirmation	Tested by  Name : Kwonse Kim (Signature)	Technical Manager  Name : Seungyong Kim (Signature)
2022-11-22		
<b>Eurofins KCTL Co.,Ltd.</b>		
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.		

## REPORT REVISION HISTORY

Date	Revision	Page No
2022-10-28	Originally issued	-
2022-11-22	Modified EIRP measurement procedure, Test result table of CBP	13, 64 ~ 66

*This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

Note. The report No. KR22-SRF0176 is superseded by the report No. KR22-SRF0176-A.

## General remarks for test reports

### Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

### Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

# CONTENTS

1.	General information .....	4
2.	Device information .....	4
2.1.	Frequency/channel operations.....	5
2.2.	Simultaneous Tx Condition .....	6
2.3.	Test RU offset for tones in each modes .....	6
2.4.	Duty Cycle Factor .....	7
3.	Antenna requirement .....	8
3.1	Antenna information.....	9
3.2	Directional Gain Calculations.....	9
4.	Summary of tests.....	10
5.	Measurement uncertainty .....	11
6.	Measurement results explanation example .....	12
7.	Test results .....	13
7.1.	Maximum e.i.r.p. ....	13
7.2.	Maximum e.i.r.p. Spectral Density .....	31
7.3.	26 dB Bandwidth & 99% Bandwidth.....	50
7.4.	In-Band Emission.....	56
7.5.	Frequency Stability .....	58
7.6.	Contention Based Protocol .....	61
7.7.	Spurious Emission, Band Edge and Restricted bands.....	72
7.8.	AC Conducted emission .....	116
8.	Measurement equipment .....	118

## 1. General information

Client : Samsung Electronics Co., Ltd.  
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
 Manufacturer : Samsung Electronics Co., Ltd.  
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
 Factory : SAMSUNG ELECTRONICS VIETNAM CO.,LTD.(SEV)  
 Address : Khu Cong nghiep Ten Phong 1, Yen Trung, Yen Phong, Bac Ninh, Vietnam  
 Laboratory : Eurofins KCTL Co.,Ltd.  
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132  
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056  
 CAB Identifier: KR0040  
 ISED Number: 8035A  
 KOLAS No.: KT231

## 2. Device information

Equipment under test : Notebook PC  
 Model : NP345XNA  
 Modulation technique : WIFI (802.11a/ax) : OFDM, OFDMA  
 Number of channels : UNII-5 : 24 ch (20 MHz), 12 ch (40 MHz), 6 ch (80 MHz), 3 ch (160 MHz)  
 UNII-6 : 5 ch (20 MHz), 3 ch (40 MHz), 1 ch (80 MHz), 1 ch (160 MHz)  
 UNII-7 : 18 ch (20 MHz), 8 ch (40 MHz), 5 ch (80 MHz), 2 ch (160 MHz)  
 UNII-8 : 12 ch (20 MHz), 6 ch (40 MHz), 2 ch (80 MHz), 1 ch (160 MHz)  
 Power source : DC 7.72 V  
 Antenna specification : Antenna 1 : FPCB Antenna  
 Antenna 2 : FPCB Antenna  
 Antenna gain :  

	Antenna 1	Antenna 2
UNII-5	: -8.02 dBi	: -8.02 dBi
UNII-6	: -8.01 dBi	: -8.12 dBi
UNII-7	: -8.02 dBi	: -8.06 dBi
UNII-8	: -8.02 dBi	: -8.06 dBi

  
 Frequency range : UNII-5 : 5 955 MHz ~ 6 415 MHz (802.11a/ax\_HE20)  
 UNII-5 : 5 965 MHz ~ 6 405 MHz (802.11ax\_HE40)  
 UNII-5 : 5 985 MHz ~ 6 385 MHz (802.11ax\_HE80)  
 UNII-5 : 6 025 MHz ~ 6 345 MHz (802.11ax\_HE160)  
 UNII-6 : 6 435 MHz ~ 6 515 MHz (802.11a/ax\_HE20)  
 UNII-6 : 6 445 MHz ~ 6 525 MHz (802.11ax\_HE40)  
 UNII-6 : 6 465 MHz (802.11ax\_HE80)  
 UNII-6 : 6 505 MHz (802.11ax\_HE160)  
 UNII-7 : 6 535 MHz ~ 6 875 MHz (802.11a/ax\_HE20)  
 UNII-7 : 6 565 MHz ~ 6 845 MHz (802.11ax\_HE40)  
 UNII-7 : 6 545 MHz ~ 6 865 MHz (802.11ax\_HE80)  
 UNII-7 : 6 665 MHz ~ 6 825 MHz (802.11ax\_HE160)  
 UNII-8 : 6 895 MHz ~ 7 115 MHz (802.11a/ax\_HE20)  
 UNII-8 : 6 885 MHz ~ 7 085 MHz (802.11ax\_HE40)  
 UNII-8 : 6 945 MHz ~ 7 025 MHz (802.11ax\_HE80)  
 UNII-8 : 6 985 MHz (802.11ax\_HE160)  
 Software version : NP345XNA.001  
 Hardware version : REV0.3  
 Test device serial No. : Conducted : KCUQ930T9006402  
 : Radiated : KCUQ930T900637M  
 Operation temperature : -20 °C ~ 60 °C

## 2.1. Frequency/channel operations

This device contains the following capabilities:

WLAN (11a/b/g/n/ac/ax), Bluetooth (BDR/EDR/BLE), NR N5/66, LTE B2/4/5/12/13/17/26/41/66, WCDMA 850/1700/1900

### UNII-5

Ch.	Frequency (MHz)
1	5 955
⋮	⋮
45	6 175
⋮	⋮
93	6 415

### UNII-6

Ch.	Frequency (MHz)
97	6 435
⋮	⋮
105	6 475
⋮	⋮
113	6 515

### UNII-7

Ch.	Frequency (MHz)
117	6 535
⋮	⋮
149	6 695
⋮	⋮
185	6 875

### UNII-8

Ch.	Frequency (MHz)
189	6 895
⋮	⋮
209	6 995
⋮	⋮
233	7 115

Table 2.1-1. 802.11a, ax\_HE20 mode

### UNII-5

Ch.	Frequency (MHz)
3	5 965
⋮	⋮
43	6 165
⋮	⋮
91	6 405

### UNII-6

Ch.	Frequency (MHz)
99	6 445
⋮	⋮
107	6 485
⋮	⋮
115	6 525

### UNII-7

Ch.	Frequency (MHz)
123	6 565
⋮	⋮
147	6 685
⋮	⋮
179	6 845

### UNII-8

Ch.	Frequency (MHz)
187	6 885
⋮	⋮
211	7 005
⋮	⋮
227	7 085

Table 2.1-2. 802.11ax\_HE40 mode

### UNII-5

Ch.	Frequency (MHz)
7	5 985
⋮	⋮
39	6 145
⋮	⋮
87	6 385

### UNII-6

Ch.	Frequency (MHz)
103	6 465

### UNII-7

Ch.	Frequency (MHz)
119	6 545
⋮	⋮
151	6 705
⋮	⋮
183	6 865

### UNII-8

Ch.	Frequency (MHz)
199	6 945
⋮	⋮
215	7 025

Table 2.1-3. 802.11ax\_HE80 mode

### UNII-5

Ch.	Frequency (MHz)
15	6 025
⋮	⋮
47	6 185
⋮	⋮
79	6 345

### UNII-6

Ch.	Frequency (MHz)
111	6 505

### UNII-7

Ch.	Frequency (MHz)
143	6 665
⋮	⋮
175	6 825

### UNII-8

Ch.	Frequency (MHz)
207	6 985

Table 2.1-4. 802.11ax\_HE160 mode

## 2.2. Simultaneous Tx Condition

The device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the Bluetooth, 2.4 GHz, 5 GHz, or 6 GHz bands simultaneously on each antenna.

Simultaneous Tx condition – not RSDB

Mode	# of TX	WLAN 6 GHz		WLAN 5 GHz		WLAN 2.4 GHz		Bluetooth	Report
		ANT 1	ANT 2	ANT 1	ANT 2	ANT 1	ANT 2	ANT 1	
Bluetooth + WLAN	3	O	O	-	-	-	-	O	√
	3	-	-	O	O	-	-	O	
	2	-	-	-	-	-	O	O	

### Notes.

Simultaneous condition was performed as a worst case which is configured as a combination of lowest margin for each mode during radiated spurious emission.

## 2.3. Test RU offset for tones in each modes

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0 ~ 8	0	4	8
	52	37 ~ 40	37	38	40
	106	53 ~ 54	53	-	54
	242	61 / SU	-	61 / -	-
40	26	0 ~ 17	0	9	17
	52	37 ~ 44	37	41	44
	106	53 ~ 56	53	54	56
	242	61 ~ 62	61	-	62
	484	65 / SU	-	65 / -	-
80	26	0 ~ 36	0	18	36
	52	37 ~ 52	37	45	52
	106	53 ~ 60	53	57	60
	242	61 ~ 64	61	62	64
	484	65 ~ 66	65	-	66
	996	67 / SU	-	67 / -	-
160 <sup>Note</sup>	26	0 ~ 36	0L	0U	36U
	52	37 ~ 52	37L	37U	52U
	106	53 ~ 60	53L	53U	60U
	242	61 ~ 64	61L	61U	64U
	484	65 ~ 66	65L	65U	66U
	996	67	67L	-	67U
	2x996	68 / SU	-	68 / -	-

### Notes.

- HE160 = HE80(L) + HE80(H)



Measurement RU offset for HE80(L) and HE80(U) was investigated then worst RU offset of testing offset (L/M/H) was reported.

## 2.4. Duty Cycle Factor

Test mode		ANT	Tone	Period (ms)	T <sub>on</sub> time (ms)	Duty cycle		Duty cycle factor (dB)
						(Linear)	(%)	
11a	6Mbps	MIMO	-	1.581	1.464	0.9260	92.60	0.33
11ax	HE20	MIMO	26T	5.186	5.056	0.9749	97.49	0.11
			52T	5.178	5.041	0.9735	97.35	0.12
			106T	2.870	2.737	0.9537	95.37	0.21
			242T	1.346	1.219	0.9056	90.56	0.43
			SU	1.252	1.136	0.9073	90.73	0.42
	HE40	MIMO	26T	5.175	5.033	0.9726	97.26	0.12
			52T	5.194	5.022	0.9669	96.69	0.15
			106T	2.903	2.742	0.9445	94.45	0.25
			242T	1.351	1.237	0.9156	91.56	0.38
			484T	0.767	0.652	0.8501	85.01	0.71
	HE80	MIMO	SU	0.705	0.606	0.8596	85.96	0.66
			26T	5.201	5.037	0.9685	96.85	0.14
			52T	5.184	5.020	0.9684	96.84	0.14
			106T	2.869	2.724	0.9495	94.95	0.23
			242T	1.346	1.232	0.9153	91.53	0.38
			484T	0.757	0.656	0.8666	86.66	0.62
			996T	0.453	0.354	0.7815	78.15	1.07
	HE160	MIMO	SU	0.426	0.325	0.7629	76.29	1.18
			26T	5.180	4.991	0.9635	96.35	0.16
			52T	5.152	4.982	0.9670	96.70	0.15
			106T	2.858	2.725	0.9535	95.35	0.21
242T			1.337	1.226	0.9170	91.70	0.38	
484T			0.756	0.655	0.8664	86.64	0.62	
996T			0.452	0.354	0.7832	78.32	1.06	
2x996T			0.225	0.128	0.5689	56.89	2.45	
SU	0.297	0.199	0.6700	67.00	1.74			

### Notes.

1. Duty cycle (Linear) = T<sub>on</sub> time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not compensated to average result if duty cycle is more than 98%
4. Please refer to Appendix B for plots,

<p><b>Eurofins KCTL Co.,Ltd.</b>  65, Sinwon-ro, Yeongtong-gu,  Suwon-si, Gyeonggi-do, 16677, Korea  TEL: 82-31-285-0894 FAX: 82-505-299-8311  <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p>	<p>Report No.:  KR22-SRF0176-A  Page (8) of (118)</p>	 
---	---	---

### **3. Antenna requirement**

#### **Requirement of FCC part section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **Requirement of RSS-Gen Section 6.8:**

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached FPCB Antenna (Internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247, §15.407.



### 3.1 Antenna information

Mode	CDD	MIMO
	ANT 1 + 2	ANT 1 + 2
802.11a	√	√
802.11ax HE20	√	√
802.11ax HE40	√	√
802.11ax HE80	√	√
802.11ax HE160	√	√

√ = Support, X = Not support

### 3.2 Directional Gain Calculations

According to clause F), 2), d), (i) of KDB 662911 D01 Multiple Transmitter Output, Directional gain may be calculated by using the formulas as below.

#### Directional Antenna Gain

Band	ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	Directional Gain (dBi)
UNII 5	-8.02	-8.02	-5.01
UNII 6	-8.01	-8.12	-5.05
UNII 7	-8.02	-8.06	-5.03
UNII 8	-8.02	-8.06	-5.03

#### Note.

Unequal antenna gains, with equal transmit powers. For antenna gains given by  $G_1, G_2, \dots, G_N$  dBi

Directional gain =  $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$  dB i

#### Sample calculation

In case of UNII 5, directional gain =  $10 \log[(10^{-8.02/20} + 10^{-8.02/20})^2 / 2] = -5.01$  dB i

#### 4. Summary of tests

FCC Part section(s)	IC Rule	Parameter	Test Condition	Test results
15.407(a)(8)	RSS-248 4.6.3 b	Maximum e.i.r.p.	Conducted	Pass
15.407(a)(8)	RSS-248 4.6.3 a	Maximum e.i.r.p. spectral density		Pass
15.407(a)(10)	RSS-248 4.4	26 dB Bandwidth 99% Occupied Bandwidth		Pass
15.407(d)(6)	RSS-248 4.8.2	Contention Based Protocol		Pass
15.407(b)(7)	RSS-248 4.7 b	In-Band Emissions		Pass
15.407(g)	RSS-248 4.5	Frequency Stability		Pass
15.407(b)(9)	RSS-248 4.7 e RSS-Gen 8.8	AC Conducted Emissions		Pass
15.407(b)(6)	RSS-248 4.7.2 a	Undesirable Emissions	Radiated	Pass
15.205(a), 15.209(a)	RSS-Gen 8.9 RSS-Gen 8.10	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass

#### Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The orthogonal plan is configured as x-axis because the device operates as desktop device in standard laptop mode. Therefore, all final radiated testing was performed with the EUT in X orientation.
- All the radiated tests have been performed several case. (Stand-alone, with accessories (TA etc.))  
Worst case: stand-alone
- The test procedure(s) in this report were performed in accordance as following.
  - ANSI C63.10-2013
  - KDB 662911 D01 v02r01
  - KDB 789033 D02 v02r01
  - KDB 987594 D02 v01r01
- Based on the baseline scan, the worst-case data rates were:
  - 802.11a mode: 6Mbps
  - 802.11ax HE20 mode (MIMO): MCS0
  - 802.11ax HE40 mode (MIMO): MCS0
  - 802.11ax HE80 mode (MIMO): MCS0
  - 802.11ax HE160 mode (MIMO): MCS0

## 5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ( $\pm$ )	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	Below 30 MHz:	2.4 dB
	30 MHz ~ 1 000 MHz	2.3 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 MHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	1.6 dB
	150 kHz ~ 30 MHz	1.7 dB

## 6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.92	9 000	13.08
50	10.05	10 000	13.13
100	10.12	11 000	13.54
200	10.25	12 000	13.98
300	10.38	13 000	14.85
400	10.49	14 000	14.83
500	10.52	15 000	14.56
600	10.58	16 000	14.19
700	10.59	17 000	14.09
800	10.65	18 000	14.32
900	10.72	19 000	14.94
1 000	10.71	20 000	14.97
2 000	11.20	21 000	14.74
3 000	11.61	22 000	14.85
4 000	11.64	23 000	14.91
5 000	11.93	24 000	14.51
6 000	12.09	25 000	14.63
7 000	12.26	26 000	14.77
8 000	13.03	26 500	14.94


**Notes:**

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

## 7. Test results

### 7.1. Maximum e.i.r.p.

#### Test setup

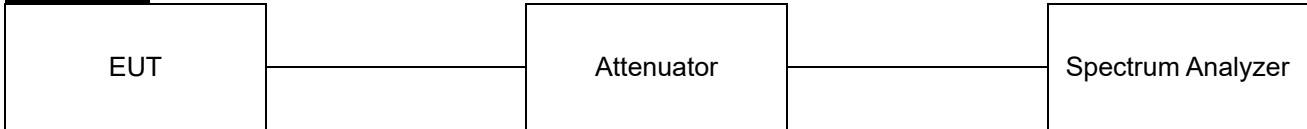

#### Limit

According to §15.407(a)(8), RSS-248 4.6.3. b,

Band	Maximum e.i.r.p. limit
UNII-5, 6, 7, 8	< 24 dBm

#### Test procedure

ANSI C63.10-2013-Section 12.3.2.4 or 12.3.3.1  
 KDB 789033 D02 v02r01 - Section E.2.d) or E.3.a)  
 KDB 662911 D01 v02r01 – Section E).1) and Section F)

#### Test settings

Used test method is Section E.2.d).

#### ◆ KDB 789033 D02 v02r01

#### Section E.2.d)

**Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle,  $x$ , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW  $\geq$  3 MHz
- (v) Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run.”
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25%.

### Test results

#### 802.11a MIMO in the UNII-5 band

Channel	Frequency (MHz)	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
1	5 955	9.65	8.27	12.35	-5.01	7.34	24
45	6 175	8.97	8.22	11.95	-5.01	6.94	
93	6 415	9.22	7.67	11.85	-5.01	6.84	

#### 802.11a MIMO in the UNII-6 band

Channel	Frequency (MHz)	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
97	6 435	9.05	7.53	11.70	-5.05	6.65	24
105	6 475	9.09	8.23	12.02	-5.05	6.97	
113	6 515	9.68	8.52	12.48	-5.05	7.43	

#### 802.11a MIMO in the UNII-7 band

Channel	Frequency (MHz)	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
117	6 535	9.16	7.90	11.92	-5.03	6.89	24
149	6 695	10.42	7.65	12.59	-5.03	7.56	
185	6 875	9.99	8.15	12.51	-5.03	7.48	

#### 802.11a MIMO in the UNII-8 band

Channel	Frequency (MHz)	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
189	6 895	9.98	8.13	12.49	-5.03	7.46	24
209	6 995	9.52	8.20	12.25	-5.03	7.22	
233	7 115	9.34	8.16	12.13	-5.03	7.10	

#### Notes:

1. Average power\_MIMO(dBm) =  $10\log(10(\text{ANT } 1/10) + 10(\text{ANT } 2/10))$  (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
1	5 955	26T	0	1.02	3.34	5.45	-5.01	0.44	24
			4	0.05	2.89	4.82	-5.01	-0.19	
			8	0.20	3.29	5.13	-5.01	0.12	
		52T	37	1.09	3.15	5.37	-5.01	0.36	
			38	0.32	2.97	4.97	-5.01	-0.04	
			40	0.47	3.09	5.10	-5.01	0.09	
		106T	53	3.84	6.10	8.34	-5.01	3.33	
			54	3.79	6.12	8.33	-5.01	3.32	
		242T	61	10.29	8.46	12.91	-5.01	7.90	
		SU	-	10.09	8.18	12.67	-5.01	7.66	
45	6 175	26T	0	1.50	2.13	4.95	-5.01	-0.06	24
			4	0.31	1.72	4.19	-5.01	-0.82	
			8	1.04	2.23	4.80	-5.01	-0.21	
		52T	37	2.06	1.92	5.12	-5.01	0.11	
			38	1.64	1.75	4.83	-5.01	-0.18	
			40	1.60	2.06	4.97	-5.01	-0.04	
		106T	53	4.91	4.90	8.13	-5.01	3.12	
			54	4.97	4.95	8.18	-5.01	3.17	
		242T	61	9.08	7.93	11.98	-5.01	6.97	
		SU	-	8.75	7.62	11.65	-5.01	6.64	
93	6 415	26T	0	-0.31	3.08	4.83	-5.01	-0.18	24
			4	-0.19	1.86	4.08	-5.01	-0.93	
			8	1.86	2.38	5.25	-5.01	0.24	
		52T	37	-0.41	2.11	4.16	-5.01	-0.85	
			38	2.12	2.26	5.32	-5.01	0.31	
			40	2.16	2.48	5.45	-5.01	0.44	
		106T	53	4.11	5.27	7.95	-5.01	2.94	
			54	4.22	5.28	8.00	-5.01	2.99	
		242T	61	9.02	7.64	11.82	-5.01	6.81	
		SU	-	8.92	7.21	11.58	-5.01	6.57	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
97	6 435	26T	0	-1.41	2.87	4.36	-5.05	-0.69	24
			4	-0.28	2.50	4.45	-5.05	-0.60	
			8	1.00	2.22	4.77	-5.05	-0.28	
		52T	37	-0.46	3.02	4.75	-5.05	-0.30	
			38	2.16	3.11	5.79	-5.05	0.74	
			40	2.20	3.27	5.90	-5.05	0.85	
		106T	53	4.10	6.10	8.43	-5.05	3.38	
			54	4.24	6.09	8.48	-5.05	3.43	
		242T	61	8.81	7.55	11.67	-5.05	6.62	
		SU	-	8.70	7.16	11.43	-5.05	6.38	
105	6 475	26T	0	-1.50	2.92	4.37	-5.05	-0.68	
			4	0.02	2.81	4.76	-5.05	-0.29	
			8	1.43	2.63	5.19	-5.05	0.14	
		52T	37	-0.91	3.07	4.65	-5.05	-0.40	
			38	2.09	3.32	5.88	-5.05	0.83	
			40	2.32	3.29	5.96	-5.05	0.91	
		106T	53	3.96	6.21	8.45	-5.05	3.40	
			54	4.20	6.42	8.67	-5.05	3.62	
		242T	61	9.30	8.26	12.25	-5.05	7.20	
		SU	-	9.09	8.01	12.01	-5.05	6.96	
113	6 515	26T	0	-1.53	3.09	4.49	-5.05	-0.56	
			4	0.12	2.85	4.82	-5.05	-0.23	
			8	1.35	2.71	5.20	-5.05	0.15	
		52T	37	-1.25	3.08	4.56	-5.05	-0.49	
			38	1.64	3.32	5.69	-5.05	0.64	
			40	2.03	3.46	5.93	-5.05	0.88	
		106T	53	3.44	6.27	8.30	-5.05	3.25	
			54	3.82	6.51	8.59	-5.05	3.54	
		242T	61	9.57	8.43	12.48	-5.05	7.43	
		SU	-	9.38	8.14	12.23	-5.05	7.18	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)



**802.11ax HE20 MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
117	6 535	26T	0	-1.69	2.65	4.12	-5.03	-0.91	24
			4	-0.18	2.39	4.41	-5.03	-0.62	
			8	1.36	3.05	5.41	-5.03	0.38	
		52T	37	-1.14	3.54	4.93	-5.03	-0.10	
			38	1.60	3.73	5.92	-5.03	0.89	
			40	1.96	3.45	5.90	-5.03	0.87	
		106T	53	3.65	6.28	8.38	-5.03	3.35	
			54	3.88	6.42	8.55	-5.03	3.52	
		242T	61	9.04	7.38	11.73	-5.03	6.70	
		SU	-	8.86	7.04	11.47	-5.03	6.44	
149	6 695	26T	0	-1.22	3.37	4.78	-5.03	-0.25	24
			4	-0.69	2.81	4.52	-5.03	-0.51	
			8	-0.23	3.30	5.00	-5.03	-0.03	
		52T	37	-1.25	4.39	5.56	-5.03	0.53	
			38	-0.39	4.29	5.68	-5.03	0.65	
			40	-0.12	4.32	5.77	-5.03	0.74	
		106T	53	2.32	7.42	8.80	-5.03	3.77	
			54	2.13	7.26	8.63	-5.03	3.60	
		242T	61	10.37	7.71	12.68	-5.03	7.65	
		SU	-	10.24	7.41	12.48	-5.03	7.45	
185	6 875	26T	0	-1.55	3.49	4.78	-5.03	-0.25	24
			4	-1.33	2.88	4.39	-5.03	-0.64	
			8	-0.80	3.23	4.79	-5.03	-0.24	
		52T	37	-1.15	4.45	5.63	-5.03	0.60	
			38	-0.81	4.09	5.43	-5.03	0.40	
			40	-0.34	4.20	5.63	-5.03	0.60	
		106T	53	2.11	7.52	8.83	-5.03	3.80	
			54	2.12	7.44	8.77	-5.03	3.74	
		242T	61	9.91	8.42	12.67	-5.03	7.64	
		SU	-	9.69	8.00	12.36	-5.03	7.33	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-8 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
189	6 895	26T	0	-0.39	2.97	4.73	-5.03	-0.30	24
			4	-0.14	2.30	4.37	-5.03	-0.66	
			8	0.26	2.56	4.68	-5.03	-0.35	
		52T	37	0.15	4.03	5.64	-5.03	0.61	
			38	0.49	3.58	5.43	-5.03	0.40	
			40	0.93	3.63	5.62	-5.03	0.59	
		106T	53	3.41	6.90	8.72	-5.03	3.69	
			54	3.44	6.72	8.60	-5.03	3.57	
		242T	61	9.93	8.24	12.61	-5.03	7.58	
		SU	-	9.71	7.84	12.31	-5.03	7.28	
209	6 995	26T	0	0.30	3.01	4.98	-5.03	-0.05	
			4	0.26	2.38	4.57	-5.03	-0.46	
			8	0.71	2.66	4.91	-5.03	-0.12	
		52T	37	-0.55	2.85	4.60	-5.03	-0.43	
			38	-0.49	2.51	4.39	-5.03	-0.64	
			40	-0.17	2.63	4.58	-5.03	-0.45	
		106T	53	2.55	5.74	7.65	-5.03	2.62	
			54	2.61	5.70	7.64	-5.03	2.61	
		242T	61	8.68	8.26	11.92	-5.03	6.89	
		SU	-	8.52	7.90	11.65	-5.03	6.62	
233	7 115	26T	0	-1.73	-0.56	2.01	-5.03	-3.02	
			4	-1.83	-0.24	2.16	-5.03	-2.87	
			8	-1.69	-0.17	2.26	-5.03	-2.77	
		52T	37	-0.08	2.59	4.59	-5.03	-0.44	
			38	-0.33	2.18	4.23	-5.03	-0.80	
			40	0.57	2.68	4.88	-5.03	-0.15	
		106T	53	2.92	5.42	7.57	-5.03	2.54	
			54	3.10	5.64	7.77	-5.03	2.74	
		242T	61	8.39	8.22	11.75	-5.03	6.72	
		SU	-	8.21	7.93	11.50	-5.03	6.47	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
3	5 965	26T	0	0.84	2.71	5.01	-5.01	0.00	24
			9	0.31	2.51	4.68	-5.01	-0.33	
			17	-0.26	2.52	4.48	-5.01	-0.53	
		52T	37	1.02	2.83	5.18	-5.01	0.17	
			41	0.69	2.51	4.85	-5.01	-0.16	
			44	0.27	2.66	4.79	-5.01	-0.22	
		106T	53	3.57	5.80	8.09	-5.01	3.08	
			54	3.50	5.59	7.93	-5.01	2.92	
			56	3.57	5.70	8.02	-5.01	3.01	
		242T	61	5.35	7.51	9.95	-5.01	4.94	
			62	5.34	7.55	9.97	-5.01	4.96	
		484T	65	6.86	9.45	12.07	-5.01	7.06	
		SU	-	6.72	9.26	11.84	-5.01	6.83	
43	6 165	26T	0	1.49	1.63	4.69	-5.01	-0.32	24
			9	0.81	1.48	4.29	-5.01	-0.72	
			17	0.92	1.73	4.47	-5.01	-0.54	
		52T	37	2.01	1.62	4.98	-5.01	-0.03	
			41	1.63	1.48	4.72	-5.01	-0.29	
			44	1.73	1.72	4.89	-5.01	-0.12	
		106T	53	4.70	4.63	7.93	-5.01	2.92	
			54	4.58	4.48	7.79	-5.01	2.78	
			56	4.97	4.61	8.05	-5.01	3.04	
		242T	61	6.32	6.36	9.73	-5.01	4.72	
			62	6.49	6.38	9.83	-5.01	4.82	
		484T	65	8.21	8.28	11.97	-5.01	6.96	
		SU	-	8.05	8.10	11.75	-5.01	6.74	
91	6 405	26T	0	-0.09	2.35	4.43	-5.01	-0.58	24
			9	-0.28	2.23	4.28	-5.01	-0.73	
			17	1.99	1.55	4.91	-5.01	-0.10	
		52T	37	1.30	2.35	5.02	-5.01	0.01	
			41	0.44	2.24	4.59	-5.01	-0.42	
			44	2.87	2.68	5.94	-5.01	0.93	
		106T	53	4.15	4.39	7.53	-5.01	2.52	
			54	4.19	4.29	7.50	-5.01	2.49	
			56	4.04	4.48	7.53	-5.01	2.52	
		242T	61	6.86	7.15	10.40	-5.01	5.39	
			62	6.84	7.24	10.43	-5.01	5.42	
		484T	65	7.70	7.94	11.54	-5.01	6.53	
		SU	-	7.51	7.88	11.37	-5.01	6.36	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
99	6 445	26T	0	-1.50	2.71	4.23	-5.05	-0.82	24
			9	-1.70	2.52	4.03	-5.05	-1.02	
			17	1.29	2.04	4.81	-5.05	-0.24	
		52T	37	-0.25	2.78	4.68	-5.05	-0.37	
			41	-1.21	2.60	4.26	-5.05	-0.79	
			44	2.27	3.22	5.93	-5.05	0.88	
		106T	53	3.13	4.72	7.26	-5.05	2.21	
			54	3.02	4.58	7.13	-5.05	2.08	
			56	2.92	4.86	7.26	-5.05	2.21	
		242T	61	5.67	7.54	10.10	-5.05	5.05	
			62	5.57	7.62	10.11	-5.05	5.06	
		484T	65	6.35	8.42	11.23	-5.05	6.18	
		SU	-	6.16	8.29	11.02	-5.05	5.97	
107	6 485	26T	0	-1.82	2.80	4.21	-5.05	-0.84	24
			9	-1.41	2.78	4.30	-5.05	-0.75	
			17	0.94	2.33	4.82	-5.05	-0.23	
		52T	37	-0.86	2.97	4.62	-5.05	-0.43	
			41	-1.65	2.95	4.39	-5.05	-0.66	
			44	1.85	3.45	5.88	-5.05	0.83	
		106T	53	2.81	5.02	7.31	-5.05	2.26	
			54	2.75	4.98	7.27	-5.05	2.22	
			56	2.53	5.16	7.30	-5.05	2.25	
		242T	61	5.44	7.87	10.21	-5.05	5.16	
			62	5.29	7.97	10.22	-5.05	5.17	
		484T	65	5.94	8.70	11.26	-5.05	6.21	
		SU	-	5.79	8.60	11.09	-5.05	6.04	
115	6 525	26T	0	-1.63	3.12	4.49	-5.05	-0.56	24
			9	-0.90	3.22	4.76	-5.05	-0.29	
			17	0.99	2.63	5.02	-5.05	-0.03	
		52T	37	-1.34	3.26	4.70	-5.05	-0.35	
			41	-1.43	3.28	4.69	-5.05	-0.36	
			44	1.71	3.51	5.86	-5.05	0.81	
		106T	53	2.48	5.24	7.34	-5.05	2.29	
			54	2.47	5.26	7.35	-5.05	2.30	
			56	2.40	5.52	7.49	-5.05	2.44	
		242T	61	5.27	8.11	10.31	-5.05	5.26	
			62	5.20	8.28	10.40	-5.05	5.35	
		484T	65	6.03	9.04	11.51	-5.05	6.46	
		SU	-	6.06	8.82	11.33	-5.05	6.28	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
123	6 565	26T	0	-1.40	3.45	4.80	-5.03	-0.23	24
			9	-0.65	3.32	4.90	-5.03	-0.13	
			17	1.00	2.84	5.15	-5.03	0.12	
		52T	37	-1.31	3.52	4.90	-5.03	-0.13	
			41	-1.28	3.45	4.86	-5.03	-0.17	
			44	1.69	3.52	5.86	-5.03	0.83	
		106T	53	2.56	5.50	7.53	-5.03	2.50	
			54	2.48	5.39	7.43	-5.03	2.40	
			56	2.48	5.70	7.64	-5.03	2.61	
		242T	61	5.24	8.28	10.41	-5.03	5.38	
			62	5.19	8.48	10.53	-5.03	5.50	
		484T	65	5.93	9.14	11.55	-5.03	6.52	
		SU	-	5.77	9.01	11.36	-5.03	6.33	
147	6 685	26T	0	-1.49	3.90	5.12	-5.03	0.09	24
			9	-0.87	3.68	5.11	-5.03	0.08	
			17	-0.09	3.95	5.51	-5.03	0.48	
		52T	37	-2.16	3.98	5.08	-5.03	0.05	
			41	-1.73	3.76	4.99	-5.03	-0.04	
			44	-0.79	4.04	5.42	-5.03	0.39	
		106T	53	1.01	5.90	7.37	-5.03	2.34	
			54	1.01	5.90	7.37	-5.03	2.34	
			56	0.58	5.82	7.21	-5.03	2.18	
		242T	61	3.93	8.77	10.38	-5.03	5.35	
			62	3.42	8.63	10.15	-5.03	5.12	
		484T	65	4.47	9.52	11.41	-5.03	6.38	
		SU	-	4.40	9.35	11.22	-5.03	6.19	
179	6 845	26T	0	-2.36	3.28	4.45	-5.03	-0.58	24
			9	-1.95	2.97	4.30	-5.03	-0.73	
			17	-1.21	2.89	4.44	-5.03	-0.59	
		52T	37	-1.77	4.48	5.55	-5.03	0.52	
			41	-1.38	4.10	5.33	-5.03	0.30	
			44	-0.67	4.08	5.48	-5.03	0.45	
		106T	53	0.68	6.24	7.56	-5.03	2.53	
			54	0.81	6.13	7.50	-5.03	2.47	
			56	0.79	6.12	7.49	-5.03	2.46	
		242T	61	3.46	8.99	10.44	-5.03	5.41	
			62	3.57	8.84	10.35	-5.03	5.32	
		484T	65	4.40	9.83	11.63	-5.03	6.60	
		SU	-	4.31	9.69	11.46	-5.03	6.43	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-8 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
187	6 885	26T	0	-2.30	3.18	4.38	-5.03	-0.65	24
			9	-2.17	2.85	4.16	-5.03	-0.87	
			17	-1.41	2.63	4.19	-5.03	-0.84	
		52T	37	-1.80	4.30	5.40	-5.03	0.37	
			41	-1.86	4.03	5.18	-5.03	0.15	
			44	-0.88	3.85	5.26	-5.03	0.23	
		106T	53	0.75	6.16	7.51	-5.03	2.48	
			54	0.55	5.92	7.28	-5.03	2.25	
			56	0.52	5.93	7.28	-5.03	2.25	
		242T	61	3.48	8.82	10.31	-5.03	5.28	
			62	3.41	8.66	10.17	-5.03	5.14	
		484T	65	4.30	9.66	11.48	-5.03	6.45	
		SU	-	4.20	9.56	11.33	-5.03	6.30	
		203	6 965	26T	0	-0.79	3.38	4.91	
9	-0.69				3.02	4.68	-5.03	-0.35	
17	-0.38				2.85	4.66	-5.03	-0.37	
52T	37			-1.03	3.46	4.93	-5.03	-0.10	
	41			-1.07	3.15	4.69	-5.03	-0.34	
	44			-0.73	3.00	4.68	-5.03	-0.35	
106T	53			2.33	5.86	7.70	-5.03	2.67	
	54			2.20	5.70	7.55	-5.03	2.52	
	56			2.07	5.54	7.40	-5.03	2.37	
242T	61			4.04	7.58	9.55	-5.03	4.52	
	62			3.85	7.61	9.52	-5.03	4.49	
484T	65			8.58	7.06	11.61	-5.03	6.58	
SU	-			8.14	6.66	11.13	-5.03	6.10	
227	7 085			26T	0	0.34	2.84	4.90	-5.03
		9	0.15		2.33	4.51	-5.03	-0.52	
		17	0.31		2.18	4.48	-5.03	-0.55	
		52T	37	0.23	3.06	5.03	-5.03	0.00	
			41	0.08	2.64	4.71	-5.03	-0.32	
			44	0.16	2.36	4.56	-5.03	-0.47	
		106T	53	3.20	5.78	7.94	-5.03	2.91	
			54	2.88	5.55	7.68	-5.03	2.65	
			56	2.89	5.55	7.68	-5.03	2.65	
		242T	61	5.05	7.58	9.89	-5.03	4.86	
			62	4.87	7.43	9.73	-5.03	4.70	
		484T	65	7.53	7.19	11.08	-5.03	6.05	
		SU	-	6.97	6.75	10.53	-5.03	5.50	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
7	5 985	26T	0	0.85	2.27	4.77	-5.01	-0.24	24
			18	-0.04	1.94	4.21	-5.01	-0.80	
			36	0.38	2.72	4.86	-5.01	-0.15	
		52T	37	0.90	2.28	4.79	-5.01	-0.22	
			45	0.87	1.85	4.54	-5.01	-0.47	
			52	0.06	1.84	4.19	-5.01	-0.82	
		106T	53	3.49	5.18	7.66	-5.01	2.65	
			57	3.32	4.78	7.35	-5.01	2.34	
			60	3.42	4.80	7.40	-5.01	2.39	
		242T	61	5.34	6.97	9.62	-5.01	4.61	
			62	5.28	6.89	9.55	-5.01	4.54	
			64	5.23	6.63	9.38	-5.01	4.37	
		484T	65	5.10	6.68	9.59	-5.01	4.58	
66	4.91		6.42	9.36	-5.01	4.35			
996T	67	6.57	8.15	11.51	-5.01	6.50			
SU	-	6.23	7.68	11.21	-5.01	6.20			
39	6 145	26T	0	0.97	1.47	4.38	-5.01	-0.63	
			18	0.68	2.61	4.90	-5.01	-0.11	
			36	0.61	1.81	4.40	-5.01	-0.61	
		52T	37	1.27	1.47	4.52	-5.01	-0.49	
			45	1.72	1.65	4.84	-5.01	-0.17	
			52	1.52	1.78	4.80	-5.01	-0.21	
		106T	53	3.70	4.45	7.33	-5.01	2.32	
			57	4.04	4.55	7.54	-5.01	2.53	
			60	4.56	4.67	7.86	-5.01	2.85	
		242T	61	5.49	6.21	9.26	-5.01	4.25	
			62	5.59	6.26	9.33	-5.01	4.32	
			64	6.22	6.52	9.76	-5.01	4.75	
		484T	65	5.32	6.04	9.33	-5.01	4.32	
66	5.77		6.21	9.63	-5.01	4.62			
996T	67	7.10	7.67	11.47	-5.01	6.46			
SU	-	6.69	7.24	11.16	-5.01	6.15			
87	6 385	26T	0	0.64	2.40	4.76	-5.01	-0.25	
			18	0.89	2.23	4.76	-5.01	-0.25	
			36	2.14	1.66	5.06	-5.01	0.05	
		52T	37	2.10	2.72	5.57	-5.01	0.56	
			45	1.70	2.31	5.17	-5.01	0.16	
			52	3.09	2.21	5.82	-5.01	0.81	
		106T	53	4.63	4.69	7.90	-5.01	2.89	
			57	4.25	4.36	7.55	-5.01	2.54	
			60	4.04	4.43	7.48	-5.01	2.47	
		242T	61	6.38	6.61	9.89	-5.01	4.88	
			62	6.09	6.43	9.65	-5.01	4.64	
			64	6.01	6.41	9.60	-5.01	4.59	
		484T	65	6.06	6.33	9.83	-5.01	4.82	
66	5.86		6.12	9.62	-5.01	4.61			
996T	67	7.55	7.77	11.74	-5.01	6.73			
SU	-	7.06	7.36	11.40	-5.01	6.39			

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
103	6 465	26T	0	-1.88	2.56	4.03	-5.05	-1.02	24
			18	-0.07	2.70	4.68	-5.05	-0.37	
			36	0.93	2.08	4.69	-5.05	-0.36	
		52T	37	-0.64	2.45	4.32	-5.05	-0.73	
			45	-0.83	2.58	4.35	-5.05	-0.70	
			52	1.60	3.15	5.59	-5.05	0.54	
		106T	53	3.48	5.44	7.81	-5.05	2.76	
			57	3.40	5.65	7.91	-5.05	2.86	
			60	3.08	5.87	7.94	-5.05	2.89	
		242T	61	5.13	7.31	9.75	-5.05	4.70	
			62	4.81	7.32	9.63	-5.05	4.58	
			64	4.97	7.70	9.94	-5.05	4.89	
		484T	65	4.10	7.06	9.46	-5.05	4.41	
			66	4.95	7.42	9.99	-5.05	4.94	
		996T	67	5.50	7.86	10.92	-5.05	5.87	
		SU	-	5.01	7.45	10.59	-5.05	5.54	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)



**802.11ax HE80 MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
119	6 545	26T	0	-1.86	2.92	4.31	-5.03	-0.72	24
			18	0.72	3.27	5.33	-5.03	0.30	
			36	0.87	2.76	5.07	-5.03	0.04	
		52T	37	-1.45	2.94	4.43	-5.03	-0.60	
			45	-1.39	3.23	4.66	-5.03	-0.37	
			52	1.39	3.79	5.90	-5.03	0.87	
		106T	53	3.28	6.05	8.12	-5.03	3.09	
			57	3.23	6.27	8.25	-5.03	3.22	
			60	3.08	6.57	8.41	-5.03	3.38	
		242T	61	5.08	7.98	10.16	-5.03	5.13	
			62	5.05	8.10	10.23	-5.03	5.20	
			64	5.03	8.41	10.43	-5.03	5.40	
		484T	65	4.97	7.84	10.27	-5.03	5.24	
			66	4.81	8.06	10.36	-5.03	5.33	
996T	67	5.53	8.56	11.38	-5.03	6.35			
SU	-	5.11	8.08	11.03	-5.03	6.00			
151	6 705	26T	0	-1.63	3.66	4.93	-5.03	-0.10	24
			18	-0.58	3.33	4.95	-5.03	-0.08	
			36	-1.01	3.61	5.04	-5.03	0.01	
		52T	37	-2.20	3.83	4.94	-5.03	-0.09	
			45	-2.75	3.57	4.62	-5.03	-0.41	
			52	-1.61	3.78	5.02	-5.03	-0.01	
		106T	53	1.88	6.83	8.27	-5.03	3.24	
			57	1.09	6.48	7.81	-5.03	2.78	
			60	0.90	6.63	7.89	-5.03	2.86	
		242T	61	3.84	8.60	10.23	-5.03	5.20	
			62	3.55	8.50	10.09	-5.03	5.06	
			64	2.88	8.46	9.90	-5.03	4.87	
		484T	65	3.43	8.27	10.12	-5.03	5.09	
			66	2.70	8.05	9.78	-5.03	4.75	
996T	67	3.75	8.78	11.04	-5.03	6.01			
SU	-	3.39	8.41	10.78	-5.03	5.75			
183	6 865	26T	0	-2.44	3.18	4.37	-5.03	-0.66	24
			18	-1.47	2.65	4.21	-5.03	-0.82	
			36	-1.57	2.51	4.08	-5.03	-0.95	
		52T	37	-1.78	4.21	5.33	-5.03	0.30	
			45	-1.88	3.97	5.11	-5.03	0.08	
			52	-1.04	3.57	5.00	-5.03	-0.03	
		106T	53	1.66	6.97	8.32	-5.03	3.29	
			57	1.66	6.65	8.08	-5.03	3.05	
			60	1.50	6.64	8.03	-5.03	3.00	
		242T	61	3.65	8.82	10.35	-5.03	5.32	
			62	3.66	8.69	10.26	-5.03	5.23	
			64	3.48	8.46	10.04	-5.03	5.01	
		484T	65	3.37	8.56	10.33	-5.03	5.30	
			66	3.34	8.31	10.13	-5.03	5.10	
996T	67	3.99	9.11	11.34	-5.03	6.31			
SU	-	3.56	8.70	11.04	-5.03	6.01			

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-8 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
199	6 945	26T	0	-0.25	3.69	5.30	-5.03	0.27	24
			18	0.22	3.03	5.00	-5.03	-0.03	
			36	-0.11	2.75	4.70	-5.03	-0.33	
		52T	37	-0.62	3.35	4.95	-5.03	-0.08	
			45	-1.11	2.96	4.54	-5.03	-0.49	
			52	-0.61	2.59	4.43	-5.03	-0.60	
		106T	53	2.72	6.15	8.01	-5.03	2.98	
			57	2.35	5.72	7.59	-5.03	2.56	
			60	2.11	5.51	7.37	-5.03	2.34	
		242T	61	4.68	7.95	10.01	-5.03	4.98	
			62	4.40	7.75	9.78	-5.03	4.75	
			64	4.11	7.46	9.49	-5.03	4.46	
		484T	65	4.19	7.58	9.84	-5.03	4.81	
			66	3.76	7.17	9.42	-5.03	4.39	
		996T	67	7.93	5.92	11.12	-5.03	6.09	
		SU	-	7.34	5.34	10.64	-5.03	5.61	
215	7 025	26T	0	-0.16	3.02	4.87	-5.03	-0.16	24
			18	0.13	2.26	4.47	-5.03	-0.56	
			36	0.46	2.72	4.89	-5.03	-0.14	
		52T	37	-0.66	2.73	4.51	-5.03	-0.52	
			45	-1.08	2.31	4.09	-5.03	-0.94	
			52	0.11	2.84	4.84	-5.03	-0.19	
		106T	53	2.67	5.58	7.60	-5.03	2.57	
			57	2.15	5.01	7.05	-5.03	2.02	
			60	2.85	5.58	7.67	-5.03	2.64	
		242T	61	4.54	7.21	9.47	-5.03	4.44	
			62	4.32	6.99	9.25	-5.03	4.22	
			64	4.93	7.81	9.99	-5.03	4.96	
		484T	65	4.14	6.83	9.32	-5.03	4.29	
			66	4.79	7.59	10.04	-5.03	5.01	
		996T	67	7.35	6.20	10.89	-5.03	5.86	
		SU	-	7.11	5.46	10.55	-5.03	5.52	

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE160\_MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
15	6 025	26T	0L	0.93	2.23	4.80	-5.01	-0.21	24
			0U	0.94	2.08	4.72	-5.01	-0.29	
			36U	-0.32	2.03	4.18	-5.01	-0.83	
		52T	37L	0.92	2.08	4.70	-5.01	-0.31	
			37U	1.00	1.96	4.67	-5.01	-0.34	
			52U	1.22	2.09	4.84	-5.01	-0.17	
		106T	53L	3.49	5.04	7.55	-5.01	2.54	
			53U	3.57	4.95	7.53	-5.01	2.52	
			60U	3.75	4.98	7.63	-5.01	2.62	
		242T	61L	5.40	7.05	9.69	-5.01	4.68	
			61U	5.46	6.89	9.62	-5.01	4.61	
			64U	5.62	6.90	9.70	-5.01	4.69	
		484T	65L	5.21	6.72	9.66	-5.01	4.65	
			65U	5.17	6.56	9.55	-5.01	4.54	
			66U	5.23	6.59	9.59	-5.01	4.58	
		996T	67L	4.62	6.33	9.63	-5.01	4.62	
			67U	4.71	6.12	9.54	-5.01	4.53	
2X996T	68	4.81	6.43	11.16	-5.01	6.15			
SU	-	5.43	7.11	11.10	-5.01	6.09			
47	6 185	26T	0L	1.62	2.03	5.00	-5.01	-0.01	24
			0U	1.72	2.10	5.08	-5.01	0.07	
			36U	1.37	1.80	4.76	-5.01	-0.25	
		52T	37L	1.81	1.98	5.06	-5.01	0.05	
			37U	2.32	2.09	5.37	-5.01	0.36	
			52U	2.69	2.69	5.85	-5.01	0.84	
		106T	53L	4.23	4.91	7.80	-5.01	2.79	
			53U	5.05	5.01	8.25	-5.01	3.24	
			60U	5.89	5.50	8.92	-5.01	3.91	
		242T	61L	5.80	6.72	9.67	-5.01	4.66	
			61U	6.78	7.02	10.29	-5.01	5.28	
			64U	7.62	7.34	10.87	-5.01	5.86	
		484T	65L	5.62	6.48	9.70	-5.01	4.69	
			65U	6.80	6.77	10.42	-5.01	5.41	
			66U	7.40	7.00	10.83	-5.01	5.82	
		996T	67L	5.28	6.02	9.74	-5.01	4.73	
			67U	6.51	6.49	10.57	-5.01	5.56	
2X996T	68	6.12	6.55	11.80	-5.01	6.79			
SU	-	6.83	7.13	11.73	-5.01	6.72			
79	6 345	26T	0L	0.64	1.96	4.52	-5.01	-0.49	24
			0U	-0.07	1.72	4.09	-5.01	-0.92	
			36U	3.12	2.34	5.92	-5.01	0.91	
		52T	37L	2.51	2.82	5.83	-5.01	0.82	
			37U	1.14	1.66	4.57	-5.01	-0.44	
			52U	0.70	2.03	4.58	-5.01	-0.43	
		106T	53L	5.57	5.72	8.87	-5.01	3.86	
			53U	4.87	4.69	8.00	-5.01	2.99	
			60U	4.70	4.86	8.00	-5.01	2.99	
		242T	61L	7.21	7.59	10.79	-5.01	5.78	
			61U	6.58	6.65	10.01	-5.01	5.00	
			64U	6.69	6.90	10.19	-5.01	5.18	
		484T	65L	6.89	7.12	10.64	-5.01	5.63	
			65U	6.31	6.28	9.93	-5.01	4.92	
			66U	6.35	6.31	9.96	-5.01	4.95	
		996T	67L	6.30	6.46	10.45	-5.01	5.44	
			67U	5.97	5.98	10.05	-5.01	5.04	
2X996T	68	6.42	6.41	11.88	-5.01	6.87			
SU	-	6.97	6.96	11.72	-5.01	6.71			

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U

**802.11ax HE160\_MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
111	6 505	26T	0L	-0.87	3.42	4.95	-5.05	-0.10	24
			0U	-1.40	3.44	4.83	-5.05	-0.22	
			36U	1.50	3.74	5.93	-5.05	0.88	
		52T	37L	0.49	3.49	5.40	-5.05	0.35	
			37U	-0.81	3.42	4.96	-5.05	-0.09	
			52U	-0.35	4.27	5.71	-5.05	0.66	
		106T	53L	4.66	6.46	8.87	-5.05	3.82	
			53U	3.96	6.55	8.67	-5.05	3.62	
			60U	3.85	6.73	8.74	-5.05	3.69	
		242T	61L	6.39	8.40	10.90	-5.05	5.85	
			61U	5.91	8.50	10.79	-5.05	5.74	
			64U	5.09	8.16	10.28	-5.05	5.23	
		484T	65L	5.89	8.02	10.71	-5.05	5.66	
			65U	5.69	8.34	10.84	-5.05	5.79	
			66U	5.66	8.47	10.92	-5.05	5.87	
		996T	67L	5.47	7.71	10.80	-5.05	5.75	
			67U	5.26	7.94	10.87	-5.05	5.82	
		2X996T	68	4.72	7.17	11.58	-5.05	6.53	
SU	-	5.28	7.73	11.43	-5.05	6.38			

**Notes:**

- Average power\_MIMO(dBm) =  $10\log(10(\text{ANT } 1/10) + 10(\text{ANT } 2/10))$  (dBm) + DCF(dB)
- e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)
- HE160 = HE80L + HE80U

**802.11ax HE160\_MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
143	6 665	26T	0L	-0.56	3.85	5.35	-5.03	0.32	24
			0U	-0.90	3.53	5.03	-5.03	0.00	
			36U	0.14	3.96	5.63	-5.03	0.60	
		52T	37L	-0.43	4.00	5.49	-5.03	0.46	
			37U	-1.47	3.58	4.91	-5.03	-0.12	
			52U	-1.14	3.92	5.25	-5.03	0.22	
		106T	53L	3.96	6.99	8.95	-5.03	3.92	
			53U	2.55	6.53	8.20	-5.03	3.17	
			60U	1.91	6.81	8.24	-5.03	3.21	
		242T	61L	5.55	8.84	10.89	-5.03	5.86	
			61U	4.61	8.52	10.38	-5.03	5.35	
			64U	4.04	8.70	10.36	-5.03	5.33	
		484T	65L	5.19	8.41	10.72	-5.03	5.69	
			65U	4.22	8.30	10.35	-5.03	5.32	
			66U	3.80	8.34	10.27	-5.03	5.24	
		996T	67L	4.34	7.88	10.53	-5.03	5.50	
67U	3.38		7.87	10.25	-5.03	5.22			
2X996T	68	3.07	7.14	11.03	-5.03	6.00			
SU	-	3.70	7.78	10.95	-5.03	5.92			
175	6 825	26T	0L	-0.54	4.43	5.79	-5.03	0.76	
			0U	-1.20	4.33	5.56	-5.03	0.53	
			36U	0.01	4.17	5.74	-5.03	0.71	
		52T	37L	-0.92	4.66	5.87	-5.03	0.84	
			37U	-1.54	4.44	5.57	-5.03	0.54	
			52U	-1.18	4.42	5.63	-5.03	0.60	
		106T	53L	2.57	7.49	8.91	-5.03	3.88	
			53U	1.82	7.24	8.55	-5.03	3.52	
			60U	2.02	7.21	8.57	-5.03	3.54	
		242T	61L	4.39	9.28	10.88	-5.03	5.85	
			61U	3.81	8.95	10.49	-5.03	5.46	
			64U	3.96	9.17	10.69	-5.03	5.66	
		484T	65L	4.01	9.14	10.92	-5.03	5.89	
			65U	3.66	8.73	10.53	-5.03	5.50	
			66U	3.70	8.84	10.62	-5.03	5.59	
		996T	67L	3.41	8.55	10.77	-5.03	5.74	
67U	3.24		8.39	10.61	-5.03	5.58			
2X996T	68	2.51	7.73	11.32	-5.03	6.29			
SU	-	3.13	8.31	11.20	-5.03	6.17			

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U

**802.11ax HE160\_MIMO in the UNII-8 band**


Channel	Frequency (MHz)	Tones	RU offset	Average power ANT 1 (dBm)	Average power ANT 2 (dBm)	Average power MIMO (dBm)	Directional ANT gain (dBi)	Max e.i.r.p. (dBm)	Limit (dBm)
207	6 985	26T	0L	0.91	3.91	5.83	-5.03	0.80	24
			0U	-0.09	2.91	4.83	-5.03	-0.20	
			36U	0.35	2.60	4.79	-5.03	-0.24	
		52T	37L	0.66	4.00	5.80	-5.03	0.77	
			37U	-0.33	2.95	4.77	-5.03	-0.26	
			52U	0.13	2.67	4.74	-5.03	-0.29	
		106T	53L	4.02	6.74	8.81	-5.03	3.78	
			53U	2.82	5.78	7.77	-5.03	2.74	
			60U	2.97	5.56	7.68	-5.03	2.65	
		242T	61L	5.86	8.49	10.76	-5.03	5.73	
			61U	4.70	7.48	9.70	-5.03	4.67	
			64U	4.89	7.56	9.82	-5.03	4.79	
		484T	65L	5.49	8.06	10.59	-5.03	5.56	
			65U	4.06	6.73	9.23	-5.03	4.20	
			66U	4.47	7.13	9.63	-5.03	4.60	
		996T	67L	4.67	7.27	10.23	-5.03	5.20	
			67U	3.38	6.09	9.01	-5.03	3.98	
		2X996T	68	6.28	5.03	11.16	-5.03	6.13	
SU	-	6.97	5.70	11.13	-5.03	6.10			

**Notes:**

1. Average power\_MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Average power\_MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U

## 7.2. Maximum e.i.r.p. Spectral Density

### Test setup



### Limit

According to §15.407(a)(8), RSS-248 4.6.3. a,

Band	Maximum e.i.r.p. Spectral Density limit
UNII-5, 6, 7, 8	< -1 dBm/MHz

### Test procedure

ANSI C63.10-2013 Section 12.3.2.2, 14.3.2.2

KDB 789033 D02 v02r01 - Section F

KDB 662911 D01 v02r01 - Section E). 2) and Section F)

### Test settings

#### Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Search function on the instrument to find the peak of the spectrum and record its value.
3. Adjustments to the peak value of the spectrum, if applicable:
  - a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.
  - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1MHz reference bandwidth
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth(i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
  - a) Set  $RBW \geq 1/T$ , where  $T$  is defined in II.B.I.a).

- b) Set  $VBW \geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz} / \text{RBW})$  to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log(1 \text{ MHz} / \text{RBW})$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

**Note:**

Please refer to Appendix B for plots.





### Test results

#### 802.11a MIMO in the UNII-5 band

Channel	Frequency (MHz)	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
1	5 955	-0.90	-2.57	1.69	-5.01	-3.32	-1
45	6 175	-1.44	-2.75	1.29	-5.01	-3.72	
93	6 415	-0.91	-3.24	1.42	-5.01	-3.59	

#### 802.11a MIMO in the UNII-6 band

Channel	Frequency (MHz)	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
97	6 435	-1.10	-3.50	1.20	-5.05	-3.85	-1
105	6 475	-0.49	-2.53	1.95	-5.05	-3.10	
113	6 515	-0.41	-2.14	2.15	-5.05	-2.90	

#### 802.11a MIMO in the UNII-7 band

Channel	Frequency (MHz)	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
117	6 535	-1.18	-2.60	1.51	-5.03	-3.52	-1
149	6 695	-0.26	-2.75	2.01	-5.03	-3.02	
185	6 875	-0.81	-2.53	1.75	-5.03	-3.28	

#### 802.11a MIMO in the UNII-8 band

Channel	Frequency (MHz)	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
189	6 895	-0.69	-2.74	1.75	-5.03	-3.28	-1
209	6 995	-1.65	-2.83	1.14	-5.03	-3.89	
233	7 115	-1.53	-2.81	1.22	-5.03	-3.81	

#### Notes:

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
1	5 955	26T	0	-1.88	0.27	2.45	-5.01	-2.56	-1
			4	-3.60	-1.05	0.98	-5.01	-4.03	
			8	-2.70	0.19	2.10	-5.01	-2.91	
		52T	37	-4.47	-2.45	-0.21	-5.01	-5.22	
			38	-5.02	-2.75	-0.61	-5.01	-5.62	
			40	-5.28	-2.59	-0.60	-5.01	-5.61	
		106T	53	-4.54	-2.57	-0.22	-5.01	-5.23	
			54	-4.62	-2.54	-0.24	-5.01	-5.25	
		242T	61	-1.57	-3.65	0.95	-5.01	-4.06	
		SU	-	-1.46	-3.69	1.00	-5.01	-4.01	
45	6 175	26T	0	-1.24	-0.64	2.19	-5.01	-2.82	
			4	-3.47	-2.13	0.37	-5.01	-4.64	
			8	-1.83	-0.42	2.05	-5.01	-2.96	
		52T	37	-3.14	-3.73	-0.29	-5.01	-5.30	
			38	-3.52	-3.92	-0.59	-5.01	-5.60	
			40	-3.63	-3.50	-0.43	-5.01	-5.44	
		106T	53	-3.11	-3.66	-0.16	-5.01	-5.17	
			54	-3.05	-3.63	-0.11	-5.01	-5.12	
		242T	61	-2.36	-4.11	0.29	-5.01	-4.72	
		SU	-	-2.36	-4.23	0.24	-5.01	-4.77	
93	6 415	26T	0	-3.31	0.05	1.81	-5.01	-3.20	
			4	-3.38	-1.98	0.50	-5.01	-4.51	
			8	-0.87	-0.46	2.46	-5.01	-2.55	
		52T	37	-5.36	-3.63	-1.28	-5.01	-6.29	
			38	-3.29	-3.44	-0.23	-5.01	-5.24	
			40	-3.16	-3.20	-0.05	-5.01	-5.06	
		106T	53	-3.43	-3.47	-0.23	-5.01	-5.24	
			54	-3.20	-3.24	0.00	-5.01	-5.01	
		242T	61	-2.02	-4.38	0.40	-5.01	-4.61	
		SU	-	-1.79	-4.33	0.55	-5.01	-4.46	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
97	6 435	26T	0	-4.37	-0.20	1.32	-5.05	-3.73	-1
			4	-3.26	-1.32	0.94	-5.05	-4.11	
			8	-1.74	-0.48	2.06	-5.05	-2.99	
		52T	37	-5.54	-2.66	-0.74	-5.05	-5.79	
			38	-3.23	-2.56	0.25	-5.05	-4.80	
			40	-3.16	-2.41	0.36	-5.05	-4.69	
		106T	53	-3.33	-2.65	0.24	-5.05	-4.81	
			54	-3.20	-2.42	0.43	-5.05	-4.62	
		242T	61	-2.40	-4.35	0.17	-5.05	-4.88	
		SU	-	-1.92	-4.40	0.44	-5.05	-4.61	
105	6 475	26T	0	-4.38	-0.22	1.30	-5.05	-3.75	-1
			4	-3.02	-0.95	1.26	-5.05	-3.79	
			8	-1.37	-0.42	2.25	-5.05	-2.80	
		52T	37	-6.03	-2.64	-0.88	-5.05	-5.93	
			38	-3.36	-2.36	0.30	-5.05	-4.75	
			40	-2.97	-2.07	0.63	-5.05	-4.42	
		106T	53	-3.37	-2.40	0.36	-5.05	-4.69	
			54	-3.10	-2.11	0.64	-5.05	-4.41	
		242T	61	-1.71	-3.53	0.91	-5.05	-4.14	
		SU	-	-1.61	-3.57	0.95	-5.05	-4.10	
113	6 515	26T	0	-4.32	0.03	1.50	-5.05	-3.55	-1
			4	-3.03	-0.99	1.23	-5.05	-3.82	
			8	-1.35	-0.11	2.43	-5.05	-2.62	
		52T	37	-6.85	-2.60	-1.09	-5.05	-6.14	
			38	-3.66	-2.37	0.16	-5.05	-4.89	
			40	-3.36	-1.96	0.53	-5.05	-4.52	
		106T	53	-3.68	-2.34	0.26	-5.05	-4.79	
			54	-3.31	-1.93	0.65	-5.05	-4.40	
		242T	61	-1.36	-3.25	1.24	-5.05	-3.81	
		SU	-	-1.53	-3.46	1.04	-5.05	-4.01	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
117	6 535	26T	0	-4.47	-0.40	1.15	-5.03	-3.88	-1
			4	-3.35	-1.42	0.84	-5.03	-4.19	
			8	-1.42	-0.04	2.44	-5.03	-2.59	
		52T	37	-6.93	-2.18	-0.81	-5.03	-5.84	
			38	-3.71	-1.90	0.42	-5.03	-4.61	
			40	-3.46	-2.08	0.41	-5.03	-4.62	
		106T	53	-3.58	-2.35	0.30	-5.03	-4.73	
			54	-3.34	-2.07	0.56	-5.03	-4.47	
		242T	61	-2.14	-4.42	0.31	-5.03	-4.72	
		SU	-	-2.00	-4.53	0.35	-5.03	-4.68	
149	6 695	26T	0	-3.95	0.38	1.85	-5.03	-3.18	
			4	-4.31	-1.02	0.76	-5.03	-4.27	
			8	-3.05	0.31	2.07	-5.03	-2.96	
		52T	37	-6.17	-1.34	0.01	-5.03	-5.02	
			38	-5.50	-1.29	0.23	-5.03	-4.80	
			40	-5.25	-1.30	0.29	-5.03	-4.74	
		106T	53	-5.59	-1.19	0.37	-5.03	-4.66	
			54	-5.28	-1.21	0.44	-5.03	-4.59	
		242T	61	-1.42	-4.01	0.92	-5.03	-4.11	
		SU	-	-0.96	-3.93	1.23	-5.03	-3.80	
185	6 875	26T	0	-4.30	0.68	1.99	-5.03	-3.04	
			4	-5.08	-0.90	0.61	-5.03	-4.42	
			8	-3.52	0.23	1.87	-5.03	-3.16	
		52T	37	-6.46	-1.22	0.04	-5.03	-4.99	
			38	-6.15	-1.54	-0.13	-5.03	-5.16	
			40	-5.65	-1.50	0.03	-5.03	-5.00	
		106T	53	-6.16	-0.91	0.43	-5.03	-4.60	
			54	-5.71	-1.21	0.32	-5.03	-4.71	
		242T	61	-1.93	-3.42	0.83	-5.03	-4.20	
		SU	-	-1.93	-3.38	0.84	-5.03	-4.19	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE20 MIMO in the UNII-8 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
189	6 895	26T	0	-3.14	-0.02	1.81	-5.03	-3.22	-1
			4	-3.89	-1.66	0.49	-5.03	-4.54	
			8	-2.51	-0.27	1.87	-5.03	-3.16	
		52T	37	-5.19	-1.64	0.07	-5.03	-4.96	
			38	-4.88	-2.02	-0.09	-5.03	-5.12	
			40	-4.49	-2.11	-0.01	-5.03	-5.04	
		106T	53	-4.99	-1.97	0.00	-5.03	-5.03	
			54	-4.51	-1.97	0.16	-5.03	-4.87	
		242T	61	-1.90	-3.57	0.79	-5.03	-4.24	
		SU	-	-1.87	-3.70	0.74	-5.03	-4.29	
209	6 995	26T	0	-2.59	-0.64	1.61	-5.03	-3.42	
			4	-3.55	-2.04	0.39	-5.03	-4.64	
			8	-2.29	-0.93	1.56	-5.03	-3.47	
		52T	37	-5.80	-3.31	-1.25	-5.03	-6.28	
			38	-5.93	-3.54	-1.44	-5.03	-6.47	
			40	-5.52	-3.60	-1.32	-5.03	-6.35	
		106T	53	-5.98	-3.36	-1.26	-5.03	-6.29	
			54	-5.71	-3.52	-1.26	-5.03	-6.29	
		242T	61	-2.95	-4.30	-0.13	-5.03	-5.16	
		SU	-	-2.72	-4.47	-0.08	-5.03	-5.11	
233	7 115	26T	0	-4.56	-2.33	-0.18	-5.03	-5.21	
			4	-5.68	-4.05	-1.67	-5.03	-6.70	
			8	-4.43	-3.00	-0.54	-5.03	-5.57	
		52T	37	-5.55	-3.07	-1.01	-5.03	-6.04	
			38	-5.89	-3.43	-1.36	-5.03	-6.39	
			40	-5.28	-3.44	-1.13	-5.03	-6.16	
		106T	53	-5.54	-3.10	-0.93	-5.03	-5.96	
			54	-5.31	-3.27	-0.95	-5.03	-5.98	
		242T	61	-3.52	-3.71	-0.17	-5.03	-5.20	
		SU	-	-3.55	-3.58	-0.13	-5.03	-5.16	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
3	5 965	26T	0	-2.04	-0.29	2.05	-5.01	-2.96	
			9	-2.59	-0.30	1.83	-5.01	-3.18	
			17	-3.14	-0.34	1.61	-5.01	-3.40	
		52T	37	-4.51	-2.89	-0.46	-5.01	-5.47	
			41	-4.90	-3.21	-0.81	-5.01	-5.82	
			44	-5.21	-3.08	-0.86	-5.01	-5.87	
		106T	53	-4.72	-3.00	-0.52	-5.01	-5.53	
			54	-4.84	-3.22	-0.69	-5.01	-5.70	
			56	-4.72	-3.12	-0.59	-5.01	-5.60	
		242T	61	-6.43	-4.78	-2.14	-5.01	-7.15	
			62	-6.32	-4.78	-2.09	-5.01	-7.10	
		484T	65	-7.70	-5.70	-2.87	-5.01	-7.88	
		SU	-	-7.51	-5.56	-2.76	-5.01	-7.77	
		43	6 165	26T	0	-1.27	-1.16	1.92	
9	-2.01				-1.41	1.43	-5.01	-3.58	
17	-1.93				-1.11	1.63	-5.01	-3.38	
52T	37			-3.42	-4.05	-0.56	-5.01	-5.57	
	41			-3.61	-4.27	-0.77	-5.01	-5.78	
	44			-3.39	-3.95	-0.50	-5.01	-5.51	
106T	53			-3.44	-4.08	-0.49	-5.01	-5.50	
	54			-3.45	-4.35	-0.62	-5.01	-5.63	
	56			-3.14	-4.06	-0.32	-5.01	-5.33	
242T	61			-5.14	-5.85	-2.09	-5.01	-7.10	
	62			-4.85	-5.84	-1.93	-5.01	-6.94	
484T	65			-6.15	-6.97	-2.82	-5.01	-7.83	
SU	-			-6.01	-6.83	-2.73	-5.01	-7.74	
91	6 405			26T	0	-2.99	-0.45	1.59	-5.01
		9	-3.29		-0.73	1.31	-5.01	-3.70	
		17	-0.81		-1.21	2.12	-5.01	-2.89	
		52T	37	-3.50	-3.42	-0.30	-5.01	-5.31	
			41	-4.81	-3.60	-1.00	-5.01	-6.01	
			44	-2.53	-3.04	0.38	-5.01	-4.63	
		106T	53	-3.34	-4.30	-0.53	-5.01	-5.54	
			54	-3.56	-4.20	-0.61	-5.01	-5.62	
			56	-3.54	-4.24	-0.62	-5.01	-5.63	
		242T	61	-4.23	-5.15	-1.28	-5.01	-6.29	
			62	-4.17	-4.93	-1.14	-5.01	-6.15	
		484T	65	-6.23	-7.08	-2.91	-5.01	-7.92	
		SU	-	-6.09	-6.81	-2.76	-5.01	-7.77	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
99	6 445	26T	0	-4.54	-0.36	1.16	-5.05	-3.89	
			9	-4.62	-0.35	1.15	-5.05	-3.90	
			17	-1.56	-0.84	1.95	-5.05	-3.10	
		52T	37	-4.94	-2.95	-0.67	-5.05	-5.72	
			41	-6.60	-3.18	-1.40	-5.05	-6.45	
			44	-3.14	-2.44	0.38	-5.05	-4.67	
		106T	53	-4.37	-3.96	-0.90	-5.05	-5.95	
			54	-4.46	-4.14	-1.04	-5.05	-6.09	
			56	-4.36	-3.74	-0.78	-5.05	-5.83	
		242T	61	-5.19	-4.66	-1.53	-5.05	-6.58	
			62	-5.22	-4.42	-1.41	-5.05	-6.46	
		484T	65	-7.23	-6.61	-3.19	-5.05	-8.24	
		SU	-	-7.08	-6.47	-3.09	-5.05	-8.14	
107	6 485	26T	0	-4.82	-0.33	1.11	-5.05	-3.94	-1
			9	-4.23	-0.13	1.42	-5.05	-3.63	
			17	-1.76	-0.64	1.97	-5.05	-3.08	
		52T	37	-5.76	-2.77	-0.85	-5.05	-5.90	
			41	-7.12	-2.80	-1.28	-5.05	-6.33	
			44	-3.58	-2.22	0.31	-5.05	-4.74	
		106T	53	-4.58	-3.56	-0.78	-5.05	-5.83	
			54	-4.74	-3.69	-0.92	-5.05	-5.97	
			56	-4.72	-3.47	-0.79	-5.05	-5.84	
		242T	61	-5.46	-4.35	-1.48	-5.05	-6.53	
			62	-5.48	-4.17	-1.39	-5.05	-6.44	
		484T	65	-7.46	-6.15	-3.04	-5.05	-8.09	
		SU	-	-7.18	-6.13	-2.95	-5.05	-8.00	
115	6 525	26T	0	-4.65	0.01	1.41	-5.05	-3.64	
			9	-3.66	0.03	1.70	-5.05	-3.35	
			17	-1.75	-0.13	2.27	-5.05	-2.78	
		52T	37	-6.53	-2.46	-0.87	-5.05	-5.92	
			41	-6.90	-2.44	-0.96	-5.05	-6.01	
			44	-3.60	-2.15	0.35	-5.05	-4.70	
		106T	53	-4.84	-3.32	-0.75	-5.05	-5.80	
			54	-4.96	-3.29	-0.78	-5.05	-5.83	
			56	-4.69	-3.12	-0.57	-5.05	-5.62	
		242T	61	-5.65	-4.14	-1.44	-5.05	-6.49	
			62	-5.59	-3.79	-1.21	-5.05	-6.26	
		484T	65	-7.54	-5.93	-2.94	-5.05	-7.99	
		SU	-	-7.32	-5.88	-2.87	-5.05	-7.92	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE40 MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
123	6 565	26T	0	-4.29	0.30	1.72	-5.03	-3.31	
			9	-3.47	0.20	1.87	-5.03	-3.16	
			17	-1.81	-0.23	2.18	-5.03	-2.85	
		52T	37	-6.55	-2.17	-0.67	-5.03	-5.70	
			41	-6.56	-2.26	-0.74	-5.03	-5.77	
			44	-3.62	-1.78	0.56	-5.03	-4.47	
		106T	53	-4.66	-3.10	-0.55	-5.03	-5.58	
			54	-4.86	-3.19	-0.68	-5.03	-5.71	
			56	-4.78	-2.85	-0.45	-5.03	-5.48	
		242T	61	-5.58	-3.91	-1.27	-5.03	-6.30	
			62	-5.66	-3.53	-1.08	-5.03	-6.11	
		484T	65	-7.63	-5.77	-2.88	-5.03	-7.91	
		SU	-	-7.52	-5.61	-2.79	-5.03	-7.82	
147	6 685	26T	0	-4.22	0.99	2.25	-5.03	-2.78	-1
			9	-3.61	0.55	2.08	-5.03	-2.95	
			17	-2.83	0.87	2.53	-5.03	-2.50	
		52T	37	-7.25	-1.71	-0.49	-5.03	-5.52	
			41	-6.63	-1.95	-0.53	-5.03	-5.56	
			44	-5.91	-1.61	-0.09	-5.03	-5.12	
		106T	53	-6.39	-2.71	-0.91	-5.03	-5.94	
			54	-6.50	-2.71	-0.94	-5.03	-5.97	
			56	-7.14	-2.74	-1.14	-5.03	-6.17	
		242T	61	-7.02	-3.37	-1.43	-5.03	-6.46	
			62	-7.36	-3.50	-1.62	-5.03	-6.65	
		484T	65	-9.22	-5.57	-3.30	-5.03	-8.33	
		SU	-	-9.12	-5.41	-3.21	-5.03	-8.24	
179	6 845	26T	0	-5.15	0.17	1.41	-5.03	-3.62	
			9	-4.78	-0.20	1.22	-5.03	-3.81	
			17	-3.98	-0.16	1.47	-5.03	-3.56	
		52T	37	-7.07	-1.16	-0.02	-5.03	-5.05	
			41	-6.79	-1.55	-0.26	-5.03	-5.29	
			44	-5.90	-1.53	-0.03	-5.03	-5.06	
		106T	53	-7.09	-2.36	-0.85	-5.03	-5.88	
			54	-7.15	-2.49	-0.96	-5.03	-5.99	
			56	-7.15	-2.57	-1.02	-5.03	-6.05	
		242T	61	-7.87	-3.15	-1.51	-5.03	-6.54	
			62	-7.61	-3.38	-1.61	-5.03	-6.64	
		484T	65	-9.98	-5.19	-3.24	-5.03	-8.27	
		SU	-	-10.01	-5.03	-3.17	-5.03	-8.20	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)



**802.11ax HE40 MIMO in the UNII-8 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
187	6 885	26T	0	-5.16	0.11	1.36	-5.03	-3.67	
			9	-5.02	-0.23	1.13	-5.03	-3.90	
			17	-4.19	-0.46	1.19	-5.03	-3.84	
		52T	37	-7.04	-1.36	-0.17	-5.03	-5.20	
			41	-6.97	-1.67	-0.40	-5.03	-5.43	
			44	-6.17	-1.83	-0.32	-5.03	-5.35	
		106T	53	-7.07	-2.50	-0.95	-5.03	-5.98	
			54	-7.30	-2.69	-1.15	-5.03	-6.18	
			56	-7.29	-2.69	-1.15	-5.03	-6.18	
		242T	61	-7.79	-3.42	-1.69	-5.03	-6.72	
			62	-7.90	-3.55	-1.81	-5.03	-6.84	
		484T	65	-10.13	-5.31	-3.36	-5.03	-8.39	
		SU	-	-10.13	-5.30	-3.41	-5.03	-8.44	
		203	6 965	26T	0	-3.44	0.37	2.00	
9	-3.57				-0.17	1.58	-5.03	-3.45	
17	-3.16				-0.22	1.68	-5.03	-3.35	
52T	37			-6.34	-2.36	-0.75	-5.03	-5.78	
	41			-6.41	-2.85	-1.11	-5.03	-6.14	
	44			-6.12	-2.81	-1.00	-5.03	-6.03	
106T	53			-5.59	-2.52	-0.53	-5.03	-5.56	
	54			-5.86	-2.79	-0.80	-5.03	-5.83	
	56			-6.19	-2.92	-0.99	-5.03	-6.02	
242T	61			-7.26	-4.23	-2.10	-5.03	-7.13	
	62			-7.75	-4.58	-2.49	-5.03	-7.52	
484T	65			-5.83	-7.40	-2.82	-5.03	-7.85	
SU	-			-6.31	-7.79	-3.32	-5.03	-8.35	
227	7 085			26T	0	-2.45	-0.06	2.04	-5.03
		9	-2.66		-0.59	1.63	-5.03	-3.40	
		17	-2.58		-0.73	1.57	-5.03	-3.46	
		52T	37	-5.35	-2.61	-0.61	-5.03	-5.64	
			41	-5.44	-3.02	-0.90	-5.03	-5.93	
			44	-5.40	-3.16	-0.98	-5.03	-6.01	
		106T	53	-5.33	-2.79	-0.62	-5.03	-5.65	
			54	-5.59	-3.01	-0.85	-5.03	-5.88	
			56	-5.58	-3.06	-0.88	-5.03	-5.91	
		242T	61	-6.80	-4.42	-2.06	-5.03	-7.09	
			62	-6.95	-4.76	-2.33	-5.03	-7.36	
		484T	65	-7.31	-7.59	-3.73	-5.03	-8.76	
		SU	-	-7.87	-7.88	-4.20	-5.03	-9.23	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
7	5 985	26T	0	-1.97	-0.63	1.90	-5.01	-3.11	-1
			18	-3.79	-2.05	0.32	-5.01	-4.69	
			36	-2.55	-0.10	2.00	-5.01	-3.01	
		52T	37	-4.66	-3.50	-0.89	-5.01	-5.90	
			45	-4.76	-3.83	-1.12	-5.01	-6.13	
			52	-5.31	-3.95	-1.43	-5.01	-6.44	
		106T	53	-4.91	-3.62	-0.98	-5.01	-5.99	
			57	-5.06	-4.04	-1.28	-5.01	-6.29	
			60	-4.86	-3.94	-1.14	-5.01	-6.15	
		242T	61	-6.58	-5.36	-2.54	-5.01	-7.55	
			62	-6.58	-5.48	-2.60	-5.01	-7.61	
			64	-6.58	-5.74	-2.75	-5.01	-7.76	
		484T	65	-9.76	-8.60	-5.51	-5.01	-10.52	
66	-9.78		-8.98	-5.73	-5.01	-10.74			
996T	67	-11.22	-9.92	-6.44	-5.01	-11.45			
SU	-	-11.15	-9.95	-6.32	-5.01	-11.33			
39	6 145	26T	0	-1.92	-1.30	1.55	-5.01	-3.46	
			18	-3.04	-1.32	1.05	-5.01	-3.96	
			36	-2.02	-1.06	1.64	-5.01	-3.37	
		52T	37	-4.32	-4.29	-1.15	-5.01	-6.16	
			45	-3.81	-4.11	-0.81	-5.01	-5.82	
			52	-3.72	-3.99	-0.70	-5.01	-5.71	
		106T	53	-4.48	-4.43	-1.21	-5.01	-6.22	
			57	-3.93	-4.23	-0.84	-5.01	-5.85	
			60	-3.49	-4.09	-0.54	-5.01	-5.55	
		242T	61	-6.09	-6.12	-2.71	-5.01	-7.72	
			62	-5.85	-6.10	-2.58	-5.01	-7.59	
			64	-5.33	-5.73	-2.14	-5.01	-7.15	
		484T	65	-9.20	-9.30	-5.62	-5.01	-10.63	
66	-8.59		-9.13	-5.22	-5.01	-10.23			
996T	67	-10.01	-10.36	-6.10	-5.01	-11.11			
SU	-	-10.31	-10.44	-6.18	-5.01	-11.19			
87	6 385	26T	0	-2.21	-0.40	1.94	-5.01	-3.07	
			18	-2.40	-1.59	1.17	-5.01	-3.84	
			36	-0.71	-1.20	2.20	-5.01	-2.81	
		52T	37	-2.76	-3.09	0.23	-5.01	-4.78	
			45	-3.22	-3.49	-0.20	-5.01	-5.21	
			52	-2.38	-3.45	0.27	-5.01	-4.74	
		106T	53	-3.03	-3.95	-0.23	-5.01	-5.24	
			57	-3.47	-4.28	-0.62	-5.01	-5.63	
			60	-3.49	-4.25	-0.61	-5.01	-5.62	
		242T	61	-4.70	-5.64	-1.75	-5.01	-6.76	
			62	-4.91	-5.85	-1.96	-5.01	-6.97	
			64	-5.01	-5.94	-2.06	-5.01	-7.07	
		484T	65	-7.91	-8.90	-4.75	-5.01	-9.76	
66	-8.26		-9.08	-5.02	-5.01	-10.03			
996T	67	-9.53	-10.27	-5.80	-5.01	-10.81			
SU	-	-9.56	-10.31	-5.73	-5.01	-10.74			

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
103	6 465	26T	0	-4.84	-0.38	1.09	-5.05	-3.96	-1
			18	-3.14	-1.25	1.06	-5.05	-3.99	
			36	-1.92	-0.80	1.83	-5.05	-3.22	
		52T	37	-5.35	-3.34	-1.08	-5.05	-6.13	
			45	-5.60	-3.15	-1.05	-5.05	-6.10	
			52	-3.86	-2.55	-0.01	-5.05	-5.06	
		106T	53	-3.84	-3.22	-0.28	-5.05	-5.33	
			57	-4.11	-2.93	-0.24	-5.05	-5.29	
			60	-4.11	-2.88	-0.21	-5.05	-5.26	
		242T	61	-5.76	-4.88	-1.91	-5.05	-6.96	
			62	-6.00	-4.91	-2.03	-5.05	-7.08	
			64	-5.95	-4.45	-1.75	-5.05	-6.80	
		484T	65	-8.90	-8.14	-4.87	-5.05	-9.92	
			66	-9.04	-7.75	-4.72	-5.05	-9.77	
		996T	67	-11.43	-10.05	-6.61	-5.05	-11.66	
		SU	-	-11.35	-10.14	-6.51	-5.05	-11.56	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
119	6 545	26T	0	-4.81	-0.02	1.36	-5.03	-3.67	-1
			18	-2.70	-0.64	1.60	-5.03	-3.43	
			36	-1.95	-0.06	2.25	-5.03	-2.78	
		52T	37	-6.57	-2.80	-1.14	-5.03	-6.17	
			45	-6.60	-2.44	-0.89	-5.03	-5.92	
			52	-3.95	-1.89	0.35	-5.03	-4.68	
		106T	53	-4.11	-2.56	-0.03	-5.03	-5.06	
			57	-4.02	-2.36	0.13	-5.03	-4.90	
			60	-4.11	-2.02	0.30	-5.03	-4.73	
		242T	61	-5.75	-4.29	-1.57	-5.03	-6.60	
			62	-5.70	-4.12	-1.45	-5.03	-6.48	
			64	-5.81	-3.80	-1.30	-5.03	-6.33	
		484T	65	-8.95	-7.42	-4.49	-5.03	-9.52	
66	-8.98		-7.11	-4.31	-5.03	-9.34			
996T	67	-11.33	-9.48	-6.23	-5.03	-11.26			
SU	-	-11.15	-9.30	-5.94	-5.03	-10.97			
151	6 705	26T	0	-4.48	0.78	2.05	-5.03	-2.98	-1
			18	-4.31	-0.54	1.12	-5.03	-3.91	
			36	-3.94	0.65	2.09	-5.03	-2.94	
		52T	37	-7.50	-1.83	-0.65	-5.03	-5.68	
			45	-8.24	-2.13	-1.04	-5.03	-6.07	
			52	-6.91	-1.85	-0.53	-5.03	-5.56	
		106T	53	-5.54	-1.86	-0.08	-5.03	-5.11	
			57	-6.55	-2.13	-0.56	-5.03	-5.59	
			60	-7.01	-2.09	-0.65	-5.03	-5.68	
		242T	61	-7.19	-3.50	-1.57	-5.03	-6.60	
			62	-7.52	-3.65	-1.78	-5.03	-6.81	
			64	-8.45	-3.81	-2.15	-5.03	-7.18	
		484T	65	-10.52	-6.78	-4.63	-5.03	-9.66	
66	-11.56		-7.10	-5.15	-5.03	-10.18			
996T	67	-12.67	-9.16	-6.49	-5.03	-11.52			
SU	-	-13.00	-9.09	-6.43	-5.03	-11.46			
183	6 865	26T	0	-5.30	0.31	1.50	-5.03	-3.53	-1
			18	-5.30	-1.34	0.27	-5.03	-4.76	
			36	-4.39	-0.43	1.18	-5.03	-3.85	
		52T	37	-7.33	-1.46	-0.32	-5.03	-5.35	
			45	-7.50	-1.74	-0.58	-5.03	-5.61	
			52	-6.34	-2.15	-0.61	-5.03	-5.64	
		106T	53	-6.40	-1.71	-0.21	-5.03	-5.24	
			57	-6.34	-2.04	-0.44	-5.03	-5.47	
			60	-6.69	-2.19	-0.64	-5.03	-5.67	
		242T	61	-7.97	-3.36	-1.69	-5.03	-6.72	
			62	-7.79	-3.52	-1.76	-5.03	-6.79	
			64	-8.06	-3.80	-2.04	-5.03	-7.07	
		484T	65	-11.13	-6.59	-4.66	-5.03	-9.69	
66	-11.24		-6.90	-4.92	-5.03	-9.95			
996T	67	-13.51	-8.77	-6.44	-5.03	-11.47			
SU	-	-13.48	-8.90	-6.42	-5.03	-11.45			

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE80 MIMO in the UNII-8 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
199	6 945	26T	0	-2.87	0.75	2.46	-5.03	-2.57	-1
			18	-3.42	-1.00	1.11	-5.03	-3.92	
			36	-3.01	-0.21	1.76	-5.03	-3.27	
		52T	37	-5.83	-2.12	-0.44	-5.03	-5.47	
			45	-6.40	-2.53	-0.90	-5.03	-5.93	
			52	-5.95	-2.98	-1.07	-5.03	-6.10	
		106T	53	-5.14	-2.36	-0.29	-5.03	-5.32	
			57	-5.58	-2.88	-0.78	-5.03	-5.81	
			60	-6.21	-3.09	-1.14	-5.03	-6.17	
		242T	61	-6.77	-4.14	-1.87	-5.03	-6.90	
			62	-7.10	-4.31	-2.09	-5.03	-7.12	
			64	-7.55	-4.76	-2.54	-5.03	-7.57	
		484T	65	-10.08	-7.37	-4.89	-5.03	-9.92	
			66	-10.44	-7.80	-5.29	-5.03	-10.32	
		996T	67	-8.94	-11.37	-5.91	-5.03	-10.94	
		SU	-	-9.45	-11.67	-6.23	-5.03	-11.26	
215	7 025	26T	0	-3.48	0.14	1.85	-5.03	-3.18	
			18	-4.93	-2.39	-0.33	-5.03	-5.36	
			36	-3.45	-0.66	1.32	-5.03	-3.71	
		52T	37	-6.13	-2.84	-1.03	-5.03	-6.06	
			45	-7.32	-4.15	-2.30	-5.03	-7.33	
			52	-6.19	-3.43	-1.44	-5.03	-6.47	
		106T	53	-5.23	-3.02	-0.75	-5.03	-5.78	
			57	-6.85	-4.42	-2.23	-5.03	-7.26	
			60	-6.05	-3.50	-1.35	-5.03	-6.38	
		242T	61	-6.99	-4.64	-2.27	-5.03	-7.30	
			62	-8.01	-5.56	-3.22	-5.03	-8.25	
			64	-7.60	-5.19	-2.84	-5.03	-7.87	
		484T	65	-10.32	-7.94	-5.34	-5.03	-10.37	
			66	-10.76	-8.48	-5.84	-5.03	-10.87	
		996T	67	-9.67	-11.06	-6.23	-5.03	-11.26	
		SU	-	-10.85	-11.90	-7.15	-5.03	-12.18	

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)

**802.11ax HE160\_MIMO in the UNII-5 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
15	6 025	26T	0L	-2.12	-0.71	1.81	-5.01	-3.20	-1
			0U	-1.97	-0.77	1.84	-5.01	-3.17	
			36U	-3.02	-0.95	1.31	-5.01	-3.70	
		52T	37L	-4.80	-3.69	-1.05	-5.01	-6.06	
			37U	-4.66	-3.82	-1.06	-5.01	-6.07	
			52U	-4.17	-3.55	-0.69	-5.01	-5.70	
		106T	53L	-5.03	-3.78	-1.14	-5.01	-6.15	
			53U	-4.79	-3.93	-1.12	-5.01	-6.13	
			60U	-4.49	-3.88	-0.95	-5.01	-5.96	
		242T	61L	-6.58	-5.27	-2.49	-5.01	-7.50	
			61U	-6.39	-5.53	-2.55	-5.01	-7.56	
			64U	-5.98	-5.53	-2.36	-5.01	-7.37	
		484T	65L	-9.76	-8.66	-5.54	-5.01	-10.55	
			65U	-9.70	-8.86	-5.63	-5.01	-10.64	
			66U	-9.38	-8.79	-5.44	-5.01	-10.45	
		996T	67L	-13.47	-12.26	-8.75	-5.01	-13.76	
			67U	-13.02	-12.28	-8.56	-5.01	-13.57	
2X996T	68	-15.29	-14.13	-9.21	-5.01	-14.22			
SU	-	-14.71	-13.53	-9.33	-5.01	-14.34			
47	6 185	26T	0L	-1.18	-0.85	2.16	-5.01	-2.85	-1
			0U	-1.31	-0.73	2.16	-5.01	-2.85	
			36U	-1.56	-1.14	1.83	-5.01	-3.18	
		52T	37L	-3.80	-3.77	-0.62	-5.01	-5.63	
			37U	-3.04	-3.78	-0.23	-5.01	-5.24	
			52U	-2.53	-3.19	0.31	-5.01	-4.70	
		106T	53L	-3.93	-4.02	-0.75	-5.01	-5.76	
			53U	-3.11	-3.74	-0.19	-5.01	-5.20	
			60U	-2.05	-3.25	0.61	-5.01	-4.40	
		242T	61L	-5.86	-5.73	-2.40	-5.01	-7.41	
			61U	-4.55	-5.24	-1.49	-5.01	-6.50	
			64U	-3.68	-4.92	-0.87	-5.01	-5.88	
		484T	65L	-8.87	-9.01	-5.31	-5.01	-10.32	
			65U	-7.49	-8.57	-4.37	-5.01	-9.38	
			66U	-6.83	-8.22	-3.84	-5.01	-8.85	
		996T	67L	-12.43	-12.35	-8.32	-5.01	-13.33	
			67U	-10.66	-11.86	-7.15	-5.01	-12.16	
2X996T	68	-13.23	-13.74	-8.02	-5.01	-13.03			
SU	-	-12.66	-13.12	-8.13	-5.01	-13.14			
79	6 345	26T	0L	-2.22	-0.90	1.66	-5.01	-3.35	-1
			0U	-2.97	-1.19	1.18	-5.01	-3.83	
			36U	0.33	-0.52	3.10	-5.01	-1.91	
		52T	37L	-2.55	-2.97	0.41	-5.01	-4.60	
			37U	-3.89	-4.21	-0.89	-5.01	-5.90	
			52U	-4.57	-3.82	-1.02	-5.01	-6.03	
		106T	53L	-2.30	-3.03	0.57	-5.01	-4.44	
			53U	-3.02	-4.07	-0.29	-5.01	-5.30	
			60U	-2.73	-3.78	0.00	-5.01	-5.01	
		242T	61L	-4.05	-4.70	-0.97	-5.01	-5.98	
			61U	-4.47	-5.59	-1.60	-5.01	-6.61	
			64U	-4.36	-5.33	-1.43	-5.01	-6.44	
		484T	65L	-7.35	-8.04	-4.05	-5.01	-9.06	
			65U	-7.84	-8.93	-4.72	-5.01	-9.73	
			66U	-7.61	-8.84	-4.55	-5.01	-9.56	
		996T	67L	-10.88	-11.68	-7.19	-5.01	-12.20	
			67U	-11.22	-12.28	-7.65	-5.01	-12.66	
2X996T	68	-13.52	-14.02	-8.30	-5.01	-13.31			
SU	-	-12.68	-13.57	-8.35	-5.01	-13.36			

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U

**802.11ax HE160\_MIMO in the UNII-6 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
111	6 505	26T	0L	-3.71	0.44	2.01	-5.05	-3.04	-1
			0U	-4.53	0.52	1.86	-5.05	-3.19	
			36U	-1.56	0.71	2.89	-5.05	-2.16	
		52T	37L	-4.28	-2.27	0.00	-5.05	-5.05	
			37U	-5.91	-2.31	-0.59	-5.05	-5.64	
			52U	-5.99	-1.45	0.01	-5.05	-5.04	
		106T	53L	-2.80	-2.28	0.69	-5.05	-4.36	
			53U	-3.37	-2.16	0.50	-5.05	-4.55	
			60U	-3.36	-1.48	0.90	-5.05	-4.15	
		242T	61L	-4.61	-3.82	-0.81	-5.05	-5.86	
			61U	-4.96	-3.62	-0.85	-5.05	-5.90	
			64U	-5.84	-3.99	-1.43	-5.05	-6.48	
		484T	65L	-7.72	-7.33	-3.89	-5.05	-8.94	
			65U	-8.16	-6.80	-3.80	-5.05	-8.85	
			66U	-8.24	-6.61	-3.72	-5.05	-8.77	
		996T	67L	-11.29	-10.71	-6.92	-5.05	-11.97	
			67U	-11.69	-10.08	-6.74	-5.05	-11.79	
		2X996T	68	-14.66	-12.87	-8.21	-5.05	-13.26	
SU	-	-14.05	-12.82	-8.64	-5.05	-13.69			

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U

**802.11ax HE160\_MIMO in the UNII-7 band**

Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
143	6 665	26T	0L	-3.61	0.89	2.37	-5.03	-2.66	-1
			0U	-3.71	0.53	2.08	-5.03	-2.95	
			36U	-2.83	0.91	2.60	-5.03	-2.43	
		52T	37L	-6.17	-1.73	-0.25	-5.03	-5.28	
			37U	-6.91	-2.14	-0.74	-5.03	-5.77	
			52U	-6.52	-1.78	-0.37	-5.03	-5.40	
		106T	53L	-3.44	-1.71	0.73	-5.03	-4.30	
			53U	-5.15	-2.11	-0.15	-5.03	-5.18	
			60U	-6.32	-1.86	-0.32	-5.03	-5.35	
		242T	61L	-5.29	-3.37	-0.83	-5.03	-5.86	
			61U	-6.67	-3.69	-1.54	-5.03	-6.57	
			64U	-7.41	-3.52	-1.65	-5.03	-6.68	
		484T	65L	-8.55	-6.71	-3.90	-5.03	-8.93	
			65U	-9.97	-6.92	-4.55	-5.03	-9.58	
			66U	-10.63	-6.94	-4.77	-5.03	-9.80	
		996T	67L	-12.14	-10.25	-7.02	-5.03	-12.05	
67U	-13.81		-10.15	-7.54	-5.03	-12.57			
2X996T	68	-16.23	-13.20	-9.00	-5.03	-14.03			
SU	-	-15.50	-12.82	-9.21	-5.03	-14.24			
175	6 825	26T	0L	-3.42	1.80	3.10	-5.03	-1.93	
			0U	-4.13	1.50	2.71	-5.03	-2.32	
			36U	-2.93	1.25	2.81	-5.03	-2.22	
		52T	37L	-6.32	-0.76	0.46	-5.03	-4.57	
			37U	-7.16	-1.30	-0.15	-5.03	-5.18	
			52U	-6.61	-1.34	-0.06	-5.03	-5.09	
		106T	53L	-5.36	-0.94	0.61	-5.03	-4.42	
			53U	-6.29	-1.49	-0.04	-5.03	-5.07	
			60U	-6.30	-1.54	-0.08	-5.03	-5.11	
		242T	61L	-7.00	-2.68	-0.93	-5.03	-5.96	
			61U	-7.77	-3.21	-1.53	-5.03	-6.56	
			64U	-7.52	-3.20	-1.45	-5.03	-6.48	
		484T	65L	-10.44	-5.99	-4.04	-5.03	-9.07	
			65U	-10.84	-6.65	-4.63	-5.03	-9.66	
			66U	-10.81	-6.55	-4.55	-5.03	-9.58	
		996T	67L	-13.91	-9.54	-7.13	-5.03	-12.16	
67U	-14.51		-10.00	-7.62	-5.03	-12.65			
2X996T	68	-17.47	-12.76	-9.05	-5.03	-14.08			
SU	-	-16.94	-12.34	-9.31	-5.03	-14.34			

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U



**802.11ax HE160\_MIMO in the UNII-8 band**


Channel	Frequency (MHz)	Tones	RU offset	Measured PSD ANT 1 (dBm/MHz)	Measured PSD ANT 2 (dBm/MHz)	PSD MIMO (dBm/MHz)	Directional ANT gain (dBi)	PSD e.i.r.p. (dBm/MHz)	Limit (dBm/MHz)
207	6 985	26T	0L	-1.98	0.95	2.90	-5.03	-2.13	-1
			0U	-2.92	-0.10	1.89	-5.03	-3.14	
			36U	-2.57	-0.36	1.84	-5.03	-3.19	
		52T	37L	-4.99	-1.81	0.05	-5.03	-4.98	
			37U	-5.93	-2.78	-0.92	-5.03	-5.95	
			52U	-5.35	-2.80	-0.73	-5.03	-5.76	
		106T	53L	-4.19	-2.01	0.26	-5.03	-4.77	
			53U	-5.41	-3.03	-0.84	-5.03	-5.87	
			60U	-5.53	-3.03	-0.88	-5.03	-5.91	
		242T	61L	-5.87	-3.77	-1.30	-5.03	-6.33	
			61U	-7.02	-4.58	-2.24	-5.03	-7.27	
			64U	-6.97	-4.78	-2.35	-5.03	-7.38	
		484T	65L	-9.20	-7.20	-4.46	-5.03	-9.49	
			65U	-10.34	-8.13	-5.47	-5.03	-10.50	
			66U	-10.40	-8.19	-5.53	-5.03	-10.56	
		996T	67L	-12.81	-10.71	-7.56	-5.03	-12.59	
			67U	-13.80	-11.67	-8.54	-5.03	-13.57	
		2X996T	68	-13.84	-15.13	-8.98	-5.03	-14.01	
SU	-	-13.13	-14.63	-9.07	-5.03	-14.10			

**Notes:**

1. PSD MIMO(dBm) = 10log(10(ANT 1/10) + 10(ANT 2/10)) (dBm) + DCF(dB)
2. PSD e.i.r.p. Calculation: PSD e.i.r.p. (dBm) = PSD MIMO (dBm) + Antenna gain (dBi)
3. HE160 = HE80L + HE80U

### 7.3. 26 dB Bandwidth & 99% Bandwidth

#### Test setup



#### Limit

According to §15.407(a)(10), RSS-248 4.4,

Band	26 dB Bandwidth & 99% Occupied Bandwidth
UNII-5, 6, 7, 8	< 320 MHz

#### Test procedure

ANSI C63.10-2013 Section 12.4

KDB 789033 D02 v02r01 - Section C.1 (26dB bandwidth)

KDB 789033 D02 v02r01 - Section D (99% bandwidth)

#### Test settings

##### 1. 26 dB Bandwidth

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

##### 2. 99% Occupied Bandwidth

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1% to 5% of the OBW
- Set VBW  $\geq 3 \times$  RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available).
- If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

#### Notes:

- For the 26 dB Bandwidth and OBW, smallest tone, full tone/single unit for each bandwidth were reported as a representative.
- Please refer to Appendix B for plots

**Test results**

Band	Mode	Frequency (MHz)	Tones	RU offset	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
					ANT 1	ANT 2	ANT 1	ANT 2
UNII-5	11a	5 955	-	-	20.03	20.48	16.48	16.38
		6 175	-	-	20.03	20.18	16.48	16.38
		6 415	-	-	20.03	20.33	16.48	16.38
UNII-6	11a	6 435	-	-	20.03	20.48	16.48	16.38
		6 475	-	-	20.03	20.03	16.43	16.43
		6 515	-	-	20.03	20.43	16.43	16.43
UNII-7	11a	6 535	-	-	20.13	20.23	16.43	16.43
		6 695	-	-	20.53	20.03	16.38	16.48
		6 875	-	-	20.48	20.18	16.43	16.43
UNII-8	11a	6 895	-	-	20.58	20.13	16.43	16.43
		6 995	-	-	20.23	20.03	16.43	16.43
		7 115	-	-	20.63	20.03	16.38	16.43

Band	Mode	Frequency (MHz)	Tones	RU offset	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
					ANT 1	ANT 2	ANT 1	ANT 2
UNII-5	11ax HE20	5 955	26T	0	20.63	20.48	18.63	18.48
				4	19.13	18.73	17.38	17.08
				8	20.98	20.58	18.73	18.63
		242T	61	22.73	22.63	19.18	19.23	
			SU	-	21.38	22.03	18.93	18.98
			6 175	26T	0	20.58	20.38	18.58
		4			19.28	18.63	17.18	17.13
		8			21.03	20.68	18.73	18.58
		242T	61	22.48	22.78	19.13	19.23	
	SU		-	20.83	21.83	18.83	18.98	
	6 415		26T	0	21.28	20.58	18.78	18.58
		4		19.13	18.68	17.38	17.18	
		8		20.73	20.73	18.53	18.68	
	242T	61	22.43	22.68	19.08	19.18		
		SU	-	21.18	21.58	18.83	18.98	
UNII-6		11ax HE20	6 435	26T	0	21.43	20.53	18.83
	4				19.08	18.68	17.38	17.18
	8				20.53	20.53	18.48	18.53
	242T		61	22.58	22.78	19.18	19.23	
			SU	-	21.28	21.73	18.88	18.98
			6 475	26T	0	21.33	20.58	18.88
	4				19.08	18.68	17.18	17.13
	8				20.53	20.38	18.43	18.53
	242T		61	22.83	22.63	19.23	19.18	
SU		-	21.23	21.88	18.93	18.98		
6 515		26T	0	21.18	20.53	18.83	18.63	
	4		18.73	18.58	17.18	17.18		
	8		20.63	20.53	18.43	18.58		
242T	61	22.78	22.73	19.28	19.18			
	SU	-	20.93	22.03	18.93	18.98		
	UNII-7	11ax HE20	6 535	26T	0	21.03	20.88	18.73
4					18.88	18.68	17.13	17.08
8					20.63	20.53	18.38	18.53
242T			61	22.88	22.58	19.23	19.18	
			SU	-	21.28	21.98	18.93	18.93
			6 695	26T	0	20.83	20.43	18.78
4					18.78	18.68	17.13	17.23
8					20.58	20.63	18.73	18.63
242T			61	22.93	22.38	19.23	19.13	
	SU	-	21.43	21.98	18.98	18.88		
	6 875	26T	0	20.68	20.43	18.73	18.53	
4			18.83	18.73	17.13	16.98		
8			20.83	20.73	18.58	18.48		
242T	61	22.83	22.48	19.23	19.18			
	SU	-	21.13	21.88	18.98	18.88		
	UNII-8	11ax HE20	6 895	26T	0	20.58	20.58	18.73
4					18.78	18.48	17.13	17.03
8					20.73	20.53	18.68	18.58
242T			61	22.63	22.53	19.28	19.18	
			SU	-	21.13	21.93	18.98	18.93
			6 995	26T	0	20.78	21.08	18.73
4					18.78	18.63	17.23	17.18
8					20.78	20.58	18.63	18.63
242T			61	22.98	22.43	19.28	19.18	
	SU	-	21.33	21.83	18.93	18.93		
	7 115	26T	0	20.78	20.53	18.68	18.53	
4			18.88	18.78	17.23	17.18		
8			20.93	20.63	18.83	18.63		
242T	61	22.98	22.23	19.33	19.13			
	SU	-	21.38	21.68	18.98	18.93		


Band	Mode	Frequency (MHz)	Tones	RU offset	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
					ANT 1	ANT 2	ANT 1	ANT 2
UNII-5	11ax HE40	5 965	26T	0	40.56	40.96	38.36	38.56
				9	38.26	38.16	36.66	36.36
				17	40.76	40.56	38.66	38.36
		484T	65	43.76	43.96	38.16	38.16	
			SU	-	40.76	41.26	37.76	37.86
			0	40.96	40.66	38.46	38.26	
		6 165	26T	9	38.36	38.26	36.56	36.46
				17	40.66	40.56	38.56	38.56
				484T	65	43.26	43.26	37.96
	SU	-	40.56	40.96	37.56	37.76		
	6 405	26T	0	40.86	41.16	38.56	38.76	
			9	38.56	38.26	36.86	36.56	
			17	40.36	40.56	38.26	38.46	
		484T	65	43.76	43.56	38.16	38.16	
			SU	-	40.66	41.06	37.56	37.76
0			40.96	40.96	38.66	38.66		
UNII-6	11ax HE40	6 445	26T	0	40.96	40.96	38.66	38.66
				9	38.66	38.16	36.86	36.46
				17	40.66	40.46	38.36	38.46
		484T	65	43.56	43.86	38.16	38.16	
			SU	-	40.46	40.76	37.66	37.76
			0	41.16	40.66	38.76	38.46	
		6 485	26T	9	38.46	38.36	36.76	36.46
				17	40.26	40.46	38.36	38.16
				484T	65	43.26	43.16	38.16
	SU	-	40.76	41.16	37.66	37.76		
	6 525	26T	0	41.06	40.96	38.66	38.46	
			9	38.46	38.36	36.66	36.56	
			17	40.36	40.36	38.06	38.26	
		484T	65	43.36	43.06	38.16	38.06	
			SU	-	40.46	40.96	37.66	37.76
0			40.96	40.86	38.66	38.56		
UNII-7	11ax HE40	6 565	26T	0	40.96	40.86	38.66	38.56
				9	38.46	38.26	36.76	36.66
				17	40.56	40.46	38.26	38.36
		484T	65	43.46	43.46	38.16	38.06	
			SU	-	40.66	40.86	37.76	37.76
			0	40.96	40.56	38.66	38.26	
		6 685	26T	9	38.06	38.36	36.26	36.56
				17	40.56	40.66	38.36	38.46
				484T	65	43.16	42.96	38.26
	SU	-	40.96	40.56	37.76	37.76		
	6 845	26T	0	40.96	40.66	38.56	38.46	
			9	38.26	38.16	36.36	36.46	
			17	40.56	40.46	38.36	38.46	
		484T	65	43.76	43.26	38.26	37.96	
			SU	-	41.06	41.06	37.86	37.76
0			40.86	40.76	38.56	38.46		
UNII-8	11ax HE40	6 885	26T	0	40.86	40.76	38.56	38.46
				9	38.36	38.36	36.56	36.46
				17	40.56	40.76	38.46	38.66
		484T	65	43.66	43.16	38.26	38.16	
			SU	-	41.06	40.76	37.86	37.76
			0	40.86	40.56	38.46	38.06	
		6 965	26T	9	38.36	38.26	36.36	36.36
				17	40.56	40.76	38.26	38.36
				484T	65	43.96	44.36	38.16
	SU	-	41.06	40.96	37.76	37.76		
	7 085	26T	0	41.06	40.66	38.46	38.06	
			9	38.36	38.16	36.26	36.36	
			17	40.86	40.56	38.56	38.36	
		484T	65	43.66	43.76	38.16	38.16	
			SU	-	41.06	41.16	37.76	37.76
0			40.86	40.76	38.56	38.46		

Band	Mode	Frequency (MHz)	Tones	RU offset	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
					ANT 1	ANT 2	ANT 1	ANT 2
UNII-5	11ax HE80	5 985	26T	0	82.72	82.36	79.12	78.88
				18	79.36	78.52	75.76	75.04
				36	82.60	81.52	79.48	78.64
			996T	67	91.83	88.11	77.92	77.92
			SU	-	82.60	82.72	77.08	77.20
		6 145	26T	0	82.00	82.48	79.12	79.00
				18	79.24	78.64	75.76	74.93
				36	82.36	82.00	79.24	79.00
			996T	67	91.95	90.15	78.04	78.16
			SU	-	82.12	83.20	76.96	77.08
		6 385	26T	0	82.72	82.36	79.36	79.00
				18	79.00	78.52	75.88	75.04
				36	81.40	81.88	78.76	78.52
			996T	67	89.43	88.83	77.80	77.92
			SU	-	82.00	82.72	76.72	77.20
UNII-6	11ax HE80	6 465	26T	0	82.84	82.60	79.48	79.12
				18	78.88	78.28	75.76	74.93
				36	81.52	81.28	78.52	78.52
			996T	67	88.71	88.47	77.56	77.92
			SU	-	81.88	82.72	76.72	77.08
UNII-7	11ax HE80	6 545	26T	0	83.08	82.48	79.48	79.24
				18	78.28	78.52	74.93	75.16
				36	81.64	82.48	78.64	79.12
			996T	67	89.91	88.35	77.80	77.80
			SU	-	82.24	82.72	76.96	77.08
		6 705	26T	0	83.08	82.60	79.60	79.00
				18	78.40	78.52	74.21	75.04
				36	81.64	81.64	78.88	78.52
			996T	67	90.39	89.31	78.04	78.04
			SU	-	82.48	82.48	77.32	77.08
		6 865	26T	0	83.32	82.24	79.12	79.00
				18	78.52	78.64	74.69	75.16
				36	81.76	81.64	78.76	78.64
			996T	67	90.03	89.19	77.92	77.92
			SU	-	83.20	83.32	77.32	77.08
UNII-8	11ax HE80	6 945	26T	0	82.84	82.84	78.88	79.24
				18	78.16	78.76	74.45	75.16
				36	81.64	81.64	78.64	78.64
			996T	67	89.43	88.11	77.80	77.92
			SU	-	82.60	83.08	77.20	77.08
		7 025	26T	0	82.84	82.24	78.88	78.76
				18	78.88	78.28	75.04	75.04
				36	81.64	81.88	78.88	78.88
			996T	67	90.63	88.23	78.04	78.04
			SU	-	82.96	82.96	77.32	77.20

Band	Mode	Frequency (MHz)	Tones	RU offset	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
					ANT 1	ANT 2	ANT 1	ANT 2
UNII-5	11ax HE160	6 025	26T	0L	166.23	165.59	159.84	159.52
				0U	159.20	159.20	153.77	153.45
				36U	164.00	164.00	159.20	159.20
			2x996T	68	166.23	166.87	156.00	156.32
			SU	-	165.91	166.87	155.68	156.32
		6 185	26T	0L	164.96	165.59	159.84	159.52
				0U	159.52	158.88	155.04	153.77
				36U	164.32	164.00	158.24	159.84
			2x996T	68	167.51	167.83	156.00	156.00
			SU	-	166.55	165.28	156.00	156.32
		6 345	26T	0L	165.91	165.59	159.84	159.20
				0U	159.84	159.52	155.04	154.41
				36U	164.00	164.64	159.52	159.52
			2x996T	68	164.96	167.83	156.32	156.64
			SU	-	166.55	167.19	156.32	156.64
UNII-6	11ax HE160	6 505	26T	0L	166.23	165.91	159.84	159.52
				0U	160.16	159.20	155.68	153.77
				36U	163.68	163.36	159.84	158.56
			2x996T	68	167.51	168.15	155.68	156.32
			SU	-	165.91	165.91	156.00	156.00
UNII-7	11ax HE160	6 665	26T	0L	165.59	165.91	159.84	159.84
				0U	160.16	159.52	155.04	154.09
				36U	164.64	164.32	159.84	159.52
			2x996T	68	166.23	166.55	156.00	156.00
			SU	-	166.87	166.55	156.00	156.00
		6 825	26T	0L	165.91	165.59	159.84	159.20
				0U	159.84	159.52	154.41	153.77
				36U	164.00	164.00	159.20	159.20
			2x996T	68	167.83	166.87	156.64	156.00
			SU	-	166.87	165.59	156.32	155.68
UNII-8	11ax HE160	6 985	26T	0L	165.28	165.59	159.20	158.24
				0U	159.20	158.88	153.45	152.81
				36U	164.32	164.64	159.84	159.52
			2x996T	68	165.59	165.59	156.32	156.00
			SU	-	166.55	165.28	156.32	156.00

## 7.4. In-Band Emission

### Test setup



### Limit

According to §15.407(b)(7),

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

According to RSS-248 4.7. b

The following unwanted emission limits shall apply:


- a. Any emissions outside of the 5925-7125 MHz band shall not exceed  $-27$  dBm/MHz e.i.r.p.;
- b. The e.i.r.p. spectral density of unwanted emissions falling into the 5925-7125 MHz band shall be attenuated below the reference power spectral density by:
  - I. 20 dB at 1 MHz away from the channel edges;
  - II. 28 dB at 1 channel bandwidth away from the operating channel centre;
  - III. 40 dB at 1.5 times the channel bandwidth away from the operating channel centre;
  - IV. a minimum of 40 dB at frequencies that are further away than 1.5 times the channel bandwidth from the operating channel centre;
  - V. a linearly interpolated value between 20 dB and 28 dB at frequencies between 1 MHz outside of channel edges and 1 channel bandwidth away from the operating channel centre, respectively; and
  - VI. a linearly interpolated value between 28 dB and 40 dB at frequencies between 1 channel bandwidth away from the operating channel centre and 1.5 times the channel bandwidth away from the operating channel centre, respectively;

### Test procedure

ANSI C63.10-2013 Section 12.3.2.2

KDB 987594 D02 v01r01 - Section J



<p><b>Eurofins KCTL Co.,Ltd.</b>  65, Sinwon-ro, Yeongtong-gu,  Suwon-si, Gyeonggi-do, 16677, Korea  TEL: 82-31-285-0894 FAX: 82-505-299-8311  <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p>	<p>Report No.:  KR22-SRF0176-A  Page (57) of (118)</p>	
---	--	---

### **Test settings**

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a). Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
  - b). Suppressed by 28 dB at one channel bandwidth from the channel center.
  - c). Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

### **Test results**


Please refer to Appendix B for plots

### **Notes:**

1. For 20/40/80 MHz bandwidth, the 26 dB bandwidth is greater than the nominal bandwidth, So EBW of Emission Mask was considered to be the nominal bandwidth.
2. For in-band emission, the measurement for smallest tone, full tone and single unit for each bandwidth were reported as a representative.

## 7.5. Frequency Stability

### Test setup

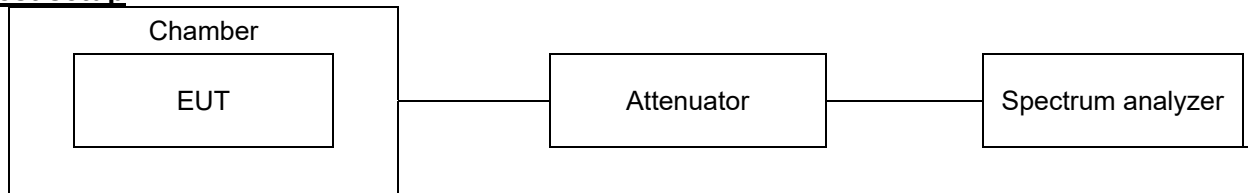

### Limit

According to §15.407(g),  
Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

According to RSS-248 4.5,

The frequency stability shall be sufficient to ensure that the occupied bandwidth of the device stays within the 5925-7125 MHz frequency band when the stability is tested at the temperature and supply voltage variations specified in RSS-Gen

### Test procedure

ANSI C63.10-2013, clause 6.8.1

### Test settings

The frequency stability of the carrier frequency of the intentional radiator shall be maintained all conditions of normal operation as specified in the user manual. The frequency stability shall be maintained over a temperature variation of specified in the user manual at normal supply voltage, and over a variation in the primary supply voltage of specified in the user manual of the rated supply voltage at a temperature of 20 °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

1. The EUT was placed inside the environmental test chamber.
2. The temperature was incremented by 10 °C intervals from lowest temperature.
3. Each increase step of temperature measured the frequency.
4. The test temperature was set 20°C and the supply voltage was then adjusted on the EUT from 85 % to 115% and the frequency record.
5. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

**Test results**

Band : UNII-5

Mode : 11a

Frequency(Hz) : 6 175 000 000

Voltage	Voltage	TEMP	Maintaining time	Measure frequency	Frequency deviation	Deviation		
[%]	[V]	[°C]		[Hz]	[Hz]	[%]		
100	7.72	+20(Ref)	Startup	6 174 981 250	-18 750	-0.000 30		
			2 minutes	6 174 985 650	-14 350	-0.000 23		
			5 minutes	6 174 984 400	-15 600	-0.000 25		
			10 minutes	6 174 986 900	-13 100	-0.000 21		
		-20	Startup	6 175 006 900	6 900	0.000 11		
			2 minutes	6 174 991 250	-8 750	-0.000 14		
			5 minutes	6 174 993 750	-6 250	-0.000 10		
			10 minutes	6 174 998 750	-1 250	-0.000 02		
		-10	Startup	6 174 974 400	-25 600	-0.000 41		
			2 minutes	6 174 976 850	-23 150	-0.000 37		
			5 minutes	6 174 969 350	-30 650	-0.000 50		
			10 minutes	6 174 986 900	-13 100	-0.000 21		
		0	Startup	6 174 997 500	-2 500	-0.000 04		
			2 minutes	6 175 010 000	10 000	0.000 16		
			5 minutes	6 174 988 150	-11 850	-0.000 19		
			10 minutes	6 174 987 500	-12 500	-0.000 20		
		10	Startup	6 174 988 150	-11 850	-0.000 19		
			2 minutes	6 174 976 900	-23 100	-0.000 37		
			5 minutes	6 174 983 750	-16 250	-0.000 26		
			10 minutes	6 174 993 750	-6 250	-0.000 10		
		30	Startup	6 174 999 350	- 650	-0.000 01		
			2 minutes	6 175 003 750	3 750	0.000 06		
			5 minutes	6 175 001 250	1 250	0.000 02		
			10 minutes	6 174 993 750	-6 250	-0.000 10		
		40	Startup	6 175 010 000	10 000	0.000 16		
			2 minutes	6 175 010 600	10 600	0.000 17		
			5 minutes	6 175 006 250	6 250	0.000 10		
			10 minutes	6 175 010 000	10 000	0.000 16		
		50	Startup	6 174 979 350	-20 650	-0.000 33		
			2 minutes	6 174 974 400	-25 600	-0.000 41		
			5 minutes	6 174 988 150	-11 850	-0.000 19		
			10 minutes	6 174 979 350	-20 650	-0.000 33		
		60	Startup	6 175 010 000	10 000	0.000 16		
			2 minutes	6 174 990 000	-10 000	-0.000 16		
			5 minutes	6 175 011 250	11 250	0.000 18		
			10 minutes	6 174 980 000	-20 000	-0.000 32		
		85 (End point)	7.00	+20(Ref)	Startup	6 174 983 750	-16 250	-0.000 26
					2 minutes	6 174 982 500	-17 500	-0.000 28
					5 minutes	6 174 971 900	-28 100	-0.000 46
					10 minutes	6 174 973 150	-26 850	-0.000 43
		115	8.88	+20(Ref)	Startup	6 174 981 250	-18 750	-0.000 30
					2 minutes	6 174 995 000	-5 000	-0.000 08
					5 minutes	6 174 981 250	-18 750	-0.000 30
					10 minutes	6 174 988 150	-11 850	-0.000 19

Band : UNII-8

Mode : 11a

Frequency(Hz) : 6 995 000 000

Voltage	Voltage	TEMP	Maintaining time	Measure frequency	Frequency deviation	Deviation
[%]	[V]	[°C]		[Hz]	[Hz]	[%]
100	7.72	+20(Ref)	Startup	6 994 961 900	-38 100	-0.000 54
			2 minutes	6 994 986 850	-13 150	-0.000 19
			5 minutes	6 994 986 850	-13 150	-0.000 19
			10 minutes	6 994 973 750	-26 250	-0.000 38
		-20	Startup	6 994 974 400	-25 600	-0.000 37
			2 minutes	6 994 972 500	-27 500	-0.000 39
			5 minutes	6 994 980 000	-20 000	-0.000 29
			10 minutes	6 994 969 400	-30 600	-0.000 44
		-10	Startup	6 994 961 850	-38 150	-0.000 55
			2 minutes	6 995 014 350	14 350	0.000 21
			5 minutes	6 994 957 500	-42 500	-0.000 61
			10 minutes	6 994 934 400	-65 600	-0.000 94
		0	Startup	6 994 981 250	-18 750	-0.000 27
			2 minutes	6 994 965 650	-34 350	-0.000 49
			5 minutes	6 994 986 850	-13 150	-0.000 19
			10 minutes	6 995 030 000	30 000	0.000 43
		10	Startup	6 995 006 250	6 250	0.000 09
			2 minutes	6 994 989 350	-10 650	-0.000 15
			5 minutes	6 994 988 750	-11 250	-0.000 16
			10 minutes	6 994 987 500	-12 500	-0.000 18
		30	Startup	6 994 988 150	-11 850	-0.000 17
			2 minutes	6 994 991 850	-8 150	-0.000 12
			5 minutes	6 994 988 150	-11 850	-0.000 17
			10 minutes	6 994 988 150	-11 850	-0.000 17
		40	Startup	6 994 972 500	-27 500	-0.000 39
			2 minutes	6 994 983 750	-16 250	-0.000 23
			5 minutes	6 994 973 150	-26 850	-0.000 38
			10 minutes	6 994 980 650	-19 350	-0.000 28
		50	Startup	6 995 006 900	6 900	0.000 10
			2 minutes	6 994 991 250	-8 750	-0.000 13
			5 minutes	6 994 990 000	-10 000	-0.000 14
			10 minutes	6 994 981 900	-18 100	-0.000 26
		60	Startup	6 994 988 750	-11 250	-0.000 16
			2 minutes	6 994 983 100	-16 900	-0.000 24
			5 minutes	6 994 980 650	-19 350	-0.000 28
			10 minutes	6 994 986 250	-13 750	-0.000 20
85 (End point)	7.00	+20(Ref)	Startup	6 994 950 650	-49 350	-0.000 71
			2 minutes	6 994 970 650	-29 350	-0.000 42
			5 minutes	6 994 970 650	-29 350	-0.000 42
			10 minutes	6 994 960 000	-40 000	-0.000 57
115	8.88	+20(Ref)	Startup	6 994 975 000	-25 000	-0.000 36
			2 minutes	6 994 972 500	-27 500	-0.000 39
			5 minutes	6 994 969 350	-30 650	-0.000 44
			10 minutes	6 994 978 750	-21 250	-0.000 30

## 7.6. Contention Based Protocol

### Test Overview and Limit

According to §15.407(d)(6),

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz-wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

According to RSS-248 4.8.2,

The minimum detection threshold power is the received power referenced to a 0 dBi antenna. Devices shall use a contention-based protocol to detect the presence of any emissions on the channel that the device intends to occupy. The device shall be able to detect, within its entire occupied bandwidth, a radio frequency power of -62 dBm or lower.

If an emission is detected on a channel, the device shall cease transmissions and shall not resume transmissions on this channel while the detected radio frequency power is at or above the -62 dBm threshold.


### Test Procedure

#### A. Simulating Incumbent Signal

The incumbent signal is assumed to be noise-like. One example of such transmission could be Digital Video Broadcasting (DVB) systems that use Orthogonal Frequency Division Multiplexing (OFDM). Incumbent systems may also use different bandwidths for their transmissions. A 10 MHz-wide additive white Gaussian noise (AWGN) signal is selected to simulate and represent incumbent transmission.

#### B. Required number of tests

Incumbent and EUT (access point, subordinate or client) signals may occupy different portions of the channel. Depending on the EUT transmission bandwidth and incumbent signal center frequency (simulated by a 10 MHz-wide AWGN signal), the center frequency of the EUT signal  $f_{c1}$  may fall within the incumbent's occupied bandwidth (Figure 1.a), or outside of it (Figure 1.b).

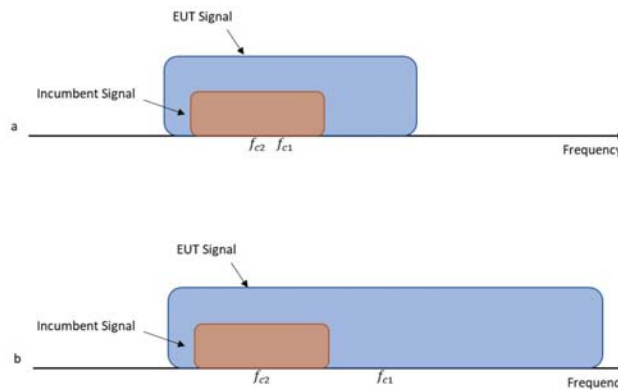

**Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it**

To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency  $f_{c2}$ ) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed;

**Table 1. Criteria to determine number of times detection threshold test may be performed**

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ( $f_{c1} = f_{c2}$ )
$BW_{Inc} \leq BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within $BW_{EUT}$
$2BW_{Inc} \leq BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within $BW_{EUT}$	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

where:

$BW_{EUT}$ : Transmission bandwidth of EUT signal


$BW_{Inc}$ : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

$f_{c1}$ : Center frequency of EUT transmission

$f_{c2}$ : Center frequency of simulated incumbent signal

### C. Test Setup

To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle.<sup>2</sup> To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer 2 to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

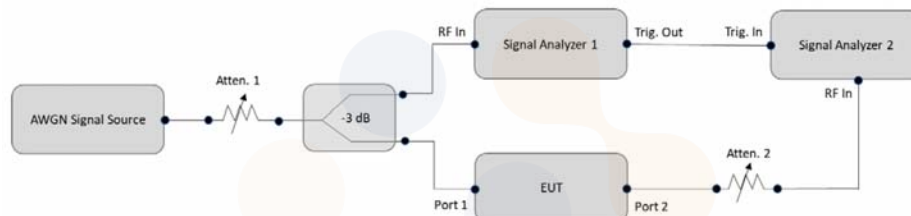

**Figure 2. Contention-based protocol test setup, conducted method Step-by-Step Procedure, Conducted Setup**

- 1) Configure the EUT to transmit with a constant duty cycle.
- 2) Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
- 3) Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- 4) Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
- 5) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- 6) Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
- 7) Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- 8) Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- 9) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.

10) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

**Note.**

1) KDB 987594 D02, contention based protocol was tested using an AWGN signal with a bandwidth of 10 MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.

2) Lowest antenna gain information

- Lowest antenna gain of both antennas was adjusted to injected power (AWGN signal).

Band	Lowest Gain (dBi)	
	ANT1	ANT2
UNII-5	-8.14	-8.18
UNII-6	-8.03	-8.14
UNII-7	-8.05	-8.15
UNII-8	-8.18	-8.15

3) Supported Equipment

Equipment	Manufacturer	Model	FCC ID
Access Point	ASUSTek Computer Inc.	GT-AXE11000	MSQ-RTAXJF00



**Test result**

Band	BW [MHz]	Channel Freq. [MHz]	Incumbent Freq. [MHz]	Injected (AWGN) Power (dBm)	Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Limit (dBm)	EUT TX Status
UNII 5	20	6 175	6 175	-90.00	-8.18	-81.82	-62.00	Normal
				-84.50	-8.18	-76.32	-62.00	Minimal
				-84.00	-8.18	-75.82	-62.00	Ceased
	160	6 185	6 110	-90.00	-8.18	-81.82	-62.00	Normal
				-82.50	-8.18	-74.32	-62.00	Minimal
				-82.00	-8.18	-73.82	-62.00	Ceased
			6 185	-90.00	-8.18	-81.82	-62.00	Normal
				-76.50	-8.18	-68.32	-62.00	Minimal
				-76.00	-8.18	-67.82	-62.00	Ceased
		6 260	-90.00	-8.18	-81.82	-62.00	Normal	
			-83.50	-8.18	-75.32	-62.00	Minimal	
			-83.00	-8.18	-74.82	-62.00	Ceased	
UNII 6	20	6 475	6 475	-90.00	-8.14	-81.86	-62.00	Normal
				-83.50	-8.14	-75.36	-62.00	Minimal
				-83.00	-8.14	-74.86	-62.00	Ceased
	160	6 505	6 430	-90.00	-8.14	-81.86	-62.00	Normal
				-82.50	-8.14	-74.36	-62.00	Minimal
				-82.00	-8.14	-73.86	-62.00	Ceased
			6 505	-90.00	-8.14	-81.86	-62.00	Normal
				-76.50	-8.14	-68.36	-62.00	Minimal
				-76.00	-8.14	-67.86	-62.00	Ceased
		6 580	-90.00	-8.14	-81.86	-62.00	Normal	
			-81.50	-8.14	-73.36	-62.00	Minimal	
			-81.00	-8.14	-72.86	-62.00	Ceased	
UNII 7	20	6 695	6 695	-90.00	-8.15	-81.85	-62.00	Normal
				-81.50	-8.15	-73.35	-62.00	Minimal
				-81.00	-8.15	-72.85	-62.00	Ceased
	160	6 665	6 590	-90.00	-8.15	-81.85	-62.00	Normal
				-81.50	-8.15	-73.35	-62.00	Minimal
				-81.00	-8.15	-72.85	-62.00	Ceased
			6 665	-90.00	-8.15	-81.85	-62.00	Normal
				-76.50	-8.15	-68.35	-62.00	Minimal
				-76.00	-8.15	-67.85	-62.00	Ceased
		6 740	-90.00	-8.15	-81.85	-62.00	Normal	
			-83.50	-8.15	-75.35	-62.00	Minimal	
			-83.00	-8.15	-74.85	-62.00	Ceased	

Band	BW [MHz]	Channel Freq. [MHz]	Incumbent Freq. [MHz]	Injected (AWGN) Power [dBm]	Antenna Gain [dBi]	Adjusted Power [dBm]	Detection Limit [dBm]	EUT TX Status	
UNII 8	20	6 995	6 995	-90.00	-8.18	-81.82	-62.00	Normal	
				-81.50	-8.18	-73.32	-62.00	Minimal	
				-81.00	-8.18	-72.82	-62.00	Ceased	
	160	6 985	6 910	6 910	-90.00	-8.18	-81.82	-62.00	Normal
					-82.50	-8.18	-74.32	-62.00	Minimal
					-82.00	-8.18	-73.82	-62.00	Ceased
			6 985	6 985	-90.00	-8.18	-81.82	-62.00	Normal
					-76.50	-8.18	-68.32	-62.00	Minimal
					-76.00	-8.18	-67.82	-62.00	Ceased
		7 060	7 060	-90.00	-8.18	-81.82	-62.00	Normal	
				-81.50	-8.18	-73.32	-62.00	Minimal	
				-81.00	-8.18	-72.82	-62.00	Ceased	

Band	BW [MHz]	Channel Freq. [MHz]	Incumbent Freq. [MHz]	Adjusted Power [dBm]	1	2	3	4	5	6	7	8	9	10	AWGN Detection Probability (%)	Limit Probability (%)
UNII 5	20	6 175	6 175	-75.82	√	√	√	√	√	√	√	√	√	√	100	90
			6 110	-73.82	√	√	√	√	√	√	√	√	√	√	√	100
	160	6 185	6 185	-67.82	√	√	√	√	√	√	√	√	√	√	100	90
			6 260	-74.82	√	√	√	√	√	√	√	√	√	√	√	100
UNII 6	20	6 475	6 475	-74.86	√	√	√	√	√	√	√	√	√	√	100	90
			6 430	-73.86	√	√	√	√	√	√	√	√	√	√	√	100
	160	6 505	6 505	-67.86	√	√	√	√	√	√	√	√	√	√	100	90
			6 580	-72.86	√	√	√	√	√	√	√	√	√	√	√	100
UNII 7	20	6 695	6 695	-72.85	√	√	√	√	√	√	√	√	√	√	100	90
			6 590	-72.85	√	√	√	√	√	√	√	√	√	√	√	100
	160	6 665	6 665	-67.85	√	√	√	√	√	√	√	√	√	√	100	90
			6 740	-74.85	√	√	√	√	√	√	√	√	√	√	√	100
UNII 8	20	6 995	6 995	-72.82	√	√	√	√	√	√	√	√	√	√	100	90
			6 910	-73.82	√	√	√	√	√	√	√	√	√	√	√	100
	160	6 985	6 985	-67.82	√	√	√	√	√	√	√	√	√	√	100	90
			7 060	-72.82	√	√	√	√	√	√	√	√	√	√	√	100

**Notes:**


1. EUT TX Status

- 1) Ceased: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds.
- 2) Minimal: AWGN level at which the system begins to trigger the transmission switch off, albeit not being kept off consistently.
- 3) Normal: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.

2. Injected AWGN Power [dBm] = Actual power of AWGN [dBm] + Path Loss [dB]

3. Adjusted Power [dBm] = Injected AWGN Power [dBm] - Antenna Gain [dBi]


**Plot of AWGN Signal**

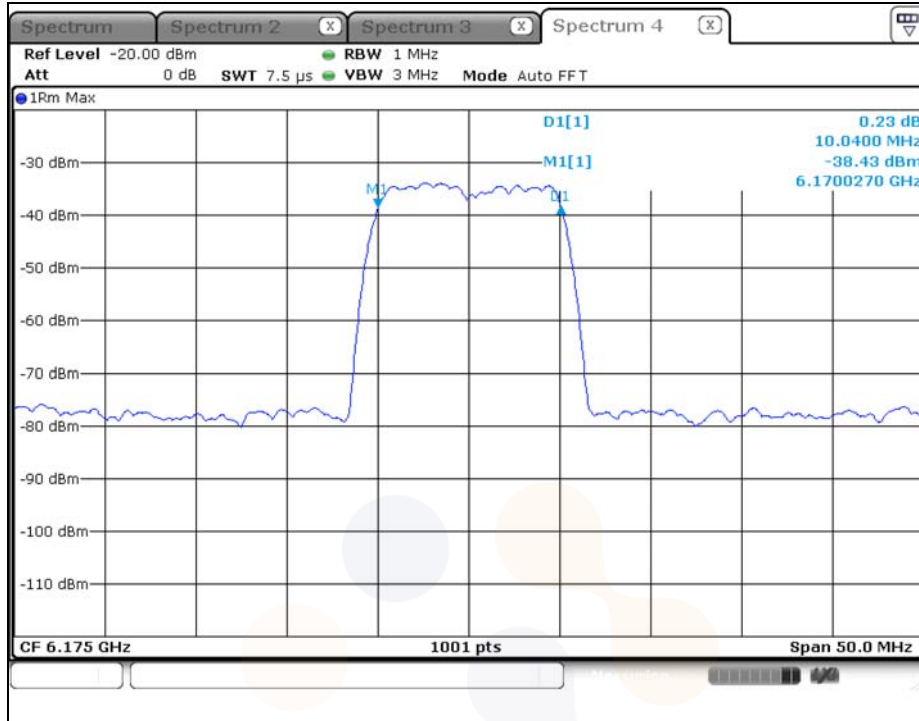


**UNII-5**

**EUT Transmission**

**6 175 MHz (20 MHz bandwidth)**

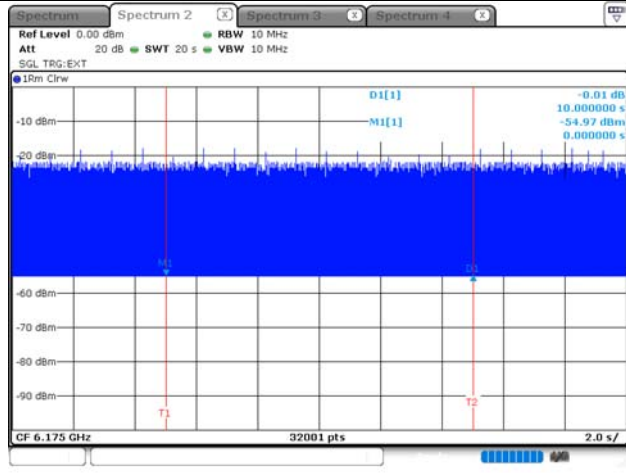


**6 185 MHz (160 MHz bandwidth)**

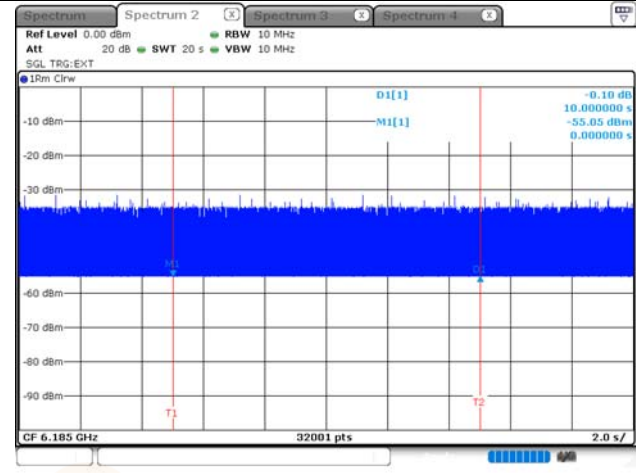


**Injected Incumbent Signal**


**6 175 MHz (20 MHz bandwidth)**

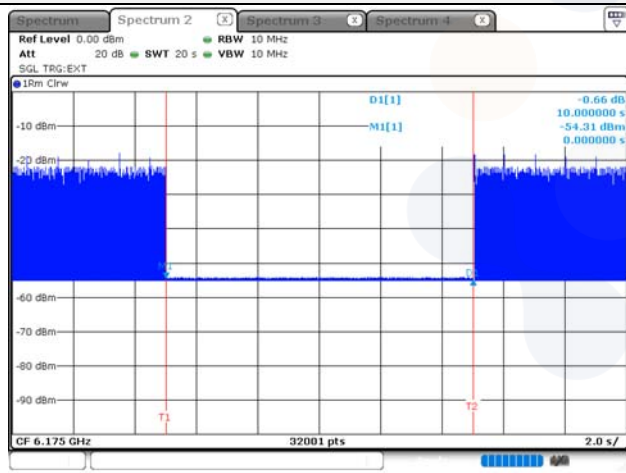


**6 110 MHz (160 MHz bandwidth)**

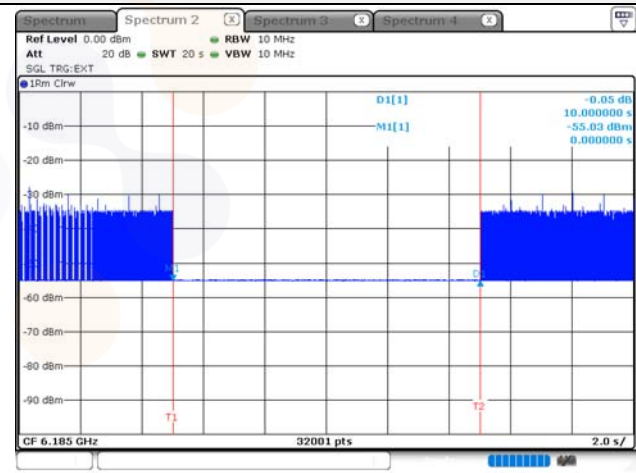

**6 185 MHz (160 MHz bandwidth)**

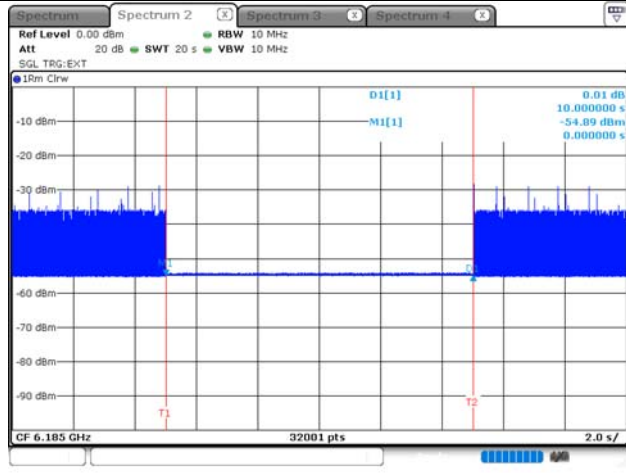

**6 260 MHz (160 MHz bandwidth)**

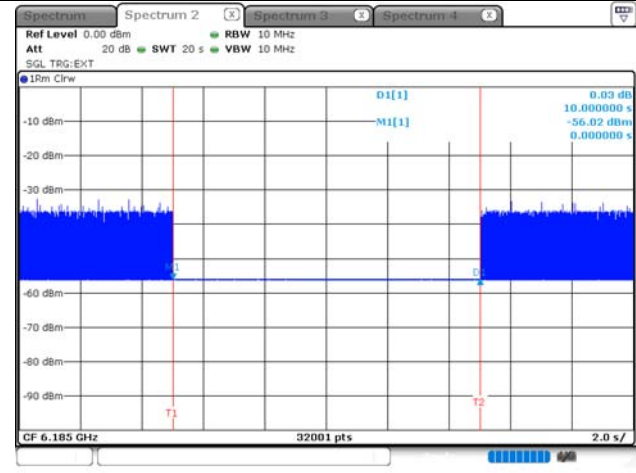


**Note.**

- M1: Injection of AWGN signal, D2: Removal of AWGN signal.


**UNII-6**

**EUT Transmission**

**6 475 Mhz (20 Mhz bandwidth)**

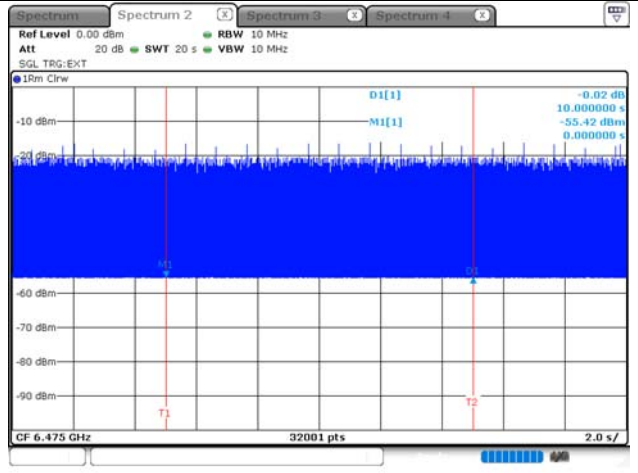


**6 505 Mhz (160 Mhz bandwidth)**

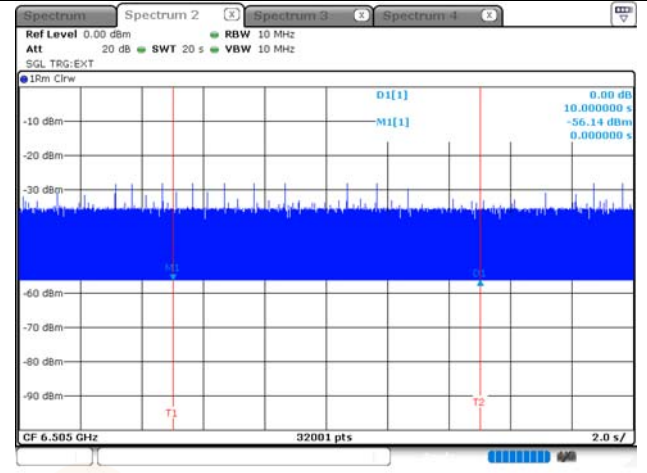


**Injected Incumbent Signal**


**6 475 Mhz (20 Mhz bandwidth)**

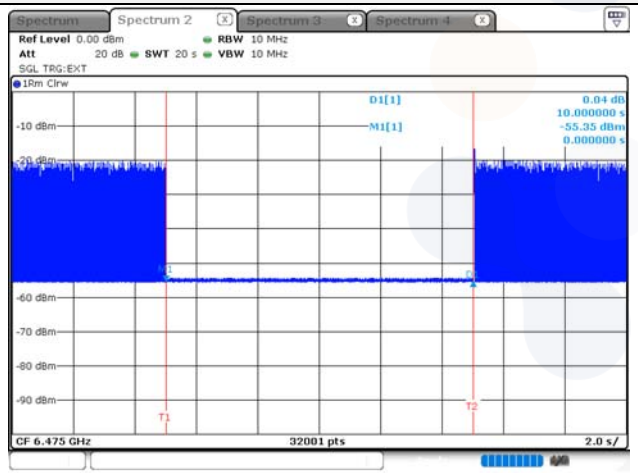


**6 430 Mhz (160 Mhz bandwidth)**

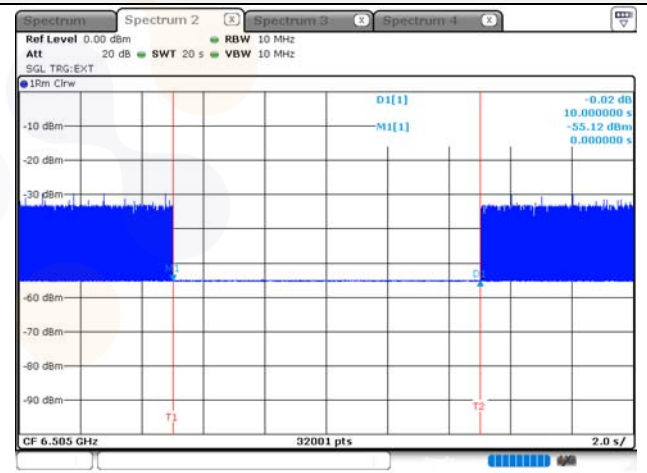

**6 505 Mhz (160 Mhz bandwidth)**

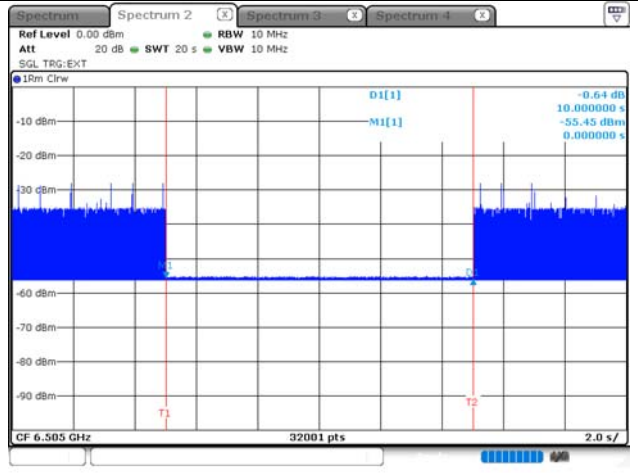

**6 580 Mhz (160 Mhz bandwidth)**

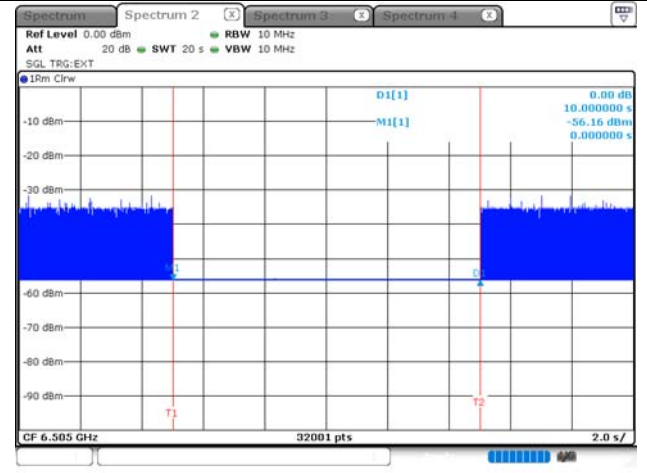


**Note.**

- M1: Injection of AWGN signal, D2: Removal of AWGN signal.


**UNII-7**

**EUT Transmission**

**6 695 Mhz (20 Mhz bandwidth)**

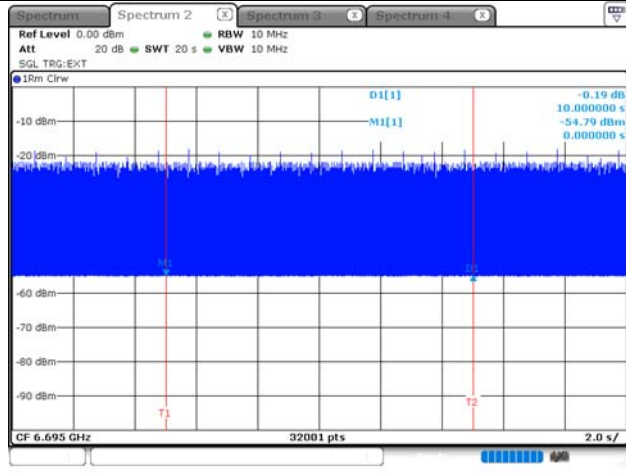


**6 665 Mhz (160 Mhz bandwidth)**

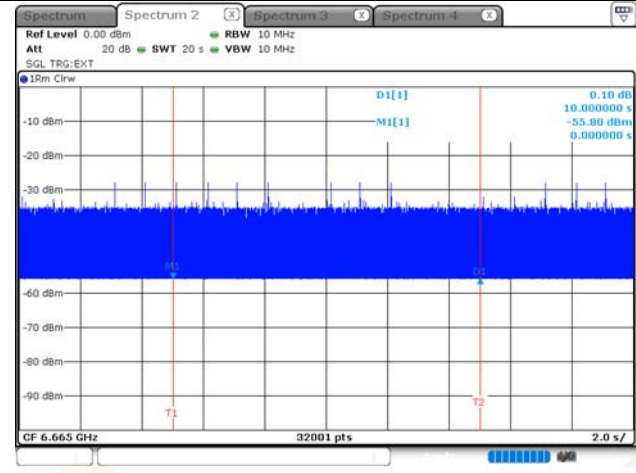


**Injected Incumbent Signal**


**6 695 Mhz (20 Mhz bandwidth)**

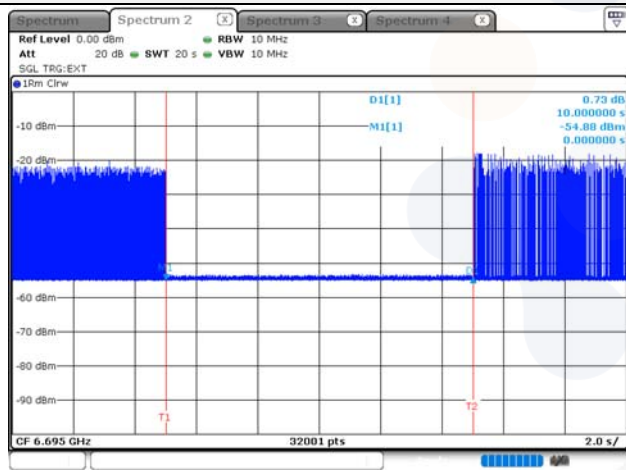


**6 590 Mhz (160 Mhz bandwidth)**

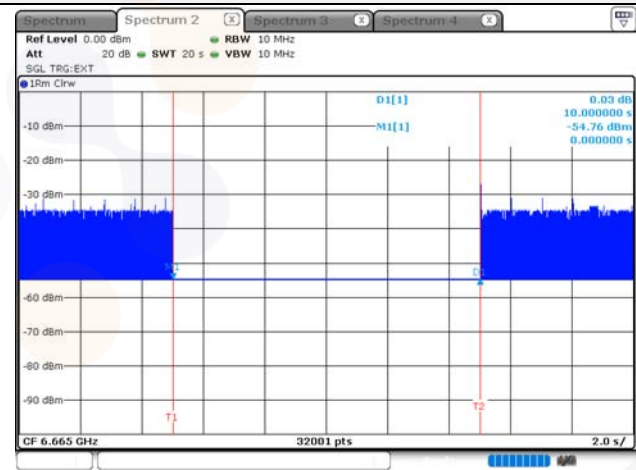

**6 665 Mhz (160 Mhz bandwidth)**

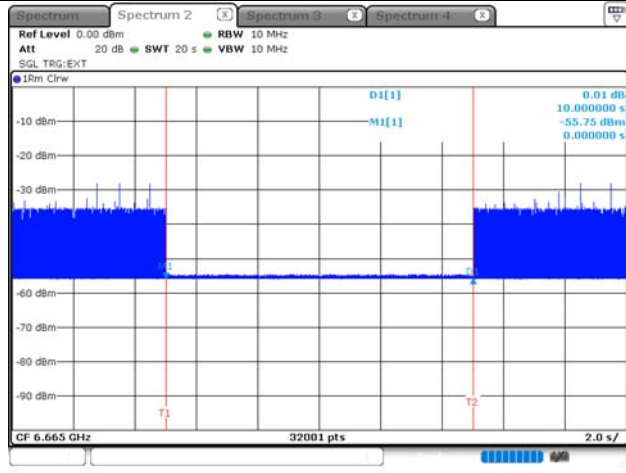

**6 740 Mhz (160 Mhz bandwidth)**

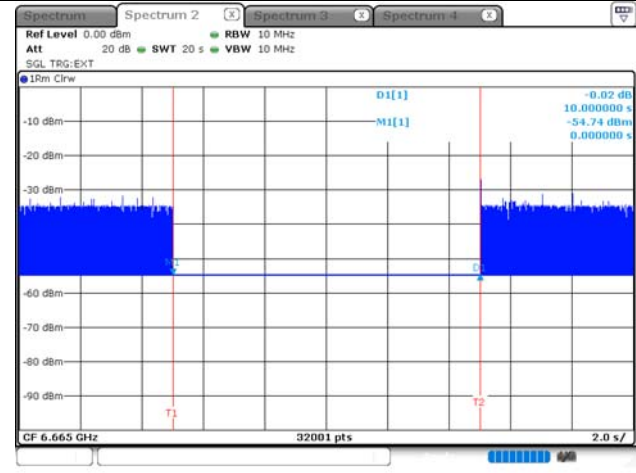


**Note.**

- M1: Injection of AWGN signal, D2: Removal of AWGN signal.


**UNII-8**

**EUT Transmission**

**6 995 Mhz (20 Mhz bandwidth)**

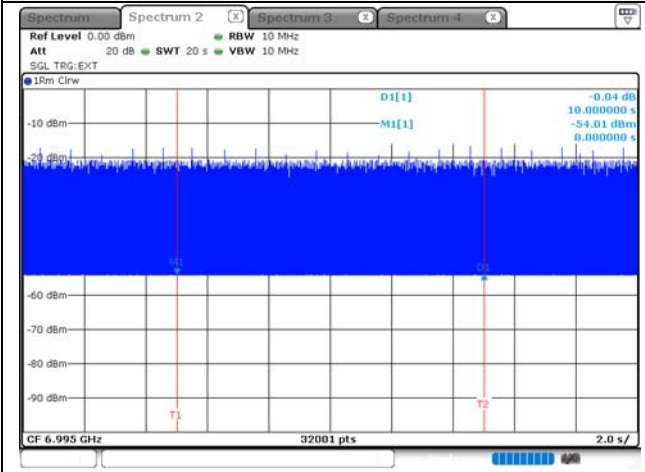


**6 985 Mhz (160 Mhz bandwidth)**

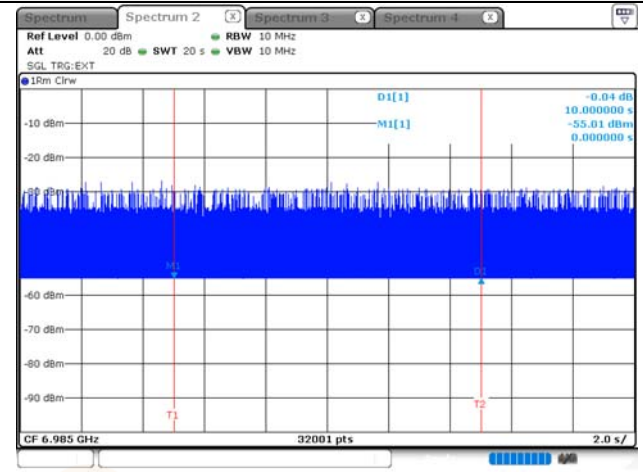


**Injected Incumbent Signal**


**6 995 Mhz (20 Mhz bandwidth)**

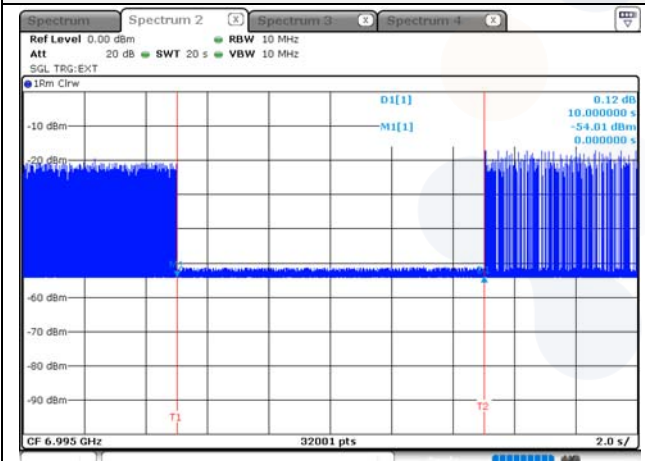


**6 910 Mhz (160 Mhz bandwidth)**

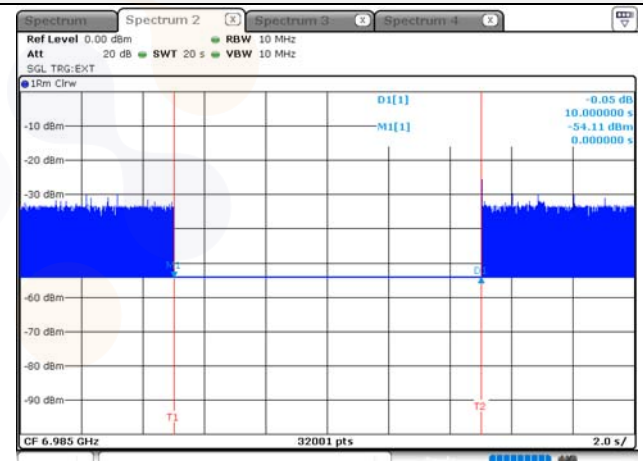

**6 985 Mhz (160 Mhz bandwidth)**

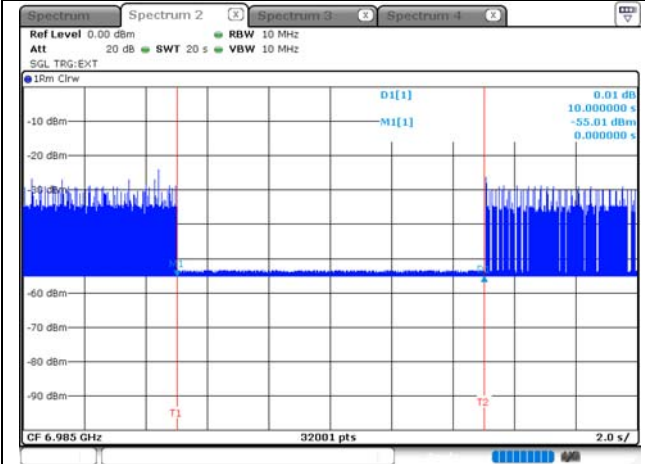

**7 060 Mhz (160 Mhz bandwidth)**

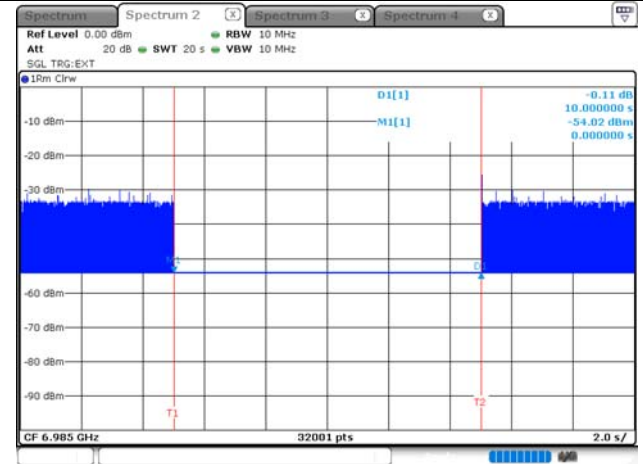


**Note.**

- M1: Injection of AWGN signal, D2: Removal of AWGN signal.


## 7.7. Spurious Emission, Band Edge and Restricted bands

### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

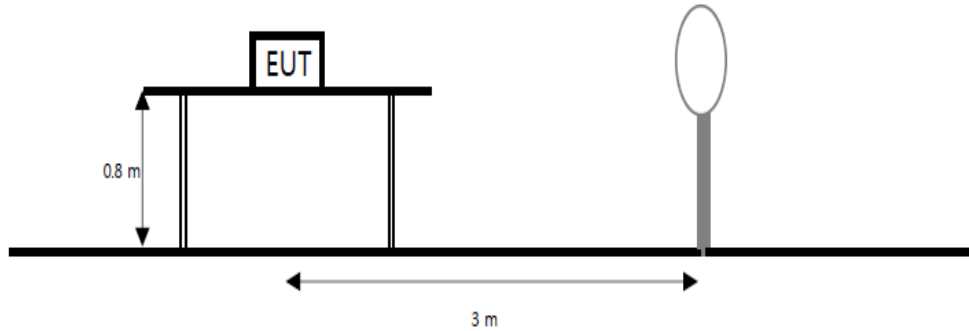

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

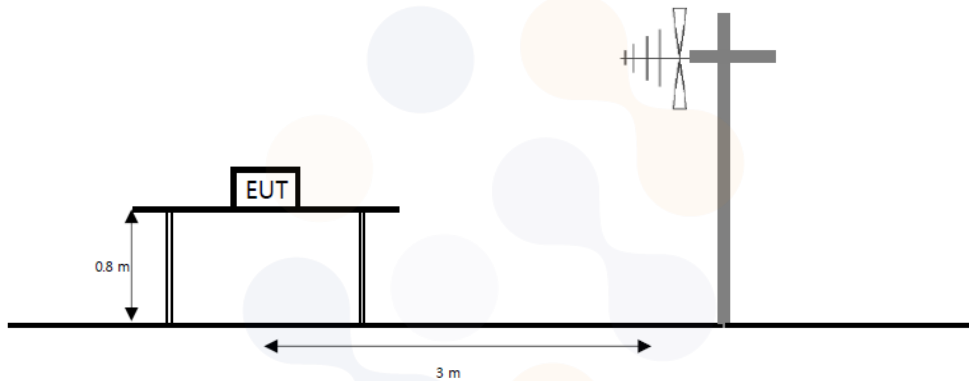

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

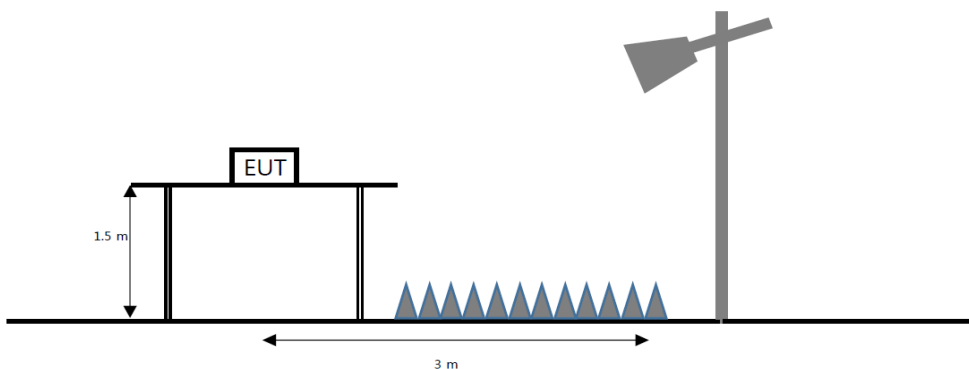



**Limit**

**FCC**

According to section 15.407(b)(6), For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

According to section 15.209(a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b) only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

**IC**

According to RSS-248 4.7.2. a, Any emissions outside of the 5925-7125 MHz band shall not exceed -27 dBm e.i.r.p.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter’s fundamental emission.

**Table 5- General field strength limits at frequencies above 30 MHz**

Frequency(MHz)	Field strength ( $\mu V/m$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 6- General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu A/m$ )	Measurement distance(m)
9 – 490 kHz <sup>1)</sup>	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
- (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

**Table 7- Restricted frequency bands\***

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

\* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

**Test procedure**

ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6  
 KDB 789033 D02 v02r01 – Section G

**Test settings**

**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW  $\geq$  (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

**Table. RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

## Average field strength measurements

### Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW  $\geq (3 \times \text{RBW})$ .
3. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

### Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
6. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $D \geq 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

## Band edge measurements

### Integration Method

For maximum emissions measurements, follow the procedures described in II.G.5., “Procedures for unwanted maximum Emissions Measurements above 1000 MHz. Except for the following changes:

1. Set RBW = 100 kHz
2. Set VBW  $\geq 3 \times$  RBW
3. Perform a band-power integration across the 1 MHz bandwidth in which the band edge emission level is to be measured. CAUTION: you must ensure that the spectrum analyzer or EMI receiver is set for peak detection and max-hold for this measurement.

For average emissions measurements, follow the procedures described in II.G.6., “Procedures for average unwanted Emissions Measurements above 1000 MHz. Except for the following changes:

1. Set RBW = 100 kHz
2. Set VBW  $\geq 3 \times$  RBW
3. Perform a band-power integration across the 1 MHz bandwidth in which the band edge emission level is to be measured.


### Notes:

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m/D_s)$   
Where:  
     $F_d$  = Distance factor in dB  
     $D_m$  = Measurement distance in meters  
     $D_s$  = Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. <sup>1)</sup> means restricted band.
6. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: “No spurious emissions were detected within 20 dB of the limit.”
7. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBμV/m, which is equivalent to  $Y - 51.5 = Z$  dBμA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.
9. Measurement configuration for 11ax RU allocations
  - 1) For the radiated band-edge test, it was tested at 11ax RU allocations near the band edge.
  - 2) For the spurious emissions, it was tested at the RU allocations with actual highest power considering each bandwidth.

**Test Result (Below 30 MHz)**

**Worst Case: 802.11ax\_HE20 RU mode (242T / RU offset 61)\_Lowest Channel (5 955 MHz)**


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
No spurious emissions were detected within 20 dB of the limit.								

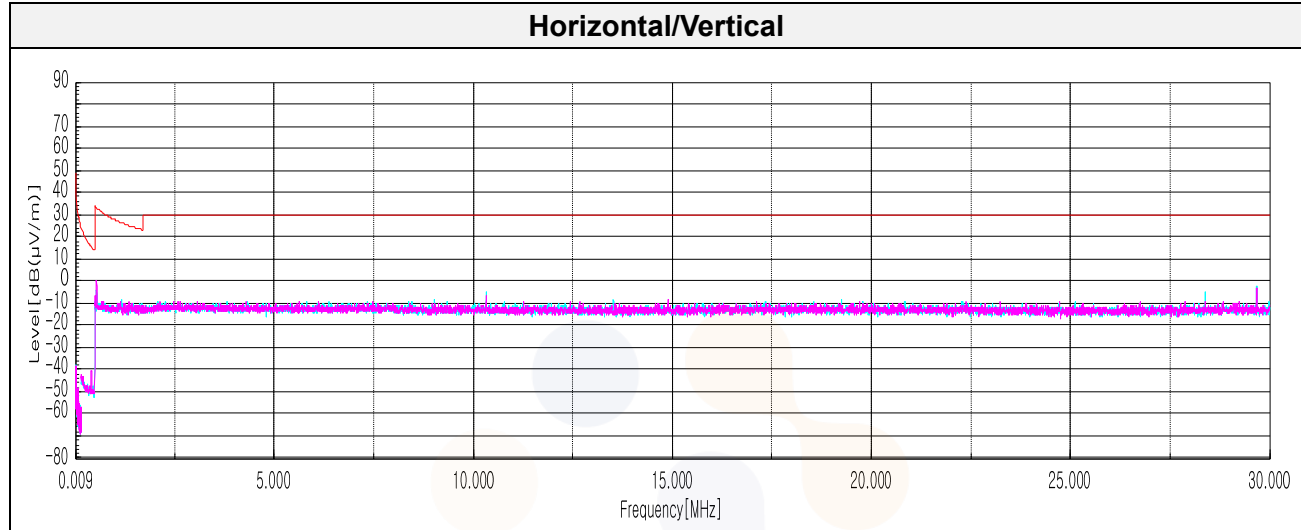

**Test Result (Below 1 000 MHz)**

**Worst Case: 802.11ax\_HE20 RU mode (242T / RU offset 61)\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Quasi peak data</b>								
106.63	V	21.90	17.46	-27.78	-	11.58	43.50	31.92
203.75	V	31.00	15.38	-26.24	-	20.14	43.50	23.36
241.82 <sup>1)</sup>	H	43.20	17.36	-25.73	-	34.83	46.00	11.17
282.20 <sup>1)</sup>	H	33.50	18.74	-25.33	-	26.91	46.00	19.09
452.92	H	29.70	22.76	-23.31	-	29.15	46.00	16.85
573.93	V	29.30	24.42	-22.11	-	31.61	46.00	14.39

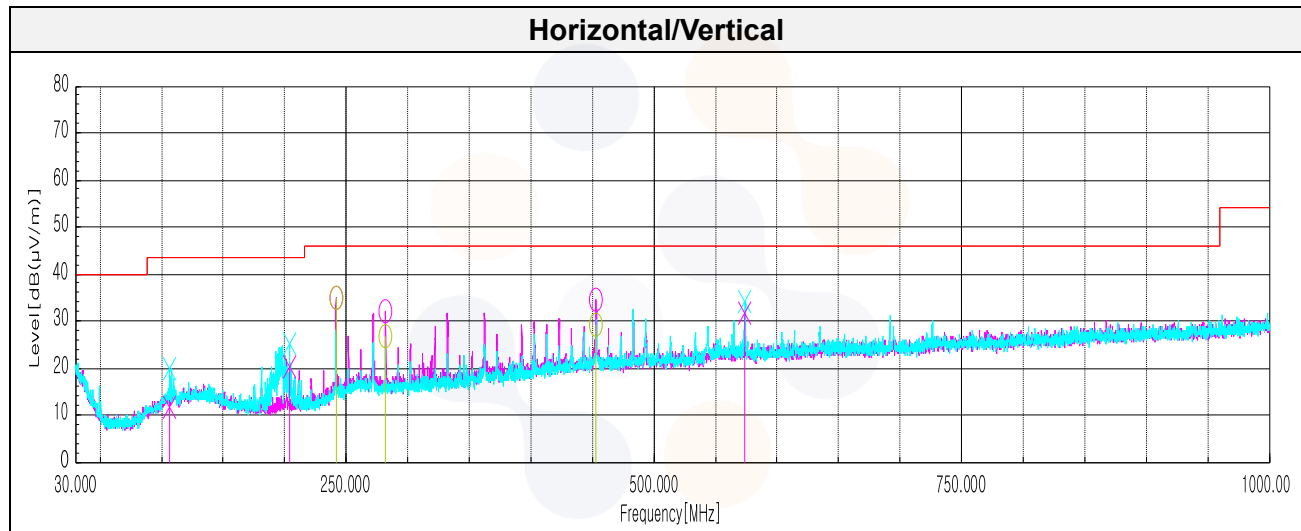

**Test results (Above 1 000 MHz)**

**UNII-5 2Tx (MIMO) Band-edge (Lowest Channel)**

**802.11a mode\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 917.79	V	40.07	35.05	-22.77	-	52.35	88.20	35.85
<b>Average Data</b>								
5 917.79	V	31.27	35.05	-22.77	0.33	43.88	68.20	24.32

**802.11ax\_HE20 SU mode\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 921.95	V	40.51	35.06	-22.74	-	52.83	88.20	35.37
<b>Average Data</b>								
5 921.95	V	31.34	35.06	-22.74	0.42	44.08	68.20	24.12

**802.11ax\_HE40 SU mode\_Lowest Channel (5 965 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 924.13	V	40.02	35.06	-22.73	-	52.35	88.20	35.85
<b>Average Data</b>								
5 924.13	V	30.75	35.06	-22.73	0.66	43.74	68.20	24.46

**802.11ax\_HE80 SU mode\_Lowest Channel (5 985 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 917.59	V	40.58	35.05	-22.77	-	52.86	88.20	35.34
<b>Average Data</b>								
5 917.59	V	30.99	35.05	-22.77	1.18	44.45	68.20	23.75



**802.11ax\_HE160 SU mode\_Lowest Channel (6 025 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 895.51	V	40.31	35.01	-22.86	-	52.46	88.20	35.74
<b>Average Data</b>								
5 895.51	V	30.89	35.01	-22.86	1.74	44.78	68.20	23.42

**802.11ax\_HE20 RU mode (26T / RU offset 0)\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 920.30	V	40.53	35.06	-22.75	-	52.84	88.20	35.36
<b>Average Data</b>								
5 920.30	V	30.63	35.06	-22.75	0.11	43.05	68.20	25.15

**802.11ax\_HE20 RU mode (52T / RU offset 37)\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 903.55	V	40.03	35.03	-22.85	-	52.21	88.20	35.99
<b>Average Data</b>								
5 903.55	V	30.64	35.03	-22.85	0.12	42.94	68.20	25.26

**802.11ax\_HE20 RU mode (106T / RU offset 53)\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 920.50	V	39.26	35.06	-22.75	-	51.57	88.20	36.63
<b>Average Data</b>								
5 920.50	V	30.81	35.06	-22.75	0.21	43.33	68.20	24.87

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 907.21	V	40.03	35.03	-22.83	-	52.23	88.20	35.97
<b>Average Data</b>								
5 907.21	V	31.13	35.03	-22.83	0.43	43.76	68.20	24.44

**802.11ax\_HE40 RU mode (484T / RU offset 65)\_Lowest Channel (5 965 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 924.67	V	40.30	35.06	-22.73	-	52.63	88.20	35.57
<b>Average Data</b>								
5 924.67	V	31.18	35.06	-22.73	0.71	44.22	68.20	23.98

**802.11ax\_HE80 RU mode (996T / RU offset 67)\_Lowest Channel (5 985 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 917.91	V	40.56	35.05	-22.77	-	52.84	88.20	35.36
<b>Average Data</b>								
5 917.91	V	30.92	35.05	-22.77	1.07	44.27	68.20	23.93


**802.11ax\_HE160 RU mode (2x996T / RU offset 68)\_Lowest Channel (6 025 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 895.95	V	40.55	35.01	-22.86	-	52.70	88.20	35.50
<b>Average Data</b>								
5 895.95	V	31.12	35.01	-22.86	2.45	45.72	68.20	22.48


**Plot of Band-edge**

In order to simplify the report, attached plots were only the lowest margin condition

**802.11ax\_HE160 RU mode (2x996T / RU offset 68)\_Lowest Channel (6 025 MHz)**

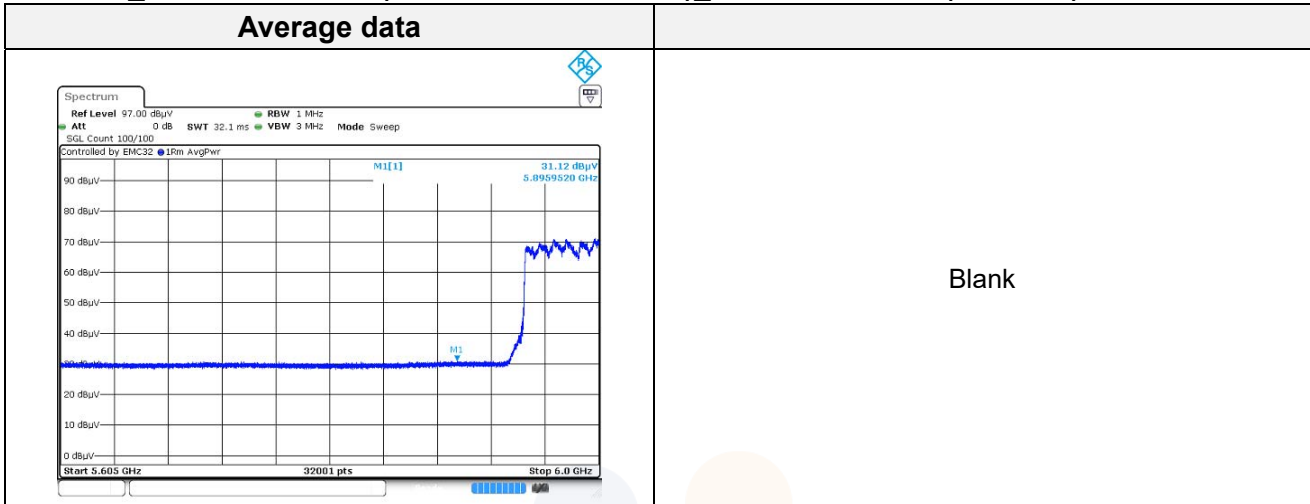

**Horizontal/Vertical for Band-edge**

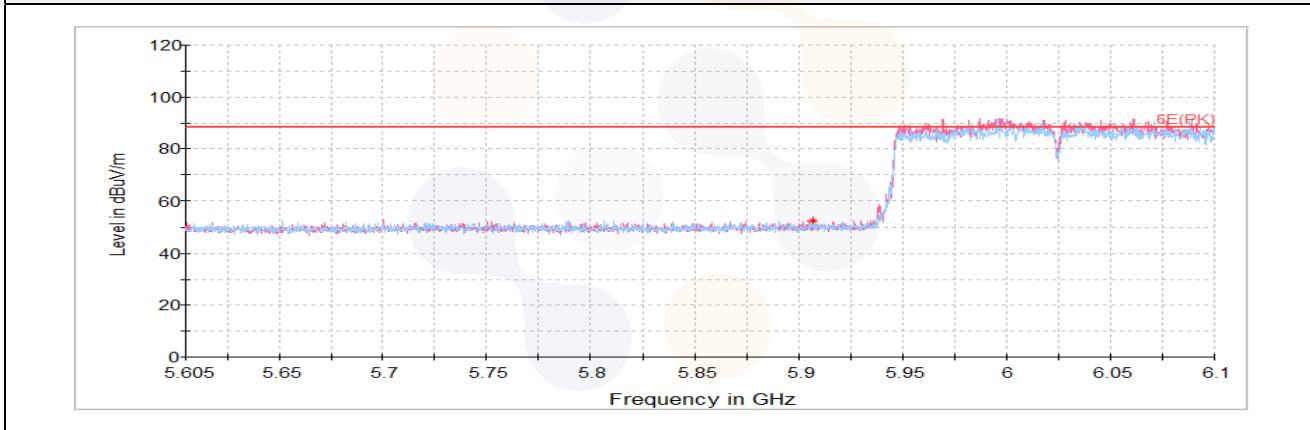

### UNII-8 2Tx (MIMO) Band-edge (Highest Channel)

#### **802.11a mode\_Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
7 125.50	V	57.87	35.13	-21.16	-	71.84	88.20	16.36
7 126.50	V	51.03	35.13	-21.16	-	65.00	88.20	23.20
7 291.96 <sup>1)</sup>	V	40.15	35.16	-21.29	-	54.02	74.00	19.98
<b>Average Data</b>								
7 125.50	V	47.91	35.13	-21.16	0.33	62.21	68.20	5.99
7 126.50	V	41.82	35.13	-21.16	0.33	56.12	68.20	12.08
7 291.96 <sup>1)</sup>	V	28.91	35.16	-21.29	0.33	43.11	54.00	10.89

#### **802.11ax\_HE20 SU mode\_Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
7 125.50	V	61.89	35.13	-21.16	-	75.86	88.20	12.34
7 126.50	V	57.26	35.13	-21.16	-	71.23	88.20	16.97
7 532.99 <sup>1)</sup>	V	39.62	35.21	-21.43	-	53.40	74.00	20.60
<b>Average Data</b>								
7 125.50	V	51.57	35.13	-21.16	0.42	65.96	68.20	2.24
7 126.50	V	46.82	35.13	-21.16	0.42	61.21	68.20	6.99
7 532.99 <sup>1)</sup>	V	30.09	35.21	-21.43	0.42	44.29	54.00	9.71

#### **802.11ax\_HE40 SU mode\_Highest Channel (7 085 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
7 238.97	V	39.89	35.15	-21.25	-	53.79	88.20	34.41
7 597.60 <sup>1)</sup>	V	40.16	35.24	-21.38	-	54.02	74.00	19.98
<b>Average Data</b>								
7 238.97	V	29.99	35.15	-21.25	0.66	44.55	68.20	23.65
7 597.60 <sup>1)</sup>	V	30.03	35.24	-21.38	0.66	44.55	54.00	9.45

**802.11ax\_HE80 SU mode\_Highest Channel (7 025 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
7 238.72	V	39.83	35.15	-21.25	-	53.73	88.20	34.47
7 579.96 <sup>1)</sup>	V	40.55	35.23	-21.39	-	54.39	74.00	19.61
<b>Average Data</b>								
7 238.72	V	30.14	35.15	-21.25	1.18	45.22	68.20	22.98
7 579.96 <sup>1)</sup>	V	29.89	35.23	-21.39	1.18	44.91	54.00	9.09

**802.11ax\_HE160 SU mode\_Highest Channel (6 985 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
7 249.79	V	40.38	35.15	-21.26	-	54.27	88.20	33.93
7 540.32 <sup>1)</sup>	V	40.50	35.22	-21.42	-	54.30	74.00	19.70
<b>Average Data</b>								
7 249.79	V	29.92	35.15	-21.26	1.74	45.55	68.20	22.65
7 540.32 <sup>1)</sup>	V	29.97	35.22	-21.42	1.74	45.51	54.00	8.49

**802.11ax\_HE20 RU mode (26T / RU offset 8)\_Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
7 125.50	V	63.24	35.13	-21.16	-	77.21	88.20	10.99
7 126.50	V	55.89	35.13	-21.16	-	69.86	88.20	18.34
7 258.52 <sup>1)</sup>	V	39.84	35.15	-21.27	-	53.72	74.00	20.28
<b>Average Data</b>								
7 125.50	V	49.01	35.13	-21.16	0.11	63.09	68.20	5.11
7 126.50	V	41.77	35.13	-21.16	0.11	55.85	68.20	12.35
7 258.52 <sup>1)</sup>	V	29.39	35.15	-21.27	0.11	43.38	54.00	10.62

**802.11ax\_HE20 RU mode (52T / RU offset 40)\_Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
7 125.50	V	60.48	35.13	-21.16	-	74.45	88.20	13.75
7 126.50	V	53.42	35.13	-21.16	-	67.39	88.20	20.81
7 256.69 <sup>1)</sup>	V	39.26	35.15	-21.26	-	53.15	74.00	20.85
<b>Average Data</b>								
7 125.50	V	48.15	35.13	-21.16	0.12	62.24	68.20	5.96
7 126.50	V	41.01	35.13	-21.16	0.12	55.10	68.20	13.10
7 256.69 <sup>1)</sup>	V	29.41	35.15	-21.26	0.12	43.42	54.00	10.58

**802.11ax\_HE20 RU mode (106T / RU offset 54)\_Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
7 125.50	V	61.23	35.13	-21.16	-	75.20	88.20	13.00
7 126.50	V	53.39	35.13	-21.16	-	67.36	88.20	20.84
7 530.22 <sup>1)</sup>	V	39.83	35.21	-21.43	-	53.61	74.00	20.39
<b>Average Data</b>								
7 125.50	V	49.33	35.13	-21.16	0.21	63.51	68.20	4.69
7 126.50	V	41.88	35.13	-21.16	0.21	56.06	68.20	12.14
7 530.22 <sup>1)</sup>	V	30.05	35.21	-21.43	0.21	44.04	54.00	9.96

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
7 125.50	V	63.00	35.13	-21.16	-	76.97	88.20	11.23
7 126.50	V	54.78	35.13	-21.16	-	68.75	88.20	19.45
7 553.68 <sup>1)</sup>	V	39.67	35.22	-21.41	-	53.48	74.00	20.52
<b>Average Data</b>								
7 125.50	V	49.23	35.13	-21.16	0.43	63.63	68.20	4.57
7 126.50	V	41.95	35.13	-21.16	0.43	56.35	68.20	11.85
7 553.68 <sup>1)</sup>	V	30.01	35.22	-21.41	0.43	44.25	54.00	9.75

**802.11ax\_HE40 RU mode (484T / RU offset 65)\_Highest Channel (7 085 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
7 226.33	V	40.63	35.15	-21.24	-	54.54	88.20	33.66
7 483.35 <sup>1)</sup>	V	40.77	35.20	-21.44	-	54.53	74.00	19.47
<b>Average Data</b>								
7 226.33	V	30.18	35.15	-21.24	0.71	44.80	68.20	23.40
7 483.35 <sup>1)</sup>	V	30.14	35.20	-21.44	0.71	44.61	54.00	9.39

**802.11ax\_HE80 RU mode (996T / RU offset 67)\_Highest Channel (7 025 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
7 240.63	V	39.58	35.15	-21.25	-	53.48	88.20	34.72
7 579.30 <sup>1)</sup>	V	40.54	35.23	-21.39	-	54.38	74.00	19.62
<b>Average Data</b>								
7 240.63	V	29.92	35.15	-21.25	1.07	44.89	68.20	23.31
7 579.30 <sup>1)</sup>	V	30.04	35.23	-21.39	1.07	44.95	54.00	9.05


**802.11ax\_HE160 RU mode (2x996T / RU offset 68)\_Highest Channel (6 985 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
7 177.32	V	39.89	35.14	-21.20	-	53.83	88.20	34.37
7 571.31 <sup>1)</sup>	V	40.72	35.23	-21.40	-	54.55	74.00	19.45
<b>Average Data</b>								
7 177.32	V	29.98	35.14	-21.20	2.45	46.37	68.20	21.83
7 571.31 <sup>1)</sup>	V	30.13	35.23	-21.40	2.45	46.41	54.00	7.59

**Plot of Band-edge**


In order to simplify the report, attached plots were only the lowest margin condition

**802.11ax\_HE20 SU mode\_Highest Channel (7 115 MHz)**

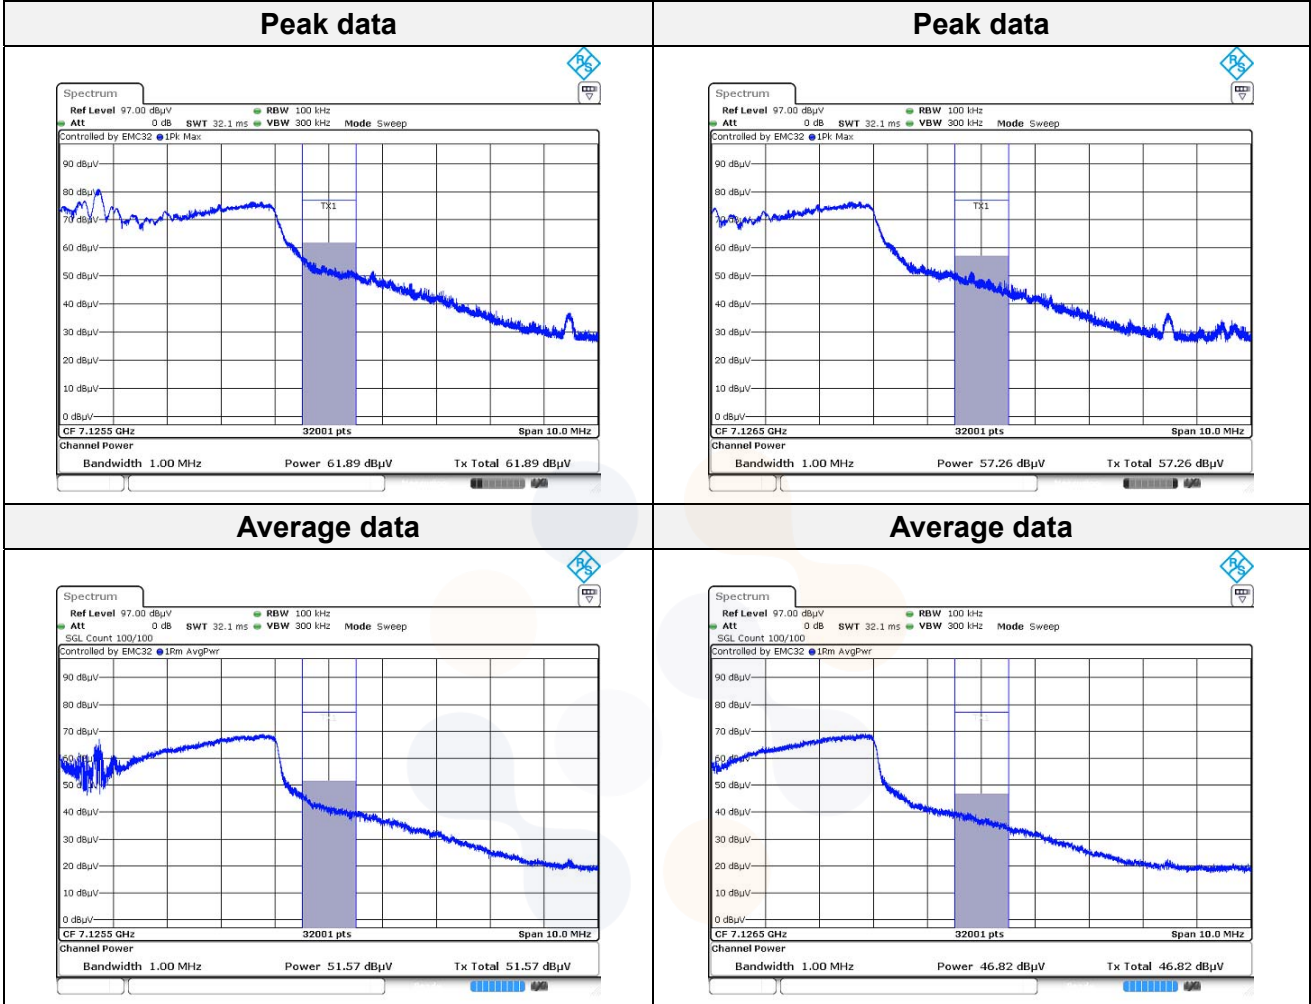




**Average data**

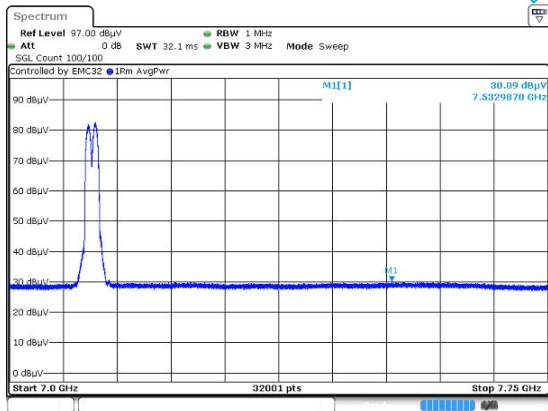

Blank

**Horizontal/Vertical for Band-edge**

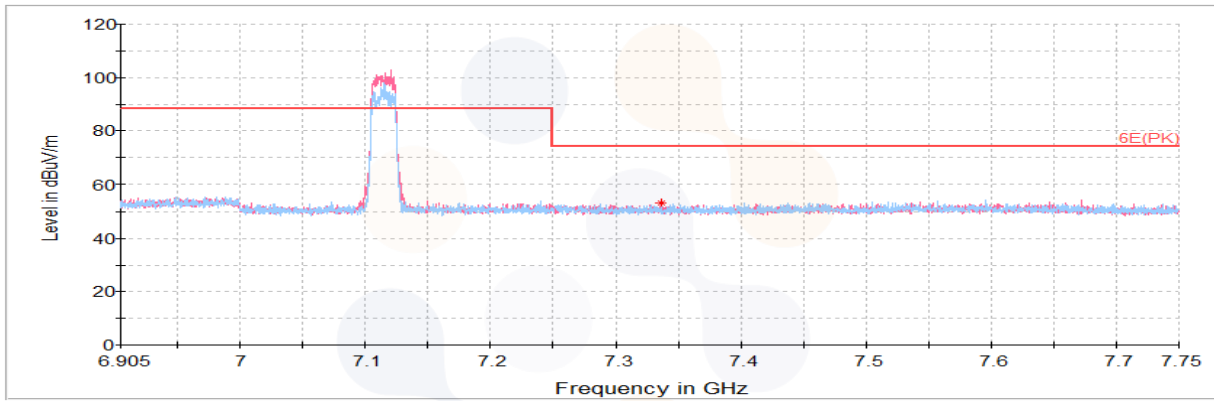

### UNII-5 2Tx (MIMO) Harmonics and Spurious Emissions

#### 802.11a mode\_Lowest Channel (5 955 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
11 866.46 <sup>1)</sup>	V	60.33	38.29	-46.40	-	52.22	74.00	21.78
17 812.37 <sup>1)</sup>	V	59.81	40.08	-44.69	-	55.20	74.00	18.80
<b>Average Data</b>								
11 866.46 <sup>1)</sup>	V	50.19	38.29	-46.40	0.33	42.41	54.00	11.59
17 812.37 <sup>1)</sup>	V	46.45	40.08	-44.69	0.33	42.17	54.00	11.83

#### 802.11a mode\_Middle Channel (6 175 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
12 642.21 <sup>1)</sup>	H	61.80	38.91	-47.11	-	53.60	74.00	20.40
<b>Average Data</b>								
12 642.21 <sup>1)</sup>	H	44.73	38.91	-47.11	0.33	36.86	54.00	17.14

#### 802.11a mode\_Highest Channel (6 415 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
12 915.92	V	58.59	39.13	-46.83	-	50.89	68.20	17.31
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11ax\_HE20 SU mode\_Lowest Channel (5 955 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
11 923.81 <sup>1)</sup>	V	59.29	38.34	-46.30	-	51.33	74.00	22.67
17 891.88 <sup>1)</sup>	V	58.13	39.92	-44.53	-	53.52	74.00	20.48
<b>Average Data</b>								
11 923.81 <sup>1)</sup>	V	49.48	38.34	-46.30	0.42	41.94	54.00	12.06
17 891.88 <sup>1)</sup>	V	46.40	39.92	-44.53	0.42	42.21	54.00	11.79

**802.11ax\_HE20 SU mode\_ Middle Channel (6 175 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 232.91 <sup>1)</sup>	V	63.08	35.40	-49.65	-	48.83	74.00	25.17
12 339.48 <sup>1)</sup>	V	59.18	38.67	-46.91	-	50.94	74.00	23.06
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 SU mode\_ Highest Channel (6 415 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 819.61	H	58.75	39.06	-46.93	-	50.88	68.20	17.32
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Lowest Channel (5 965 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
11 946.69 <sup>1)</sup>	V	58.60	38.36	-46.26	-	50.70	74.00	23.30
17 907.12 <sup>1)</sup>	V	58.53	39.89	-44.49	-	53.93	74.00	20.07
<b>Average Data</b>								
17 907.12 <sup>1)</sup>	V	46.65	39.89	-44.49	0.66	42.71	54.00	11.29

**802.11ax\_HE40 SU mode\_ Middle Channel (6 165 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 219.97 <sup>1)</sup>	V	63.64	35.40	-49.67	-	49.37	74.00	24.63
12 393.03 <sup>1)</sup>	H	57.96	38.71	-47.02	-	49.65	74.00	24.35
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_Highest Channel (6 405 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 808.11	H	58.88	39.05	-46.94	-	50.99	68.20	17.21
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_Lowest Channel (5 985 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 285.02 <sup>1)</sup>	V	61.62	35.40	-49.61	-	47.41	74.00	26.59
11 972.92 <sup>1)</sup>	V	58.77	38.38	-46.21	-	50.94	74.00	23.06
17 953.36 <sup>1)</sup>	V	58.49	39.79	-44.40	-	53.88	74.00	20.12
<b>Average Data</b>								
17 953.36 <sup>1)</sup>	V	46.90	39.79	-44.40	1.18	43.47	54.00	10.53

**802.11ax\_HE80 SU mode\_Middle Channel (6 145 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 193.38 <sup>1)</sup>	V	62.67	35.40	-49.69	-	48.38	74.00	25.62
12 270.84 <sup>1)</sup>	H	58.16	38.62	-46.75	-	50.03	74.00	23.97
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_Highest Channel (6 385 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 799.48	H	58.97	39.04	-46.95	-	51.06	68.20	17.14
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 SU mode\_Lowest Channel (6 025 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 207.68 <sup>1)</sup>	V	60.84	38.57	-46.62	-	52.79	74.00	21.21
<b>Average Data</b>								
12 207.68 <sup>1)</sup>	V	48.64	38.57	-46.62	1.74	42.33	54.00	11.67

**802.11ax\_HE160 SU mode\_Middle Channel (6 185 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 246.20 <sup>1)</sup>	V	62.47	35.40	-49.64	-	48.23	74.00	25.77
12 354.94 <sup>1)</sup>	H	57.74	38.68	-46.94	-	49.48	74.00	24.52
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 SU mode\_Highest Channel (6 345 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 276.03 <sup>1)</sup>	V	62.02	35.40	-49.61	-	47.81	74.00	26.19
12 701.73	H	58.91	38.96	-47.05	-	50.82	68.20	17.38
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_Lowest Channel (5 955 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 129.41 <sup>1)</sup>	H	62.82	35.40	-49.75	-	48.47	74.00	25.53
11 855.91 <sup>1)</sup>	V	59.27	38.28	-46.42	-	51.13	74.00	22.87
17 894.95 <sup>1)</sup>	V	57.13	39.91	-44.52	-	52.52	74.00	21.48
<b>Average Data</b>								
11 855.91 <sup>1)</sup>	V	49.55	38.28	-46.42	0.43	41.84	54.00	12.16
17 894.95 <sup>1)</sup>	V	46.38	39.91	-44.52	0.43	42.20	54.00	11.80

**802.11ax\_HE40 RU mode (484T / RU offset 65)\_Lowest Channel (5 965 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
11 982.98 <sup>1)</sup>	H	58.70	38.39	-46.19	-	50.90	74.00	23.10
17 902.58 <sup>1)</sup>	H	57.60	39.89	-44.50	-	52.99	74.00	21.01
<b>Average Data</b>								
17 902.58 <sup>1)</sup>	H	46.65	39.89	-44.50	0.71	42.75	54.00	11.25

**802.11ax\_HE80 RU mode (996T / RU offset 67)\_Highest Channel (6 385 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 767.86	H	58.44	39.01	-46.98	-	50.47	68.20	17.73
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 RU mode (2X996T / RU offset 68)\_Highest Channel (6 345 MHz)**


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 268.84 <sup>1)</sup>	V	62.28	35.40	-49.62	-	48.06	74.00	25.94
12 694.19 <sup>1)</sup>	H	58.84	38.96	-47.06	-	50.74	74.00	23.26
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

### Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

#### 802.11ax\_HE80 SU mode\_Lowest Channel (5 985 MHz)


Horizontal/Vertical for 1 GHz ~ 8 GHz

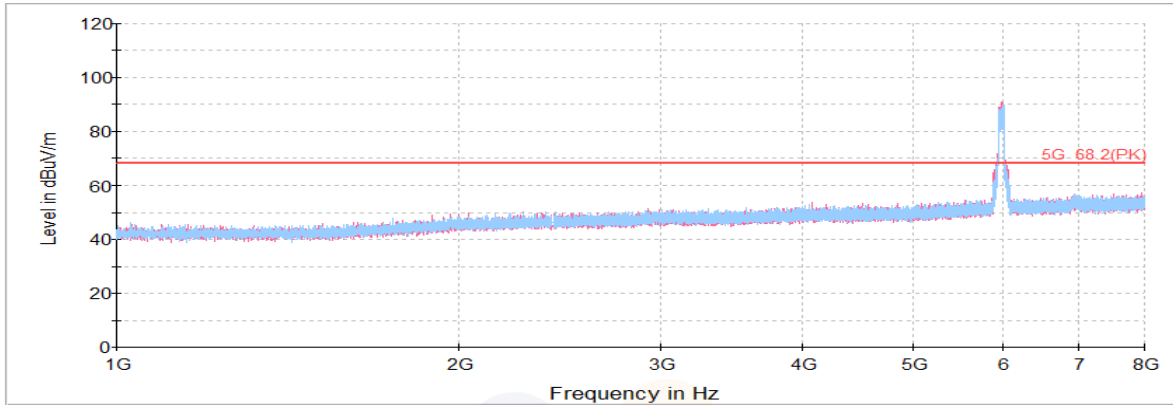

Horizontal/Vertical for 8 GHz ~ 18 GHz

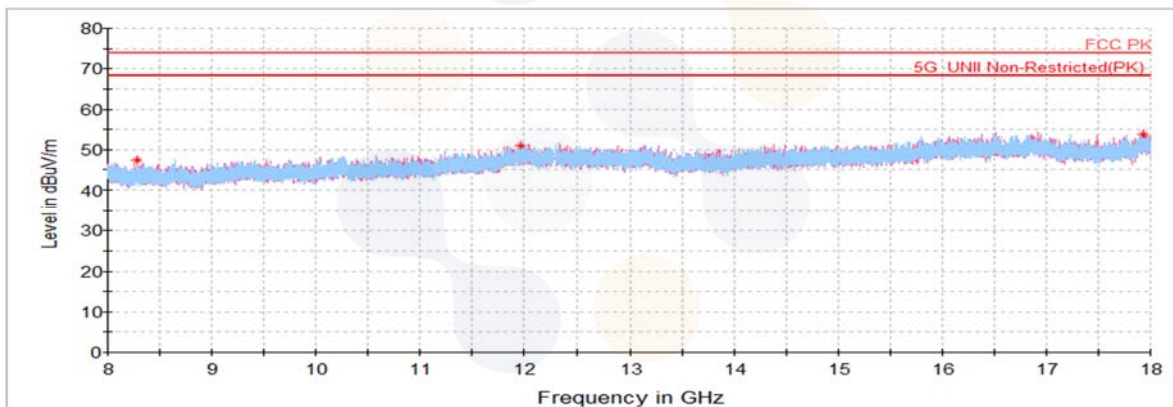

Horizontal/Vertical for 18 GHz ~ 40 GHz

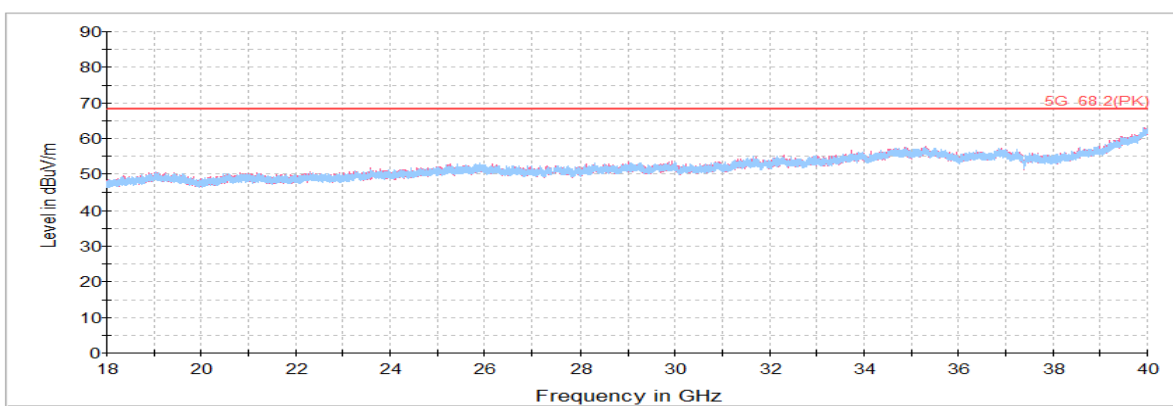

### UNII-6 2Tx (MIMO) Harmonics and Spurious Emissions

#### 802.11a mode\_Lowest Channel (6 435 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 579.70	V	63.54	35.45	-49.38	-	49.61	68.20	18.59
12 897.95	V	58.54	39.12	-46.84	-	50.82	68.20	17.38
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11a mode\_Middle Channel (6 475 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 633.61	V	65.26	35.48	-49.36	-	51.38	68.20	16.82
12 916.28	V	59.84	39.13	-46.82	-	52.15	68.20	16.05
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11a mode\_Highest Channel (6 515 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
9 755.22	H	61.72	36.56	-48.15	-	50.13	68.20	18.07
13 013.31	V	59.20	39.01	-46.77	-	51.44	68.20	16.76
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11ax\_HE20 SU mode\_Lowest Channel (6 435 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 837.94	V	58.57	39.07	-46.91	-	50.73	68.20	17.47
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								



**802.11ax\_HE20 SU mode\_ Middle Channel (6 475 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 923.11	V	58.67	39.14	-46.82	-	50.99	68.20	17.21
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 SU mode\_ Highest Channel (6 515 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 136.22	H	59.16	39.05	-47.06	-	51.15	68.20	17.05
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Lowest Channel (6 445 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 915.20	H	58.26	39.13	-46.83	-	50.56	68.20	17.64
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Middle Channel (6 485 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 959.41	H	57.48	39.17	-46.78	-	49.87	68.20	18.33
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_Highest Channel (6 525 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 699.73	V	63.74	35.52	-49.34	-	49.92	68.20	18.28
9 081.39 <sup>1)</sup>	V	60.64	35.80	-49.07	-	47.37	74.00	26.63
13 095.25	H	58.02	39.04	-46.96	-	50.10	68.20	18.10
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_Middle Channel (6 465 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
9 349.84 <sup>1)</sup>	V	60.20	36.12	-48.54	-	47.78	74.00	26.22
12 804.16	H	58.37	39.04	-46.94	-	50.47	68.20	17.73
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 SU mode\_Middle Channel (6 505 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 140.53	H	58.97	39.06	-47.07	-	50.96	68.20	17.24
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_Highest Channel (6 515 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 139.45	V	59.46	39.06	-47.07	-	51.45	68.20	16.75
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 RU mode (484T / RU offset 65)\_Highest Channel (6 525 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 906.22	H	58.02	39.12	-46.84	-	50.30	68.20	17.90
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 RU mode (996T / RU offset 67)\_Middle Channel (6 465 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 960.84	H	58.06	39.17	-46.78	-	50.45	68.20	17.75
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 RU mode (2X996T / RU offset 68)\_Middle Channel (6 505 MHz)**


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 995.34	V	57.53	39.20	-46.74	-	49.99	68.20	18.21
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**Plot of Harmonics and Spurious Emissions**


In order to simplify the report, attached plots were only the lowest margin condition

**802.11a mode\_Middle Channel (6 475 MHz)**


**Horizontal/Vertical for 1 GHz ~ 8 GHz**

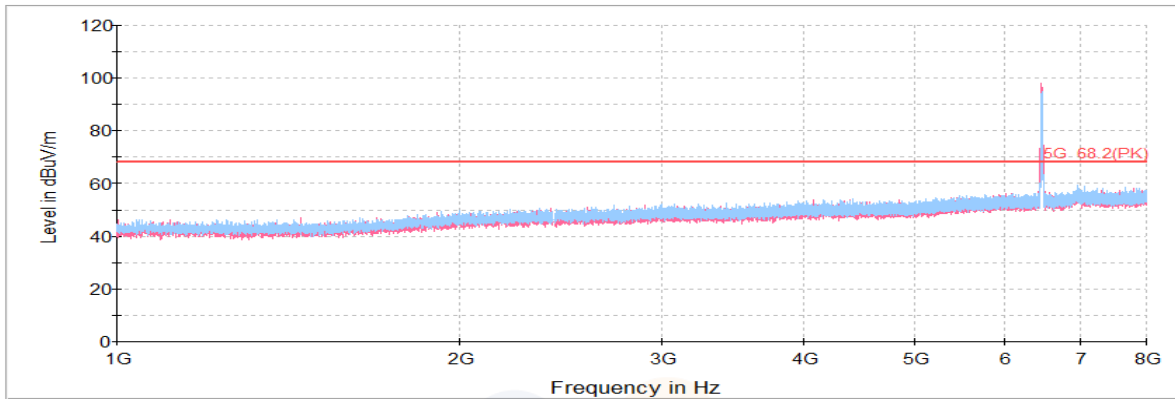

**Horizontal/Vertical for 8 GHz ~ 18 GHz**

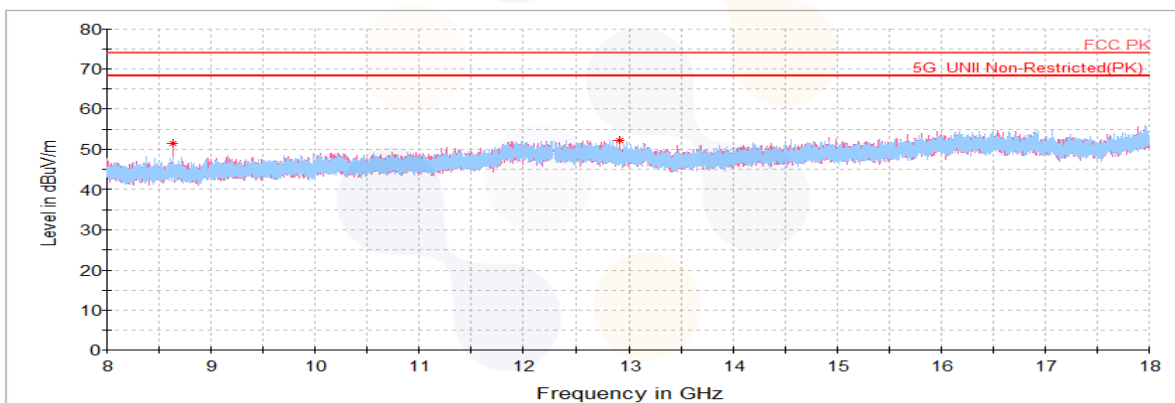

**Horizontal/Vertical for 18 GHz ~ 40 GHz**

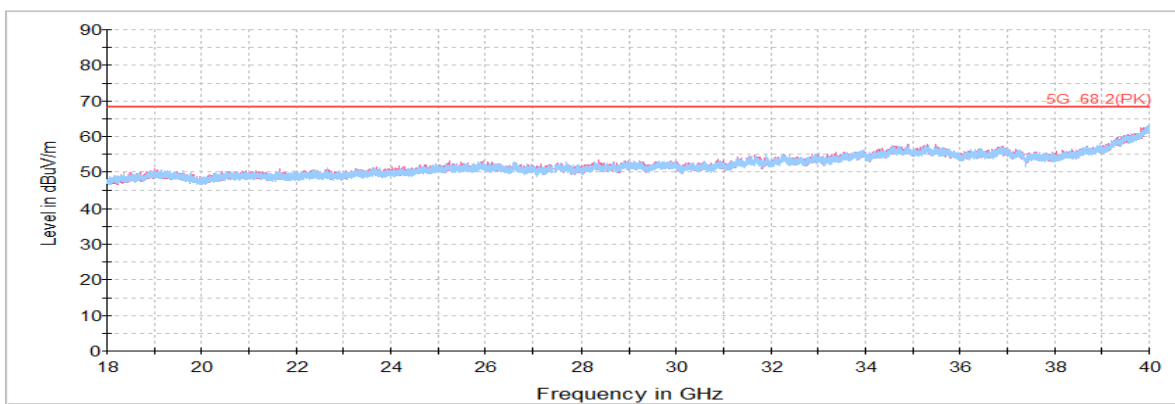

### UNII-7 2Tx (MIMO) Harmonics and Spurious Emissions

#### 802.11a mode\_Lowest Channel (6 535 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 713.03	V	63.78	35.53	-49.33	-	49.98	68.20	18.22
13 159.94	H	60.56	39.06	-47.11	-	52.51	68.20	15.69
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11a mode\_Middle Channel (6 695 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 378.80 <sup>1)</sup>	V	58.15	39.15	-47.63	-	49.67	74.00	24.33
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11a mode\_Highest Channel (6 875 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 849.94	H	60.29	38.32	-47.62	-	50.99	68.20	17.21
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11ax\_HE20 SU mode\_Lowest Channel (6 535 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 819.25	V	59.97	39.06	-46.93	-	52.10	68.20	16.10
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 SU mode\_ Middle Channel (6 695 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 926.50	V	65.99	35.66	-49.26	-	52.39	68.20	15.81
13 230.73	V	58.78	39.09	-47.28	-	50.59	68.20	17.61
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 SU mode\_ Highest Channel (6 875 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
9 080.31 <sup>1)</sup>	V	61.23	35.80	-49.08	-	47.95	74.00	26.05
13 856.77	H	58.74	38.31	-47.62	-	49.43	68.20	18.77
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Lowest Channel (6 565 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 753.28	V	63.26	35.55	-49.32	-	49.49	68.20	18.71
13 137.30	V	58.60	39.05	-47.06	-	50.59	68.20	17.61
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Middle Channel (6 685 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 913.56	V	64.19	35.65	-49.27	-	50.57	68.20	17.63
13 389.58 <sup>1)</sup>	V	57.76	39.16	-47.65	-	49.27	74.00	24.73
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Highest Channel (6 845 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 789.20	H	58.80	38.37	-47.67	-	49.50	68.20	18.70
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_ Lowest Channel (6 545 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
12 987.08	V	59.03	39.19	-46.75	-	51.47	68.20	16.73
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_ Middle Channel (6 705 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 940.16	V	65.52	35.66	-49.26	-	51.92	68.20	16.28
13 264.16 <sup>1)</sup>	H	58.95	39.11	-47.36	-	50.70	74.00	23.30
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_ Highest Channel (6 865 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 649.77	V	58.38	38.48	-47.79	-	49.07	68.20	19.13
14 895.72	V	59.46	40.15	-47.08	-	52.53	68.20	15.67
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 SU mode\_Lowest Channel (6 665 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 886.61	V	63.90	35.63	-49.27	-	50.26	68.20	17.94
13 309.44 <sup>1)</sup>	H	58.75	39.12	-47.47	-	50.40	74.00	23.60
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 SU mode\_Highest Channel (6 825 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 610.23	H	58.41	38.51	-47.82	-	49.10	68.20	19.10
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_Middle Channel (6 695 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 926.86	V	66.53	35.66	-49.26	-	52.93	68.20	15.27
13 376.64 <sup>1)</sup>	V	57.33	39.15	-47.62	-	48.86	74.00	25.14
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 RU mode (484T / RU offset 65)\_Highest Channel (6 845 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 690.73	H	58.60	38.45	-47.76	-	49.29	68.20	18.91
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								



**802.11ax\_HE80 RU mode (996T / RU offset 67)\_Lowest Channel (6 545 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 160.30	H	60.17	39.06	-47.11	-	52.12	68.20	16.08
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 RU mode (2X996T / RU offset 68)\_Highest Channel (6 825 MHz)**


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 667.73	V	60.25	38.47	-47.77	-	50.95	68.20	17.25
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**Plot of Harmonics and Spurious Emissions**


In order to simplify the report, attached plots were only the lowest margin condition

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_ Middle Channel (6 695 MHz)**


**Horizontal/Vertical for 1 GHz ~ 8 GHz**

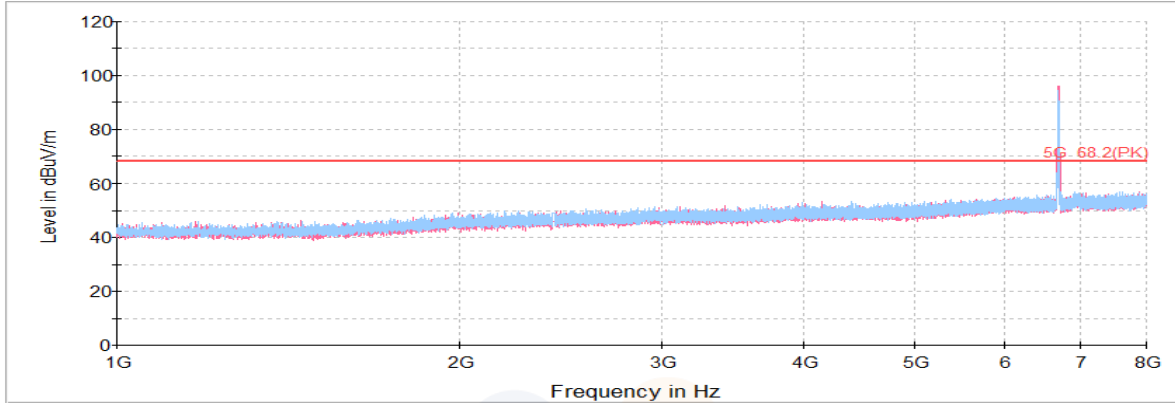

**Horizontal/Vertical for 8 GHz ~ 18 GHz**

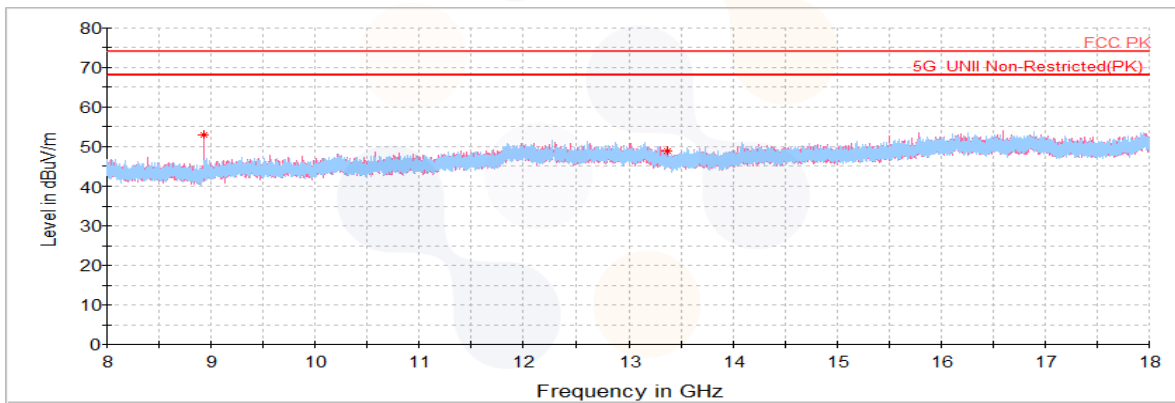

**Horizontal/Vertical for 18 GHz ~ 40 GHz**

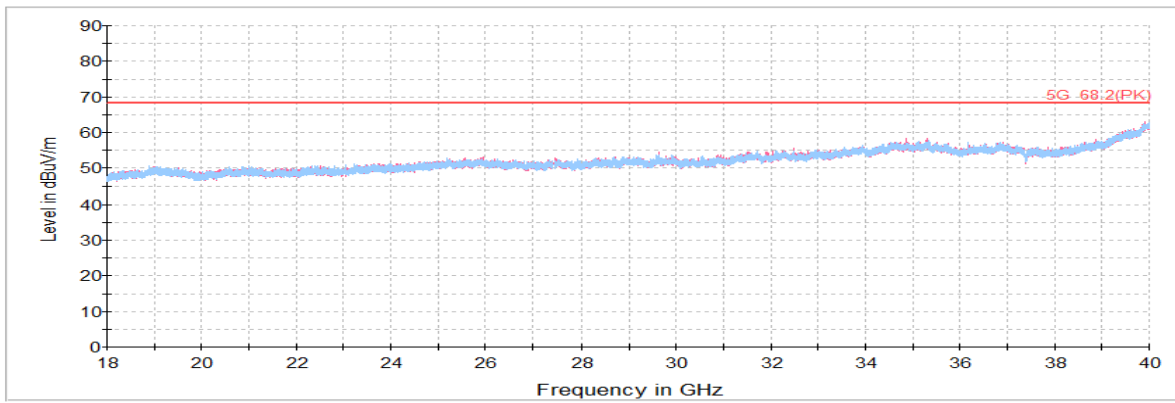

### UNII-8 2Tx (MIMO) Harmonics and Spurious Emissions

#### 802.11a mode\_Lowest Channel (6 895 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
11 187.02 <sup>1)</sup>	V	61.40	37.69	-47.53	-	51.56	74.00	22.44
13 706.19	H	59.41	38.44	-47.74	-	50.11	68.20	18.09
<b>Average Data</b>								
11 187.02 <sup>1)</sup>	V	44.48	37.69	-47.53	0.33	34.97	54.00	19.03

#### 802.11a mode\_Middle Channel (6 995 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
13 985.78	V	60.17	38.21	-47.51	-	50.87	68.20	17.33
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11a mode\_Highest Channel (7 115 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
14 241.30	H	59.51	39.04	-47.39	-	51.16	68.20	17.04
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

#### 802.11ax\_HE20 SU mode\_Lowest Channel (6 895 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
13 670.97	V	58.36	38.46	-47.77	-	49.05	68.20	19.15
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 SU mode\_ Middle Channel (6 995 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
14 046.52	V	58.19	38.93	-47.48	-	49.64	68.20	18.56
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 SU mode\_ Highest Channel (7 115 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 849.22	V	58.75	38.32	-47.62	-	49.45	68.20	18.75
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Lowest Channel (6 885 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 685.34	V	58.24	38.45	-47.76	-	48.93	68.20	19.27
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_ Middle Channel (6 965 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
14 022.08	H	57.73	38.91	-47.49	-	49.15	68.20	19.05
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 SU mode\_Highest Channel (7 085 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
14 185.59	H	57.77	39.01	-47.42	-	49.36	68.20	18.84
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_Lowest Channel (6 945 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 919.30	V	57.42	38.26	-47.57	-	48.11	68.20	20.09
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 SU mode\_Highest Channel (7 025 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
14 127.02	H	57.80	38.98	-47.44	-	49.34	68.20	18.86
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 SU mode\_Middle Channel (6 985 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 989.38	H	58.52	38.21	-47.51	-	49.22	68.20	18.98
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE20 RU mode (242T / RU offset 61)\_Lowest Channel (6 895 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 628.92	V	58.29	38.50	-47.81	-	48.98	68.20	19.22
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE40 RU mode (484T / RU offset 65)\_Middle Channel (6 965 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 963.50	H	58.82	38.23	-47.53	-	49.52	68.20	18.68
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE80 RU mode (996T / RU offset 67)\_Lowest Channel 6 945 MHz**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
13 853.89	V	58.80	38.32	-47.62	-	49.50	68.20	18.70
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

**802.11ax\_HE160 RU mode (2X996T / RU offset 68)\_Middle Channel (6 985 MHz)**


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
8 759.75	H	61.23	35.56	-49.32	-	47.47	68.20	20.73
13 984.34	V	60.23	38.21	-47.51	-	50.93	68.20	17.27
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit								

### Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

#### 802.11a mode\_Highest Channel (7 115 MHz)


Horizontal/Vertical for 1 GHz ~ 8 GHz

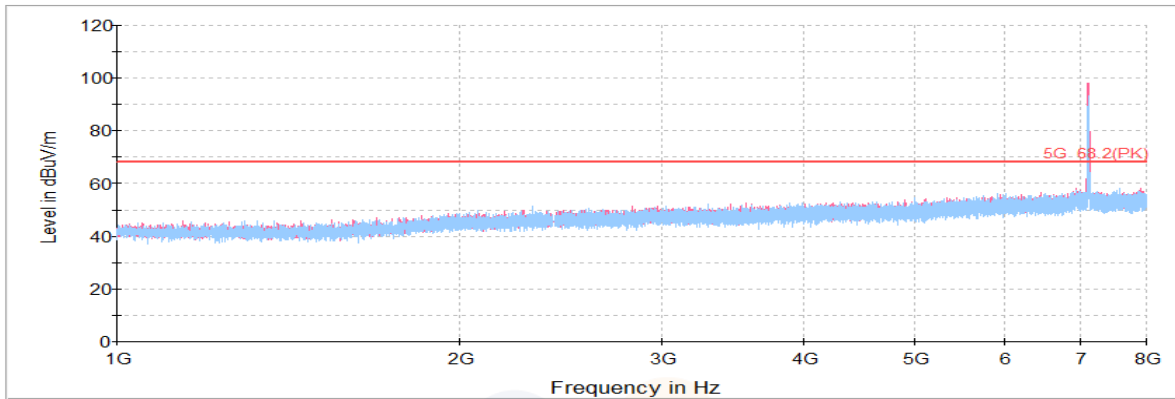

Horizontal/Vertical for 8 GHz ~ 18 GHz

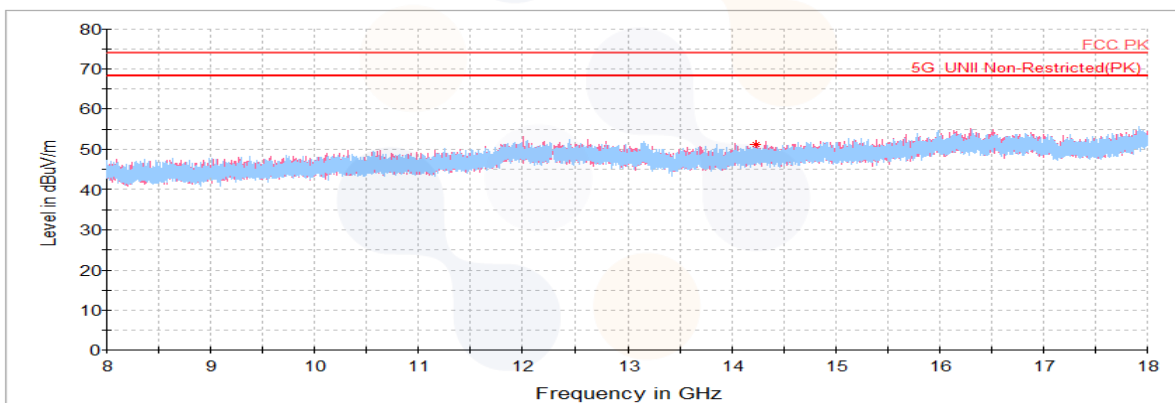

Horizontal/Vertical for 18 GHz ~ 40 GHz

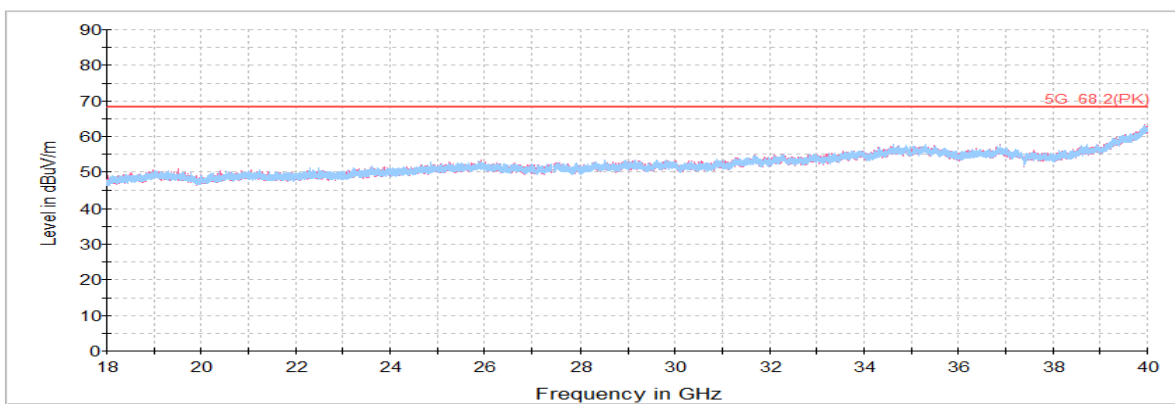


**Spurious Emission for Simultaneous Tx Condition**

Case 1	Bluetooth	All antenna 6 GHz WLAN
Mode	Low energy	802.11a
Channel	0	233
Frequency	2 402 MHz	7 115 MHz
Data Rate	2M Bits/s, 37 Packet	6M Bits/s
T.O	-	-


**Notes.**

The lowest margin condition among the channels and modes were selected for test.

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Ant. Factor (dB)	Amp.+Cable (dB)	DCF (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
<b>Peak data</b>								
4 793.58 <sup>1)</sup>	V	63.99	33.70	-45.18	-	52.51	74.00	21.49
7 260.69 <sup>1)</sup>	H	62.29	35.15	-41.56	-	55.88	74.00	18.12
14 265.02	V	57.91	39.06	-47.38	-	49.59	68.20	18.61
<b>Average Data</b>								
4 793.58 <sup>1)</sup>	V	53.24	33.70	-45.18	4.90	46.66	54.00	7.34
7 260.69 <sup>1)</sup>	V	50.52	35.15	-41.56	4.90	49.01	54.00	4.99

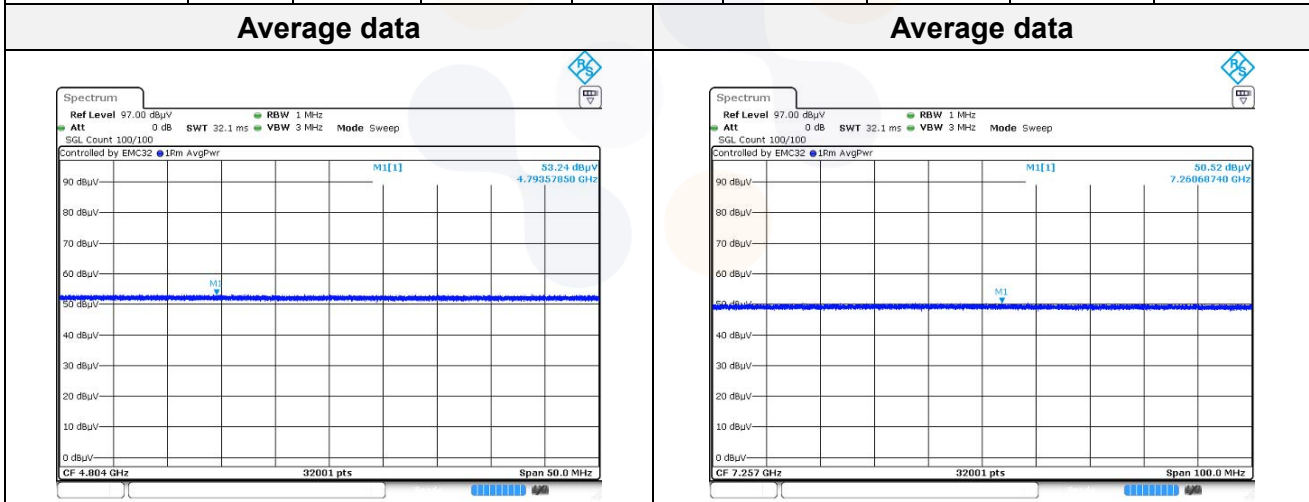


**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

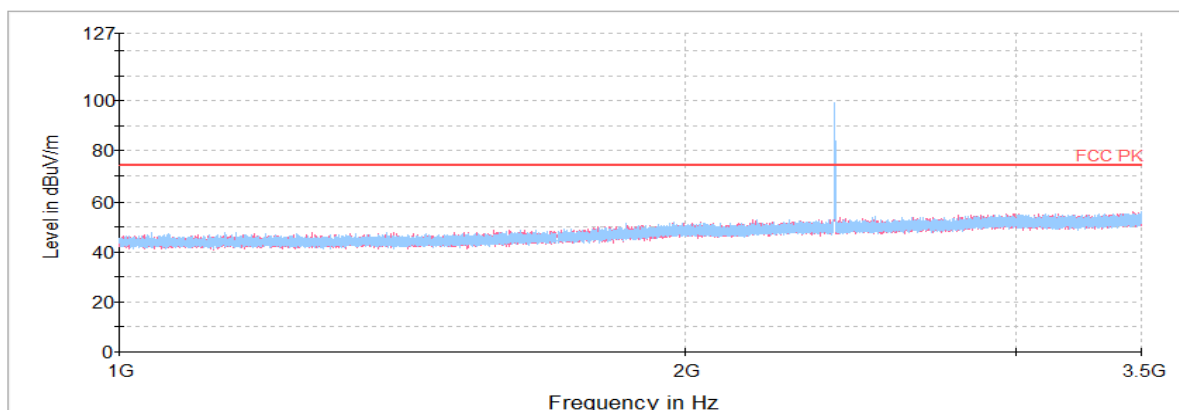





**Horizontal/Vertical for 3.5 GHz ~ 8 GHz**

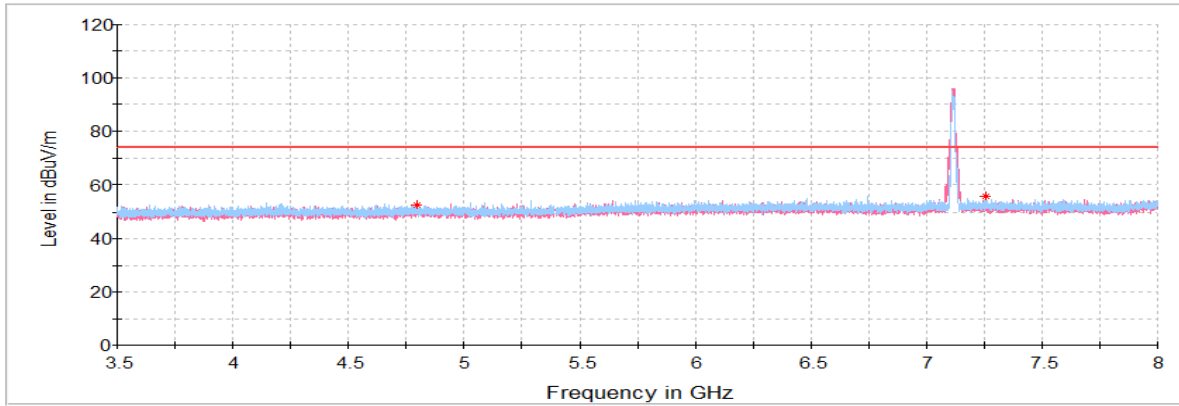

**Horizontal/Vertical for 8 GHz ~ 18 GHz**

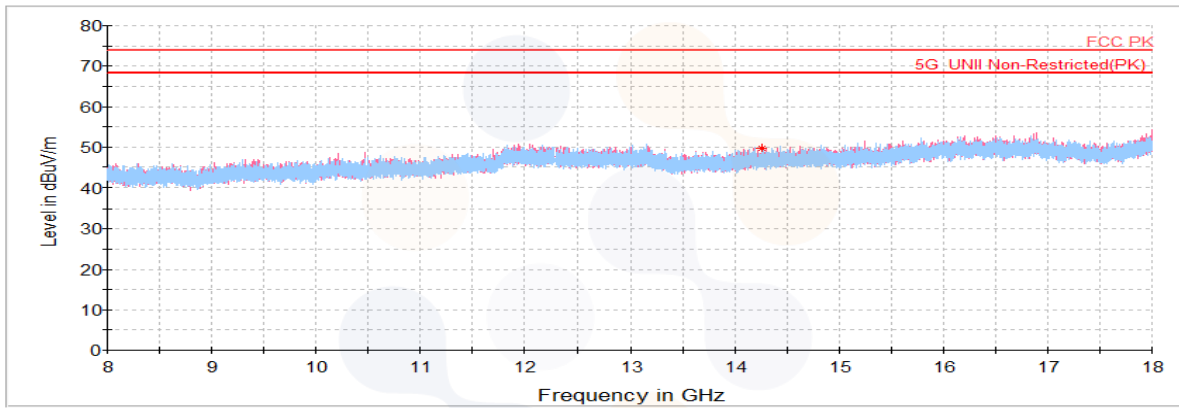

**Horizontal/Vertical for 18 GHz ~ 40 GHz**

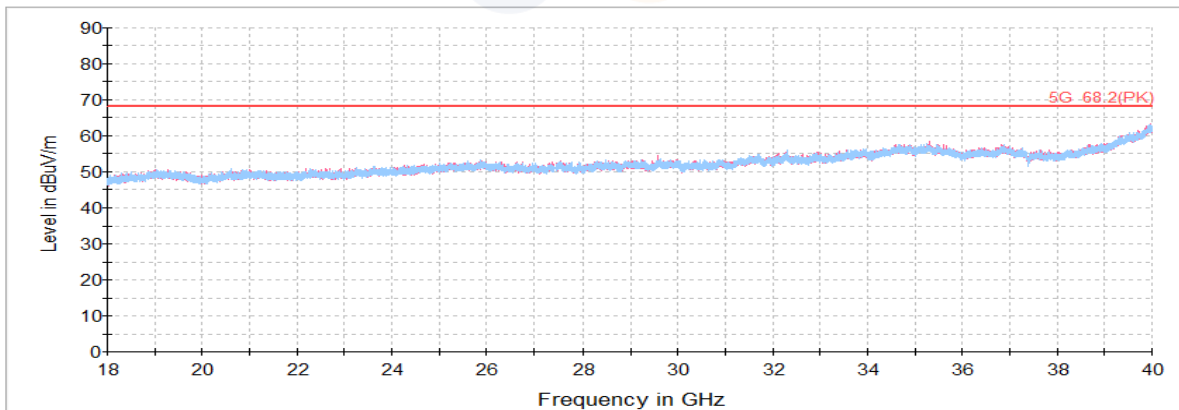


Case 2	Bluetooth	All antenna 6 GHz WLAN
Mode	BLE	802.11ax HE20
Channel	0	233
Frequency	2 402 MHz	7 115 MHz
Data Rate	2M Bits/s, 37 Packet	MCS 0
T.O	-	SU

**Notes.**

The lowest margin condition among the channels and modes were selected for test.


Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Ant. Factor (dB)	Amp.+Cable (dB)	DCF (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
<b>Peak data</b>								
4 907.61 <sup>1)</sup>	H	63.53	33.70	-45.06	-	52.17	74.00	21.83
7 190.25	H	60.59	35.14	-41.54	-	54.19	68.20	14.01
14 141.39	H	58.85	38.98	-47.44	-	50.39	68.20	17.81
<b>Average Data</b>								
4 907.61 <sup>1)</sup>	H	52.91	33.70	-45.06	4.90	46.45	54.00	7.55

**Average data**

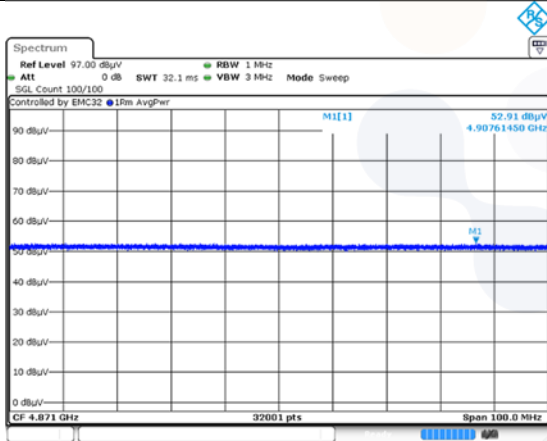


Blank


**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

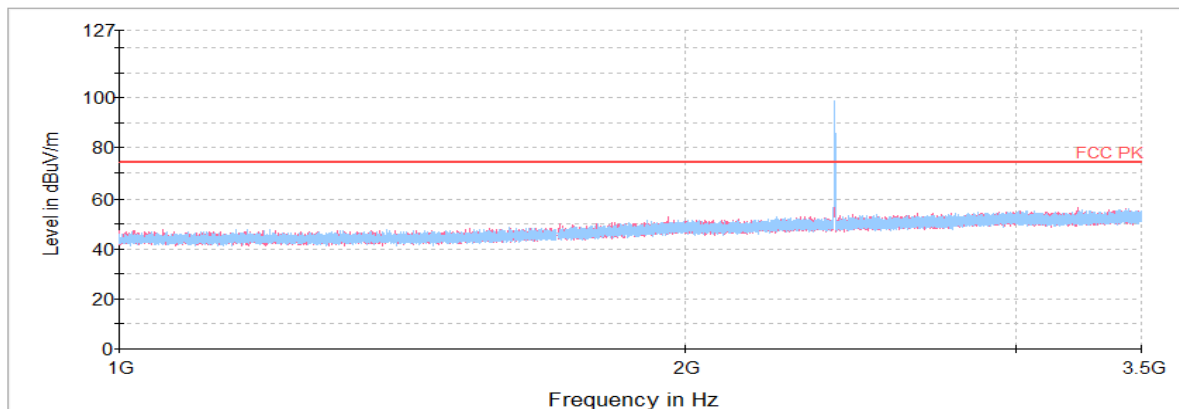


**Horizontal/Vertical for 3.5 GHz ~ 8 GHz**

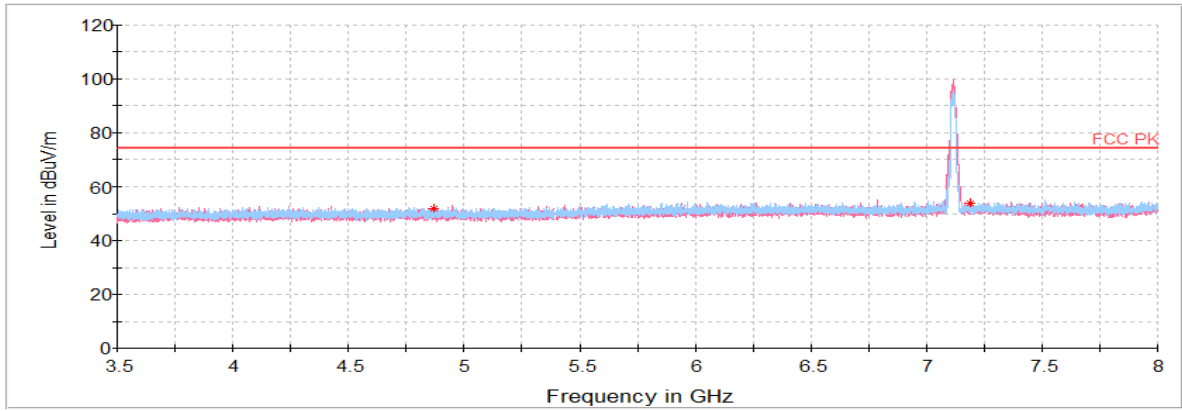

**Horizontal/Vertical for 8 GHz ~ 18 GHz**

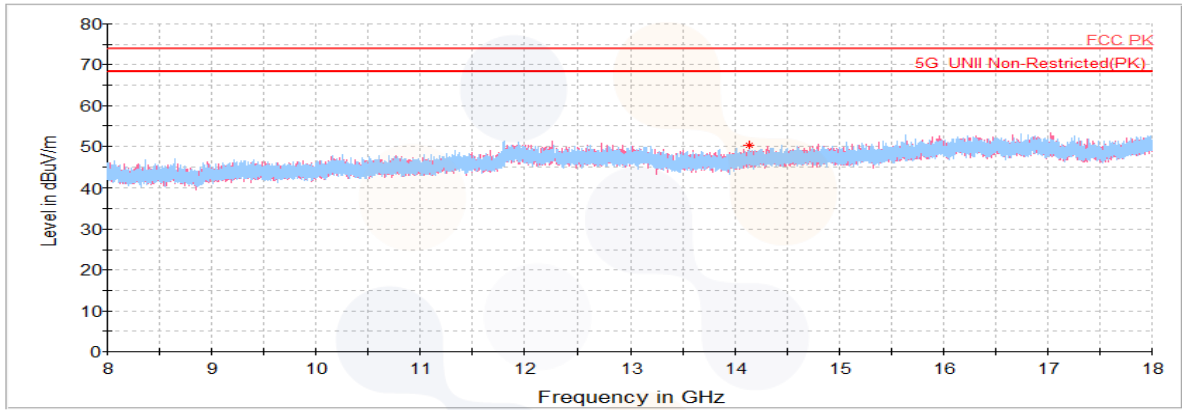


**Horizontal/Vertical for 18 GHz ~ 40 GHz**

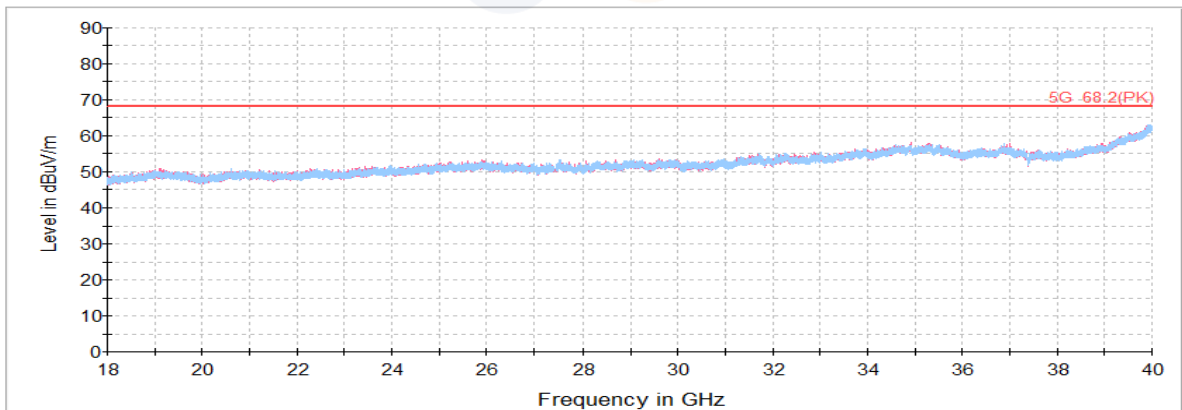

## 7.8. AC Conducted emission

### Test setup

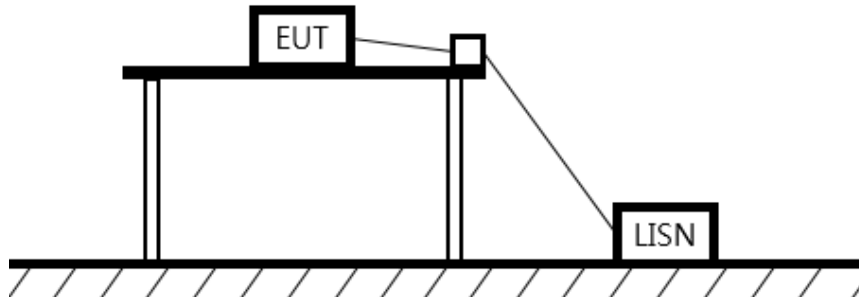

### Limit

#### §15.407

According to 15.207(a), RSS-248 4.7 e and RSS-Gen (8.8), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

### Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

**Test results**

**Worst Case: 802.11ax\_HE20 RU mode (242T / RU offset 61)\_Lowest Channel (5 955 MHz)**

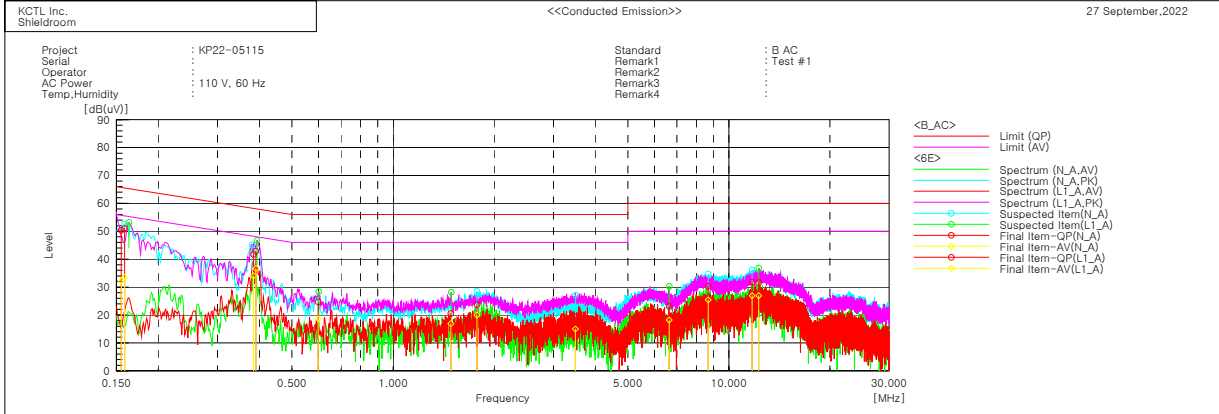

Final Result

--- N_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15508	40.5	22.4	9.8	50.3	32.2	65.7	55.7	15.4	23.5
2	0.38425	31.9	24.3	9.8	41.7	34.1	58.2	48.2	16.5	14.1
3	1.77703	13.9	10.2	9.8	23.7	20.0	56.0	46.0	32.3	26.0
4	3.49048	9.4	5.2	9.8	19.2	15.0	56.0	46.0	36.8	31.0
5	8.68045	20.3	15.4	10.0	30.3	25.4	60.0	50.0	29.7	24.6
6	11.73377	21.6	16.7	10.2	31.8	26.9	60.0	50.0	28.2	23.1

--- L_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15872	41.1	23.7	9.9	51.0	33.6	65.5	55.5	14.5	21.9
2	0.39037	33.1	26.9	9.8	42.9	36.7	58.1	48.1	15.2	11.4
3	0.59817	14.8	8.8	9.9	24.7	18.7	56.0	46.0	31.3	27.3
4	1.48733	10.7	7.1	9.8	20.5	16.9	56.0	46.0	35.5	29.1
5	6.63728	13.1	8.3	9.9	23.0	18.2	60.0	50.0	37.0	31.8
6	12.27312	21.3	16.7	10.3	31.6	27.0	60.0	50.0	28.4	23.0

## 8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSVA40	101698	23.04.24
DC Power Supply	AGILENT	E3632A	KR75304571	23.05.02
Attenuator	API Inmet	40AH2W-10	17	23.05.03
Mltd 4 Way Power Divider	KRYTAR	7005265	154726	23.07.12
Power Divider	Aeroflex/ Weinschel,Inc	1580-1	PE430	23.07.12
Power Divider	Aeroflex/ Weinschel,Inc	1580-1	NX380	23.07.12
Step Attenuator	HP	8496A	3308A16640	23.07.11
Signal Generator	R&S	SMB100A	176206	23.01.19
Vector Signal Generator	R&S	SMBV100A	257566	23.07.04
Vector Signal Generator	R&S	SMW200A	109480	23.03.04
Power Sensor	R&S	NRP-Z81	1137.9009.02-106224-tg	23.06.23
Attenuator	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	0001	23.05.02
Spectrum Analyzer	R&S	FSV40	100989	23.10.14*
EMI TEST RECEIVER	R&S	ESC17	100732	23.01.19
Bi-Log Antenna	TESEQ	CBL 6112D	62438	24.08.24
Amplifier	SONOMA INSTRUMENT	310N	284608	23.08.18
ATTENUATOR	KEYSIGHT	8491B-6dB	MY39271060	24.04.27
ISOLATION TRANSFORMER	ONETECH CO., LTD	OT-IT500VA	OTR1-16026	23.03.28
Horn antenna	ETS.lindgren	3117	155787	23.09.29*
Horn antenna	ETS.lindgren	3116	00086632	23.01.25
Attenuator	API Inmet	40AH2W-10	12	23.05.03
AMPLIFIER	B&Z Technologies	BZRT-00504000-481055-382525	26299-27735	23.09.19*
AMPLIFIER	B&Z Technologies	BZR-0050400-551028-252525	27736	23.09.19*
LOOP Antenna	R&S	HFH2-Z2	100355	24.08.10
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	CO3000	1175/45850319/P	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	CO3000	1175/45850319/P	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	23.05.03
TWO-LINE V - NETWORK	R&S	ENV216	101358	23.09.29*
EMI TEST RECEIVER	R&S	ESC13	100001	23.08.18

\* Tests related to this equipment were progressed after the calibration was completed.

**End of test report**