

## HEARING AID COMPATIBILITY

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do 16677, Korea

**Date of Testing:**  
 11/16/2020 - 11/23/2020  
**Test Site/Location:**  
 PCTEST, Columbia, MD, USA  
**Test Report Serial No.:**  
 1M2009280154-23-R2.A3L  
**Date of Issue:**  
 12/8/2020

**FCC ID:** **A3LSMG998B**  
**APPLICANT:** **SAMSUNG ELECTRONICS CO., LTD.**


**Scope of Test:** RF Emissions Testing  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §20.19(b)  
**HAC Standard:** ANSI C63.19-2011  
 285076 D01 HAC Guidance v05  
 285076 D02 T-Coil testing for CMRS IP v03  
**DUT Type:** Portable Handset  
**Model:** SM-G998B/DS  
**Additional Model:** SM-G998B  
**Test Device Serial No.:** *Pre-Production Sample [S/N: 1645M]*

**C63.19-2011 HAC Category:** **M4 (RF EMISSIONS CATEGORY)**

Note: This revised Test Report (S/N: 1M2009280154-23-R2.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.



This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested. North America bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
 President





<b>FCC ID:</b> A3LSMG998B	 <b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 1 of 80

# TABLE OF CONTENTS

---

1.	INTRODUCTION .....	3
2.	DUT DESCRIPTION.....	4
3.	ANSI/IEEE C63.19 PERFORMANCE CATEGORIES .....	6
4.	SYSTEM SPECIFICATIONS.....	7
5.	TEST PROCEDURE .....	12
6.	SYSTEM CHECK .....	14
7.	MODULATION INTERFERENCE FACTOR.....	17
8.	RF CONDUCTED POWER MEASUREMENTS.....	24
9.	JUSTIFICATION OF HELD TO EAR MODES TESTED .....	32
10.	LTE TDD UPLINK-DOWNLINK CONFIGURATION.....	34
11.	OVERALL MEASUREMENT SUMMARY .....	36
12.	EQUIPMENT LIST.....	39
13.	MEASUREMENT UNCERTAINTY .....	40
14.	TEST DATA.....	41
15.	CALIBRATION CERTIFICATES.....	49
16.	CONCLUSION.....	75
17.	REFERENCES .....	76
18.	TEST PHOTOGRAPHS .....	78

<b>FCC ID:</b> A3LSMG998B	 <small>Proud to be part of</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 2 of 80	

# 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658<sup>1</sup> to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide suffer from hearing loss.

## Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:



- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid *in-vitu*

<sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 3 of 80	

## 2. DUT DESCRIPTION



FCC ID: A3LSMG998B  
Manufacturer: Samsung Electronics Co., Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do 16677, Korea  
Model: SM-G998B/DS  
Additional Model: SM-G998B  
Serial Number: 1645M  
Antenna Configurations: Internal Antenna  
DUT Type: Portable Handset

### I. Power Reduction for WIFI

This device uses an independent fixed level power reduction mechanism for all WIFI operations during voice or VoIP held to ear scenarios. Reduced powers were used to evaluate for low-power exemption in Section 9.II for WIFI. Detailed descriptions of the power reduction mechanism are included in the operational description.



### II. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B12 & B17, B25 & B2, B26 & B5, and B66 & B4. These pairs of LTE bands have the same target powers and share the same transmission paths. Since the supported frequency span for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B12, B25, B26, and B66) were evaluated for hearing-aid compliance.

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 4 of 80	

**Table 2-1**  
A3LSMG998B HAC Air Interfaces

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service
GSM	850	VO	Yes	Yes: WIFI or BT	CMRS Voice
	1900				
	GPRS/EDGE	VD	No <sup>1</sup>	Yes: WIFI or BT	Google Duo
UMTS	850	VD	No <sup>1</sup>	Yes: WIFI or BT	CMRS Voice
	1700				
	1900				
	HSPA	VD	No <sup>1</sup>	Yes: WIFI or BT	Google Duo
LTE (FDD)	700 (B12)	VD	No <sup>1</sup>	Yes: WIFI or BT	VoLTE, Google Duo
	700 (B17)				
	780 (B13)				
	850 (B5)				
	850 (B26)				
	1700 (B4)				
	1700 (B66)				
	1900 (B2)				
	1900 (B25)				
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE, Google Duo
NR (FDD)	850 (n5)	VD	No <sup>1</sup>	Yes: WIFI or BT	Google Duo
	1700 (n66)				
WIFI	2450	VD	No <sup>1</sup>	Yes: GSM, UMTS, LTE, or NR	VoWIFI, Google Duo
	5200 (U-NII 1)				
	5300 (U-NII 2A)				
	5500 (U-NII 2C)				
	5800 (U-NII 3)		No <sup>2</sup>		
	6175 (U-NII 5)				
	6475 (U-NII 6)				
	6700 (U-NII 7)				
	7000 (U-NII 8)				
BT	2450	DT	No	Yes: GSM, UMTS, LTE, or NR	N/A
Type Transport VO = Voice Only DT = Digital Data - Not intended for Voice Services VD = CMRS and/or IP Voice over Data Transport			Notes: 1. Evaluated for MIF and low-power exemption. 2. WIFI U-NII bands 5 through 8 were not evaluated due to equipment limitations and being outside the scope of ANSI C63.19 and FCC HAC regulations.		




FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 5 of 80	

### 3. ANSI/IEEE C63.19 PERFORMANCE CATEGORIES

#### I. RF EMISSIONS

The ANSI Standard presents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.


Category	Telephone RF Parameters
<b>Near field Category</b>	<b>E-field emissions CW dB(V/m)</b>
<b>f &lt; 960 MHz</b>	
<b>M1</b>	50 to 55
<b>M2</b>	45 to 50
<b>M3</b>	40 to 45
<b>M4</b>	< 40
<b>f &gt; 960 MHz</b>	
<b>M1</b>	40 to 45
<b>M2</b>	35 to 40
<b>M3</b>	30 to 35
<b>M4</b>	< 30
<b>Table 3-1 WD near-field categories as defined in ANSI C63.19-2011</b>	

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 6 of 80	

## 4. SYSTEM SPECIFICATIONS

### EF3DV3 E-Field Probe Description

Construction:	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration:	In air from 30 MHz to 6.0 GHz (absolute accuracy $\pm 5.1\%$ , $k=2$ )
Frequency:	30 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.2$ dB in air (rotation around probe axis) $\pm 0.4$ dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity:	$\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 4.0 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.5 mm




**Figure 4-1**  
E-field Free-space Probe



### Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

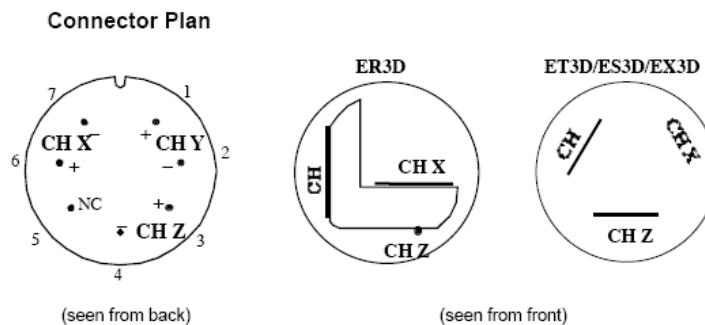The electric field probes have an irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement").



The antistatic shielding inside the probe is connected to the probe connector case.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 7 of 80

## Instrumentation Chain

### Equation 1

Conversion of Connector Voltage  $u_i$  to E-Field  $E_i$

$$E_i = \sqrt{\frac{u_i + (u_i^2 \cdot CF)/(DCP)}{Norm_i \cdot ConvF}}$$

whereby

$E_i$ : electric field in V/m  
 $u_i$ : voltage of channel i at the connector in  $\mu\text{V}$   
 $Norm_i$ : sensitivity of channel i in  $\mu\text{V}/(\text{V/m})^2$   
 $ConvF$ : enhancement factor in liquid ( $ConvF=1$  for Air)  
 $DCP$ : diode compression point in  $\mu\text{V}$   
 $CF$ : signal crest factor (peak power/average power)

### Conditions of Calibration



Please note:


- a lower input impedance of the amplifier will result in different sensitivity factors  $Norm_i$  and  $DCP$
- larger bias currents will cause higher offset

## Probe Response to Frequency

The E-field sensors have inherently a very flat frequency response. They are calibrated with a number of frequencies resulting in a common calibration factor, with the frequency behavior documented in the calibration certificate (See also below).

### Frequency Response of E-Field

(TEM-Cell:if110 EXX, Waveguide R22)



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

Figure 4-2 E-Field Probe Frequency Response

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 8 of 80



## SPEAG Robotic System




E-field measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel CORE i7 computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).



**Figure 4-3**  
SPEAG Robotic System

## System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the computer with operating system and RF Measurement Software DASY5 v52.8 (with HAC Extension), A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	HAC (RF EMISSIONS) TEST REPORT	 <b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 9 of 80

## System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.





**Figure 4-4**  
SPEAG Robotic System Diagram

## DASY5 Instrumentation Chain

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with $V_i$	= compensated signal of channel i	(i = x, y, z)
$U_i$	= input signal of channel i	(i = x, y, z)
$cf$	= crest factor of exciting field	(DASY parameter)
$dcp_i$	= diode compression point	(DASY parameter)

FCC ID: A3LSMG998B	 PCTEST Proud to test your product	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 10 of 80

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
 $\mu V / (V/m)^2$  for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $E_i$  = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.




The measurement/integration time per point, as specified by the system manufacturer is >500ms.

The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500ms and a probe response time of <5 ms. In the current implementation, DASY5 waits longer than 100ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

## Environmental Conditions

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 11 of 80	

## 5. TEST PROCEDURE

### I. RF EMISSIONS

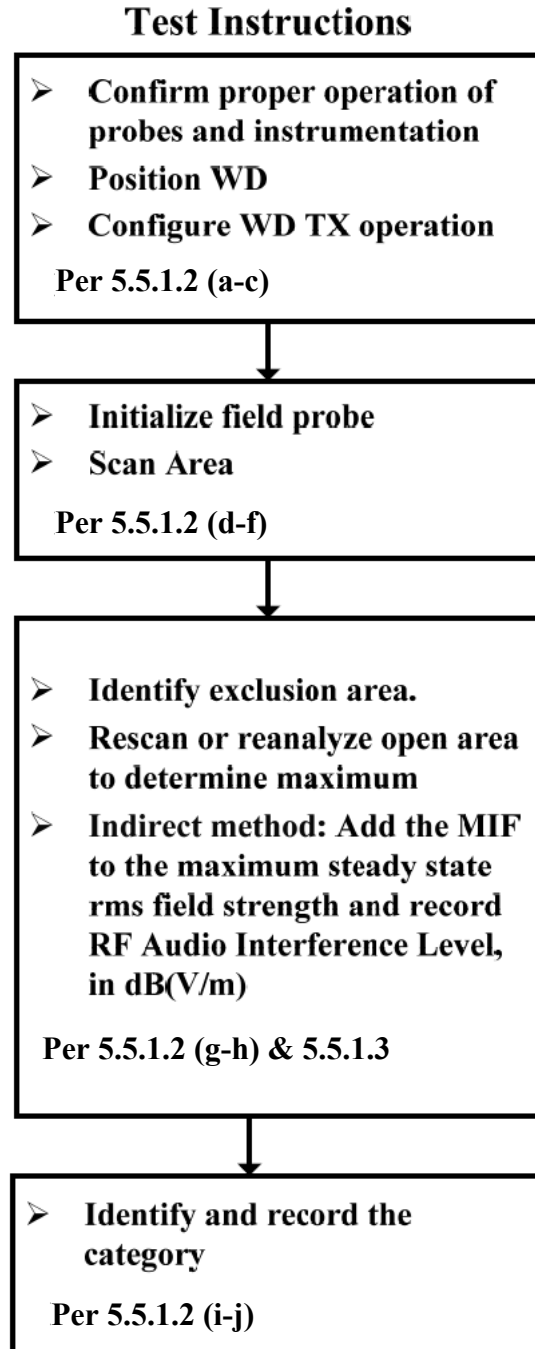




Figure 5-1 RF Emissions Flow Chart


FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 12 of 80	

## Test Setup



**Figure 5-2**

E-Field Emissions Test Setup Diagram (See Test Photographs for actual WD scan grid overlay)

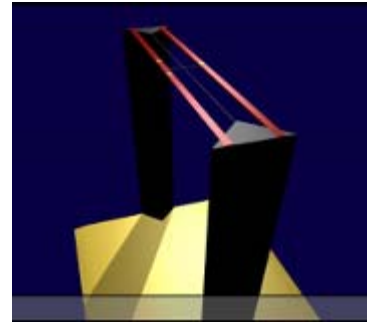




**Figure 5-3**  
HAC Phantom

## RF Emissions Test Procedure:

The following illustrate a typical RF emissions test scan over a wireless communications device:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 2mm or 5mm increments in the 5 x 5 cm region were performed at a distance 15 mm from the center point of the probe measurement element to the WD. Of the 9 subgrids (see Figure 5-2), 3 contiguous subgrids may be excluded from the measurement in order to account for localized areas of higher field intensities. The center subgrid containing the acoustic output or audio band magnetic output may not be excluded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location. If the power drift deviated by more than 5%, the HAC test and drift measurements were repeated.


FCC ID: A3LSMG998B	 PCTEST Proud to be part of the  Samsung	HAC (RF EMISSIONS) TEST REPORT	 Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 13 of 80

## 6. SYSTEM CHECK

### I. System Check Parameters

The input signal was an un-modulated continuous wave. The following points were taken into consideration in performing this check:

- Average Input Power  $P = 100\text{mW RMS}$  ( $20\text{dBm RMS}$ ) after adjustment for return loss
- The test fixture must meet the 2 wavelength separation criterion
- The proper measurement of the 15 mm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:

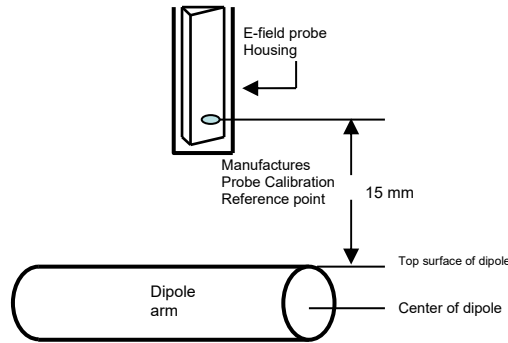

**Figure 6-1**  
Separation Distance from Dipole to Field Probe

RF power was recorded using both an average reading meter and a peak reading meter. Readings of the probe are provided by the measurement system.

To assure proper operation of the near-field measurement probe the input power to the dipole shall be commensurate with the full rated output power of the wireless device [e.g. - for a cellular phone wireless device the average peak antenna input power will be on the order of  $100\text{mW}$  ( $20\text{dBm}$ ) RMS] after adjustment for any mismatch.



### II. Validation Procedure

A dipole antenna meeting the requirements given in C63.19 was placed in the position normally occupied by the WD.


The length of the dipole was scanned, and the average peak value was recorded.

#### Measurement of CW

Using the near-field measurement system, scan the antenna over the radiating dipole and record the greatest field reading observed. Due to the nature of E-fields about free-space dipoles, the two E-field peaks measured over the dipole are averaged to compensate for non-parallelity of the setup (see manufacturer method on dipole calibration certificates, page 2). Field strength measurements shall be made only when the probe is stationary.


FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 14 of 80

RF power was recorded using both an average and a peak power reading meter.

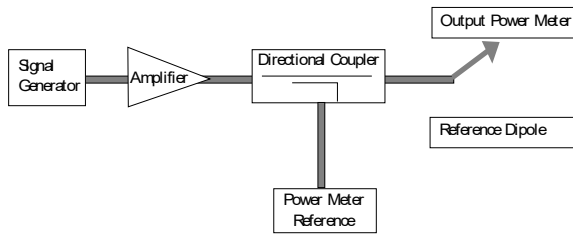

**Figure 6-2**

Setup for Desired Output Power to Dipole

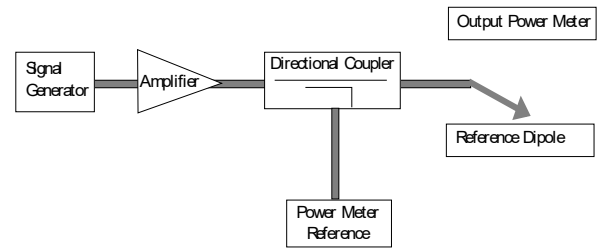

**Figure 6-3**

Setup to Dipole


Using this setup configuration, the signal generator was adjusted for the desired output power (100mW) at a specified frequency. The reference power from the coupled port of the directional coupler is recorded. Next, the output cable is connected to the reference dipole, as shown in Figure 6-3.

The input signal level was adjusted until the reference power from the coupled port of the directional coupler was the same as previously recorded, to compensate for the impedance mismatch between the output cable and the reference dipole. To assure proper operation of the near-field measurement probe the input power to the reference dipole was verified to the full rated output power of the wireless device. The dipole was secured in a holder in a manner to meet the 20 dB reflection. The near-field measurement probe was positioned over the dipole. The antenna was scanned over the appropriate sized area to cover the dipole from end to end. SPEAG uses 2D interpolation algorithms between the measured points. Please see below two dimensional plots showing that the interpolated values interpolate smoothly between 5mm steps for a free-space RF dipole:




**Figure 6-4**

2-D Raw Data from scan along dipole axis




**Figure 6-5**

2-D Interpolated points from scan along dipole axis

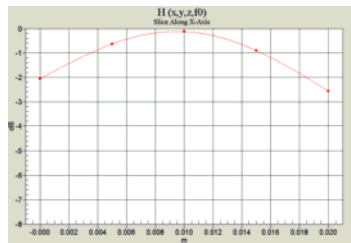

**Figure 6-6**

2-D Raw Data from scan along transverse axis



**Figure 6-7**


2-D Interpolated points from scan along transverse axis

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 15 of 80




### III. System Check Results

#### Validation Results

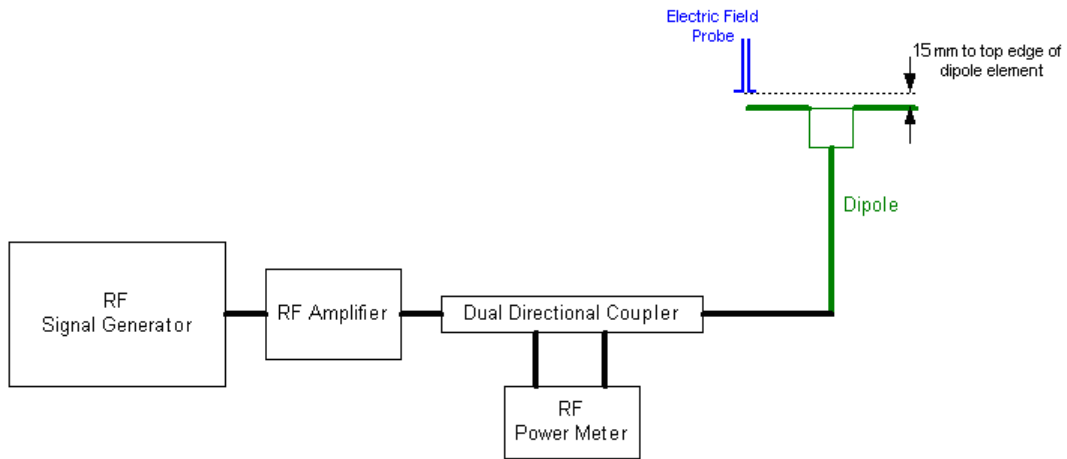Date	Frequency (MHz)	Probe S/N	DAE S/N	Dipole S/N	Input Power (dBm)	E-field Result (V/m)	Target Field (V/m)	% Deviation
11/23/2020	835	4035	665	1003	20.0	107.2	105.2	1.9%
	1880			1137	20.0	91.5	87.8	4.2%
11/16/2020	2600			1012	20.0	88.5	85.2	3.9%



**Figure 6-8**  
System Check Setup

FCC ID: A3LSMG998B	 PCTEST Proud to be part of 	HAC (RF EMISSIONS) TEST REPORT	 Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 16 of 80



## 7. MODULATION INTERFERENCE FACTOR

### I. Measuring Modulation Interference Factors

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be determined that relates its interference potential to its steady-state RMS signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. The MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic; any change in modulation characteristic requires determination and application of a new MIF.

The MIF may be determined using a radiated RF field or a conducted RF signal:

- a. Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.
- b. Measure the steady-state RMS level at the output of the fast probe or sensor.
- c. Measure the steady-state average level at the weighting output.
- d. Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step c) measurement.
- e. Without changing the carrier level from step d), remove the 1 kHz modulation and again measure the steady-state RMS level indicated at the output of the fast probe or sensor.
- f. The MIF for the specific modulation characteristic is provided by the ratio of the step e) measurement to the step b) measurement, expressed in dB ( $20 \times \log[(\text{step e})/(\text{step b})]$ ).



The following procedure was used to measure the MIF using the SPEAG Audio Interference Analyzer (AIA), Type No: SE UMS 170 CB, Serial No.: 1010:

1. The device was placed into a simulated call using a base station simulator or set to transmit using test software for a given mode.
2. The device was then set to continuously transmit at maximum power.
3. Using a coupler if needed, the device output signal was connected to the RF In port of the AIA, which was connected to a desktop computer. Alternatively, a radiated RF signal may be used with the AIA's built-in antenna.
4. The MIF measurement procedure in the DASY software was run, and the resulting MIF value was recorded.
5. Steps 1-4 were repeated for all CMRS air interfaces, frequency bands, and modulations.


The modulation interference factors obtained were applied to readings taken of the actual wireless device in order to obtain an accurate audio interference level reading using the formula:

$$\text{Audio Interference Level [dB(V/m)]} = 20 * \log[\text{Raw Field Value (V/m)}] + \text{MIF (dB)}$$


Because the MIF value is output power independent, MIF values for a given mode should be constant across all devices; however, per C63.19-2011 §D.7, MIF values should be measured for each device being evaluated. The voice modes for this device have been investigated in this section of the report.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of the  SAMSUNG	HAC (RF EMISSIONS) TEST REPORT	Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 17 of 80

## II. MIF Measurement Block Diagrams

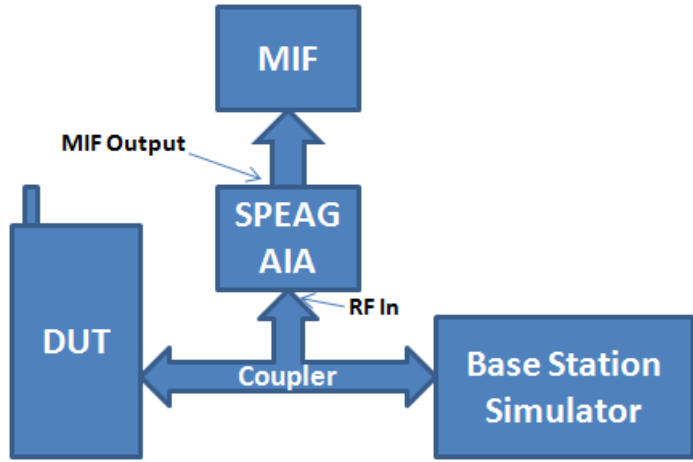

**Figure 7-1**  
MIF Measurement Setup  
for licensed modes

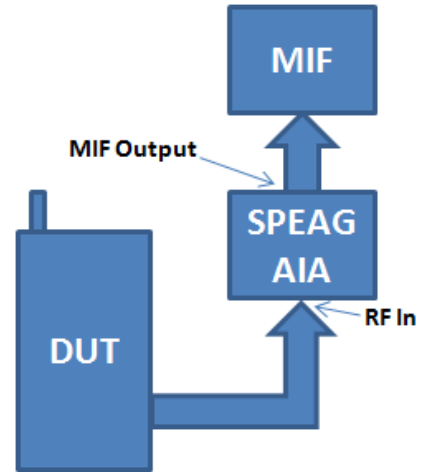

**Figure 7-2**  
MIF Measurement Setup  
for unlicensed modes

## III. Measured Modulation Interference Factors:



**Table 7-1**  
GSM Modulation Interference Factors<sup>1</sup>

Mode		GSM850			GSM1900		
		128	190	251	512	661	810
GSM	Voice	3.56	3.56	3.56	3.57	3.57	3.57
	EDGE	3.72	3.76	3.72	3.65	3.66	3.67

**Table 7-2**  
UMTS Modulation Interference Factors<sup>1</sup>

Mode		UMTS V			UMTS IV			UMTS II		
		4132	4183	4233	1312	1412	1513	9262	9400	9538
UMTS	12.2 kbps RMC	-21.40	-20.71	-22.86	-20.63	-21.18	-22.19	-22.78	-22.19	-22.21
	12.2 kbps AMR	-13.32	-13.35	-13.39	-13.81	-13.96	-13.60	-13.46	-13.51	-13.71
	HSUPA Subtest1	-21.92	-21.72	-21.31	-22.62	-23.11	-22.37	-20.87	-21.71	-22.86

<sup>1</sup> Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of the 	HAC (RF EMISSIONS) TEST REPORT	Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 18 of 80

**Table 7-3**  
LTE FDD Modulation Interference Factors<sup>1,2,3</sup>

LTE Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	MIF [dB]
12	707.5	23095	10	16QAM	1	0	-9.33
13	782.0	23230	10	16QAM	1	0	-9.88
26	831.5	26865	15	16QAM	1	0	-10.10
66	1745.0	132322	20	16QAM	1	0	-9.95
25	1882.5	26365	20	16QAM	1	0	-9.78
12	707.5	23095	10	64QAM	1	0	-9.31
12	707.5	23095	10	256QAM	1	0	-9.88
12	707.5	23095	10	QPSK	1	0	-9.25
12	707.5	23095	10	QPSK	1	25	-9.26
12	707.5	23095	10	QPSK	1	49	-9.27
12	707.5	23095	10	QPSK	25	0	-9.26
12	707.5	23095	10	QPSK	50	0	-9.27
12	707.5	23095	5	QPSK	1	0	-14.71
12	707.5	23095	3	QPSK	1	0	-14.67
12	707.5	23095	1.4	QPSK	1	0	-14.46

**Table 7-4**  
LTE TDD B41 Power Class 3 Modulation Interference Factors<sup>1,4</sup>



LTE Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	MIF [dB]
41	2593.0	40620	20	16QAM	1	0	1.48
41	2593.0	40620	20	QPSK	1	0	1.46
41	2593.0	40620	20	64QAM	1	0	1.51
41	2593.0	40620	20	256QAM	1	0	1.53
41	2593.0	40620	20	256QAM	1	50	1.43
41	2593.0	40620	20	256QAM	1	99	1.42
41	2593.0	40620	20	256QAM	50	0	1.37
41	2593.0	40620	20	256QAM	100	0	1.38
41	2593.0	40620	15	256QAM	1	0	1.50
41	2593.0	40620	10	256QAM	1	0	1.45
41	2593.0	40620	5	256QAM	1	0	1.50
41	2506.0	39750	20	256QAM	1	0	1.43
41	2549.5	40185	20	256QAM	1	0	1.49
41	2636.5	41055	20	256QAM	1	0	1.44
41	2680.0	41490	20	256QAM	1	0	1.49

<sup>1</sup> Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

<sup>2</sup> Note: All FDD LTE bands were found to have substantially similar MIF values given similar RB, BW, and modulation configurations.

<sup>3</sup> Note: Since LTE Band 12 at 10 MHz bandwidth is the overall worst-case LTE MIF and does not support 3 non-overlapping channels, MIF measurements were made only on the middle channel.

<sup>4</sup> Note: LTE TDD Power Class 3 MIFs were taken using UL-DL Configuration 2. More information about the chosen UL-DL Configuration can be found in Section 10.

FCC ID: A3LSMG998B	 PCTEST Proud to test your product	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 19 of 80	

**Table 7-5**  
LTE TDD B41 Power Class 2 Modulation Interference Factors<sup>1,2</sup>

LTE Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	MIF [dB]
41	2593.0	40620	20	16QAM	1	0	-1.60
41	2593.0	40620	20	QPSK	1	0	-1.66
41	2593.0	40620	20	64QAM	1	0	-1.55
41	2593.0	40620	20	256QAM	1	0	-1.56
41	2593.0	40620	20	64QAM	1	50	-1.32
41	2593.0	40620	20	64QAM	1	99	-1.31
41	2593.0	40620	20	64QAM	50	0	-1.65
41	2593.0	40620	20	64QAM	100	0	-1.67
41	2593.0	40620	15	64QAM	1	74	-1.41
41	2593.0	40620	10	64QAM	1	49	-1.43
41	2593.0	40620	5	64QAM	1	24	-1.47
41	2506.0	39750	20	64QAM	1	99	-1.49
41	2549.5	40185	20	64QAM	1	99	-1.40
41	2636.5	41055	20	64QAM	1	99	-1.52
41	2680.0	41490	20	64QAM	1	99	-1.46



**Table 7-6**  
NR FDD Modulation Interference Factors<sup>1,3</sup>

NR Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	MIF [dB]
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	1	-9.83
n66	1745.0	349000	40	DFT-s-OFDM	16QAM	1	1	-10.84
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	1	-13.68
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	1	-10.82
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	1	-11.00
n5	836.5	167300	20	CP-OFDM	QPSK	1	1	-11.43
n5	836.5	167300	20	CP-OFDM	16QAM	1	1	-9.39
n5	836.5	167300	20	CP-OFDM	64QAM	1	1	-9.57
n5	836.5	167300	20	CP-OFDM	256QAM	1	1	-9.60
n5	836.5	167300	20	CP-OFDM	16QAM	1	53	-9.43
n5	836.5	167300	20	CP-OFDM	16QAM	1	104	-9.45
n5	836.5	167300	20	CP-OFDM	16QAM	50	0	-18.35
n5	836.5	167300	20	CP-OFDM	16QAM	100	0	-21.23
n5	836.5	167300	15	CP-OFDM	16QAM	1	1	-10.02
n5	836.5	167300	10	CP-OFDM	16QAM	1	1	-9.46
n5	836.5	167300	5	CP-OFDM	16QAM	1	1	-9.47

<sup>1</sup> Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

<sup>2</sup> Note: LTE TDD Power Class 2 MIFs were taken using UL-DL Configuration 1. More information about the chosen UL-DL Configuration can be found in Section 10.

<sup>3</sup> Note: Since NR Band n5 at 20 MHz bandwidth is the overall worst-case NR MIF and does not support 3 non-overlapping channels, MIF measurements were made only on the middle channel.

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to test your products	<b>HAC (RF EMISSIONS) TEST REPORT</b>		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 20 of 80	

**Table 7-7**802.11b (2.4GHz, SISO) Modulation Interference Factors<sup>1,2</sup>

Mode	802.11b MIF Measurements [dB]			
	Data Rate [Mbps]			
	1	2	5.5	11
802.11b	-10.29	-9.55	-7.56	-6.50

**Table 7-8**802.11g (2.4GHz, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	802.11g MIF Measurements [dB]							
	Data Rate [Mbps]							
	12	18	24	36	48	72	92	108
802.11g	-7.48	-6.77	-6.18	-5.45	-5.01	-4.77	-4.90	-4.95

**Table 7-9**802.11n (2.4GHz, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	802.11n (2.4GHz) MIF Measurements [dB]							
	MCS Index							
	0	1	2	3	4	5	6	7
802.11n	-7.37	-6.14	-5.48	-5.06	-4.78	-4.78	-4.94	-5.01

**Table 7-10**802.11ax (2.4GHz, SU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	20MHz 802.11ax (2.4GHz) MIF Measurements [dB]									
	MCS Index									
	0	1	2	3	4	5	6	7	8	9
802.11ax	-5.66	-4.79	-4.78	-4.67	-4.99	-5.34	-5.38	-5.51	-5.63	-5.74

**Table 7-11**802.11ax (2.4GHz, RU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	20MHz 802.11ax (2.4GHz) MIF Measurements [dB]						
	RU Index (MCS Index 3) (GI 1.6us)						
	0	8	37	40	53	54	61
802.11ax	-7.62	-7.45	-6.19	-5.96	-5.12	-4.91	-4.62

**Table 7-12**802.11a (5GHz, 20MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>




Mode	802.11a MIF Measurements [dB]							
	Data Rate [Mbps]							
	12	18	24	36	48	72	92	108
802.11a	-7.49	-6.78	-6.17	-5.43	-5.06	-4.78	-4.85	-5.01

**Table 7-13**802.11n (5GHz, 20MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	20MHz BW 802.11n (5GHz) MIF Measurements [dB]							
	MCS Index							
	0	1	2	3	4	5	6	7
802.11n	-7.37	-6.07	-5.40	-5.01	-4.74	-4.81	-4.93	-5.05

<sup>1</sup> Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

<sup>2</sup> Note: WIFI MIF values were found to be independent of the transmit channel.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of the 	HAC (RF EMISSIONS) TEST REPORT	 Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 21 of 80

**Table 7-14**802.11ac (5GHz, 20MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	20MHz BW 802.11ac (5GHz) MIF Measurements [dB]								
	MCS Index								
	0	1	2	3	4	5	6	7	8
802.11ac	-6.11	-5.05	-4.74	-4.76	-5.15	-5.55	-5.67	-5.82	-6.07

**Table 7-15**802.11ax (5GHz, 20MHz BW, SU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	20MHz 802.11ax (5GHz) MIF Measurements [dB]											
	MCS Index											
	0	1	2	3	4	5	6	7	8	9	10	11
802.11ax	-5.75	-4.82	-4.66	-4.76	-5.02	-5.34	-5.42	-5.59	-5.64	-5.78	-5.85	-6.03

**Table 7-16**802.11ax (5GHz, 20MHz BW, RU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	20MHz 802.11ax (5GHz) MIF Measurements [dB]						
	RU Index (MCS Index 2) (GI 1.6us)						
	0	8	37	40	53	54	61
802.11ax	-7.91	-7.91	-6.55	-6.54	-5.33	-5.36	-4.63

**Table 7-17**802.11n (5GHz, 40MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	40MHz BW 802.11n (5GHz) MIF Measurements [dB]							
	MCS Index							
	0	1	2	3	4	5	6	7
802.11n	-5.85	-4.79	-4.58	-4.69	-5.19	-5.68	-5.85	-6.04

**Table 7-18**802.11ac (5GHz, 40MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	40MHz BW 802.11ac (5GHz) MIF Measurements [dB]									
	MCS Index									
	0	1	2	3	4	5	6	7	8	9
802.11ac	-4.82	-4.67	-5.10	-5.54	-6.05	-6.57	-6.72	-6.87	N/A	-7.18

**Table 7-19**802.11ax (5GHz, 40MHz BW, SU, MIMO) Modulation Interference Factors<sup>1,2</sup>



Mode	40MHz 802.11ax (5GHz) MIF Measurements [dB]											
	MCS Index											
	0	1	2	3	4	5	6	7	8	9	10	11
802.11ax	-4.64	-4.66	-4.93	-5.24	-5.58	-5.89	-6.01	-6.06	-6.31	-6.31	-6.30	-6.30

**Table 7-20**802.11ax (5GHz, 40MHz BW, RU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	40MHz 802.11ax (5GHz) MIF Measurements [dB]								
	RU Index (MCS Index 0) (GI 1.6us)								
	0	17	37	44	53	56	61	62	65
802.11ax	-9.43	-9.36	-8.64	-8.47	-7.25	-7.24	-5.67	-5.72	-4.67

<sup>1</sup> Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

<sup>2</sup> Note: WIFI MIF values were found to be independent of the transmit channel.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of Samsung	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 22 of 80	

**Table 7-21**  
802.11ac (5GHz, 80MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	80MHz BW 802.11ac (5GHz) MIF Measurements [dB]									
	MCS Index									
	0	1	2	3	4	5	6	7	8	9
802.11ac	-4.73	-5.58	-6.11	-6.51	-6.96	-7.26	-7.25	-7.41	-7.43	-7.57

**Table 7-22**  
802.11ax (5GHz, 80MHz BW, SU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	80MHz 802.11ax (5GHz) MIF Measurements [dB]											
	MCS Index											
	0	1	2	3	4	5	6	7	8	9	10	11
802.11ax	-4.65	-5.31	-5.64	-5.95	-6.12	-6.39	-6.39	-6.39	-6.63	-6.63	-6.63	-6.64

**Table 7-23**  
802.11ax (5GHz, 80MHz BW, RU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	80MHz 802.11ax (5GHz) MIF Measurements [dB]										
	RU Index (MCS Index 0) (GI 1.6us)										
	0	36	37	52	53	60	61	64	65	66	67
802.11ax	-9.43	-9.31	-8.63	-8.45	-7.25	-7.21	-5.66	-5.69	-4.67	-4.61	-4.60

**Table 7-24**  
802.11ac (5GHz, 160MHz BW, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	160MHz BW 802.11ac (5GHz) MIF Measurements [dB]									
	MCS Index									
	0	1	2	3	4	5	6	7	8	9
802.11ac	-5.55	-6.49	-6.96	-7.27	-7.44	-7.60	-7.61	-7.81	-7.81	-7.81

**Table 7-25**  
802.11ax (5GHz, 160MHz BW, SU, MIMO) Modulation Interference Factors<sup>1,2</sup>

Mode	160MHz 802.11ax (5GHz) MIF Measurements [dB]											
	MCS Index											
	0	1	2	3	4	5	6	7	8	9	10	11
802.11ax	-5.27	-5.92	-6.10	-6.39	-6.47	-6.62	-6.62	-6.62	-6.63	-6.62	-6.78	-6.77



**Table 7-26**  
Simultaneous 2.4GHz and 5GHz WIFI Modulation Interference Factors<sup>1,2,3</sup>

# Tx	5 GHz WIFI [dBm]		2.4 GHz WIFI [dBm]		Measured MIF (dB)
	Ant1	Ant2	Ant1	Ant2	
3	x	x	x	-	-5.68
3	x	x	-	x	-5.67
4	x	x	x	x	-5.91

<sup>1</sup> Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

<sup>2</sup> Note: WLAN MIF values were found to be independent of the transmit channel.

<sup>3</sup> Note: The configuration for each scenario (e.g. bandwidth, data rate, etc.) was determined using the worst-case configuration from SISO and MIMO MIF measurements.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 23 of 80	

## 8. RF CONDUCTED POWER MEASUREMENTS

### I. Procedures Used to Establish RF Signal for HAC Testing

The handset was configured to transmit the required air interface in a shielded chamber. Measurements were taken with a fully charged battery.

### II. HAC Measurement Conditions

#### Output Power Verification

Maximum output power is verified on the High, Middle and Low channels for all applicable air interfaces for which full testing scans are required. Modes which are exempted from full testing according to Section 9 of this report have only their conducted power targets listed below, not measured values. See Table 8-1 for air interface specific settings of transmit power parameters. See Table 9-1 for more information regarding which modes required full testing and had conducted power measurements taken.

**Table 8-1  
Power Control Parameters and Settings by Air Interface**

Air Interface:	Parameter Name:	Parameter Set To:
GSM	PCL	GSM850: "5"; GSM1900: "0"
UMTS	TPC	"All 1's"
LTE	TPC	"Max Power"
NR	PLS	Mfr Specified
WIFI	PLS	Mfr Specified

### III. Setup Used to Measure RF Conducted Powers

The general setup for conducted power is shown in Figure 8-1 below. The power measurement equipment could be a base station simulator, signal analyzer, or power meter depending on the applicable air interface.

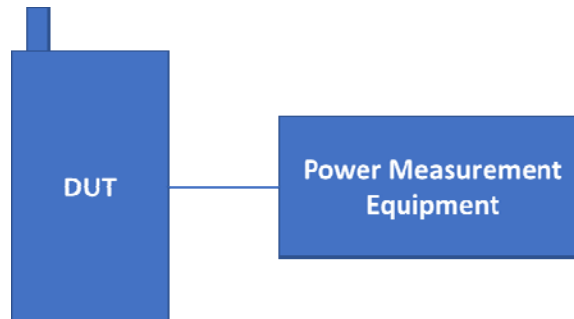





Figure 8-1  
Power Measurement Setup

FCC ID: A3LSMG998B	 PCTEST Proud to be part of  Samsung	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 24 of 80	






#### IV. GSM Conducted Powers

Band	Channel	GSM [dBm] CS (1 Slot)	EDGE [dBm] 1 Tx Slot
<b>GSM 850</b>	128	33.13	26.75
	190	33.29	27.02
	251	33.26	26.09
<b>GSM 1900</b>	512	29.99	25.57
	661	30.09	25.70
	810	30.21	25.63

#### V. UMTS Target Powers

**Table 8-2**  
**UMTS Conducted Power Targets**

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	<b>25.5</b>	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>
	Nominal	<b>24.5</b>	<b>23.0</b>	<b>23.0</b>	<b>23.0</b>
UMTS Band 4 (1750 MHz)	Maximum	<b>25.0</b>	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>
	Nominal	<b>24.0</b>	<b>23.0</b>	<b>23.0</b>	<b>23.0</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>25.0</b>	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>
	Nominal	<b>24.0</b>	<b>23.0</b>	<b>23.0</b>	<b>23.0</b>

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 25 of 80	

## VI. LTE FDD Target Powers

**Table 8-3**  
**LTE FDD Conducted Power Targets**



Mode / Band		Modulated Average (dBm)
LTE Band 2	Maximum	25.0
	Nominal	24.0
LTE Band 4	Maximum	25.0
	Nominal	24.0
LTE Band 5	Maximum	25.5
	Nominal	24.5
LTE Band 12	Maximum	25.5
	Nominal	24.5
LTE Band 13	Maximum	25.5
	Nominal	24.5
LTE Band 17	Maximum	25.5
	Nominal	24.5
LTE Band 25	Maximum	25.0
	Nominal	24.0
LTE Band 26	Maximum	25.5
	Nominal	24.5
LTE Band 66	Maximum	25.0
	Nominal	24.0

## VII. LTE TDD Target Powers

**Table 8-4**  
**LTE TDD Conducted Power Targets<sup>1</sup>**

Mode / Band		Modulated Average (dBm)
LTE Band 41 (PC3)	Maximum	25.0
	Nominal	24.0
LTE Band 41 (PC2)	Maximum	27.0
	Nominal	26.0

<sup>1</sup> Conducted power levels were additionally measured to verify operating power levels of configurations used in Tables 11-2 and 11-3.

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of the network	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 26 of 80	

## VIII. NR FDD Target Powers

**Table 8-5  
NR FDD Conducted Power Targets**

Mode / Band		Modulated Average (dBm)
NR n5	Maximum	25.5
	Nominal	24.5
NR n66	Maximum	25.0
	Nominal	24.0



## IX. WIFI Target Powers (SISO/MIMO)

**Table 8-6  
2.4GHz IEEE 802.11b/g/n/ax (SU) Reduced Average RF Power Targets<sup>1</sup>**

Mode	Band	IEEE 802.11 (in dBm)			
		SISO		MIMO	
		b	g (CDD)	n (CDD + SDM)	ax (SU) (CDD + SDM)
2.4 GHz WIFI	2.45 GHz	16.0	19.0	19.0	19.0
			ch. 1: 17.5	ch. 1: 16.5	ch. 1: 17.0
			ch. 10: 18.5	ch. 2: 18.0	ch. 10: 17.5
			ch. 11: 18.5	ch. 10: 17.5	ch. 11: 14.5
			ch. 12: 14.5	ch. 11: 16.5	ch. 12: 14.5
			ch. 13: 13.5	ch. 12: 14.5	ch. 13: 13.5

(Upper tolerance: target +1.0dB)

<sup>1</sup> Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes for held-to-ear scenarios.



FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 27 of 80

**Table 8-7**  
**5GHz IEEE 802.11a/n/ac/ax (SU) Reduced Average RF Power Targets<sup>1</sup>**

Mode	Band	IEEE 802.11 (in dBm)			
		MIMO			
		<sup>a</sup> (CDD + STBC)	n	ac	ax (SU)
5 GHz WIFI (20MHz BW)	5200 MHz	17.0	17.0	17.0	17.0
	5300 MHz	17.0	17.0	17.0	17.0
	5500 MHz	17.0	17.0	17.0	17.0
	5800 MHz	17.0	17.0	17.0	17.0
5 GHz WIFI (40MHz BW)	5200 MHz		17.0 ch. 38: 16.0	17.0 ch. 38: 16.0	17.0 ch. 38: 16.0
	5300 MHz		17.0 ch. 62: 15.5	17.0 ch. 62: 15.5	17.0 ch. 62: 15.5
	5500 MHz		17.0 ch. 102: 15.5	17.0 ch. 102: 15.5	17.0 ch. 102: 15.5
	5800 MHz		17.0	17.0	17.0
5 GHz WIFI (80MHz BW)	5200 MHz			15.5	15.5
	5300 MHz			15.5	15.5
	5500 MHz			17.0 ch. 106: 15.5	17.0 ch. 106: 15.5
	5800 MHz			17.0	17.0
5 GHz WIFI (160MHz BW)	5200 MHz			14.5	16.5
	5300 MHz			14.5	16.5
	5500 MHz			17.0	14.0
	5800 MHz			17.0	14.0

(Upper tolerance: target +1.0dB)

<sup>1</sup> Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes for held-to-ear scenarios.

FCC ID: A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 28 of 80	

## X. WIFI Target Powers for IEEE 802.11ax RU (MIMO)

Table 8-8  
IEEE 802.11ax (RU) Reduced Average RF Power Targets<sup>1</sup>

Mode	Band	MIMO					
		26T	52T	106T	242T	484T	996T
2.4GHz		19	19	19	19 ch1 : 17 ch11 : 14.5 ch12 : 14.5 ch13 : 13.5		
5GHz (20MHz)	5200MHz	12	14.5	16	16		
	5300MHz	12	14.5	16	16		
	5500MHz	12	14.5	16	16		
	5800MHz	16	16	16	16		
5GHz (40MHz)	5200MHz	12.5	15	16	16	16 ch38 : 15.5	
	5300MHz	12.5	15	16	16	16	
	5500MHz	12.5	15	16	16	16	
	5800MHz	16	16	16	16	16	
5GHz (80MHz)	5200MHz	12	15	16	16	16	16
	5300MHz	12	15	16	16	16	16
	5500MHz	12	15	16	16	16	16 ch106 : 15
	5800MHz	16	16	16	16	16	16
5GHz (160MHz)	5250MHz	12	15	16	16	16	16
	5570MHz	12	15	16	16	16	16

(Upper tolerance: target +1.0dB)



## XI. WIFI Target Powers for Operations with Simultaneous 2.4GHz and 5GHz

Table 8-9  
2.4GHz IEEE 802.11b/g/n/ax (SU) Reduced Average RF Power Targets<sup>1</sup>

Mode	Band	IEEE 802.11 (in dBm)			
		SISO		MIMO	
		b	g (CDD)	n (CDD + SDM)	ax (SU) (CDD + SDM)
2.4 GHz WIFI	2.45 GHz	13.0	16.0 ch. 12: 14.5 ch. 13: 13.5	16.0 ch. 12: 14.5 ch. 13: 13.5	16.0 ch. 11: 14.5 ch. 12: 14.5 ch. 13: 13.5

(Upper tolerance: target +1.0dB)

<sup>1</sup> Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes for held-to-ear scenarios.



FCC ID: A3LSMG998B	 PCTEST Proud to be part of Samsung	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 29 of 80

**Table 8-10**  
**5GHz IEEE 802.11a/n/ac/ax (SU) Reduced Average RF Power Targets<sup>1</sup>**

Mode	Band	IEEE 802.11 (in dBm)			
		MIMO			
		<sup>a</sup> (CDD + STBC)	n	ac	ax (SU)
5 GHz WIFI (20MHz BW)	5200 MHz	16.0	16.0	16.0	16.0
	5300 MHz	16.0	16.0	16.0	16.0
	5500 MHz	16.0	16.0	16.0	16.0
	5800 MHz	16.0	16.0	16.0	16.0
5 GHz WIFI (40MHz BW)	5200 MHz	[REDACTED]	16.0	16.0	16.0
	5300 MHz		ch. 62: 15.5	ch. 62: 15.5	ch. 62: 15.5
	5500 MHz		ch. 102: 15.5	ch. 102: 15.5	ch. 102: 15.5
	5800 MHz		16.0	16.0	16.0
5 GHz WIFI (80MHz BW)	5200 MHz	[REDACTED]		15.5	15.5
	5300 MHz			15.5	15.5
	5500 MHz			16.0	16.0
	5800 MHz		ch. 106: 15.5	ch. 106: 15.5	16.0
5 GHz WIFI (160MHz BW)	5200 MHz	[REDACTED]		14.5	16.0
	5300 MHz			14.5	16.0
	5500 MHz			16.0	14.0
	5800 MHz			16.0	14.0

(Upper tolerance: target +1.0dB)

<sup>1</sup> Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes for held-to-ear scenarios.

FCC ID: A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 30 of 80	



## XII. WIFI Target Powers for IEEE 802.11ax RU Operations with Simultaneous 2.4GHz and 5GHz

**Table 8-11  
IEEE 802.11ax (RU) Reduced Average RF Power Targets<sup>1</sup>**

Mode	Band	MIMO					
		26T	52T	106T	242T	484T	996T
2.4GHz		16	16	16 ch13 : 13.5	16 ch11 : 14.5 ch12 : 14.5 ch13 : 13.5		
5GHz (20MHz)	5200MHz	12	14.5	16	16		
	5300MHz	12	14.5	16	16		
	5500MHz	12	14.5	16	16		
	5800MHz	16	16	16	16		
5GHz (40MHz)	5200MHz	12.5	15	16	16	16 ch38 : 15.5	
	5300MHz	12.5	15	16	16	16	
	5500MHz	12.5	15	16	16	16	
	5800MHz	16	16	16	16	16	
5GHz (80MHz)	5200MHz	12	15	16	16	16	16
	5300MHz	12	15	16	16	16	16
	5500MHz	12	15	16	16	16	16 ch106 : 15
	5800MHz	16	16	16	16	16	16
5GHz (160MHz)	5250MHz	12	15	16	16	16	16
	5570MHz	12	15	16	16	16	16

(Upper tolerance: target +1.0dB)

<sup>1</sup> Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes for held-to-ear scenarios.

FCC ID: A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 31 of 80	

## 9. JUSTIFICATION OF HELD TO EAR MODES TESTED

### I. Analysis of RF Air Interface Technologies

An analysis was performed, following the guidance of §4.3 and §4.4 of the ANSI standard, of the RF air interface technologies being evaluated. The factors that will affect the RF interference potential were evaluated, and the worst-case operating modes were identified and used in the evaluation. A WD's interference potential is a function both of the WD's average near-field field strength and of the signal's audio-frequency amplitude modulation characteristics. Per §4.4, RF air interface technologies that have low power have been found to produce sufficiently low RF interference potential, so it is possible to exempt them from the product testing specified in Clause 5 of the ANSI standard. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is  $\leq 17\text{dBm}$  for all of its operating modes. RF air interface technologies exempted from testing in this manner are automatically assigned an M4 rating to be used in determining the overall rating for the WD.

The worst-case MIF plus the worst-case average antenna input power for all modes are investigated below to determine the testing requirements for this device.



### II. Individual Mode Evaluations

**Table 9-1**  
Max Power + MIF calculations for Low Power Exemptions

Air Interface	Maximum Average Power (dBm)	Worst Case MIF (dB)	Total (Power + MIF, dB)	C63.19 Testing Required
GSM - GSM850	24.10*	3.56	27.66	Yes
GSM - GSM1900	21.02*	3.57	24.59	Yes
GSM - EDGE850	17.83*	3.76	21.59	Yes**
GSM - EDGE1900	16.51*	3.67	20.18	Yes**
UMTS - RMC	25.50	-20.63	4.87	No
UMTS - AMR	25.50	-13.32	12.18	No
UMTS - HSPA	24.00	-20.87	3.13	No
LTE FDD	25.50	-9.25	16.25	No
LTE TDD - Band 41 (PC3)	18.31*	1.53	19.84	Yes
LTE TDD - Band 41 (PC2)	23.16*	-1.31	21.85	Yes
NR FDD	25.50	-9.39	16.11	No
WIFI - 2.4GHz	20.00	-4.67	15.33	No
WIFI - 5GHz	18.00	-4.58	13.42	No
Simultaneous 2.4GHz and 5GHz WIFI Operations	20.01***	-5.67	14.34	No

\* Note: ANSI C63.19-2011 Sec. 4.4 Footnote 20 indicates the use of a long averaging time for measuring the antenna input power when using this method of exclusion. Therefore, the frame averaged power was calculated for these modes in this investigation.

\*\* Note: EDGE data modes were considered but not tested as GSM voice modes were found to be the worst-case modes for the GSM air interface.



FCC ID: A3LSMG998B	 <small>Proud to be part of</small>	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 32 of 80	



\*\*\* Note: This value is calculated as the linear sum of the worst-case power for each band and antenna combination while in simultaneous 2.4GHz and 5GHz operation. This calculation is conservative and for use in this investigation only.

### III. Low-Power Exemption Conclusions

Per ANSI C63.19-2011, RF Emissions testing for this device is required only for GSM voice modes as well as LTE TDD (Power Class 3 and Power Class 2) data modes. All other air interfaces are exempt.

FCC ID: A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small>	HAC (RF EMISSIONS) TEST REPORT	 <b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 33 of 80

## 10. LTE TDD UPLINK-DOWNLINK CONFIGURATION

### I. Uplink-Downlink Configuration Additional Testing

Additional testing was performed on each supported power class for LTE TDD to determine the worst-case Uplink-Downlink configuration for RFE testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length  $T_f = 307200 \cdot T_s = 10$  ms, where  $T_s$  is a number of time units equal to  $1/(15000 \times 2048)$  seconds. Additionally, each radio frame consists of 10 subframes, each of length  $30720 \cdot T_s = 1$  ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is  $2192 \cdot T_s$  which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

**Table 10-1**  
Uplink-Downlink Configurations for Type 2 Frame Structures



Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										Calculated Transmission Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

### II. Power Class 3 Uplink-Downlink Configuration Additional Testing

LTE TDD was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst-case emission was used for full testing. See Table 10-2 below for results. The configuration determined in the results below was used to measure the MIF values in Table 7-4.

**Table 10-2**  
LTE TDD Power Class 3 UL-DL Configuration Results

Mode / Band	Bandwidth (MHz)	Channel	UL-DL Config.	Mod.	RB Size	RB Offset	Scan Center	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
<b>E-Field Emissions</b>															
LTE TDD / Band 41	20	40620	0	16QAM	1	0	Acoustic	10.75	20.63	-3.25	17.38	35.00	-17.62	M4	2.3.6
	20	40620	1	16QAM	1	0	Acoustic	9.29	19.36	-1.39	17.97	35.00	-17.03	M4	2.3.6
	20	40620	2	16QAM	1	0	Acoustic	6.67	16.48	1.57	18.05	35.00	-16.95	M4	2.3.6
	20	40620	3	16QAM	1	0	Acoustic	8.11	18.18	-1.44	16.74	35.00	-18.26	M4	2.3.6
	20	40620	4	16QAM	1	0	Acoustic	6.72	16.54	0.64	17.18	35.00	-17.82	M4	2.3.6
	20	40620	5	16QAM	1	0	Acoustic	4.83	13.67	3.73	17.40	35.00	-17.60	M4	2.3.6
	20	40620	6	16QAM	1	0	Acoustic	10.21	20.18	-2.45	17.73	35.00	-17.27	M4	2.3.6

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 34 of 80	

### III. Power Class 2 Uplink-Downlink Configuration Additional Testing



LTE TDD was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 2, only configurations 1-5 are supported. The configuration which resulted in the worst-case emission was used for full testing. See Table 10-3 below for results. The configuration determined in the results below was used to measure the MIF values in Table 7-5.

**Table 10-3**  
LTE TDD Power Class 2 UL-DL Configuration Results

Mode / Band	Bandwidth (MHz)	Channel	UL-DL Config.	Mod.	RB Size	RB Offset	Scan Center	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
<b>E-Field Emissions</b>															
LTE TDD / Band 41	20	40620	1	16QAM	1	0	Acoustic	11.87	21.49	-1.53	19.96	35.00	-15.04	M4	2,3,6
	20	40620	2	16QAM	1	0	Acoustic	8.03	18.09	1.53	19.62	35.00	-15.38	M4	2,3,6
	20	40620	3	16QAM	1	0	Acoustic	10.15	20.13	-1.31	18.82	35.00	-16.18	M4	2,3,6
	20	40620	4	16QAM	1	0	Acoustic	8.40	18.49	0.65	19.14	35.00	-15.86	M4	2,3,6
	20	40620	5	16QAM	1	0	Acoustic	5.93	15.46	3.80	19.26	35.00	-15.74	M4	2,3,6

### IV. Conclusion

Per the results above, UL-DL Configuration 2 was used for LTE TDD Power Class 3 testing and UL-DL Configuration 1 was used for LTE TDD Power Class 2 testing.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 35 of 80	

# 11. OVERALL MEASUREMENT SUMMARY

FCC ID:	A3LSMG998B
S/N:	1645M

## I. E-FIELD EMISSIONS:

**Table 11-1  
HAC Data Summary for GSM E-field**



Mode	Channel	Scan Center	Conducted Power at BS (dBm)	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
<b>E-Field Emissions</b>											
GSM850	128	Acoustic	33.13	26.71	28.53	3.56	32.09	45.00	-12.91	M4	7,8,9
	190	Acoustic	33.29	23.67	27.48	3.56	31.04	45.00	-13.96	M4	7,8,9
	251	Acoustic	33.26	30.42	29.66	3.56	33.22	45.00	-11.78	M4	7,8,9
	251	T-Coil	33.26	27.97	28.93	3.56	32.49	45.00	-12.51	M4	6,8,9
GSM1900	512	Acoustic	29.99	7.46	17.45	3.57	21.02	35.00	-13.98	M4	1,2,3
	661	Acoustic	30.09	9.59	19.64	3.57	23.21	35.00	-11.79	M4	1,2,3
	810	Acoustic	30.21	7.51	17.51	3.57	21.08	35.00	-13.92	M4	1,2,3


**Table 11-2  
HAC Data Summary for LTE TDD Band 41 Power Class 3 E-field**

Mode / Band	Bandwidth (MHz)	Channel	UL-DL Config.	Mod.	RB Size	RB Offset	Scan Center	Conducted Power at BS (dBm)	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
<b>E-Field Emissions</b>																
LTE TDD / Band 41 PC3	20	39750	2	256QAM	1	0	Acoustic	18.45	4.94	13.87	1.43	15.30	35.00	-19.70	M4	2,3,6
	20	40185	2	256QAM	1	0	Acoustic	19.19	3.95	11.93	1.49	13.42	35.00	-21.58	M4	1,2,3
	20	40620	2	256QAM	1	0	Acoustic	19.05	4.16	12.38	1.53	13.91	35.00	-21.09	M4	1,2,3
	20	41055	2	256QAM	1	0	Acoustic	19.03	4.36	12.79	1.44	14.23	35.00	-20.77	M4	2,3,6
20	41490	2	256QAM	1	0	Acoustic	19.07	4.27	12.60	1.49	14.09	35.00	-20.91	M4	1,2,3	

**Table 11-3  
HAC Data Summary for LTE TDD Band 41 Power Class 2 E-field**




Mode / Band	Bandwidth (MHz)	Channel	UL-DL Config.	Mod.	RB Size	RB Offset	Scan Center	Conducted Power at BS (dBm)	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
<b>E-Field Emissions</b>																
LTE TDD / Band 41 PC2	20	39750	1	64QAM	1	99	Acoustic	24.31	7.88	17.93	-1.49	16.44	35.00	-18.56	M4	2,3,6
	20	40185	1	64QAM	1	99	Acoustic	24.22	9.42	19.48	-1.40	18.08	35.00	-16.92	M4	1,2,3
	20	40620	1	64QAM	1	99	Acoustic	24.83	9.19	19.27	-1.31	17.96	35.00	-17.04	M4	2,3,6
	20	41055	1	64QAM	1	99	Acoustic	24.52	8.88	18.97	-1.52	17.45	35.00	-17.55	M4	1,2,3
	20	41490	1	64QAM	1	99	Acoustic	23.80	9.55	19.60	-1.46	18.14	35.00	-16.86	M4	2,3,6

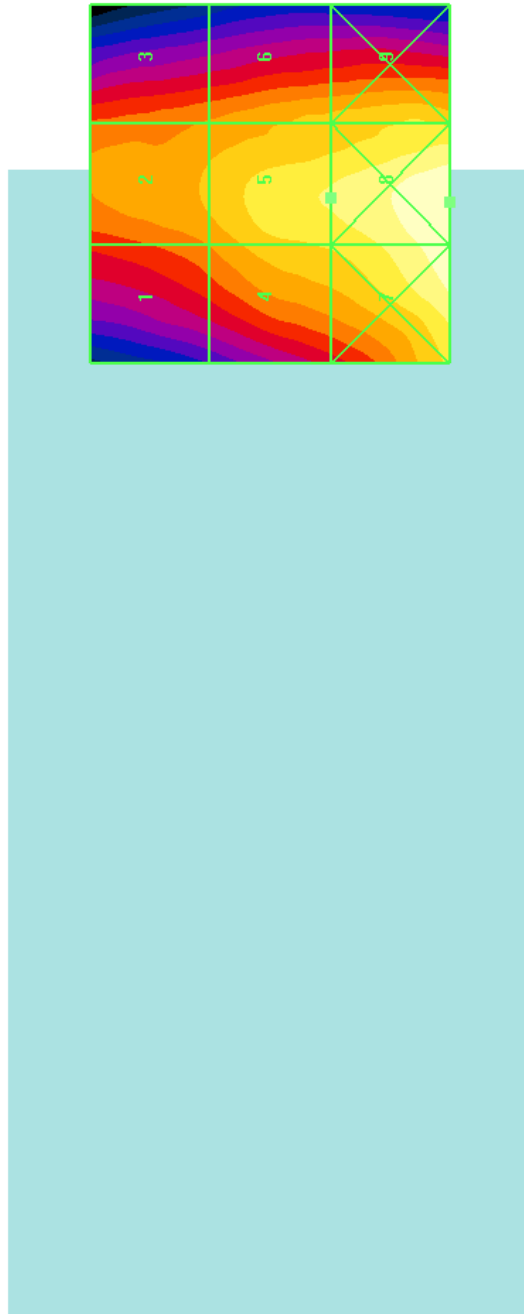FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 36 of 80	



**Figure 11-1**  
 Sample E-field Scan Overlay  
 (See Test Setup Photographs for actual WD overlay)

\* Note: Locations of probe rotation (with and without exclusions) are shown in Figure 11-1 denoted by the green square markers.


FCC ID: A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small> 	HAC (RF EMISSIONS) TEST REPORT	 <b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 37 of 80

FCC ID:	A3LSMG998B
S/N:	1645M

## II. Worst-case Configuration Evaluation

**Table 11-4**  
**Peak Reading 360° Probe Rotation at Azimuth axis**

Mode	Channel	Scan Center	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
<b>Probe Rotation at Worst-Case</b>										
GSM850	251	Acoustic	30.79	29.77	3.56	33.33	45.00	-11.67	M4	7,8,9

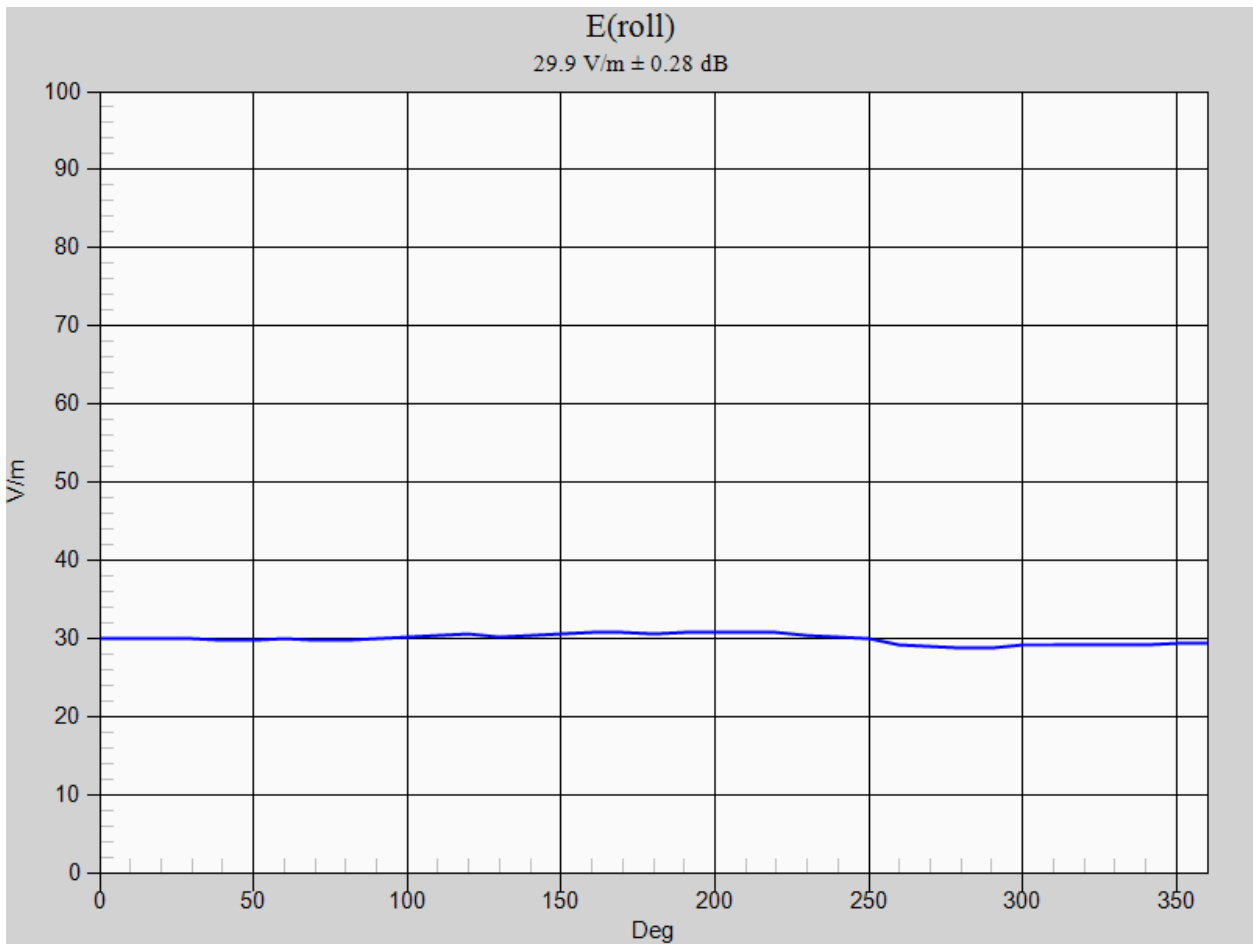

**Figure 11-2**  
**Worst-Case Probe Rotation about Azimuth axis**

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 38 of 80	




## 12. EQUIPMENT LIST

**Table 12-1**  
Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4438C	ESG Vector Signal Generator	8/10/2020	Annual	8/10/2021	MY47270002
Agilent	N5182A	MXG Vector Signal Generator	5/13/2020	Annual	5/13/2021	MY47420603
Amplifier Research	15S1G6	Amplifier	N/A	N/A	N/A	433978
Anritsu	MT8000A	Radio Communication Test Station	12/9/2019	Annual	12/9/2020	6262036828
Anritsu	MT8821C	Radio Communication Analyzer	2/22/2020	Annual	2/22/2021	6261895213
Anritsu	ML2496A	Power Meter	3/23/2020	Annual	3/23/2021	1351001
Anritsu	MA2411B	Pulse Power Sensor	7/28/2020	Annual	7/28/2021	1339018
Anritsu	MA2411B	Pulse Power Sensor	8/12/2020	Annual	8/12/2021	1207364
Anritsu	MA24106A	USB Power Sensor	7/24/2020	Annual	7/24/2021	1344556
Anritsu	MA24106A	USB Power Sensor	7/24/2020	Annual	7/24/2021	1349514
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	N/A	N/A	N/A	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	N/A	N/A	N/A	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	N/A	N/A	N/A	1226
Pasternack	PE2237-20	Bidirectional Coupler	N/A	N/A	N/A	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	5/21/2020	Annual	5/21/2021	128635
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/4/2020	Annual	2/4/2021	162125
Rohde & Schwarz	CMW500	Radio Communication tester	9/4/2020	Annual	9/4/2021	140144
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	21053
SPEAG	AIA	Audio Interference Analyzer	N/A	N/A	N/A	1010
SPEAG	D4E4	Dasy Data Acquisition Electronics	2/12/2020	Annual	2/12/2021	665
SPEAG	CD1880V3	Freespace 1880 MHz Dipole	2/19/2019	Biennial	2/19/2021	1137
SPEAG	CD2600V3	Freespace 2600MHz Dipole	2/19/2019	Biennial	2/19/2021	1012
SPEAG	CD835V3	Freespace 835 MHz Dipole	2/19/2019	Biennial	2/19/2021	1003
SPEAG	EF3DV3	Freespace E-field Probe	1/16/2020	Annual	1/16/2021	4035

Calibration traceable to the National Institute of Standards and Technology (NIST).

**\*Note: CBT (Calibrated Before Testing).** Prior to testing, the measurement paths containing a cable, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 39 of 80	

# 13. MEASUREMENT UNCERTAINTY



**Table 13-1**  
Uncertainty Estimation Table

Wireless Communications Device Near-Field Measurement Uncertainty Estimation							
Uncertainty Component	Data (dB)	Data Type	Prob. Dist.	Divisor	Ci (E)	Unc. (dB)	Notes/Comments
<b>Measurement System</b>							
RF System Reflections	0.50	Tolerance	N	1.00	1	0.50	* Refl. < -20 dB
Field Probe Calibration	0.21	Tolerance	N	1.00	1	0.21	
Field Probe Isotropy	0.01	Tolerance	N	1.00	1	0.01	
Field Probe Frequency Response	0.135	Tolerance	N	1.00	1	0.14	
Field Probe Linearity	0.013	Tolerance	N	1.00	1	0.01	
Modulation Interference Factor	0.20	Tolerance	R	1.73	1	0.12	Applicable for M-rating testing
Boundary Effects	0.105	Accuracy	R	1.73	1	0.06	*
Probe Positioning Accuracy	0.20	Accuracy	R	1.73	1	0.12	*
Probe Positioner	0.050	Accuracy	R	1.73	1	0.03	*
Extrapolation/Interpolation	0.045	Tolerance	R	1.73	1	0.03	*
Resolution to 2mm error	0.21	Tolerance	N	1.00	1	0.21	
System Detection Limit	0.05	Tolerance	R	1.73	1	0.03	*
Readout Electronics	0.015	Tolerance	N	1.00	1	0.02	*
Integration Time	0.11	Tolerance	R	1.73	1	0.06	*
Response Time	0.033	Tolerance	R	1.73	1	0.02	*
Phantom Thickness	0.10	Tolerance	R	1.73	1	0.06	*
System Repeatability (Field x 2=power)	0.17	Tolerance	N	1.00	1	0.17	*
<b>Test Sample Related</b>							
Device Positioning Vertical	0.2	Tolerance	R	1.73	1	0.12	*
Device Positioning Lateral	0.045	Tolerance	R	1.73	1	0.03	*
Device Holder and Phantom	0.1	Tolerance	R	1.73	1	0.06	*
Power Drift	0.21	Tolerance	R	1.73	1	0.12	
<i>Combined Standard Uncertainty (k=1)</i>						0.66	16.3%
<i>Expanded Uncertainty [95% confidence]</i>						1.31	32.6%
<i>Expanded Uncertainty [95% confidence] on Field</i>						0.66	16.3%

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.
2. \* Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)




Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid immunity tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMG998B	 PCTEST Proud to test your passion	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 40 of 80	



## 14. TEST DATA

See following Attached Pages for Test Data.

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small> 	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 41 of 80	

© 2020 PCTEST

REV 3.5.M

6/22/2020

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).



**DUT: CD835V3 - SN1003**  
 Type: CD835V3  
 Serial: 1003

**Communication System: CW; Frequency: 835 MHz;**


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASYS Configuration:

- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASYS2; Version 52.10 (0);



**835 MHz / 100mW HAC Dipole Validation at 15mm/Hearing Aid Compatibility Test (41x361x1):**

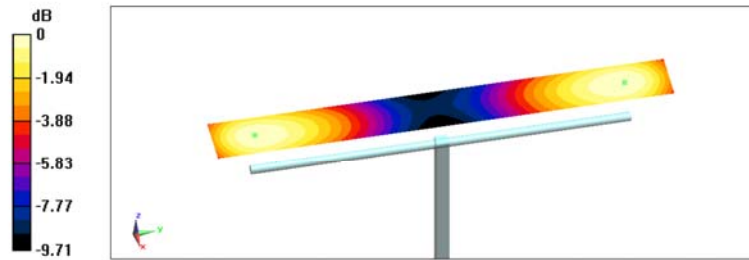Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 134.0 V/m; Power Drift = 0.02 dB  
 Applied MIF = 0.00 dB  
 Average Value of Peak (interpolated) = 107.2 V/m



0 dB = 107.6 V/m = 40.64 dBV/m

PCTEST 2020

<b>FCC ID:</b> A3LSMG998B		<b>HAC (RF EMISSIONS) TEST REPORT</b>	 <b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 42 of 80

© 2020 PCTEST

REV 3.5.M  
 6/22/2020



**DUT: CD1880V3 - SN1137**

Type: CD1880V3  
Serial: 1137

**Communication System: CW; Frequency: 1880 MHz;**


Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:



- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASYS2; Version 52.10 (0);

**1880 MHz / 100mW HAC Dipole Validation at 15mm/Hearing Aid Compatibility Test (41x181x1):**

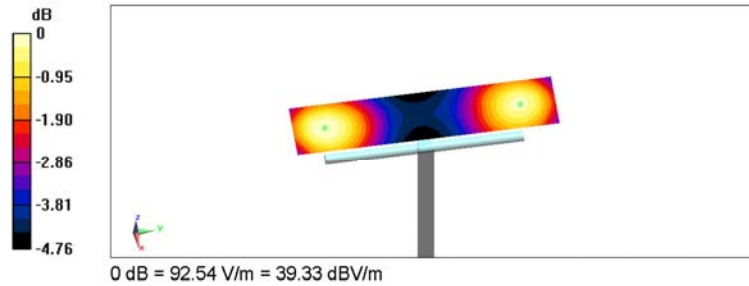Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 156.7 V/m; Power Drift = 0.09 dB  
 Applied MIF = 0.00 dB  
 Average Value of Peak (interpolated) = 91.5 V/m



PCTEST 2020

<p><b>FCC ID:</b> A3LSMG998B</p>		<p><b>HAC (RF EMISSIONS) TEST REPORT</b></p> 	<p><b>Approved by:</b> Quality Manager</p>
<p><b>Filename:</b> 1M2009280154-23-R2.A3L</p>	<p><b>Test Dates:</b> 11/16/2020 - 11/23/2020</p>	<p><b>DUT Type:</b> Portable Handset</p>	<p>Page 43 of 80</p>

© 2020 PCTEST

REV 3.5.M  
6/22/2020



**DUT: CD2600V3 - SN1012**  
 Type: CD2600V3  
 Serial: 1012

**Communication System: CW; Frequency: 2600 MHz;**


Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:



- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52; Version 52.10 (0);

**2600 MHz / 100mW HAC Dipole Validation at 15mm/Hearing Aid Compatibility Test (41x181x1):**

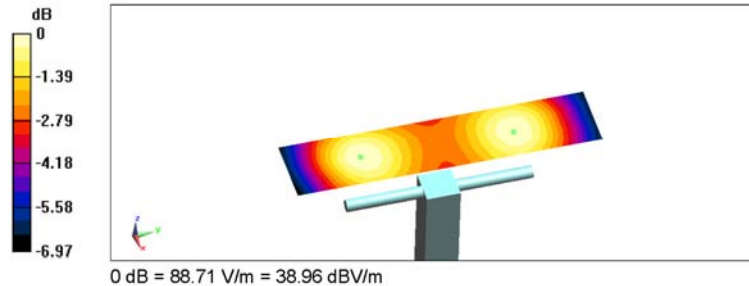Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 67.98 V/m; Power Drift = -0.01 dB  
 Applied MIF = 0.00 dB  
 Maximum value of Total (interpolated) = 88.5 V/m



PCTEST 2020

<b>FCC ID:</b> A3LSMG998B		<b>HAC (RF EMISSIONS) TEST REPORT</b> 	<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 44 of 80

© 2020 PCTEST

REV 3.5.M  
 6/22/2020



**DUT: A3LSMG998B**

Type: Portable Handset  
 Serial: 1645M  
 Backlight off  
 Duty Cycle: 1:8.3

**Communication System: GSM; Frequency: 848.8 MHz;**

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0);

**GSM850 High Channel/Hearing Aid Compatibility Test (101x101x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 38.06 V/m; Power Drift = 0.12 dB  
 Applied MIF = 3.56 dB  
 RF audio interference level = 33.22 dBV/m  
**Emission category: M4**

MIF scaled E-field

Grid 1 M4 32.08 dBV/m	Grid 2 M4 32.51 dBV/m	Grid 3 M4 32.12 dBV/m
Grid 4 M4 32.87 dBV/m	Grid 5 M4 33.22 dBV/m	Grid 6 M4 32.6 dBV/m
Grid 7 M4 33.84 dBV/m	Grid 8 M4 33.92 dBV/m	Grid 9 M4 32.87 dBV/m



PCTEST 2020

<b>FCC ID:</b> A3LSMG998B		<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 45 of 80	

© 2020 PCTEST

REV 3.5.M  
6/22/2020



**DUT: A3LSMG998B**

Type: Portable Handset  
 Serial: 1645M  
 Backlight off  
 Duty Cycle: 1:8.3

**Communication System: GSM; Frequency: 1880 MHz;**

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:


- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0);

**GSM1900 Mid Channel/Hearing Aid Compatibility Test (101x101x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 8.498 V/m; Power Drift = 0.14 dB  
 Applied MIF = 3.57 dB  
 RF audio interference level = 23.21 dBV/m  
**Emission category: M4**

MIF scaled E-field

Grid 1 M4 25.73 dBV/m	Grid 2 M4 26.35 dBV/m	Grid 3 M4 25.25 dBV/m
Grid 4 M4 22.54 dBV/m	Grid 5 M4 23.21 dBV/m	Grid 6 M4 22.72 dBV/m
Grid 7 M4 20.02 dBV/m	Grid 8 M4 20.21 dBV/m	Grid 9 M4 18.12 dBV/m

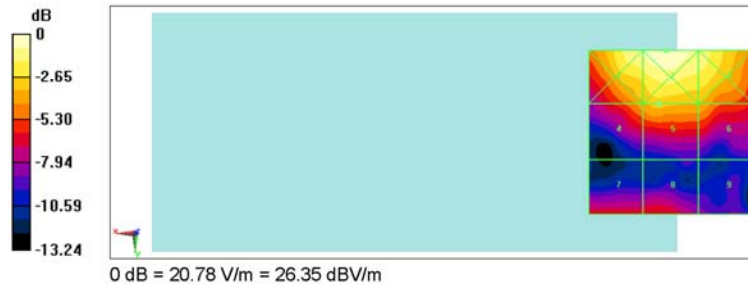

PCTEST 2020

<b>FCC ID:</b> A3LSMG998B		<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 46 of 80	

© 2020 PCTEST

REV 3.5.M  
6/22/2020



**DUT: A3LSMG998B**

Type: Portable Handset  
 Serial: 1645M  
 Backlight off  
 Duty Cycle: 1:4.67

**Communication System: LTE TDD41; Frequency: 2506 MHz;**

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0);

**Power Class 3 TDD LTE Band 41 Low Channel, 20MHz, UL-DL 2, 256QAM, 1RB, 0RB  
 Offset Hearing Aid Compatibility Test (101x101x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 5.176 V/m; Power Drift = 0.11 dB  
 Applied MIF = 1.43 dB  
 RF audio interference level = 15.30 dBV/m  
**Emission category: M4**

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
14.3 dBV/m	15.93 dBV/m	14.75 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
13.43 dBV/m	15.3 dBV/m	14.71 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
12.54 dBV/m	13.72 dBV/m	13.43 dBV/m



0 dB = 6.256 V/m = 15.93 dBV/m

PCTEST 2020

<b>FCC ID:</b> A3LSMG998B		<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 47 of 80	

© 2020 PCTEST

REV 3.5.M  
6/22/2020



**DUT: A3LSMG998B**

Type: Portable Handset  
 Serial: 1645M  
 Backlight off  
 Duty Cycle: 1:2.42

**Communication System: LTE TDD41; Frequency: 2680 MHz;**

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:


- Probe: EF3DV3 - SN4035; Calibrated: 1/16/2019;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn665; Calibrated: 2/12/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0);

**Power Class 2 TDD LTE Band 41 High Channel, 20MHz, UL-DL 1, 64QAM, 1RB, 99RB Offset Hearing Aid Compatibility Test (101x101x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 9.566 V/m; Power Drift = 0.14 dB  
 Applied MIF = -1.46 dB  
 RF audio interference level = 18.14 dBV/m  
**Emission category: M4**

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
17.84 dBV/m	19.52 dBV/m	19.33 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
17.2 dBV/m	18.14 dBV/m	18.03 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
16.31 dBV/m	15.12 dBV/m	14.73 dBV/m

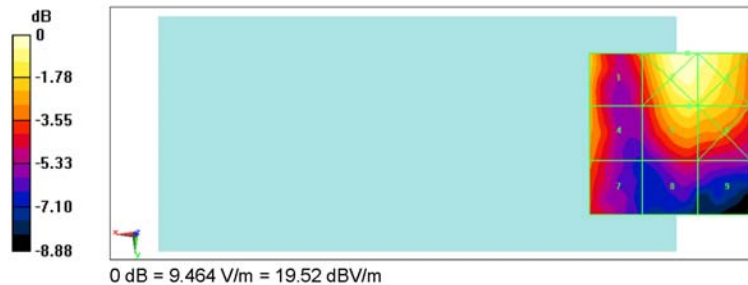

PCTEST 2020

FCC ID: A3LSMG998B	PCTEST Proud to be part of element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 48 of 80	




© 2020 PCTEST

REV 3.5.M  
6/22/2020



## 15. CALIBRATION CERTIFICATES

The following pages include the probe calibration used to evaluate HAC for the DUT.

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small> 	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 49 of 80	

© 2020 PCTEST

REV 3.5.M

6/22/2020

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EF3-4035\_Jan19/2**

**CALIBRATION CERTIFICATE (Replacement of No: EF3-4035\_Jan19)**

Object: **EF3DV3- SN:4035**

Calibration procedure(s): **QA CAL-02.v9, QA CAL-25.v7**  
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **January 16, 2019** *MSH 2/23/2019*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
DAE4	SN: 789	14-Jan-19 (No. DAE4-789_Jan19)	Jan-20
Reference Probe ER3DV6	SN: 2328	09-Oct-18 (No. ER3-2328_Oct18)	Oct-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Name** Manu Seitz **Function** Laboratory Technician **Signature** *[Signature]*

Approved by: **Name** Katja Pokovic **Function** Technical Manager **Signature** *[Signature]*

Issued: February 11, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

FCC ID: A3LSMG998B	<b>PCTEST</b> Proud to be part of	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 50 of 80	

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

**NORM<sub>x,y,z</sub>** sensitivity in free space  
**DCP** diode compression point  
**CF** crest factor (1/duty\_cycle) of the RF signal  
**A, B, C, D** modulation dependent linearization parameters  
**En** incident E-field orientation normal to probe axis  
**Ep** incident E-field orientation parallel to probe axis  
**Polarization  $\varphi$**   $\varphi$  rotation around probe axis  
**Polarization  $\vartheta$**   $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center),  
 i.e.,  $\vartheta = 0$  is normal to probe axis  
**Connector Angle** information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- b) CTIA Test Plan for Hearing Aid Compatibility, Rev 3.1.1, May 2017

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- **NORM(f)<sub>x,y,z</sub>** = **NORM<sub>x,y,z</sub>** \* *frequency\_response* (see Frequency Response Chart).
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the **NORM<sub>x</sub>** (no uncertainty required).

<b>FCC ID:</b> A3LSMG998B	<b>PCTEST</b> Proud to test your test equipment	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 51 of 80	

## DASY/EASY - Parameters of Probe: EF3DV3 - SN:4035

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ )	0.90	0.74	1.20	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	96.8	98.5	95.3	

### Calibration results for Frequency Response (30 MHz – 6 GHz)

Frequency MHz	Target E-Field V/m	Measured E-field (En) V/m	Deviation E-normal in %	Measured E-field (Ep) V/m	Deviation E-normal in %	Unc (k=2) %
30	77.3	76.8	-0.6%	77.3	0.1%	$\pm 5.1\%$
100	77.3	78.2	1.2%	77.8	0.7%	$\pm 5.1\%$
450	77.1	78.2	1.5%	77.8	0.9%	$\pm 5.1\%$
600	77.1	77.8	0.9%	77.5	0.5%	$\pm 5.1\%$
750	77.3	77.7	0.5%	77.2	-0.1%	$\pm 5.1\%$
1800	140.3	136.9	-2.4%	137.2	-2.2%	$\pm 5.1\%$
2000	133.0	129.4	-2.8%	129.4	-2.7%	$\pm 5.1\%$
2200	124.8	121.5	-2.7%	122.7	-1.7%	$\pm 5.1\%$
2500	123.7	120.7	-2.4%	121.9	-1.5%	$\pm 5.1\%$
3000	78.8	74.8	-5.0%	76.1	-3.5%	$\pm 5.1\%$
3500	256.3	248.1	-3.2%	246.0	-4.0%	$\pm 5.1\%$
3700	249.7	239.2	-4.2%	239.0	-4.3%	$\pm 5.1\%$
5200	50.7	50.7	-0.1%	51.2	0.9%	$\pm 5.1\%$
5500	49.6	48.9	-1.5%	48.7	-1.9%	$\pm 5.1\%$
5800	48.9	49.1	0.4%	49.3	0.8%	$\pm 5.1\%$



### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	141.5	+ 3.3 %	$\pm 4.7\%$
		Y	0.0	0.0	1.0		125.6		
		Y	0.0	0.0	1.0		125.1		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.




FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 52 of 80

**DASY/EASY - Parameters of Probe: EF3DV3 - SN:4035****Sensor Frequency Model Parameters**


	Sensor X	Sensor Y	Sensor Z
Frequency Corr. (LF)	0.28	0.21	5.68
Frequency Corr. (HF)	2.82	2.82	2.82

**Other Probe Parameters**


Sensor Arrangement	Rectangular
Connector Angle (°)	57.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	12 mm
Tip Length	25 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	1.5 mm
Probe Tip to Sensor Y Calibration Point	1.5 mm
Probe Tip to Sensor Z Calibration Point	1.5 mm



FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 53 of 80	
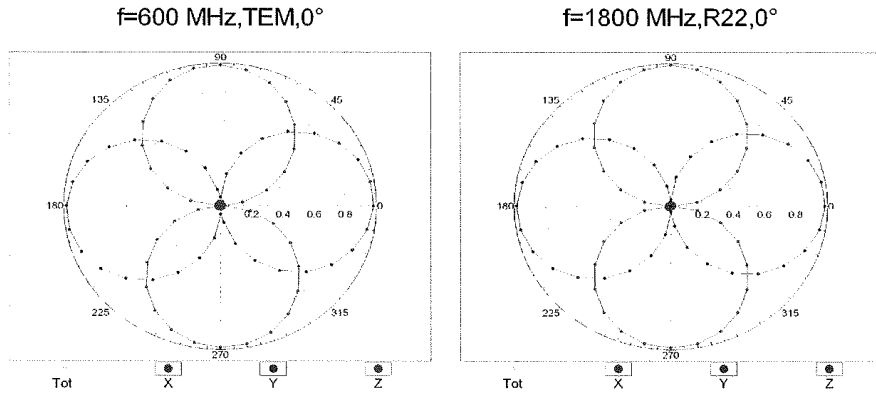
### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

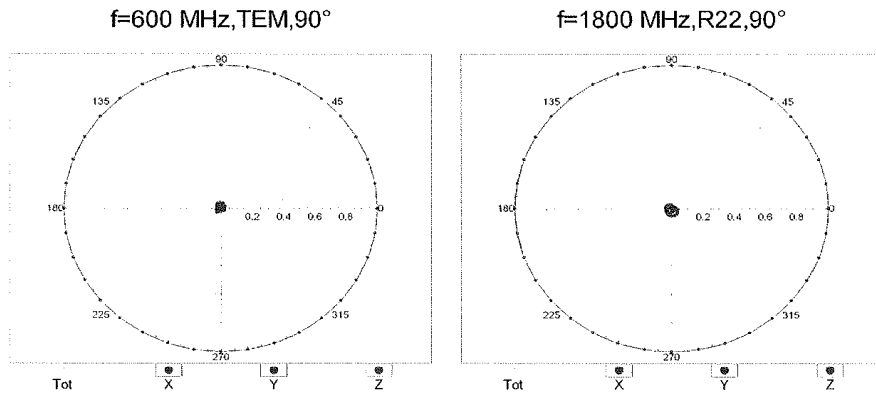


### Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$




<p>FCC ID: A3LSMG998B</p>		<p>HAC (RF EMISSIONS) TEST REPORT</p>	 <p>Approved by: Quality Manager</p>
<p>Filename: 1M2009280154-23-R2.A3L</p>	<p>Test Dates: 11/16/2020 - 11/23/2020</p>	<p>DUT Type: Portable Handset</p>	<p>Page 54 of 80</p>

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

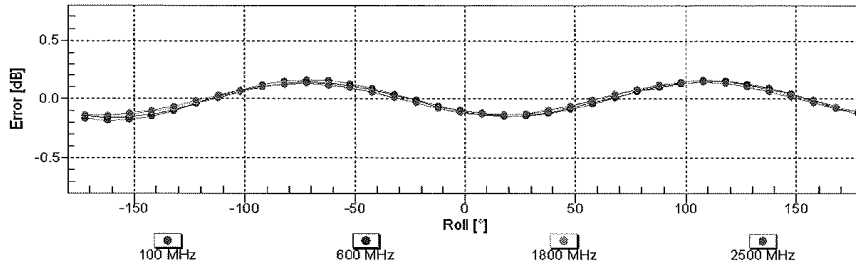



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


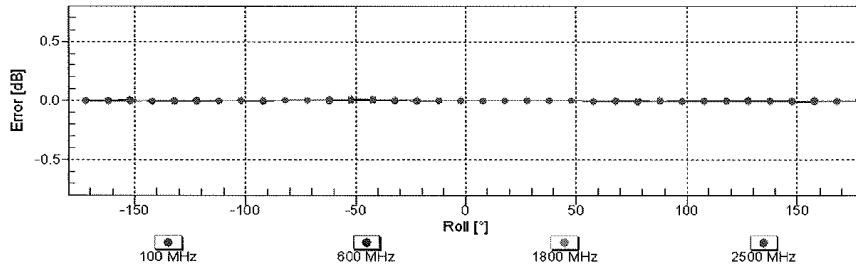
### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$





Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

<p>FCC ID: A3LSMG998B</p>		<p>HAC (RF EMISSIONS) TEST REPORT</p>	 <p>Approved by: Quality Manager</p>
<p>Filename: 1M2009280154-23-R2.A3L</p>	<p>Test Dates: 11/16/2020 - 11/23/2020</p>	<p>DUT Type: Portable Handset</p>	<p>Page 55 of 80</p>
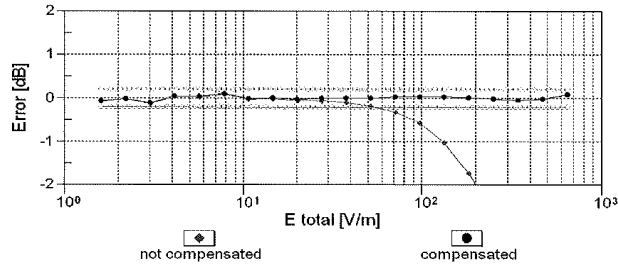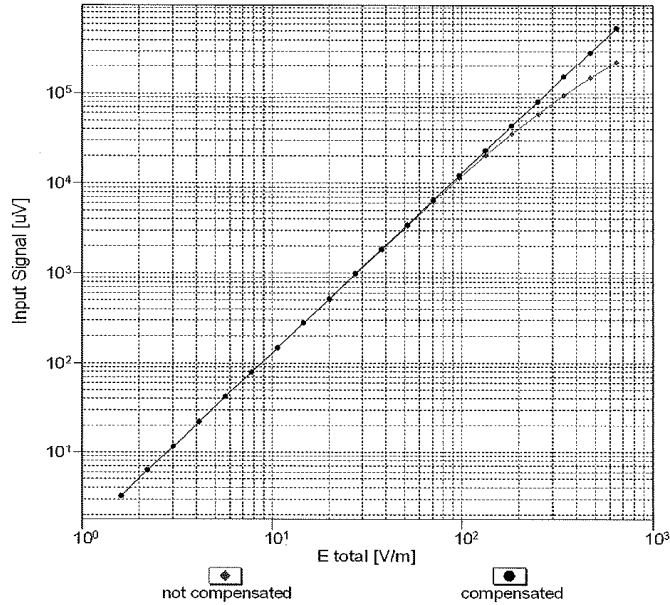
### Dynamic Range f(E-field) (TEM cell, f = 900 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)



<p>FCC ID: A3LSMG998B</p>		<p>HAC (RF EMISSIONS) TEST REPORT</p> 	<p>Approved by: Quality Manager</p>
<p>Filename: 1M2009280154-23-R2.A3L</p>	<p>Test Dates: 11/16/2020 - 11/23/2020</p>	<p>DUT Type: Portable Handset</p>	<p>Page 56 of 80</p>

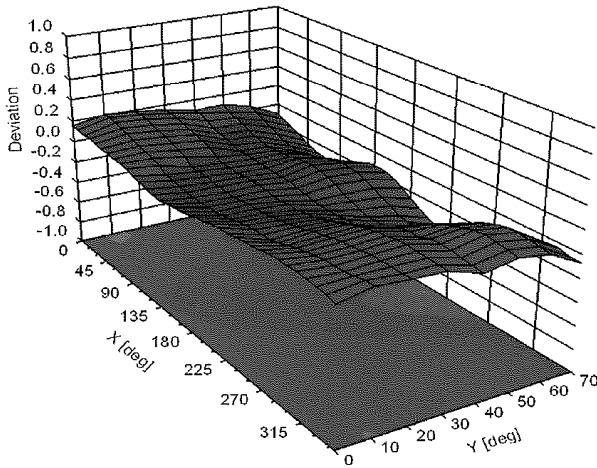

### Deviation from Isotropy in Air Error ( $\phi, \theta$ ), $f = 900$ MHz



Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>	 <b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 57 of 80

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **CD835V3-1003\_Feb19**

CALIBRATION CERTIFICATE			
Object	CD835V3 - SN: 1003		
Calibration procedure(s)	QA CAL-20.v7 Calibration Procedure for Validation Sources in air		
Calibration date:	February 19, 2019		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&TE critical for calibration)			
<b>Primary Standards</b>	<b>ID #</b>	<b>Cal Date (Certificate No.)</b>	<b>Scheduled Calibration</b>
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Probe EF3DV3	SN: 4013	03-Jan-19 (No. EF3-4013_Jan19)	Jan-20
DAE4	SN: 781	09-Jan-19 (No. DAE4-781_Jan19)	Jan-20
<b>Secondary Standards</b>	<b>ID #</b>	<b>Check Date (in house)</b>	<b>Scheduled Check</b>
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check: Oct-20
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check: Oct-20
Network Analyzer HP 8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: February 20, 2019

Certificate No: CD835V3-1003\_Feb19

Page 1 of 5

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 58 of 80	

© 2020 PCTEST

REV 3.5.M  
6/22/2020

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**References**

- [1] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

**Methods Applied and Interpretation of Parameters:**

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 59 of 80

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.2
<b>Phantom</b>	HAC Test Arch	
<b>Distance Dipole Top - Probe Center</b>	15 mm	
<b>Scan resolution</b>	dx, dy = 5 mm	
<b>Frequency</b>	835 MHz ± 1 MHz	
<b>Input power drift</b>	< 0.05 dB	

### Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	105.2 V/m = 40.44 dBV/m
Maximum measured above low end	100 mW input power	105.1 V/m = 40.43 dBV/m
Averaged maximum above arm	100 mW input power	<b>105.2 V/m ± 12.8 % (k=2)</b>

### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	17.6 dB	40.4 Ω - 7.2 jΩ
835 MHz	25.8 dB	52.2 Ω + 4.7 jΩ
880 MHz	16.9 dB	62.1 Ω - 10.5 jΩ
900 MHz	16.9 dB	52.2 Ω - 14.6 jΩ
945 MHz	21.6 dB	51.8 Ω + 8.3 jΩ




#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 60 of 80	

## Impedance Measurement Plot

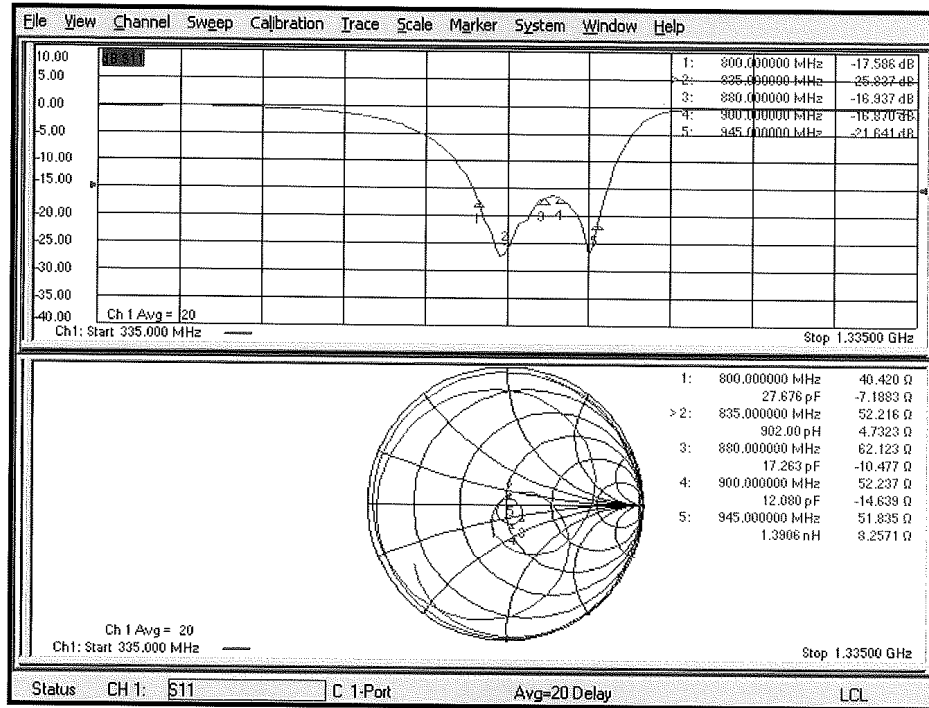

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 61 of 80

**DASY5 E-field Result**

Date: 19.02.2019

Test Laboratory: SPEAG Lab2

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1003**

Communication System: UID 0 - CW ; Frequency: 835 MHz  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 127.3 V/m; Power Drift = 0.04 dB  
 Applied MIF = 0.00 dB  
 RF audio interference level = 40.44 dBV/m  
**Emission category: M3**

MIF scaled E-field

Grid 1 M4	Grid 2 M3	Grid 3 M3
39.75 dBV/m	40.43 dBV/m	40.43 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
35.35 dBV/m	35.75 dBV/m	35.73 dBV/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
40.15 dBV/m	40.44 dBV/m	40.36 dBV/m

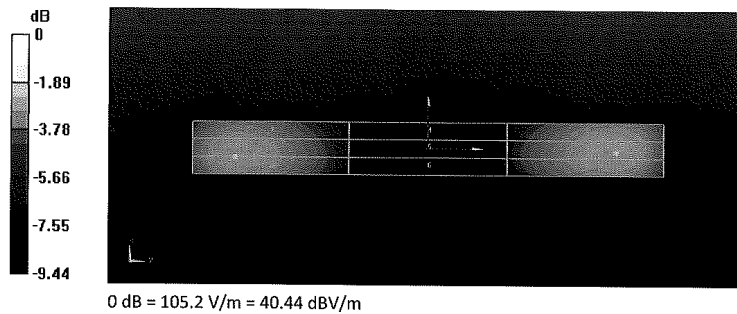

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 62 of 80	

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No.: **CD1880V3-1137\_Feb19**

<b>CALIBRATION CERTIFICATE</b>			
Object	CD1880V3 - SN: 1137		
Calibration procedure(s)	QA CAL-20.v7 Calibration Procedure for Validation Sources in air		
Calibration date:	February 19, 2019		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&TE critical for calibration)			
<b>Primary Standards</b>	<b>ID #</b>	<b>Cal Date (Certificate No.)</b>	<b>Scheduled Calibration</b>
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Probe EF3DV3	SN: 4013	03-Jan-19 (No. EF3-4013_Jan19)	Jan-20
DAE4	SN: 781	09-Jan-19 (No. DAE4-781_Jan19)	Jan-20
<b>Secondary Standards</b>	<b>ID #</b>	<b>Check Date (in house)</b>	<b>Scheduled Check</b>
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check: Oct-20
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check: Oct-20
Network Analyzer HP 8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: February 20, 2019

Certificate No: CD1880V3-1137\_Feb19

Page 1 of 7

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 63 of 80

© 2020 PCTEST

REV 3.5.M  
6/22/2020

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**References**

- [1] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

**Methods Applied and Interpretation of Parameters:**

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<b>FCC ID:</b> A3LSMG998B	<b>PCTEST</b> <small>Providing the best possible measurement solutions</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 64 of 80	



**Measurement Conditions**

DASY system configuration, as far as not given on page 1.



<b>DASY Version</b>	DASY5	V52.10.2
<b>Phantom</b>	HAC Test Arch	
<b>Distance Dipole Top - Probe Center</b>	15 mm	
<b>Scan resolution</b>	dx, dy = 5 mm	
<b>Frequency</b>	1730 MHz ± 1 MHz 1880 MHz ± 1 MHz	
<b>Input power drift</b>	< 0.05 dB	

**Maximum Field values at 1730 MHz**

<b>E-field 15 mm above dipole surface</b>	<b>condition</b>	<b>Interpolated maximum</b>
Maximum measured above high end	100 mW input power	95.0 V/m = 39.55 dBV/m
Maximum measured above low end	100 mW input power	94.9 V/m = 39.55 dBV/m
Averaged maximum above arm	100 mW input power	<b>95.0 V/m ± 12.8 % (k=2)</b>

**Maximum Field values at 1880 MHz**

<b>E-field 15 mm above dipole surface</b>	<b>condition</b>	<b>Interpolated maximum</b>
Maximum measured above high end	100 mW input power	88.9 V/m = 38.98 dBV/m
Maximum measured above low end	100 mW input power	86.6 V/m = 38.75 dBV/m
Averaged maximum above arm	100 mW input power	<b>87.8 V/m ± 12.8 % (k=2)</b>

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 65 of 80	

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters

#### Nominal Frequencies

Frequency	Return Loss	Impedance
1730 MHz	22.5 dB	54.4 $\Omega$ + 6.5 j $\Omega$
1880 MHz	21.1 dB	55.9 $\Omega$ + 7.2 j $\Omega$
1900 MHz	21.0 dB	59.0 $\Omega$ + 3.6 j $\Omega$
1950 MHz	27.3 dB	53.0 $\Omega$ - 3.3 j $\Omega$
2000 MHz	20.3 dB	42.4 $\Omega$ + 4.8 j $\Omega$




### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.



Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 66 of 80	
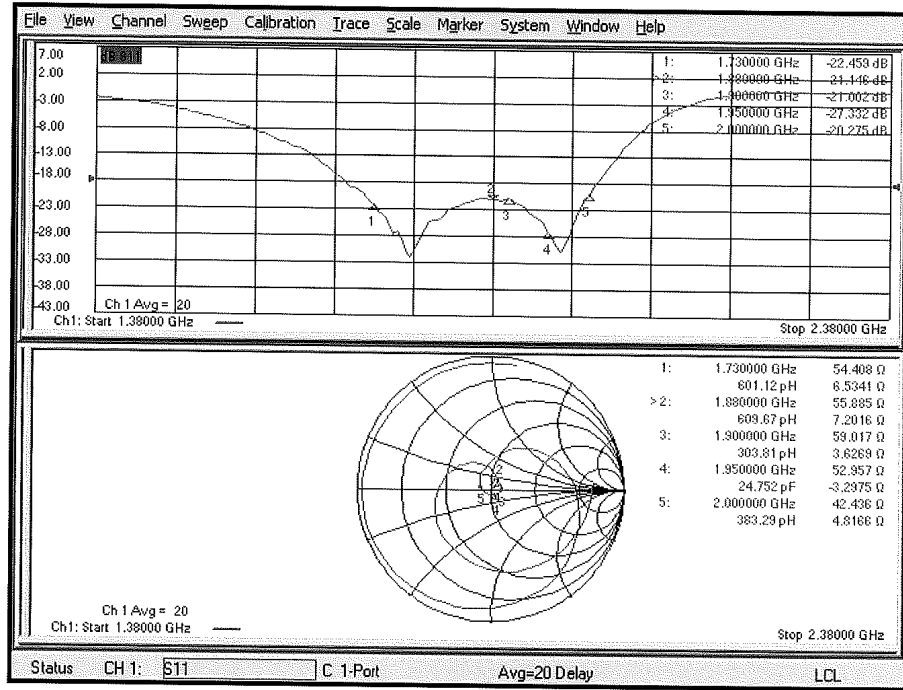
### Impedance Measurement Plot



FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 67 of 80

**DASY5 E-field Result**

Date: 19.02.2019

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1137**

Communication System: UID 0 - CW ; Frequency: 1880 MHz, Frequency: 1730 MHz  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)



DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 1880 MHz, ConvF(1, 1, 1) @ 1730 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**  
 Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 151.5 V/m; Power Drift = 0.02 dB  
 Applied MIF = 0.00 dB  
 RF audio interference level = 38.98 dBV/m  
**Emission category: M2**

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.55 dBV/m	38.98 dBV/m	38.93 dBV/m
Grid 4 M2	Grid 5 M2	Grid 6 M2
35.71 dBV/m	35.97 dBV/m	35.96 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
38.31 dBV/m	38.75 dBV/m	38.73 dBV/m

FCC ID: A3LSMG998B	 <b>PCTEST</b> Proud to be part of	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 68 of 80	

**Dipole E-Field measurement @ 1880MHz /E-Scan - 1730MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 165.0 V/m; Power Drift = 0.03 dB


Applied MIF = 0.00 dB



RF audio interference level = 39.55 dBV/m

**Emission category: M2**

MIF scaled E-field

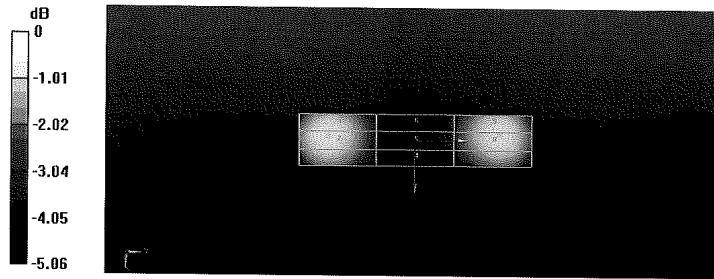Grid 1 M2 39.09 dBV/m	Grid 2 M2 39.55 dBV/m	Grid 3 M2 39.51 dBV/m
Grid 4 M2 36.57 dBV/m	Grid 5 M2 36.95 dBV/m	Grid 6 M2 36.95 dBV/m
Grid 7 M2 39.05 dBV/m	Grid 8 M2 39.55 dBV/m	Grid 9 M2 39.53 dBV/m



<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> Proud to be part of	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 69 of 80	

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **CD2600V3-1012\_Feb19**

<b>CALIBRATION CERTIFICATE</b>			
Object	CD2600V3 - SN: 1012		
Calibration procedure(s)	QA CAL-20.v7 Calibration Procedure for Validation Sources in air		
Calibration date:	February 19, 2019		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&TE critical for calibration)			
<b>Primary Standards</b>	<b>ID #</b>	<b>Cal Date (Certificate No.)</b>	<b>Scheduled Calibration</b>
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Probe EF3DV3	SN: 4013	03-Jan-19 (No. EF3-4013_Jan19)	Jan-20
DAE4	SN: 781	09-Jan-19 (No. DAE4-781_Jan19)	Jan-20
<b>Secondary Standards</b>	<b>ID #</b>	<b>Check Date (in house)</b>	<b>Scheduled Check</b>
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check: Oct-20
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check: Oct-20
Network Analyzer HP 8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: February 20, 2019

*OKH*  
3/19/2019

Certificate No: CD2600V3-1012\_Feb19

Page 1 of 5

FCC ID: A3LSMG998B	<b>PCTEST</b> Proud to be part of	<b>HAC (RF EMISSIONS) TEST REPORT</b>		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 70 of 80

© 2020 PCTEST

REV 3.5.M  
6/22/2020

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**References**

- [1] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

**Methods Applied and Interpretation of Parameters:**

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<b>FCC ID:</b> A3LSMG998B	<b>PCTEST</b> <small>Providing the best possible measurement solutions</small>	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 71 of 80	

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	2600 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

### Maximum Field values at 2600 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	85.6 V/m = 38.65 dBV/m
Maximum measured above low end	100 mW input power	84.7 V/m = 38.56 dBV/m
Averaged maximum above arm	100 mW input power	<b>85.2 V/m ± 12.8 % (k=2)</b>

### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

Frequency	Return Loss	Impedance
2450 MHz	20.5 dB	42.7 Ω - 4.8 jΩ
2550 MHz	32.1 dB	48.9 Ω + 2.2 jΩ
2600 MHz	39.6 dB	50.3 Ω + 1.0 jΩ
2650 MHz	30.4 dB	53.0 Ω + 0.9 jΩ
2750 MHz	20.9 dB	48.9 Ω - 8.9 jΩ



### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 72 of 80



### Impedance Measurement Plot

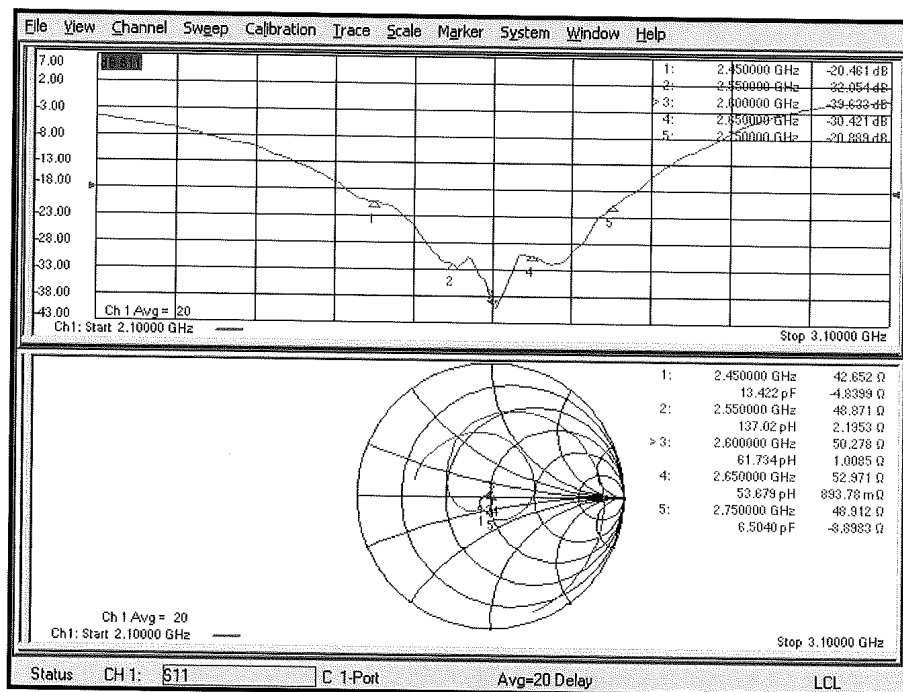

FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset		Page 73 of 80

**DASY5 E-field Result**

Date: 19.02.2019

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 2600 MHz; Type: CD2600V3; Serial: CD2600V3 - SN: 1012**

Communication System: UID 0 - CW ; Frequency: 2600 MHz  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


**DASY52 Configuration:**

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Dipole E-Field measurement @ 2600MHz - with/E-Scan - 2600MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**  
 Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 62.82 V/m; Power Drift = -0.01 dB  
 Applied MIF = 0.00 dB  
 RF audio interference level = 38.65 dBV/m  
**Emission category: M2**

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.09 dBV/m	38.56 dBV/m	38.54 dBV/m
Grid 4 M2	Grid 5 M2	Grid 6 M2
37.82 dBV/m	38.06 dBV/m	38.02 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
38.36 dBV/m	38.65 dBV/m	38.56 dBV/m

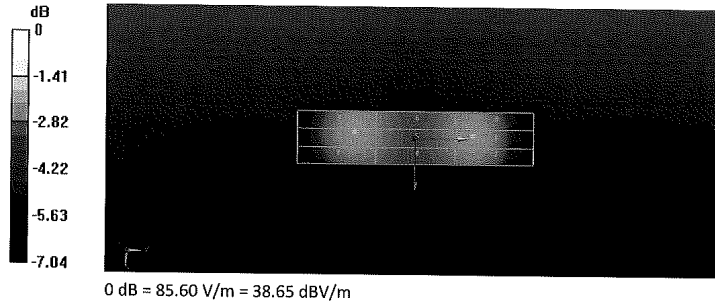




FCC ID: A3LSMG998B	PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 74 of 80	

## 16. CONCLUSION



The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

Please note that the M-rating for this equipment only represents the field interference possible against a hypothetical and typical hearing aid. The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.



<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> Proud to be part of 	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 75 of 80	

## 17. REFERENCES

1. ANSI/IEEE C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.", New York, NY, IEEE, May 2011
2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
4. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," *Wireless Telephones and Hearing Aids: New Challenges for Audiology*, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
9. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
10. Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, *Ear and Hearing* 7:257-265, 1986.
11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
13. Decker, W. F., Crawford, M. L., and Wilson, W. A., "Construction of a Large Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Feb. 1979.
14. EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.

FCC ID: A3LSMG998B	 PCTEST Proud to be part of	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename: 1M2009280154-23-R2.A3L	Test Dates: 11/16/2020 - 11/23/2020	DUT Type: Portable Handset	Page 76 of 80	

15. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
16. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
17. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
18. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
19. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
20. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
21. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7<sup>th</sup> International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
25. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> Proud to be part of	<b>HAC (RF EMISSIONS) TEST REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Filename:</b> 1M2009280154-23-R2.A3L	<b>Test Dates:</b> 11/16/2020 - 11/23/2020	<b>DUT Type:</b> Portable Handset	Page 77 of 80	