


Appendix G. Proximity sensor feature

The DUT has two proximity sensors to reduce the output power. The position of the sensors and antenna are as shown in the graphic.

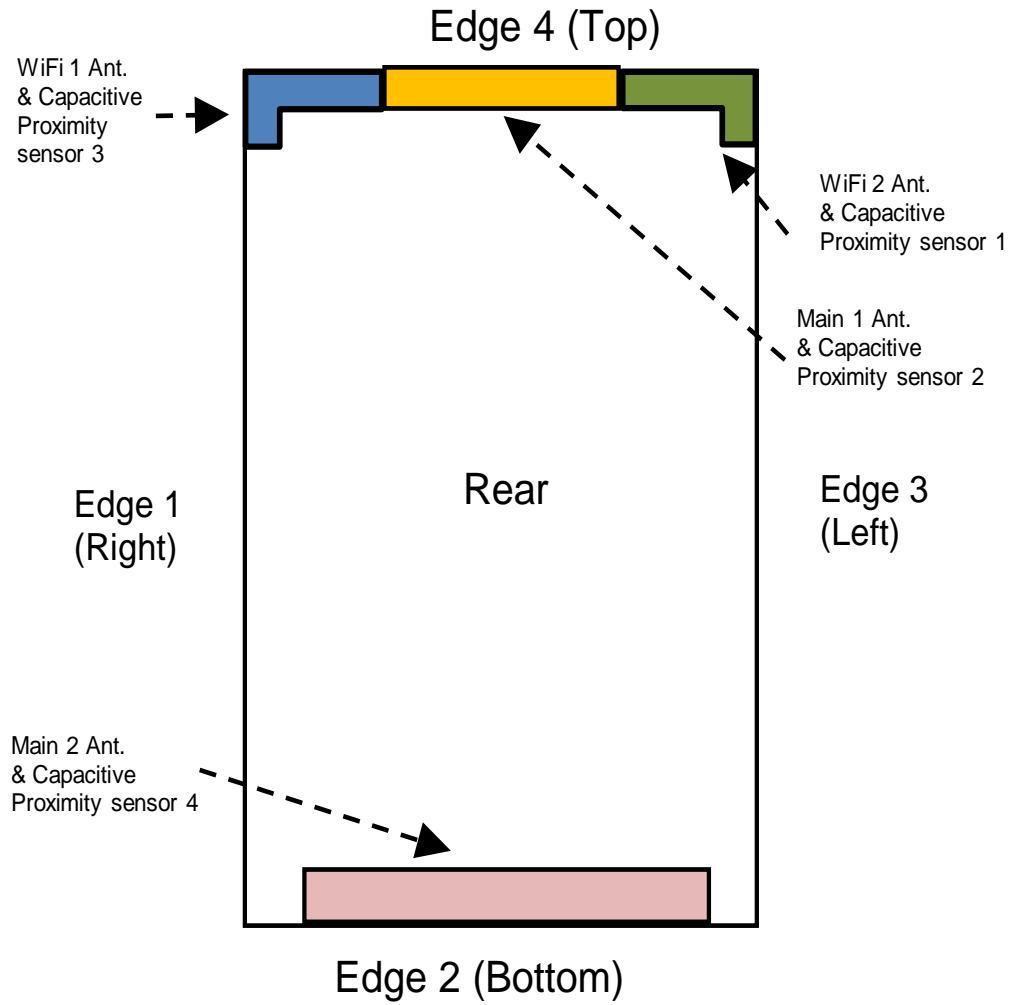


G.1 Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Rear, Edge 1, Edge 2, Edge 3, Edge 4, Corner A (Side of between Edge 1 and Edge 4), Corner B (Side of between Edge 3 and Edge 4) of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

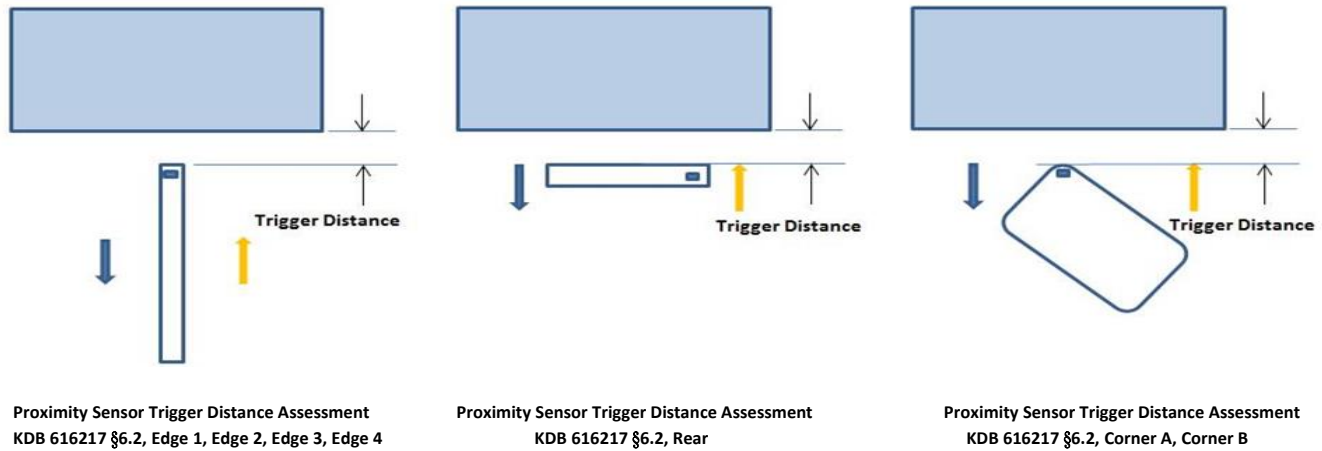

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Summary of Trigger Distances

Antenna	Trigger distance - Rear		Trigger distance – Edge 1		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
Main 1 Ant.	20 mm	20 mm	8 mm	8 mm	10 mm	10 mm
Antenna	Trigger distance – Edge 4					
	Moving toward phantom	Moving from phantom				
Main 1 Ant.	26 mm	26 mm				
Antenna	Trigger distance – Rear		Trigger distance – Edge 2			
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom		
Main 2 Ant.	20 mm	20 mm	27 mm	27 mm		

Antenna	Trigger distance - Rear		Trigger distance – Edge 4		Trigger distance – Edge 1	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
WiFi 1 Ant.	17 mm	17 mm	21 mm	21 mm	8 mm	8 mm
Antenna	Trigger distance – Corner A					
	Moving toward phantom	Moving from phantom				
WiFi 1 Ant.	10 mm	10 mm				
Antenna	Trigger distance – Rear		Trigger distance – Edge 4		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
WiFi 2 Ant.	15 mm	15 mm	18 mm	18 mm	10 mm	10 mm
Antenna	Trigger distance – Corner B					
	Moving toward phantom	Moving from phantom				
WiFi 2 Ant.	12 mm	12 mm				

Proximity Sensor Triggering Distance Measurement Results

Main 1 Ant.

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	16	17	18	19	20	21	22	23	24	25
GSM850 Voice	22.2	22.7	22.8	22.6	22.2	32.4	32.7	32.8	32.5	32.7
GSM850 GPRS 1tx	22.4	22.1	22.9	22.2	22.7	32.5	32.8	32.3	32.3	32.6
GSM850 GPRS 2tx	21.3	21.2	21.6	21.5	21.7	30.8	31.4	31.3	31.2	31.2
GSM850 GPRS 3tx	19.6	19.8	19.7	19.5	19.6	28.4	28.5	28.9	28.5	28.9
GSM850 GPRS 4tx	17.4	17.8	17.3	17.8	17.3	27.9	27.9	28.1	27.6	28.0
GSM850 EGPRS 1tx	17.0	16.6	16.7	17.2	17.3	26.1	26.2	25.7	26.0	26.1
GSM850 EGPRS 2tx	15.2	15.2	14.7	15.2	15.1	25.1	25.3	25.3	25.3	25.3
GSM850 EGPRS 3tx	12.6	13.1	12.8	12.9	13.2	22.7	23.3	22.9	22.7	23.0
GSM850 EGPRS 4tx	12.1	11.9	11.8	12.0	12.1	22.2	21.9	21.8	22.0	22.1
GSM1900 Voice	20.6	20.5	20.9	20.6	20.4	30.0	29.8	30.1	30.1	30.2
GSM1900 GPRS 1tx	20.2	20.3	20.1	20.5	20.4	29.8	30.1	29.8	30.4	30.2
GSM1900 GPRS 2tx	19.8	19.4	19.3	19.4	19.3	27.7	27.2	27.2	27.9	27.3
GSM1900 GPRS 3tx	17.6	17.7	17.6	17.5	17.4	25.8	26.0	26.0	25.7	25.7
GSM1900 GPRS 4tx	15.3	15.3	15.6	15.5	15.8	24.5	24.2	24.7	24.8	24.7
GSM1900 EGPRS 1tx	16.7	17.0	16.8	16.8	17.0	25.2	25.3	24.9	24.7	25.0
GSM1900 EGPRS 2tx	15.1	15.3	15.0	15.1	15.2	23.3	23.6	23.2	23.4	23.2
GSM1900 EGPRS 3tx	13.1	12.9	13.0	13.4	13.2	22.5	22.2	22.7	22.3	22.4
GSM1900 EGPRS 4tx	11.9	12.3	12.4	12.2	12.4	20.6	21.4	21.0	20.9	20.7
WCDMA II	13.3	13.7	13.7	13.5	13.4	23.8	23.9	24.2	24.0	23.7
WCDMA IV	13.8	13.5	13.3	13.7	13.8	24.3	24.1	23.7	24.4	24.0
WCDMA V	15.7	15.4	15.4	15.3	15.6	24.3	24.3	23.7	24.3	24.2
LTE B2	13.8	14.3	14.2	13.9	13.9	23.8	23.9	24.0	24.1	24.0
LTE B4	13.8	13.6	13.8	14.2	14.2	23.8	23.8	23.9	24.4	24.2
LTE B5	16.0	15.6	15.9	16.0	15.9	23.8	23.8	24.3	24.3	24.3
LTE B12	15.9	16.3	16.2	15.9	16.1	24.1	24.1	24.3	23.8	23.7
LTE B13	16.3	16.3	15.9	16.3	16.4	23.8	24.1	24.3	24.4	24.3
LTE B17	16.0	16.4	16.3	16.2	15.8	24.3	23.6	23.7	23.8	24.0
LTE B25	14.2	13.7	14.2	14.0	13.6	23.7	23.6	23.8	23.7	24.1
LTE B26	16.1	15.8	15.7	15.9	15.7	24.0	23.8	23.8	23.8	23.9
LTE B41(PC3)	13.7	14.2	13.9	13.6	14.3	23.9	24.2	24.3	24.1	24.0
LTE B41(PC2)	14.5	14.9	14.3	14.9	14.4	26.4	26.5	26.6	26.2	26.4
LTE B66	14.4	14.1	13.8	13.7	14.2	23.9	23.7	24.1	24.1	23.7
NR n5	15.9	16.2	16.1	15.8	15.7	24.1	24.0	24.0	24.0	24.4
NR n66	13.7	13.7	14.3	13.6	14.0	23.6	24.2	23.7	23.6	24.3

Edge 1, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
WCDMA II	13.8	13.1	13.8	13.5	13.4	23.9	24.2	23.8	24.3	23.9
WCDMA IV	13.6	13.2	13.8	13.4	13.2	24.3	24.4	23.9	24.1	24.4
WCDMA V	20.0	20.0	20.0	20.0	19.6	24.4	24.2	23.9	23.8	24.3
LTE B2	14.0	14.2	14.2	14.1	13.9	23.7	24.1	24.1	23.8	24.0
LTE B4	14.0	14.1	14.3	14.2	14.2	24.0	23.9	23.7	24.3	24.1
LTE B5	20.9	21.1	20.9	21.0	21.4	23.8	23.9	23.9	24.1	24.0
LTE B12	15.8	15.9	16.2	16.3	16.3	23.8	24.2	24.4	24.2	23.9
LTE B13	16.2	15.7	15.9	15.9	16.2	24.1	24.3	24.2	23.9	24.2
LTE B17	15.6	15.8	15.9	15.9	16.0	23.7	23.7	23.8	23.9	24.1
LTE B25	14.2	14.1	13.9	13.8	14.2	24.3	23.9	23.6	23.6	24.3
LTE B26	15.7	15.9	16.3	16.3	16.0	24.1	24.2	24.3	23.6	24.1
LTE B41(PC3)	22.3	21.7	21.6	22.3	22.2	24.3	23.9	24.0	23.6	23.7
LTE B41(PC2)	21.9	22.1	21.7	21.8	22.0	26.3	26.6	26.4	26.1	26.8
LTE B66	14.0	14.0	14.4	13.7	13.9	23.8	23.9	24.4	24.0	23.8
NR n5	20.0	20.2	19.7	20.2	20.0	23.8	24.3	23.9	24.3	24.1
NR n66	14.3	14.2	14.1	14.3	13.6	24.0	24.1	23.7	23.8	23.7

Edge 3, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	6	7	8	9	10	11	12	13	14	15
WCDMA II	13.3	13.5	13.7	13.1	13.9	24.2	23.9	23.8	24.3	24.3
WCDMA IV	13.7	13.4	13.2	13.3	13.6	24.4	23.8	23.8	23.8	23.7
WCDMA V	19.8	20.2	20.4	20.1	19.9	24.2	23.9	24.2	24.0	24.3
LTE B2	13.8	14.2	13.8	14.4	13.7	23.9	24.3	24.3	24.1	24.2
LTE B4	14.0	13.7	13.8	13.8	14.4	24.2	24.2	24.3	24.1	23.9
LTE B5	20.9	21.3	21.4	21.2	20.8	24.3	23.7	23.8	23.8	23.6
LTE B12	16.3	15.7	16.1	16.1	15.9	23.6	24.4	23.8	24.0	24.3
LTE B13	15.7	15.9	16.2	16.0	16.0	23.8	24.0	24.0	24.2	24.1
LTE B17	16.1	15.7	16.0	15.9	15.9	24.0	23.8	24.0	24.0	24.0
LTE B25	13.7	13.7	14.1	13.7	14.0	23.7	24.1	24.0	24.1	24.3
LTE B26	15.8	16.3	16.2	15.9	15.6	24.3	24.2	24.2	23.8	23.7
LTE B41(PC3)	22.0	21.8	21.7	21.9	22.3	23.7	24.2	23.8	23.7	24.0
LTE B41(PC2)	22.1	21.8	21.9	22.3	22.2	26.6	26.9	26.4	26.9	26.4
LTE B66	13.9	13.6	13.8	13.9	13.7	23.9	24.1	24.4	23.8	24.1
NR n5	20.4	20.0	20.3	19.7	19.7	23.7	24.2	24.0	23.9	24.3
NR n66	14.3	14.0	14.0	14.4	13.7	24.4	24.2	23.9	23.8	23.9

Edge 4, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	22	23	24	25	26	27	28	29	30	31
GSM850 Voice	22.9	22.5	22.4	22.5	22.2	32.9	32.3	32.8	32.2	32.6
GSM850 GPRS 1tx	22.9	22.2	22.4	22.6	22.4	32.2	32.8	32.6	32.1	32.8
GSM850 GPRS 2tx	21.7	21.5	21.8	21.4	21.7	30.8	31.4	31.2	30.8	31.4
GSM850 GPRS 3tx	19.2	19.4	19.4	19.7	19.3	28.5	28.6	28.6	28.8	28.5
GSM850 GPRS 4tx	17.4	17.4	17.3	17.7	17.4	27.7	27.8	28.0	27.5	27.8
GSM850 EGPRS 1tx	17.0	17.4	17.1	17.0	17.0	26.4	25.7	26.0	25.8	25.9
GSM850 EGPRS 2tx	15.4	14.7	14.8	14.9	14.8	25.3	25.4	25.0	24.8	24.9
GSM850 EGPRS 3tx	13.3	13.2	13.1	12.8	13.3	23.4	22.6	23.2	23.4	23.0
GSM850 EGPRS 4tx	11.9	12.4	12.3	12.2	11.8	22.1	22.1	22.2	21.7	22.0
GSM1900 Voice	20.1	20.4	20.4	20.3	20.7	30.0	29.8	29.7	30.4	29.9
GSM1900 GPRS 1tx	20.5	20.8	20.8	20.2	20.8	30.4	30.1	30.1	29.8	29.9
GSM1900 GPRS 2tx	19.8	19.2	19.7	19.4	19.4	27.7	27.5	27.3	27.8	27.2
GSM1900 GPRS 3tx	17.2	17.6	17.8	17.7	17.7	25.8	25.6	25.7	26.0	26.2
GSM1900 GPRS 4tx	15.1	15.9	15.7	15.3	15.9	24.5	24.2	24.5	24.2	24.4
GSM1900 EGPRS 1tx	16.9	17.0	16.9	17.0	17.2	25.0	25.0	24.9	25.1	24.8
GSM1900 EGPRS 2tx	14.8	15.3	15.2	15.3	14.8	23.7	23.4	23.2	23.3	23.4
GSM1900 EGPRS 3tx	13.0	13.4	12.8	13.0	13.1	22.1	22.6	22.3	22.5	22.6
GSM1900 EGPRS 4tx	12.1	11.8	11.6	11.6	12.0	21.0	21.1	21.3	21.1	21.3
WCDMA II	13.4	13.9	13.1	13.7	13.8	23.6	24.1	24.1	23.7	23.6
WCDMA IV	13.9	13.6	13.7	13.1	13.9	24.3	24.2	24.0	24.4	24.2
WCDMA V	15.6	15.1	15.3	15.3	15.9	24.2	23.7	24.2	24.3	24.1
LTE B2	13.6	14.0	13.7	13.8	13.8	24.3	23.7	23.7	23.8	24.3
LTE B4	14.3	14.2	14.0	13.8	13.8	24.2	24.1	24.1	24.2	24.3
LTE B5	15.9	16.3	15.8	15.9	16.1	24.3	23.6	24.3	23.8	24.0
LTE B12	15.8	16.2	16.3	15.7	16.3	24.1	24.1	24.0	24.1	23.7
LTE B13	16.2	16.4	15.6	16.2	16.4	24.2	24.2	23.7	24.3	24.1
LTE B17	15.7	16.1	16.3	16.0	16.0	24.4	23.7	23.7	23.8	23.8
LTE B25	13.6	13.7	14.2	14.0	14.1	24.3	24.1	23.8	24.4	24.3
LTE B26	15.7	15.7	15.9	16.3	15.8	23.9	23.9	23.8	23.9	23.9
LTE B41(PC3)	13.8	13.7	13.9	13.9	13.6	23.9	24.2	23.8	23.8	24.1
LTE B41(PC2)	14.5	14.1	14.2	14.1	14.4	26.2	26.3	26.1	26.9	26.6
LTE B66	14.2	13.8	14.3	13.8	14.4	23.9	24.0	23.6	24.2	23.7
NR n5	16.2	16.1	16.4	15.6	15.7	23.8	23.9	24.3	24.4	24.0
NR n66	13.6	14.0	13.8	14.2	14.0	24.1	24.1	23.6	23.6	24.2

Main 2 Ant.

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	16	17	18	19	20	21	22	23	24	25
LTE B2	13.6	13.9	13.9	13.8	13.8	24.2	24.2	23.6	23.8	24.4

Edge 2, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	23	24	25	26	27	28	29	30	31	32
LTE B2	13.9	13.7	13.7	14.4	14.2	24.4	24.3	24.1	24.3	24.0

WiFi 1 Ant.

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	13	14	15	16	17	18	19	20	21	22
Ant 1	2.4GHz Wi-Fi 11b	12.3	11.7	11.7	11.7	12.3	17.1	17.4	17.4	17.4	17.0
	2.4GHz Wi-Fi 11g	11.8	12.0	12.0	11.9	11.6	17.0	17.1	17.4	16.6	16.7
	2.4GHz Wi-Fi 11n	11.7	12.3	11.8	11.6	12.1	16.6	17.2	16.7	17.3	17.1
	2.4GHz Wi-Fi 11ax	12.1	11.9	12.1	11.7	11.7	16.6	17.1	17.1	17.3	16.8
	5GHz Wi-Fi(20MHz BW) 11a	8.2	8.2	8.0	7.8	7.7	15.7	15.9	16.0	15.6	16.0
	5GHz Wi-Fi(20MHz BW) 11n	8.1	8.1	8.3	8.1	7.7	16.3	16.3	15.9	16.2	16.1
	5GHz Wi-Fi(40MHz BW) 11n	7.8	7.9	8.2	8.2	8.3	15.9	16.1	16.2	16.1	16.3
	5GHz Wi-Fi(20MHz BW) 11ac	8.1	7.7	8.3	8.1	8.2	16.2	15.7	16.0	15.9	16.3
	5GHz Wi-Fi(40MHz BW) 11ac	8.1	7.9	8.3	7.7	8.0	15.8	16.0	15.8	15.9	16.1
	5GHz Wi-Fi(80MHz BW) 11ac	7.8	7.7	7.7	8.1	7.8	15.1	15.3	15.1	14.9	15.1
	5GHz Wi-Fi(160MHz BW) 11ac	7.7	7.1	7.6	7.1	7.8	14.1	13.6	14.4	13.9	14.4
	5GHz Wi-Fi(20MHz BW) 11ax	8.4	7.7	7.7	7.7	7.9	15.6	15.9	15.6	15.7	15.8
	5GHz Wi-Fi(40MHz BW) 11ax	8.2	7.7	8.0	8.0	8.1	16.4	16.0	16.2	16.4	15.8
	5GHz Wi-Fi(80MHz BW) 11ax	7.9	7.8	7.6	7.6	7.9	15.1	14.7	14.6	15.0	15.1
	5GHz Wi-Fi(160MHz BW) 11ax	7.2	7.3	7.1	7.8	7.8	14.2	13.9	14.3	13.7	13.9
	6GHz Wi-Fi(20MHz BW) 11a	5.7	6.0	5.8	5.7	5.7	6.3	6.2	5.8	5.9	6.4
	6GHz Wi-Fi(20MHz BW) 11ax	5.9	5.9	6.3	6.4	5.8	6.4	5.6	5.9	5.9	6.2
	6GHz Wi-Fi(40MHz BW) 11ax	7.8	7.9	7.9	7.9	8.3	8.8	8.7	9.3	8.6	8.7
	6GHz Wi-Fi(80MHz BW) 11ax	8.0	8.4	8.3	7.7	7.8	8.6	9.1	8.7	8.7	8.6
	6GHz Wi-Fi(160MHz BW) 11ax	7.3	7.5	7.8	7.5	7.4	9.0	8.9	9.0	8.9	8.7
Bluetooth BDR	11.8	12.2	12.2	12.1	12.0	17.0	16.7	16.6	16.7	16.8	
Bluetooth EDR	12.1	11.9	12.4	12.4	12.3	14.8	15.4	15.2	15.0	14.6	
Bluetooth LE (High power mode)	11.8	12.3	11.7	11.7	12.0	15.2	14.9	15.3	15.1	15.2	
Bluetooth LE (Low power mode)	10.1	9.9	10.1	10.4	10.4	10.2	9.9	10.1	10.2	10.2	

Edge 1, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	4	5	6	7	8	9	10	11	12	13
Ant 1	2.4GHz Wi-Fi 11b	12.1	12.1	12.1	11.6	11.7	16.7	16.8	16.7	17.1	16.8
	2.4GHz Wi-Fi 11g	12.4	12.3	11.8	12.2	11.9	17.3	17.1	17.3	16.8	17.3
	2.4GHz Wi-Fi 11n	12.3	12.3	11.9	12.1	12.1	17.0	17.3	16.6	17.3	16.6
	2.4GHz Wi-Fi 11ax	12.3	11.7	12.2	12.1	11.9	16.7	17.1	16.9	17.1	17.1
	5GHz Wi-Fi(20MHz BW) 11a	8.0	7.6	7.9	7.9	7.8	16.3	15.9	16.3	16.2	16.0
	5GHz Wi-Fi(20MHz BW) 11n	8.2	7.8	8.1	7.8	7.6	15.8	15.6	16.2	15.7	15.9
	5GHz Wi-Fi(40MHz BW) 11n	8.2	8.4	8.2	8.3	8.3	16.0	16.3	16.2	16.0	16.0
	5GHz Wi-Fi(20MHz BW) 11ac	7.9	8.3	7.8	8.4	7.9	15.9	16.1	15.8	16.3	16.2
	5GHz Wi-Fi(40MHz BW) 11ac	8.0	8.4	7.6	8.2	7.9	16.0	16.0	16.0	15.8	15.9
	5GHz Wi-Fi(80MHz BW) 11ac	7.7	8.1	8.1	7.7	8.3	14.7	14.9	14.8	15.1	14.9
	5GHz Wi-Fi(160MHz BW) 11ac	7.2	7.3	7.1	7.5	7.8	14.3	14.1	14.3	13.9	14.2
	5GHz Wi-Fi(20MHz BW) 11ax	7.8	7.7	8.3	8.0	7.7	15.6	15.8	16.3	16.1	15.7
	5GHz Wi-Fi(40MHz BW) 11ax	7.9	8.4	8.0	8.1	8.3	15.6	16.0	16.0	16.4	15.8
	5GHz Wi-Fi(80MHz BW) 11ax	8.3	8.4	8.1	8.1	8.1	14.8	14.7	15.1	15.1	14.6
	5GHz Wi-Fi(160MHz BW) 11ax	7.9	7.2	7.2	7.8	7.9	13.9	13.8	14.0	13.6	13.9
	6GHz Wi-Fi(20MHz BW) 11a	5.7	5.7	5.7	5.6	6.1	5.6	5.9	6.1	6.1	6.0
	6GHz Wi-Fi(20MHz BW) 11ax	6.0	5.8	5.8	5.8	6.4	6.1	6.0	6.1	6.0	5.8
	6GHz Wi-Fi(40MHz BW) 11ax	8.1	8.2	8.0	8.2	7.7	9.2	8.7	8.9	9.1	9.2
	6GHz Wi-Fi(80MHz BW) 11ax	8.0	8.3	8.2	7.9	8.0	8.7	9.0	9.3	8.7	8.9
	6GHz Wi-Fi(160MHz BW) 11ax	7.2	7.2	7.3	7.6	7.8	9.3	9.3	9.3	8.7	9.4
Bluetooth BDR	12.0	11.8	12.4	11.9	12.2	16.8	17.0	16.8	16.6	16.9	
Bluetooth EDR	11.7	11.8	11.9	11.9	11.9	15.0	14.7	14.9	15.1	15.4	
Bluetooth LE (High power mode)	12.0	12.2	11.8	12.1	12.3	15.4	14.7	15.3	15.1	14.8	
Bluetooth LE (Low power mode)	10.4	10.2	10.3	9.6	9.7	10.1	10.1	9.7	9.7	9.7	

Edge 4, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	17	18	19	20	21	22	23	24	25	26
Ant 1	2.4GHz Wi-Fi 11b	11.8	12.4	12.3	11.9	12.3	16.7	16.8	16.7	16.9	17.2
	2.4GHz Wi-Fi 11g	12.1	12.2	12.4	11.8	12.1	17.1	17.2	17.2	16.8	16.9
	2.4GHz Wi-Fi 11n	12.0	12.1	12.1	12.3	12.1	16.9	16.9	17.2	17.3	17.2
	2.4GHz Wi-Fi 11ax	12.3	12.0	12.3	12.0	11.6	16.8	17.4	17.3	16.7	17.1
	5GHz Wi-Fi(20MHz BW) 11a	8.0	7.8	7.7	8.2	7.8	16.3	16.1	16.2	16.0	16.1
	5GHz Wi-Fi(20MHz BW) 11n	8.3	8.0	8.0	8.0	8.2	16.2	16.1	16.4	15.9	16.3
	5GHz Wi-Fi(40MHz BW) 11n	7.8	7.8	7.6	7.7	8.3	16.2	15.7	15.7	15.9	15.7
	5GHz Wi-Fi(20MHz BW) 11ac	7.7	8.1	8.1	8.1	8.2	15.6	15.6	15.9	16.3	15.9
	5GHz Wi-Fi(40MHz BW) 11ac	8.2	8.4	8.1	7.8	8.3	16.3	16.1	16.1	16.2	15.8
	5GHz Wi-Fi(80MHz BW) 11ac	7.9	8.4	7.8	7.7	8.4	14.6	14.9	15.2	14.6	15.2
	5GHz Wi-Fi(160MHz BW) 11ac	7.2	7.3	7.8	7.7	7.8	13.7	14.3	14.0	14.3	14.3
	5GHz Wi-Fi(20MHz BW) 11ax	8.0	8.2	7.7	8.2	8.2	16.1	15.7	15.8	16.0	16.0
	5GHz Wi-Fi(40MHz BW) 11ax	8.1	8.1	8.3	7.7	7.7	16.1	16.0	15.9	15.8	15.8
	5GHz Wi-Fi(80MHz BW) 11ax	8.4	7.9	8.3	8.1	8.0	15.2	15.1	14.8	15.3	14.8
	5GHz Wi-Fi(160MHz BW) 11ax	7.5	7.8	7.4	7.8	7.2	14.1	13.9	13.7	14.2	13.7
	6GHz Wi-Fi(20MHz BW) 11a	5.7	6.3	6.0	5.6	6.1	6.1	5.8	5.8	5.8	6.2
	6GHz Wi-Fi(20MHz BW) 11ax	6.1	6.3	6.4	5.8	5.6	5.9	6.1	5.7	6.2	5.6
	6GHz Wi-Fi(40MHz BW) 11ax	7.9	8.1	7.7	8.3	7.9	9.3	9.4	9.4	8.9	9.0
	6GHz Wi-Fi(80MHz BW) 11ax	7.7	7.9	8.0	7.8	8.4	8.8	9.4	8.8	9.0	9.1
	6GHz Wi-Fi(160MHz BW) 11ax	7.7	7.2	7.2	7.3	7.6	9.1	8.7	9.3	9.0	8.7
	Bluetooth BDR	12.2	12.0	11.9	12.1	11.9	17.1	17.2	16.7	17.0	17.0
	Bluetooth EDR	12.1	12.2	12.0	12.2	12.3	14.6	15.2	14.9	15.3	15.3
Bluetooth LE (High power mode)	11.9	12.3	11.7	12.0	11.8	14.9	15.2	15.3	15.2	15.1	
Bluetooth LE (Low power mode)	9.8	10.4	10.3	9.9	10.4	9.9	10.0	10.1	9.8	10.3	

Corner A, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	6	7	8	9	10	11	12	13	14	15
Ant 1	2.4GHz Wi-Fi 11b	11.6	11.9	12.2	12.4	11.8	17.0	17.1	17.4	16.9	17.2
	2.4GHz Wi-Fi 11g	11.8	11.9	11.8	12.0	11.7	17.3	17.2	17.1	17.3	17.3
	2.4GHz Wi-Fi 11n	12.4	11.8	11.6	11.9	12.2	16.7	17.2	17.2	16.8	17.0
	2.4GHz Wi-Fi 11ax	12.3	11.7	12.0	12.2	12.1	16.7	17.1	17.3	16.7	17.0
	5GHz Wi-Fi(20MHz BW) 11a	8.2	8.1	8.1	7.7	7.8	16.1	15.7	15.9	15.7	15.8
	5GHz Wi-Fi(20MHz BW) 11n	7.7	8.4	8.1	8.2	8.0	15.8	16.4	16.1	15.9	16.2
	5GHz Wi-Fi(40MHz BW) 11n	8.4	7.9	8.1	8.1	8.2	16.2	16.3	15.8	16.1	16.2
	5GHz Wi-Fi(20MHz BW) 11ac	7.8	8.2	7.9	7.7	8.0	16.1	16.2	16.3	16.2	16.2
	5GHz Wi-Fi(40MHz BW) 11ac	8.0	8.3	8.3	8.1	8.3	16.0	15.9	15.9	15.7	16.4
	5GHz Wi-Fi(80MHz BW) 11ac	8.0	8.3	7.8	7.7	8.1	15.4	15.2	14.7	15.2	15.2
	5GHz Wi-Fi(160MHz BW) 11ac	7.3	7.7	7.8	7.6	7.5	14.4	13.7	14.2	13.7	13.9
	5GHz Wi-Fi(20MHz BW) 11ax	7.9	7.6	8.3	8.0	8.0	15.7	15.6	16.2	16.3	15.7
	5GHz Wi-Fi(40MHz BW) 11ax	8.2	7.7	7.8	8.1	8.0	15.6	15.9	16.4	16.1	16.0
	5GHz Wi-Fi(80MHz BW) 11ax	7.8	8.3	7.8	8.2	8.1	14.7	15.3	15.1	15.4	14.8
	5GHz Wi-Fi(160MHz BW) 11ax	7.5	7.3	7.5	7.6	7.7	13.8	13.9	13.9	14.3	14.2
	6GHz Wi-Fi(20MHz BW) 11a	6.3	6.0	5.7	6.0	6.0	6.3	5.7	6.1	5.7	6.0
	6GHz Wi-Fi(20MHz BW) 11ax	6.4	6.4	6.3	6.0	6.3	5.7	6.3	6.3	6.3	6.0
	6GHz Wi-Fi(40MHz BW) 11ax	8.4	7.8	7.8	7.6	8.4	9.2	8.6	9.1	8.9	8.8
	6GHz Wi-Fi(80MHz BW) 11ax	8.0	7.7	8.2	8.2	8.1	9.4	8.7	8.8	8.8	8.9
	6GHz Wi-Fi(160MHz BW) 11ax	7.7	7.9	7.2	7.3	7.5	8.8	8.8	9.2	8.7	9.1
	Bluetooth BDR	12.3	12.3	12.1	11.8	11.9	16.6	17.1	16.7	16.6	17.3
	Bluetooth EDR	12.3	11.7	12.3	12.0	12.3	14.8	14.9	14.9	15.1	15.0
Bluetooth LE (High power mode)	12.2	12.2	11.7	11.8	11.7	14.9	14.7	14.6	14.8	14.7	
Bluetooth LE (Low power mode)	10.3	9.8	10.2	9.6	10.2	10.3	10.1	9.8	10.1	10.2	

WiFi 2 Ant.

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	11	12	13	14	15	16	17	18	19	20
Ant 2	2.4GHz Wi-Fi 11b	11.7	12.1	12.1	12.3	12.3	17.3	17.1	17.0	16.8	17.4
	2.4GHz Wi-Fi 11g	12.1	12.2	12.1	12.1	12.2	17.2	16.6	17.0	17.2	17.1
	2.4GHz Wi-Fi 11n	12.1	11.8	12.2	12.3	12.3	16.6	17.1	17.0	17.4	17.1
	2.4GHz Wi-Fi 11ax	11.7	11.7	11.9	11.9	11.8	16.9	17.3	16.6	16.9	17.2
	5GHz Wi-Fi(20MHz BW) 11a	8.3	7.7	8.0	8.2	8.2	15.8	15.9	15.7	15.8	16.0
	5GHz Wi-Fi(20MHz BW) 11n	7.8	7.8	7.9	8.1	8.3	16.2	16.3	16.3	16.2	16.1
	5GHz Wi-Fi(40MHz BW) 11n	8.1	8.3	8.4	7.9	7.9	16.1	16.2	15.7	16.2	15.8
	5GHz Wi-Fi(20MHz BW) 11ac	8.4	8.0	7.8	8.0	7.9	15.8	15.9	15.9	16.1	15.9
	5GHz Wi-Fi(40MHz BW) 11ac	7.6	8.3	8.2	7.7	7.9	16.3	15.9	15.9	15.9	16.2
	5GHz Wi-Fi(80MHz BW) 11ac	8.0	8.0	8.0	7.6	7.7	15.2	14.8	14.6	15.2	14.7
	5GHz Wi-Fi(160MHz BW) 11ac	7.5	7.6	7.4	7.6	7.1	14.2	13.9	13.8	14.1	13.6
	5GHz Wi-Fi(20MHz BW) 11ax	8.0	8.3	7.7	8.3	7.6	15.6	16.1	16.2	15.7	15.6
	5GHz Wi-Fi(40MHz BW) 11ax	7.9	7.8	7.7	7.7	7.7	16.3	15.8	16.2	15.7	15.9
	5GHz Wi-Fi(80MHz BW) 11ax	7.8	8.1	7.9	7.8	8.0	15.3	14.6	15.2	15.1	15.1
	5GHz Wi-Fi(160MHz BW) 11ax	7.6	7.4	7.9	7.7	7.6	13.8	13.7	13.7	13.7	14.0
	6GHz Wi-Fi(20MHz BW) 11a	6.4	6.3	5.8	6.0	5.9	5.6	5.8	6.4	6.3	6.3
	6GHz Wi-Fi(20MHz BW) 11ax	6.1	5.7	5.7	6.4	6.0	6.0	6.3	6.3	6.3	5.8
	6GHz Wi-Fi(40MHz BW) 11ax	8.1	7.9	7.9	8.3	7.9	9.0	9.4	9.2	8.8	9.4
	6GHz Wi-Fi(80MHz BW) 11ax	7.8	8.3	8.0	7.6	8.2	9.3	9.0	8.9	9.0	9.0
	6GHz Wi-Fi(160MHz BW) 11ax	7.4	7.6	7.5	7.2	7.7	9.2	9.3	9.0	9.3	8.9
Bluetooth BDR	11.8	12.2	12.0	11.7	11.9	16.9	16.7	17.3	17.3	16.9	
Bluetooth EDR	11.8	11.7	11.8	12.0	12.3	15.3	14.8	14.8	14.8	15.1	
Bluetooth LE (High power mode)	12.3	11.8	12.1	12.0	12.3	14.6	14.8	15.4	14.7	15.4	
Bluetooth LE (Low power mode)	9.8	9.7	9.9	9.9	10.0	9.8	9.6	9.9	9.6	10.0	

Edge 3, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	6	7	8	9	10	11	12	13	14	15
Ant 2	2.4GHz Wi-Fi 11b	11.8	12.2	12.3	12.0	12.2	17.3	16.9	17.1	16.9	17.0
	2.4GHz Wi-Fi 11g	11.9	11.8	11.6	12.3	11.9	17.0	17.0	17.4	16.9	16.8
	2.4GHz Wi-Fi 11n	11.9	12.0	11.8	11.9	11.9	17.3	16.9	17.4	17.4	17.1
	2.4GHz Wi-Fi 11ax	12.1	12.3	11.7	12.0	12.4	17.1	16.9	17.0	17.0	16.8
	5GHz Wi-Fi(20MHz BW) 11a	7.7	7.6	8.2	7.7	8.1	16.2	16.1	15.6	16.0	16.0
	5GHz Wi-Fi(20MHz BW) 11n	8.3	8.0	7.8	8.1	7.9	15.8	15.7	16.1	16.2	15.8
	5GHz Wi-Fi(40MHz BW) 11n	8.2	8.0	8.0	8.0	8.4	16.3	16.1	16.0	16.0	15.6
	5GHz Wi-Fi(20MHz BW) 11ac	7.6	8.1	8.1	8.3	7.8	15.7	16.1	16.2	15.8	15.6
	5GHz Wi-Fi(40MHz BW) 11ac	7.7	8.4	8.0	8.0	8.2	15.8	16.1	16.2	15.6	16.0
	5GHz Wi-Fi(80MHz BW) 11ac	8.1	8.4	8.2	8.0	8.4	14.7	15.1	14.9	14.6	15.2
	5GHz Wi-Fi(160MHz BW) 11ac	7.3	7.4	7.6	7.8	7.7	14.2	14.2	14.3	14.3	14.3
	5GHz Wi-Fi(20MHz BW) 11ax	7.8	7.9	8.1	7.8	7.8	16.1	15.7	16.3	15.8	16.1
	5GHz Wi-Fi(40MHz BW) 11ax	7.8	8.2	8.4	7.7	7.8	16.3	16.1	16.0	16.3	15.6
	5GHz Wi-Fi(80MHz BW) 11ax	7.7	8.1	8.3	8.3	8.3	14.8	14.7	14.7	15.4	15.1
	5GHz Wi-Fi(160MHz BW) 11ax	7.5	7.6	7.3	7.3	7.9	13.9	13.9	13.9	13.7	14.1
	6GHz Wi-Fi(20MHz BW) 11a	5.9	5.9	6.0	6.0	5.6	6.3	6.1	6.3	5.9	5.7
	6GHz Wi-Fi(20MHz BW) 11ax	6.3	5.9	6.0	5.9	5.8	6.3	6.1	6.2	5.8	6.3
	6GHz Wi-Fi(40MHz BW) 11ax	7.7	8.2	7.8	8.1	8.2	8.8	9.1	9.1	8.7	8.8
	6GHz Wi-Fi(80MHz BW) 11ax	8.1	8.0	8.2	8.1	8.3	8.8	9.2	8.7	8.6	8.8
	6GHz Wi-Fi(160MHz BW) 11ax	7.2	7.8	7.2	7.2	7.8	9.1	8.8	9.0	8.6	9.1
Bluetooth BDR	11.9	12.1	11.7	12.1	11.9	16.8	17.3	17.3	17.2	17.0	
Bluetooth EDR	12.0	12.1	12.1	12.2	11.8	14.7	15.3	14.7	15.2	15.4	
Bluetooth LE (High power mode)	11.8	11.8	11.7	12.0	12.2	14.9	15.2	14.6	15.2	15.1	
Bluetooth LE (Low power mode)	10.2	10.3	9.9	10.4	9.7	10.1	10.3	10.4	9.6	10.4	

Edge 4, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	14	15	16	17	18	19	20	21	22	23
Ant 2	2.4GHz Wi-Fi 11b	12.2	12.1	12.4	12.3	11.7	16.9	16.8	17.2	17.4	17.0
	2.4GHz Wi-Fi 11g	11.8	12.0	11.7	11.9	12.1	17.3	17.2	16.8	16.7	17.4
	2.4GHz Wi-Fi 11n	11.8	11.9	12.3	11.9	12.0	17.1	16.9	17.2	17.1	16.7
	2.4GHz Wi-Fi 11ax	12.1	11.8	11.9	12.2	12.3	16.6	17.3	17.1	16.8	16.8
	5GHz Wi-Fi(20MHz BW) 11a	8.1	8.4	8.3	8.2	8.0	15.9	16.4	15.6	16.3	16.3
	5GHz Wi-Fi(20MHz BW) 11n	8.0	7.9	7.6	7.7	8.3	15.7	16.2	15.6	15.7	16.4
	5GHz Wi-Fi(40MHz BW) 11n	8.2	7.8	7.6	7.8	8.1	16.4	16.2	16.1	15.7	16.1
	5GHz Wi-Fi(20MHz BW) 11ac	7.6	8.2	8.1	7.8	7.9	16.4	16.3	16.0	15.6	15.7
	5GHz Wi-Fi(40MHz BW) 11ac	8.1	7.9	7.8	8.0	7.7	15.8	15.7	15.9	15.8	16.3
	5GHz Wi-Fi(80MHz BW) 11ac	8.2	8.2	8.3	7.8	8.0	14.8	15.3	15.4	15.1	15.1
	5GHz Wi-Fi(160MHz BW) 11ac	7.7	7.9	7.3	7.3	7.5	13.6	14.4	14.1	14.3	14.1
	5GHz Wi-Fi(20MHz BW) 11ax	8.3	7.6	7.8	7.9	8.1	16.0	15.9	15.8	16.1	15.8
	5GHz Wi-Fi(40MHz BW) 11ax	8.4	7.7	8.3	8.1	8.2	16.2	15.7	16.3	16.0	15.7
	5GHz Wi-Fi(80MHz BW) 11ax	7.7	8.1	8.3	8.4	7.7	15.2	15.3	14.7	15.1	14.9
	5GHz Wi-Fi(160MHz BW) 11ax	7.3	7.3	7.2	7.1	7.3	13.7	14.2	14.1	14.2	14.1
	6GHz Wi-Fi(20MHz BW) 11a	6.4	5.7	6.3	5.7	5.8	6.0	6.1	5.8	6.4	5.9
	6GHz Wi-Fi(20MHz BW) 11ax	6.1	5.7	6.4	5.8	6.2	5.9	6.0	5.8	6.1	5.6
	6GHz Wi-Fi(40MHz BW) 11ax	8.0	8.2	8.2	8.0	8.0	9.1	9.3	9.3	8.9	9.1
	6GHz Wi-Fi(80MHz BW) 11ax	8.0	8.4	8.0	7.7	8.2	9.1	8.8	9.3	9.2	8.6
	6GHz Wi-Fi(160MHz BW) 11ax	7.6	7.5	7.6	7.7	7.2	9.3	9.1	9.2	8.6	8.9
	Bluetooth BDR	11.7	12.2	11.9	12.3	12.3	17.0	16.9	17.0	17.2	17.1
	Bluetooth EDR	12.4	12.0	12.4	12.1	11.7	14.7	15.0	14.9	14.7	14.8
	Bluetooth LE (High power mode)	12.1	12.4	12.1	11.7	12.4	14.6	15.4	14.7	14.7	15.2
Bluetooth LE (Low power mode)	10.2	9.6	10.0	9.8	9.8	10.3	9.6	10.2	10.4	10.2	

Corner B, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm											
Antenna	Distance	8	9	10	11	12	13	14	15	16	17
Ant 2	2.4GHz Wi-Fi 11b	11.8	12.3	12.1	12.4	12.0	17.0	16.9	16.8	16.7	17.1
	2.4GHz Wi-Fi 11g	12.4	12.1	12.2	12.0	11.8	16.8	17.2	17.1	17.3	16.6
	2.4GHz Wi-Fi 11n	12.2	12.1	12.1	12.1	11.7	16.7	16.8	16.8	17.2	17.2
	2.4GHz Wi-Fi 11ax	12.4	12.2	12.0	11.9	12.0	16.7	16.9	17.0	16.7	17.1
	5GHz Wi-Fi(20MHz BW) 11a	8.4	8.0	8.2	7.8	7.9	16.2	16.0	15.7	15.8	16.2
	5GHz Wi-Fi(20MHz BW) 11n	8.0	8.3	7.6	7.8	8.4	15.9	15.8	16.1	16.0	16.1
	5GHz Wi-Fi(40MHz BW) 11n	7.6	7.9	8.4	8.2	8.3	15.9	16.4	15.9	16.2	16.0
	5GHz Wi-Fi(20MHz BW) 11ac	8.3	8.3	7.8	8.1	8.1	16.0	16.1	16.1	15.6	15.6
	5GHz Wi-Fi(40MHz BW) 11ac	7.7	8.3	8.1	8.2	8.3	16.2	15.7	16.1	15.8	15.7
	5GHz Wi-Fi(80MHz BW) 11ac	8.2	8.0	7.6	7.8	7.8	15.1	15.4	15.2	15.0	14.7
	5GHz Wi-Fi(160MHz BW) 11ac	7.7	7.1	7.2	7.7	7.7	14.4	14.2	13.9	14.3	14.3
	5GHz Wi-Fi(20MHz BW) 11ax	7.8	7.8	7.7	8.2	8.0	15.6	16.3	16.0	15.9	16.0
	5GHz Wi-Fi(40MHz BW) 11ax	8.2	7.7	8.3	7.8	8.2	16.1	16.4	16.1	15.9	16.4
	5GHz Wi-Fi(80MHz BW) 11ax	8.3	8.0	8.2	7.6	8.0	14.7	15.3	14.7	14.9	15.2
	5GHz Wi-Fi(160MHz BW) 11ax	7.9	7.2	7.4	7.6	7.6	13.7	13.9	13.8	14.2	13.8
	6GHz Wi-Fi(20MHz BW) 11a	6.0	6.1	6.2	6.2	6.1	6.2	6.2	6.4	5.9	5.8
	6GHz Wi-Fi(20MHz BW) 11ax	5.7	5.7	6.0	6.1	6.2	5.7	6.1	6.3	6.0	6.0
	6GHz Wi-Fi(40MHz BW) 11ax	7.7	8.1	8.2	7.9	8.0	8.9	9.1	9.4	9.4	9.1
	6GHz Wi-Fi(80MHz BW) 11ax	8.2	8.4	7.8	7.7	8.3	9.1	9.0	9.0	9.0	9.0
	6GHz Wi-Fi(160MHz BW) 11ax	7.7	7.6	7.7	7.7	7.8	9.3	8.8	8.6	8.7	9.1
	Bluetooth BDR	12.1	12.2	12.1	12.0	11.9	17.0	17.4	16.7	17.1	17.3
	Bluetooth EDR	11.9	12.4	11.7	11.9	12.0	14.7	14.9	14.6	14.8	15.0
	Bluetooth LE (High power mode)	12.2	12.4	11.9	12.0	12.3	15.3	15.3	14.9	14.8	14.8
Bluetooth LE (Low power mode)	10.2	9.9	9.7	10.4	9.7	10.3	10.0	10.0	9.6	9.8	

G.2 Proximity Sensor Coverage (KDB 616217 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Edge 3)

Antenna	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over +/-45°	Power reduction status										
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Main 1 Ant	10 mm	10 mm	On	On	On	On	On	On	On	On	On	On	On
WiFi 2 Ant	10 mm	10 mm	On	On	On	On	On	On	On	On	On	On	On

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Edge 4)

Antenna	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over +/-45°	Power reduction status										
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Main 1 Ant	26 mm	26 mm	On	On	On	On	On	On	On	On	On	On	On
WiFi 1 Ant	21 mm	21 mm	On	On	On	On	On	On	On	On	On	On	On
WiFi 2 Ant	18 mm	18 mm	On	On	On	On	On	On	On	On	On	On	On

G.4 Resulting test positions for SAR measurements

Wireless technologies	Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
Main 1 Ant.	Rear	20 mm	N/A	N/A	19 mm
	Edge 1	8 mm	N/A	8 mm	7 mm
	Edge 3	10 mm	N/A	10 mm	9 mm
	Edge 4	26 mm	N/A	26 mm	25 mm
Main 2 Ant.	Rear	20 mm	N/A	N/A	19 mm
	Edge 2	27 mm	N/A	27 mm	26 mm
WiFi 1 Ant.	Rear	17 mm	N/A	N/A	16 mm
	Edge 1	8 mm	N/A	8 mm	7 mm
	Edge 4	21 mm	N/A	21 mm	20 mm
	Corner A	10 mm	N/A	N/A	9 mm
WiFi 2 Ant.	Rear	15 mm	N/A	N/A	14 mm
	Edge 3	10 mm	N/A	8 mm	9 mm
	Edge 4	18 mm	N/A	10 mm	17 mm
	Corner B	12 mm	N/A	N/A	11 mm