



RF Exposure Report

(Part 0: SAR and PD Char Evaluation)

FCC ID : A4RG6QU3
Equipment : Phone
Model Name : G6QU3
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2 (2.1093)

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

Sporton International Inc.

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



Table of Contents

1. Introduction 4

2. Product Description 5

3. SAR Characterization..... 6

 3.1 SAR design target and uncertainty..... 6

 3.2 SAR Char Table 7

4. Power Density Characterization10

 4.1 PD Char Table.....10

 4.2 Codebook for all beams12

 4.3 PD_design_target determination.....17

 4.4 Exposure positions for PD evaluation18

 4.5 Simulation and modeling validation.....19

 4.6 PD Char20

 4.6.1 Simulated input power limit for single beams20

 4.6.2 Simulated input power limit for beam pairs21

 4.6.3 Worst-case housing influence determination.....22

 4.7 PD Char29

 4.7.1 PD char generation29

 4.7.2 PD char Table.....30

5. PD Test Setup.....34

 5.1 PD Test – System Setup34

 5.2 EUmmWave Probe / E-Field 5G Probe.....35

 5.3 Data Acquisition Electronics (DAE)36

 5.4 Scan configuration36

 5.5 System Verification Source36

 5.6 Power Density System Verification.....38

6. Uncertainty Assessment39



History of this test report

Report No.	Version	Description	Issued Date
FA050515E	01	Initial issue of report	Aug. 05, 2020
FA050515E	02	Update section 3.1	Aug. 31, 2020



1. Introduction

The FCC RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency \leq 6GHz) and power density (transmit frequency $>$ 6GHz). to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement. Cannot operate without SAR and PD characterization at the device level, beforehand.

This report describes the procedures for the SAR char and PD char generation, and the parameters obtained from SAR and PD characterization (referred to as SAR char and PD char, respectively) will be used as input for Smart Transmit. Both SAR char and PD char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

Terminologies in this report

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR char	P_{limit} for all the technologies/bands for all applicable DSI
PD_design_target:	The design target for PD compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
input.power.limit	For a PD characterized wireless device, the input power level at antenna port(s) for each beam corresponding to PD_design_target.
PD char	The table that contains input.power.limit fed to antenna port(s) for all supported beams.



2. Product Description

Product Feature & Specification	
Equipment Name	Phone
FCC ID	A4RG6QU3
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n260: 37GHz ~ 40GHz 5G NR n261: 27.5GHz ~ 28.35GHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM, 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK

3. SAR Characterization

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz.

3.1 SAR design target and uncertainty

Exposure conditions	Device State Index (DSI)	SAR design target	W/kg
Head Standalone (Head)	2	1g SAR design target	0.95
Head Simultaneous (Head_WiFi)	7	1g SAR design target	0.79
Hotspot	6	1g SAR design target	0.79
Body Standalone (Body)	4	1g SAR design target	0.95
Body Simultaneous (Body_WiFi)	8	1g SAR design target	0.79

Item	Uncertainty dB (k=2)
Total uncertainty	1.0

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$



3.2 SAR Char Table

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz

Config0							
Band	Antenna	DSI_2	DSI_4	DSI_6	DSI_7	DSI_8	Pmax*
		Head Standalone	Body Standalone	Hotspot Simultaneous Transmit	Head Simultaneous Transmit	Body Simultaneous Transmit	
GSM850(GPRS 4 Tx slots)**	0	30.1	29.2	28.4	29.3	28.4	25.5
GSM1900(GPRS 4 Tx slots)**	2	27.4	25.1	24.3	26.6	24.3	23.0
WCDMA B2	2	26.2	24.5	23.7	25.4	23.7	24.7
WCDMA B4	2	28.4	25.0	24.2	27.6	24.2	24.7
WCDMA B5	0	28.5	26.8	26.0	27.7	26.0	24.0
CDMA BC0	0	28.2	26.1	25.3	27.4	25.3	24.5
CDMA BC1	2	25.5	23.7	22.9	24.7	22.9	24.5
CDMA BC10	0	29.2	26.9	26.1	28.4	26.1	24.5
LTE B7	2	32.8	24.7	23.9	32.0	23.9	24.7
LTE B12/17	0	29.5	27.1	26.3	28.7	26.3	24.7
LTE B13	0	28.7	26.3	25.5	27.9	25.5	24.2
LTE B14	0	28.5	26.2	25.4	27.7	25.4	24.7
LTE B25/2	2	26.2	24.0	23.2	25.4	23.2	24.7
LTE B26/5	0	28.8	27.0	26.2	28.0	26.2	24.7
LTE B30	2	30.8	25.0	24.2	30.0	24.2	22.7
LTE B41/38**	2	32.5	22.9	22.1	31.7	22.1	22.7
LTE B41 HPUE**	2	32.5	22.9	22.1	31.7	22.1	22.9
LTE B48**	7	29.8	21.6	20.8	29.0	20.8	22.2
LTE B66/4	2	28.2	23.9	23.1	27.4	23.1	24.7
LTE B71	0	29.6	27.3	26.5	28.8	26.5	24.7
FR1 n2/25	2	26.0	23.5	22.7	25.2	22.7	24.7
FR1 n5	0	32.0	29.0	28.2	31.2	28.2	24.0
FR1 n12	0	38.2	35.6	34.8	37.4	34.8	23.7
FR1 n66	2	27.4	25.1	24.3	26.5	24.3	24.7
FR1 n71	0	30.4	28.2	27.4	29.6	27.4	24.7



Config1							
Band	Antenna	DSI_2	DSI_4	DSI_6	DSI_7	DSI_8	Pmax*
		Head Standalone	Body Standalone	Hotspot Simultaneous Transmit	Head Simultaneous Transmit	Body Simultaneous Transmit	
GSM850(GPRS 4 Tx slots)**	1	23.3	30.3	29.5	22.5	29.5	25.50
GSM1900(GPRS 4 Tx slots)**	0	30.7	19.3	18.5	29.9	18.5	22.50
WCDMA B2	0	33.1	20.0	19.2	32.3	19.2	24.70
WCDMA B4	0	34.1	20.4	19.6	33.3	19.6	24.70
WCDMA B5	1	23.4	25.5	24.7	22.6	24.7	24.00
CDMA BC0	1	22.2	25.5	24.7	21.4	24.7	24.50
CDMA BC1	0	29.5	20.0	19.2	28.7	19.2	24.50
CDMA BC10	1	24.4	26.6	25.8	23.6	25.8	24.50
LTE B7	0	29.5	21.8	21.0	28.7	21.0	24.70
LTE B12/17	1	24.4	27.5	26.7	23.6	26.7	24.70
LTE B13	1	24.2	27.6	26.8	23.4	26.8	24.20
LTE B14	1	24.4	27.8	27.0	23.6	27.0	24.70
LTE B25/2	0	35.6	19.2	18.4	34.8	18.4	24.70
LTE B26/5	1	24.0	26.1	25.3	23.2	25.3	24.70
LTE B30	0	28.4	21.3	20.5	27.6	20.5	22.70
LTE B41/38**	0	26.3	20.2	19.4	25.5	19.4	22.70
LTE B41 HPUE**	0	26.3	20.2	19.4	25.5	19.4	22.90
LTE B48**	2	28.4	19.5	18.7	27.6	18.7	19.30
LTE B66/4	0	29.3	19.8	19.0	28.5	19.0	24.70
LTE B71	1	24.2	27.8	27.0	23.4	27.0	24.70
FR1 n2/25	0	33.4	18.2	17.4	32.6	17.4	24.70
FR1 n5	1	23.0	25.8	25.0	22.2	25.0	24.00
FR1 n12	1	29.6	32.5	31.7	28.8	31.7	23.70
FR1 n66	0	29.1	19.9	19.1	28.3	19.1	24.70
FR1 n71	1	27.1	28.7	27.9	26.3	27.9	24.70



*Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + device uncertainty.

**All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

The Plimit values, corresponding to SAR_design_target.

Maximum target power, P_{max} , is configured in NV settings in EUT to limit maximum transmitting power. This power is converted into peak power in NV settings for TDD schemes. The EUT maximum allowed output power is equal to $P_{max} + 1.0\text{dB}$ device uncertainty



4. Power Density Characterization

The device with 5G mmW NR typically supports many beams and contains multiple mmW antenna arrays installed at different locations to achieve good coverage in the field. The power density (PD) measurement is a time-consuming test, and it is not practical to measure the power density for all the beams on all the surfaces of the device, thus a hybrid approach using electromagnetic (EM) simulation in combination with measurement is recommended for PD char generation

4.1 PD Char Table

The mmW device supports total N beams, where M out of N are single beams and the rest of (N-M) are beam pairs (where 2 single beams are excited at the same time).

The following figure outlines the PD char process.

Simulation modeling and validation

- Correlate the simulated PD distributions with measured PD distribution for the selected beams to validate simulation model

**Uncertainty Budget**

- Calculate the total device design uncertainty to include worst case RF tune-up accuracy and device-to-device variation

**PD_design_target**

Specify a power density design target, which should be less than power density regulatory limit to account for the total device design uncertainties

**Worst-case housing material Influence Quantification**

- Determine
$$\Delta_{\min} = \min\{\text{simulated PD@8dBm} - \text{measured PD@8dBm}\}$$
to quantify the worst-case housing influence

**PD Char Generation**

- Use validated simulation approach to determine input power limit for all the beams after accounting for the worst-case housing influence



4.2 Codebook for all beams

All the beams that the device supports are specified in the pre-defined codebook, and the codebook is device design specific and generated after evaluating radiation coverage from this particular device. In the field, a smartphone manages the beam selection and utilization based on this pre-defined codebook that is loaded and stored in the device.



Band/Antenna	Ant. Type	SISO/MIMO & Polarization	Feed no.	Beam ID	
mmWave Ant1 /n260	Patch	Single Beam H-pol (AG0)	1	1	
			2	5	
			2	6	
			2	7	
			2	10	
			2	11	
			4	17	
			4	18	
			4	19	
			4	20	
			4	21	
			4	26	
			4	27	
			4	28	
		4	29		
		Single Beam V-pol (AG1)	1	129	
			2	133	
			2	134	
			2	135	
			2	138	
			2	139	
			4	145	
			4	146	
			4	147	
			4	148	
			4	149	
			4	154	
			4	155	
			4	156	
		Beam Pair (AG0+AG1)	1	1	129
			2	5	135
			2	6	133
			2	7	134
			2	10	139
			2	11	138
			4	17	148
4	18		147		
4	19		146		
4	20		149		
4	21		145		
4	26		156		
4	27	155			
4	28	154			
4	29	157			



Band/Antenna	Ant. Type	SISO/MIMO & Polarization	Feed no.	Beam ID	
mmWave Ant2 /n260	Patch	Single Beam H-pol (AG0)	1	0	
			2	2	
			2	3	
			2	4	
			2	8	
			2	9	
			4	12	
			4	13	
			4	14	
			4	15	
			4	16	
			4	22	
			4	23	
			4	24	
			4	25	
		Single Beam V-pol (AG1)	1	128	
			2	130	
			2	131	
			2	132	
			2	136	
			2	137	
			4	140	
			4	141	
			4	142	
			4	143	
			4	144	
			4	150	
			4	151	
		Beam Pair (AG0+AG1)	1	0	128
			2	2	130
			2	3	131
			2	4	132
			2	8	137
2	9		136		
4	12		144		
4	13		143		
4	14		142		
4	15		141		
4	16		140		
4	22		153		
4	23		152		
4	24		151		
4	25		150		



Band/Antenna	Ant. Type	SISO/MIMO & Polarization	Feed no.	Beam ID	
mmWave Ant1 /n261	Patch	Single Beam H-pol (AG0)	1	1	
			2	5	
			2	6	
			2	7	
			2	10	
			2	11	
			4	17	
			4	18	
			4	19	
			4	20	
			4	21	
			4	26	
			4	27	
			4	28	
			4	29	
		Single Beam V-pol (AG1)	1	129	
			2	133	
			2	134	
			2	135	
			2	138	
			2	139	
			4	145	
			4	146	
			4	147	
			4	148	
		Beam Pair (AG0+AG1)	1	1	129
			2	5	133
			2	6	134
			2	7	135
			2	10	138
2	11		139		
4	17		145		
4	18		146		
4	19		147		
4	20		148		
4	21		149		
4	26		154		
4	27		155		
4	28		156		
4	29		157		



Band/Antenna	Ant. Type	SISO/MIMO & Polarization	Feed no.	Beam ID	
mmWave Ant2 /n261	Patch	Single Beam H-pol (AG0)	1	0	
			2	2	
			2	3	
			2	4	
			2	8	
			2	9	
			4	12	
			4	13	
			4	14	
			4	15	
			4	16	
			4	22	
			4	23	
			4	24	
			4	25	
		Single Beam V-pol (AG1)	1	128	
			2	130	
			2	131	
			2	132	
			2	136	
			2	137	
			4	140	
			4	141	
			4	142	
			4	143	
			4	144	
			4	150	
			4	151	
		Beam Pair (AG0+AG1)	1	0	128
			2	2	130
			2	3	131
			2	4	132
			2	8	136
2	9		137		
4	12		140		
4	13		141		
4	14		142		
4	15		143		
4	16		144		
4	22		150		
4	23		151		
4	24		152		
4	25		153		

4.3 PD design target determination

To account for total uncertainty, PD_design_target should meet the criteria:

$$PD_design_target < PD_{regulatory_limit} \times 10^{\frac{-totaluncertainty}{10}}$$


For this EUT, the PD design target and the uncertainty value are listed below

N260	PD design target	Antenna Module	W/m ²
		Antenna Module 1/2	6.17

N261	PD design target	Antenna Module	W/m ²
		Antenna Module 1/2	6.17

Item	Uncertainty dB (k=2)
Total uncertainty	2.1

4.4 Exposure positions for PD evaluation

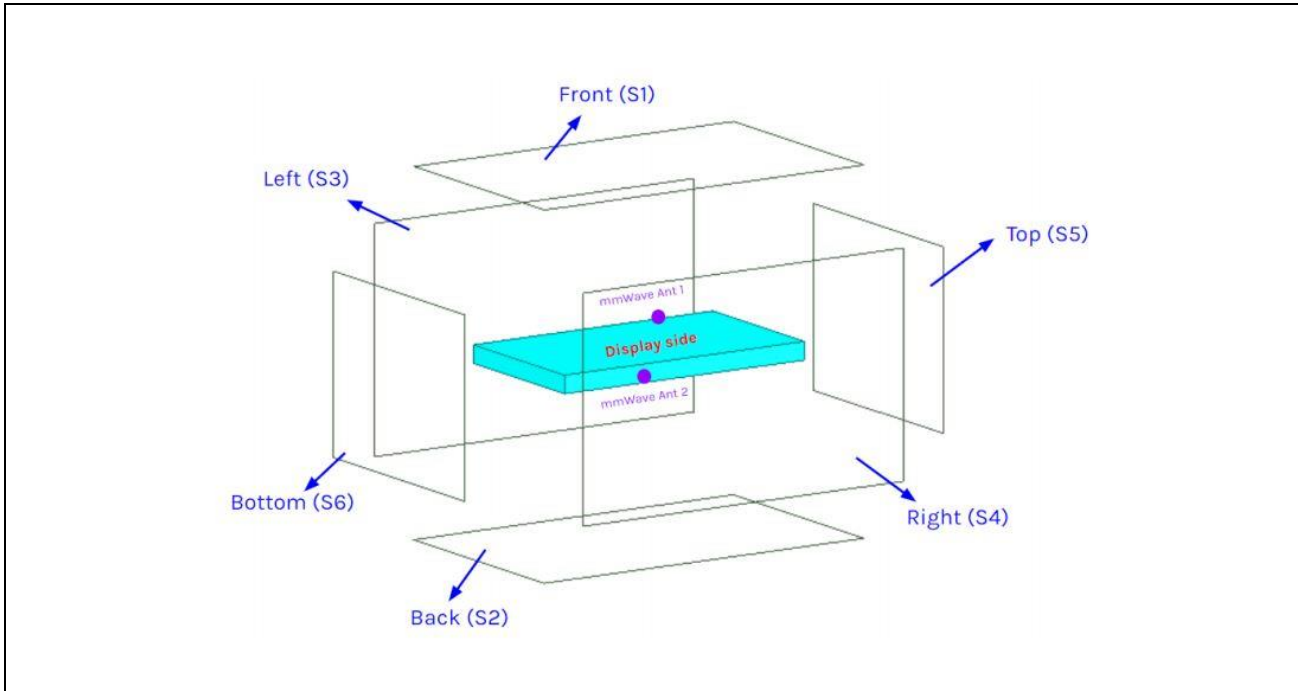

Evaluation positions

	Front	Back	Left	Right	Top	Bottom
	S1	S2	S3	S4	S5	S6
Antenna module 1	v	v	v	v	v	x
Antenna module 2	v	v	v	v	v	x

Remark:

1. Referring to the PD simulation report for the reason of selecting surfaces/edges.
2. The exposure positions selection is based on the all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.



4.5 Simulation and modeling validation

Power density simulations of all beams and surfaces were performed by the manufacturer. Details of these simulations and modeling validation can be found in the Power Density Simulation Report. Following Table includes a summary of the validation results to support worst-case housing influence quantification in power density characterization for this model With an input power of 6 dBm for n261 and n260 band, PD measurements are conducted for at least one single beam per antenna type and per antenna module (0,1) on worst-surface(s) . PD measurements are performed at mid channel of each mmW band and with CW modulation. PD value will be used to determine worst-case housing influence for conservative assessment

Band	Beam ID	Antenna module	Test Separation	channel	Surface	4cm2 SAPD (W/m2)		Delta=Sim vs Meas(Db)	
						Meas.	Sim.		
n260	28	Ant 1	2 mm	Middle	Left	10.4	16.58	2.02	
			2 mm	Middle	Front	2.84	6.80	3.79	
	149		2 mm	Middle	Left	8.96	13.72	1.85	
			2 mm	Middle	Front	5.02	7.76	1.89	
	25	Ant 2	2 mm	Middle	Right	8.76	15.86	2.58	
			2 mm	Middle	Front	2.32	6.52	4.49	
			150	2 mm	Middle	Right	8.25	15.31	2.69
				2 mm	Middle	Front	4.27	7.94	2.69
n261	27	Ant 1	2 mm	Middle	Left	10.5	16.78	2.04	
			2 mm	Middle	Front	3.64	9.15	4.01	
	155		2 mm	Middle	Left	10.1	15.74	1.93	
			2 mm	Middle	Front	3.74	8.77	3.70	
	24	Ant 2	2 mm	Middle	Right	8.01	16.70	3.19	
			2 mm	Middle	Front	3.52	8.47	3.81	
			152	2 mm	Middle	Right	8.23	15.97	2.88
				2 mm	Middle	Front	4.11	8.53	3.17

4.6 PD Char

4.6.1 Simulated input power limit for single beams

Perform simulation at low, mid and high channel for each mmW band supported, with a given input power per active port, *sim.input.power.per.active.port* (6 dBm for this product):

1. Obtain $PD_{surface}$ value (the worst PD among all identified surfaces of the device) at all three channels for all single beams (1~M) specified in *codebook_sim*.
2. Adjust input power to determine a scaling factor at all three channels by:

$$s(i)_{low_or_mid_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, \quad i = 1, 2, \dots, M \quad (4)$$

3. Determine the worst-case scaling factor among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i = 1, 2, \dots, M \quad (5)$$

Note: This scaling factor applies to the input power at each antenna port

4. Determine the simulated input power limit, *sim.powerlimit*, for single beam *i* by:

$$sim.\ power_{limit}(i)dBm = 10 * \log(s(i)) + sim.input.power.per.active.port \\ , \quad i = 1, 2, \dots, M \quad (6)$$

4.6.2 Simulated input power limit for beam pairs

The relative phase between single beams of a beam pair is swept to find the worst case PD for beam-pairs operation, and PD simulation data has taken this into consideration for beam-pair operations take consideration of the variation relative phase was reported

For beam pair, extract the E-fields and H-fields from the corresponding single beams at and high channel for each supported band and for all identified surfaces of the device.

For a given beam pair containing *beam_a* and *beam_b* with relative phase ϕ and for a given channel, determine the worst-case $\phi_{worstcase}$ which results in the highest total PD (ϕ) among all identified surfaces for this beam pair at this channel. When $\phi_{worstcase}$ is determined for all three channels, obtain the scaling factor given by the below equation for low, mid and high channels:

$$s(i)_{low_or_mid_high} = \frac{PD\ design\ target}{total.PD(\phi(i)_{worstcase})}, i = M+1, M+2, \dots N \quad (8)$$

The $\phi_{worstcase}$ varies with channel and beam pair, the lowest scaling factor among all three channels, $s(i)$, is determined for the beam pair i :

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i = M+1, M+2, \dots N \quad (9)$$

The simulated input power limit, *sim.power_{limit}*, for beam pair i can be determined by

$$sim.power_{limit}(i)dBm = 10 * \log(s(i)) + sim.input.power.per.active.port, i = M+1, M+2, \dots N \quad (10)$$

4.6.3 Worst-case housing influence determination

Referring to the PD simulation report for PD simulation data for all beams. For non-metal material, the material property cannot be accurately characterized at mmW frequencies. The estimated material property for the device housing is used in the simulation model, which could impact the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Referring to the PD simulation report for PD simulation data for all beams, and the worst beams are selected to be tested Power density simulation for all

The mmW antenna modules are placed at different locations and only surrounding material/housing has impact on EM field propagation and in turn power density, and depending on the type of antenna array the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this DUT, the procedure to determine worst-case housing influence, denoted as Δ_{min} :

1. Based on PD simulation, determine one or more worst-surface(s) that contains all the highest 4cm^2 -averaged PD for each of the beams, per antenna module and per antenna type in the mid channel of each band.
2. For identified worst surface(s) per antenna module and per antenna type group,
 - a. First determine Δ_{min} based on identified worst surface(s) in Step 1, and then follow the procedures described in Section 4.6 to derive *input.power.limit* corresponding to *PD_design_target* for all the beams
 - b. Then prove all other surface(s) near-by the mmW module, i.e., surface(s) not selected in Step 1, is not required for housing material loss quantification (in other words, these nonevaluated surfaces have no influence on the determined *input.power.limit*) by:
 - i. Scale the simulated 4cm^2 -averaged PD values for all single beams to correspond to their *sim.power.limit*, and identify the worst-PD beam per each non-selected surface.
 - ii. Measure 4cm^2 -averaged PD at *input.power.limit* for the identified worst-PD beam at each non-selected surface
 - iii. Demonstrate all measured 4cm^2 -averaged PD values are below *PD_design_target*.
3. If any of the above surface(s) in Step (2.b.iii) have measured 4cm^2 -averaged PD \geq *PD_design_target*, then those surfaces must be included in the Δ_{min} determination in Step (2.a), and follow the procedures in Section 4.6 to re-evaluate *input.power.limit* with these added surfaces.

Therefore, when comparing a simulated 4cm^2 -averaged PD and measured 4cm^2 -averaged PD for the above identified surfaces, the worst errors introduced when using the estimated material property in the simulation per module and per antenna type (worst out of both polarizations) is highlighted in bolded

numbers in section 4.5. Thus, the worst-case housing influence, denoted as Δ_{min} (= minimum of (sim.PD – meas.PD) for the same antenna type of each module), is determined as:

Band	Antenna Module	Polarization	Δ_{min} (dB)
N260	1	AG0	2.02
		AG1	1.85
	2	AG0	2.58
		AG1	2.69
N261	1	AG0	2.04
		AG1	1.93
	2	AG0	3.19
		AG1	2.88

Δ_{min} represents the worst case where RF exposure is underestimated the most by simulation upon using the estimated material property for glass/plastics of the housing. For conservative assessment, the Δ_{min} is used as the worst case correction and applied to each corresponding beam group to determine power limits in PD char for compliance. To ensure that condition described in Step (2.b.iii) is met, apply the correct input.power.limit to derive the PD simulated results for all beams, and select the worst beams (yellow highlighted in the PD table) for each of non-selected applicable surface(s).

The PD test results for non-selected surfaces are less than PD_design_target, and meets condition in Step (2.b.iii), thus performing Step (3) is not needed



Simulated 4cm²-averaged PD at input.power.limit

Determine the worst beam for each of non-selected surface(s)

Averaged PD over in [w/m^2]		Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target				
		N260_Module 1				
		S1 (2mm)	S2 (2mm)	S3 (2mm)	S4 (2mm)	S5 (2mm)
Beam ID	Polarization	Mid	Mid	Mid	Mid	Mid
1	AG0	2.263	3.275	6.170	0.018	0.094
5	AG0	2.046	3.353	6.170	0.013	0.216
6	AG0	2.846	2.660	6.104	0.017	0.130
7	AG0	2.646	2.721	6.170	0.007	0.127
10	AG0	2.680	2.783	6.104	0.013	0.085
11	AG0	2.562	2.286	5.851	0.010	0.095
17	AG0	2.710	3.241	6.170	0.012	0.323
18	AG0	2.590	3.261	6.170	0.043	0.127
19	AG0	3.009	3.011	6.170	0.028	0.069
20	AG0	2.674	3.491	6.170	0.013	0.113
21	AG0	2.245	3.894	6.170	0.015	0.290
26	AG0	2.767	2.845	5.824	0.031	0.207
27	AG0	2.756	2.985	6.170	0.024	0.104
28	AG0	2.529	2.371	6.170	0.019	0.048
29	AG0	2.286	4.197	6.170	0.015	0.385
129	AG1	2.272	3.275	6.170	0.019	0.089
133	AG1	2.700	3.188	6.170	0.017	0.091
134	AG1	2.181	3.366	5.758	0.031	0.163
135	AG1	2.066	2.934	6.170	0.009	0.133
138	AG1	2.336	2.645	5.732	0.043	0.069
139	AG1	2.037	3.331	6.041	0.020	0.151
145	AG1	3.015	2.706	6.170	0.010	0.132
146	AG1	2.888	2.757	5.762	0.037	0.097
147	AG1	2.860	3.087	6.034	0.019	0.195
148	AG1	2.482	3.725	6.170	0.016	0.155
149	AG1	3.493	2.758	6.170	0.012	0.124
154	AG1	2.994	2.507	6.027	0.027	0.042
155	AG1	2.917	3.011	6.121	0.020	0.220
156	AG1	2.910	3.185	6.146	0.024	0.150
157	AG1	2.725	3.602	6.170	0.015	0.203



Averaged PD over in [w/m^2]		Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target				
		N260_Module 2				
		S1 (2mm)	S2 (2mm)	S3 (2mm)	S4 (2mm)	S5 (2mm)
Beam ID	Mid	Mid	Mid	Mid	Mid	Mid
0	AG0	2.386	2.093	0.007	5.747	0.006
2	AG0	2.395	2.381	0.008	6.160	0.015
3	AG0	2.826	2.463	0.009	5.842	0.010
4	AG0	2.188	2.003	0.004	5.780	0.010
8	AG0	2.492	2.490	0.005	6.170	0.016
9	AG0	2.336	1.877	0.006	5.496	0.005
12	AG0	2.313	2.664	0.010	6.000	0.008
13	AG0	2.716	2.686	0.013	5.867	0.030
14	AG0	2.301	2.612	0.007	5.454	0.018
15	AG0	2.702	2.818	0.012	5.951	0.005
16	AG0	2.007	3.287	0.013	5.988	0.024
22	AG0	2.730	2.857	0.010	6.102	0.038
23	AG0	2.628	2.890	0.014	5.927	0.023
24	AG0	2.517	2.357	0.012	5.451	0.007
25	AG0	2.491	2.638	0.011	6.057	0.011
128	AG1	2.098	2.323	0.013	5.691	0.015
130	AG1	1.991	1.808	0.008	5.329	0.018
131	AG1	2.344	2.593	0.027	5.527	0.023
132	AG1	2.062	2.690	0.010	6.139	0.004
136	AG1	2.618	2.508	0.011	6.066	0.016
137	AG1	2.053	2.983	0.013	6.141	0.020
140	AG1	2.415	2.710	0.016	5.773	0.020
141	AG1	3.026	2.520	0.012	6.044	0.005
142	AG1	2.835	2.671	0.017	5.702	0.022
143	AG1	2.419	3.117	0.015	6.025	0.034
144	AG1	2.370	2.548	0.013	6.170	0.010
150	AG1	3.198	2.433	0.011	6.170	0.007
151	AG1	2.558	2.670	0.017	5.562	0.026
152	AG1	3.206	2.822	0.022	6.170	0.023
153	AG1	1.958	3.029	0.013	6.098	0.020



Averaged PD over in [w/m ²]		Simulated 4cm 2 SAPD (W/m ²) corresponding to PD_design_target				
		N260_Module 1				
		S1 (2mm)	S2 (2mm)	S3 (2mm)	S4 (2mm)	S5 (2mm)
Beam ID	Polarization	Mid	Mid	Mid	Mid	Mid
1	AG0	2.519	2.772	6.019	0.009	0.072
5	AG0	2.915	2.439	6.044	0.019	0.144
6	AG0	3.380	2.799	6.107	0.010	0.067
7	AG0	2.824	2.342	6.019	0.007	0.132
10	AG0	3.485	2.845	6.080	0.010	0.029
11	AG0	2.903	2.489	6.142	0.009	0.146
17	AG0	3.169	2.496	5.916	0.012	0.195
18	AG0	3.277	3.028	6.061	0.010	0.019
19	AG0	3.328	3.056	6.069	0.013	0.037
20	AG0	2.979	2.842	6.013	0.012	0.203
21	AG0	2.609	2.815	5.768	0.012	0.372
26	AG0	3.219	2.859	5.907	0.012	0.047
27	AG0	3.364	3.037	6.168	0.011	0.023
28	AG0	3.288	2.948	6.056	0.013	0.030
29	AG0	2.911	2.794	5.907	0.012	0.296
129	AG1	2.450	2.807	6.003	0.006	0.075
133	AG1	2.462	3.114	5.894	0.012	0.174
134	AG1	3.070	3.105	6.091	0.008	0.031
135	AG1	2.112	2.550	5.880	0.012	0.227
138	AG1	2.801	3.217	5.990	0.010	0.119
139	AG1	2.737	2.918	6.007	0.008	0.133
145	AG1	2.874	2.988	5.795	0.011	0.228
146	AG1	3.508	2.697	5.963	0.014	0.048
147	AG1	3.306	2.913	6.016	0.012	0.037
148	AG1	3.345	2.574	5.869	0.017	0.132
149	AG1	3.079	2.628	6.139	0.034	0.364
154	AG1	3.260	2.771	5.815	0.012	0.117
155	AG1	3.371	2.830	6.048	0.012	0.027
156	AG1	3.336	2.897	6.049	0.013	0.028
157	AG1	3.181	2.484	5.877	0.020	0.301



Averaged PD over in [w/m^2]		Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target				
		N260_Module 2				
		S1 (2mm)	S2 (2mm)	S3 (2mm)	S4 (2mm)	S5 (2mm)
Beam ID	Mid	Mid	Mid	Mid	Mid	Mid
0	AG0	2.314	2.401	0.007	6.035	0.019
2	AG0	2.866	2.524	0.010	5.948	0.018
3	AG0	2.895	3.073	0.013	5.993	0.018
4	AG0	1.970	2.295	0.011	6.129	0.058
8	AG0	3.095	2.796	0.010	5.933	0.003
9	AG0	2.472	2.964	0.013	6.087	0.045
12	AG0	2.744	2.609	0.005	5.687	0.010
13	AG0	3.147	2.830	0.008	5.917	0.004
14	AG0	3.035	3.112	0.012	6.083	0.007
15	AG0	2.665	3.010	0.017	5.807	0.035
16	AG0	2.173	3.237	0.017	6.170	0.103
22	AG0	3.037	2.733	0.008	5.836	0.006
23	AG0	3.088	3.035	0.009	6.015	0.006
24	AG0	2.828	3.006	0.016	5.896	0.009
25	AG0	2.430	3.149	0.015	5.834	0.072
128	AG1	2.543	2.605	0.011	6.027	0.026
130	AG1	2.252	2.721	0.014	5.955	0.029
131	AG1	2.979	2.905	0.005	6.021	0.002
132	AG1	2.281	2.544	0.013	6.058	0.035
136	AG1	2.723	2.917	0.008	5.953	0.013
137	AG1	2.696	2.777	0.008	6.029	0.018
140	AG1	2.755	3.206	0.019	5.996	0.058
141	AG1	2.900	2.803	0.014	5.656	0.007
142	AG1	3.198	2.843	0.013	5.983	0.004
143	AG1	3.094	2.734	0.009	5.878	0.006
144	AG1	2.766	2.311	0.022	5.647	0.045
150	AG1	2.716	2.871	0.016	5.481	0.010
151	AG1	3.100	2.832	0.013	5.910	0.005
152	AG1	3.218	2.849	0.010	5.964	0.006
153	AG1	2.877	2.460	0.018	5.740	0.014



4cm²-averaged PD for the selected beams on non-selected surfaces for Δ_{min} determination

Band	antenna module	Beam ID 1	Beam ID 2	Frequency (GHz)	Exposure Surface	Input power limit (dB)	Test separation	modulation	Sporton Measured results Savg tot 4cm ² (W/m ²)
N260	1	29	-	38.5	Back	4.1	2 mm	CW	2.66
	1	18	-	38.5	Right Side	4.3	2 mm	CW	0.355
	1	29	-	38.5	Top Side	4.1	2 mm	CW	0.445
	2	16	-	38.5	Back	3.9	2 mm	CW	2.92
	2	-	131	38.5	Left Side	7.0	2 mm	CW	0.415
	2	22	-	38.5	Top Side	4.1	2 mm	CW	0.271
N261	1	-	138	27.925	Back	5.9	2 mm	CW	2.98
	1	-	149	27.925	Right Side	5.3	2 mm	CW	0.486
	1	21	-	27.925	Top Side	4.2	2 mm	CW	0.328
	2	16	-	27.925	Back	6.2	2 mm	CW	2.69
	2	-	144	27.925	Left Side	4.8	2 mm	CW	0.488
	2	16	-	27.925	Top Side	6.2	2 mm	CW	0.154

4.7 PD Char

This section describes the PD char generation that complies with the *PD_design_target* and is in compliance with the regulatory power density limit.

4.7.1 PD char generation

Ideally, if there is no uncertainty associated with hardware as described in Section 4.4, after accounting for the housing influence (Δ_{min}), *input.power.limit(i)*, for beam *i* can be obtained:

$$input.power.limit(i) = 6\text{ dBm} + 10 * \log(s(i)) + \Delta_{min}, i \in \text{all beams} \quad (11)$$

If simulation overestimates the housing influence, then Δ_{min} (= minimum {simulated PD – measured PD}) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates loss, then Δ_{min} is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

In reality, the hardware design has uncertainty which must be properly considered in equation (11). In Section 4.7, the TxAGC uncertainty at reference power level (6dBm in report) is embedded in the process of Δ_{min} determination and should be removed to avoid double counting this uncertainty.

If -TxAGC uncertainty at reference power level < Δ_{min} < TxAGC uncertainty at reference power level,

$$Input.power.limit(i) = sim.power_{limit}(i), i = 1,2,...,N \quad (12)$$

else if Δ_{min} < -TxAGC uncertainty at reference power level,

$$Input.power.limit(i) = sim.power_{limit}(i) + (\Delta_{min} + TxAGC\ uncertainty), i = 1,2,...,N \quad (13)$$

else if Δ_{min} > TxAGC uncertainty at reference power level,

$$Input.power.limit(i) = sim.power_{limit}(i) + (\Delta_{min} - TxAGC\ uncertainty), i = 1,2,...,N \quad (14)$$

The input power limit is derived and listed in the table below

Band	Antenna Module	Polarization	Δ_{min} (dB)	TxAGC uncertainty (dB)	Input.power.limit (dBm)
n260	1	AG0	2.02	0.5	$6 + 10 * \log(s(i)) + 1.52$
		AG1	1.89	0.5	$6 + 10 * \log(s(i)) + 1.35$
	2	AG0	2.58	0.5	$6 + 10 * \log(s(i)) + 2.08$
		AG1	2.69	0.5	$6 + 10 * \log(s(i)) + 2.19$
n261	1	AG0	2.04	0.5	$6 + 10 * \log(s(i)) + 1.54$
		AG1	1.93	0.5	$6 + 10 * \log(s(i)) + 1.43$
	2	AG0	3.19	0.5	$6 + 10 * \log(s(i)) + 2.60$
		AG1	2.88	0.5	$6 + 10 * \log(s(i)) + 2.38$



4.7.2 PD char Table

Combining the information in previous sections, PD char is derived and listed below

N260 Antenna Module	Bean ID 1	Beam I2	Input power limit (dBm)
1	1		8.61
1	5		6.16
1	6		6.83
1	7		6.26
1	10		5.69
1	11		6.14
1	17		3.98
1	18		4.34
1	19		4.01
1	20		3.80
1	21		4.03
1	26		3.93
1	27		4.29
1	28		3.23
1	29		4.06
1		129	8.70
1		133	6.12
1		134	6.16
1		135	5.58
1		138	5.99
1		139	5.90
1		145	3.83
1		146	4.03
1		147	4.34
1		148	4.06
1		149	3.88
1		154	3.73
1		155	4.44
1		156	4.26
1		157	4.11
1	1	129	5.17
1	5	135	3.36
1	6	133	2.66
1	7	134	2.52
1	10	139	2.58
1	11	138	2.35
1	17	148	0.57
1	18	147	1.07
1	19	146	0.77
1	20	149	0.45
1	21	145	0.46
1	26	156	0.55
1	27	155	1.04
1	28	154	0.41
1	29	157	0.67



N260	Beam ID 1	Beam I2	Input power limit (dBm)
Antenna Module			
2	0		8.54
2	2		5.88
2	3		7.14
2	4		5.97
2	8		6.53
2	9		6.35
2	12		4.00
2	13		4.11
2	14		4.30
2	15		3.93
2	16		3.90
2	22		4.10
2	23		4.38
2	24		4.05
2	25		3.90
2		128	9.18
2		130	6.45
2		131	6.95
2		132	6.15
2		136	6.43
2		137	6.39
2		140	4.29
2		141	4.30
2		142	4.81
2		143	4.48
2		144	4.29
2		150	4.24
2		151	4.77
2		152	4.64
2		153	4.30
2	0	128	6.06
2	2	130	3.00
2	3	131	3.55
2	4	132	2.72
2	8	137	3.12
2	9	136	3.32
2	12	144	0.79
2	13	143	1.08
2	14	142	1.40
2	15	141	0.90
2	16	140	0.50
2	22	153	0.87
2	23	152	1.28
2	24	151	1.14
2	25	150	0.70



N261	Beam ID 1	Beam I2	Input power limit (dBm)
Antenna Module			
1	1		8.67
1	5		6.46
1	6		6.21
1	7		5.99
1	10		6.21
1	11		6.38
1	17		3.40
1	18		3.20
1	19		3.19
1	20		3.36
1	21		4.18
1	26		3.21
1	27		3.19
1	28		3.15
1	29		3.68
1		129	8.39
1		133	6.05
1		134	5.78
1		135	6.26
1		138	5.89
1		139	5.93
1		145	3.47
1		146	3.44
1		147	3.35
1		148	3.51
1		149	5.26
1		154	3.42
1		155	3.28
1		156	3.29
1		157	4.12
1	1	129	5.34
1	5	133	3.06
1	6	134	2.74
1	7	135	3.11
1	10	138	2.79
1	11	139	2.78
1	17	145	-0.16
1	18	146	-0.18
1	19	147	-0.07
1	20	148	-0.14
1	21	149	1.20
1	26	154	-0.33
1	27	155	-0.12
1	28	156	-0.18
1	29	157	0.28




N261	Beam ID 1	Beam I2	Input power limit (dBm)
Antenna Module			
2	0		10.58
2	2		7.22
2	3		7.28
2	4		7.61
2	8		7.09
2	9		7.49
2	12		4.46
2	13		4.16
2	14		4.23
2	15		4.51
2	16		6.20
2	22		4.12
2	23		4.28
2	24		4.17
2	25		5.11
2		128	10.28
2		130	7.37
2		131	6.58
2		132	7.20
2		136	6.97
2		137	6.77
2		140	6.21
2		141	4.18
2		142	4.19
2		143	4.00
2		144	4.81
2		150	4.65
2		151	3.99
2		152	4.10
2		153	4.26
2	0	128	8.86
2	2	130	3.82
2	3	131	3.50
2	4	132	4.00
2	8	136	3.62
2	9	137	3.70
2	12	140	1.77
2	13	141	0.80
2	14	142	0.87
2	15	143	0.93
2	16	144	1.70
2	22	150	1.07
2	23	151	0.92
2	24	152	0.84
2	25	153	1.09

5. PD Test Setup

5.1 PD Test – System Setup

The system to be used for the near field power density measurement


- SPEAG DASY6 system
 - SPEAG cDASY6 5G module software
 - EUmmWVx probe
- 5G Phantom cover

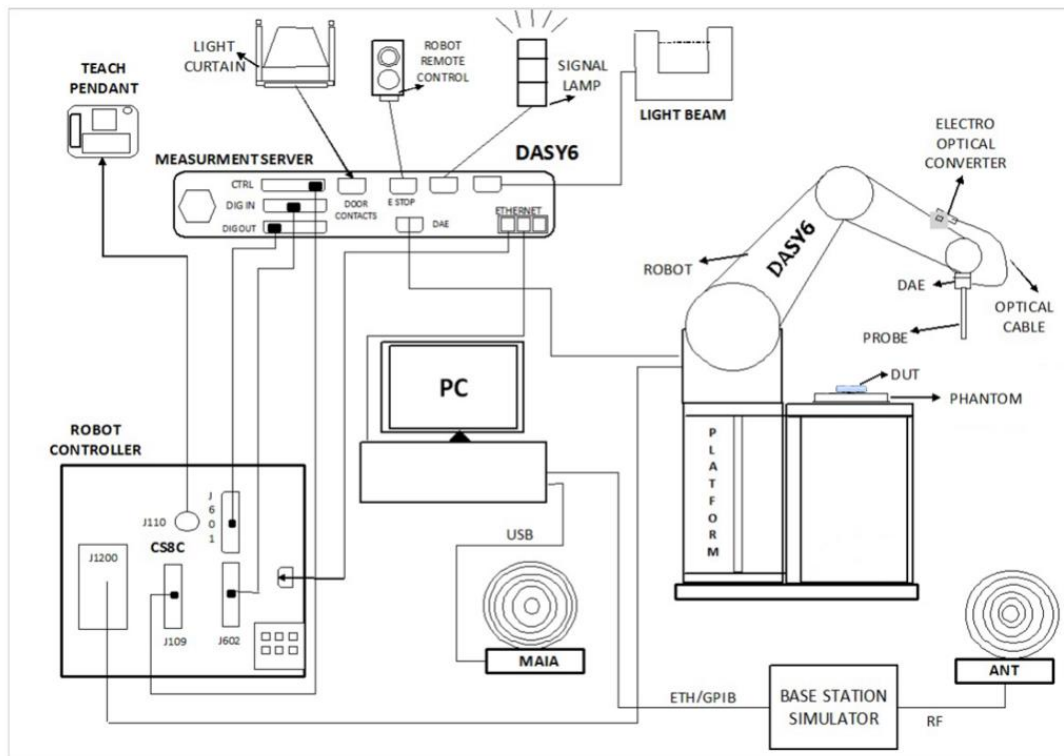

5.2 E UmmWave Probe / E-Field 5G Probe


The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.

Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

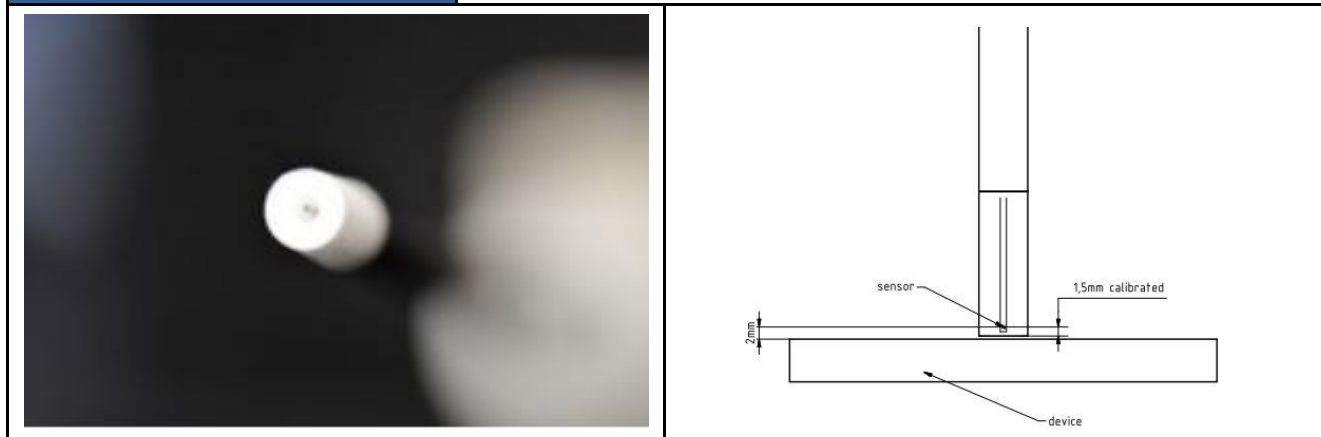

5.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

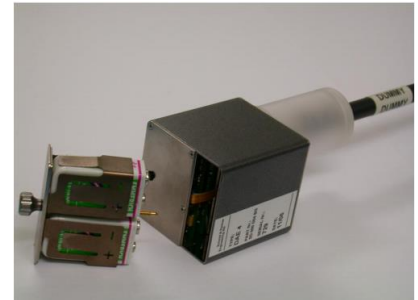

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

5.4 Scan configuration


Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.

5.5 System Verification Source

The System Verification sources at 30 GHz and above comprise horn-antennas and very stable signal generators.

Model	Ka-band horn antenna
Calibrated frequency:	30 GHz at 10mm from the case surface
Frequency accuracy	± 100 MHz
E-field polarization	linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	00 x 100 x 100 mm
Weight	1 kg

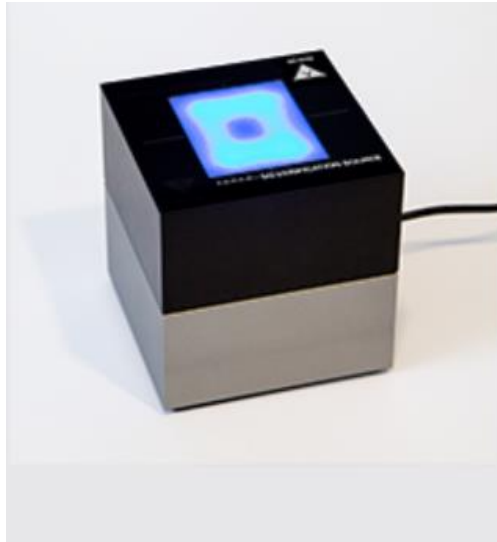



5.6 Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66B of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	0.25 ($\frac{\lambda}{4}$)	120/120	16 × 16
30	0.25 ($\frac{\lambda}{4}$)	60/60	24 × 24
60	0.25 ($\frac{\lambda}{4}$)	32.5/32.5	26 × 26
90	0.25 ($\frac{\lambda}{4}$)	30/30	36 × 36

Settings for measurement of verification sources

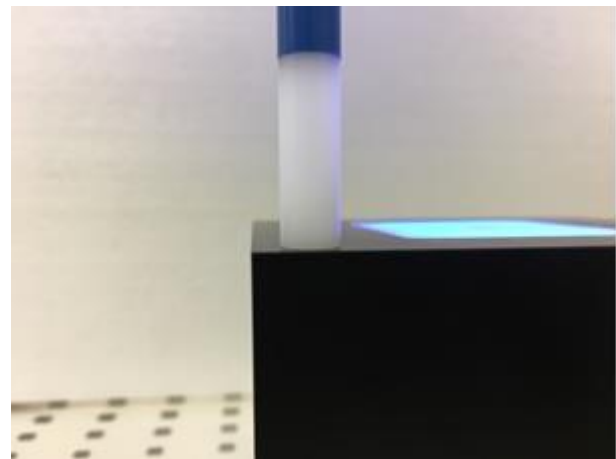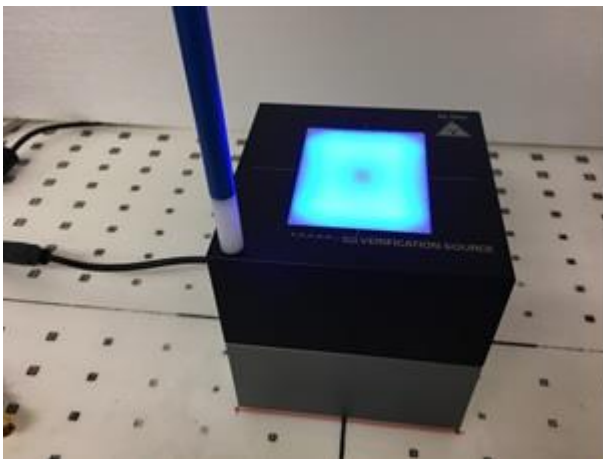

Verification Setup photo



6. Uncertainty Assessment

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

Preliminary Module mmWave Uncertainty Budget						
Evaluation Distances to the Antennas $> \lambda / 2\pi$						
Error Description	Uncertainty Value (\pm dB)	Probability	Divisor	(Ci)	Standard Uncertainty (\pm dB)	(Vi) Veff
Measurement System						
Probe Calibration	0.49	N	1	1	0.49	∞
Hemispherical Isotropy	0.50	R	1.732	1	0.29	∞
Linearity	0.20	R	1.732	0	0.12	∞
System Detection Limits	0.04	R	1.732	1	0.02	∞
Modulation Response	0.40	R	1.732	1	0.23	∞
Readout Electronics	0.03	N	1	1	0.03	∞
Response Time	0.00	R	1.732	1	0.00	∞
Integration Time	0.00	R	1.732	1	0.00	∞
RF Ambient Noise	0.2	R	1.732	1	0.12	∞
RF Ambient Reflections	0.21	R	1.732	1	0.12	∞
Probe Positioner	0.04	R	1.732	1	0.02	∞
Probe Positioning	0.30	R	1.732	1	0.17	∞
S _{avg} Reconstruction	0.60	R	1.732	1	0.35	∞
Test Sample Related						
Power Drift	0.2	R	1.732	1	0.12	∞
Input Power	0	N	1	0	0.00	∞
Combined Std. Uncertainty					0.76 dB	∞
Coverage Factor for 95 %					K=2	
Expanded STD Uncertainty					1.52 dB	